



Appendix Test Data for SRD (Conducted Measurement)

Product Name: Remote Control Car

Trade Mark: /

Test Model: KF13

FCC ID: 2AROI-KF13

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2416	0.740	2415.632	2416.372	0.5	PASS
SRD	Ant1	2440	0.796	2439.592	2440.388	0.5	PASS
SRD	Ant1	2475	0.720	2474.640	2475.360	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

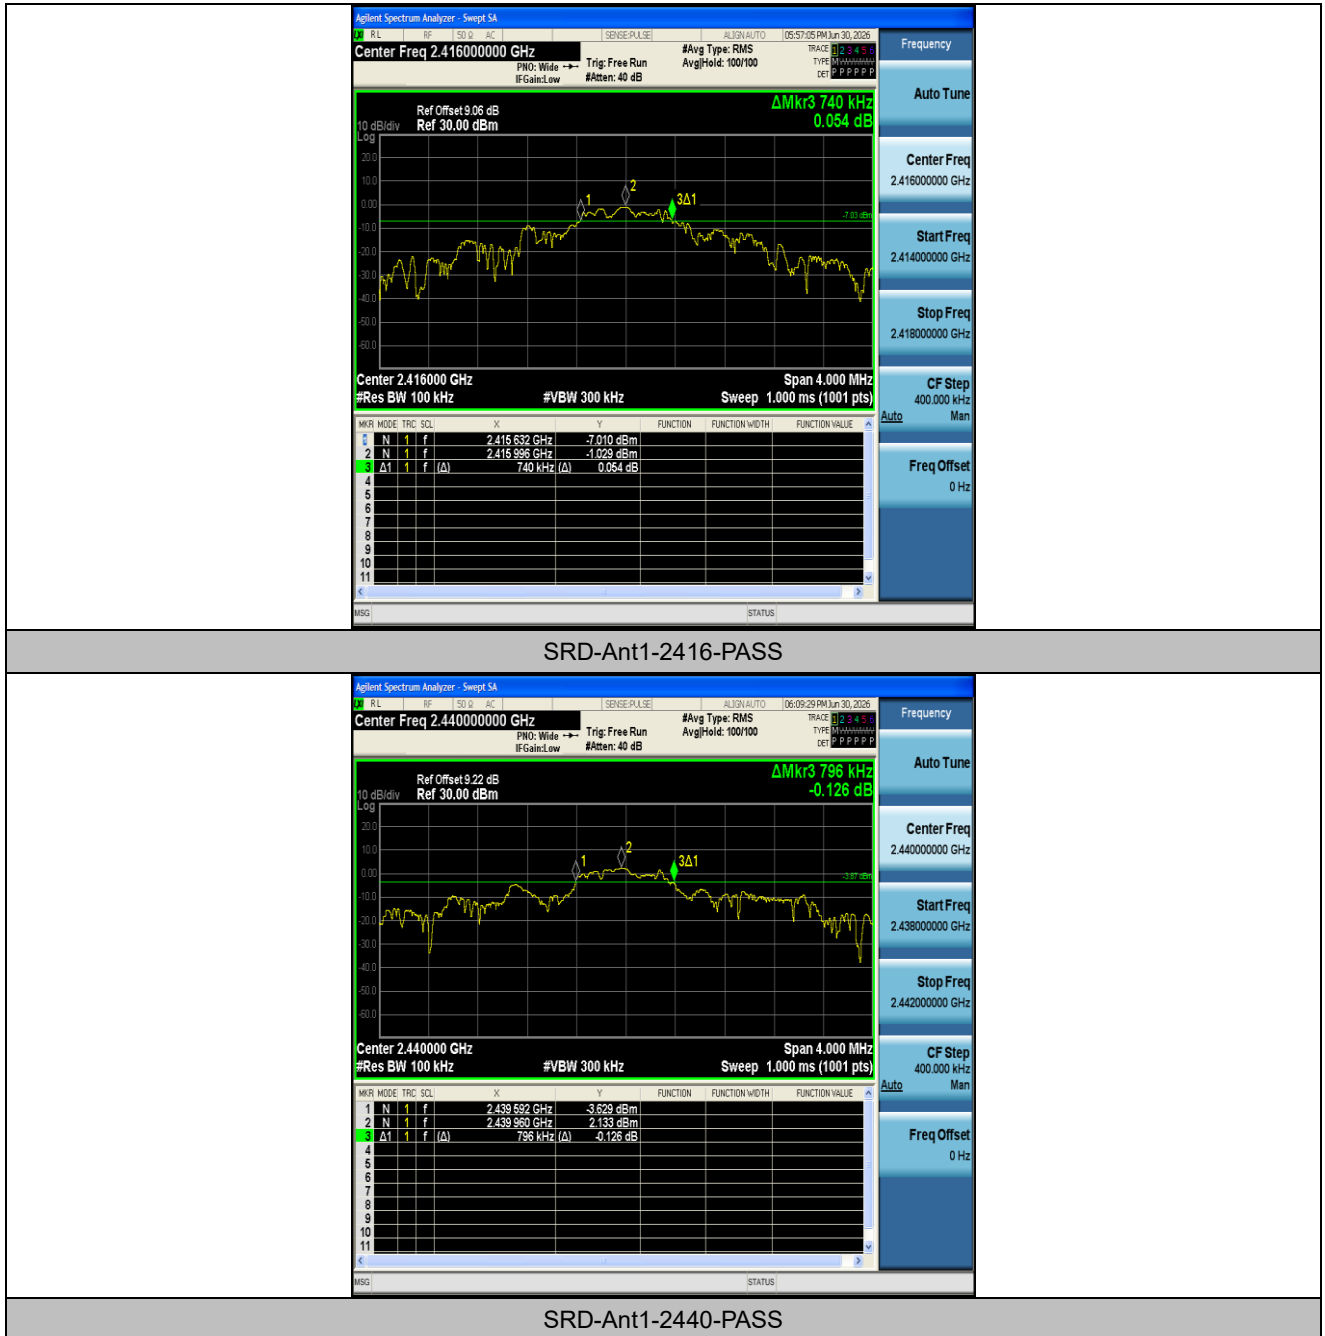



SRD-Ant1-2475-PASS





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2416	2.4700	2414.7543	2417.2243	---	---
SRD	Ant1	2440	3.3270	2437.9281	2441.2551	---	---
SRD	Ant1	2475	1.4521	2474.3131	2475.7652	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs







Appendix C: Maximum peak conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
SRD	Ant1	2416	-0.78	≤30	PASS
SRD	Ant1	2440	2.29	≤30	PASS
SRD	Ant1	2475	1.96	≤30	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs Peak

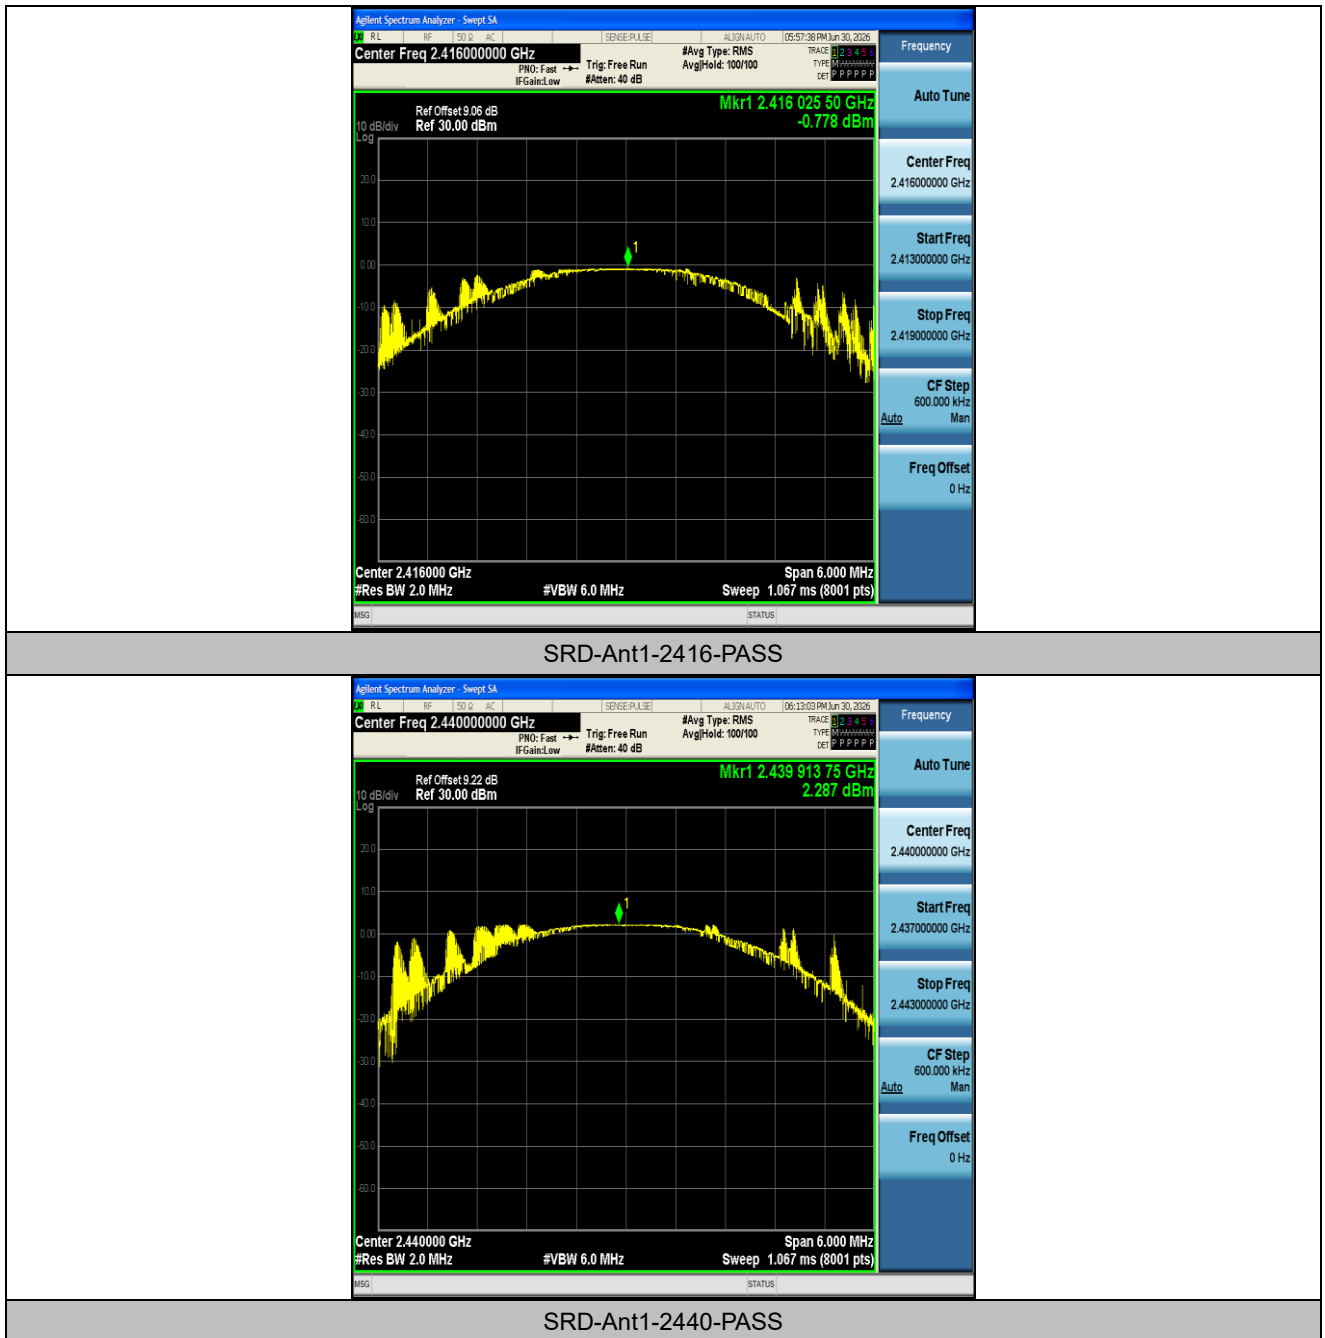

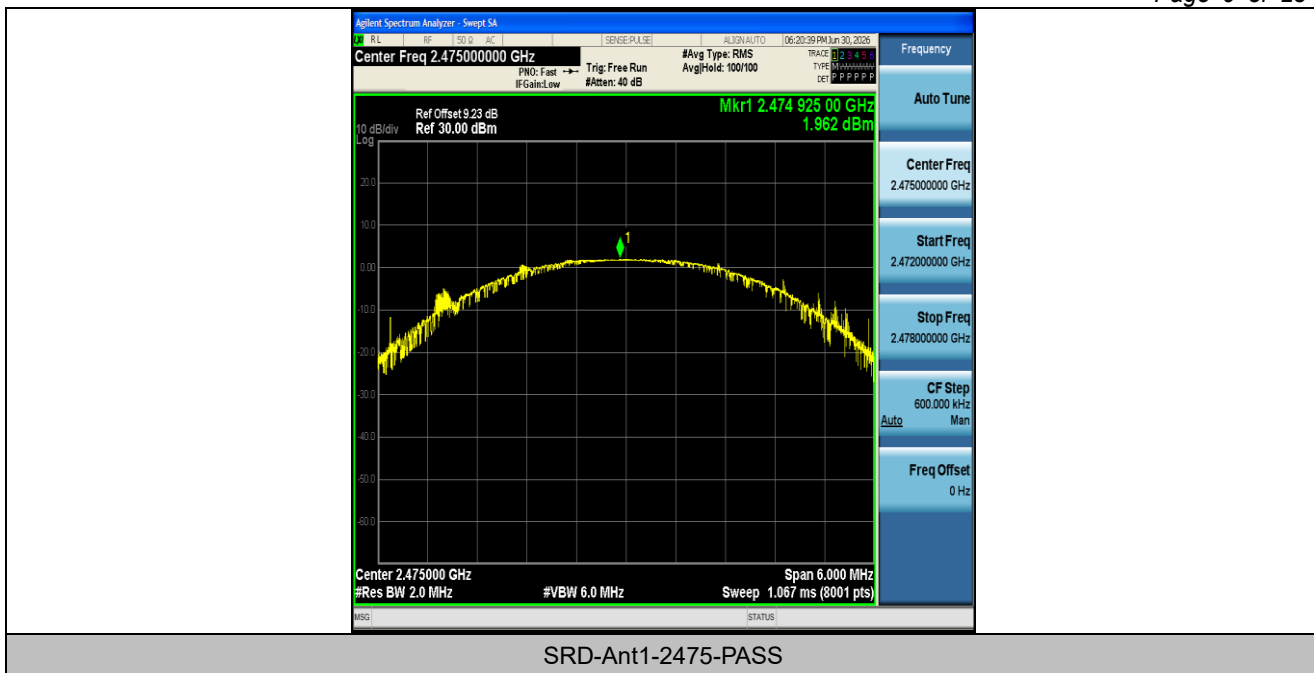



Appendix D: Maximum peak power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
SRD	Ant1	2416	-4.86	≤8.00	PASS
SRD	Ant1	2440	-2.17	≤8.00	PASS
SRD	Ant1	2475	-1.64	≤8.00	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

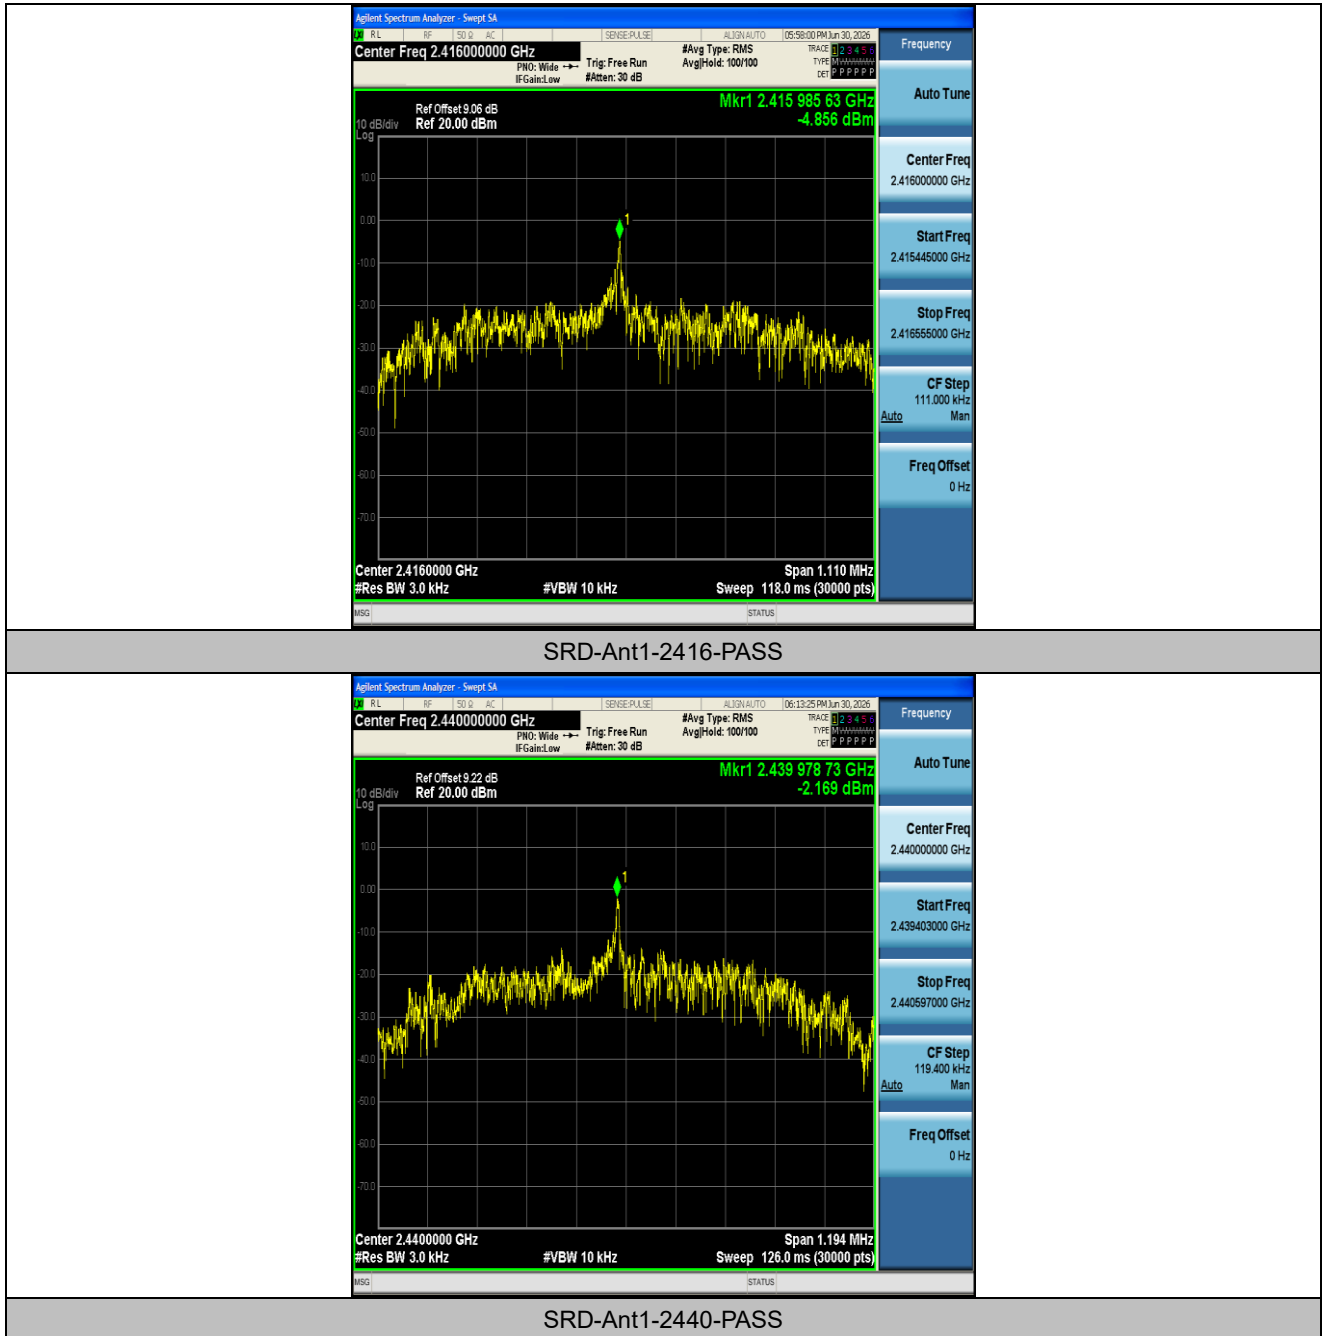

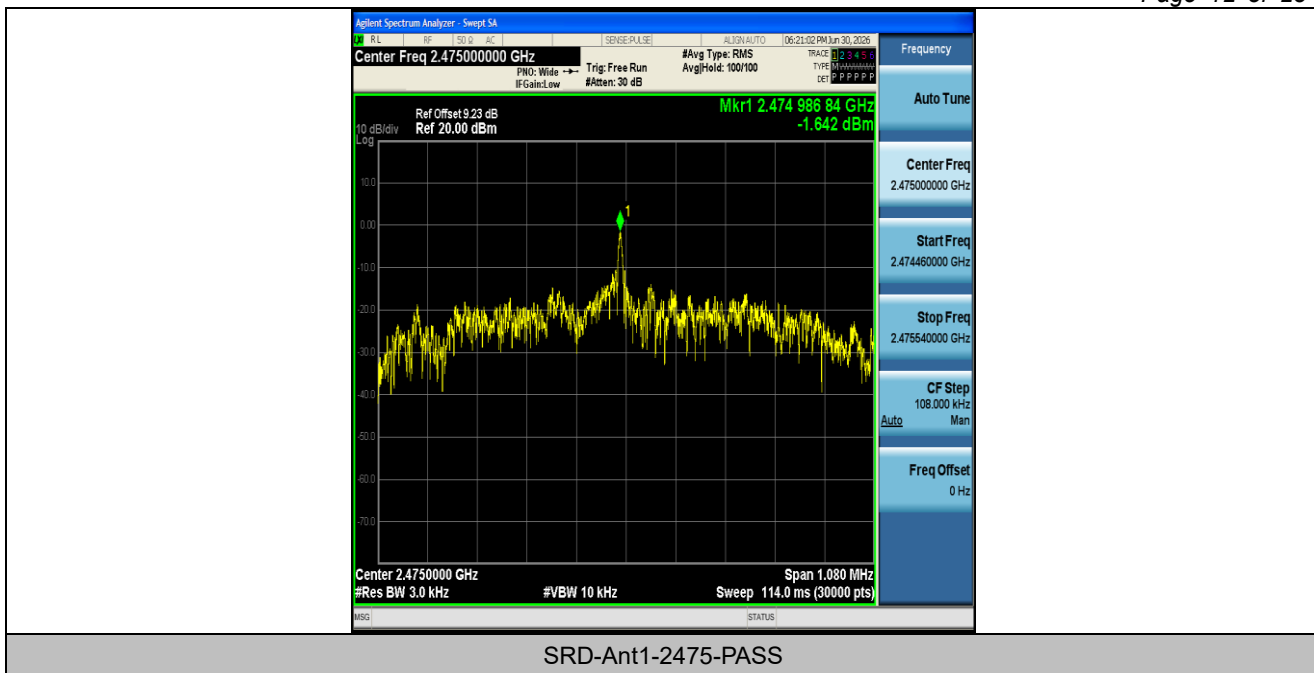



Appendix E: Band edge measurements

Test Result


Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	Low	2416	-1.03	-48.46	≤ -21.03	PASS
SRD	Ant1	High	2475	1.71	-40.74	≤ -18.29	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

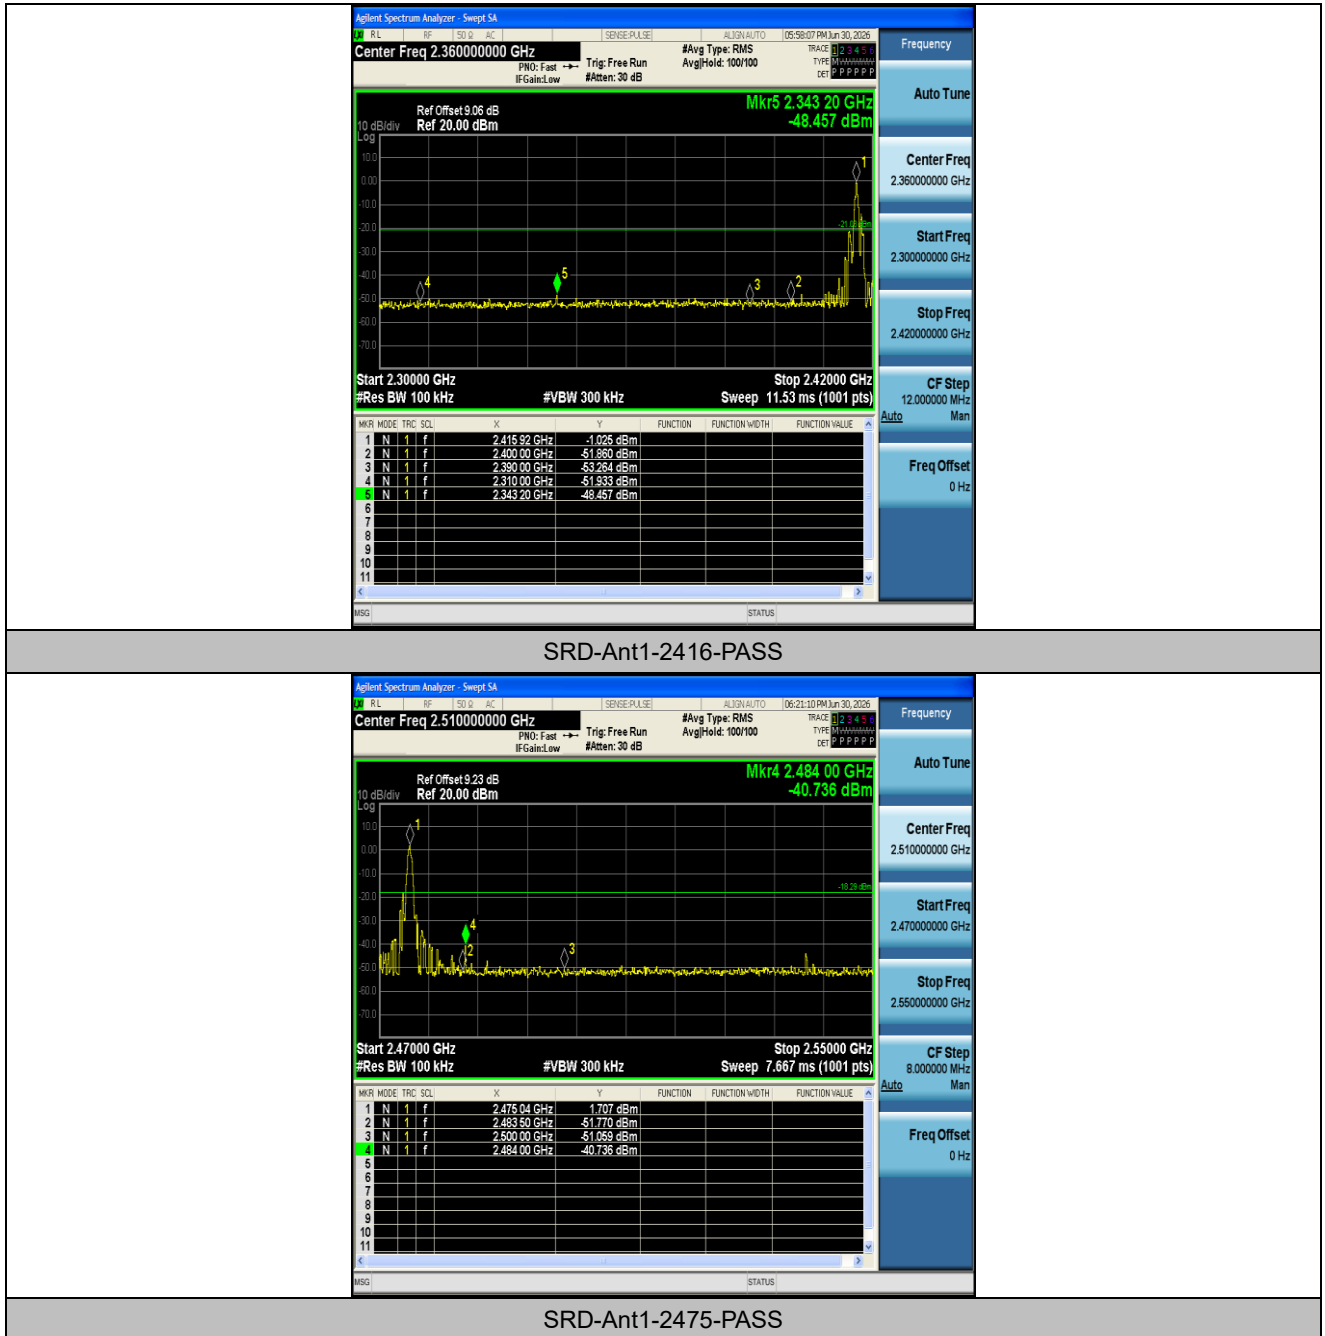



Appendix F: Conducted Spurious Emission

Test Result

Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	2416	0~Reference	-0.99	-0.99	---	PASS
SRD	Ant1	2416	30~1000	-0.99	-62.86	≤-20.99	PASS
SRD	Ant1	2416	1000~26500	-0.99	-37.52	≤-20.99	PASS
SRD	Ant1	2440	0~Reference	0.42	0.42	---	PASS
SRD	Ant1	2440	30~1000	0.42	-62.84	≤-19.58	PASS
SRD	Ant1	2440	1000~26500	0.42	-36.91	≤-19.58	PASS
SRD	Ant1	2475	0~Reference	0.37	0.37	---	PASS
SRD	Ant1	2475	30~1000	0.37	-61.8	≤-19.63	PASS
SRD	Ant1	2475	1000~26500	0.37	-37.42	≤-19.63	PASS

Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.






Test Graphs




SRD-Ant1-2416-0~Reference-PASS

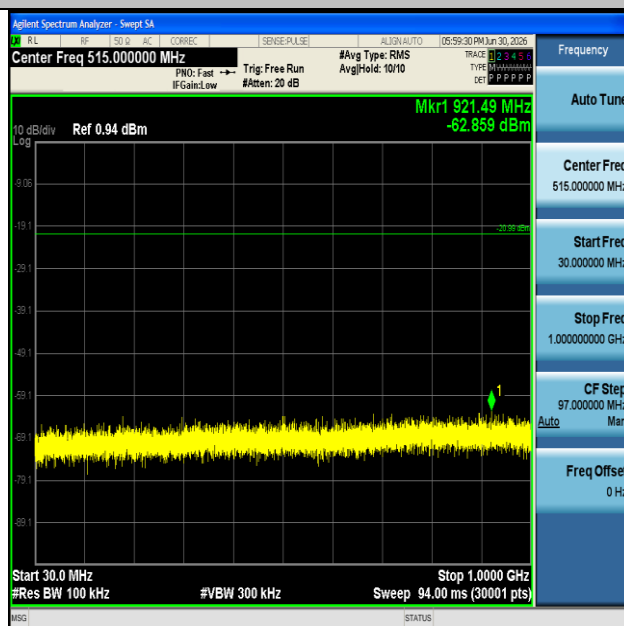

SRD-Ant1-2416-30~1000-PASS



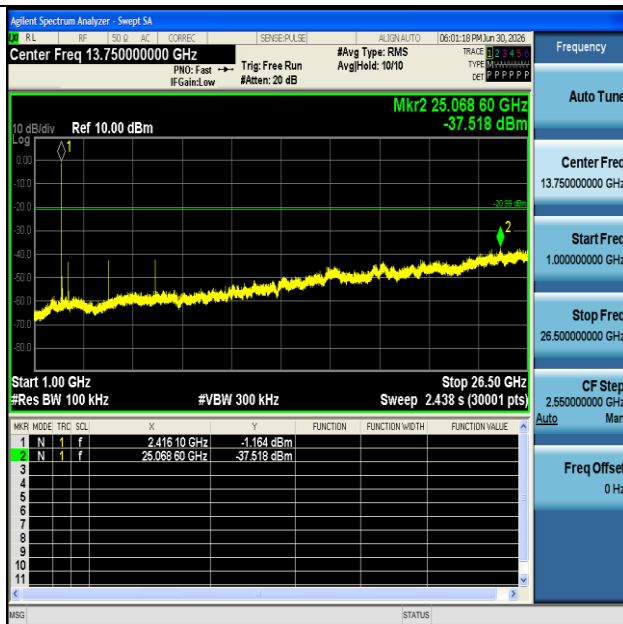


SRD-Ant1-2416-1000~26500-PASS




SRD-Ant1-2440-0~Reference-PASS



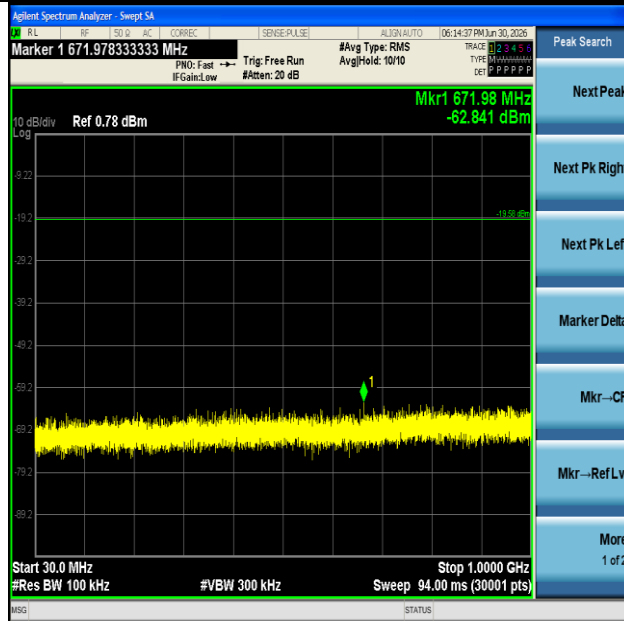

SRD-Ant1-2440-30~1000-PASS

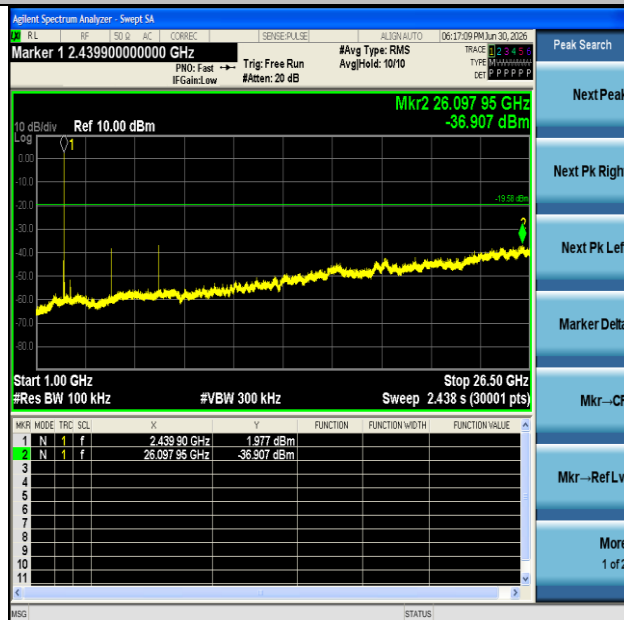


SRD-Ant1-2440-1000~26500-PASS






SRD-Ant1-2475-0~Reference-PASS

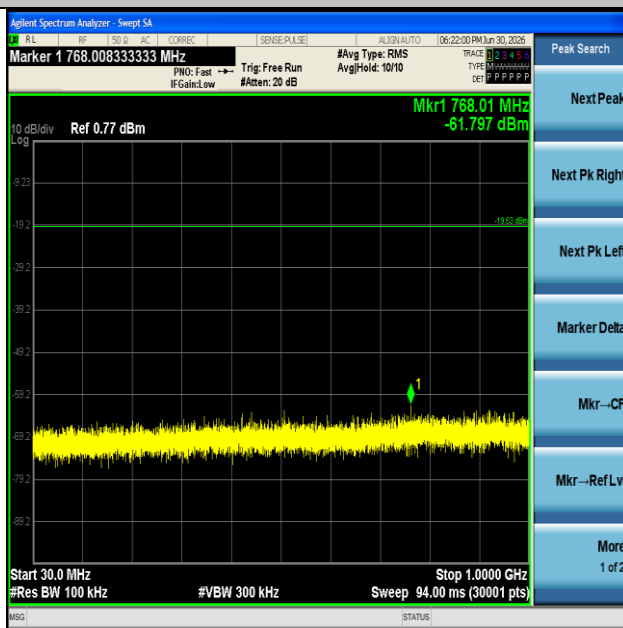

SRD-Ant1-2475-30~1000-PASS



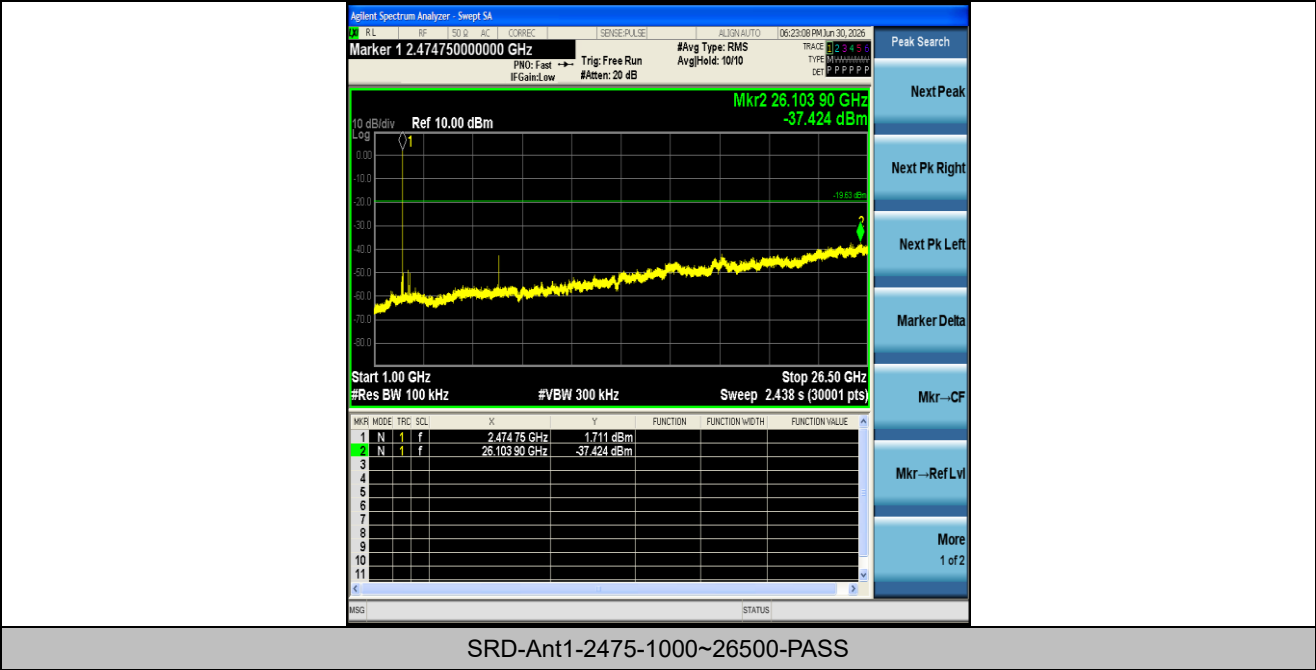

SRD-Ant1-2475-1000~26500-PASS





Appendix G: Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
SRD	Ant1	2416	0.47	7.16	6.56	11.83
SRD	Ant1	2440	0.47	7.24	6.49	11.88
SRD	Ant1	2475	0.47	7.26	6.47	11.89


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

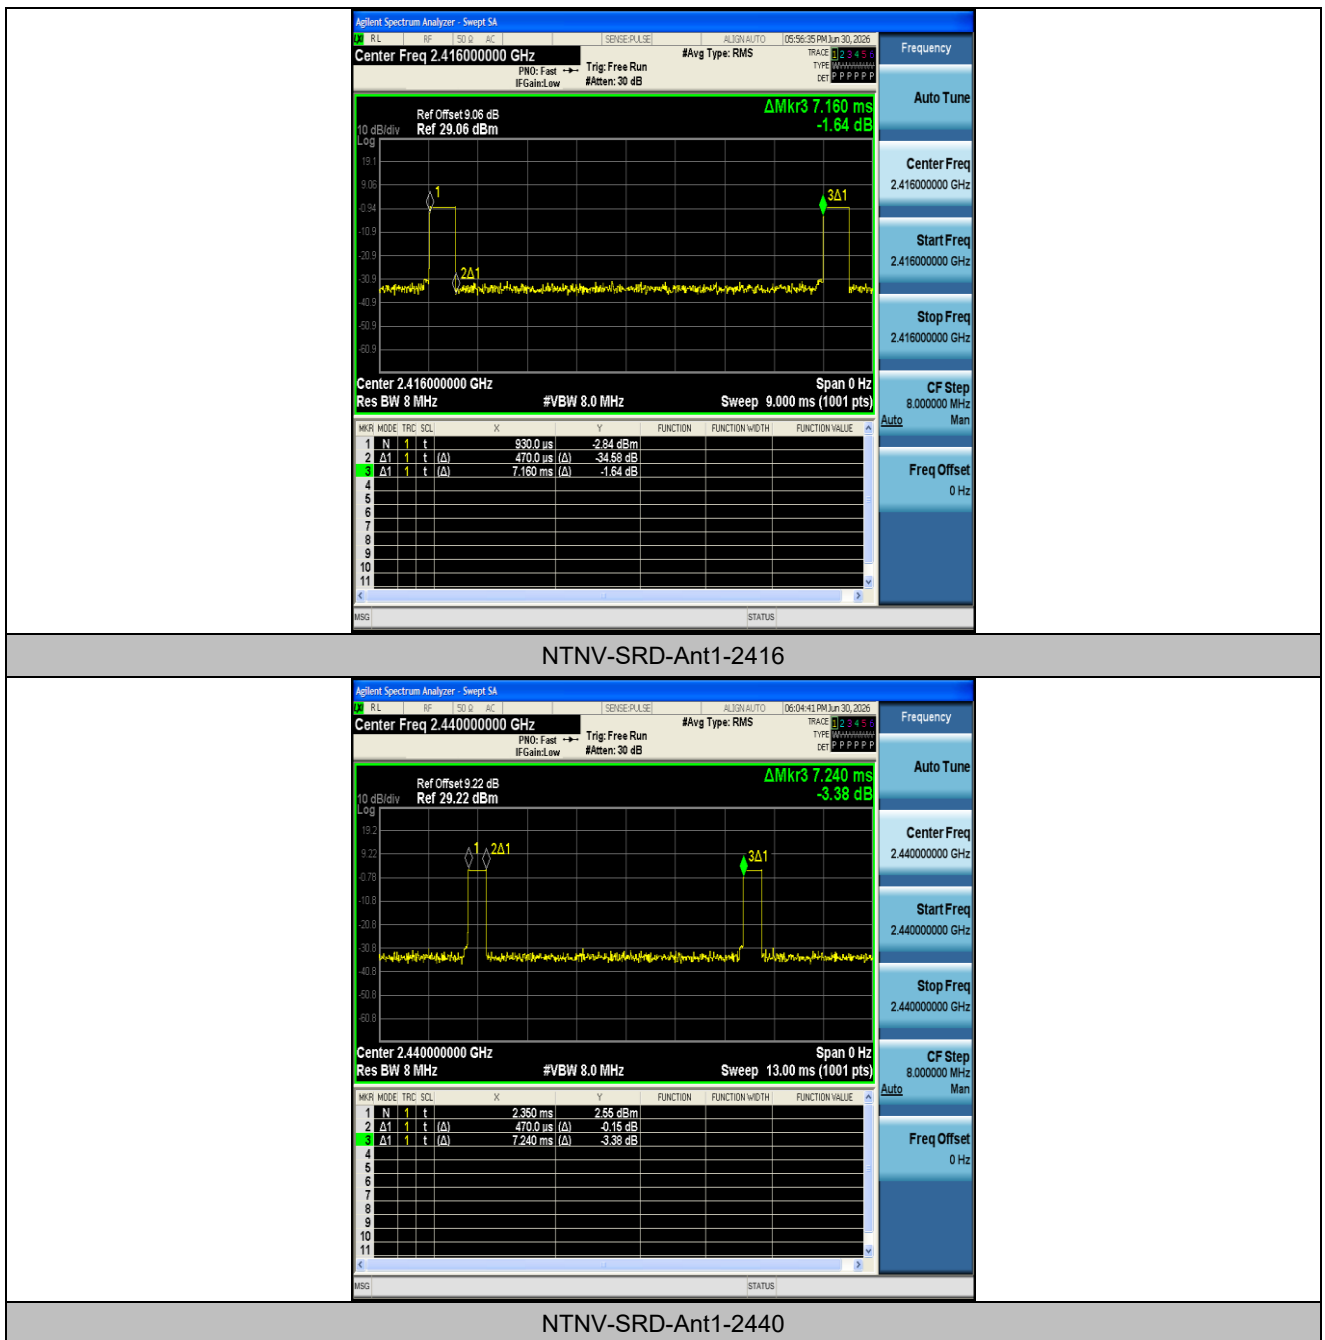

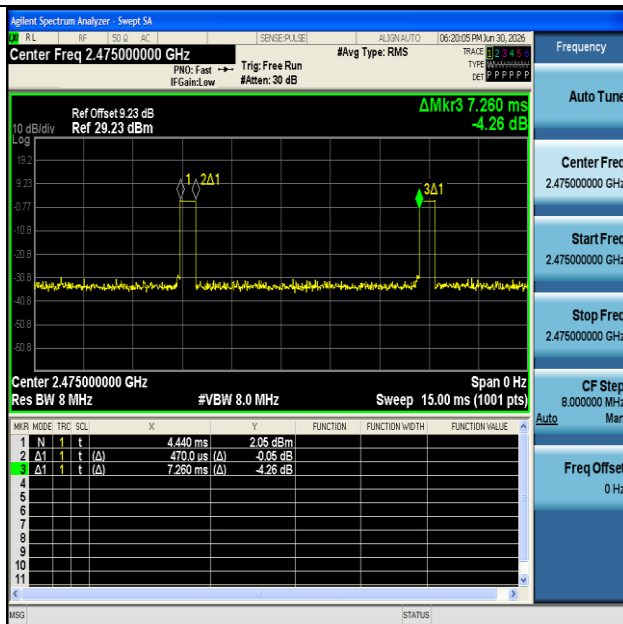

NTNV-SRD-Ant1-2475

