



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

Xiamen Mairdi Electronic Technology Co., Ltd

Unit402, Building B, No.26 Xiangyue Road, Torch(Xiangan) Industrial Park, Xiamen , China

FCC ID: 2ARQZ-M800BT

Report Type: Original Report	Product Name: Wireless Communication Headset
Report Number: RXM181108051-00B	
Report Date: 2018-11-30	
Reviewed By:	Dean Lau RF Supervisor <i>Dean Lau</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
SUPPORT CABLE LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	11
FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	14
FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31

TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(e) - POWER SPECTRAL DENSITY	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Wireless Communication Headset
EUT Model:	M800BTD
Multiple Models:	M800BT, M890BT, M890BTD
FCC ID:	2ARQZ-M800BT
Rated Input Voltage:	DC 3.7V from battery or DC 5V from USB port
External Dimension:	Headset: 157.1mm(L)*166.5mm(W)*49.3mm(H) Base: 74.7mm(L)*74.7mm(W)*52mm(H)
Serial Number:	181108051
EUT Received Date:	2018.11.08

Note: The series product, models are electrically identical, we selected M800BTD for testing. The difference between them was explained in the declaration letter.

Objective

This report is prepared on behalf of *Xiamen Mairdi Electronic Technology Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ARQZ-M800BT.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications


No modification was made to the EUT tested.

EUT Exercise Software

Test software: 'Bluetest3 V2.5.0' was used in test and the system configured maximum power level as default setting.

The duty cycle as below:

T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
0.462	0.654	70.64

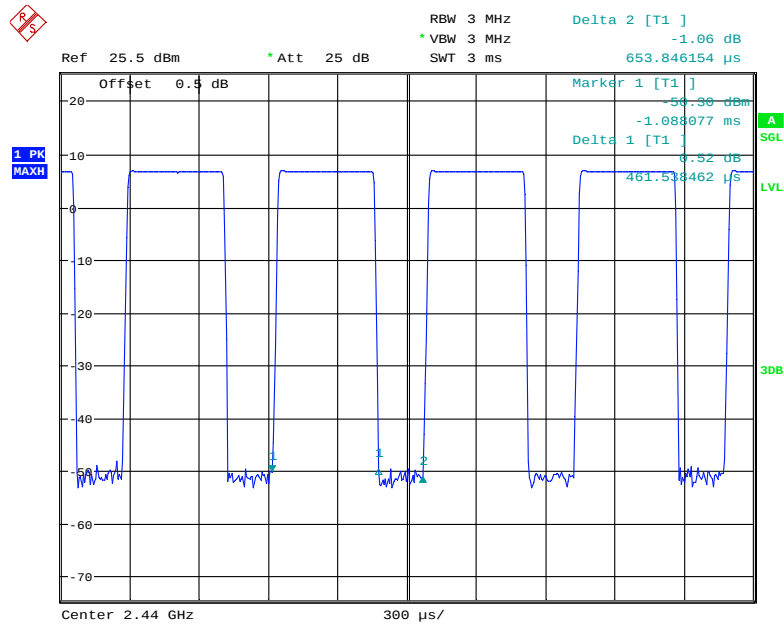

Date: 29.NOV.2018 01:28:22

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Hunkey	Adapter	HKC0105020-9H	A10BF1784000004

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	No	No	1.5	adapter	EUT/Base

Block Diagram of Test Setup

With Base:

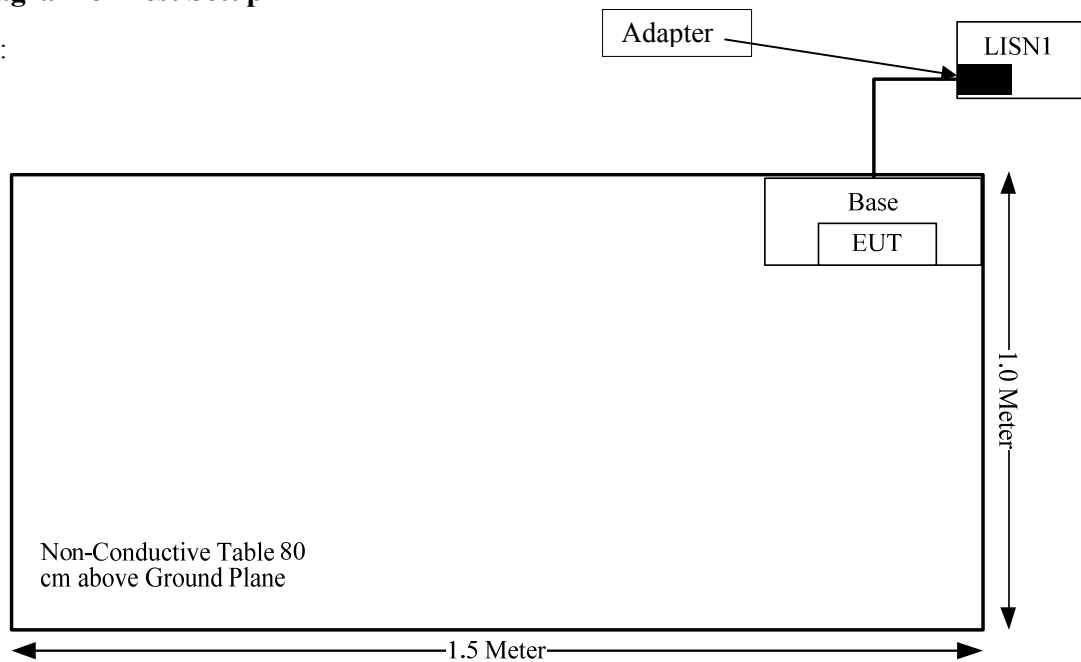

Without Base:

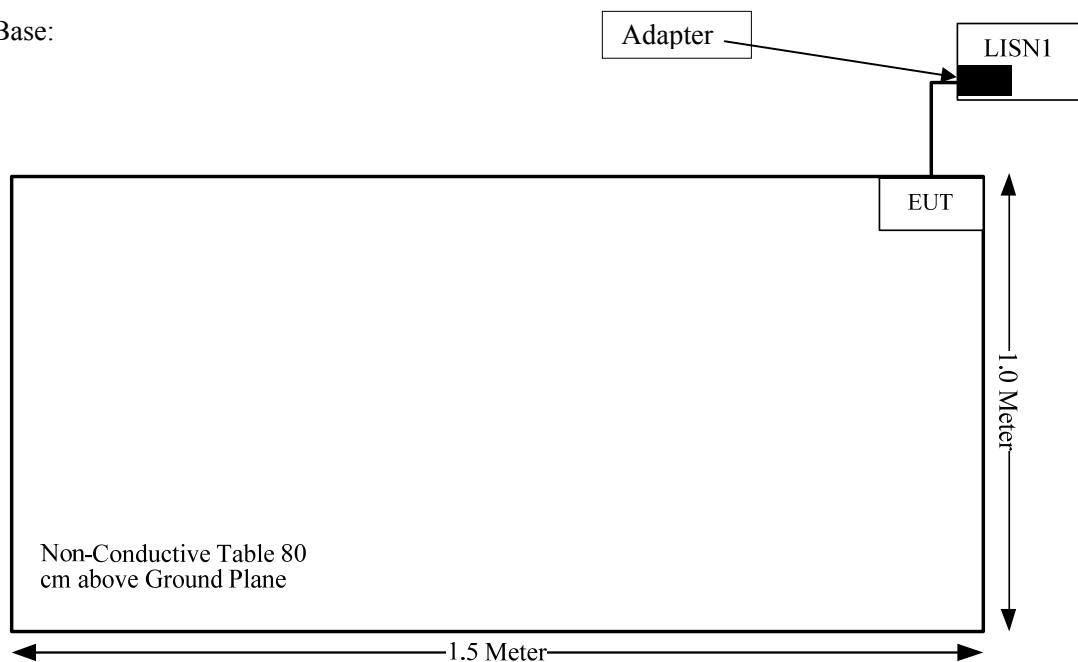

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

When an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to the following to determine the simultaneous transmission SAR test exclusion criteria: $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}/x]$ W/kg, for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

Measurement Result

The max conducted power including tune-up tolerance is 8.0 dBm (6.31 mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 $= 6.31 / 5 \cdot (\sqrt{2.480}) = 2.0 < 3.0$

So the SAR test is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Information And Connector Construction

The EUT has one PCB antenna arrangement for BT, and the antenna gain is -3.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

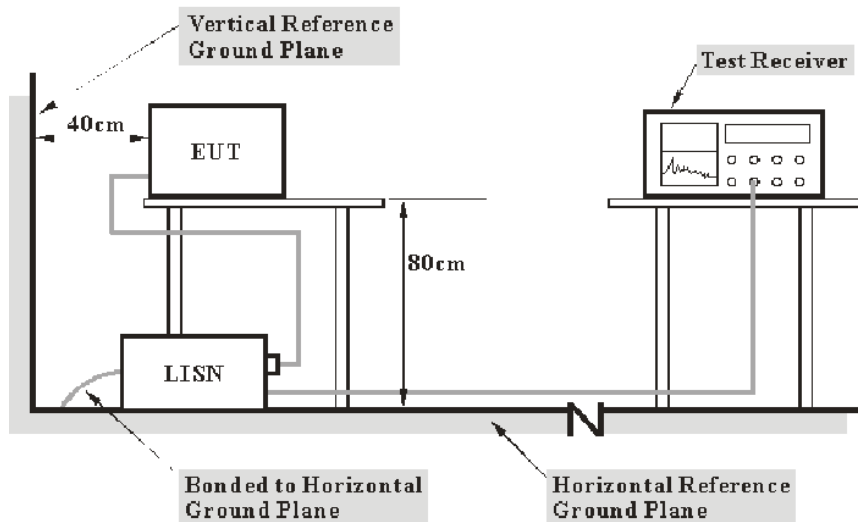

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	26.2 °C
Relative Humidity:	55 %
ATM Pressure:	99.9 kPa

The testing was performed by Ade Xiao on 2018-11-26.


Test Mode: Transmitting -with base:

AC120 V, 60 Hz, Line:

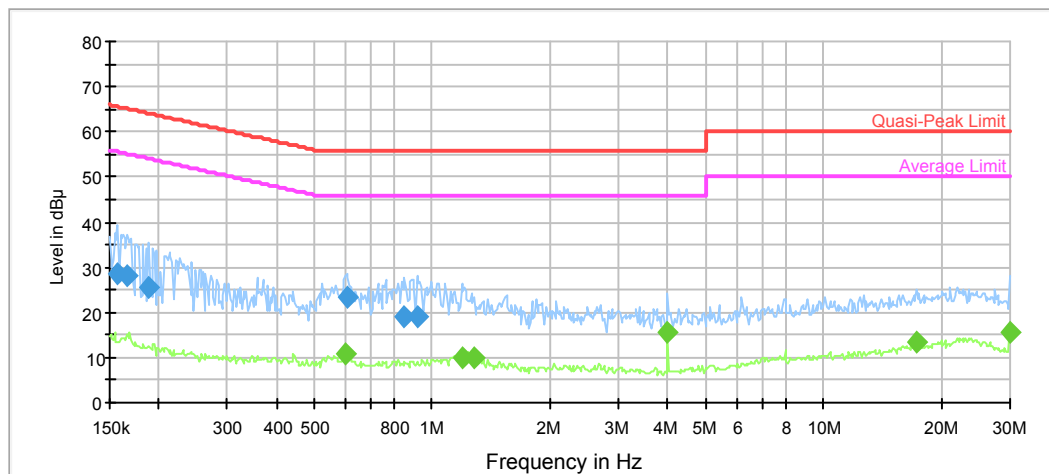

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.157346	28.7	9.000	L1	11.1	36.9	65.6	Compliance
0.166371	28.1	9.000	L1	11.0	37.0	65.1	Compliance
0.188994	25.7	9.000	L1	10.7	38.4	64.1	Compliance
0.604902	23.2	9.000	L1	9.8	32.8	56.0	Compliance
0.852094	19.1	9.000	L1	9.8	36.9	56.0	Compliance
0.915445	19.2	9.000	L1	9.8	36.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.600101	10.7	9.000	L1	9.8	35.3	46.0	Compliance
1.200302	9.8	9.000	L1	9.8	36.2	46.0	Compliance
1.279307	9.9	9.000	L1	9.8	36.1	46.0	Compliance
3.997889	15.7	9.000	L1	9.8	30.3	46.0	Compliance
17.320829	13.4	9.000	L1	10.0	36.6	50.0	Compliance
30.000000	15.5	9.000	L1	10.1	34.5	50.0	Compliance

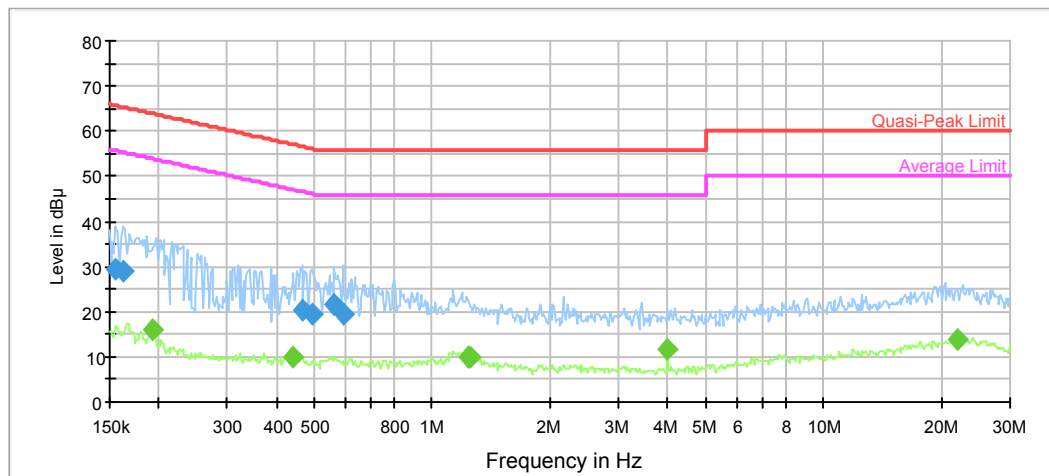
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154858	29.4	9.000	N	11.1	36.3	65.7	Compliance
0.162441	28.8	9.000	N	11.0	36.5	65.3	Compliance
0.465037	20.5	9.000	N	9.9	36.1	56.6	Compliance
0.491712	19.5	9.000	N	9.9	36.6	56.1	Compliance
0.563041	21.8	9.000	N	9.8	34.2	56.0	Compliance
0.590613	19.4	9.000	N	9.8	36.6	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.192030	16.0	9.000	N	10.7	38.0	54.0	Compliance
0.443327	10.0	9.000	N	9.9	37.0	47.0	Compliance
1.239175	9.8	9.000	N	9.8	36.2	46.0	Compliance
1.249088	10.0	9.000	N	9.8	36.0	46.0	Compliance
3.997889	11.7	9.000	N	9.8	34.3	46.0	Compliance
21.998074	13.7	9.000	N	10.0	36.3	50.0	Compliance


Without base:

AC120 V, 60 Hz, Line:

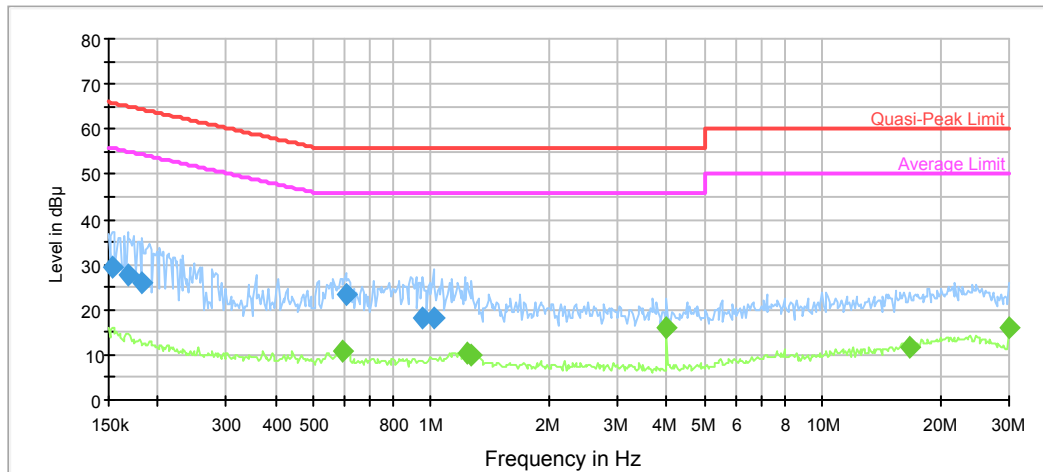

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.153629	29.4	9.000	L1	11.1	36.4	65.8	Compliance
0.167702	27.5	9.000	L1	10.9	37.6	65.1	Compliance
0.183065	26.1	9.000	L1	10.8	38.2	64.3	Compliance
0.604902	23.3	9.000	L1	9.8	32.7	56.0	Compliance
0.952654	18.3	9.000	L1	9.8	37.7	56.0	Compliance
1.015358	18.3	9.000	L1	9.8	37.7	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.590613	10.6	9.000	L1	9.8	35.4	46.0	Compliance
1.239175	10.5	9.000	L1	9.8	35.5	46.0	Compliance
1.259081	9.8	9.000	L1	9.8	36.2	46.0	Compliance
3.997889	15.8	9.000	L1	9.8	30.2	46.0	Compliance
16.777473	11.8	9.000	L1	10.0	38.2	50.0	Compliance
30.000000	15.9	9.000	L1	10.1	34.1	50.0	Compliance


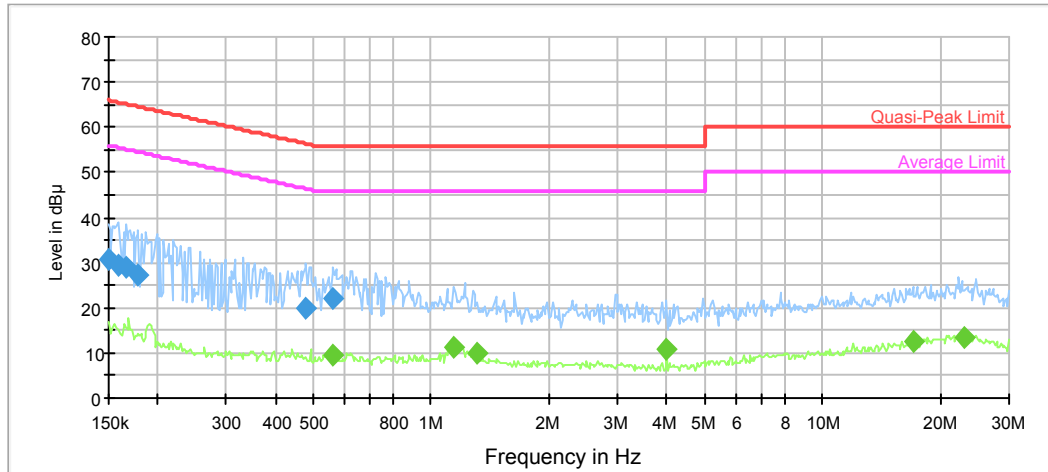
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	30.6	9.000	N	11.2	35.4	66.0	Compliance
0.158604	29.3	9.000	N	11.0	36.2	65.5	Compliance
0.166371	29.0	9.000	N	10.9	36.1	65.1	Compliance
0.178741	27.2	9.000	N	10.8	37.3	64.5	Compliance
0.480097	20.0	9.000	N	9.9	36.3	56.3	Compliance
0.563041	21.9	9.000	N	9.8	34.1	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.563041	9.6	9.000	N	9.8	36.4	46.0	Compliance
1.144267	11.3	9.000	N	9.8	34.7	46.0	Compliance
1.310256	10.1	9.000	N	9.8	35.9	46.0	Compliance
3.997889	10.7	9.000	N	9.8	35.3	46.0	Compliance
17.183363	12.4	9.000	N	10.0	37.6	50.0	Compliance
23.075326	13.5	9.000	N	10.0	36.5	50.0	Compliance

FCC §15.209, §15.205, §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205

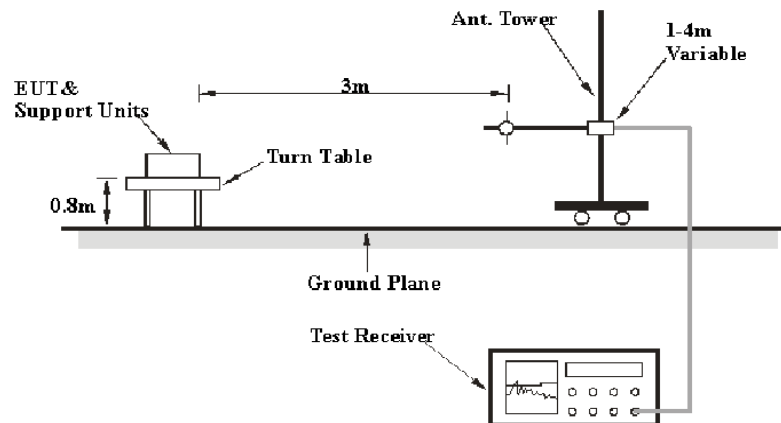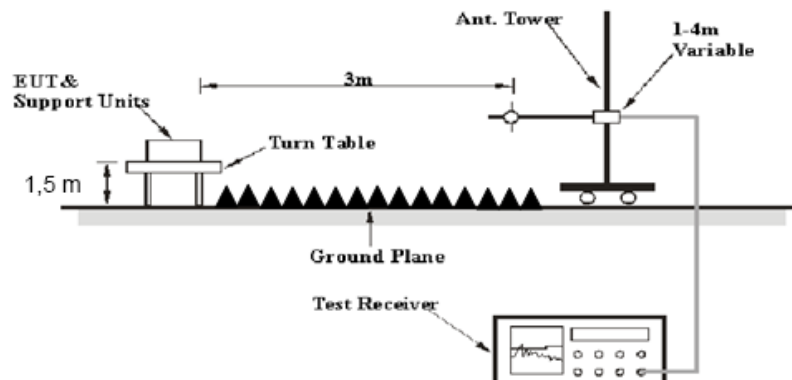EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission tests were performed in the 10 meters chamber test site for the range 30MHz to 1GHz and the 3 meters chamber B test site for above 1GHz, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2018-08-03	2019-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.4~24.7°C
Relative Humidity:	35~57 %
ATM Pressure:	99.9~100.7 kPa

The testing was performed by Vito Chen and Tyler Pan from 2018-11-21 to 2018-11-25.

Test Mode: Transmitting

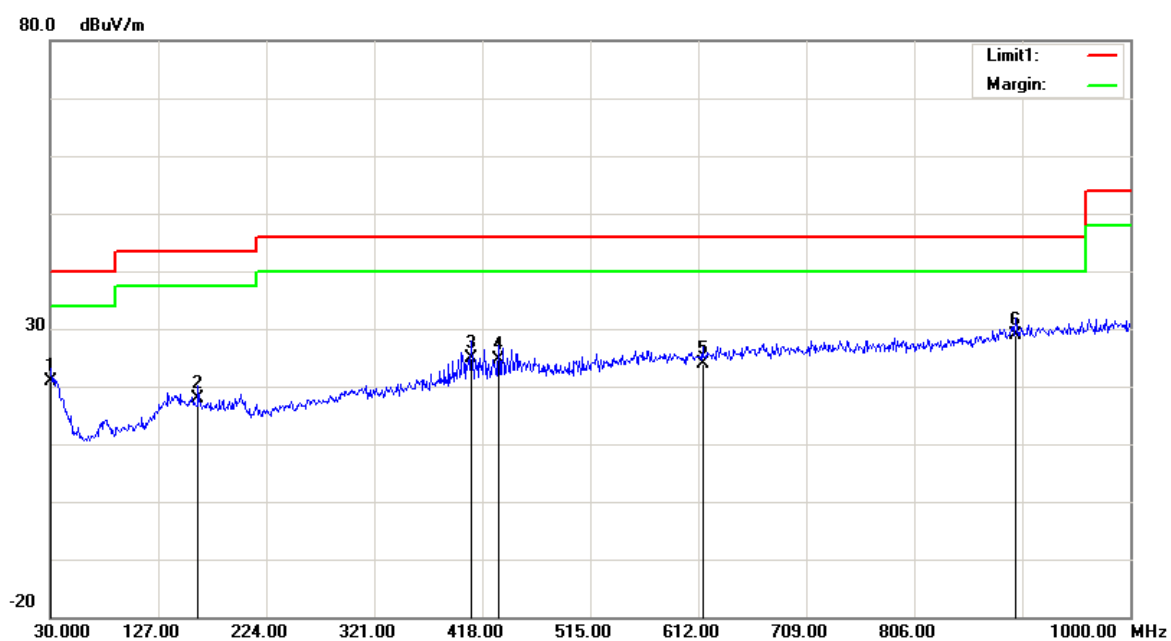1) 30MHz-1GHz (High Channel was the worst):*With Base:***Horizontal:**


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.13	QP	-4.33	20.80	40.00	19.20
162.8900	27.46	QP	-9.66	17.80	43.50	25.70
408.3000	29.85	QP	-4.95	24.90	46.00	21.10
432.5500	29.19	QP	-4.59	24.60	46.00	21.40
615.8800	24.70	QP	-0.80	23.90	46.00	22.10
897.1800	24.90	QP	3.90	28.80	46.00	17.20

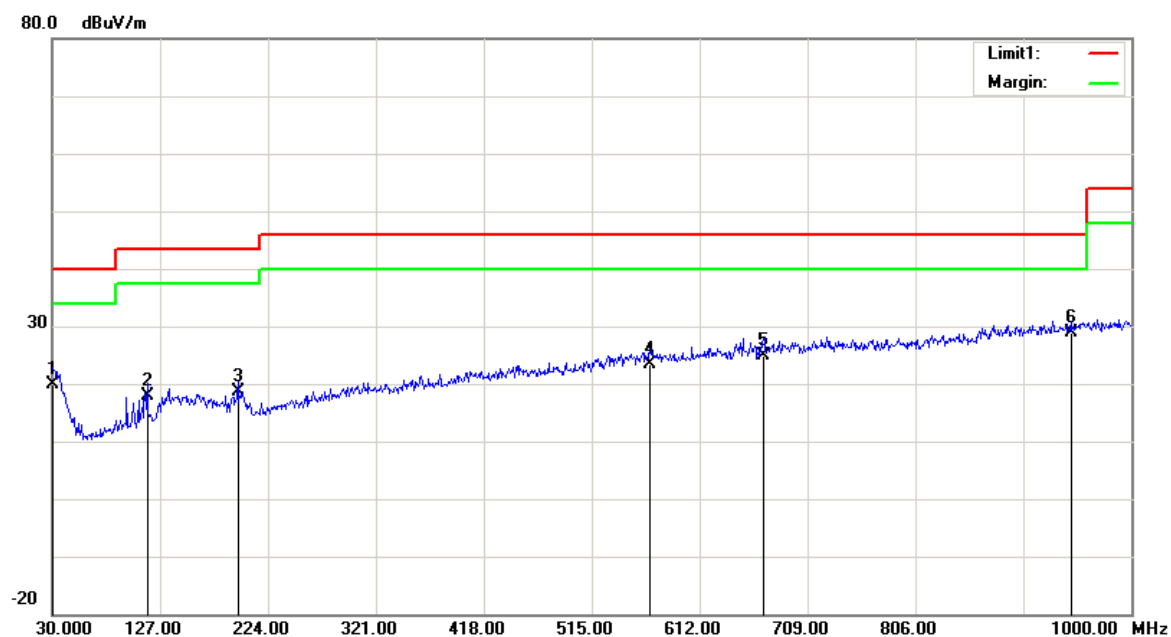Vertical:


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	24.13	QP	-4.33	19.80	40.00	20.20
115.3600	31.21	QP	-13.31	17.90	43.50	25.60
196.8400	28.16	QP	-9.56	18.60	43.50	24.90
567.3800	25.01	QP	-1.51	23.50	46.00	22.50
669.2300	24.74	QP	0.16	24.90	46.00	21.10
945.6800	24.09	QP	4.71	28.80	46.00	17.20

Without Base:

Horizontal:

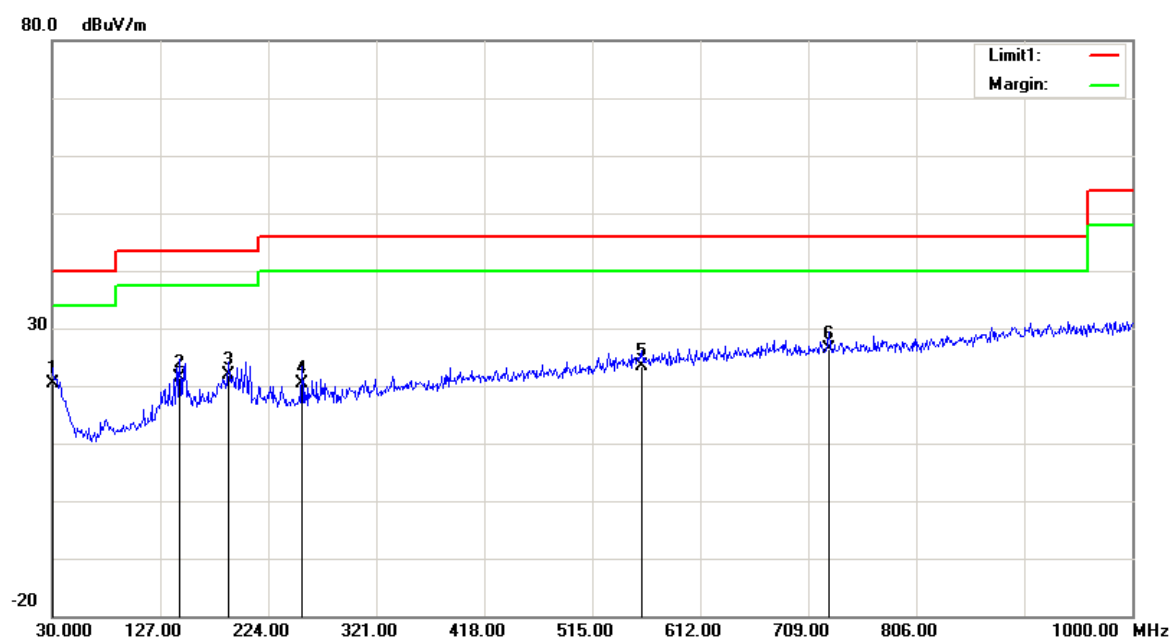

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	24.83	QP	-4.33	20.50	40.00	19.50
144.4600	30.84	QP	-9.34	21.50	43.50	22.00
188.1100	32.11	QP	-10.31	21.80	43.50	21.70
254.0700	29.97	QP	-9.57	20.40	46.00	25.60
559.6200	25.02	QP	-1.52	23.50	46.00	22.50
727.4300	25.58	QP	0.72	26.30	46.00	19.70

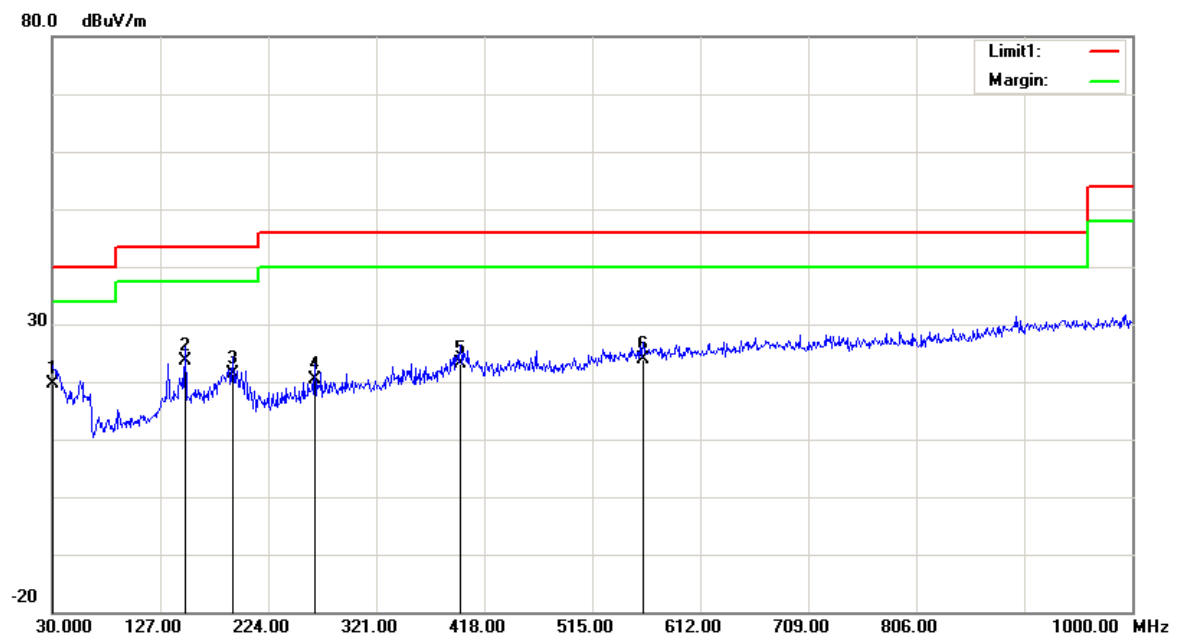Vertical:




Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	24.03	QP	-4.33	19.70	40.00	20.30
149.3100	33.16	QP	-9.56	23.60	43.50	19.90
191.9900	31.44	QP	-10.14	21.30	43.50	22.20
265.7100	29.50	QP	-9.00	20.50	46.00	25.50
396.6600	28.55	QP	-5.35	23.20	46.00	22.80
560.5900	25.41	QP	-1.51	23.90	46.00	22.10

2) 1-25GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	54.91	PK	H	28.10	1.80	0.00	84.81	N/A	N/A
2402.00	49.47	AV	H	28.10	1.80	0.00	79.37	N/A	N/A
2402.00	60.22	PK	V	28.10	1.80	0.00	90.12	N/A	N/A
2402.00	54.73	AV	V	28.10	1.80	0.00	84.63	N/A	N/A
2390.00	25.97	PK	V	28.08	1.80	0.00	55.85	74.00	18.15
2390.00	13.54	AV	V	28.08	1.80	0.00	43.42	54.00	10.58
4804.00	53.40	PK	V	32.91	3.17	37.20	52.28	74.00	21.72
4804.00	43.87	AV	V	32.91	3.17	37.20	42.75	54.00	11.25
7206.00	55.79	PK	V	35.74	4.82	37.23	59.12	74.00	14.88
7206.00	45.53	AV	V	35.74	4.82	37.23	48.86	54.00	5.14
Middle Channel: 2440 MHz									
2440.00	55.04	PK	H	28.18	1.82	0.00	85.04	N/A	N/A
2440.00	49.50	AV	H	28.18	1.82	0.00	79.50	N/A	N/A
2440.00	60.14	PK	V	28.18	1.82	0.00	90.14	N/A	N/A
2440.00	54.57	AV	V	28.18	1.82	0.00	84.57	N/A	N/A
4880.00	52.89	PK	V	33.06	3.27	37.21	52.01	74.00	21.99
4880.00	43.37	AV	V	33.06	3.27	37.21	42.49	54.00	11.51
7320.00	55.46	PK	V	36.03	4.62	37.37	58.74	74.00	15.26
7320.00	45.40	AV	V	36.03	4.62	37.37	48.68	54.00	5.32
High Channel: 2480 MHz									
2480.00	55.13	PK	H	28.26	1.84	0.00	85.23	N/A	N/A
2480.00	49.65	AV	H	28.26	1.84	0.00	79.75	N/A	N/A
2480.00	61.01	PK	V	28.26	1.84	0.00	91.11	N/A	N/A
2480.00	56.58	AV	V	28.26	1.84	0.00	86.68	N/A	N/A
2483.50	27.14	PK	V	28.27	1.84	0.00	57.25	74.00	16.75
2483.50	14.86	AV	V	28.27	1.84	0.00	44.97	54.00	9.03
4960.00	53.83	PK	V	33.22	3.23	37.25	53.03	74.00	20.97
4960.00	44.30	AV	V	33.22	3.23	37.25	43.50	54.00	10.50
7440.00	56.79	PK	V	36.34	4.41	37.52	60.02	74.00	13.98
7440.00	46.50	AV	V	36.34	4.41	37.52	49.73	54.00	4.27




Worst plots (High Channel) **Horizontal**

Fundamental
Test with Band
Rejection Filter

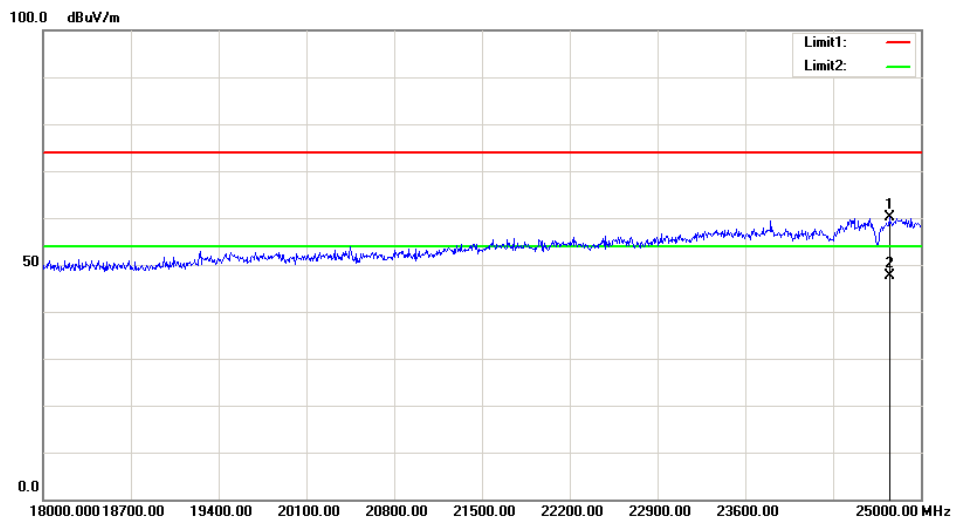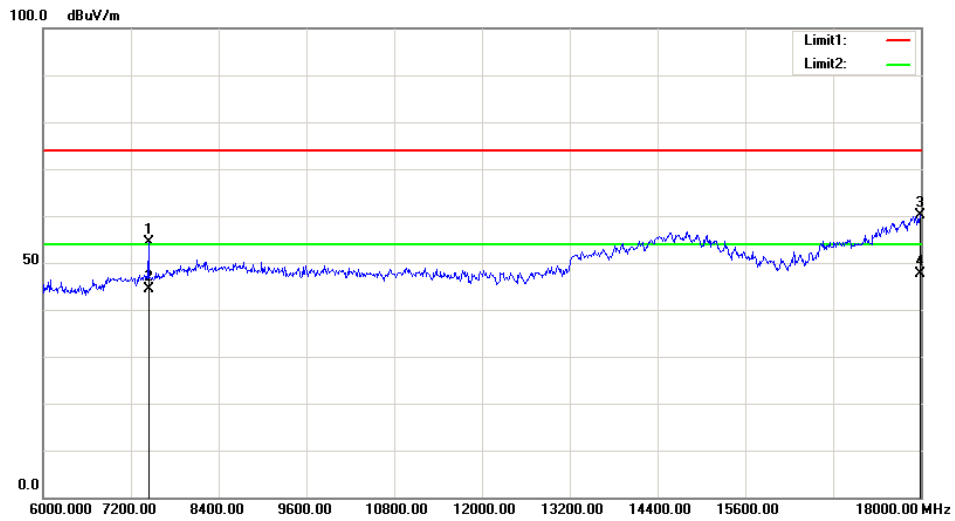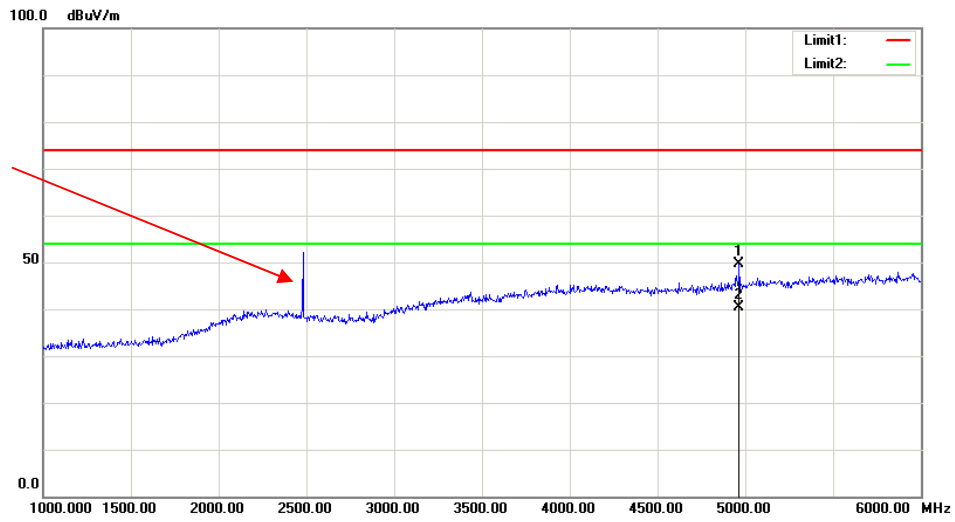

Vertical

Fundamental
Test with Band
Rejection Filter

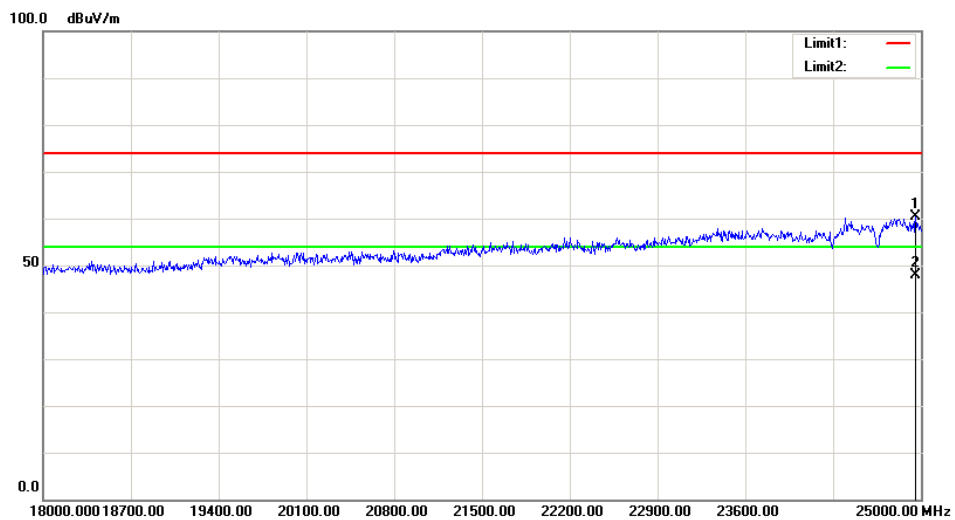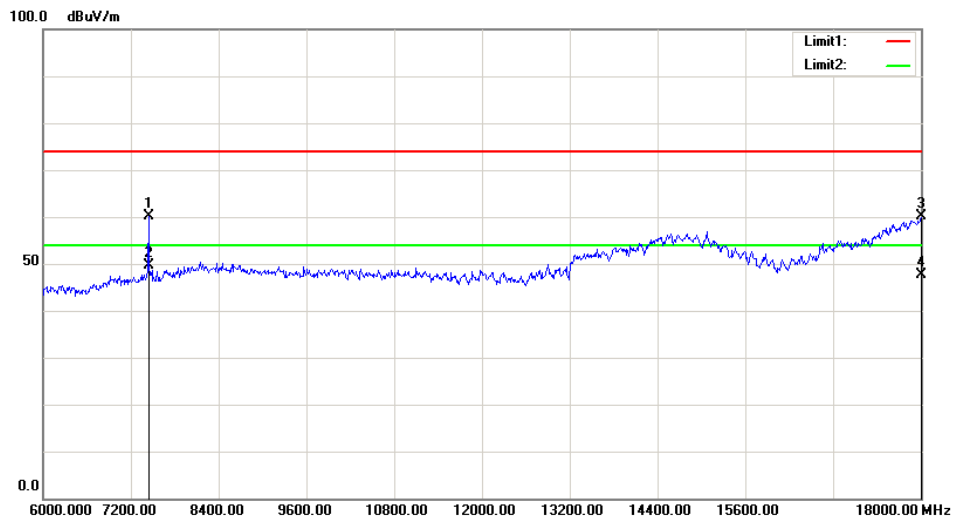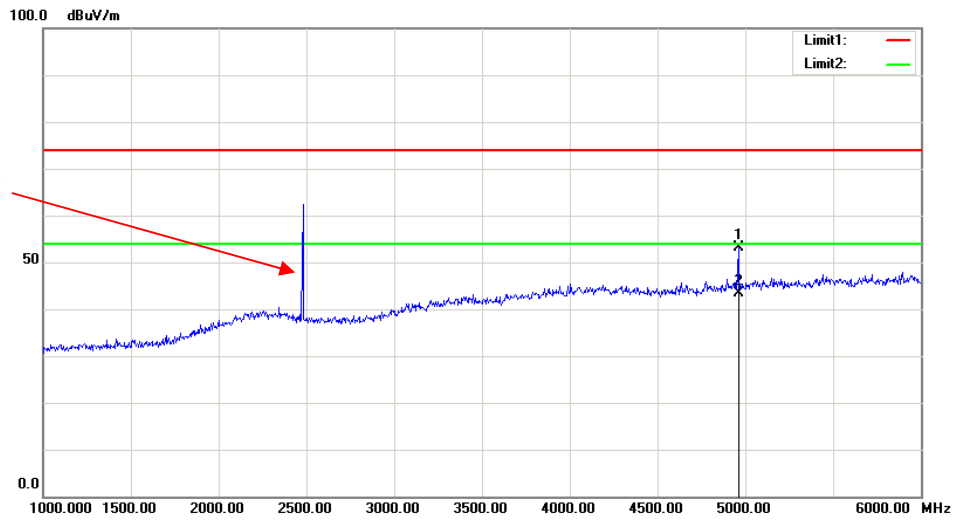

FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa


* The testing was performed by Blake Yang on 2018-11-26.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.689	≥ 0.5
Middle	2440	0.681	≥ 0.5
High	2480	0.689	≥ 0.5

Low Channel

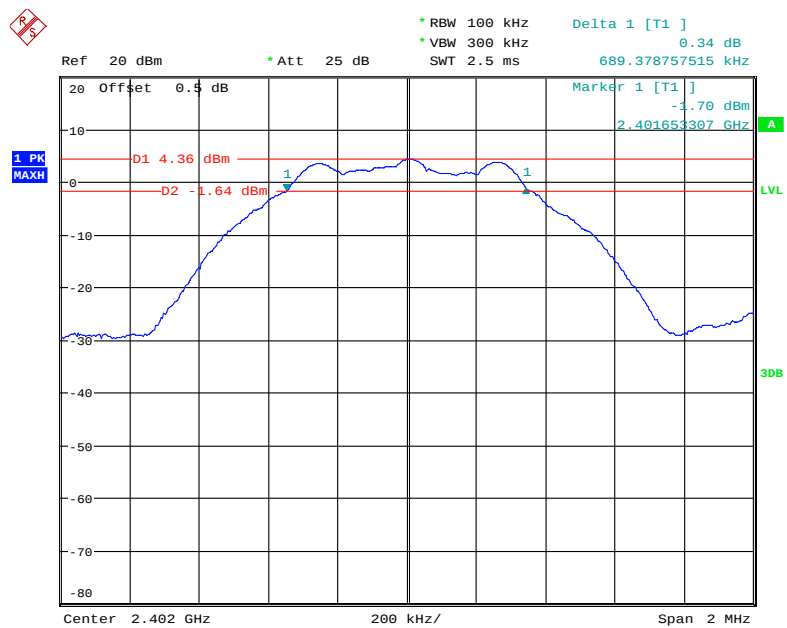


Date: 26.NOV.2018 21:32:44

Middle Channel

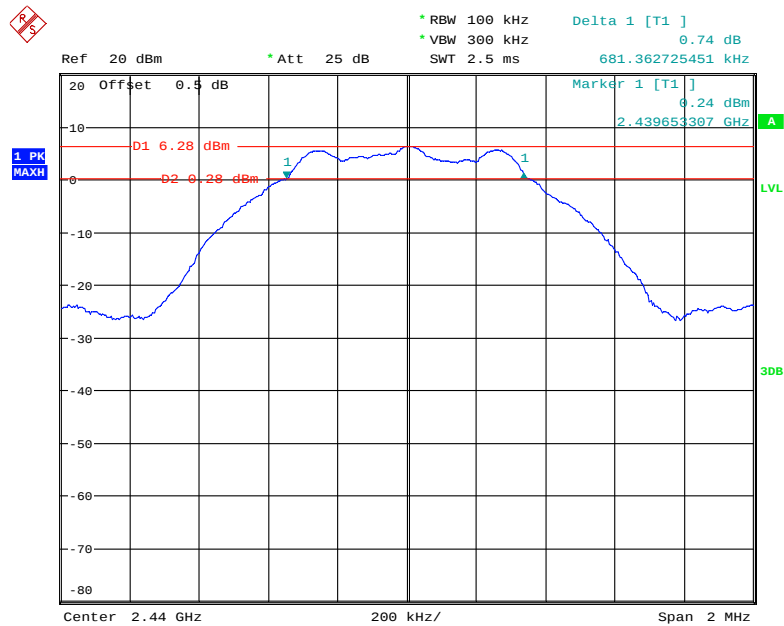

Date: 26.NOV.2018 21:34:09

High Channel

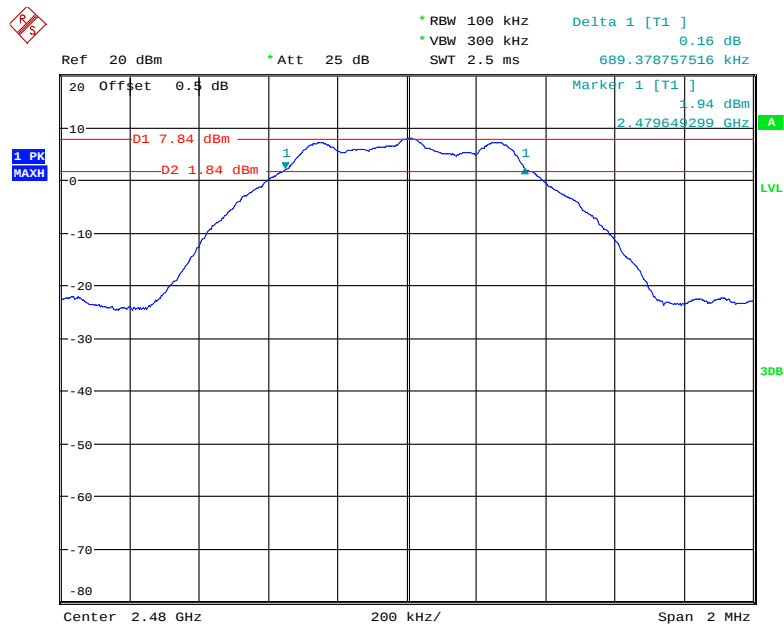

Date: 26.NOV.2018 21:31:09


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa

* The testing was performed by Blake Yang on 2018-11-26.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
Low	2402	4.59	30
Middle	2440	6.42	30
High	2480	7.84	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa

* The testing was performed by Blake Yang on 2018-11-26.

Test Result: Compliance. Please refer to following plots.

1 PK MAXH

Ref 20 dBm

* Att 25 dB

* RBW 100 kHz

* VBW 300 kHz

SWT 5 ms

Marker 2 [T1]

-41.67 dBm

2.400000000 GHz

20 Offset 0.5 dB

Marker 1 [T1]

4.36 dBm

2.402010000 GHz

-15.64 dBm

Center 2.4 GHz

800 kHz/

Span 8 MHz

Date: 26.NOV.2018 21:33:32

Ref 20 dBm * Att 25 dB * RBW 100 kHz * VBW 300 kHz * SWT 5 ms

Marker 2 [T1] -47.10 dBm 2.484004000 GHz

Marker 1 [T1] 7.84 dBm 2.480000000 GHz

1 PK MAXH

Center 2.4835 GHz 1.4 MHz/ Span 14 MHz

Date: 26.NOV.2018 21:32:03

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC§15.247(e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa


* The testing was performed by Blake Yang on 2018-11-26.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-10.98	≤8
Middle	2440	-8.96	≤8
High	2480	-7.30	≤8

Power Spectral Density, Low Channel

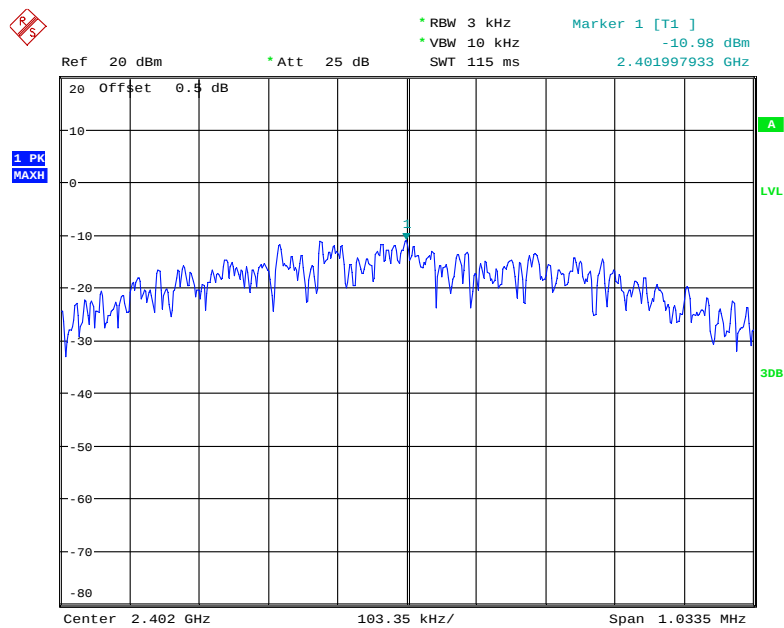


Date: 26.NOV.2018 21:33:10

Power Spectral Density, Middle Channel

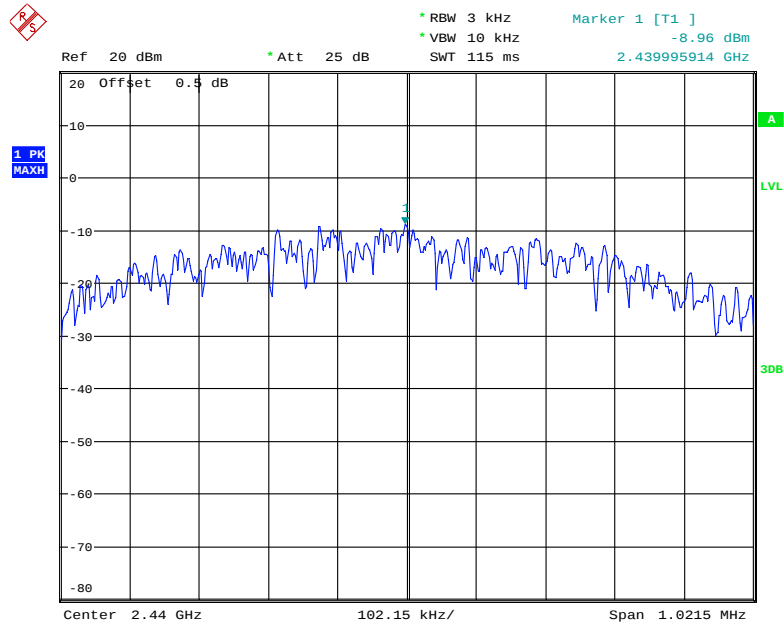

Date: 26.NOV.2018 21:34:34

Power Spectral Density, High Channel

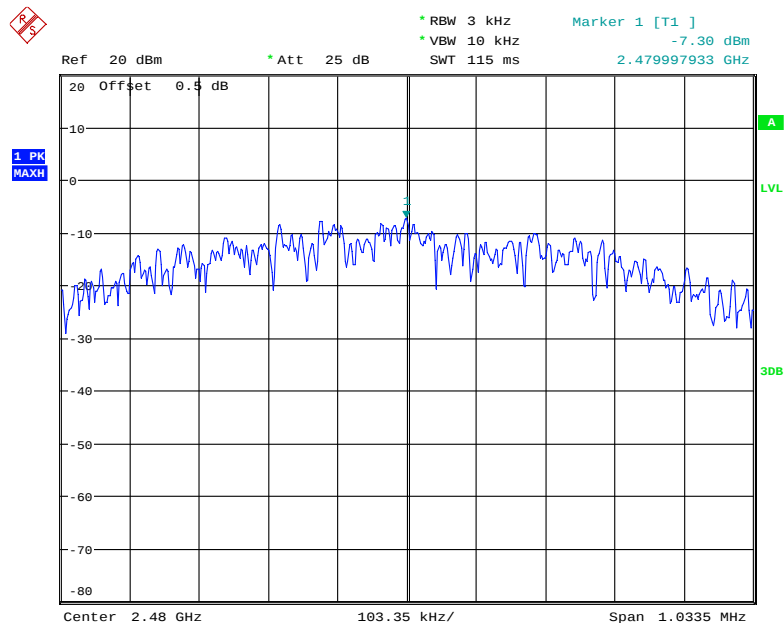

Date: 26.NOV.2018 21:31:37

***** END OF REPORT *****