
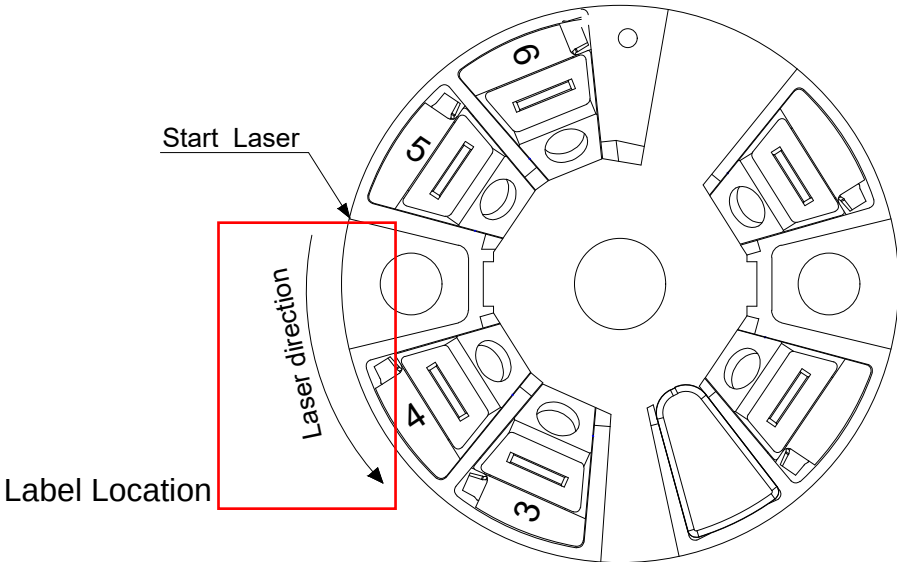


Layout Laser:
(Sample/Beispiel)

For TMT72 screwed version

For TMT72 push-in version

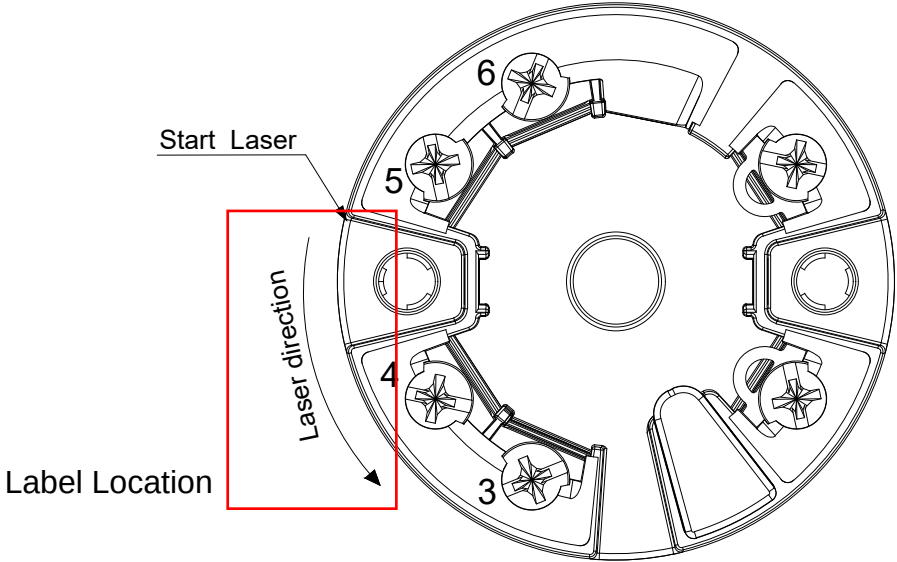

Start Laser

Input: 11-30V
Output: 4...20mA/HART
Current consum.: 23 mA
FCC ID: 2ARRT-TMT7X0301

Ser. no.: XXXXXXXXXX
Dev. Rev: X
FW: xx.yy.zz
HW: uu.vv



IC: 24525-TMT7X0301
HVIN: TMT71/72
TAG1
TAG2
Ext. ord. cd.:
TMT72-XXXXXXXXXXXX



HAHXO "XXXX"
TC RU C-DE.XX05.B00919
Ex ia IIC T6...T4 Ga Ta = -50...+40/60/60°C
Ex ia IIC T6...T4 Ga Ta = -50...+55/70/85°C
XA01736T/09/a3/xx.xx



IS, NI / I / 1,2 / ABCD
Exia / NONINCENDIVE Cl. I, GP. ABCD
T6/T5/T4 Ta = -50...+58/75/85°C
Install per dwg. 10000010389





iTEMP® TMT72-XXXX/XXX
Made in Germany 2010
D-87484 Nesselwang

14,5

138

Logo, Produktbezeichnung und Zulassungszeichen müssen gefüllt dargestellt werden! - siehe Layout foil.
Doubellined signs and logo have to be filled - see layout foil.

Device according to RoHS Compliant

 Endress+Hauser GmbH+Co.KG Division Germany, 87484 Nesselwang	Refer to protection notice ISO 16016		Scale no scale	Tolerance Geometrical tolerances ISO 2768-1 m/k (mittel)	
	Title TMT72 Headtransmitter Nameplate drawing		Notif.No.	Last editor 2018-10-08 KoserT	
				Designed 2017-09-04 KoserT	
			Number of Changes	Welding contr.	
			Status Released	Approval contr. Released 2018-10-08 ZwickO	
	Classification Internal Unit TMT72	Material without	No. of document DRW004987-XXXXX	Version A	Document part 000
			Weight	Volume	
			SAP material no. without	Format DIN A3	Page 1/1