



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: LAVA International Limited

Address: A-56, Sector-64, Gautam Buddha Nagar, Noida Uttar Pradesh 201301, India

FCC ID: 2ARTX-LEX401

Product Name: Mobile Phone

Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H

47 CFR Part 24, Subpart E

47 CFR Part 27

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems
v03r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231059186-00A

Date Of Issue: 2023/12/26

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	6
1.2.1 EUT Operation Condition:.....	6
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	11
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 Applicable Standard For Part 22 Subpart H:.....	14
3.2 Applicable Standard For Part 24 Subpart E:	16
3.3 Applicable Standard For Part 27:.....	17
3.5 Test Method:	20
4. Test DATA AND RESULTS	27
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	27
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	33
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5.....	39
4.4 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 40.....	61
4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41.....	85
4.6 RADIATED SPURIOUS EMISSIONS.....	103
5. EUT PHOTOGRAPHS	110
6. TEST SETUP PHOTOGRAPHS	111

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231059186-00A	Original Report	2023/12/26

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Mobile Phone
Trade Name:	LAVA
EUT Model:	LEX401
Multiple Model(s):	Z34
Operation Bands and modes:	GSM/GPRS/EDGE: 850/1900 LTE: Band 5/40/41
Modulation Type:	GMSK, 8PSK, BPSK, 16QAM
Rated Input Voltage:	DC 3.85V from battery or 5V from adapter
Serial Number:	2C4U-1
EUT Received Date:	2023/10/20
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Operation Voltage (V_{DC}) ▲:

Lowest:	3.47V	Normal:	3.85V	Highest:	4.24V
---------	-------	---------	-------	----------	-------

Transmission Antenna Information ▲:

Antenna Type	Operation Bands	Antenna Frequency Range(MHz)	Antenna Gain (Gr)(dBi)	Lc(dB)
FPC	GSM850	824-849	-1.32	0
	PCS1900	1850-1910	0.38	0
	LTE B5	824-849	-1.32	0
	LTE B40 Lower	2305-2315	-1.36	0
	LTE B40 Upper	2350-2360	-1.36	0
	LTE B41	2535-2655	-1.42	0

Note: Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Top power technology Co., LTD	TOP-804-050200	Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5.0V, 2000mA

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting: GSM/GPRS/EGPRS Function: Menu select > GSM Mobile Station > GSM 850/1900 Press Connection control to choose the different menus Press RESET > choose all the reset all settings Connection Press Signal Off to turn off the signal and change settings Network Support > GSM + GPRS or GSM + EGSM Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1 PSR Bit Stream AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/ 5	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
HSDPA Specific Settings	PR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
HSUPA Specific Settings	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 96	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

1.2.2 Support Equipment List and Details

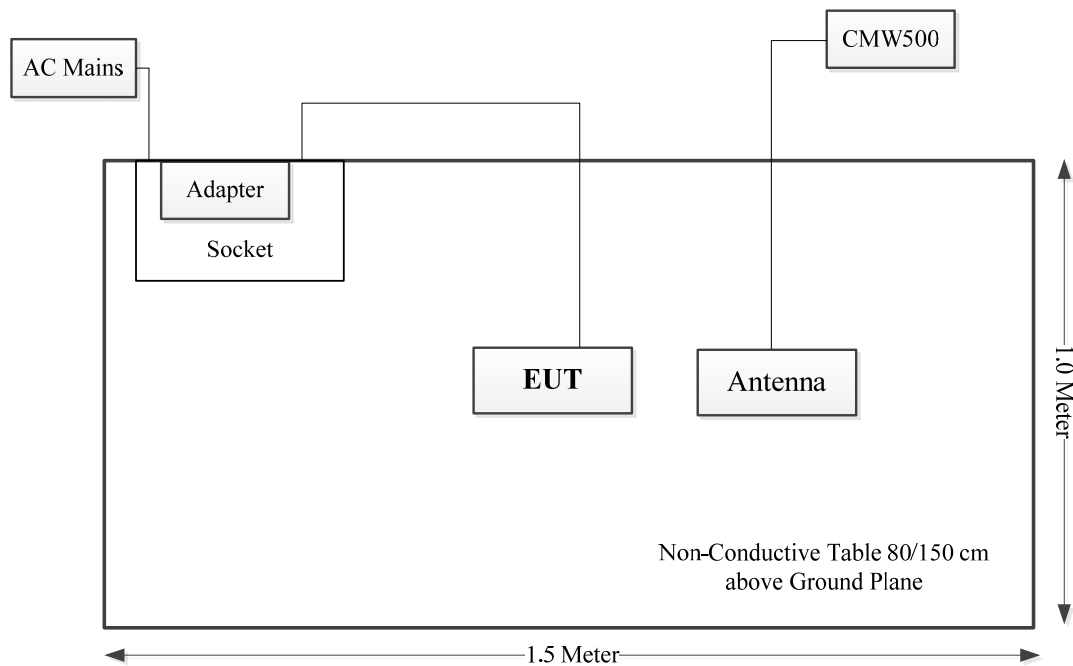
Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/		

1.2.4 Block Diagram of Test Setup

Spurious emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055; § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; § 22.917; § 24.238; §27.53	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.5 Test Method:

3.5.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

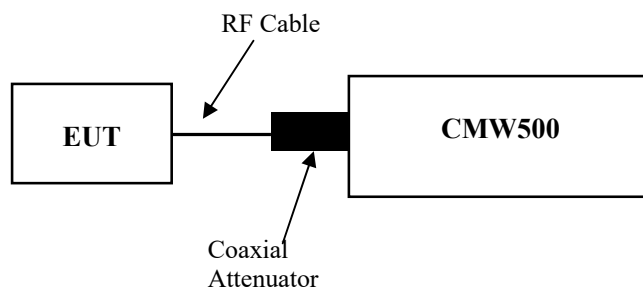
ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:



Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.5.2 Occupied Bandwidth

According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.

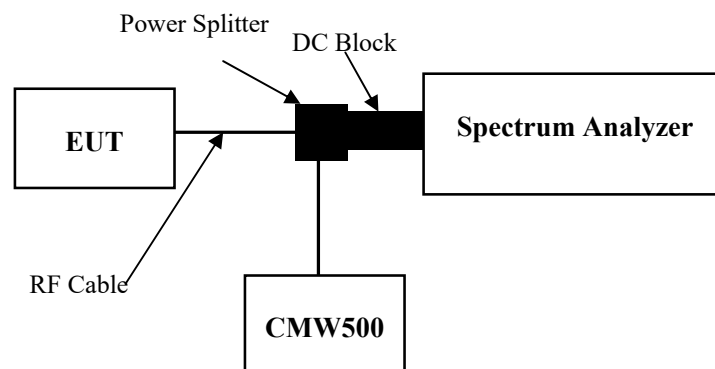
c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

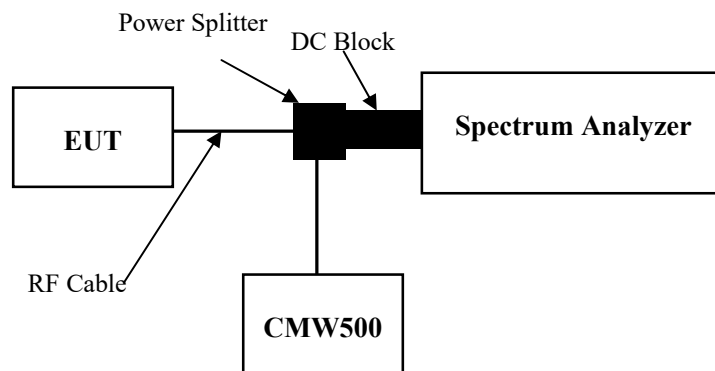


3.5.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

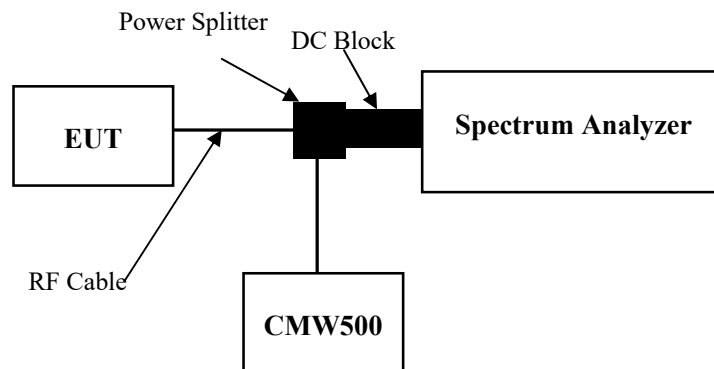


3.5.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/block (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:



3.5.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

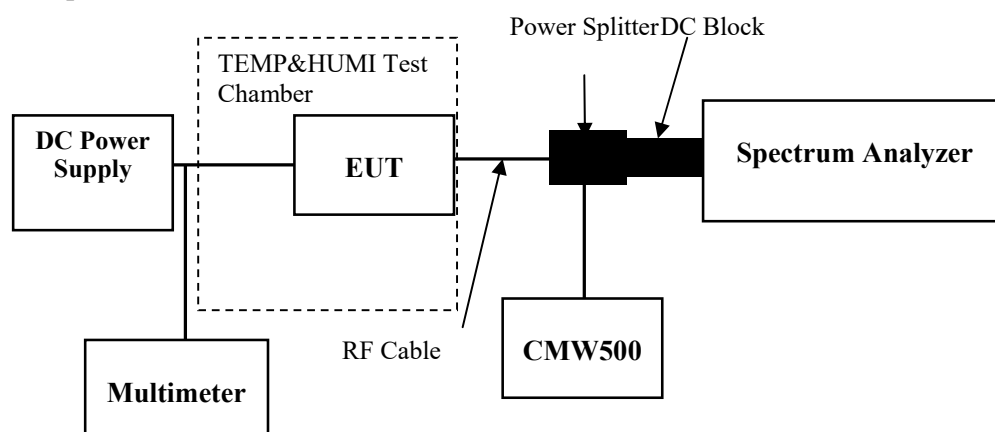
The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:



3.5.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

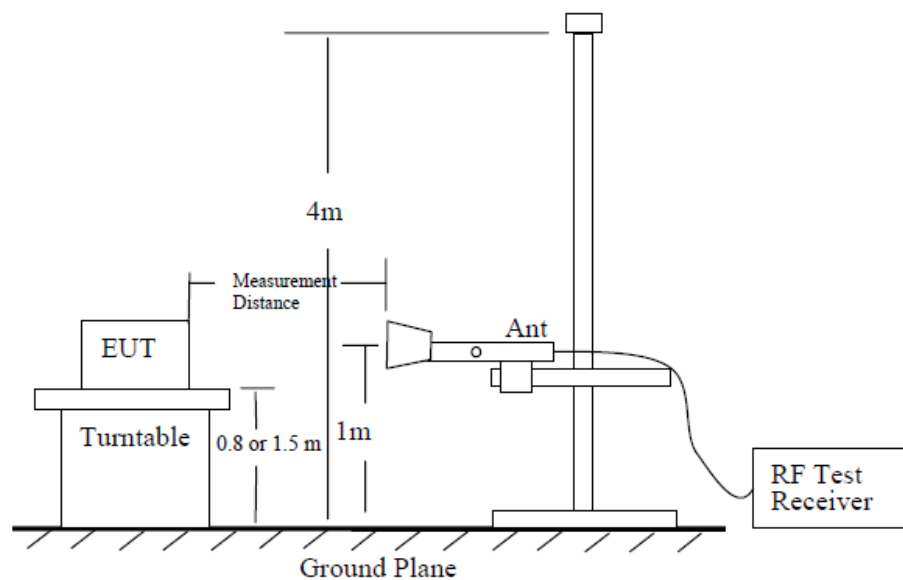


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

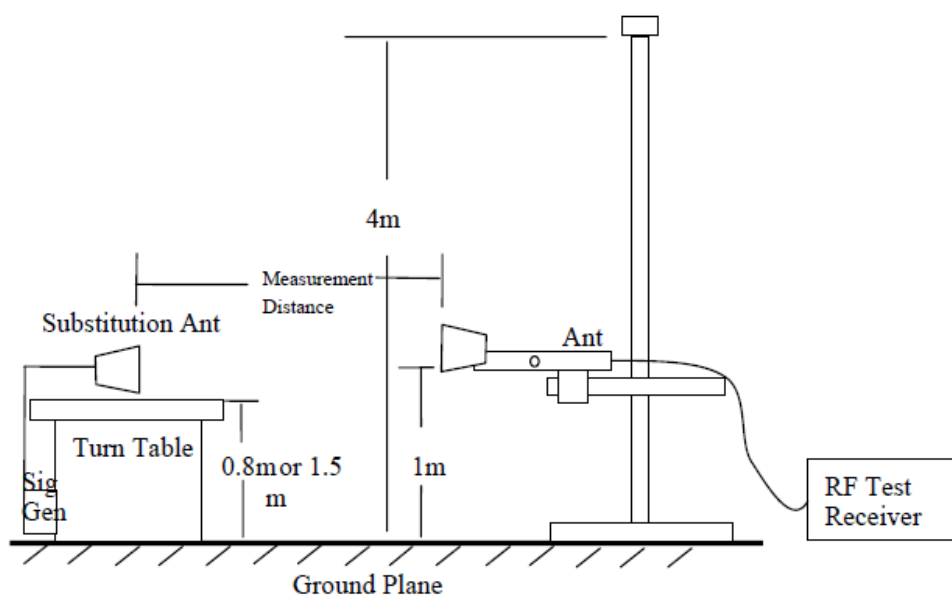


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	2C4U-1	Test Date:	2023/11/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25~26	Relative Humidity: (%)	46~47	ATM Pressure: (kPa)	101
----------------------	-------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:

FCC§2.1046;§ 22.913 (a):RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	32.14	32.24	32.27	28.8	38.45
GPRS 1 Slot	32.15	32.3	32.29	28.83	38.45
GPRS 2 Slots	31.35	31.44	31.55	28.08	38.45
GPRS 3 Slots	29.49	29.57	29.66	26.19	38.45
GPRS 4 Slots	28.36	28.43	28.51	25.04	38.45
EDGE 1 Slot	26.59	26.56	26.54	23.12	38.45
EDGE 2 Slots	25.49	25.45	25.34	22.02	38.45
EDGE 3 Slots	23.36	23.28	23.12	19.89	38.45
EDGE 4 Slots	22.15	21.99	22.12	18.68	38.45
Note: ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd) Gr(dBd)=Gr(dBi)-2.15					
				Result:	Pass

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (kHz)			26 dB Occupied Bandwidth (kHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.243	0.243	0.242	0.301	0.300	0.301
EDGE	0.24	0.243	0.243	0.289	0.304	0.307
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

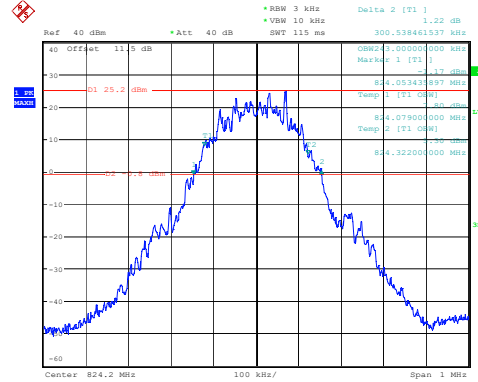
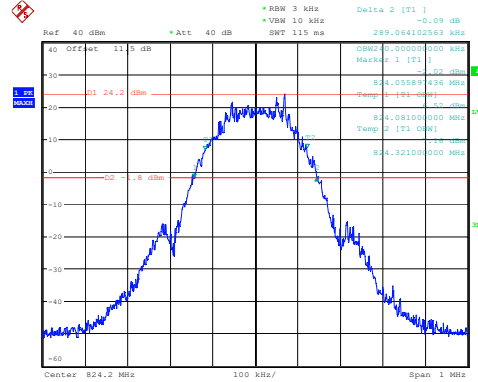
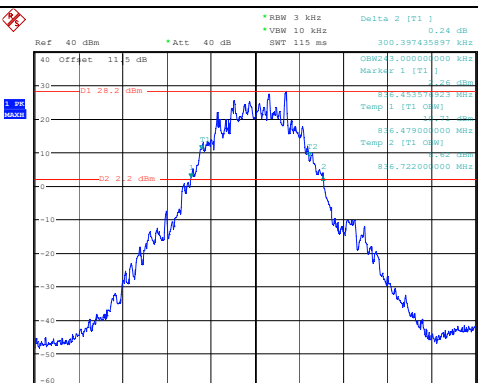
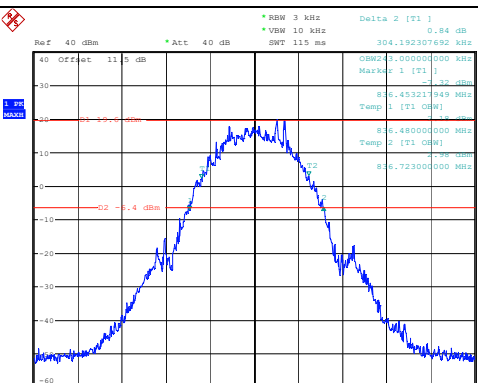
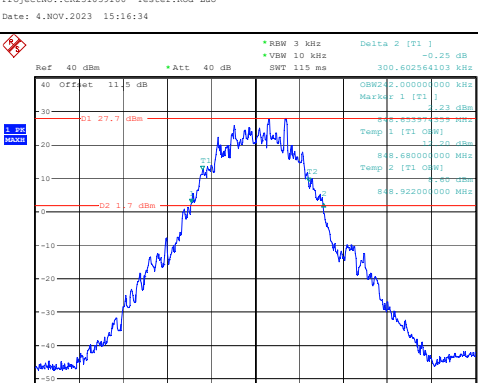
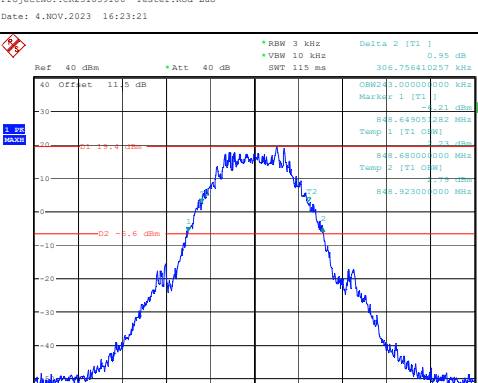
FCC §2.1051, §22.917(a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	112.929	0.135	2.5
	-20	3.85	107.356	0.128	2.5
	-10	3.85	107.216	0.128	2.5
	0	3.85	101.146	0.121	2.5
	10	3.85	109.785	0.131	2.5
	20	3.85	103.067	0.123	2.5
	30	3.85	107.769	0.129	2.5
	40	3.85	118.313	0.141	2.5
	50	3.85	107.186	0.128	2.5
Frequency Stability vs. Voltage	20	3.47	108.794	0.130	2.5
	20	4.24	123.442	0.148	2.5
				Result:	Pass

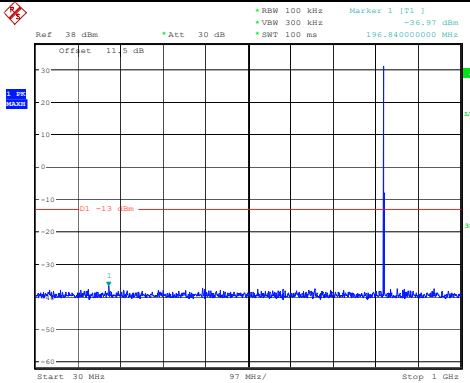
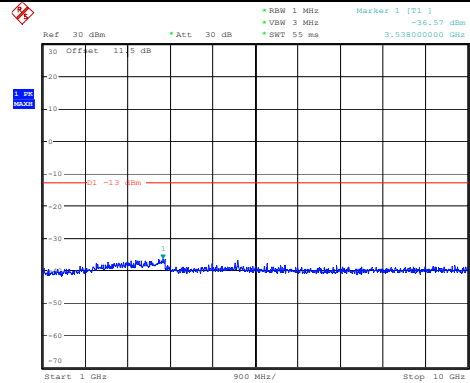
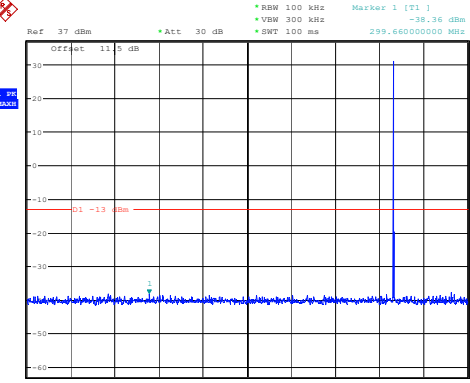
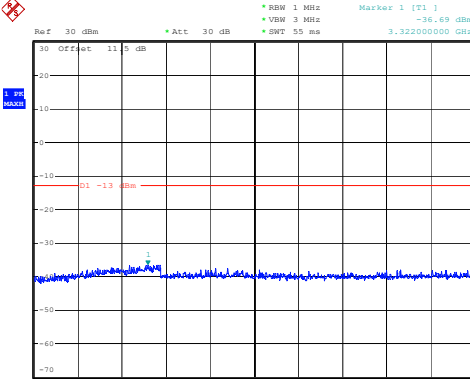
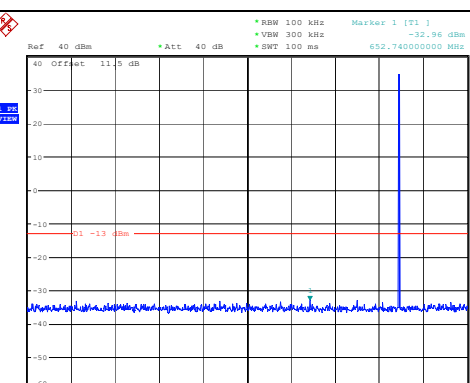
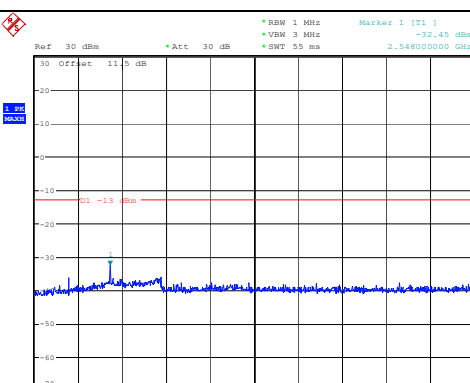
Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	113.941	0.136	2.5
	-20	3.85	104.963	0.125	2.5
	-10	3.85	107.389	0.128	2.5
	0	3.85	100.506	0.120	2.5
	10	3.85	112.992	0.135	2.5
	20	3.85	99.963	0.119	2.5
	30	3.85	115.411	0.138	2.5
	40	3.85	120.279	0.144	2.5
	50	3.85	110.048	0.132	2.5
Frequency Stability vs. Voltage	20	3.47	116.913	0.140	2.5
	20	4.24	124.527	0.149	2.5
				Result:	Pass

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

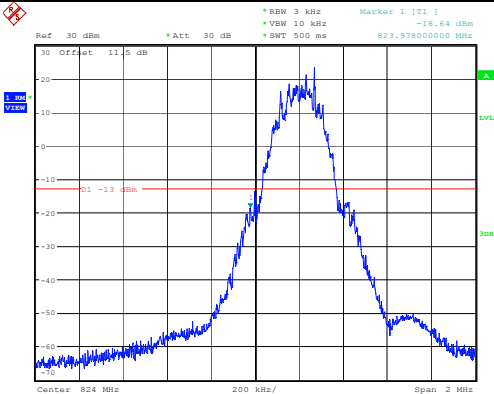
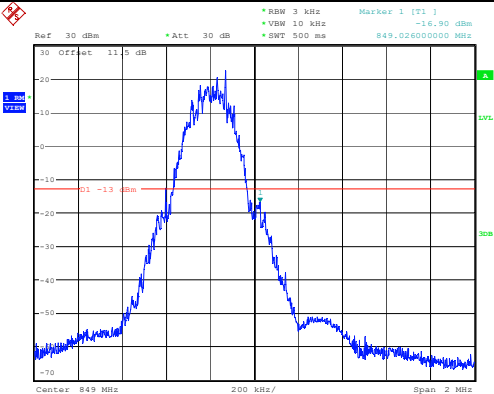
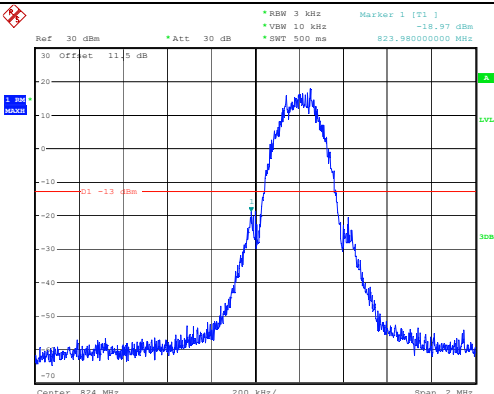
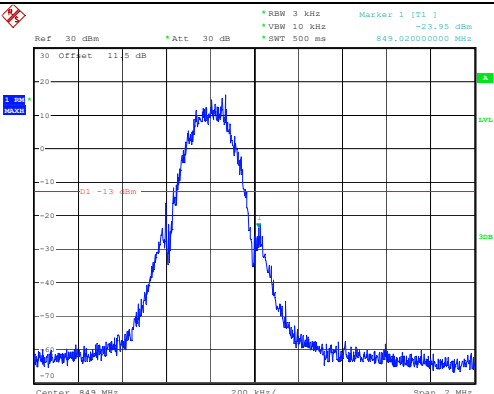
Occupied Bandwidth

Channel	GSM	EDGE
Lowest	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 15:25:22	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:14:44
Middle	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 15:16:34	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:23:21
Highest	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:56:35	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:29:52

Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:43:33	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:17:25
	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:43:38	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:25:27
Highest	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 15:08:26	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 15:08:55

Out of band emission, Band Edge

Mode	Lowest	Highest
GSM	 Ref: 30 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz *SWT: 500 ms Marker 1 [T1]: 823.978000000 MHz -19.64 dBm Offset: 11.5 dB Center: 824 MHz 200 kHz/ Span: 2 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 15:33:18	 Ref: 30 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz *SWT: 500 ms Marker 1 [T1]: 849.026000000 MHz -26.90 dBm Offset: 11.5 dB Center: 849 MHz 200 kHz/ Span: 2 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 15:39:16
EDGE	 Ref: 30 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz *SWT: 500 ms Marker 1 [T1]: 823.980000000 MHz -19.97 dBm Offset: 11.5 dB Center: 824 MHz 200 kHz/ Span: 2 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:15:48	 Ref: 30 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz *SWT: 500 ms Marker 1 [T1]: 849.020000000 MHz -23.95 dBm Offset: 11.5 dB Center: 849 MHz 200 kHz/ Span: 2 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 16:30:57

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	2C4U-1	Test Date:	2023/11/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25~26	Relative Humidity: (%)	46~47	ATM Pressure: (kPa)	101
----------------------	-------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:

FCC§2.1046;§ 24.232 (c):RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	28.34	28.67	28.71	29.09	33
GPRS 1 Slot	28.41	28.72	28.75	29.13	33
GPRS 2 Slots	27.61	27.92	27.97	28.35	33
GPRS 3 Slots	25.9	26.2	26.25	26.63	33
GPRS 4 Slots	24.79	25.08	25.14	25.52	33
EDGE 1 Slot	25.2	24.79	24.75	25.58	33
EDGE 2 Slots	24.23	23.83	23.89	24.61	33
EDGE 3 Slots	22.56	22.09	22.26	22.94	33
EDGE 4 Slots	21.5	21.07	21.34	21.88	33
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)					
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (kHz)			26 dB Occupied Bandwidth (kHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.242	0.243	0.242	0.300	0.297	0.293
EDGE	0.245	0.242	0.243	0.302	0.292	0.313
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.096	1850.000	1909.958	1910.000
	-20	3.85	1850.054	1850.000	1909.959	1910.000
	-10	3.85	1850.007	1850.000	1909.974	1910.000
	0	3.85	1850.044	1850.000	1909.961	1910.000
	10	3.85	1850.077	1850.000	1909.936	1910.000
	20	3.85	1850.084	1850.000	1909.967	1910.000
	30	3.85	1850.022	1850.000	1909.873	1910.000
	40	3.85	1850.145	1850.000	1909.915	1910.000
	50	3.85	1850.105	1850.000	1909.882	1910.000
Frequency Stability vs. Voltage	20	3.47	1850.038	1850.000	1909.932	1910.000
	20	4.24	1850.047	1850.000	1909.902	1910.000
					Result:	Pass

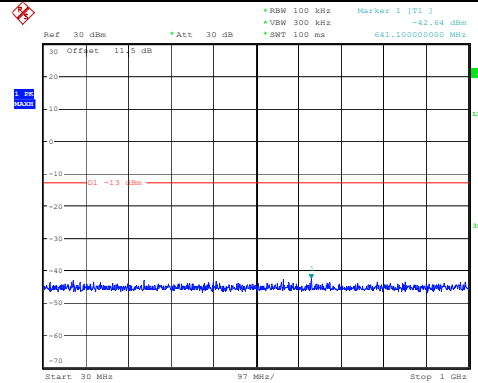
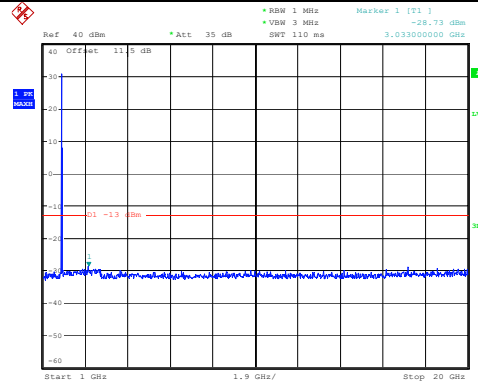
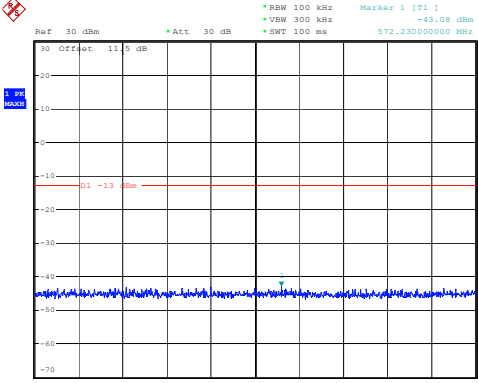
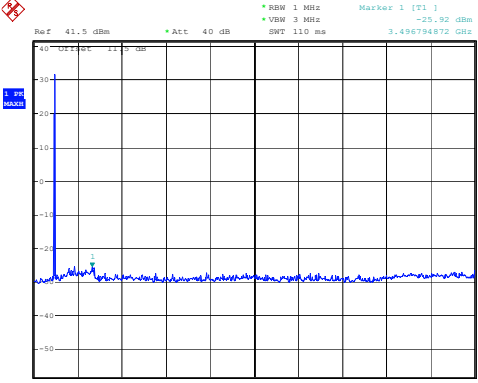
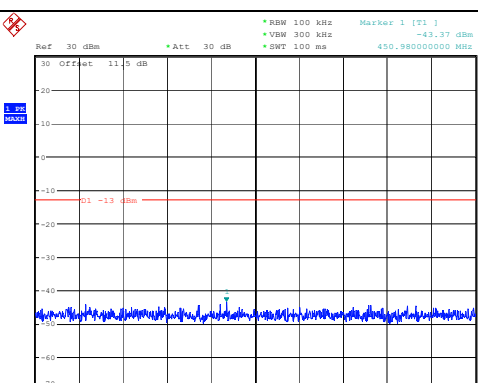
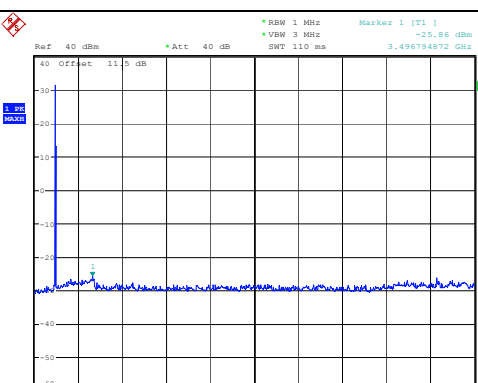
Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.134	1850.000	1909.859	1910.000
	-20	3.85	1850.083	1850.000	1909.928	1910.000
	-10	3.85	1850.106	1850.000	1909.896	1910.000
	0	3.85	1850.111	1850.000	1909.883	1910.000
	10	3.85	1850.017	1850.000	1909.866	1910.000
	20	3.85	1850.145	1850.000	1909.949	1910.000
	30	3.85	1850.137	1850.000	1909.929	1910.000
	40	3.85	1850.098	1850.000	1909.978	1910.000
	50	3.85	1850.124	1850.000	1909.958	1910.000
Frequency Stability vs. Voltage	20	3.47	1850.056	1850.000	1909.872	1910.000
	20	4.24	1850.093	1850.000	1909.937	1910.000
					Result:	Pass

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

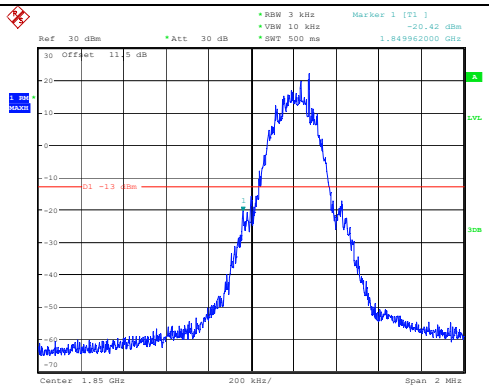
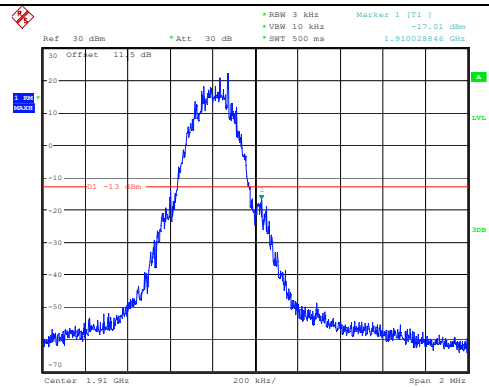
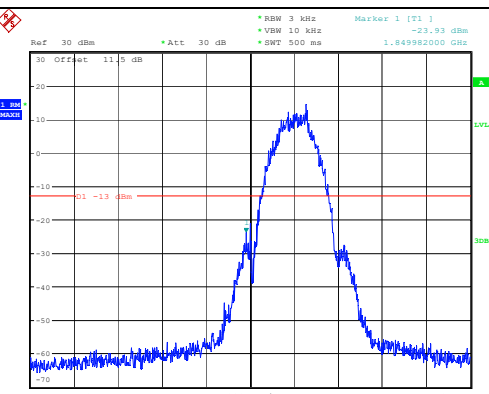
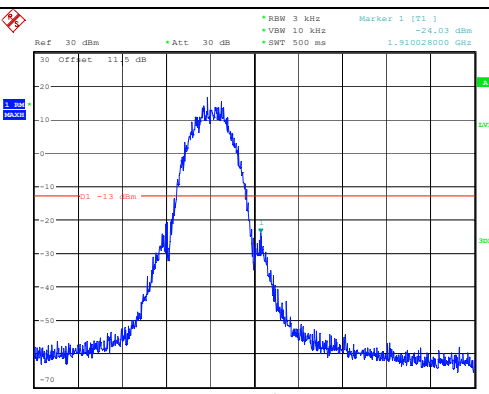
Occupied Bandwidth

Channel	GSM	EDGE
Lowest	ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:37:38	ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 13:21:12
Middle	ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:12:49	ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 13:30:02
Highest	ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:43:51	ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 13:35:35

Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:39:00	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:40:41
	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:13:19	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:32:48
Highest	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 17:02:19	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:47:19

Out of band emission, Band Edge

Channel	Lowest	Highest
GSM	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 17:07:36	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 14:44:50
EDGE	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 17:14:44	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 4.NOV.2023 13:37:22

4.3 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	2C4U-1	Test Date:	2023/11/3~2023/12/16
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25~26	Relative Humidity: (%)	46~47	ATM Pressure: (kPa)	101
----------------------	-------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.76	23.75	23.72	20.46	38.45
	RB1#3	23.93	23.92	23.47		
	RB1#5	23.72	23.69	23.26		
	RB3#0	23.83	23.64	23.38		
	RB3#3	23.84	23.72	23.34		
	RB6#0	22.82	22.73	22.43		
1.4MHz 16QAM	RB1#0	22.71	22.57	22.39	19.49	38.45
	RB1#3	22.88	22.91	22.57		
	RB1#5	22.71	22.73	22.41		
	RB3#0	22.82	22.96	22.29		
	RB3#3	22.86	22.95	22.34		
	RB6#0	21.85	21.91	21.46		
3MHz QPSK	RB1#0	23.74	23.33	23.29	20.27	38.45
	RB1#8	23.5	23.25	23.33		
	RB1#14	23.29	23.21	23.3		
	RB6#0	22.21	22.24	22.24		
	RB6#9	22.23	22.26	22.19		
	RB15#0	22.25	22.29	22.29		
3MHz 16QAM	RB1#0	22.24	22.79	22.48	19.32	38.45
	RB1#8	22.26	22.78	22.42		
	RB1#14	22.28	22.75	22.41		
	RB6#0	21.22	21.34	21.36		
	RB6#9	21.3	21.41	21.32		
	RB15#0	21.33	21.37	21.3		
5MHz QPSK	RB1#0	23.65	23.2	23.28	20.31	38.45
	RB1#13	23.78	23.36	23.4		
	RB1#24	23.72	23.21	23.24		
	RB15#0	22.69	22.31	22.34		
	RB15#10	22.72	22.31	22.35		
	RB25#0	22.56	22.32	22.32		
5MHz 16QAM	RB1#0	22.38	22.13	22.54	19.16	38.45
	RB1#13	22.46	22.23	22.63		
	RB1#24	22.35	22.14	22.47		
	RB15#0	21.43	21.4	21.36		
	RB15#10	21.52	21.44	21.36		
	RB25#0	21.38	21.37	21.37		
10MHz QPSK	RB1#0	23.88	23.4	23.36	20.55	38.45

	RB1#25	24.02	23.51	23.53		
	RB1#49	23.45	23.44	23.45		
	RB25#0	22.39	22.46	22.45		
	RB25#25	22.4	22.4	22.45		
	RB50#0	22.34	22.42	22.44		
10MHz 16QAM	RB1#0	22.35	22.91	22.54	19.53	38.45
	RB1#25	22.54	23	22.66		
	RB1#49	22.33	22.97	22.5		
	RB25#0	21.43	21.56	21.52		
	RB25#25	21.49	21.52	21.51		
	RB50#0	21.39	21.48	21.48		

Note: ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)
G_T(dBd)=G_T(dBi)-2.15

Result: **Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	4.62	4.29	4.87	13
	RB50#0	5.45	5.48	5.61	13
10MHz 16QAM	RB1#0	5.64	5.13	5.80	13
	RB50#0	6.31	6.31	6.41	13
				Result:	Pass

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.104	1.098	1.296	1.308	1.308
1.4MHz 16QAM	1.098	1.110	1.092	1.290	1.302	1.290
3MHz QPSK	2.688	2.688	2.676	2.904	2.880	2.880
3MHz 16QAM	2.688	2.676	2.688	2.880	2.868	2.868
5MHz QPSK	4.480	4.520	4.500	4.900	4.980	5.140
5MHz 16QAM	4.500	4.520	4.500	4.920	4.940	4.960
10MHz QPSK	8.960	8.960	8.960	9.600	9.560	9.600
10MHz 16QAM	8.960	8.960	8.960	9.480	9.560	9.600

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a): Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	105.349	0.126	2.5
	-20	3.85	97.677	0.117	2.5
	-10	3.85	105.772	0.126	2.5
	0	3.85	102.462	0.122	2.5
	10	3.85	102.946	0.123	2.5
	20	3.85	106.688	0.128	2.5
	30	3.85	99.775	0.119	2.5
	40	3.85	100.364	0.120	2.5
Frequency Stability vs. Voltage	50	3.85	101.693	0.122	2.5
	20	3.47	104.120	0.124	2.5
	20	4.24	99.425	0.119	2.5
Result:				Pass	

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	96.058	0.115	2.5
	-20	3.85	97.425	0.116	2.5
	-10	3.85	100.825	0.121	2.5
	0	3.85	105.942	0.127	2.5
	10	3.85	102.263	0.122	2.5
	20	3.85	106.573	0.127	2.5
	30	3.85	98.122	0.117	2.5
	40	3.85	108.066	0.129	2.5
Frequency Stability vs. Voltage	50	3.85	97.357	0.116	2.5
	20	3.47	107.178	0.128	2.5
	20	4.24	99.284	0.119	2.5
Result:				Pass	

Occupied Bandwidth

Page 43 of 111

Page 45 of 111

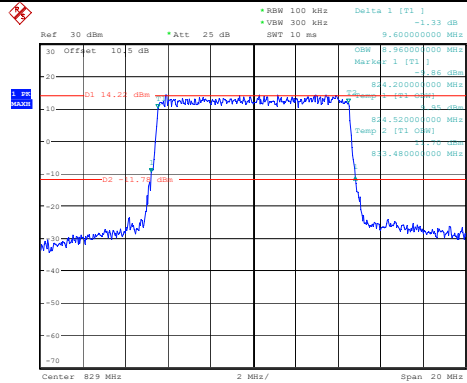
Occupied Bandwidth

Channel

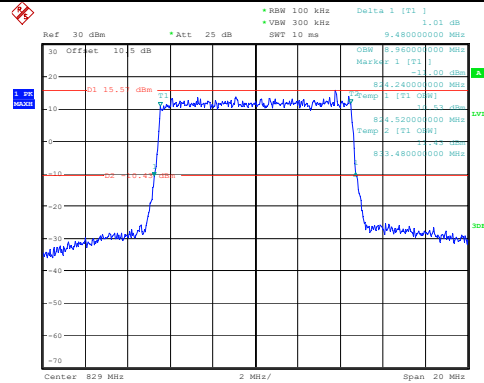
10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM

Lowest

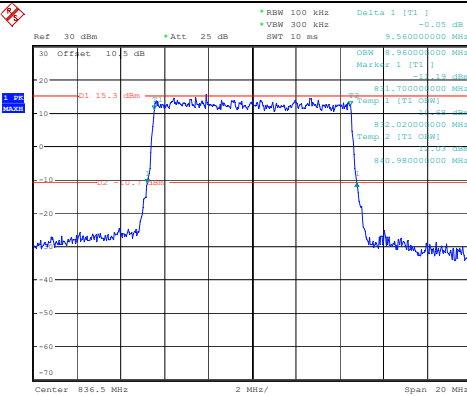


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:43:31

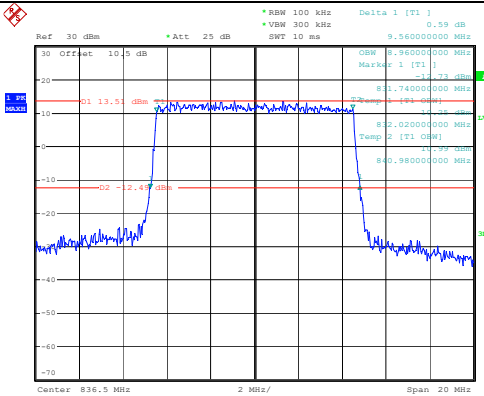


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:43:50

Middle

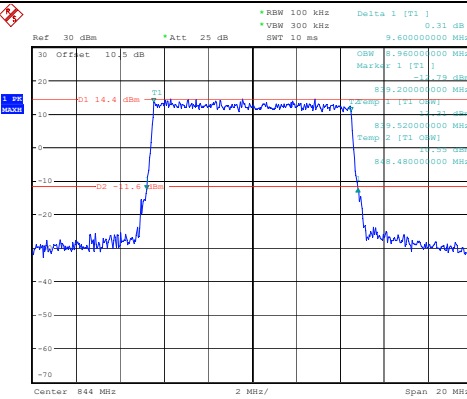


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:44:09

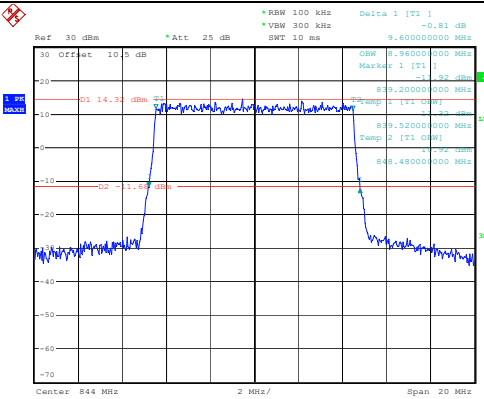


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:44:28

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:44:48



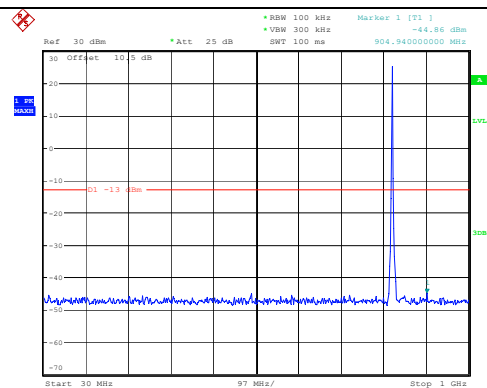
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:45:06

Spurious Emissions at Antenna Terminal

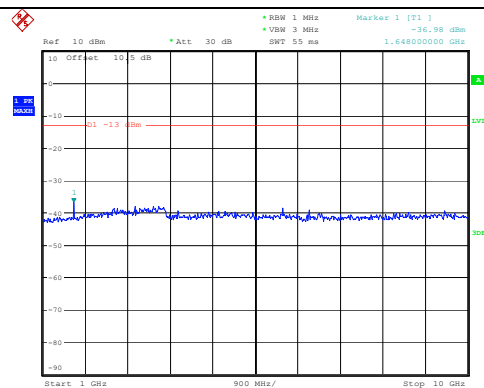
Channel

1.4MHz Bandwidth QPSK, full RB

Lowest

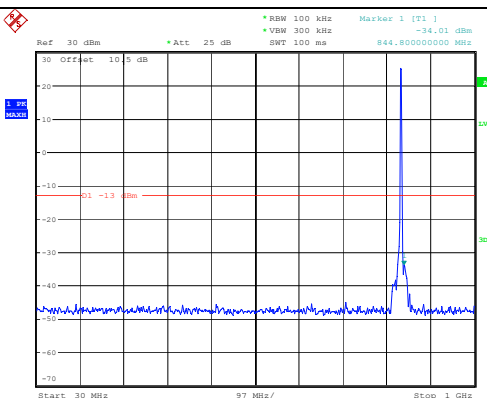


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:59:28

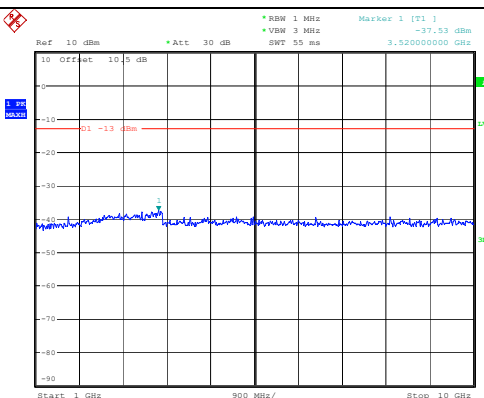


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:59:38

Middle

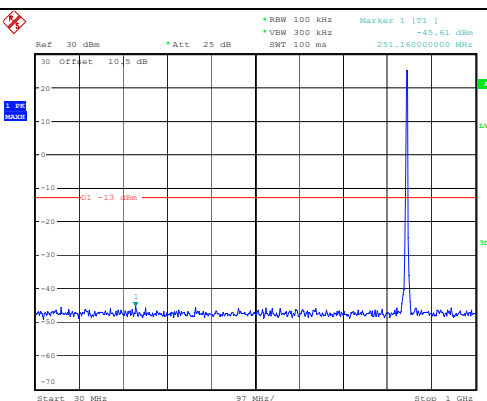


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:59:51

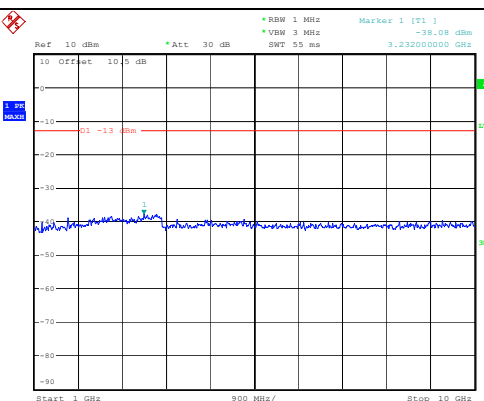


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:00:01

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:00:14



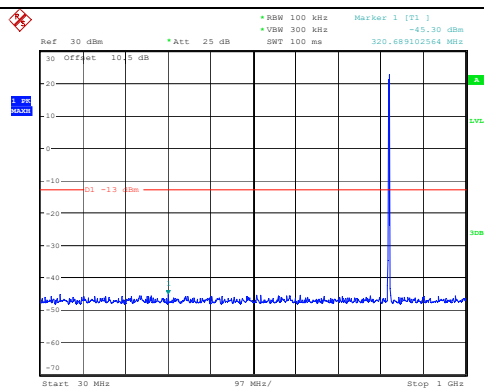
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:00:25

Spurious Emissions at Antenna Terminal

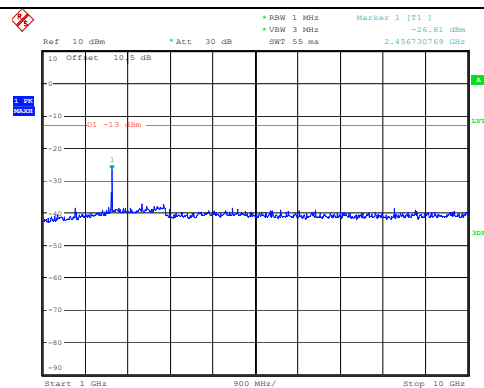
Channel

1.4MHz Bandwidth QPSK, RB1

Lowest

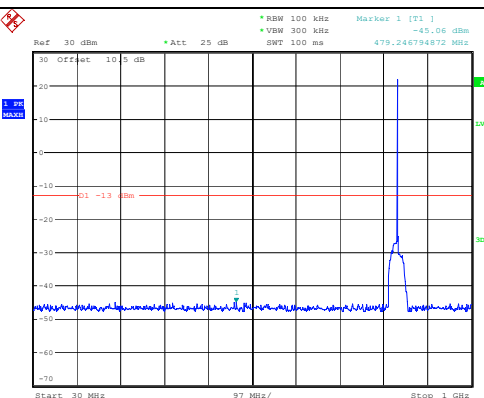


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:01:43

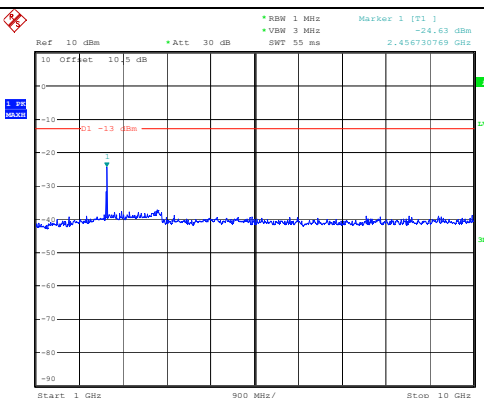


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:30:32

Middle

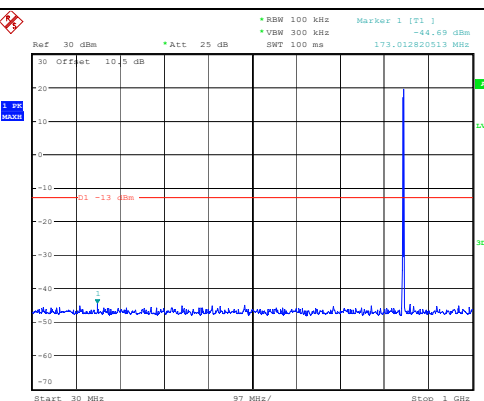


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:03:27

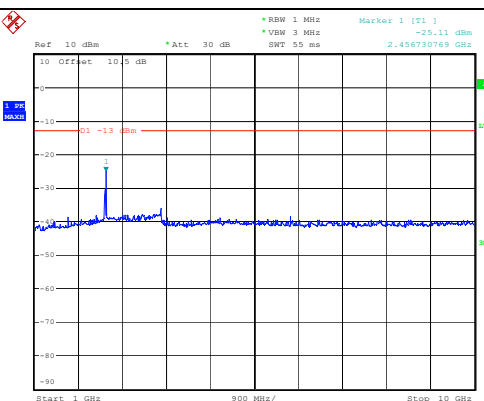


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:30:02

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:04:45



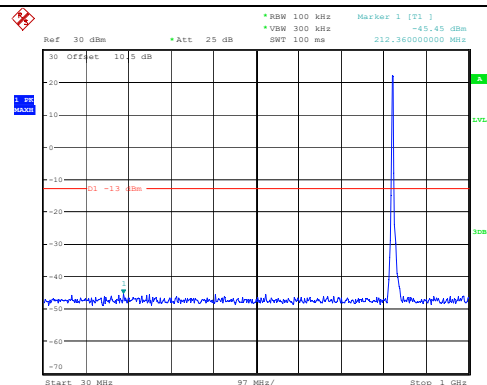
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:31:42

Spurious Emissions at Antenna Terminal

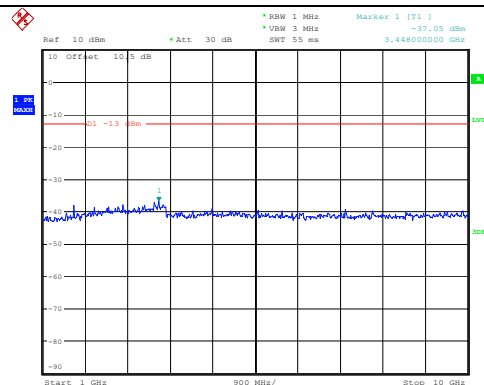
Channel

3MHz Bandwidth QPSK, full RB

Lowest

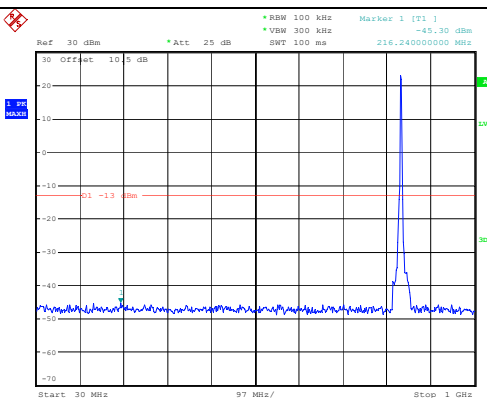


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:01:04

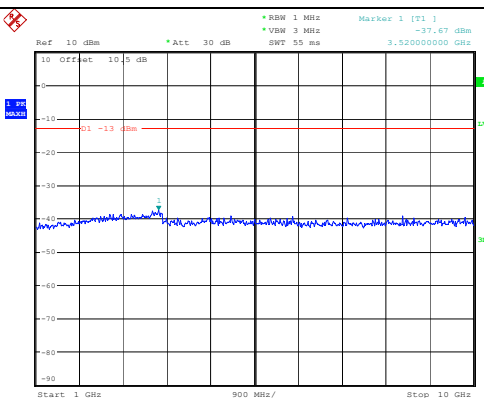


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:01:14

Middle

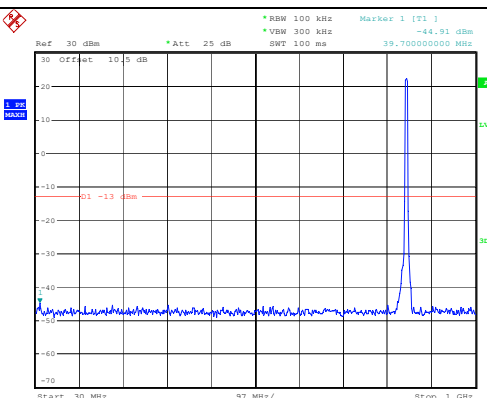


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:01:30

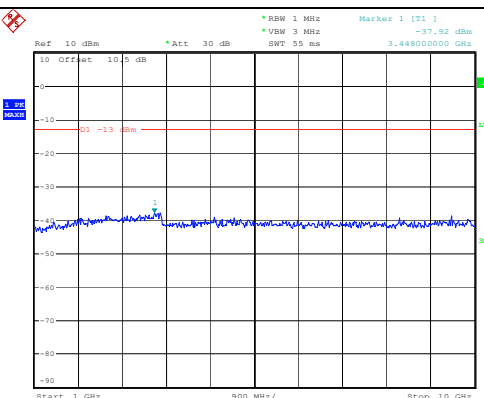


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:01:40

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:01:54



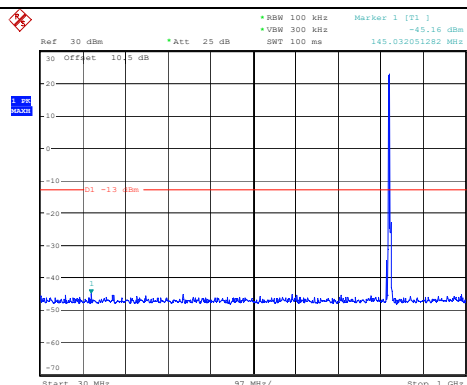
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:02:04

Spurious Emissions at Antenna Terminal

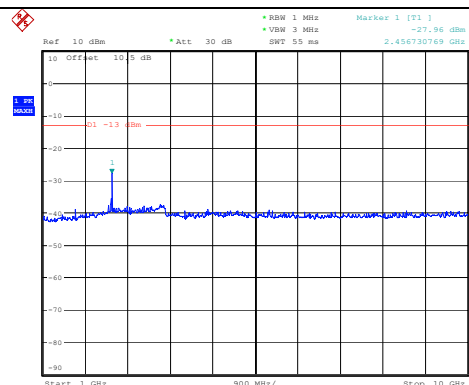
Channel

3MHz Bandwidth QPSK, RB1

Lowest

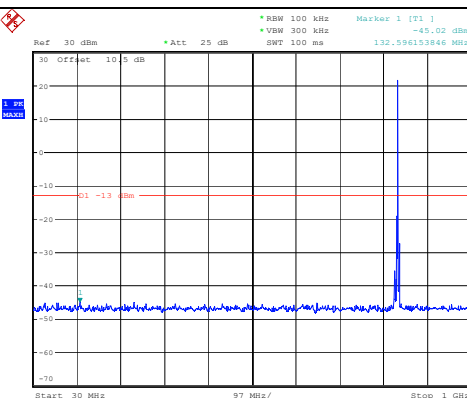


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:07:09

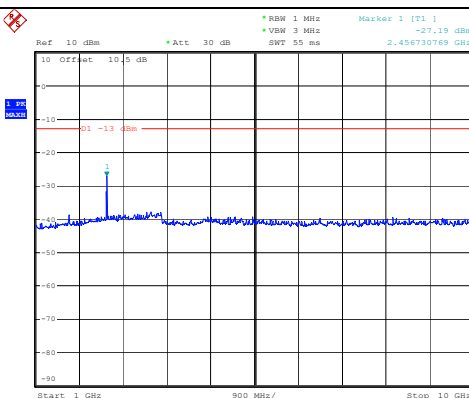


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:32:11

Middle

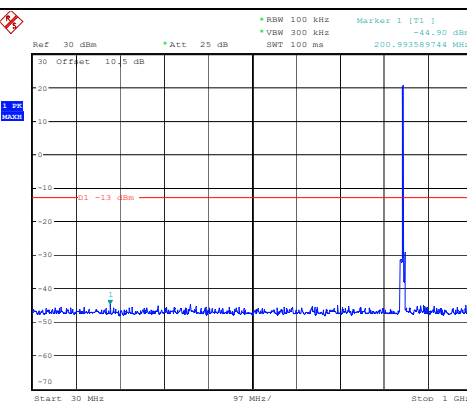


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:09:16

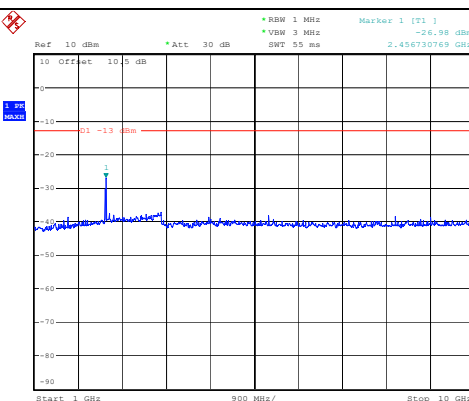


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:34:14

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:12:36



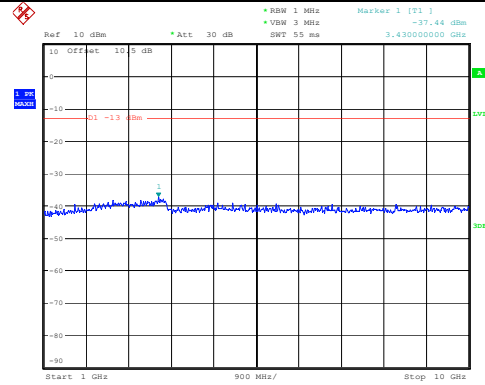
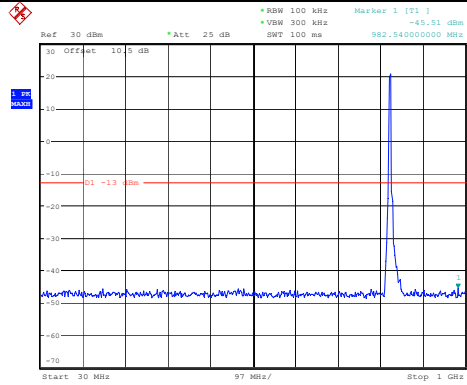
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:34:44

Spurious Emissions at Antenna Terminal

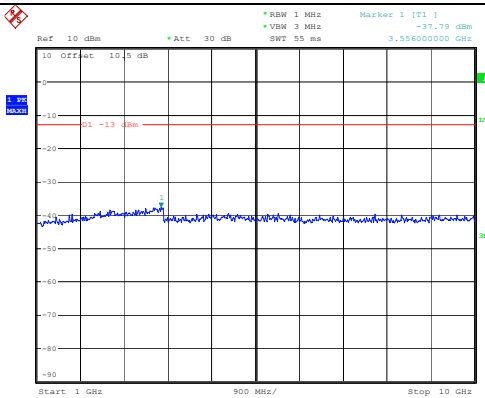
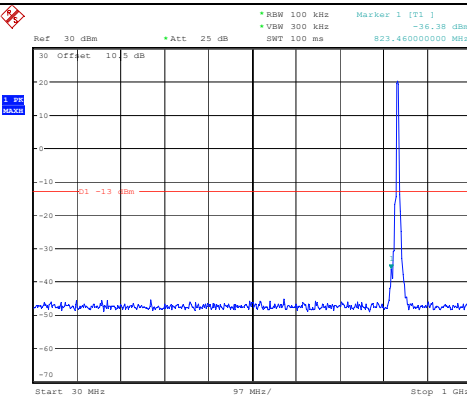
Channel

5MHz Bandwidth QPSK, full RB

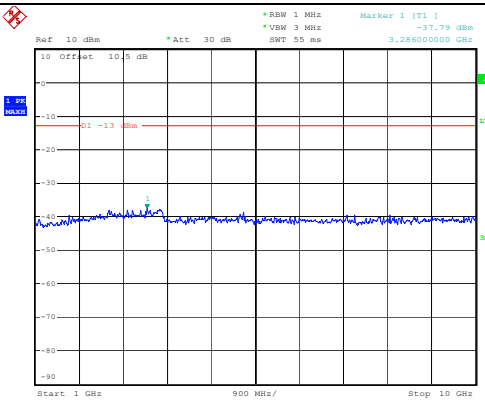
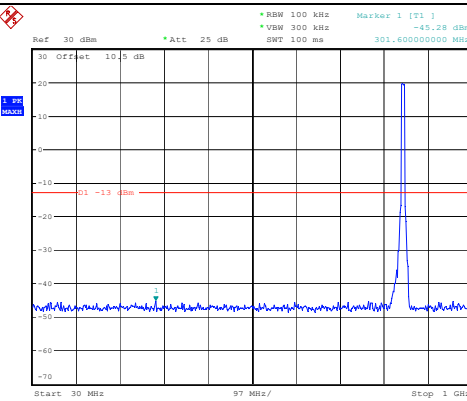
Lowest



Middle



Highest

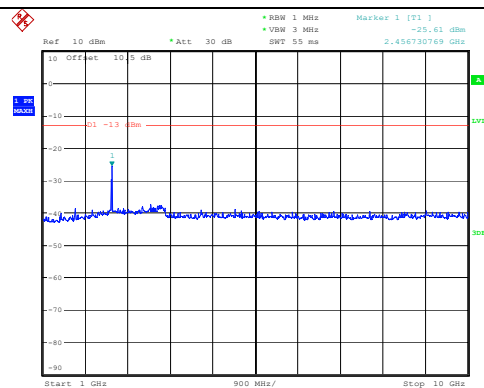
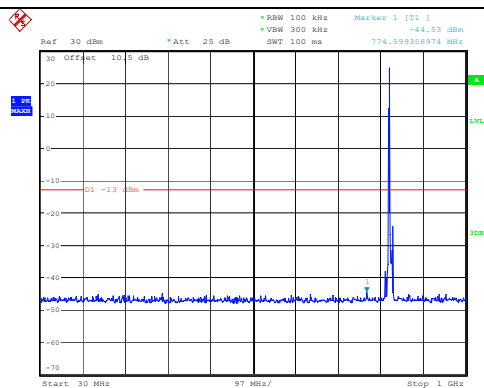


Spurious Emissions at Antenna Terminal

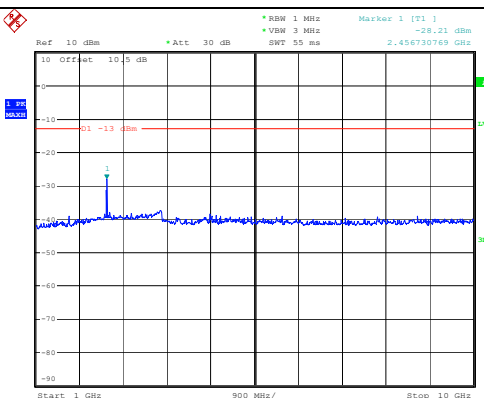
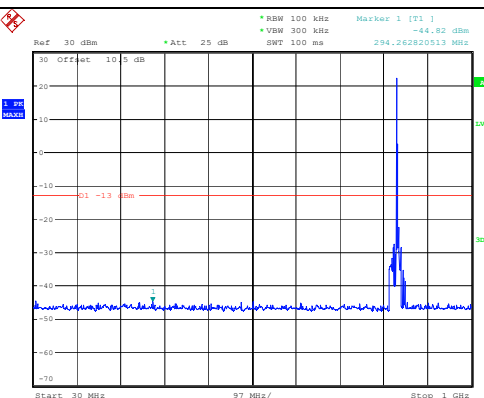
Channel

5MHz Bandwidth QPSK, RB1

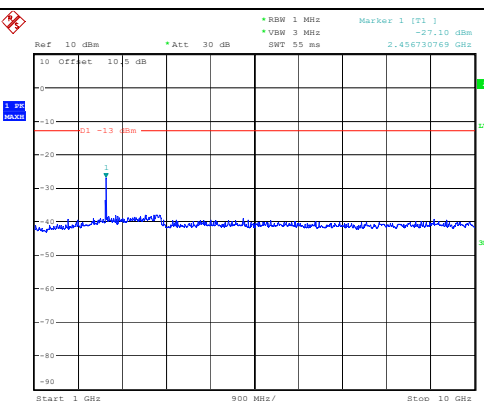
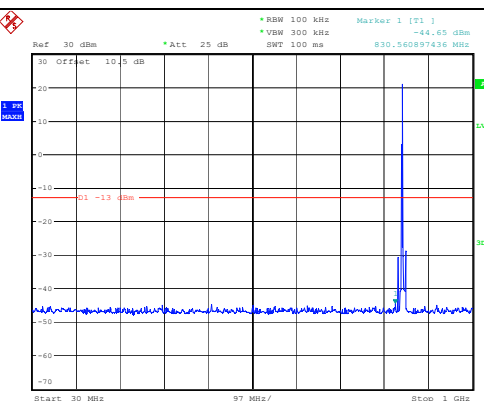
Lowest



Middle



Highest

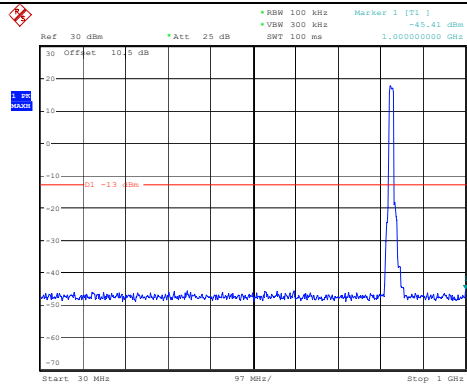
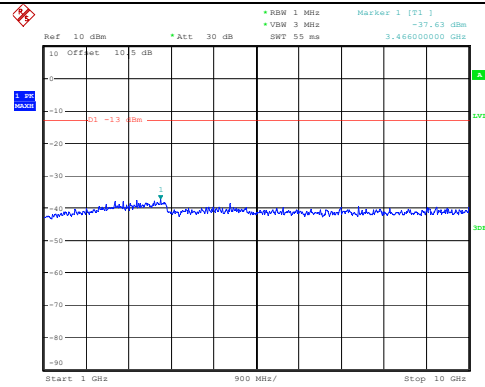


Spurious Emissions at Antenna Terminal

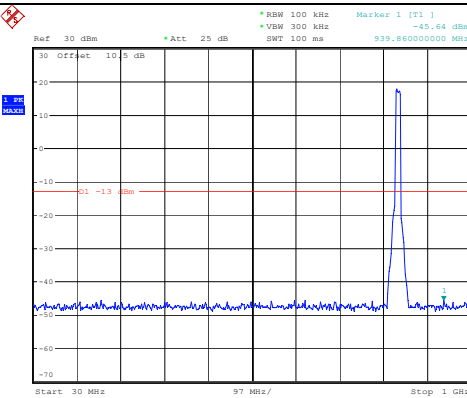
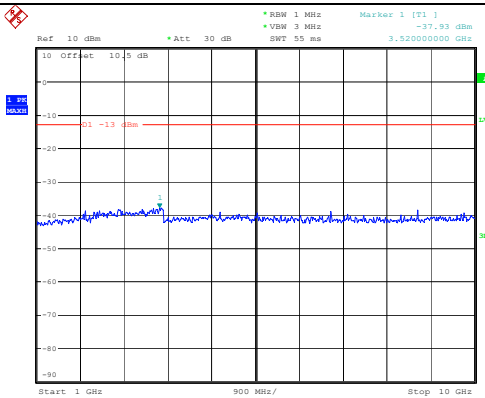
Channel

10MHz Bandwidth QPSK, full RB

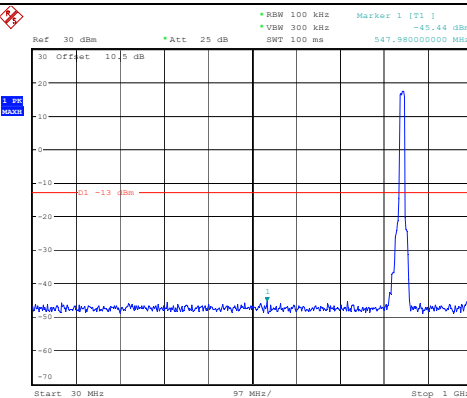
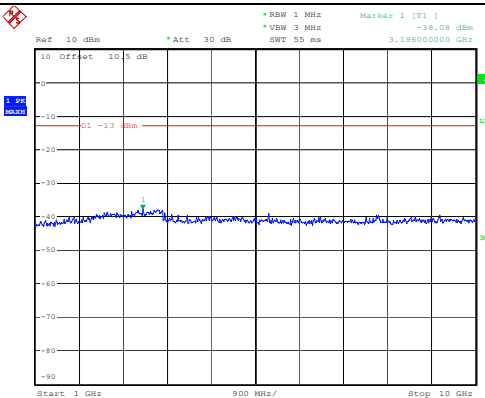
Lowest

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:04:55ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:05:05

Middle

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:05:19ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:05:29

Highest

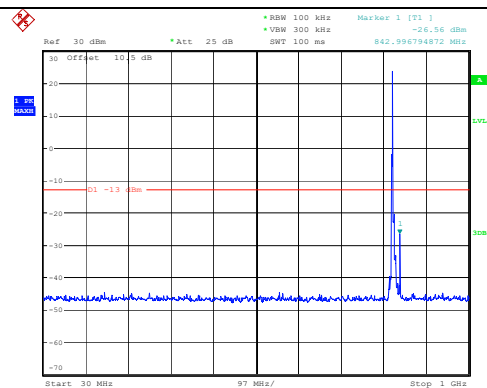
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:05:43ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 10:05:53

Spurious Emissions at Antenna Terminal

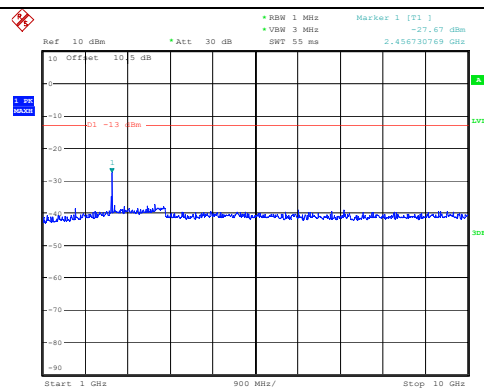
Channel

10MHz Bandwidth QPSK, RB1

Lowest

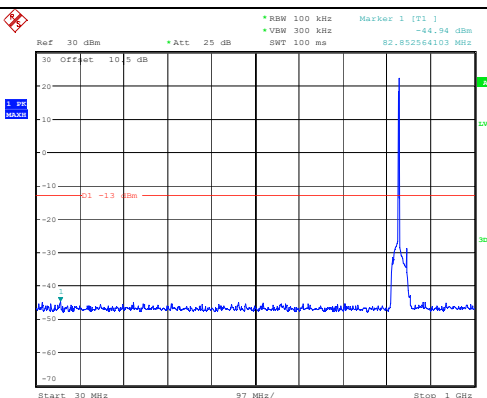


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:20:56

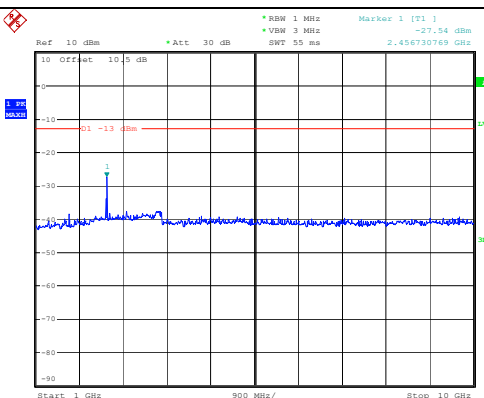


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:36:12

Middle

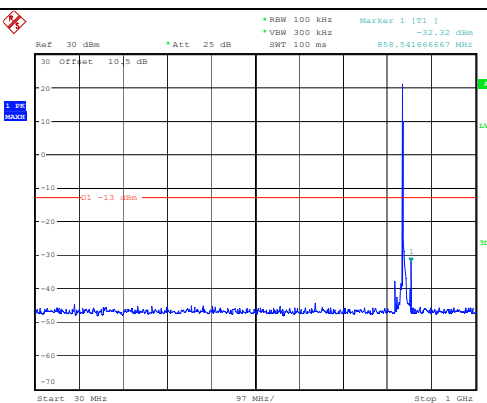


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:22:24

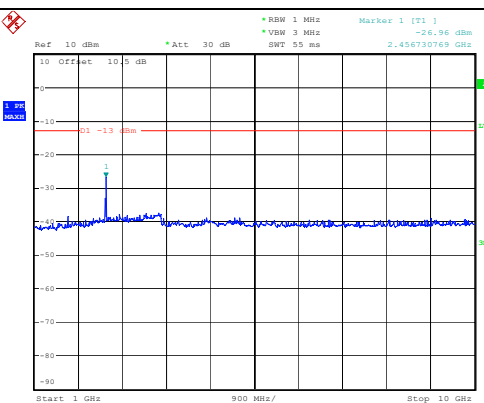


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:36:31

Highest

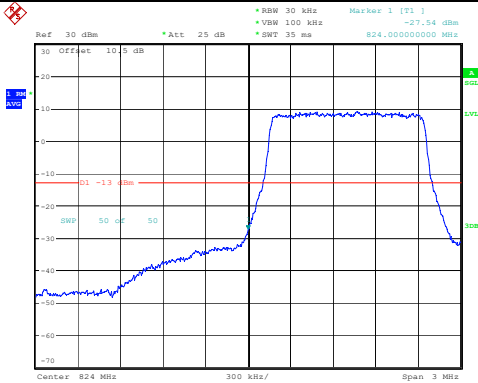
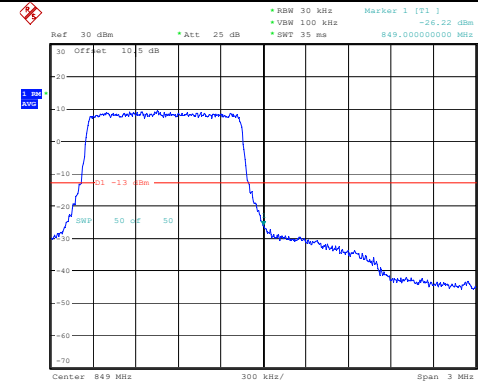
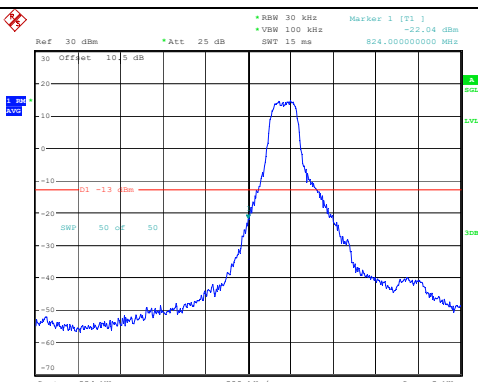
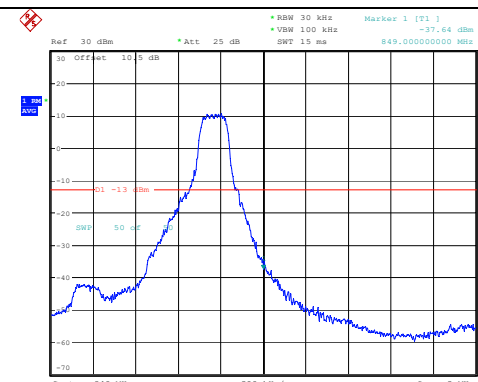
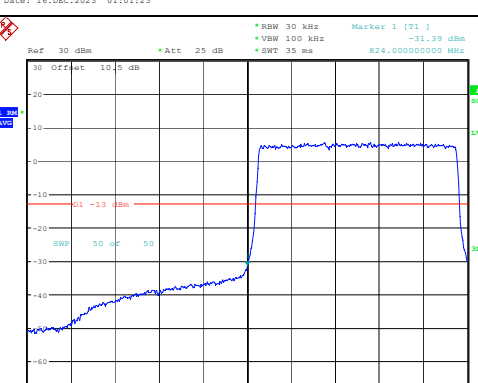
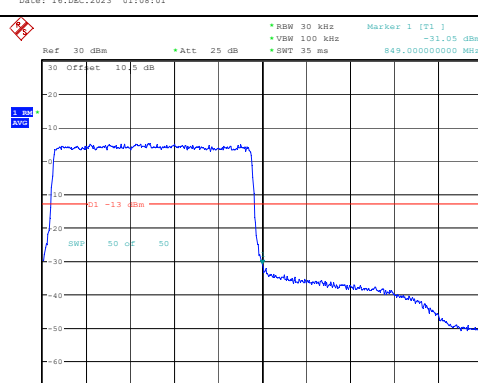


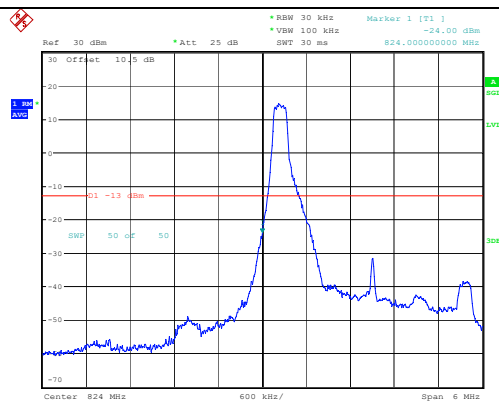
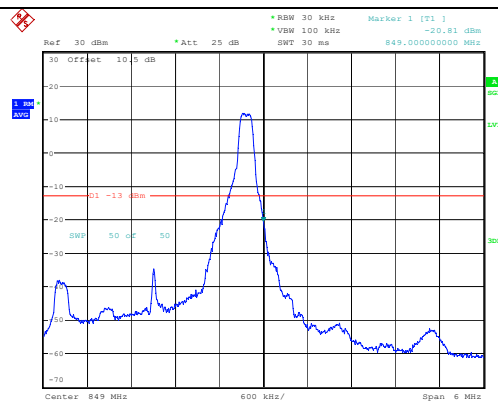
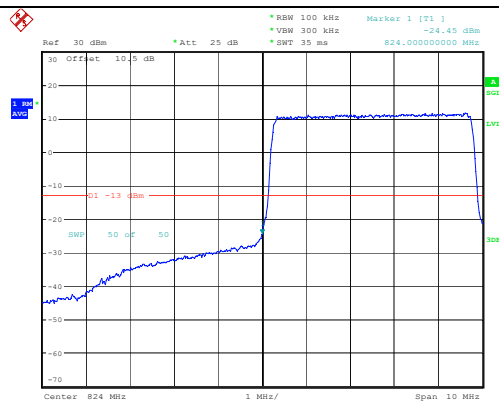
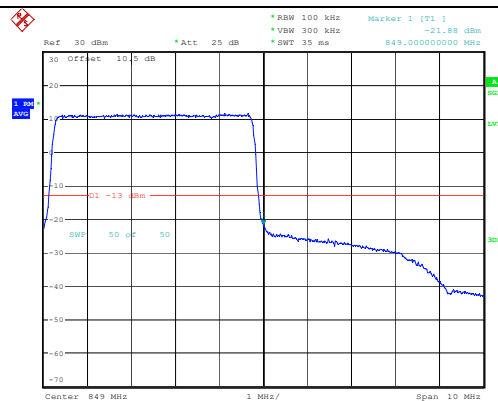
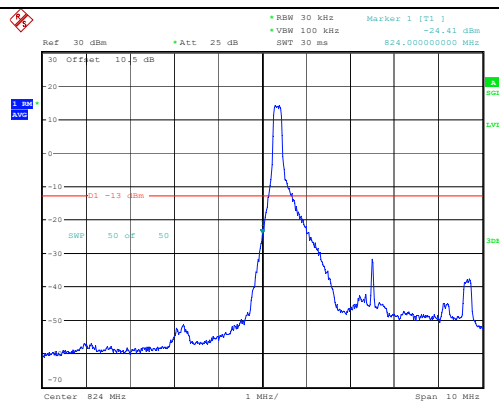
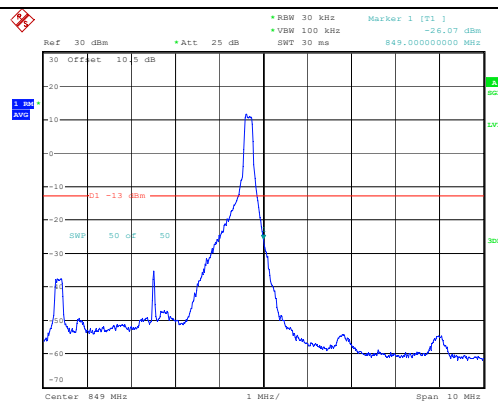
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:23:42



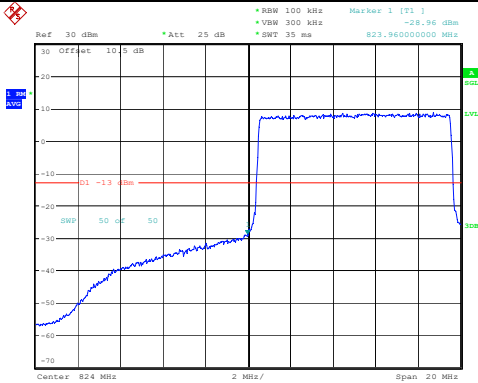
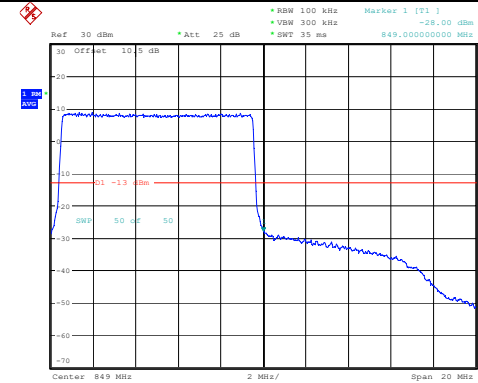
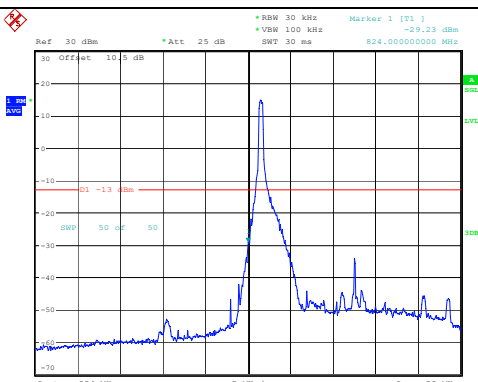
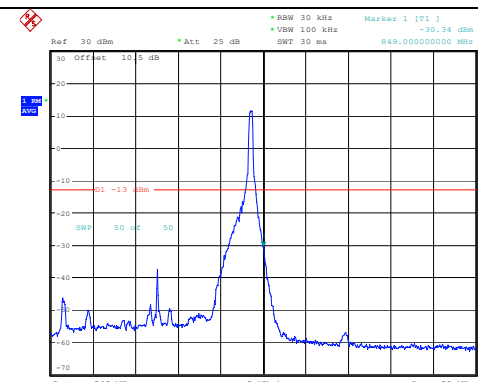
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 00:37:00

Out of band emission, Band Edge

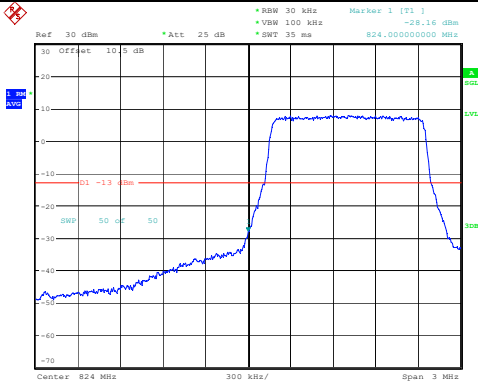
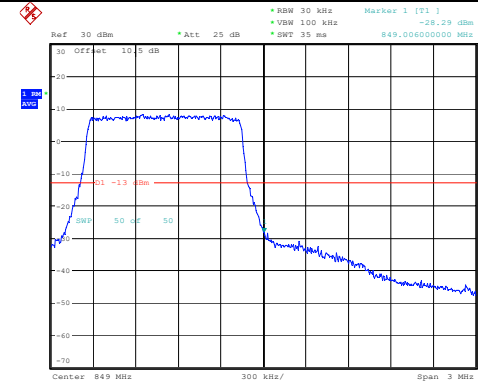
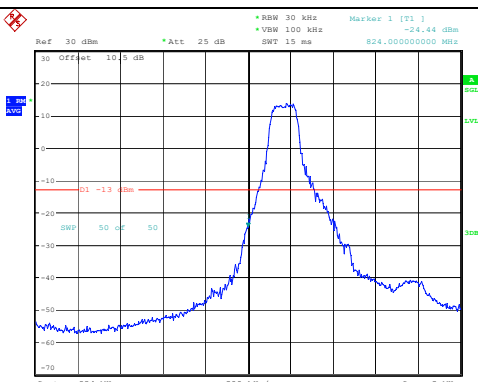
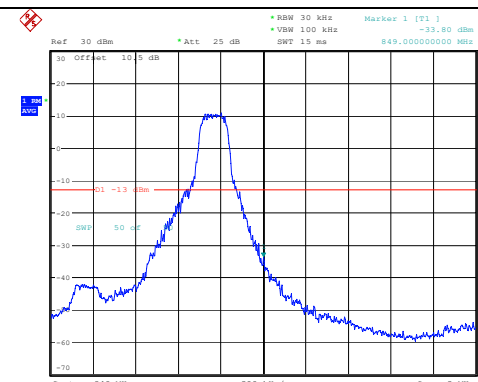
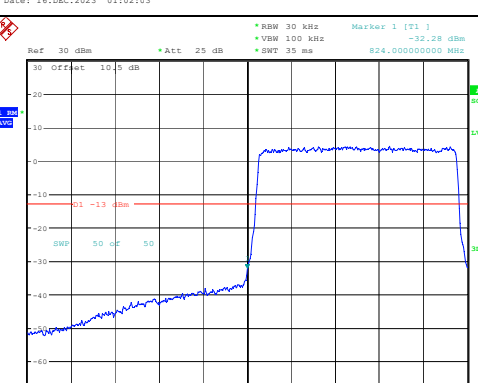
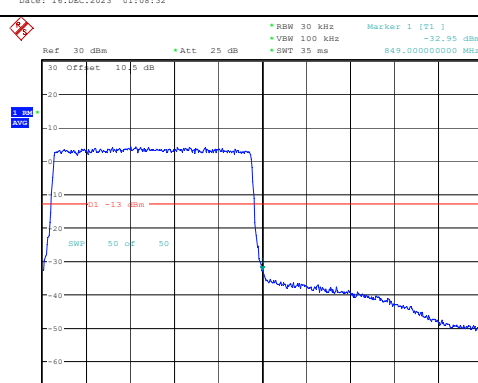
Mode	Lowest	Highest
QPSK 1.4MHz full RB	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] 1 -27.54 dBm 824.000000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:50:36	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] 1 -26.22 dBm 849.000000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:50:49
QPSK 1.4MHz _RB1	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 15 ms Marker 1 [T1] 1 -22.04 dBm 824.000000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:01:23	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 15 ms Marker 1 [T1] 1 -37.64 dBm 849.000000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:08:01
QPSK 3MHz full RB	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] 1 -31.39 dBm 824.000000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:51:28	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] 1 -31.05 dBm 849.000000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:51:41

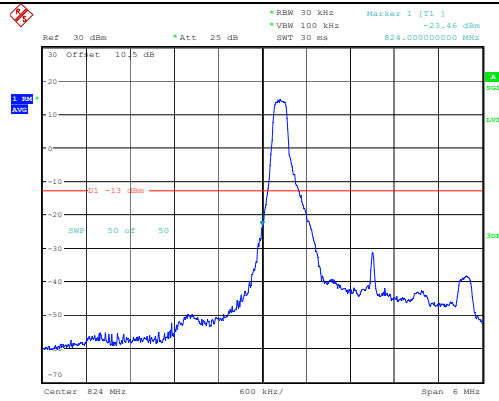
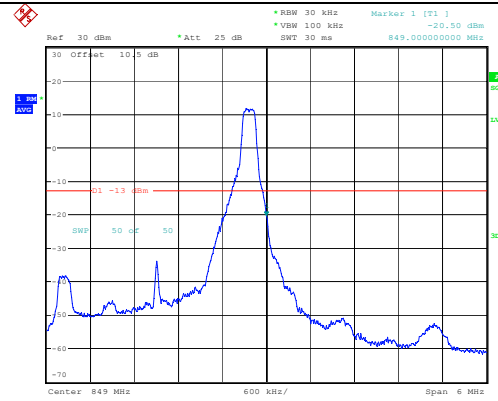
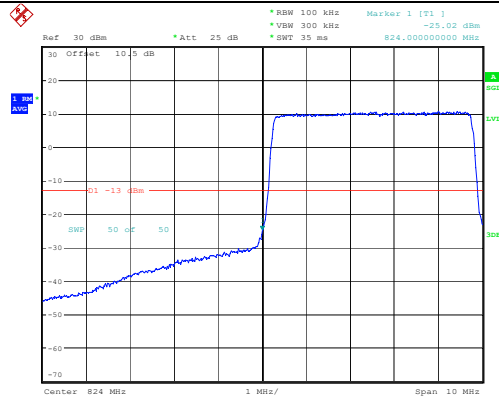
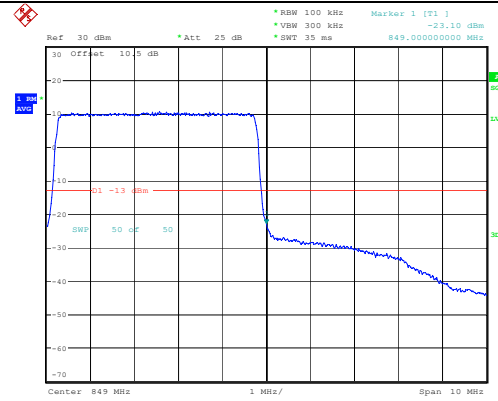
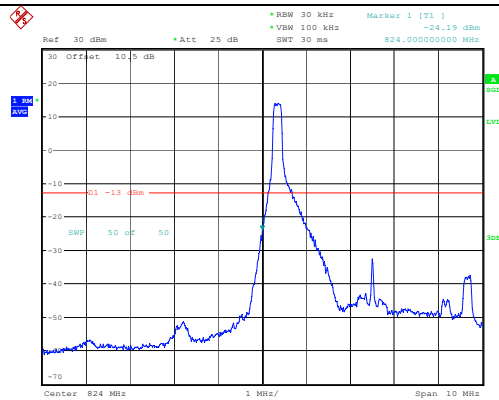
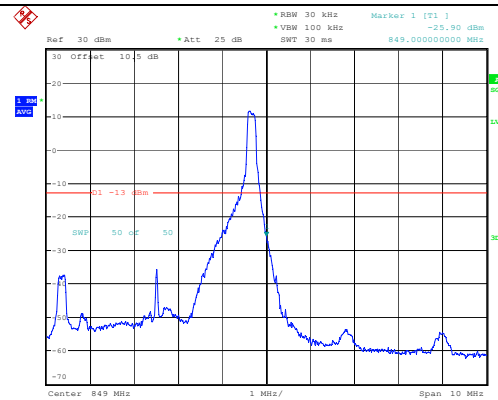
QPSK
3MHz
_RB1ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:11:32ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:13:47QPSK
5MHz
full RBProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:56:53ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:57:08QPSK
5MHz
_RB1ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:15:51ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:17:55

Out of band emission, Band Edge

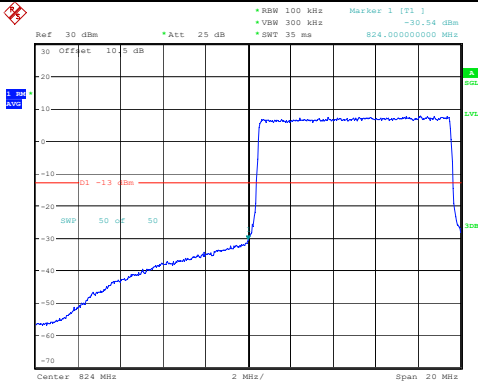
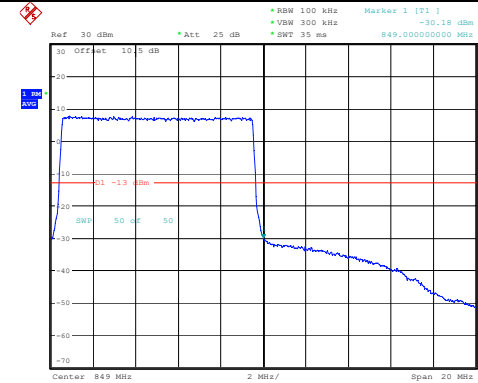
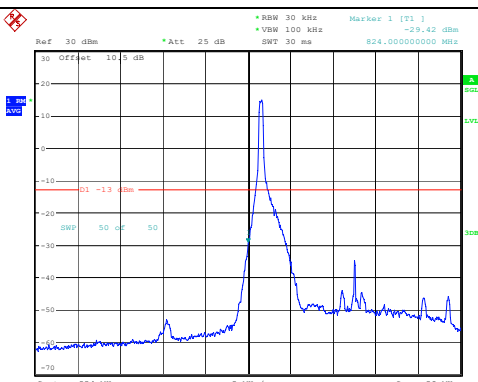
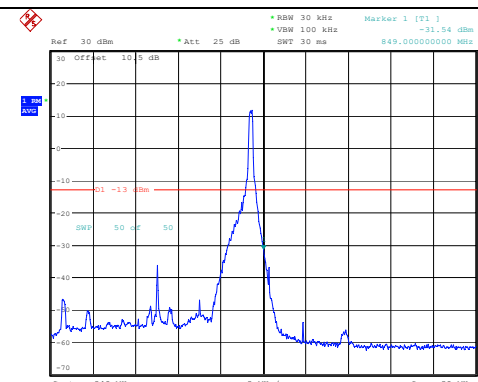
Mode	Lowest	Highest
QPSK 10MHz full RB	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -29.56 dBm *VSW 100 kHz *SWT 35 ms 823.96000000 MHz Center 824 MHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:57:51	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Marker 1 [T1] -28.00 dBm *VSW 100 kHz *SWT 35 ms 849.00000000 MHz Center 849 MHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:58:09
QPSK 10MHz, RB1	 Ref 30 dBm *Att 25 dB *RBW 30 kHz Marker 1 [T1] -29.23 dBm *VSW 100 kHz *SWT 30 ms 824.00000000 MHz Center 824 MHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:21:25	 Ref 30 dBm *Att 25 dB *RBW 30 kHz Marker 1 [T1] -30.34 dBm *VSW 100 kHz *SWT 30 ms 849.00000000 MHz Center 849 MHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:23:38

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz full RB	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -28.16 dBm 824.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:50:42	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -28.29 dBm 849.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:50:55
16QAM 1.4MHz, RB1	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 15 ms Marker 1 [T1] -24.44 dBm 824.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:02:03	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 15 ms Marker 1 [T1] -23.90 dBm 849.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:08:32
16QAM 3MHz full RB	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -32.28 dBm 824.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:51:34	 Ref 30 dBm *Att 25 dB *RBW 30 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -32.95 dBm 849.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:51:48

16QAM
3MHz,
RB1ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:12:14ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:14:1416QAM
5MHz
full RBProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:57:00ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 09:57:1516QAM
5MHz,
RB1ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:16:24ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 01:18:23

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz full RB	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -29.42 dBm 824.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:57:59	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -31.54 dBm 849.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 09:58:17
16QAM 10MHz, RB1	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -29.42 dBm 824.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:21:52	 Ref 30 dBm *Att 25 dB *RBW 100 kHz *VSW 100 kHz *SWT 35 ms Marker 1 [T1] -31.54 dBm 849.00000000 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:24:05

4.4 Antenna Port Test Data and Results for LTE Band 40

Serial Number:	2C4U-1	Test Date:	2023/11/3~2023/12/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25~26	Relative Humidity: (%)	46~47	ATM Pressure: (kPa)	101
----------------------	-------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Band	Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
LTE Band 40 Lower	5MHz	2307.5	2310	2312.5
	10MHz	/	2310	/
LTE Band 40 Upper	5MHz	2352.5	2355	2357.5
	10MHz	/	2355	/

Test Data:

(Note:Uplink Downlink configuration 3 was tested)

FCC§2.1046;§ 27.50(a)(3)**LTE Band 40 Lower:****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	21.56	21.56	21.52	20.3	24
	RB1#13	21.66	21.61	21.62		
	RB1#24	21.55	21.53	21.51		
	RB15#0	20.55	20.48	20.51		
	RB15#10	20.65	20.55	20.55		
	RB25#0	20.57	20.52	20.56		
5MHz 16QAM	RB1#0	20.69	20.78	20.53	19.52	24
	RB1#13	20.62	20.88	20.66		
	RB1#24	20.58	20.76	20.53		
	RB15#0	19.58	19.52	19.45		
	RB15#10	19.72	19.61	19.5		
	RB25#0	19.66	19.6	19.56		
10MHz QPSK	RB1#0	/	21.59	/	20.5	24
	RB1#25	/	21.86	/		
	RB1#49	/	21.58	/		
	RB25#0	/	20.56	/		
	RB25#25	/	20.61	/		
	RB50#0	/	20.6	/		
10MHz 16QAM	RB1#0	/	20.55	/	19.47	24
	RB1#25	/	20.83	/		
	RB1#49	/	20.56	/		
	RB25#0	/	19.59	/		
	RB25#25	/	19.71	/		
	RB50#0	/	19.62	/		

Note:

For 5MHz mode, the channel power is equal to the test result in dBm/5MHz.

For 10MHz mode, the channel power is sum of 10MHz bandwidth, the result is less than 24dBm, so in any 5MHz bandwidth, it's will not exceed limit

EIRP=Conducted Power(dBm) - LC(dB) + GT(dBi)

EIRP PSD=Conducted PSD(dBm/5MHz) - LC(dB) + GT(dBi)

LTE Band 40 Upper:**RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	21.76	21.68	21.65	20.4	24
	RB1#13	21.76	21.76	21.76		
	RB1#24	21.55	21.64	21.62		
	RB15#0	20.66	20.67	20.68		
	RB15#10	20.69	20.72	20.75		
	RB25#0	20.71	20.68	20.7		
5MHz 16QAM	RB1#0	20.94	20.71	20.72	19.63	24
	RB1#13	20.99	20.76	20.81		
	RB1#24	20.97	20.64	20.67		
	RB15#0	19.72	19.61	19.69		
	RB15#10	19.76	19.67	19.76		
	RB25#0	19.67	19.72	19.72		
10MHz QPSK	RB1#0	/	21.86	/	20.72	24
	RB1#25	/	22.08	/		
	RB1#49	/	21.76	/		
	RB25#0	/	20.79	/		
	RB25#25	/	20.82	/		
	RB50#0	/	20.84	/		
10MHz 16QAM	RB1#0	/	20.79	/	19.65	24
	RB1#25	/	21.01	/		
	RB1#49	/	20.72	/		
	RB25#0	/	19.86	/		
	RB25#25	/	19.85	/		
	RB50#0	/	19.83	/		

Note:

For 5MHz mode, the channel power is equal to the test result in dBm/5MHz.

For 10MHz mode, the channel power is sum of 10MHz bandwidth, the result is less than 24dBm, so in any 5MHz bandwidth, it's will not exceed limit

EIRP=Conducted Power(dBm) - LC(dB) + GT(dBi)

EIRP PSD=Conducted PSD(dBm/5MHz) - LC(dB) + GT(dBi)

Result:**Pass**

Duty Cycle

Operation Band	Modulation	Bandwidth	Ton (ms)	Ton+off (ms)	Duty Cycle (%)	Limit (%)
LTE Band 40 Lower	QPSK	5M	3.000	10.01	29.97	38
		10M	3.000	10.01	29.97	38
	16QAM	5M	2.995	10.005	29.94	38
		10M	3.005	10.01	30.02	38
LTE Band 40 Upper	QPSK	5M	3.005	10.01	30.02	38
		10M	3.005	10.01	30.02	38
	16QAM	5M	3.005	10.01	30.02	38
		10M	3.000	10.01	29.97	38
					Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth**LTE Band 40 Lower:**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle channel	High Channel
5MHz QPSK	4.540	4.540	4.540	5.280	5.320	5.140
5MHz 16QAM	4.520	4.520	4.520	5.180	5.560	5.160
10MHz QPSK	/	9.000	/	/	9.880	/
10MHz 16QAM	/	8.960	/	/	9.760	/

LTE Band 40 Upper:

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle channel	High Channel
5MHz QPSK	4.540	4.540	4.520	5.240	5.540	5.200
5MHz 16QAM	4.520	4.540	4.540	5.340	5.200	5.300
10MHz QPSK	/	9.000	/	/	9.880	/
10MHz 16QAM	/	9.000	/	/	9.760	/

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability**LTE Band 40 Lower:**

Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2305.024	2305.000	2314.889	2315.000
	-20	3.85	2305.076	2305.000	2314.870	2315.000
	-10	3.85	2305.003	2305.000	2314.892	2315.000
	0	3.85	2305.103	2305.000	2314.968	2315.000
	10	3.85	2305.107	2305.000	2314.987	2315.000
	20	3.85	2305.014	2305.000	2314.920	2315.000
	30	3.85	2305.056	2305.000	2314.870	2315.000
	40	3.85	2305.130	2305.000	2314.883	2315.000
	50	3.85	2305.144	2305.000	2314.896	2315.000
Frequency Stability vs. Voltage	20	3.47	2305.083	2305.000	2314.860	2315.000
	20	4.24	2305.135	2305.000	2314.913	2315.000
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2305.057	2305.000	2314.971	2315.000
	-20	3.85	2305.112	2305.000	2314.953	2315.000
	-10	3.85	2305.052	2305.000	2314.856	2315.000
	0	3.85	2305.011	2305.000	2314.896	2315.000
	10	3.85	2305.072	2305.000	2314.866	2315.000
	20	3.85	2305.045	2305.000	2314.874	2315.000
	30	3.85	2305.128	2305.000	2314.887	2315.000
	40	3.85	2305.012	2305.000	2314.884	2315.000
	50	3.85	2305.117	2305.000	2314.966	2315.000
Frequency Stability vs. Voltage	20	3.47	2305.052	2305.000	2314.979	2315.000
	20	4.24	2305.035	2305.000	2314.887	2315.000
					Result:	Pass

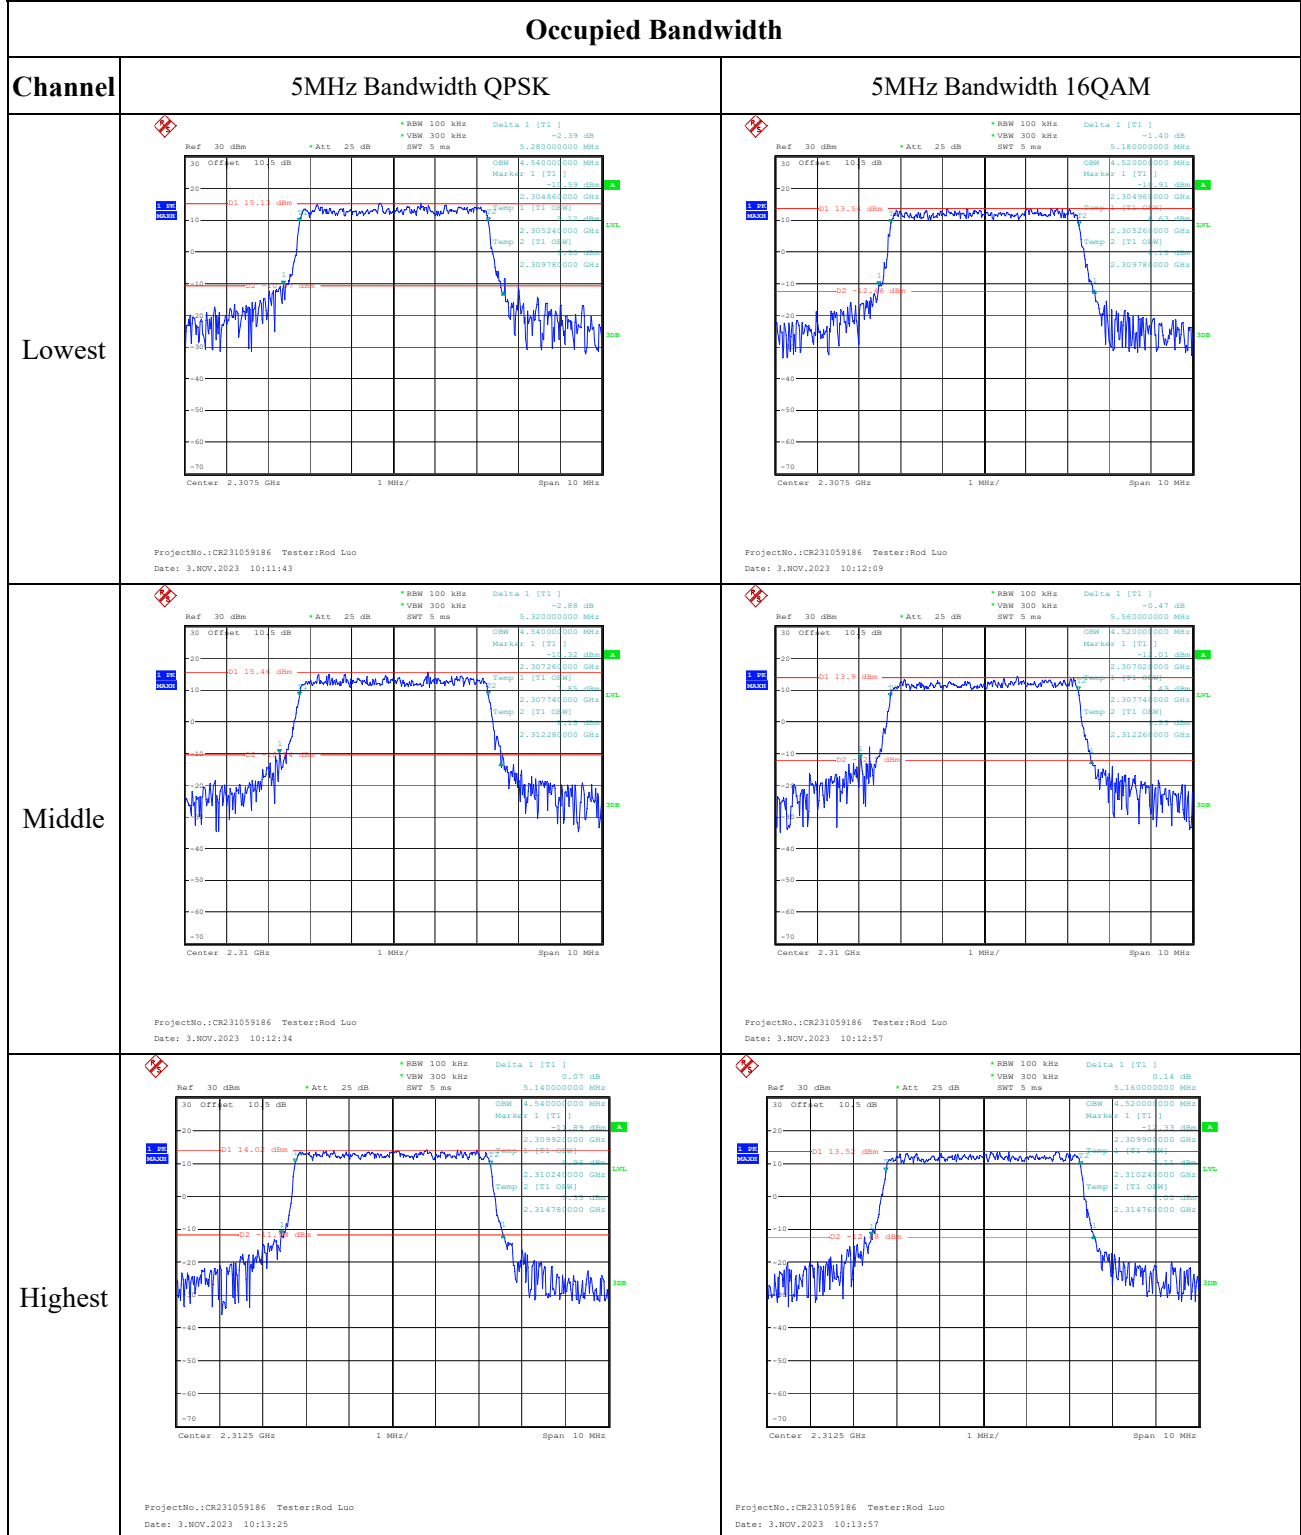
LTE Band 40 Upper:

Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2350.068	2350.000	2359.994	2360.000
	-20	3.85	2350.035	2350.000	2359.907	2360.000
	-10	3.85	2350.023	2350.000	2359.975	2360.000
	0	3.85	2350.101	2350.000	2359.929	2360.000

	10	3.85	2350.024	2350.000	2359.892	2360.000
	20	3.85	2350.083	2350.000	2359.877	2360.000
	30	3.85	2350.010	2350.000	2359.887	2360.000
	40	3.85	2350.096	2350.000	2359.925	2360.000
	50	3.85	2350.105	2350.000	2359.858	2360.000
Frequency Stability vs. Voltage	20	3.47	2350.106	2350.000	2359.895	2360.000
	20	4.24	2350.012	2350.000	2359.855	2360.000
Result:					Pass	

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2350.010	2350.000	2359.999	2360.000
	-20	3.85	2350.066	2350.000	2359.971	2360.000
	-10	3.85	2350.119	2350.000	2359.859	2360.000
	0	3.85	2350.013	2350.000	2359.990	2360.000
	10	3.85	2350.098	2350.000	2359.929	2360.000
	20	3.85	2350.123	2350.000	2359.999	2360.000
	30	3.85	2350.106	2350.000	2359.959	2360.000
	40	3.85	2350.016	2350.000	2359.990	2360.000
	50	3.85	2350.139	2350.000	2359.892	2360.000
Frequency Stability vs. Voltage	20	3.47	2350.102	2350.000	2359.994	2360.000
	20	4.24	2350.093	2350.000	2359.858	2360.000
Result:					Pass	

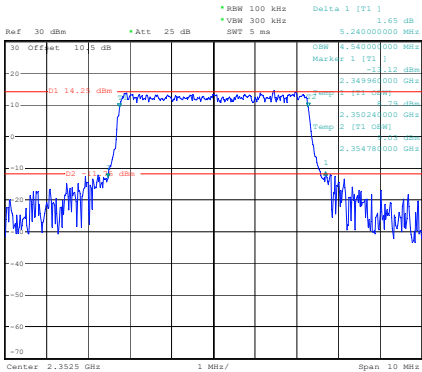
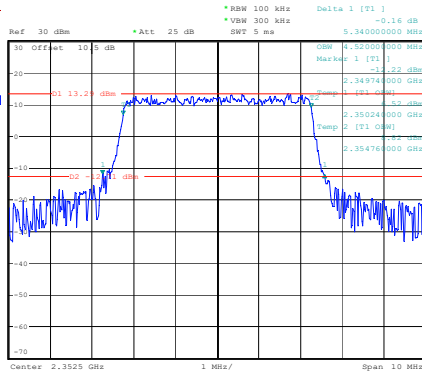
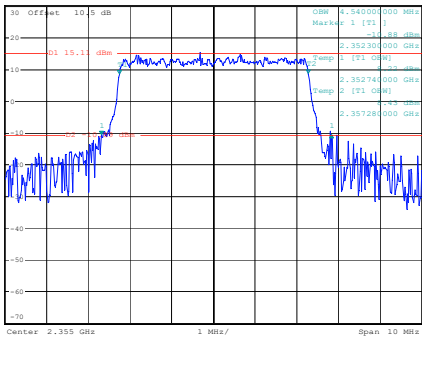
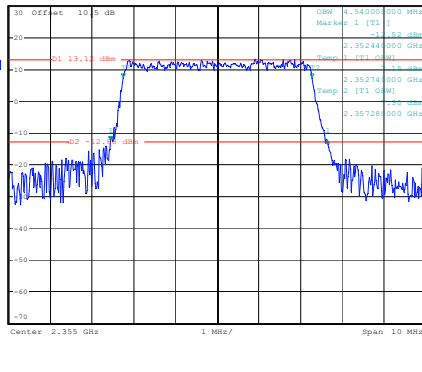
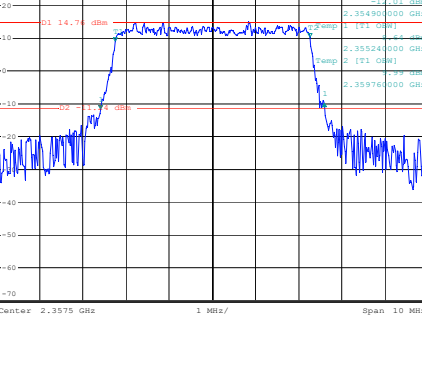
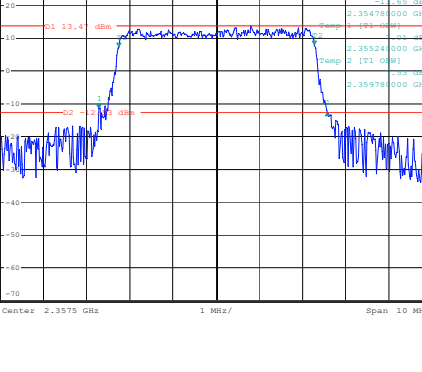
Test Plots (Note: The 10.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):
2305-2315 MHz:



Page 68 of 111

2350-2360 MHz:

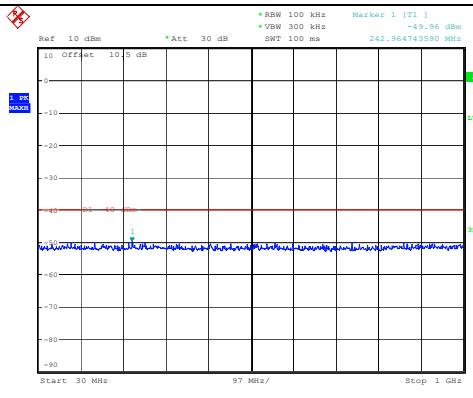
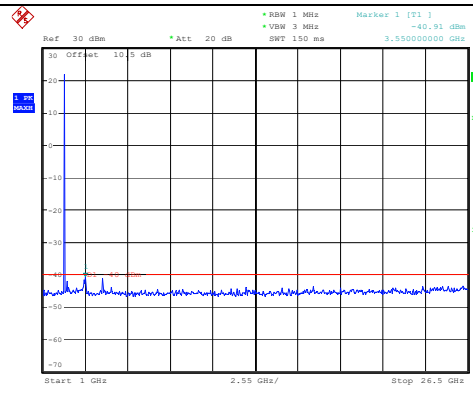
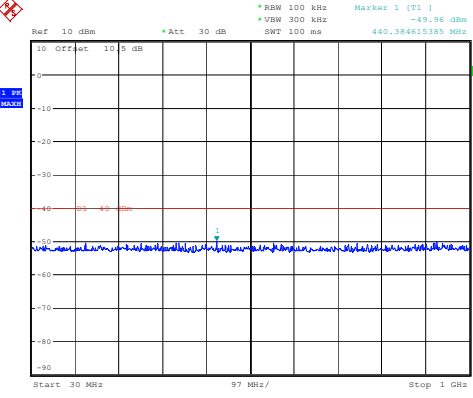
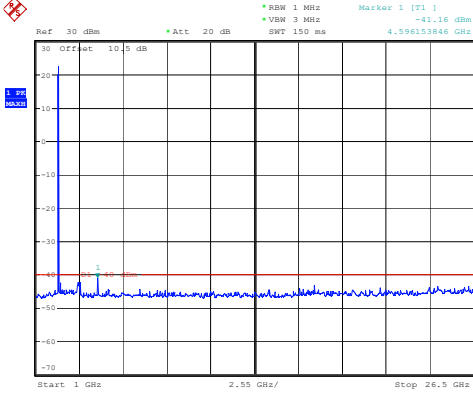
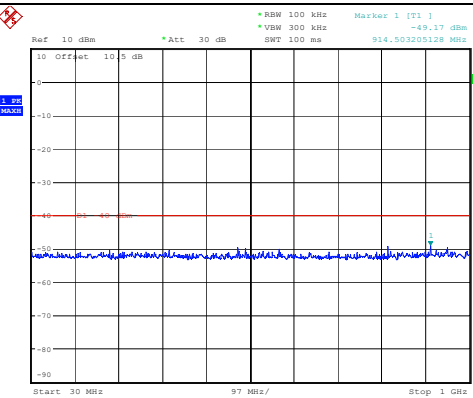
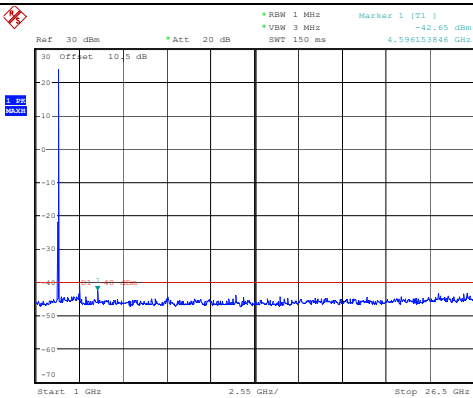
Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm Offset 10.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWF 5 ms Delta 1 [T1] 1.65 dB Marker 1 [T1] -14.21 dBm OSW 5.240000000 MHz Marker 1 [T1] -14.21 dBm Temp 1 [T1] 0.349960000 GHz Temp 2 [T1] 0.350240000 GHz Temp 3 [T1] 0.354760000 GHz Center 2.3525 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:21:22	 Ref 30 dBm Offset 10.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWF 5 ms Delta 1 [T1] 0.01 dB Marker 1 [T1] -13.2 dBm OSW 5.340000000 MHz Marker 1 [T1] -13.2 dBm Temp 1 [T1] 0.349740000 GHz Temp 2 [T1] 0.350240000 GHz Temp 3 [T1] 0.354760000 GHz Center 2.3525 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:21:44
Middle	 Ref 30 dBm Offset 10.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWF 5 ms Delta 1 [T1] 0.08 dB Marker 1 [T1] -15.11 dBm OSW 5.540000000 MHz Marker 1 [T1] -15.11 dBm Temp 1 [T1] 0.350240000 GHz Temp 2 [T1] 0.352740000 GHz Temp 3 [T1] 0.357260000 GHz Center 2.355 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:22:08	 Ref 30 dBm Offset 10.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWF 5 ms Delta 1 [T1] 0.01 dB Marker 1 [T1] -13.1 dBm OSW 5.500000000 MHz Marker 1 [T1] -13.1 dBm Temp 1 [T1] 0.350240000 GHz Temp 2 [T1] 0.352740000 GHz Temp 3 [T1] 0.357260000 GHz Center 2.355 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:22:30
Highest	 Ref 30 dBm Offset 10.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWF 5 ms Delta 1 [T1] 1.71 dB Marker 1 [T1] -14.7 dBm OSW 5.200000000 MHz Marker 1 [T1] -14.7 dBm Temp 1 [T1] 0.354900000 GHz Temp 2 [T1] 0.355240000 GHz Temp 3 [T1] 0.359760000 GHz Center 2.3575 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:22:51	 Ref 30 dBm Offset 10.5 dB Att 25 dB RBW 100 kHz VBW 300 kHz SWF 5 ms Delta 1 [T1] -1.32 dB Marker 1 [T1] -13.6 dBm OSW 5.300000000 MHz Marker 1 [T1] -13.6 dBm Temp 1 [T1] 0.354780000 GHz Temp 2 [T1] 0.355240000 GHz Temp 3 [T1] 0.359780000 GHz Center 2.3575 GHz 1 MHz/ Span 10 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:23:13

Page 70 of 111

2305-2315 MHz:

Spurious Emissions at Antenna Terminal

Channel	5MHz Bandwidth QPSK, RB1	
Lowest	 Ref 10 dBm *Att 30 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -49.96 dBm 242.964743550 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 22:04:59	 Ref 30 dBm *Att 20 dB *RBW 1 MHz *VSW 3 MHz *SWT 150 ms Marker 1 [T1] -40.91 dBm 3.550000000 GHz Start 1 GHz 2.55 GHz/ Stop 26.5 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 23:05:38
	 Ref 10 dBm *Att 30 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -49.96 dBm 440.384615385 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 22:06:46	 Ref 30 dBm *Att 20 dB *RBW 1 MHz *VSW 3 MHz *SWT 150 ms Marker 1 [T1] -41.16 dBm 4.596153846 GHz Start 1 GHz 2.55 GHz/ Stop 26.5 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 23:44:33
Highest	 Ref 10 dBm *Att 30 dB *RBW 100 kHz *VSW 300 kHz *SWT 100 ms Marker 1 [T1] -49.17 dBm 914.503205128 MHz Start 30 MHz 97 MHz/ Stop 1 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 22:07:53	 Ref 30 dBm *Att 20 dB *RBW 1 MHz *VSW 3 MHz *SWT 150 ms Marker 1 [T1] -42.65 dBm 4.596153846 GHz Start 1 GHz 2.55 GHz/ Stop 26.5 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 23:45:49

Spurious Emissions at Antenna Terminal

Channel	10MHz Bandwidth QPSK, RB1	
Middle		
	ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 22:08:43	ProjectNo.:CR231059186 Tester:Rod Luo Date: 15.DEC.2023 23:46:49

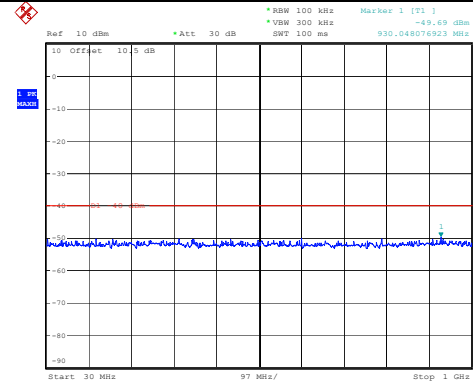
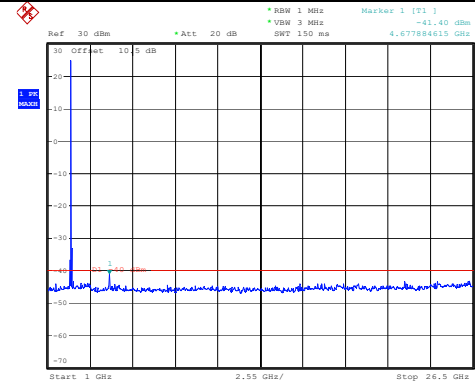
2350-2360 MHz:

Spurious Emissions at Antenna Terminal

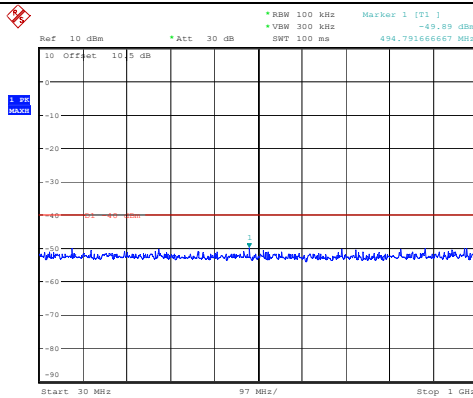
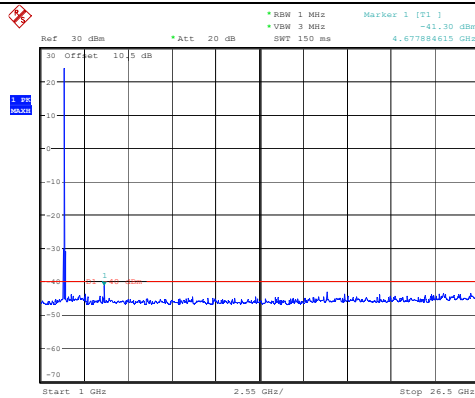
Channel

5MHz Bandwidth QPSK, RB1

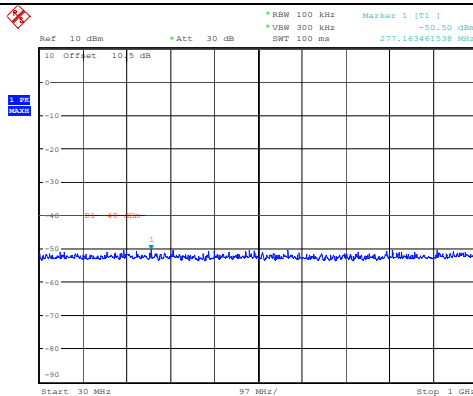
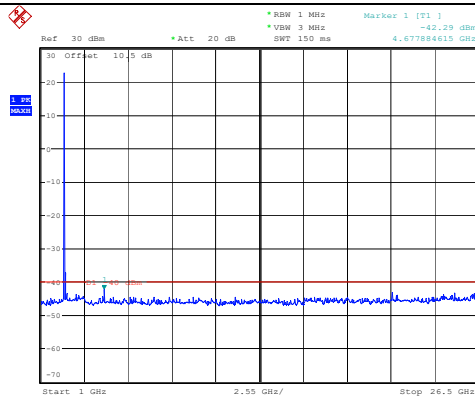
Lowest

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 15.DEC.2023 23:53:01ProjectNo.:CR231059186 Tester:Rod Luo
Date: 15.DEC.2023 23:39:31

Middle


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 15.DEC.2023 23:53:46ProjectNo.:CR231059186 Tester:Rod Luo
Date: 15.DEC.2023 23:41:01

Highest

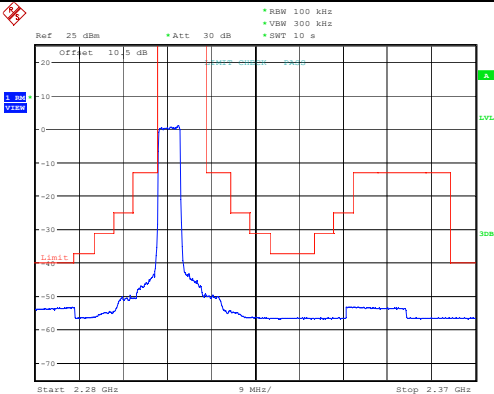
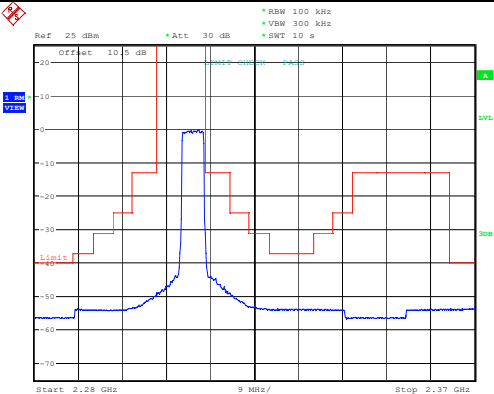
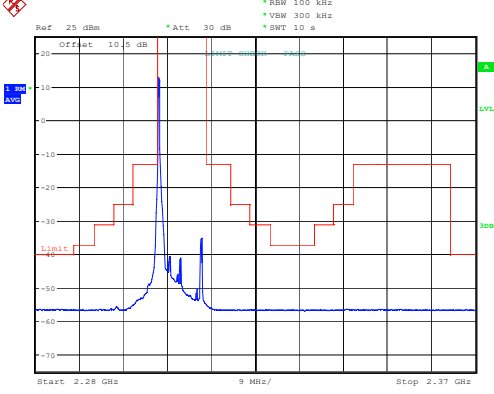
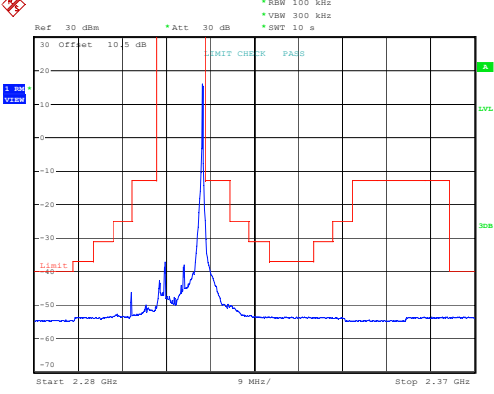
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 15.DEC.2023 23:54:15ProjectNo.:CR231059186 Tester:Rod Luo
Date: 15.DEC.2023 23:41:43

Channel

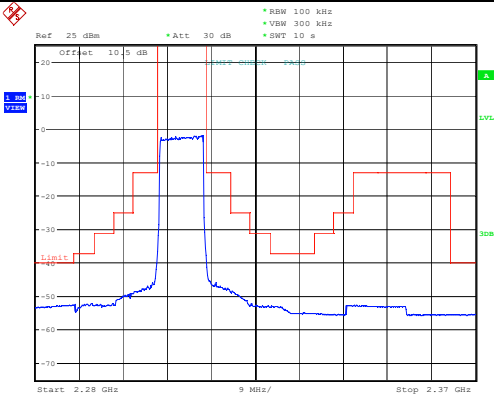
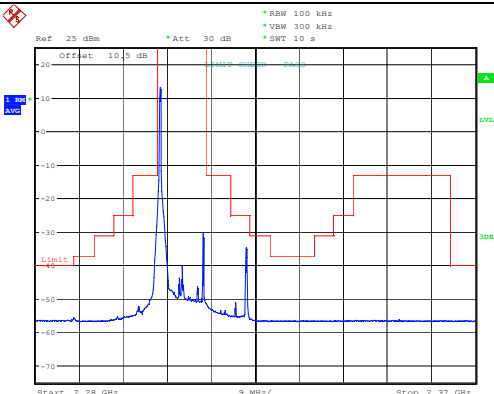
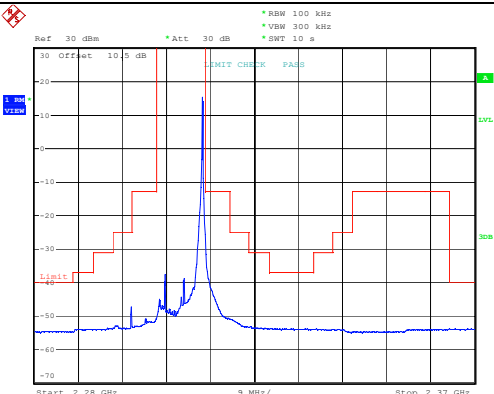
Middle



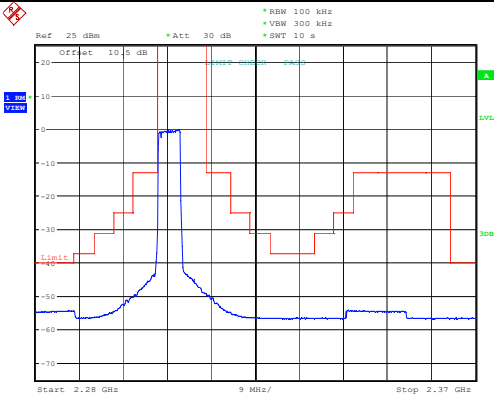
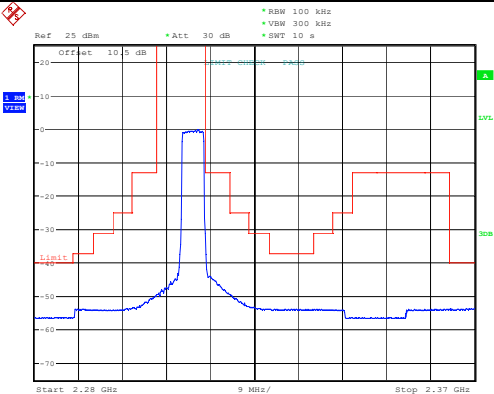
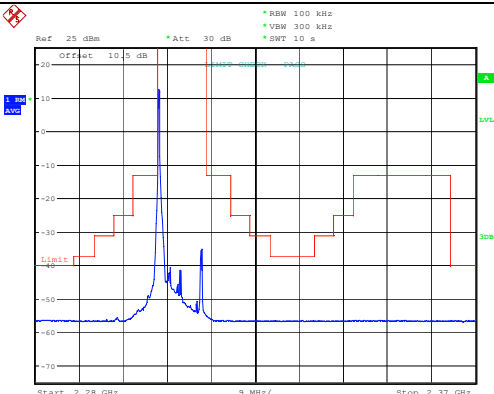
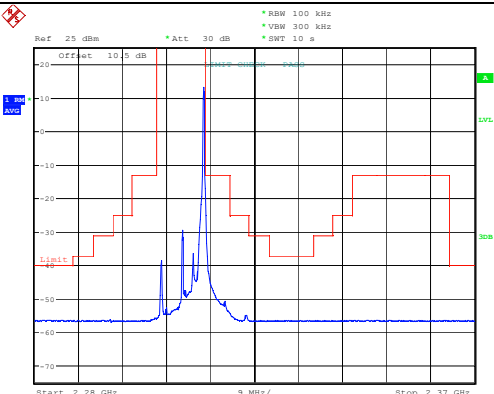
2305-2315 MHz:

Out of band emission, Band Edge		
Mode	Lowest	Highest
QPSK 5MHz full RB	 Ref: 25 dBm *RBW 100 kHz *Att: 30 dB *VBW 300 kHz *SWT 10 s Offset: 10.5 dB Limit: -30 dBm Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:47:11	 Ref: 25 dBm *RBW 100 kHz *Att: 30 dB *VBW 300 kHz *SWT 10 s Offset: 10.5 dB Limit: -30 dBm Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:49:24
QPSK 5MHz, RB1	 Ref: 25 dBm *RBW 100 kHz *Att: 30 dB *VBW 300 kHz *SWT 10 s Offset: 10.5 dB Limit: -30 dBm Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:30:10	 Ref: 30 dBm *RBW 100 kHz *Att: 30 dB *VBW 300 kHz *SWT 10 s Offset: 10.5 dB Limit: -30 dBm Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 25.DEC.2023 18:35:49

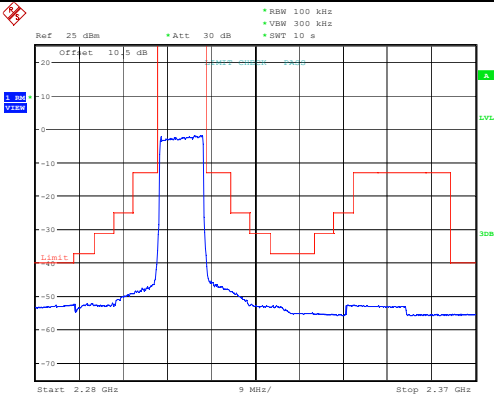
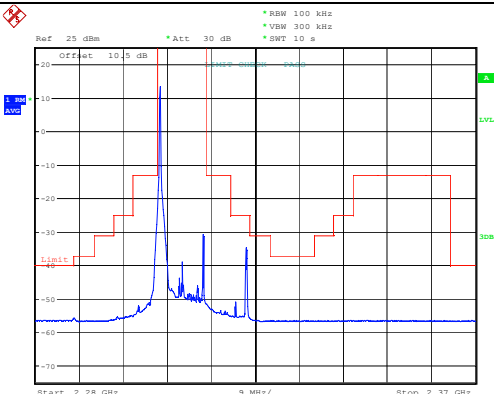
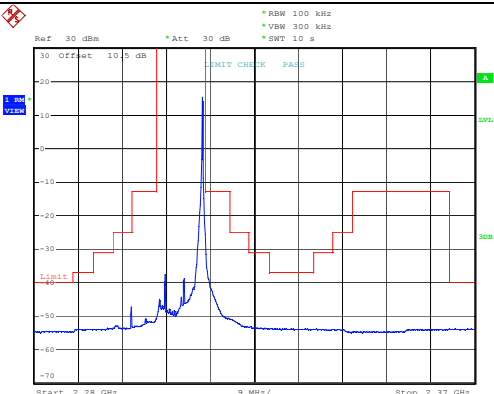
Out of band emission, Band Edge

Mode	Middle	
QPSK 10MHz full RB	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:52:14	/
QPSK 10MHz, RB1	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:33:56	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 25.DEC.2023 18:36:46

Out of band emission, Band Edge

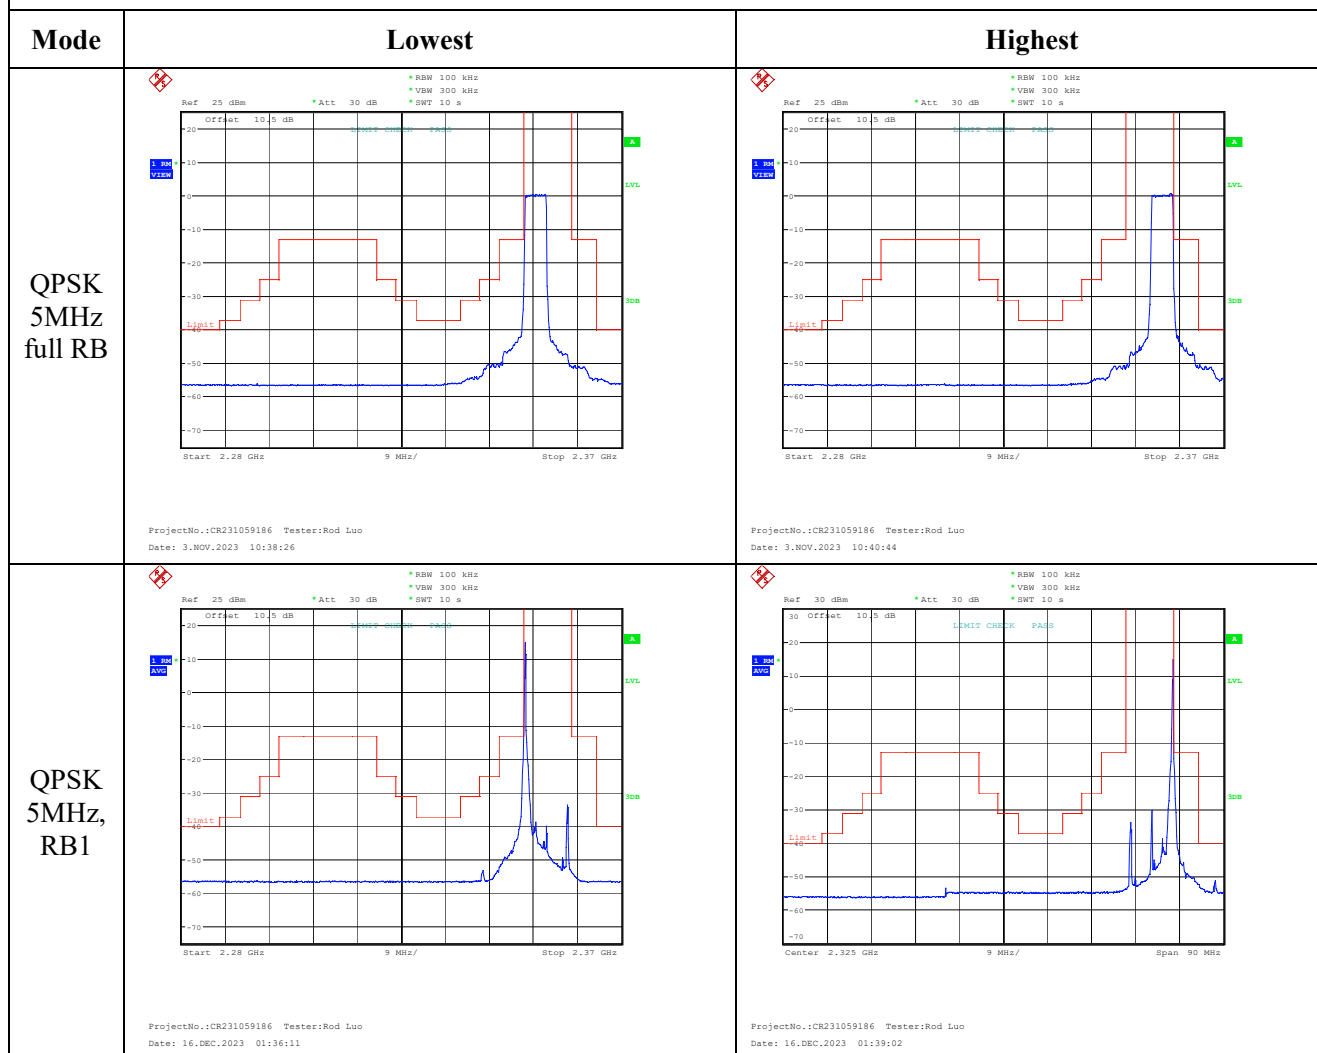
Mode	Lowest	Highest
16QAM 5MHz full RB	 Ref: 25 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 10 s Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:48:13	 Ref: 25 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 10 s Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:50:28
16QAM 5MHz, RB1	 Ref: 25 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 10 s Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:30:46	 Ref: 25 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 10 s Start: 2.28 GHz 9 MHz/ Stop: 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:32:46

Out of band emission, Band Edge

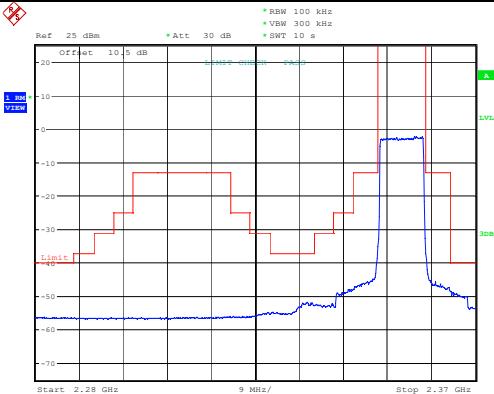
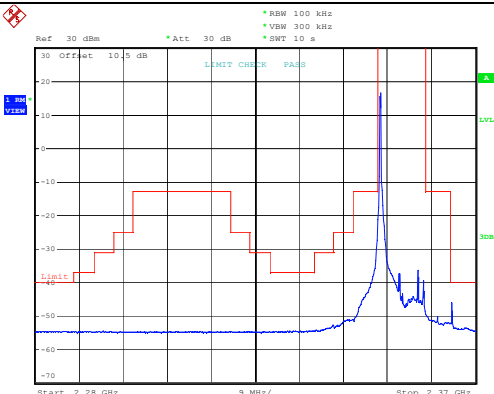
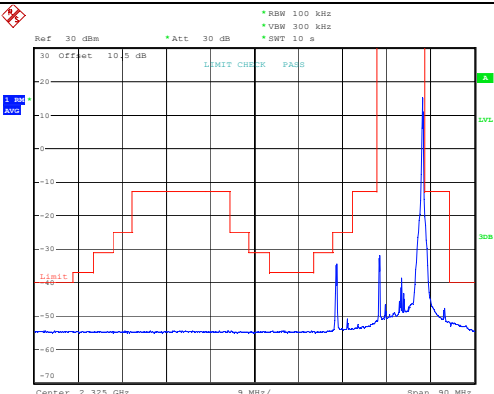
Mode	Middle	
16QAM 10MHz full RB	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:54:02	/
16QAM 10MHz, RB1	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:34:45	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 25.DEC.2023 18:36:46

2350-2360 MHz:

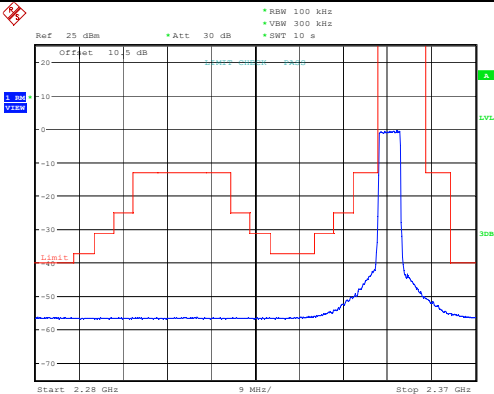
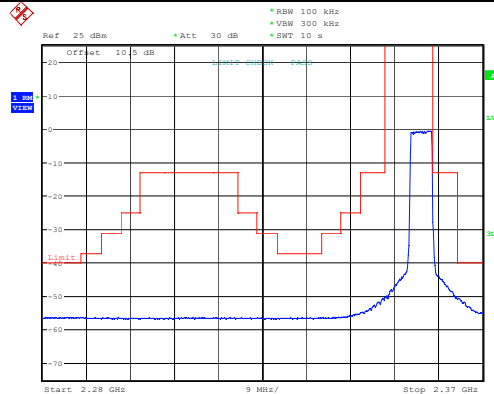
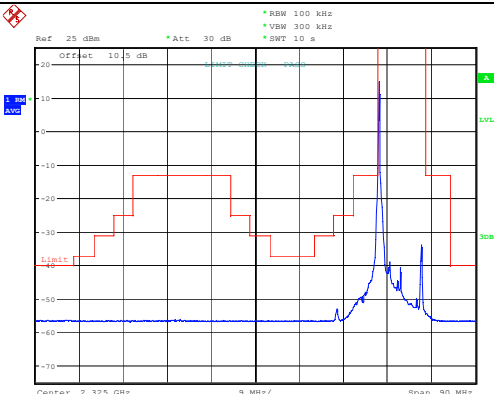
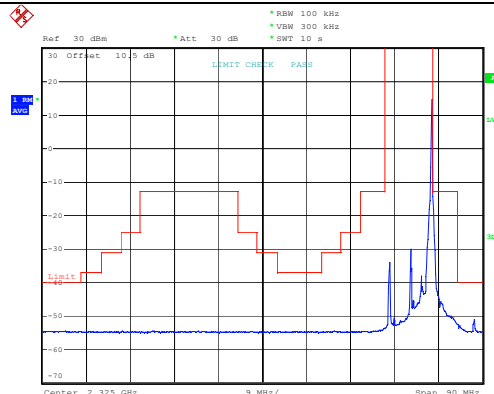
Out of band emission, Band Edge



Out of band emission, Band Edge

Mode	Middle	
QPSK 10MHz full RB	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:43:22	/
QPSK 10MHz, RB1	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 25.DEC.2023 18:23:39	 ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:51:22

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 5MHz full RB	 Ref 25 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 s Offset 10.5 dB LIMIT CHECK PASS Start 2.28 GHz 9 MHz/ Stop 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:39:28	 Ref 25 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 s Offset 10.5 dB LIMIT CHECK PASS Start 2.28 GHz 9 MHz/ Stop 2.37 GHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:42:04
16QAM 5MHz, RB1	 Ref 25 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 s Offset 10.5 dB LIMIT CHECK PASS Center 2.325 GHz 9 MHz/ Span 90 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:45:15	 Ref 30 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 10 s Offset 10.5 dB LIMIT CHECK PASS Center 2.325 GHz 9 MHz/ Span 90 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:47:18

Out of band emission, Band Edge

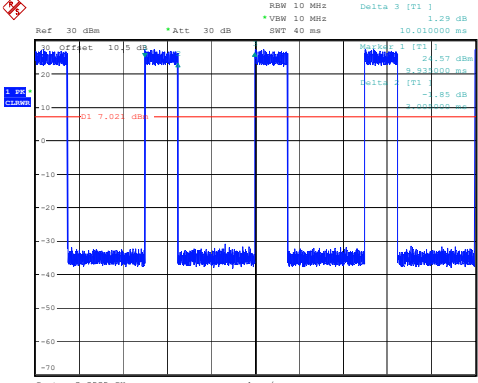
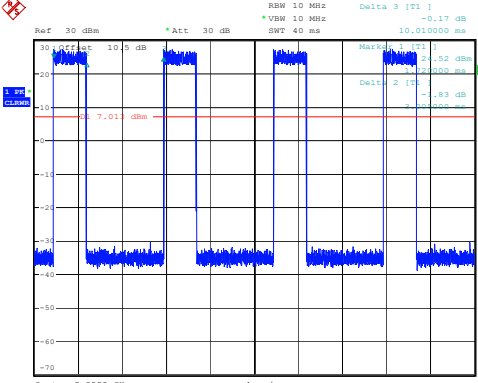
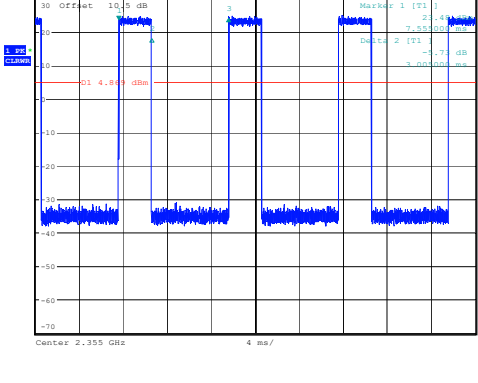
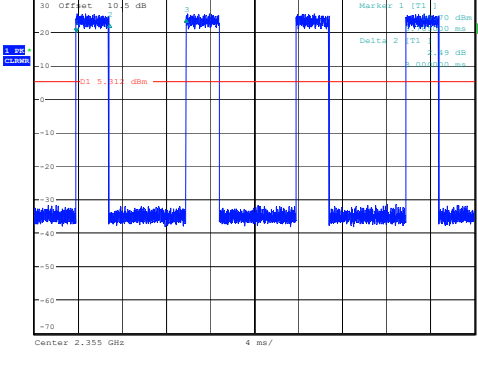
Mode	Middle	
16QAM 10MHz full RB	ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 10:44:17	/
16QAM 10MHz, RB1	ProjectNo.:CR231059186 Tester:Rod Luo Date: 25.DEC.2023 18:24:13	ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:52:16

2305-2315 MHz:

Duty cycle

Mode	QPSK	16QAM
5MHz	Ref: 30 dBm *Att: 30 dB *VSW: 10 MHz SWT: 40 ms Delta: 3 [T1] 1.31 dB Delta: 2 [T2] -1.17 dB ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:20:29	Ref: 30 dBm *Att: 30 dB *VSW: 10 MHz SWT: 40 ms Delta: 3 [T1] 1.07 dB Delta: 2 [T2] -1.21 dB ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:19:47
10MHz	Ref: 30 dBm *Att: 30 dB *VSW: 10 MHz SWT: 40 ms Delta: 3 [T1] 1.37 dB Delta: 2 [T2] -1.23 dB ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:22:22	Ref: 30 dBm *Att: 30 dB *VSW: 10 MHz SWT: 40 ms Delta: 3 [T1] 1.32 dB Delta: 2 [T2] -1.35 dB ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:22:00

2350-2360 MHz:

Duty cycle		
Mode	QPSK	16QAM
5MHz	 Ref 30 dBm *Att 30 dB RBW 10 MHz Delta 3 [T1] 1.29 dB *VSW 10 MHz SWT 40 ms 10.010000 ms Marker 1 [T1] 24.57 dBm Delta 2 [T1] -18.85 dBm Q1 7.024 dBm Center 2.3525 GHz 4 ms/ ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:23:15	 Ref 30 dBm *Att 30 dB RBW 10 MHz Delta 3 [T1] -0.17 dB *VSW 10 MHz SWT 40 ms 10.010000 ms Marker 1 [T1] 24.52 dBm Delta 2 [T1] -18.83 dBm Q1 7.013 dBm Center 2.3525 GHz 4 ms/ ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:22:59
10MHz	 Ref 30 dBm *Att 30 dB RBW 10 MHz Delta 3 [T1] 0.35 dB *VSW 10 MHz SWT 40 ms 10.010000 ms Marker 1 [T1] 23.43 dBm Delta 2 [T1] -17.73 dBm Q1 4.889 dBm Center 2.355 GHz 4 ms/ ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:24:18	 Ref 30 dBm *Att 30 dB RBW 10 MHz Delta 3 [T1] 3.83 dB *VSW 10 MHz SWT 40 ms 10.010000 ms Marker 1 [T1] 23.89 dBm Delta 2 [T1] -17.89 dBm Q1 5.012 dBm Center 2.355 GHz 4 ms/ ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 11:24:02

4.5 Antenna Port Test Data and Results for LTE Band 41

Serial Number:	2C4U-1	Test Date:	2023/11/3~2023/12/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Rod Luo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25~26	Relative Humidity: (%)	46~47	ATM Pressure: (kPa)	101
----------------------	-------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200120	2023/4/18	2024/4/17
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Minl-Circuits	Power Splitter	ZFRSC-183-S+	S F448201619	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2537.5	2595	2652.5
10MHz	2540	2595	2650
15MHz	2542.5	2595	2647.5
20MHz	2545	2595	2645

Test Data:**FCC§2.1046;§ 27.50(h)(2)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.32	22.07	21.69	21.05	33
	RB1#13	22.47	22.17	21.8		
	RB1#24	22.36	22.06	21.66		
	RB15#0	21.45	21.19	20.78		
	RB15#10	21.45	21.1	20.73		
	RB25#0	21.46	21.17	20.75		
5MHz 16QAM	RB1#0	21.4	21.17	20.97	20.1	33
	RB1#13	21.52	21.29	21.07		
	RB1#24	21.42	21.12	20.94		
	RB15#0	20.42	20.19	19.81		
	RB15#10	20.41	20.17	19.79		
	RB25#0	20.47	20.23	19.75		
10MHz QPSK	RB1#0	22.52	22.15	21.84	21.41	33
	RB1#25	22.83	22.43	22.07		
	RB1#49	22.48	22.24	21.81		
	RB25#0	21.53	21.2	20.83		
	RB25#25	21.51	21.18	20.78		
	RB50#0	21.51	21.18	20.8		
10MHz 16QAM	RB1#0	21.64	21.53	20.79	20.52	33
	RB1#25	21.94	21.69	21.04		
	RB1#49	21.65	21.35	20.72		
	RB25#0	20.54	20.2	19.84		
	RB25#25	20.53	20.16	19.82		
	RB50#0	20.58	20.2	19.79		
15MHz QPSK	RB1#0	22.24	22.13	21.73	21.09	33
	RB1#38	22.51	22.18	21.79		
	RB1#74	22.36	22.1	21.6		
	RB36#0	21.52	21.22	20.84		
	RB36#39	21.49	21.17	20.79		
	RB75#0	21.51	21.19	20.82		
15MHz 16QAM	RB1#0	21.38	21.33	20.94	20.06	33
	RB1#38	21.48	21.42	21.04		
	RB1#74	21.31	21.23	20.84		
	RB36#0	20.46	20.22	19.78		
	RB36#39	20.4	20.19	19.71		
	RB75#0	20.5	20.17	19.75		
20MHz QPSK	RB1#0	22.29	21.94	21.63	21.42	33

	RB1#50	22.84	22.42	22.05		
	RB1#99	22.16	21.87	21.5		
	RB50#0	21.52	21.2	20.87		
	RB50#50	21.49	21.16	20.79		
	RB100#0	21.46	21.21	20.83		
20MHz 16QAM	RB1#0	21.58	21.02	20.65	20.62	33
	RB1#50	22.04	21.54	21.08		
	RB1#99	21.39	20.97	20.51		
	RB50#0	20.56	20.19	19.92		
	RB50#50	20.49	20.16	19.8		
	RB100#0	20.47	20.21	19.84		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	8.87	8.93	8.67	13
	RB100#0	8.81	9.13	9.1	13
20MHz 16QAM	RB1#0	9.33	9.62	9.86	13
	RB100#0	9.88	9.91	9.42	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.52	4.50	4.52	5.32	5.28	5.00
5MHz 16QAM	4.50	4.50	4.52	4.96	5.04	5.06
10MHz QPSK	8.96	8.96	9.00	9.64	9.56	9.80
10MHz 16QAM	8.96	8.96	8.96	9.48	10.04	9.48
15MHz QPSK	13.50	13.56	13.62	15.54	15.60	15.60
15MHz 16QAM	13.56	13.50	13.56	16.14	16.68	15.72
20MHz QPSK	18.00	18.00	18.08	19.52	19.84	19.68
20MHz 16QAM	18.00	18.00	17.92	20.48	19.36	19.52

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:

Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge

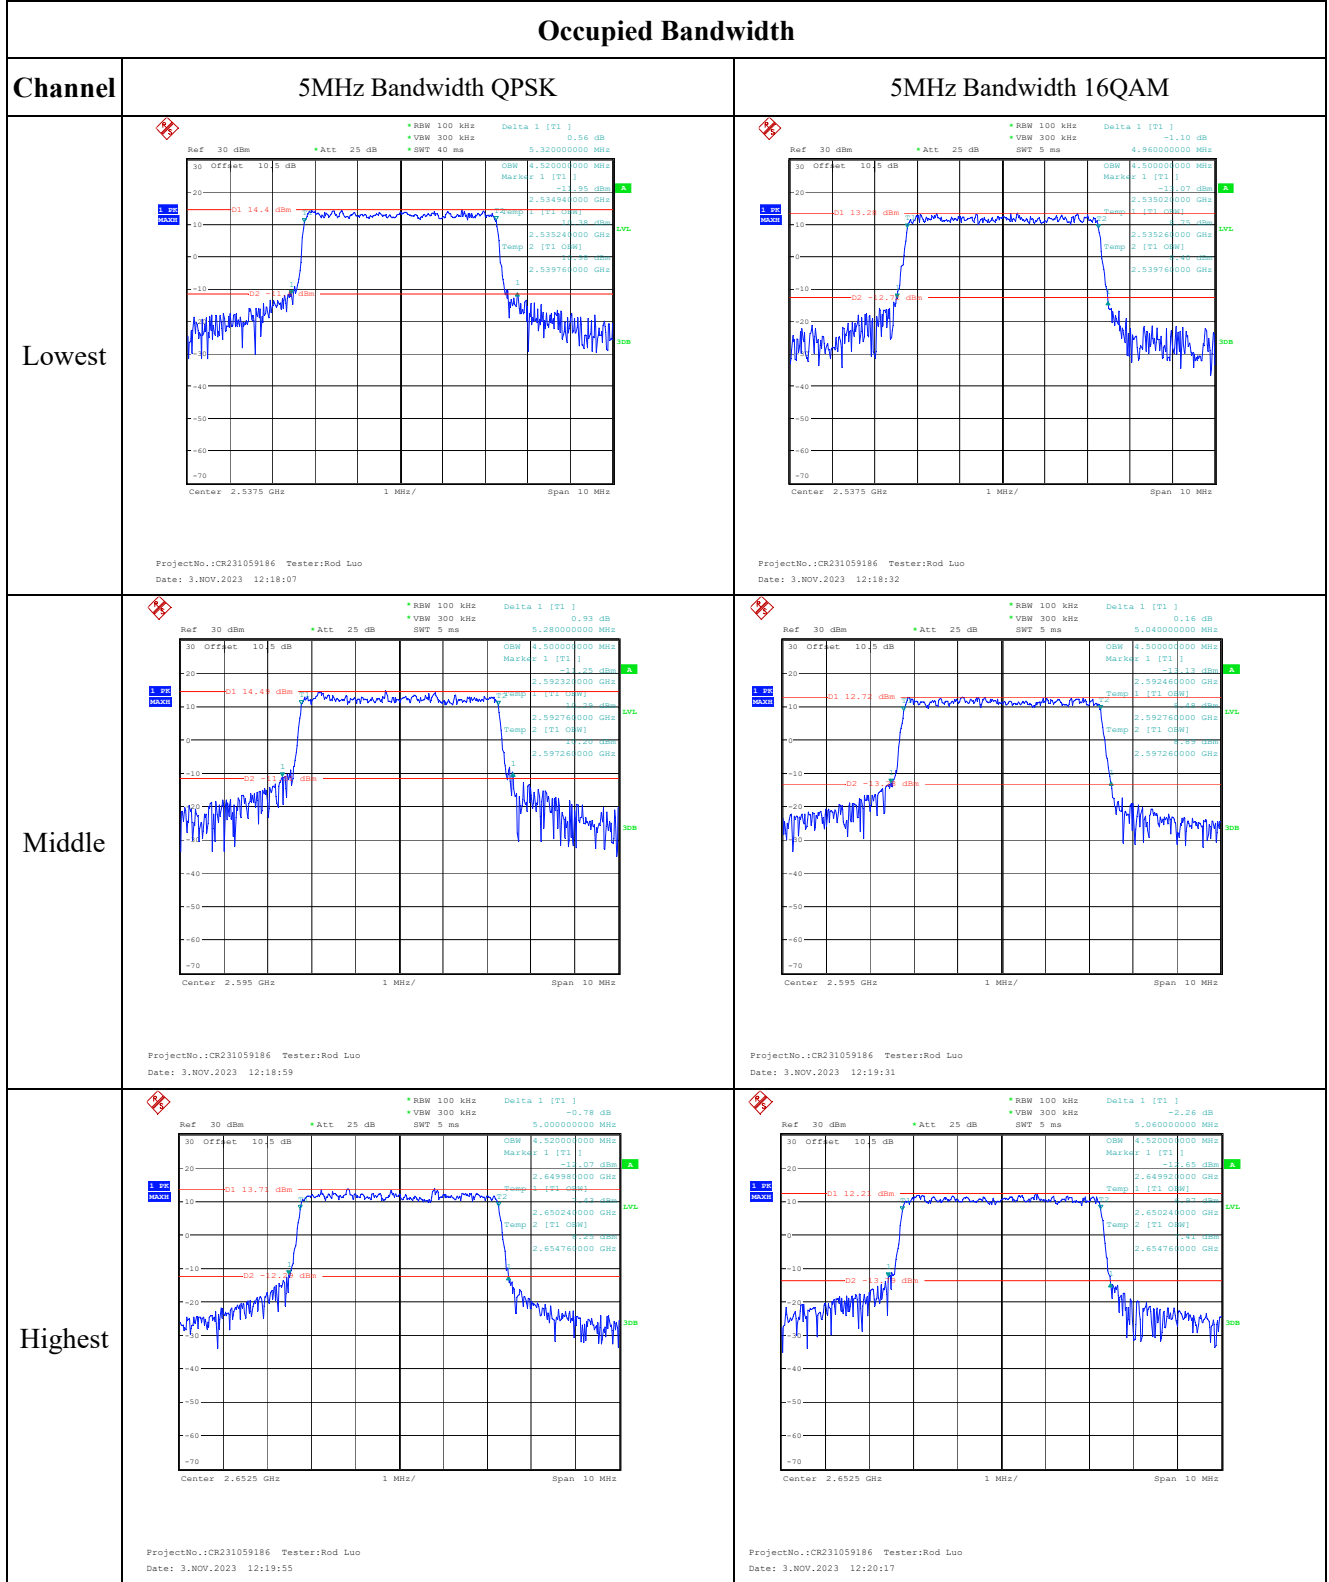
Result:

Pass, Please refer to the test plots of Out of band emission, Band Edge.

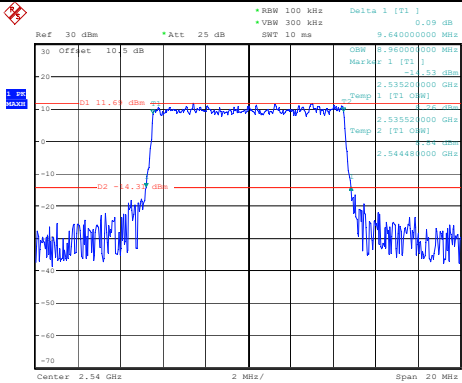
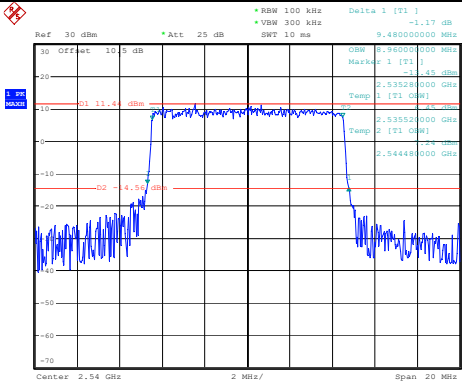
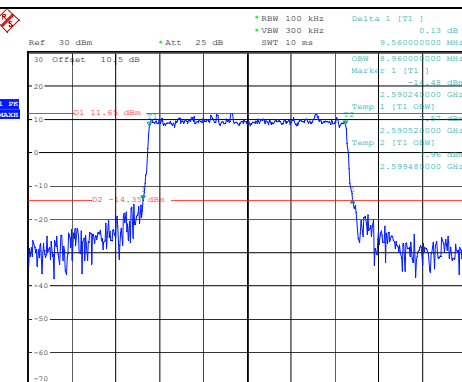
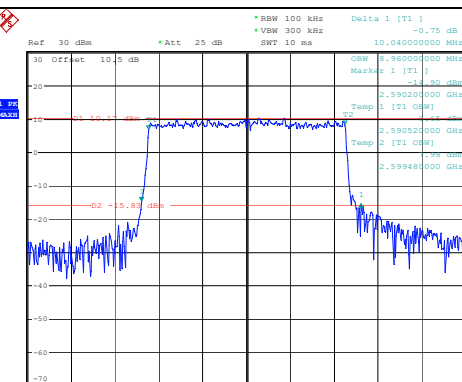
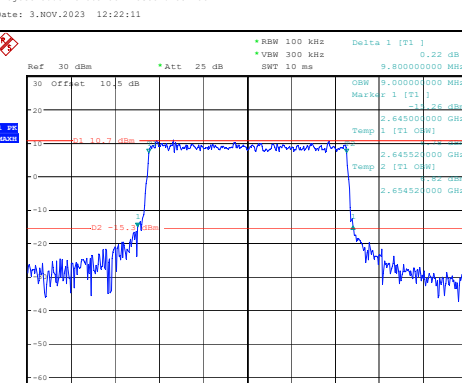
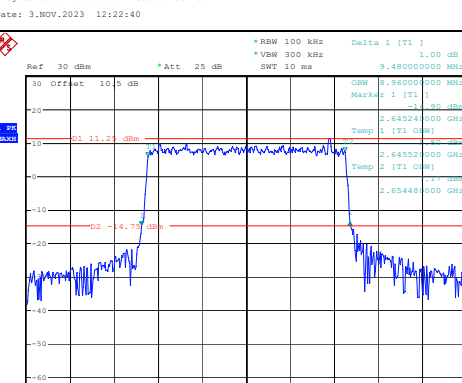
FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2535.148	2535.00	2654.963	2655
	-20	3.85	2535.099	2555.00	2654.998	2655
	-10	3.85	2535.147	2535.00	2654.925	2655
	0	3.85	2535.113	2555.00	2654.892	2655
	10	3.85	2535.013	2535.00	2654.921	2655
	20	3.85	2535.116	2555.00	2654.902	2655
	30	3.85	2535.105	2535.00	2654.854	2655
	40	3.85	2535.052	2555.00	2654.928	2655
	50	3.85	2535.113	2535.00	2654.925	2655
Frequency Stability vs. Voltage	20	3.47	2535.112	2555.00	2654.865	2655
	20	4.24	2535.083	2535.00	2654.892	2655
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2535.011	2535.00	2654.963	2655
	-20	3.85	2535.119	2555.00	2654.998	2655
	-10	3.85	2535.026	2535.00	2654.925	2655
	0	3.85	2535.129	2555.00	2654.892	2655
	10	3.85	2535.027	2535.00	2654.921	2655
	20	3.85	2535.021	2555.00	2654.902	2655
	30	3.85	2535.049	2535.00	2654.854	2655
	40	3.85	2535.031	2555.00	2654.928	2655
	50	3.85	2535.081	2535.00	2654.925	2655
Frequency Stability vs. Voltage	20	3.47	2535.067	2555.00	2654.865	2655
	20	4.24	2535.123	2535.00	2654.892	2655
					Result:	Pass

Test Plots (Note: The 10.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):



Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.09 dB *VSW 300 kHz SWT 10 ms 9.640000000 MHz OSW 9.600000000 MHz Marker 1 [T1] -11.6 dBm Temp 1 [T1 OSW] Temp 2 [T1 OSW] 2.535200000 GHz 2.544480000 GHz -11.6 dBm -4.37 dBm 1.99 dBm -17.13 dBm Center 2.54 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 12:21:15	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] -0.75 dB *VSW 300 kHz SWT 10 ms 9.480000000 MHz OSW 9.460000000 MHz Marker 1 [T1] -11.17 dBm Temp 1 [T1 OSW] Temp 2 [T1 OSW] 2.535200000 GHz 2.544480000 GHz -11.17 dBm -4.56 dBm 1.99 dBm -17.13 dBm Center 2.54 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 12:21:44
Middle	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.13 dB *VSW 300 kHz SWT 10 ms 9.560000000 MHz OSW 9.500000000 MHz Marker 1 [T1] -11.6 dBm Temp 1 [T1 OSW] Temp 2 [T1 OSW] 2.590200000 GHz 2.599480000 GHz -11.6 dBm -4.37 dBm 1.99 dBm -17.13 dBm Center 2.595 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 12:21:11	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 10.040000000 MHz *VSW 300 kHz SWT 10 ms 10.040000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -10.75 dBm Temp 1 [T1 OSW] Temp 2 [T1 OSW] 2.590200000 GHz 2.599480000 GHz -10.75 dBm -5.83 dBm 1.99 dBm -17.13 dBm Center 2.595 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 12:22:40
Highest	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 0.22 dB *VSW 300 kHz SWT 10 ms 9.800000000 MHz OSW 9.800000000 MHz Marker 1 [T1] -10.7 dBm Temp 1 [T1 OSW] Temp 2 [T1 OSW] 2.645200000 GHz 2.654480000 GHz -10.7 dBm -5.3 dBm 1.99 dBm -17.13 dBm Center 2.65 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 12:23:06	 Ref 30 dBm *Att 25 dB *RBW 100 kHz Delta 1 [T1] 1.00 dB *VSW 300 kHz SWT 10 ms 9.480000000 MHz OSW 9.460000000 MHz Marker 1 [T1] -11.2 dBm Temp 1 [T1 OSW] Temp 2 [T1 OSW] 2.645200000 GHz 2.654480000 GHz -11.2 dBm -4.75 dBm 1.99 dBm -17.13 dBm Center 2.65 GHz 2 MHz/ Span 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 12:23:29

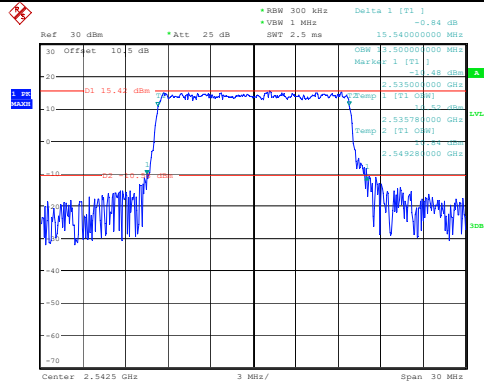
Occupied Bandwidth

Channel

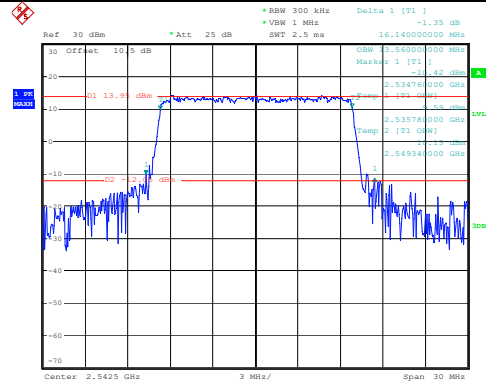
15MHz Bandwidth QPSK

15MHz Bandwidth 16QAM

Lowest

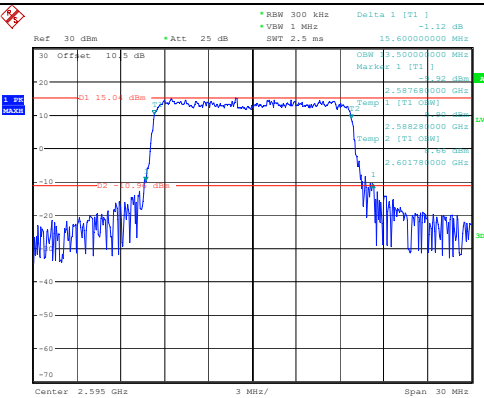


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:24:29

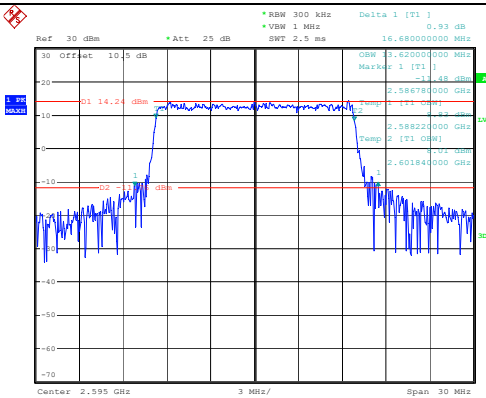


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:25:04

Middle

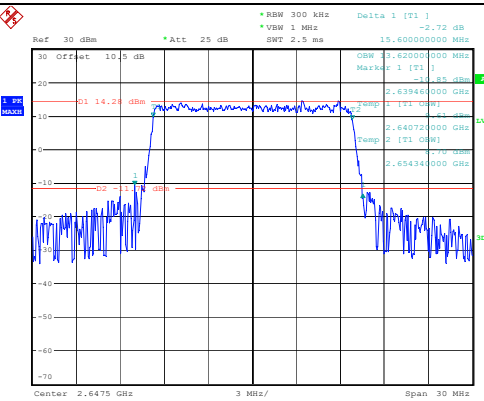


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:25:31

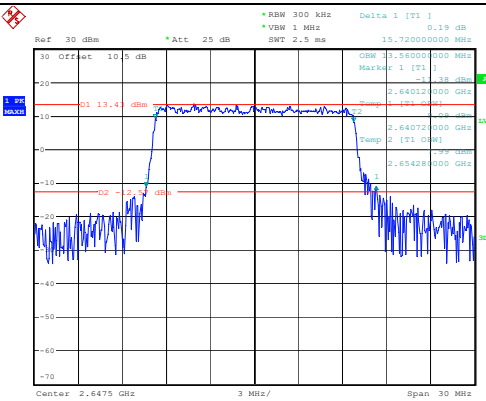


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:26:03

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:26:27



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:26:56

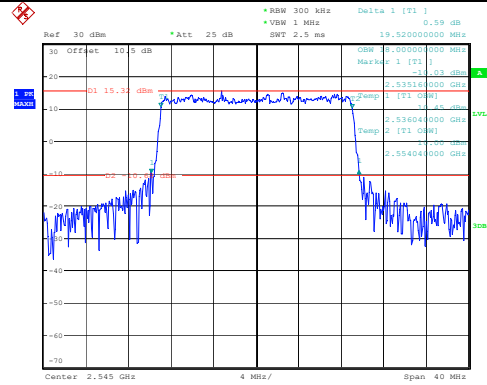
Occupied Bandwidth

Channel

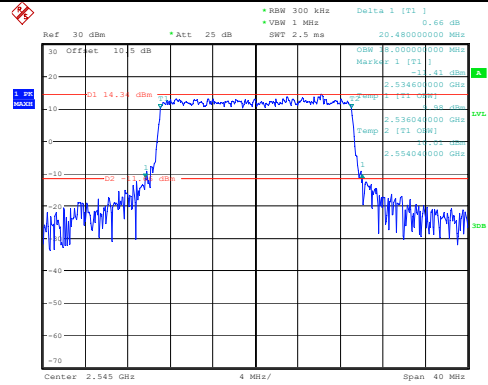
20MHz Bandwidth QPSK

20MHz Bandwidth 16QAM

Lowest

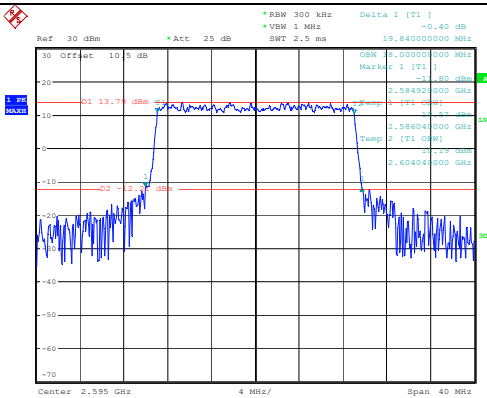


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:27:56

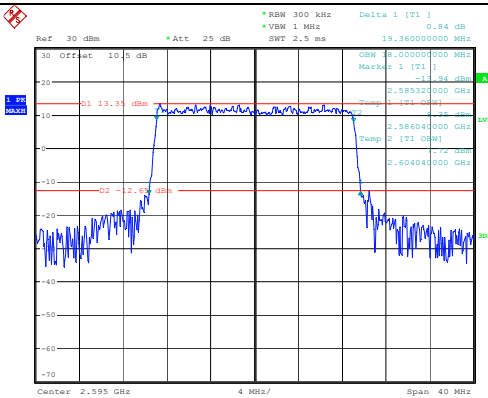


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:28:31

Middle

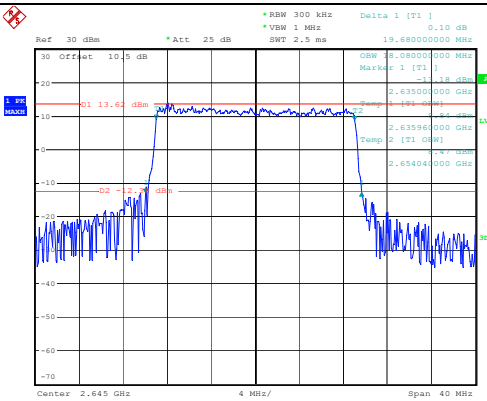


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:29:01

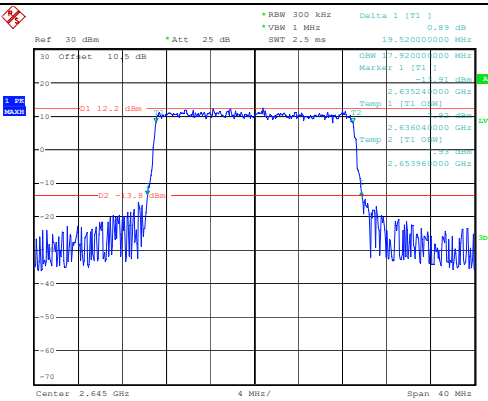


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:29:33

Highest



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:30:00

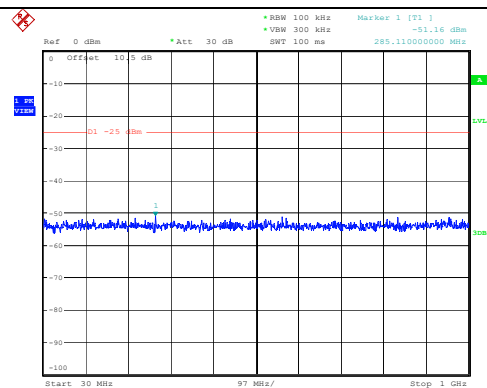


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 12:30:20

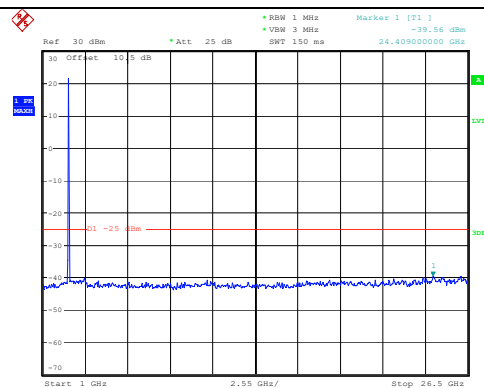
Spurious Emissions at Antenna Terminal

Channel

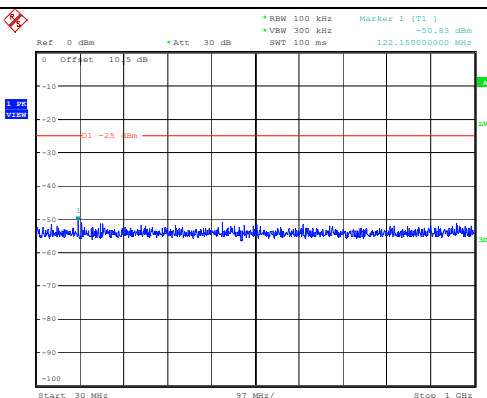
5MHz Bandwidth QPSK

Lowest
RB1

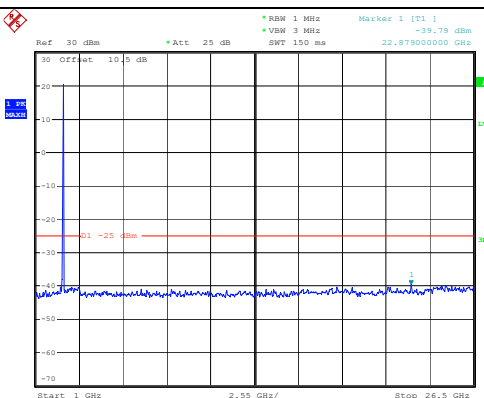
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:15:38



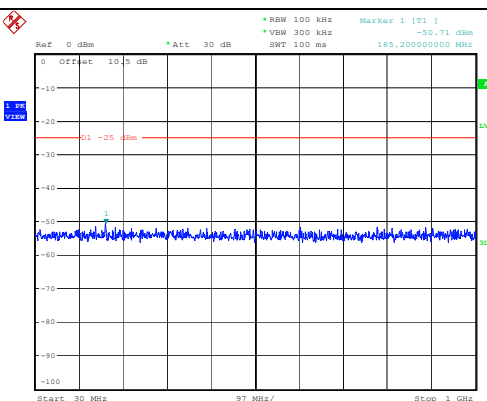
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:02:05

Middle
RB1

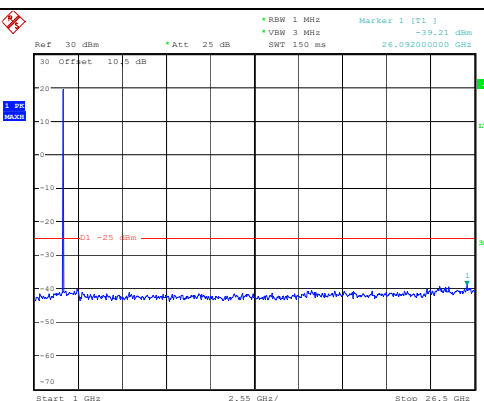
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:16:23



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:02:28

Highest
RB1

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:17:48

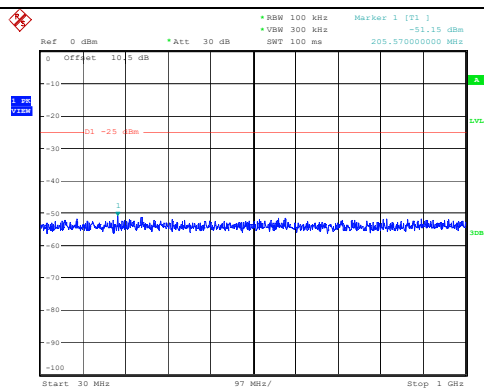


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:02:54

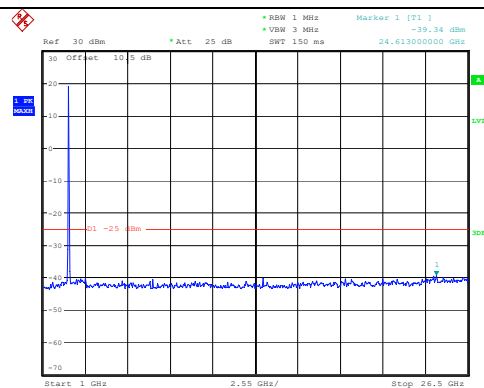
Spurious Emissions at Antenna Terminal

Channel

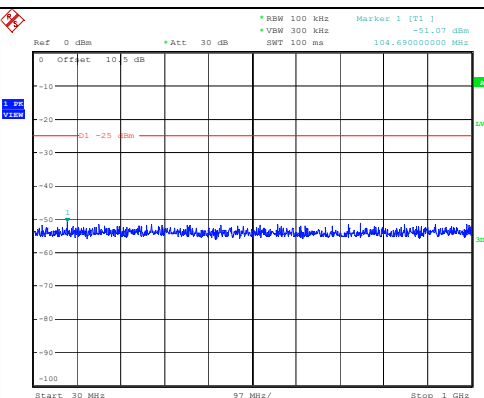
10MHz Bandwidth QPSK

Lowest
RB1

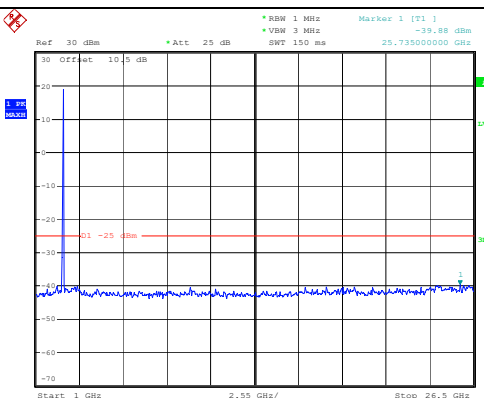
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:18:11



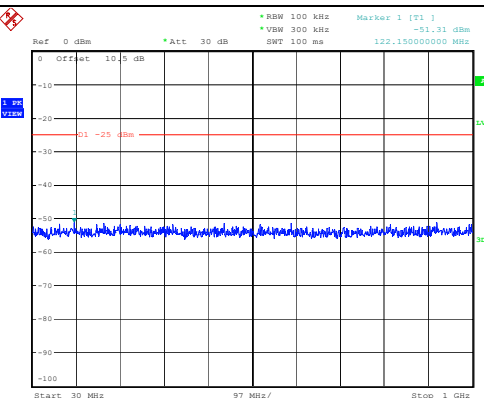
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:03:52

Middle
RB1

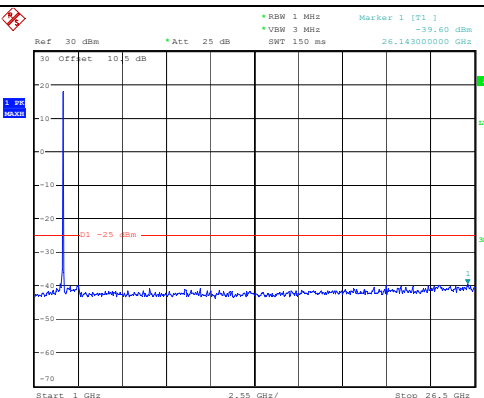
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:18:39



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:04:14

Highest
RB1

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:19:38

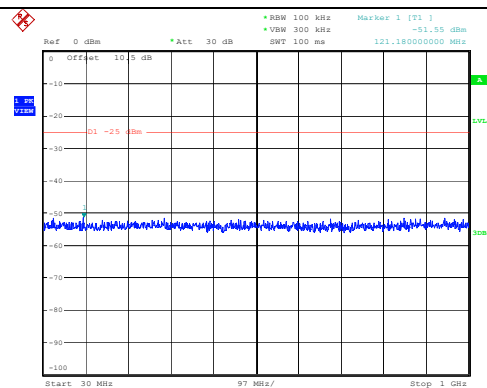


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:04:40

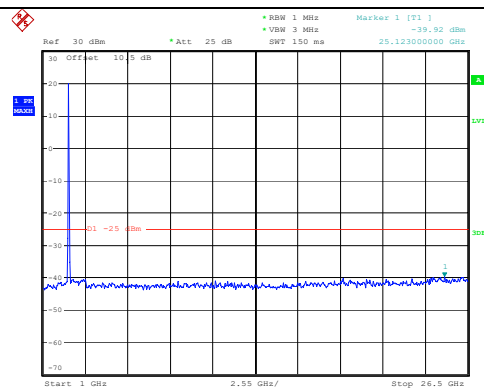
Spurious Emissions at Antenna Terminal

Channel

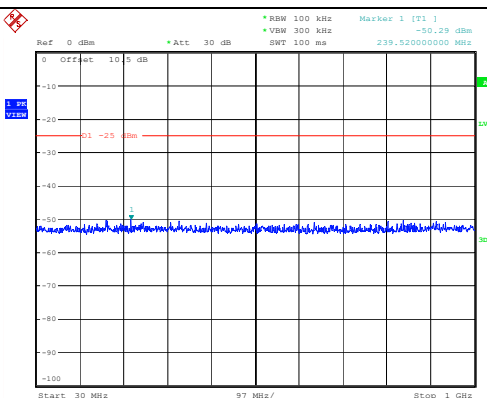
15MHz Bandwidth QPSK

Lowest
RB1

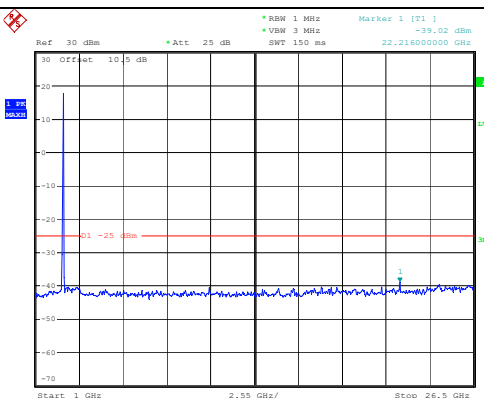
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:19:58



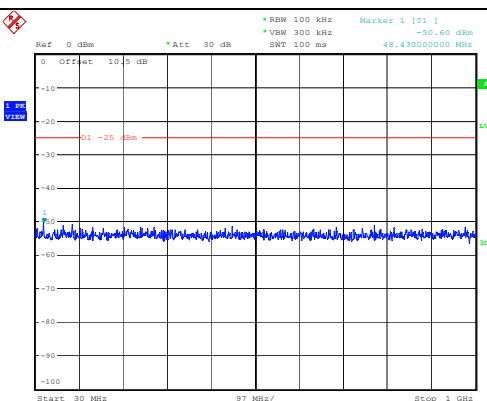
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:05:30

Middle
RB1

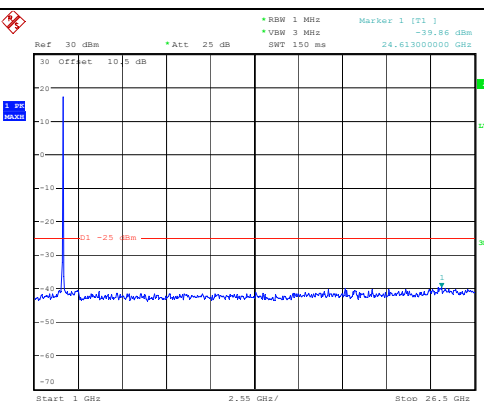
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:21:39



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:05:53

Highest
RB1

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:25:28

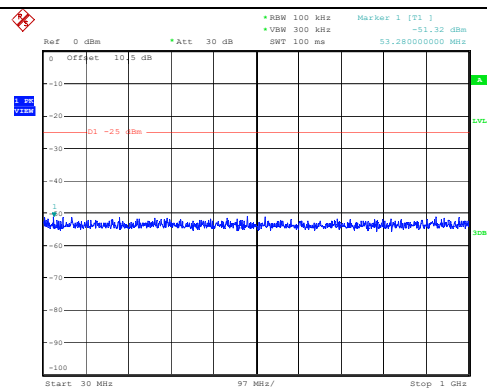


ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:06:16

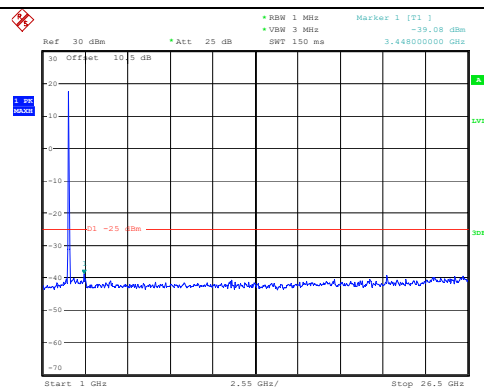
Spurious Emissions at Antenna Terminal

Channel

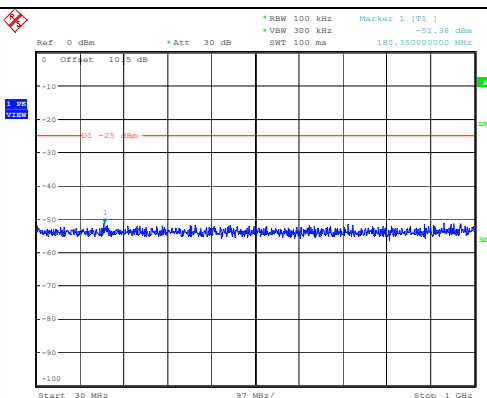
20MHz Bandwidth QPSK

Lowest
RB1

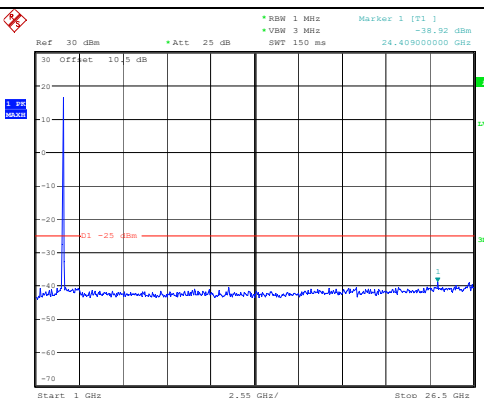
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:26:29



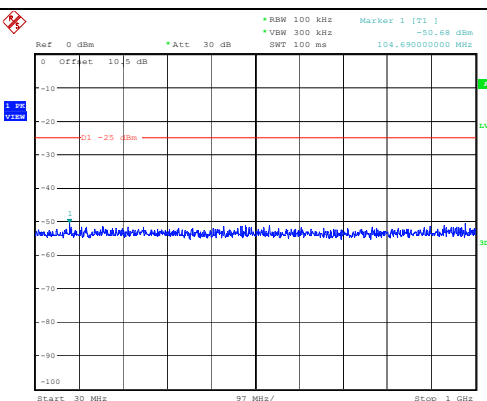
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:07:05

Middle
RB1

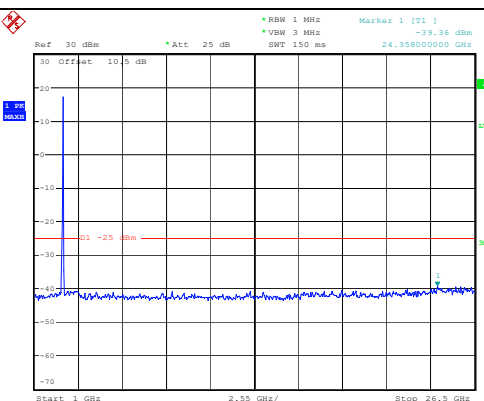
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:26:07



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:07:31

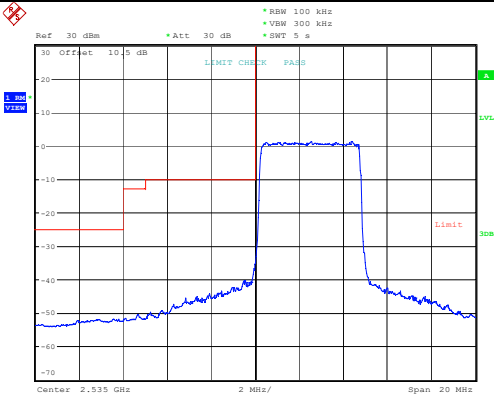
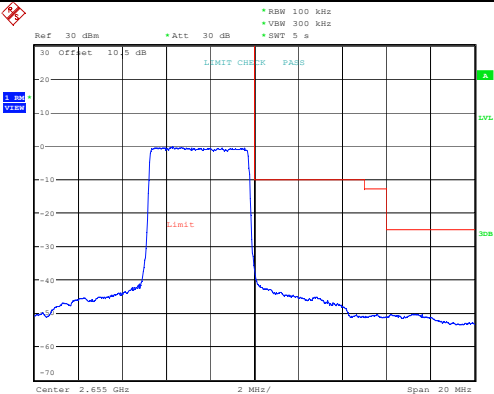
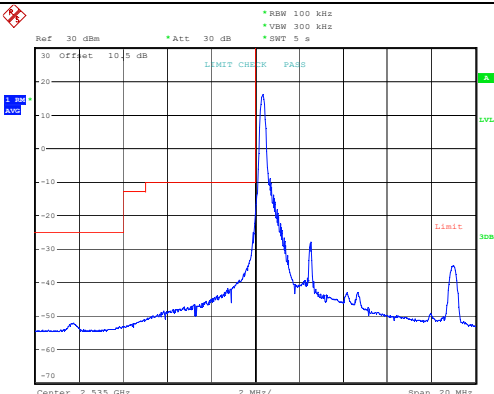
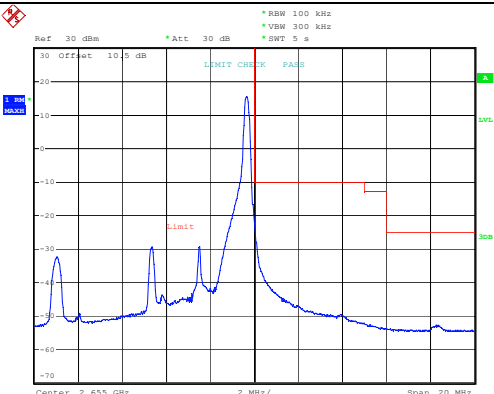
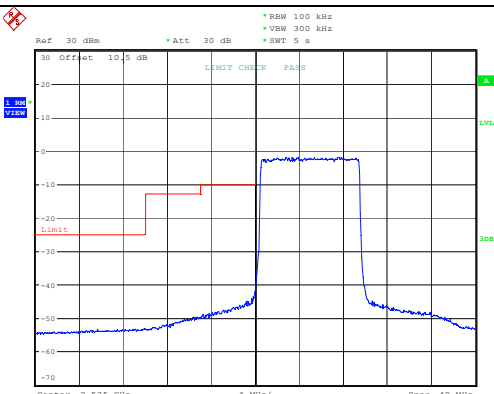
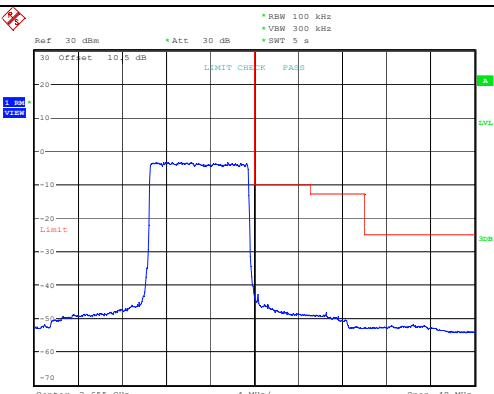
Highest
RB1

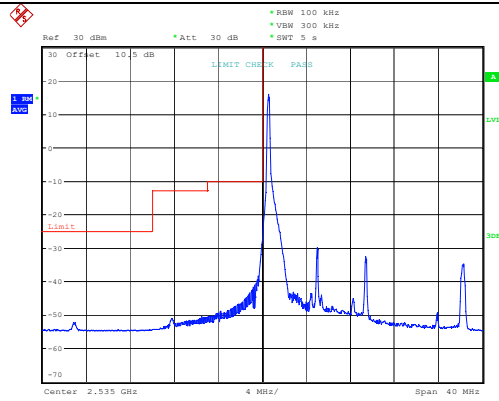
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 26.DEC.2023 10:26:56



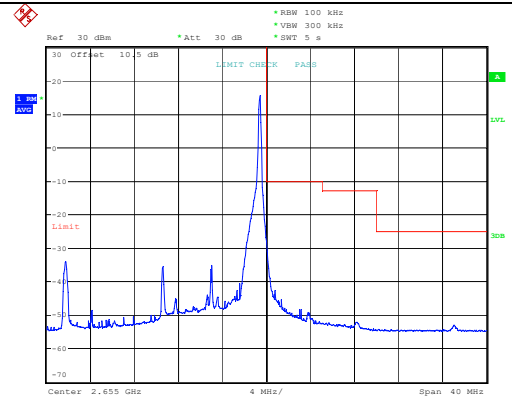
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:07:57

Out of band emission, Band Edge

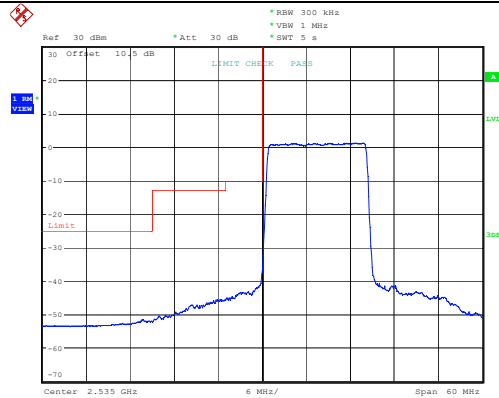
Mode	Lowest	Highest
QPSK 5MHz full RB	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.535 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:17:54	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.655 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:18:42
QPSK 5MHz RB1	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.535 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 01:58:36	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.655 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 02:00:29
QPSK 10MHz full RB	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.535 GHz Span: 40 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:29:36	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.655 GHz Span: 40 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:30:24

QPSK
10MHz
RB1

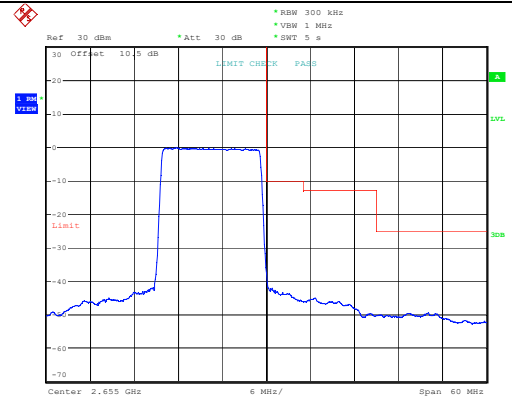
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 02:21:14



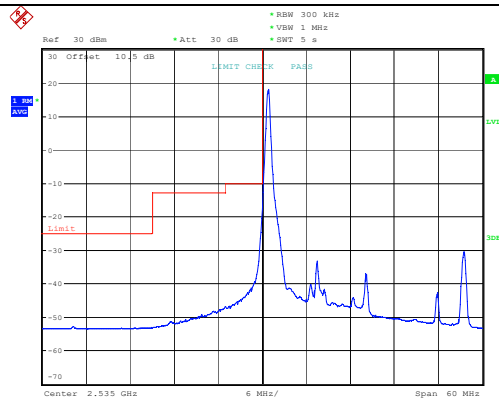
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 02:22:15

QPSK
15MHz
full RB

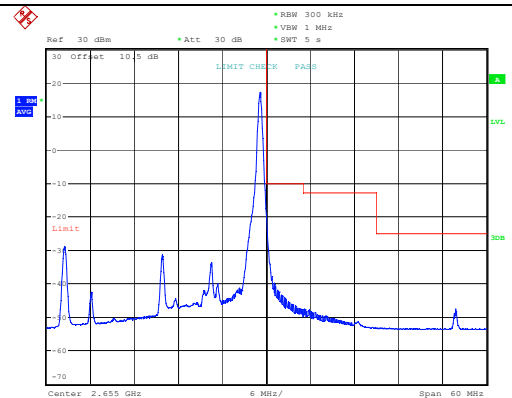
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:33:04



ProjectNo.:CR231059186 Tester:Rod Luo
Date: 3.NOV.2023 13:33:51

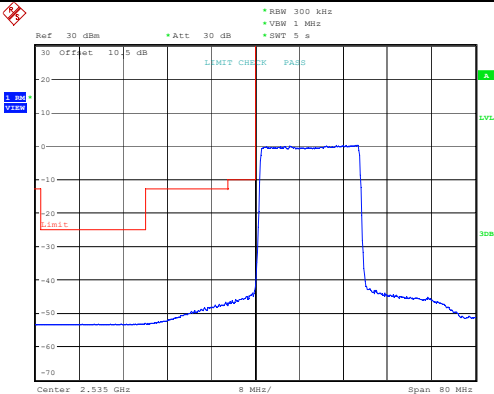
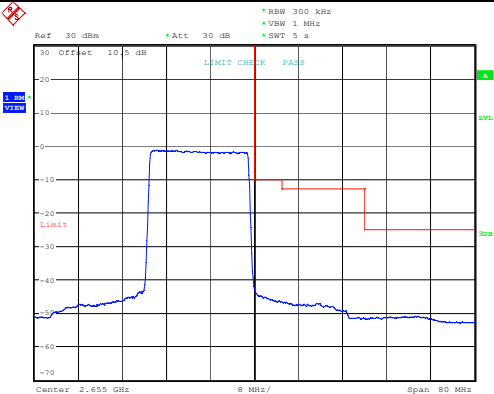
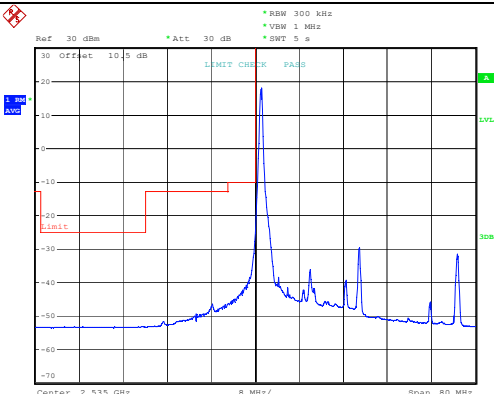
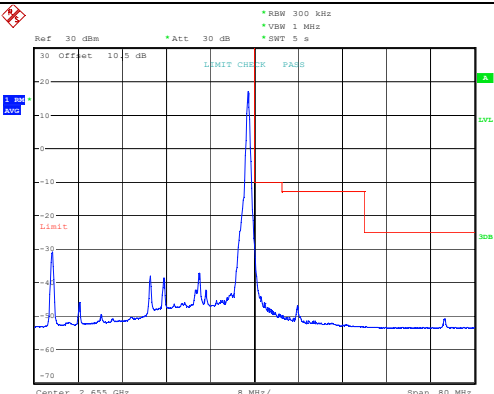
QPSK
15MHz
RB1

ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 02:26:27

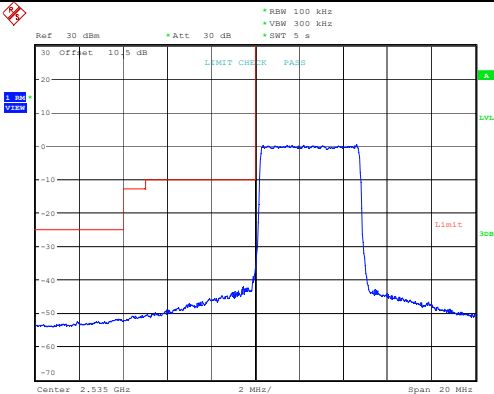
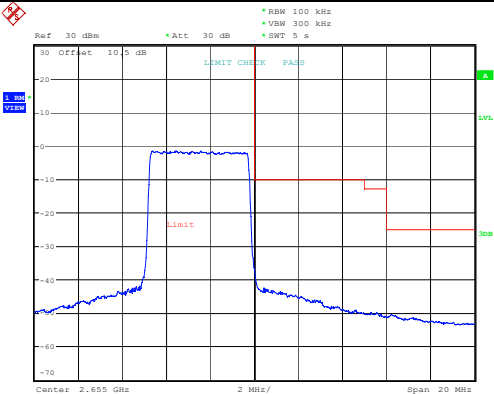
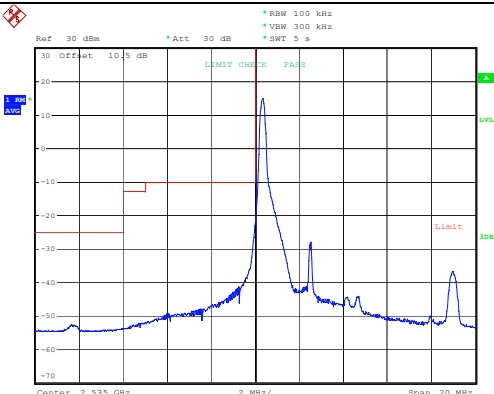
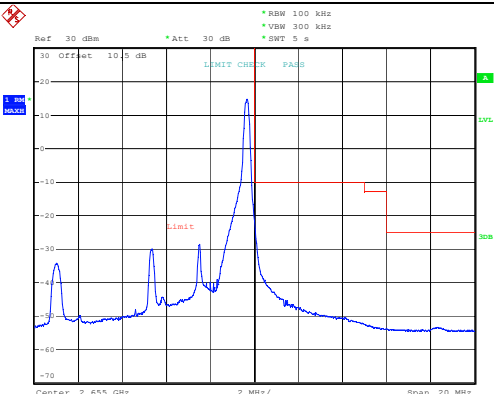
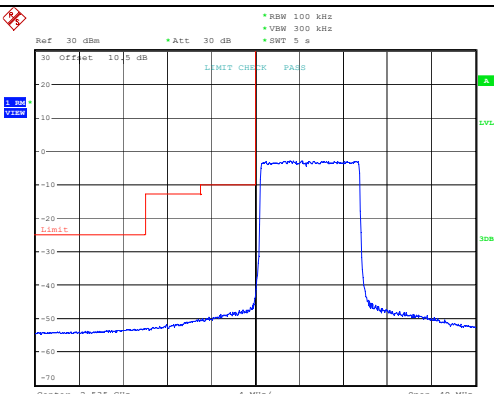
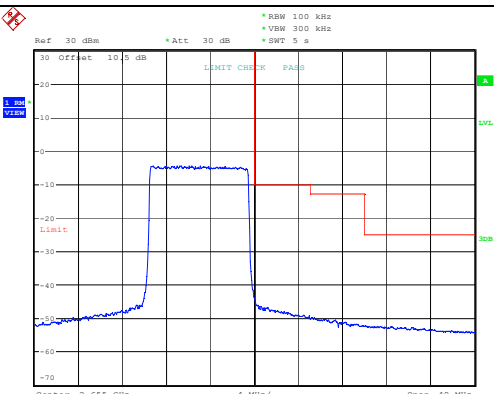


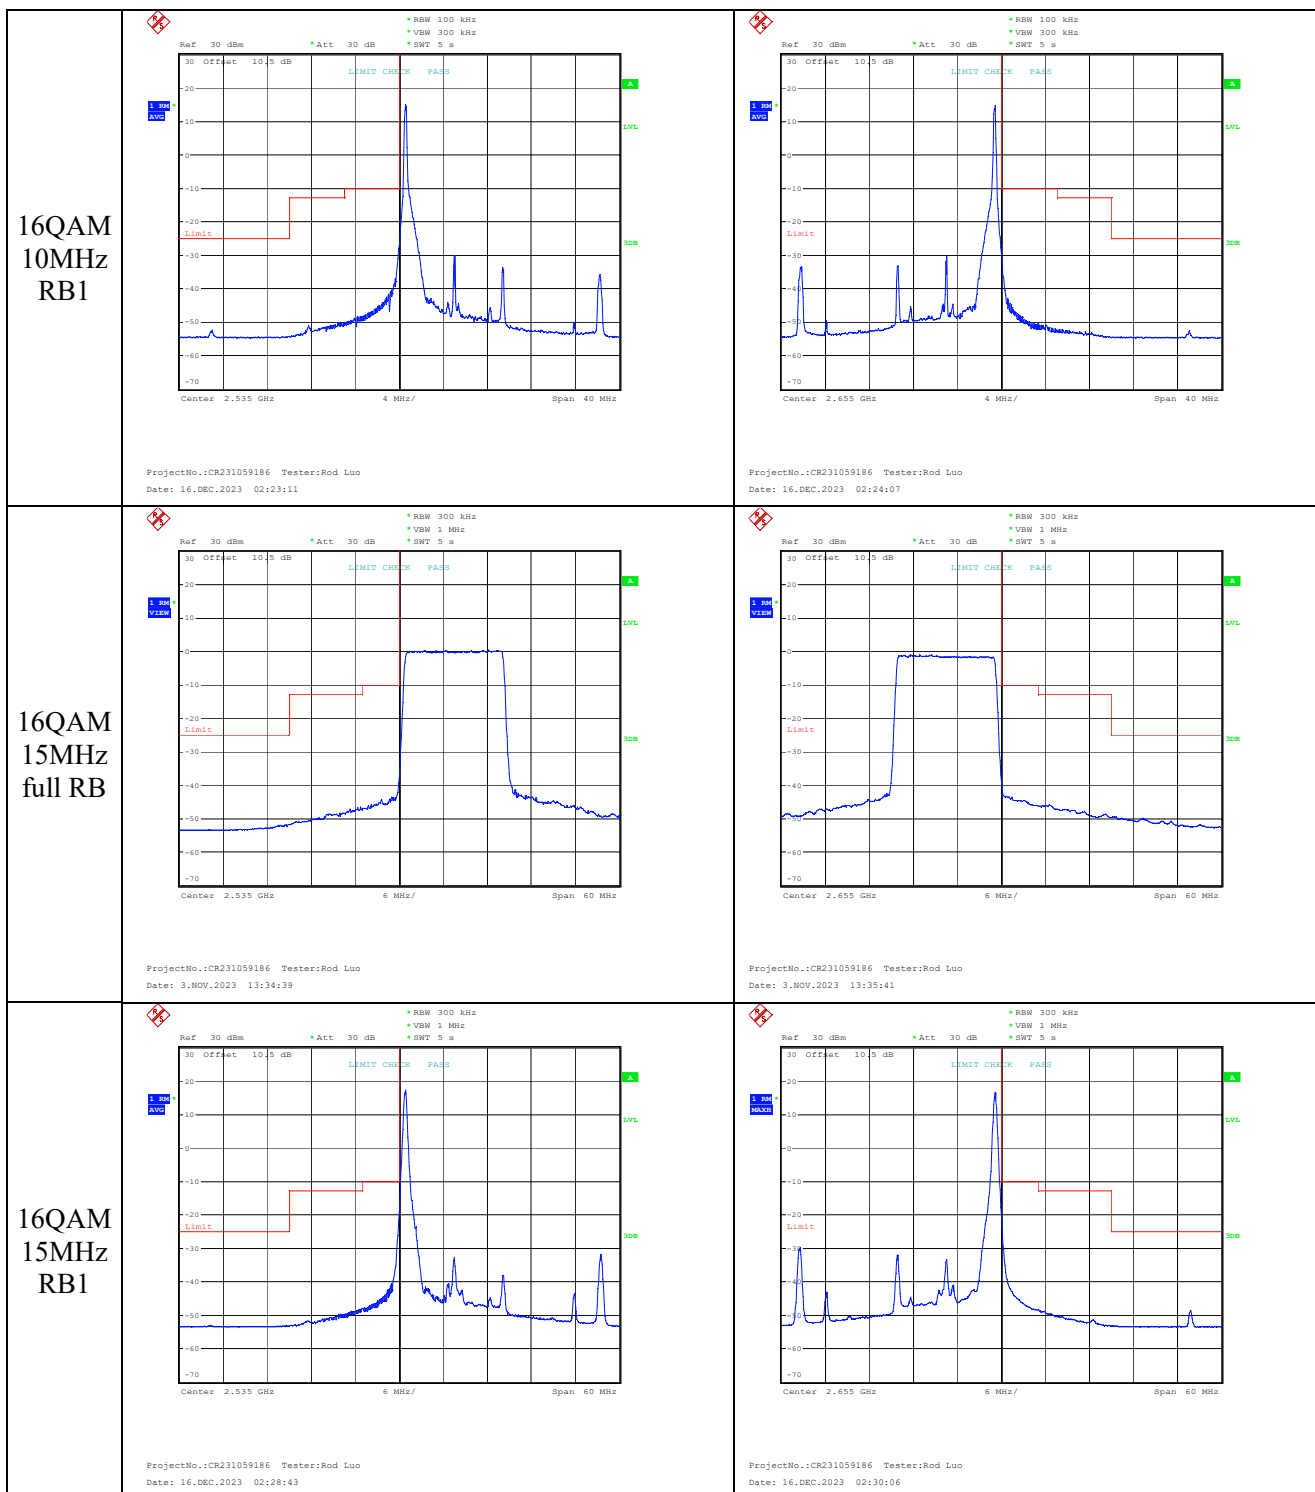
ProjectNo.:CR231059186 Tester:Rod Luo
Date: 16.DEC.2023 02:27:44

Out of band emission, Band Edge

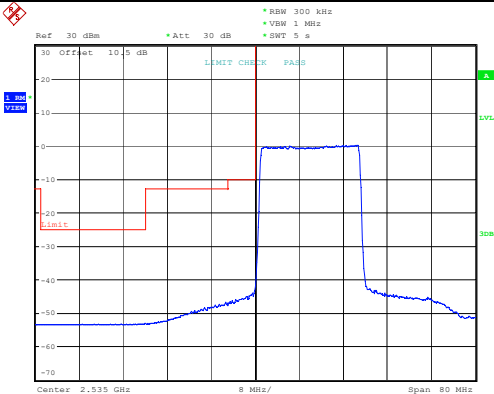
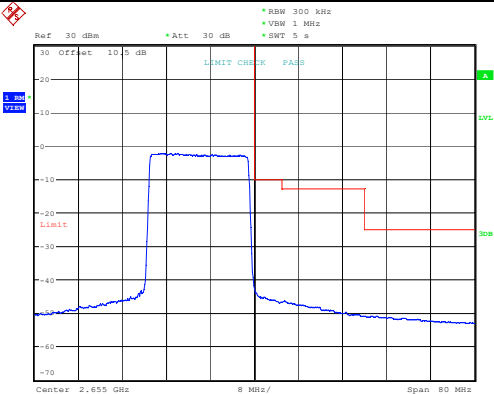
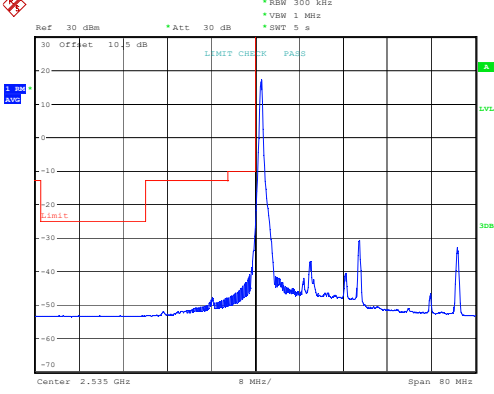
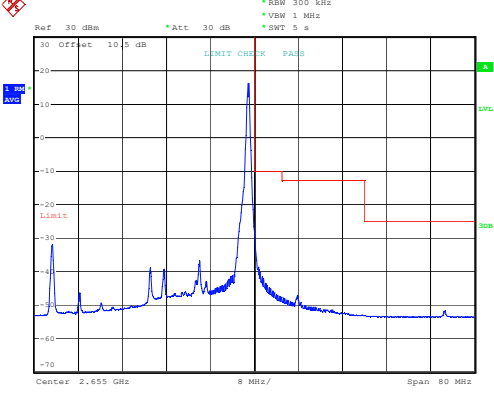
Mode	Lowest	Highest
QPSK 20MHz full RB	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.535 GHz Span: 80 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 3.NOV.2023 13:37:09	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.655 GHz Span: 80 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 3.NOV.2023 13:38:05
QPSK 20MHz RB1	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.535 GHz Span: 80 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 16.DEC.2023 02:34:35	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.655 GHz Span: 80 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 16.DEC.2023 02:35:38

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 5MHz full RB	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.535 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:19:31	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.655 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:51:29
16QAM 5MHz RB1	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.535 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 02:03:42	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.655 GHz Span: 20 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 16.DEC.2023 02:08:17
16QAM 10MHz full RB	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.535 GHz Span: 40 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:31:11	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 100 kHz VBW: 300 kHz SWT: 5 s Center: 2.655 GHz Span: 40 MHz ProjectNo.:CR231059186 Tester:Rod Luo Date: 3.NOV.2023 13:31:57



Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 20MHz full RB	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.535 GHz Span: 20 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 3.NOV.2023 13:37:09	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.655 GHz Span: 20 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 3.NOV.2023 13:39:40
16QAM 20MHz RB1	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.535 GHz Span: 20 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 16.DEC.2023 02:36:32	 Ref: 30 dBm Offset: 10.5 dB Att: 30 dB RBW: 300 kHz VBW: 1 MHz SWT: 5 s Center: 2.655 GHz Span: 20 MHz ProjectNo.: CR231059186 Tester: Rod Luo Date: 16.DEC.2023 02:37:35

4.6 Radiated Spurious Emissions

Serial Number:	2C4U-2	Test Date:	Below 1GHz: 2023/11/24 Above 1GHz: 2023/11/6
Test Site:	966-1	Test Mode:	Transmitting
Tester:	Vic Du, Tao Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7	Relative Humidity: (%)	47~64	ATM Pressure: (kPa)	101.1
----------------------	------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2023/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2023/11/17	2024/11/16
Above 1GHz					
AH	Double Ridge Guide	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2023/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2022/11/18	2023/11/17
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9852/2F-20	112001	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9850/2F-20	072002	2021/2/5	2024/2/4
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Cellular Band (30MHz-10GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Frequency:824.2MHz								
647.56	H	40.09	-33.51	0.00	0.52	-34.03	-13.00	21.03
647.56	V	54.25	-16.62	0.00	0.52	-17.14	-13.00	4.14
1648.400	H	82.35	-21.98	8.68	0.80	-18.3	-13.00	5.30
1648.400	V	81.18	-23.23	8.68	0.80	-20	-13.00	7.00
2472.600	H	77.67	-23.11	9.38	1.00	-22.1	-13.00	9.10
2472.600	V	76.54	-24.19	9.38	1.00	-23	-13.00	10.00
3296.800	H	62.72	-33.96	10.32	1.15	-35.9	-13.00	22.90
3296.800	V	61.49	-34.95	10.32	1.15	-36.8	-13.00	23.80
GSM 850 Frequency:836.6MHz								
884.46	H	36.39	-32.77	0.00	0.60	-33.37	-13.00	20.37
636.31	V	54.17	-16.90	0.00	0.52	-17.42	-13.00	4.42
1673.200	H	82.88	-21.43	8.71	0.85	-17.6	-13.00	4.60
1673.200	V	81.69	-22.72	8.71	0.85	-19.4	-13.00	6.40
2509.800	H	78.14	-22.47	9.42	1.01	-21.6	-13.00	8.60
2509.800	V	77.02	-23.60	9.42	1.01	-22.5	-13.00	9.50
3346.400	H	63.36	-33.81	10.34	1.16	-35.2	-13.00	22.20
3346.400	V	62.21	-34.82	10.34	1.16	-36.1	-13.00	23.10
GSM 850 Frequency:848.8MHz								
623.07	H	44.90	-28.84	0.00	0.48	-29.32	-13.00	16.32
623.07	V	55.04	-16.27	0.00	0.48	-16.75	-13.00	3.75
1697.600	H	83.64	-20.65	8.74	0.90	-16.8	-13.00	3.80
1697.600	V	82.53	-21.89	8.74	0.90	-18.5	-13.00	5.50
2546.400	H	79.06	-21.27	9.47	1.01	-20.7	-13.00	7.70
2546.400	V	77.81	-22.47	9.47	1.01	-21.7	-13.00	8.70
3395.200	H	64.27	-33.42	10.36	1.19	-34.2	-13.00	21.20
3395.200	V	63.12	-34.54	10.36	1.19	-35	-13.00	22.00

PCS Band (30MHz-20GHz)

1850 Band (GSM 1850)								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 1900 Frequency:1850.2MHz								
77.32	H	30.19	-77.98	-1.34	0.16	-79.48	-13.00	66.48
42.64	V	34.73	-58.51	-22.92	0.12	-81.55	-13.00	68.55
3700.400	H	61.95	-35.37	10.60	1.25	-36	-13.00	23.00
3700.400	V	60.78	-36.52	10.60	1.25	-37	-13.00	24.00
5550.600	H	60.39	-32.87	11.44	1.49	-33.4	-13.00	20.40
5550.600	V	59.27	-33.83	11.44	1.49	-34.7	-13.00	21.70
GSM 1900 Frequency:1880MHz								
76.71	H	30.08	-77.73	-1.64	0.16	-79.53	-13.00	66.53
88.35	V	34.46	-74.75	0.00	0.17	-74.92	-13.00	61.92
3760.000	H	62.45	-33.96	10.66	1.24	-35.1	-13.00	22.10
3760.000	V	61.28	-35.01	10.66	1.24	-36.2	-13.00	23.20
5640.000	H	60.87	-32.58	11.33	1.54	-32.9	-13.00	19.90
5640.000	V	59.64	-33.69	11.33	1.54	-34.3	-13.00	21.30
GSM 1900 Frequency:1909.8MHz								
77.59	H	30.24	-78.10	-1.20	0.16	-79.46	-13.00	66.46
70.12	V	33.05	-69.63	-4.94	0.15	-74.72	-13.00	61.72
3819.600	H	63.21	-32.65	10.72	1.29	-34.3	-13.00	21.30
3819.600	V	62.05	-33.67	10.72	1.29	-35.4	-13.00	22.40
5729.400	H	61.48	-32.00	11.22	1.59	-32	-13.00	19.00
5729.400	V	60.32	-33.04	11.22	1.59	-33.3	-13.00	20.30

LTE Bands:

(The Worst modulation and bandwidth was below)

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 1.4MHz, Frequency: 824.7 MHz, RB1								
716.80	H	21.16	-51.82	0.00	0.50	-52.32	-13.00	39.32
631.87	V	21.98	-49.17	0.00	0.49	-49.66	-13.00	36.66
1649.400	H	53.71	-50.62	8.68	0.80	-46.9	-13.00	33.90
1649.400	V	52.62	-51.79	8.68	0.80	-48.6	-13.00	35.60
2474.100	H	50.84	-49.94	9.38	1.00	-48.9	-13.00	35.90
2474.100	V	51.96	-48.77	9.38	1.00	-47.6	-13.00	34.60
3298.800	H	52.45	-44.23	10.32	1.15	-46.1	-13.00	33.10
3298.800	V	51.39	-45.05	10.32	1.15	-46.9	-13.00	33.90
QPSK, 1.4MHz, Frequency: 836.5 MHz, RB1								
582.96	H	21.01	-53.19	0.00	0.46	-53.65	-13.00	40.65
884.45	V	22.63	-43.75	0.00	0.60	-44.35	-13.00	31.35
1673.000	H	54.27	-50.04	8.71	0.85	-46.2	-13.00	33.20
1673.000	V	53.06	-51.35	8.71	0.85	-48	-13.00	35.00
2509.500	H	51.15	-49.46	9.42	1.01	-48.6	-13.00	35.60
2509.500	V	52.38	-48.24	9.42	1.01	-47.1	-13.00	34.10
3346.000	H	52.99	-44.17	10.34	1.16	-45.6	-13.00	32.60
3346.000	V	51.84	-45.18	10.34	1.16	-46.4	-13.00	33.40
QPSK, 1.4MHz, Frequency: 848.3 MHz, RB1								
982.47	H	20.94	-45.81	0.00	0.65	-46.46	-13.00	33.46
475.77	V	21.46	-51.08	0.00	0.42	-51.50	-13.00	38.50
1696.600	H	55.05	-49.24	8.74	0.89	-45.4	-13.00	32.40
1696.600	V	53.94	-50.48	8.74	0.89	-47.1	-13.00	34.10
2544.900	H	51.87	-48.47	9.47	1.01	-47.9	-13.00	34.90
2544.900	V	53.12	-47.18	9.47	1.01	-46.4	-13.00	33.40
3393.200	H	53.78	-43.89	10.36	1.19	-44.7	-13.00	31.70
3393.200	V	52.63	-45.00	10.36	1.19	-45.5	-13.00	32.50

LTE Band 40 Lower (30MHz-25GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK, Frequency:			2307.5	MHz		, RB1		
145.52	H	30.56	-81.55	0.00	0.22	-81.77	-40.00	41.77
43.81	V	34.47	-60.29	-21.37	0.12	-81.78	-40.00	41.78
4615.000	H	48.87	-46.49	10.74	1.41	-46.3	-40.00	6.30
4615.000	V	49.32	-45.90	10.74	1.41	-45.5	-40.00	5.50
6922.500	H	45.08	-45.94	11.22	1.88	-44.4	-40.00	4.40
6922.500	V	45.45	-45.44	11.22	1.88	-44.1	-40.00	4.10
5MHz QPSK, Frequency:			2312.5	MHz		, RB1		
260.29	H	29.70	-81.96	0.00	0.31	-82.27	-40.00	42.27
43.07	V	34.95	-58.85	-22.34	0.12	-81.31	-40.00	41.31
4625.000	H	49.69	-45.60	10.75	1.41	-45.5	-40.00	5.50
4625.000	V	50.12	-45.05	10.75	1.41	-44.7	-40.00	4.70
6937.500	H	45.86	-45.12	11.21	1.90	-43.6	-40.00	3.60
6937.500	V	46.27	-44.57	11.21	1.90	-43.3	-40.00	3.30

LTE Band 40 Upper (30MHz-25GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK, Frequency: 2352.5 MHz , RB1								
77.32	H	30.32	-77.85	-1.34	0.16	-79.35	-40.00	39.35
42.63	V	34.57	-58.66	-22.93	0.12	-81.71	-40.00	41.71
4705.000	H	49.68	-45.10	10.85	1.41	-45.5	-40.00	5.50
4705.000	V	50.15	-44.65	10.85	1.41	-44.6	-40.00	4.60
7057.500	H	44.84	-45.17	11.17	1.92	-43.8	-40.00	3.80
7057.500	V	45.21	-44.69	11.17	1.92	-43.6	-40.00	3.60
5MHz QPSK, Frequency: 2357.5 MHz , RB1								
146.89	H	30.45	-81.61	0.00	0.23	-81.84	-40.00	41.84
88.34	V	35.31	-73.90	0.00	0.17	-74.07	-40.00	34.07
4715.000	H	50.57	-44.14	10.86	1.41	-44.7	-40.00	4.70
4715.000	V	50.98	-43.73	10.86	1.41	-43.8	-40.00	3.80
7072.500	H	45.45	-44.35	11.16	1.91	-43.2	-40.00	3.20
7072.500	V	45.73	-43.98	11.16	1.91	-43.1	-40.00	3.10

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231059186-EXP EUT EXTERNAL PHOTOGRAPHS and
CR231059186-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231059186-00A-TSP TEST SETUP PHOTOGRAPHS.

==== END OF REPORT =====