

TEST REPORT

Product : Microphone Wireless System
Trade mark : SWIFF AUDIO
Model/Type reference : M1, M2, M3, M4, M5, M6, M7, M8, M9, M10
Serial Number : N/A
Report Number : EED32M00042401
FCC ID : 2ARWY-M1
Date of Issue : Apr. 15, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

SWIFF TECHNOLOGY CO., LTD.
5/F, Building B, Hengchangrong Industrial Park,
No.52 Huaning Road. Longhua, ShenZhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

mark.chen

Mark Chen

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Ware Xin

Ware Xin

Approved by:

Sam Chuang

Sam Chuang

Date:

Apr. 15, 2020

Check No.:2447624290



2 Version

Version No.	Date	Description
00	Apr. 15, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Duty Cycle	ANSI C63.10-2013	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

Model No.: M1, M2, M3, M4, M5, M6, M7, M8, M9, M10

Only the model M1 was tested, Their electrical circuit design, layout, components used and internal wiring are identical, Only the color of the appearance is different.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	8
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
EUT DUTY CYCLE	14
Appendix A): 6dB Occupied Bandwidth	15
Appendix B): Conducted Peak Output Power	19
Appendix C): Band-edge for RF Conducted Emissions	21
Appendix D): RF Conducted Spurious Emissions	23
Appendix E): Power Spectral Density	27
Appendix F): Antenna Requirement	29
Appendix G): AC Power Line Conducted Emission	30
Appendix H): Restricted bands around fundamental frequency (Radiated)	33
Appendix I): Radiated Spurious Emissions	42
PHOTOGRAPHS OF TEST SETUP	46
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	49

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

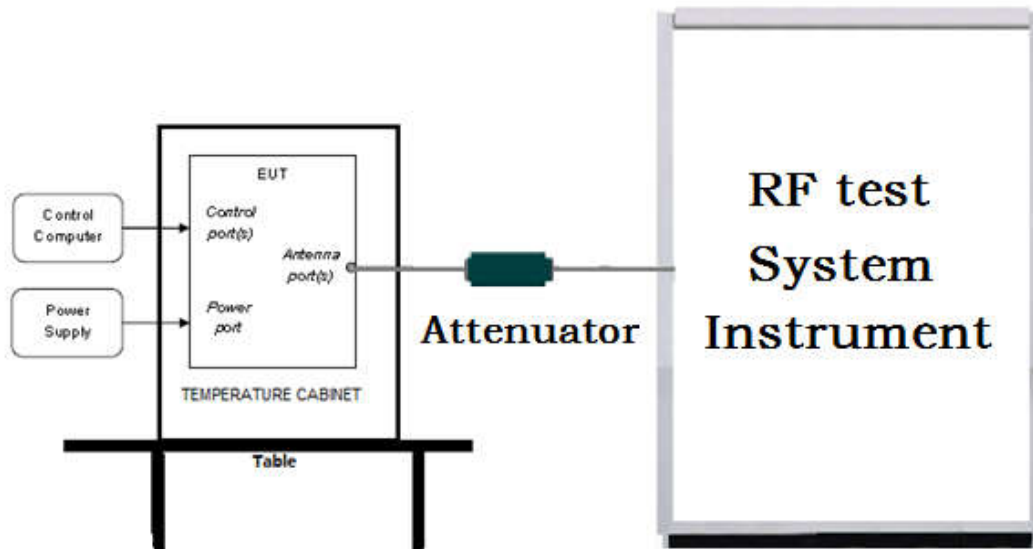

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

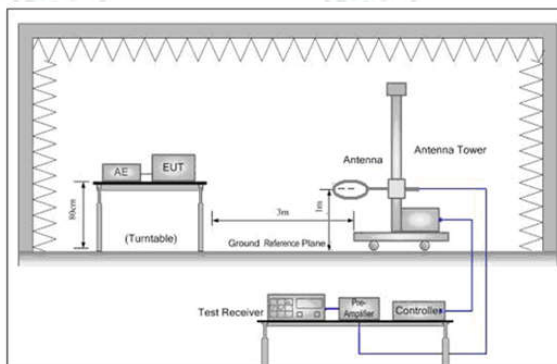


Figure 1. Below 30MHz

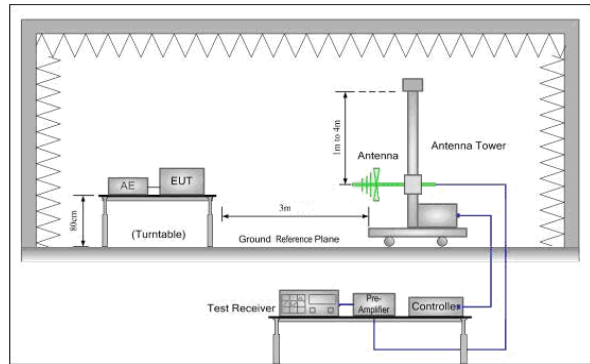


Figure 2. 30MHz to 1GHz


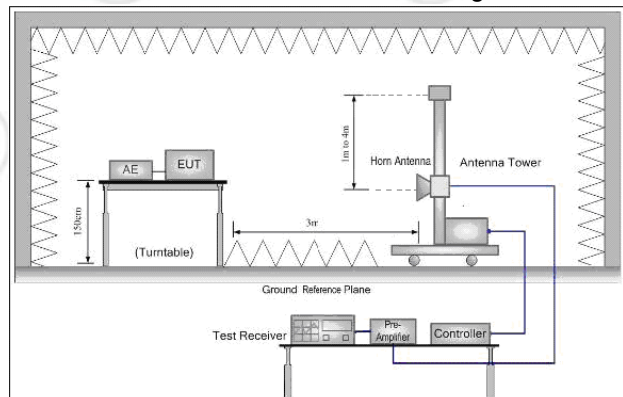


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

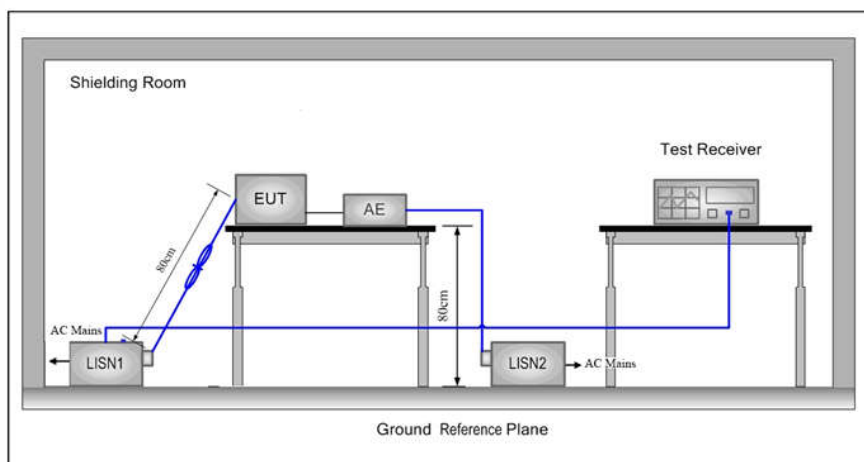

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2409MHz ~2475MHz	Channel 1	Channel 17	Channel 34
		2409MHz	2441MHz	2475MHz

6 General Information

6.1 Client Information

Applicant:	SWIFF TECHNOLOGY CO., LTD.
Address of Applicant:	5/F, Building B, Hengchangrong Industrial Park, No.52 Huaning Road. Longhua, ShenZhen, China
Manufacturer:	SWIFF TECHNOLOGY CO., LTD.
Address of Manufacturer:	5/F, Building B, Hengchangrong Industrial Park, No.52 Huaning Road. Longhua, ShenZhen, China
Factory:	SWIFF TECHNOLOGY CO., LTD.
Address of Factory:	5/F, Building B, Hengchangrong Industrial Park, No.52 Huaning Road. Longhua, ShenZhen, China

6.2 General Description of EUT

Product Name:	Microphone Wireless System	
Model No.(EUT):	M1, M2, M3, M4, M5, M6, M7, M8, M9, M10	
Test Model No.:	M1	
Trade Mark:	SWIFF AUDIO	
EUT Supports Radios application:	2409-2475MHz (2409MHz/2441MHz/2475MHz)	
Power Supply:	Battery	ZLY 602035 400mAh 3.7V 1.48Wh
Sample Received Date:	Mar. 13, 2020	
Sample tested Date:	Mar. 13, 2020 to Apr. 03, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2409-2475MHz				
Channel Numbers:	34				
Type of Modulation:	GFSK				
Test Power Grade:	Default				
Test Software of EUT:	Default				
Antenna Type and Gain:	Type: PCB Antenna Gain:2.96dBi				
Test Voltage:	DC 3.7V				
Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2409MHz	13	2433MHz	25	2457MHz
2	2411MHz	14	2435MHz	26	2459MHz
3	2413MHz	15	2437MHz	27	2461MHz
4	2415MHz	16	2439MHz	28	2463MHz
5	2417MHz	17	2441MHz	29	2465MHz
6	2419MHz	18	2443MHz	30	2467MHz
7	2421MHz	19	2445MHz	31	2469MHz
8	2423MHz	20	2447MHz	32	2471MHz
9	2425MHz	21	2449MHz	33	2473MHz
10	2427MHz	22	2451MHz	34	2475MHz
11	2429MHz	23	2453MHz		
12	2431MHz	24	2455MHz		

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI 63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI 63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix I)

EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
2.4G	0.188	0.282	66.7%

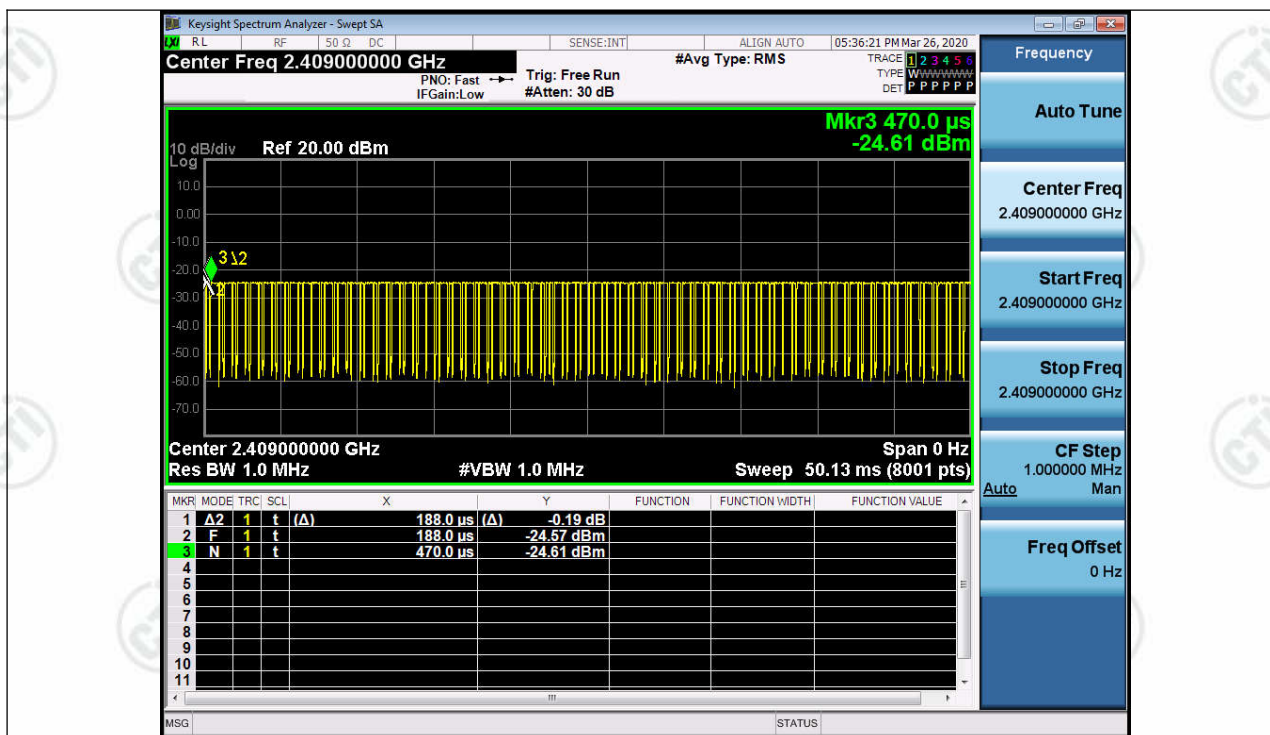

Appendix A): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01 , section 8.1 and ANSI 63.10:2013 clause 6.9.2 & 6.9.3.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth .
4. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup



Test Result



6db down:

Mode	Channel	6dB Bandwidth [MHz]	Verdict
GFSK	LCH	0.6861	PASS
GFSK	MCH	0.6870	PASS
GFSK	HCH	0.6888	PASS

99%OBW

Mode	Channel	99% OBW[MHz]	Verdict
GFSK	LCH	1.6645	PASS
GFSK	MCH	1.6726	PASS
GFSK	HCH	1.6797	PASS

Test Graphs
6db down:

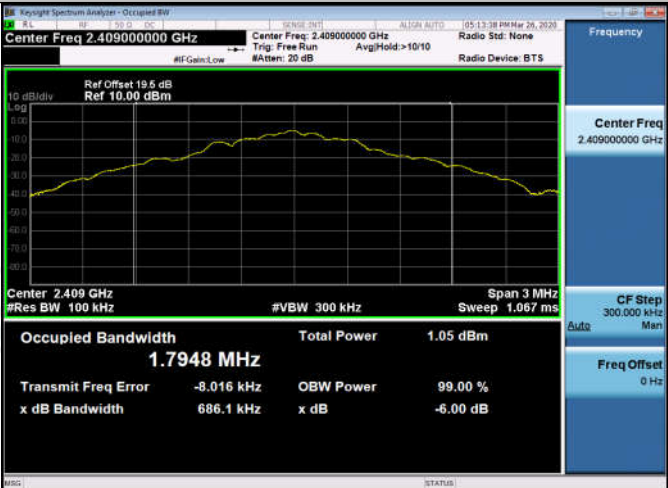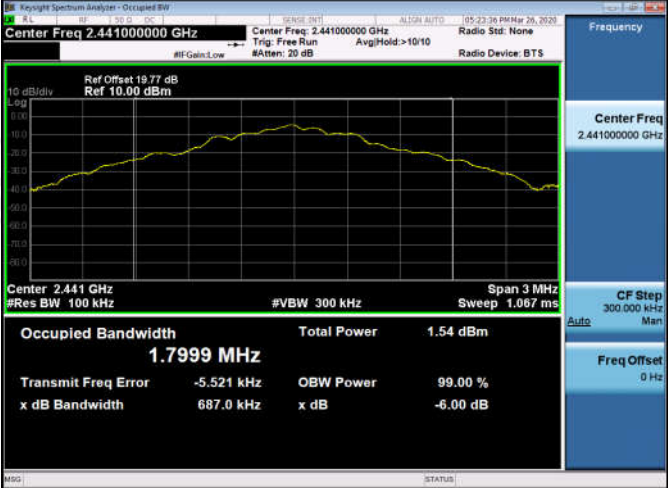Graphs	
LCH	 Keygraph Spectrum Analyzer - Occupied BW Center Freq 2.409000000 GHz Ref Offset 19.6 dB Ref 10.00 dBm Center 2.409 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms Occupied Bandwidth 1.7948 MHz Total Power 1.05 dBm Transmit Freq Error -8.016 kHz OBW Power 99.00 % x dB Bandwidth 686.1 kHz x dB -6.00 dB
MCH	 Keygraph Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Center 2.441 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms Occupied Bandwidth 1.7999 MHz Total Power 1.54 dBm Transmit Freq Error -5.521 kHz OBW Power 99.00 % x dB Bandwidth 687.0 kHz x dB -6.00 dB
HCH	 Keygraph Spectrum Analyzer - Occupied BW Center Freq 2.475000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Center 2.475 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms Occupied Bandwidth 1.8026 MHz Total Power 0.95 dBm Transmit Freq Error -1.627 kHz OBW Power 99.00 % x dB Bandwidth 688.8 kHz x dB -6.00 dB

99%OBW:



Appendix B): Conducted Peak Output Power

Test Limit

According to §15.247(b) and RSS-247 section 5.4(d)

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] ☐ Point-to-point operation
-------	---

Test Procedure

Test method Refer as KDB 558074 D01, section 9.1.2.

1. The EUT RF output connected to spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows:
 - a) Set the RBW $\geq$ DTS bandwidth.
 - b) Set VBW $\geq$ $[3 \times \text{RBW}]$.
 - c) Set span $\geq$ $[3 \times \text{RBW}]$.
 - d) Sweep time = auto couple.
 - e) Detector = peak.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use peak marker function to determine the peak amplitude level
4. Measure and record the result in the test report.

Test Setup



Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
GFSK	LCH	-4.782	PASS
GFSK	MCH	-4.403	PASS
GFSK	HCH	-4.805	PASS

Test Graphs



Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01 , Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Setup



Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	-4.866	-57.997	-24.87	PASS
GFSK	HCH	-4.987	-53.649	-24.99	PASS

Test Graphs



Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d) and RSS-247 section 5.5

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01 , Section 11.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup

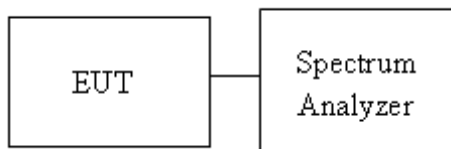



Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-5.041	<Limit	PASS
GFSK	MCH	-4.588	<Limit	PASS
GFSK	HCH	-5.197	<Limit	PASS

Test Graphs

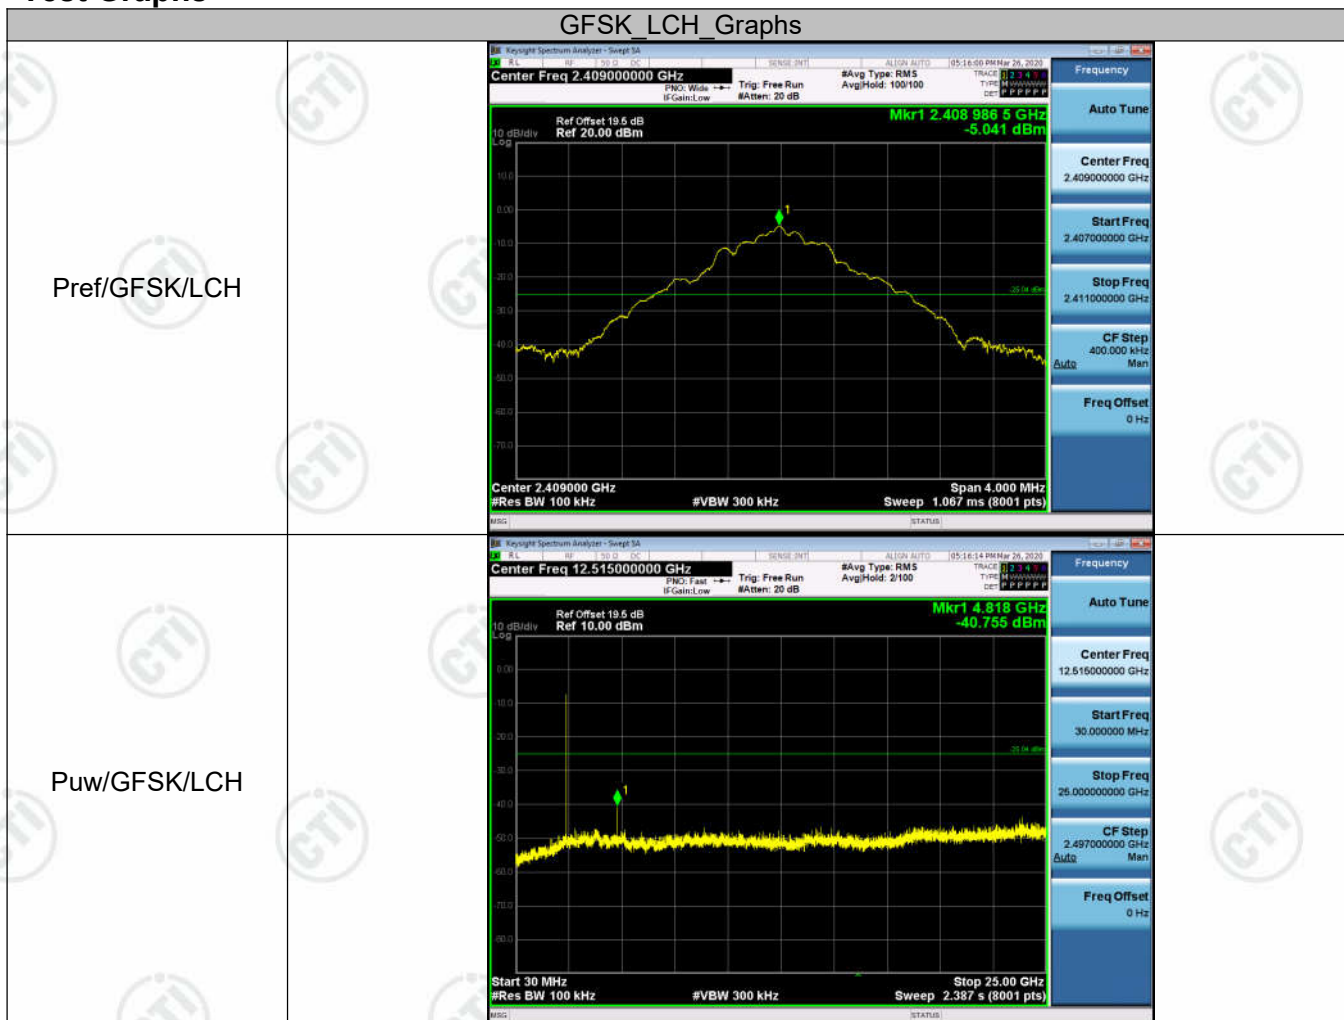

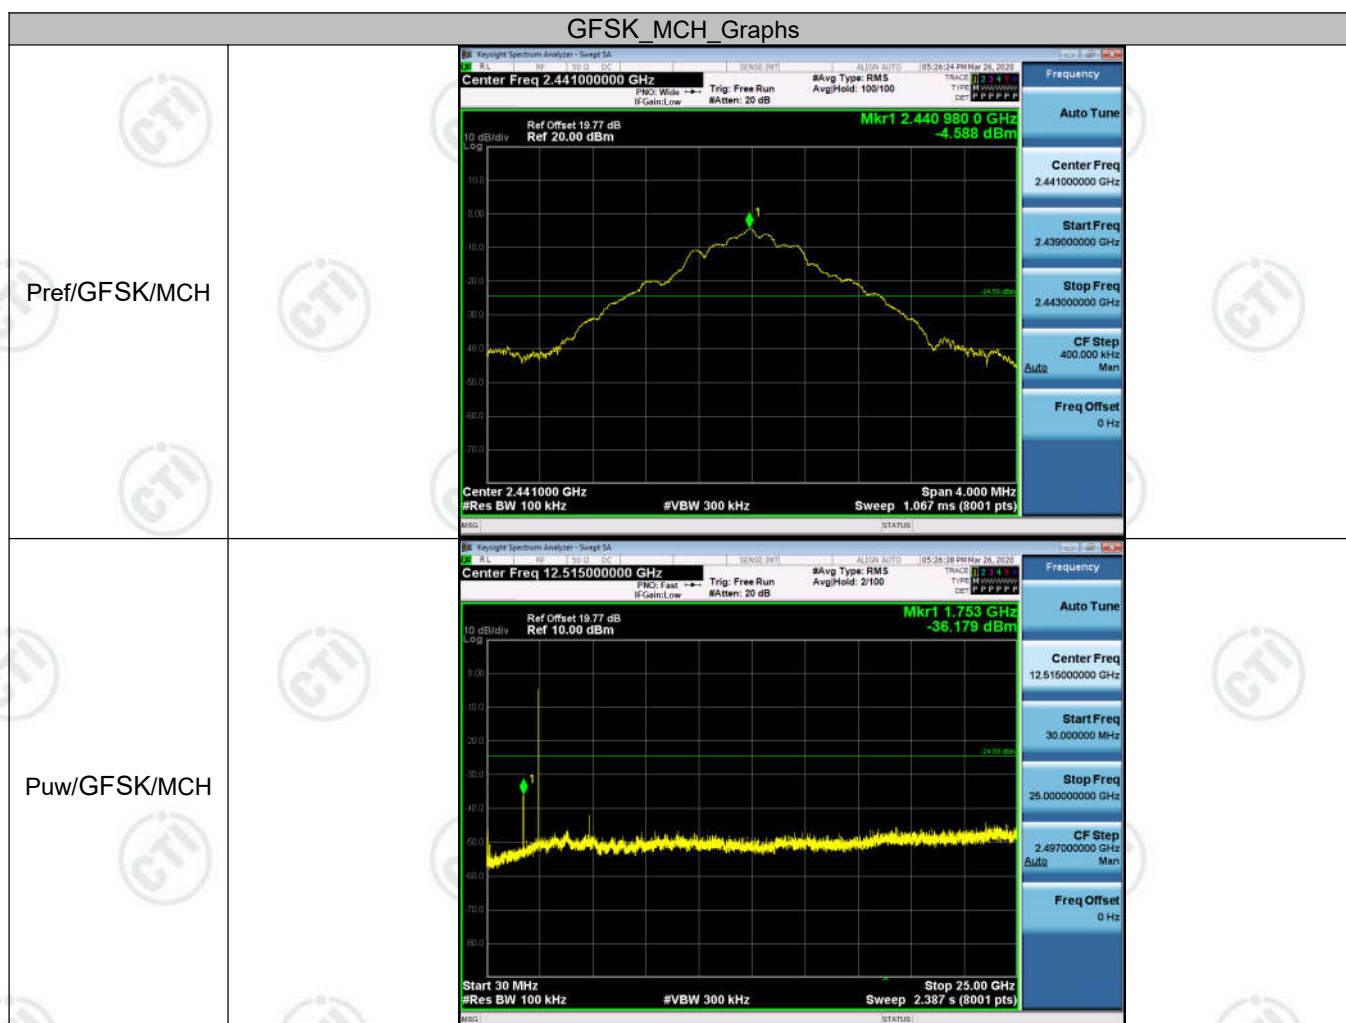

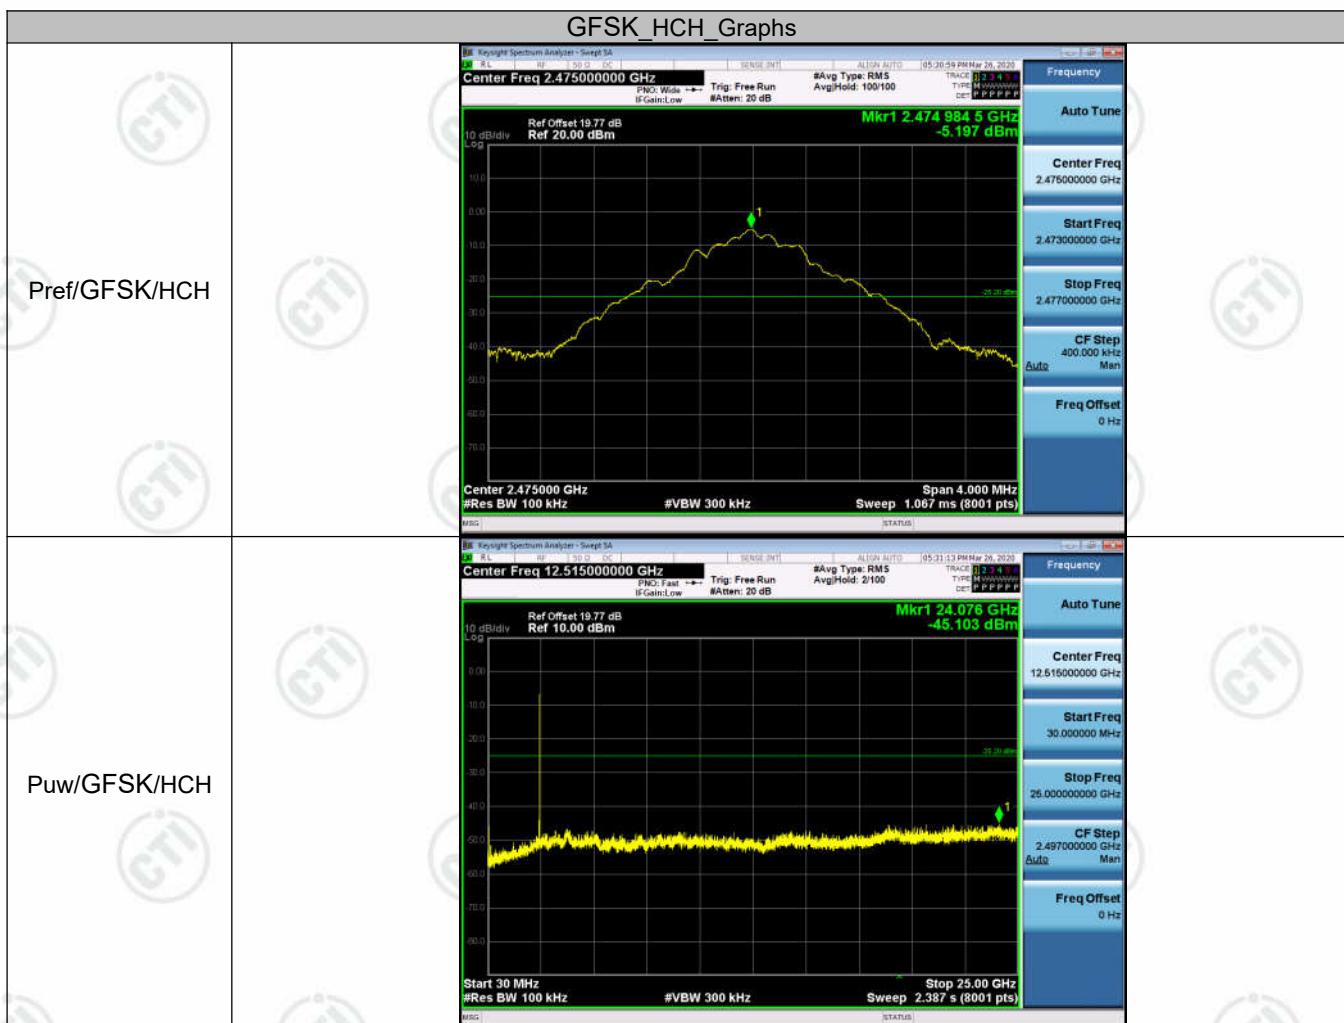

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

Test Procedure

Test method Refer as KDB 558074 D01 , Section 10.2

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
Measure and record the result of power spectral density. in the test report.


Test Setup

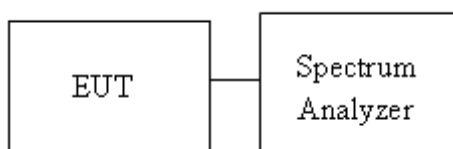

Result Table

Mode	Channel	PSD [dBm]	Verdict
GFSK	LCH	-17.500	PASS
GFSK	MCH	-15.113	PASS
GFSK	HCH	-15.809	PASS

Test Graphs

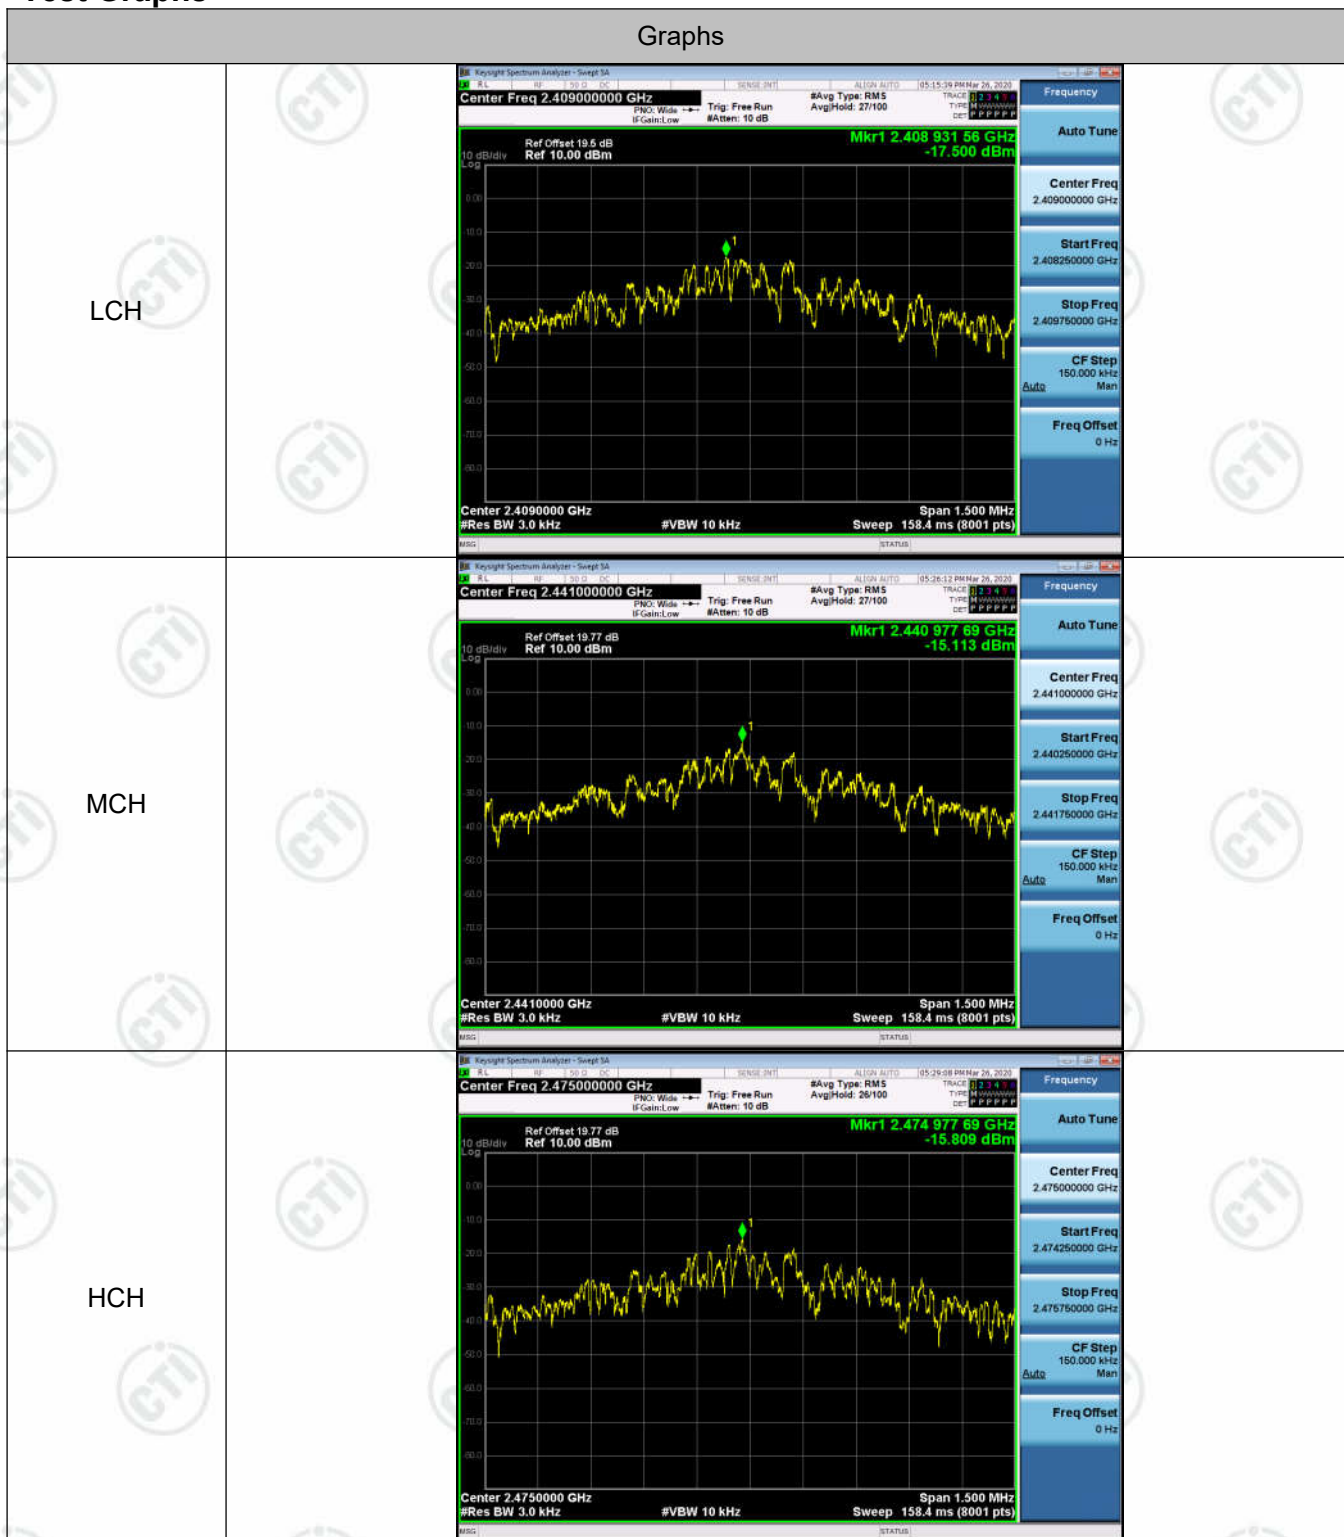

Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

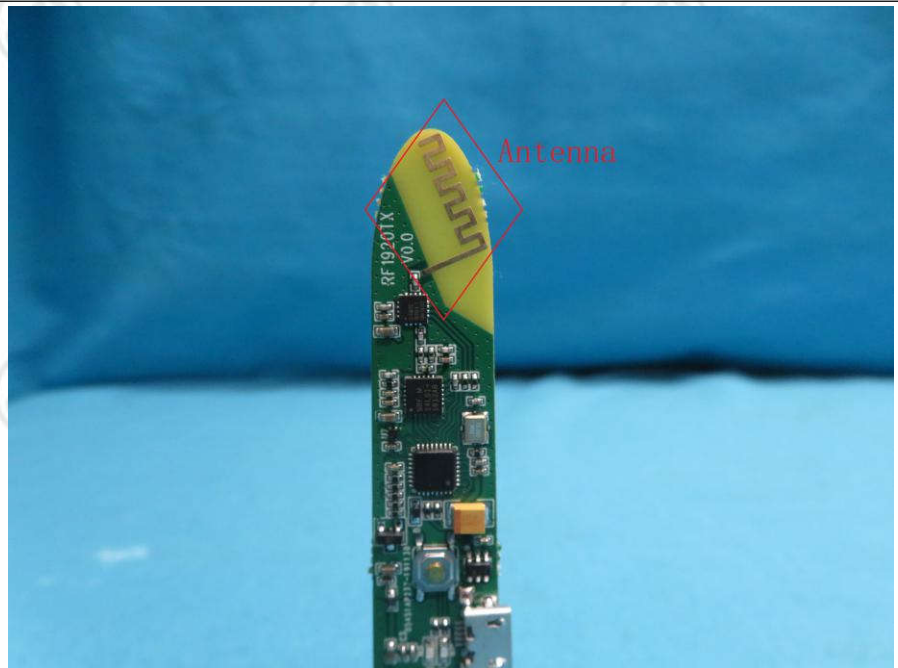

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.96dBi.

Appendix G): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Product : Microphone Wireless System

Model/Type reference : M1

Temperature : 24℃

Humidity : 52%


Live line:

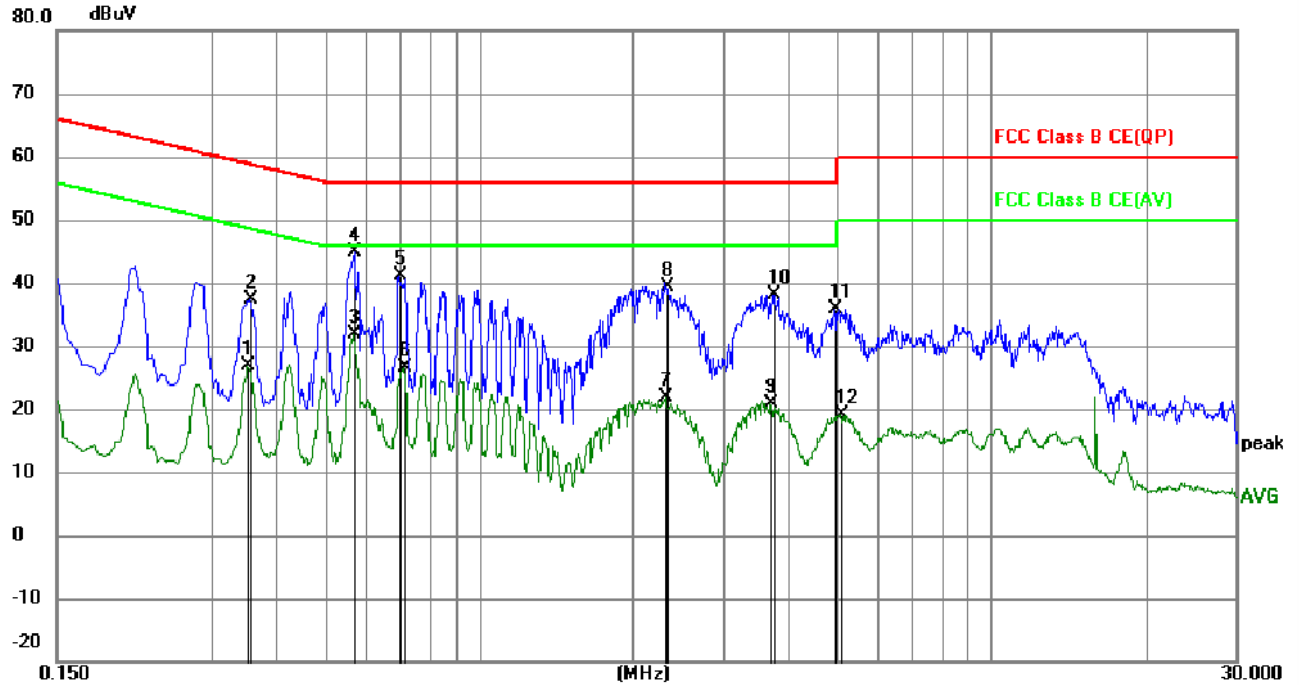

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3525	16.78	10.05	26.83	48.90	-22.07	AVG	
2		0.3570	27.31	10.04	37.35	58.80	-21.45	peak	
3		0.5685	21.75	10.08	31.83	46.00	-14.17	AVG	
4	*	0.5730	34.71	10.09	44.80	56.00	-11.20	peak	
5		0.6990	31.37	9.64	41.01	56.00	-14.99	peak	
6		0.7125	16.87	9.67	26.54	46.00	-19.46	AVG	
7		2.3100	12.14	9.83	21.97	46.00	-24.03	AVG	
8		2.3280	29.57	9.83	39.40	56.00	-16.60	peak	
9		3.7095	11.02	9.83	20.85	46.00	-25.15	AVG	
10		3.7725	28.41	9.83	38.24	56.00	-17.76	peak	
11		4.9425	26.10	9.83	35.93	56.00	-20.07	peak	
12		5.0954	9.38	9.83	19.21	50.00	-30.79	AVG	

Neutral line:

80.0 dBuV

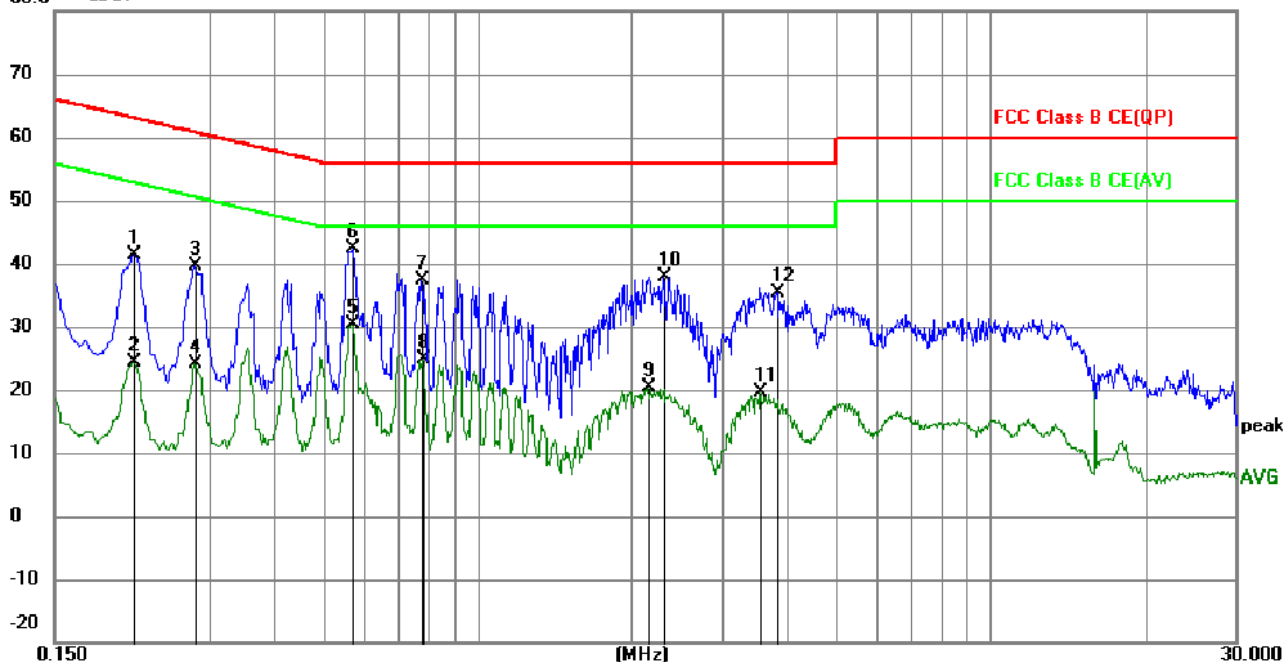

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	31.38	10.03	41.41	63.09	-21.68	peak	
2		0.2130	14.36	10.03	24.39	53.09	-28.70	AVG	
3		0.2805	29.48	10.08	39.56	60.80	-21.24	peak	
4		0.2805	13.98	10.08	24.06	50.80	-26.74	AVG	
5		0.5685	20.20	10.08	30.28	46.00	-15.72	AVG	
6	*	0.5730	32.38	10.09	42.47	56.00	-13.53	peak	
7		0.7755	27.45	9.84	37.29	56.00	-18.71	peak	
8		0.7799	14.94	9.86	24.80	46.00	-21.20	AVG	
9		2.1480	10.48	9.83	20.31	46.00	-25.69	AVG	
10		2.3010	28.05	9.83	37.88	56.00	-18.12	peak	
11		3.5610	9.80	9.83	19.63	46.00	-26.37	AVG	
12		3.8355	25.57	9.83	35.40	56.00	-20.60	peak	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK	Channel:	2409
Remark:	PK		


Test Graph

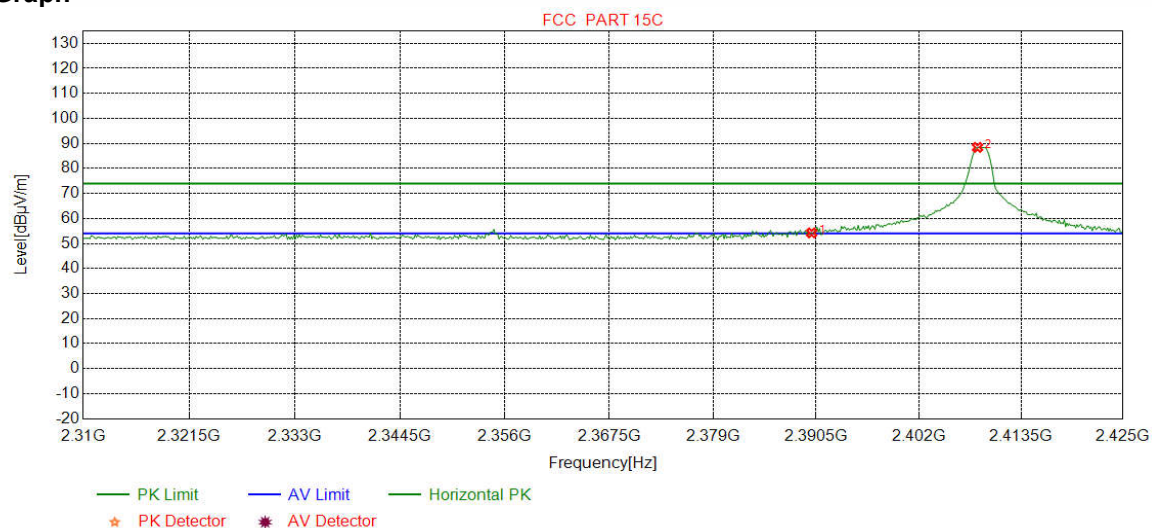

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	51.74	54.24	74.00	19.76	Pass	Horizontal
2	2408.5920	32.27	13.34	-43.12	85.94	88.43	74.00	-14.43	Pass	Horizontal

Mode:	GFSK	Channel:	2409
Remark:	PK		


Test Graph

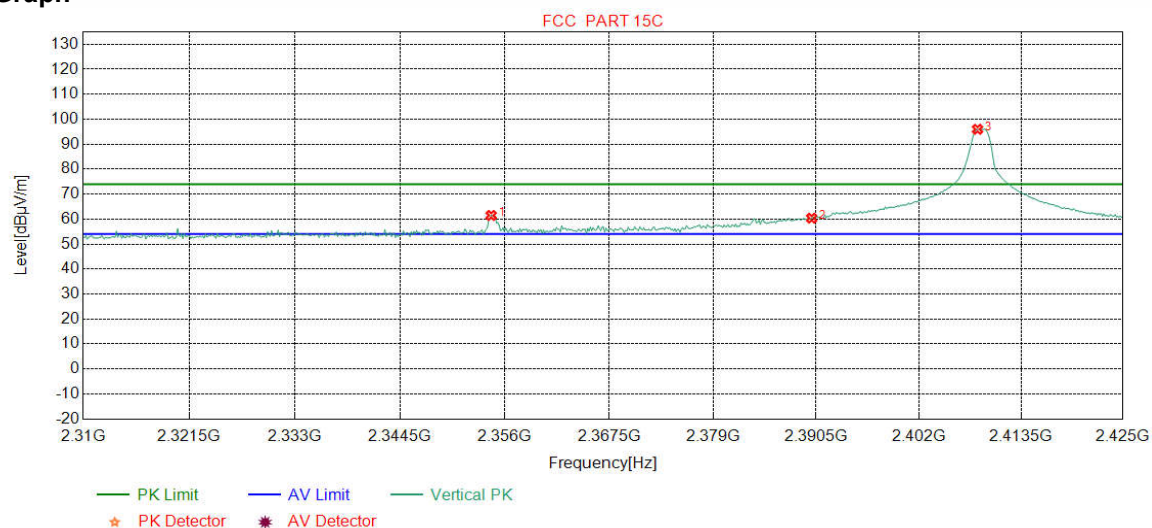

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2354.4743	32.20	13.64	-43.14	58.77	61.47	74.00	12.53	Pass	Vertical
2	2390.0000	32.25	13.37	-43.12	57.86	60.36	74.00	13.64	Pass	Vertical
3	2408.5920	32.27	13.34	-43.12	93.48	95.97	74.00	-21.97	Pass	Vertical

Mode:	GFSK	Channel:	2409
Remark:	AV		


Test Graph

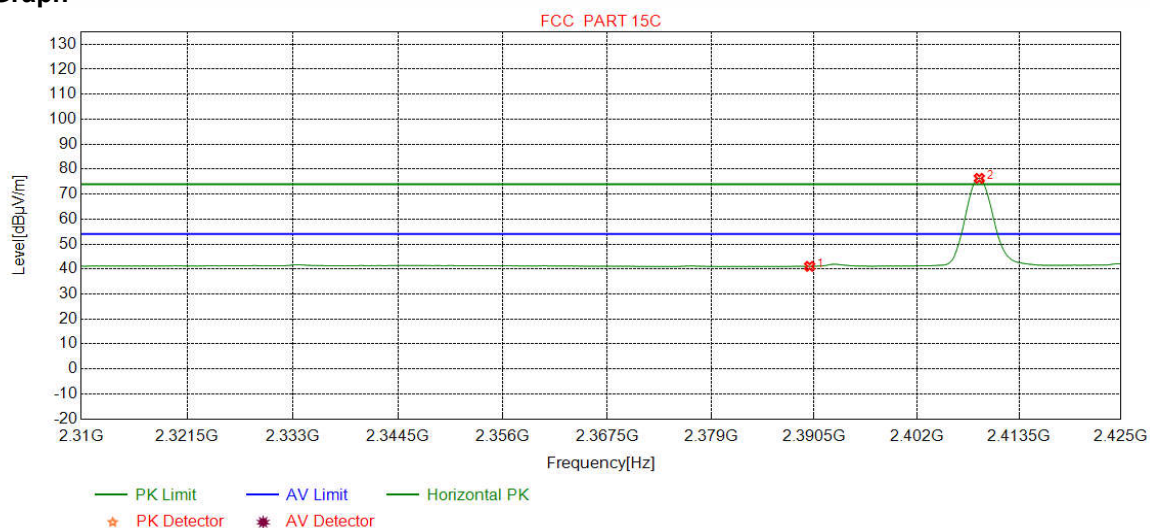

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	38.57	41.07	54.00	12.93	Pass	Horizontal
2	2409.0238	32.27	13.34	-43.11	73.81	76.31	54.00	-22.31	Pass	Horizontal

Mode:	GFSK	Channel:	2409
Remark:	AV		


Test Graph

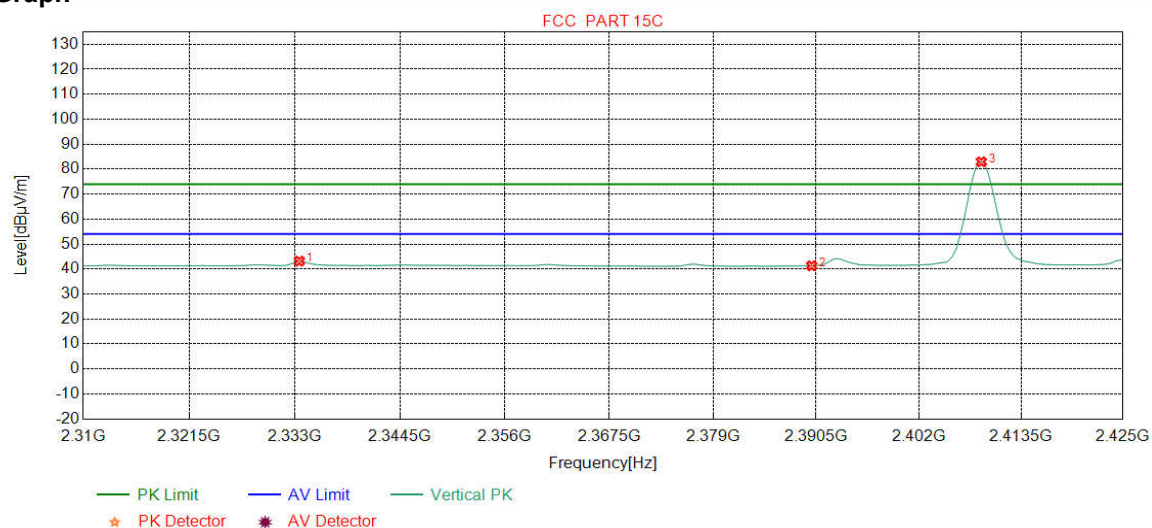

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2333.4606	32.17	13.54	-43.13	40.58	43.16	54.00	10.84	Pass	Vertical
2	2390.0000	32.25	13.37	-43.12	38.80	41.30	54.00	12.70	Pass	Vertical
3	2409.0238	32.27	13.34	-43.11	80.45	82.95	54.00	-28.95	Pass	Vertical

Mode:	GFSK	Channel:	2475
Remark:	PK		


Test Graph

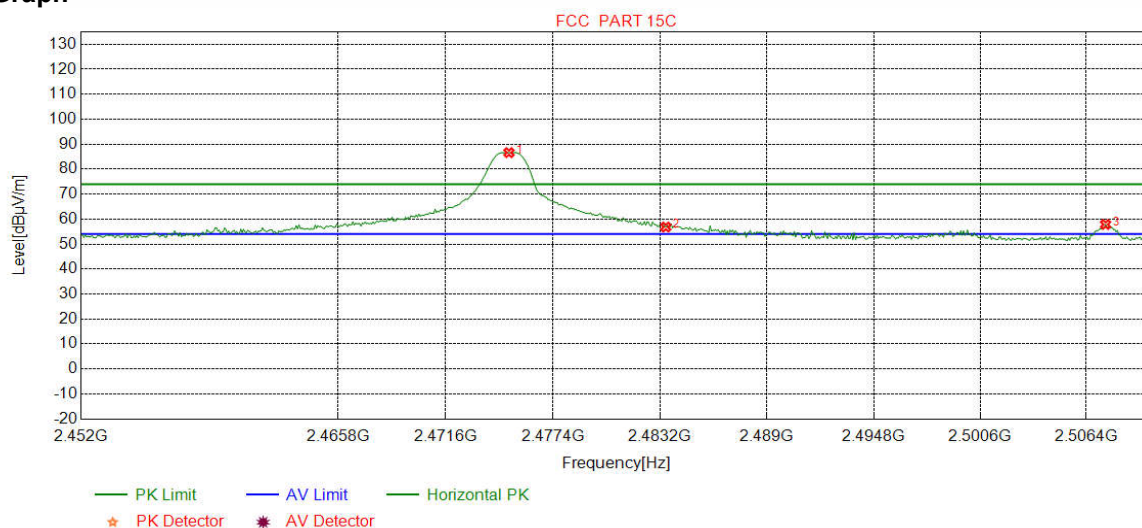

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2475.0113	32.37	13.41	-43.11	83.94	86.61	74.00	-12.61	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	54.15	56.80	74.00	17.20	Pass	Horizontal
3	2507.4593	32.41	13.37	-43.10	55.16	57.84	74.00	16.16	Pass	Horizontal

Mode:	GFSK	Channel:	2475
Remark:	PK		


Test Graph

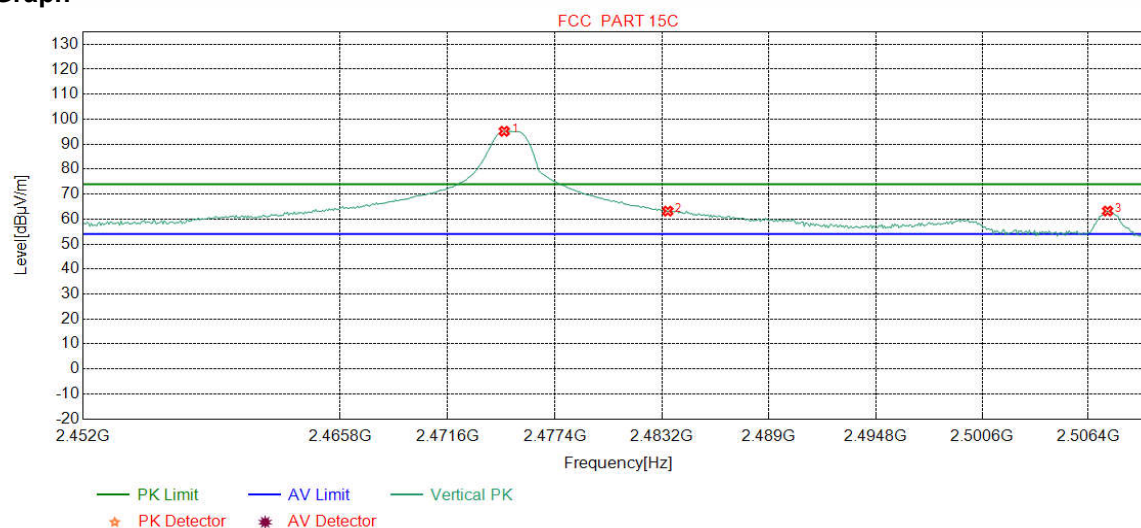

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2474.6483	32.36	13.42	-43.10	92.49	95.17	74.00	-21.17	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	60.52	63.17	74.00	10.83	Pass	Vertical
3	2507.4593	32.41	13.37	-43.10	60.54	63.22	74.00	10.78	Pass	Vertical

Mode:	GFSK	Channel:	2475
Remark:	AV		


Test Graph

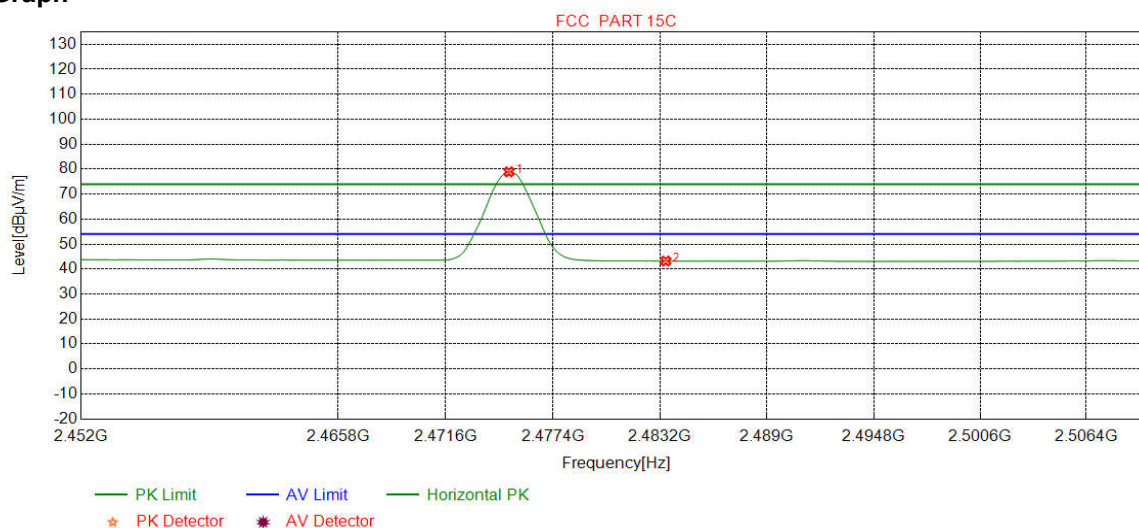

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2475.0113	32.37	13.41	-43.11	76.24	78.91	54.00	-24.91	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	40.55	43.20	54.00	10.80	Pass	Horizontal

Mode:	GFSK	Channel:	2475
Remark:	AV		

Test Graph

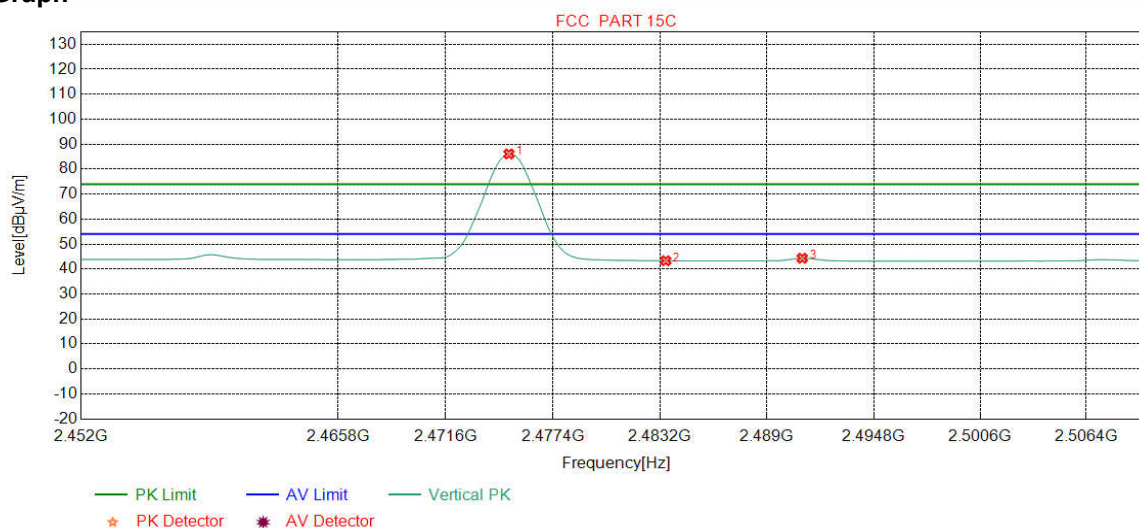

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2475.0113	32.37	13.41	-43.11	83.42	86.09	54.00	-32.09	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	40.67	43.32	54.00	10.68	Pass	Vertical
3	2490.9086	32.39	13.34	-43.10	41.70	44.33	54.00	9.67	Pass	Vertical

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).;

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

Mode:			GFSK					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.5967	11.21	0.67	-31.38	40.15	20.65	40.00	19.35	Pass	H	PK
2	120.0250	9.20	1.30	-32.07	39.89	18.32	43.50	25.18	Pass	H	PK
3	240.0260	11.94	1.84	-31.90	41.31	23.19	46.00	22.81	Pass	H	PK
4	360.0270	14.52	2.27	-31.84	44.21	29.16	46.00	16.84	Pass	H	PK
5	649.9890	19.40	3.10	-32.07	41.31	31.74	46.00	14.26	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	36.95	32.30	54.00	21.70	Pass	H	PK
7	35.1415	10.75	0.65	-31.42	43.58	23.56	40.00	16.44	Pass	V	PK
8	150.0010	7.55	1.45	-32.01	48.17	25.16	43.50	18.34	Pass	V	PK
9	195.0135	10.43	1.64	-31.94	45.49	25.62	43.50	17.88	Pass	V	PK
10	240.0260	11.94	1.84	-31.90	42.73	24.61	46.00	21.39	Pass	V	PK
11	360.0270	14.52	2.27	-31.84	39.57	24.52	46.00	21.48	Pass	V	PK
12	649.9890	19.40	3.10	-32.07	41.26	31.69	46.00	14.31	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			GFSK					Channel:		2407	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1204.6205	28.10	2.66	-42.88	53.22	41.10	74.00	32.90	Pass	H	PK
2	1731.4731	29.93	3.22	-42.68	51.60	42.07	74.00	31.93	Pass	H	PK
3	2953.7954	33.13	4.41	-43.10	51.12	45.56	74.00	28.44	Pass	H	PK
4	3613.0409	33.49	4.34	-43.08	52.47	47.22	74.00	26.78	Pass	H	PK
5	4817.1211	34.50	4.59	-42.80	64.20	60.49	74.00	13.51	Pass	H	PK
6	7226.2818	36.33	5.80	-42.16	51.80	51.77	74.00	22.23	Pass	H	PK
7	4817.1210	34.50	4.59	-42.80	49.36	45.65	54.00	8.35	Pass	H	AV
8	1748.6749	30.04	3.23	-42.68	51.69	42.28	74.00	31.72	Pass	V	PK
9	2607.9608	32.57	4.10	-43.10	50.99	44.56	74.00	29.44	Pass	V	PK
10	3179.0119	33.27	4.62	-43.10	50.14	44.93	74.00	29.07	Pass	V	PK
11	4818.1212	34.50	4.59	-42.80	54.36	50.65	74.00	23.35	Pass	V	PK
12	7333.2889	36.43	5.85	-42.13	49.07	49.22	74.00	24.78	Pass	V	PK
13	9287.4192	37.64	6.63	-42.06	49.27	51.48	74.00	22.52	Pass	V	PK

Mode:			GFSK					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1220.8221	28.12	2.67	-42.87	54.35	42.27	74.00	31.73	Pass	H	PK
2	1754.2754	30.08	3.24	-42.69	52.03	42.66	74.00	31.34	Pass	H	PK
3	3661.0441	33.53	4.32	-43.07	51.90	46.68	74.00	27.32	Pass	H	PK
4	4883.1255	34.50	4.81	-42.80	63.67	60.18	74.00	13.82	Pass	H	PK
5	7322.2882	36.42	5.85	-42.13	52.18	52.32	74.00	21.68	Pass	H	PK
6	9055.4037	37.69	6.48	-42.02	48.98	51.13	74.00	22.87	Pass	H	PK
7	4883.1248	34.50	4.81	-42.80	46.80	43.31	54.00	10.69	Pass	H	AV
8	1078.2078	27.98	2.54	-43.02	53.35	40.85	74.00	33.15	Pass	V	PK
9	1636.8637	29.30	3.12	-42.81	51.98	41.59	74.00	32.41	Pass	V	PK
10	2541.1541	32.47	4.08	-43.10	54.91	48.36	74.00	25.64	Pass	V	PK
11	4882.1255	34.50	4.81	-42.80	53.10	49.61	74.00	24.39	Pass	V	PK
12	6484.2323	35.90	5.49	-42.51	50.29	49.17	74.00	24.83	Pass	V	PK
13	8979.3986	37.65	6.35	-42.00	50.03	52.03	74.00	21.97	Pass	V	PK

Mode:			GFSK					Channel:		2475	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1237.4237	28.14	2.67	-42.85	54.06	42.02	74.00	31.98	Pass	H	PK
2	1682.6683	29.61	3.18	-42.71	51.06	41.14	74.00	32.86	Pass	H	PK
3	3712.0475	33.57	4.27	-43.06	51.25	46.03	74.00	27.97	Pass	H	PK
4	4949.1299	34.50	4.82	-42.80	62.23	58.75	74.00	15.25	Pass	H	PK
5	7424.2950	36.52	5.85	-42.11	50.94	51.20	74.00	22.80	Pass	H	PK
6	8908.3939	37.50	6.39	-42.00	49.88	51.77	74.00	22.23	Pass	H	PK
7	4949.1308	34.50	4.82	-42.80	47.91	44.43	54.00	9.57	Pass	H	AV
8	1125.0125	28.03	2.63	-42.98	51.60	39.28	74.00	34.72	Pass	V	PK
9	1725.6726	29.89	3.22	-42.68	51.03	41.46	74.00	32.54	Pass	V	PK
10	2541.1541	32.47	4.08	-43.10	55.61	49.06	74.00	24.94	Pass	V	PK
11	3767.0511	33.61	4.36	-43.05	49.95	44.87	74.00	29.13	Pass	V	PK
12	4949.1299	34.50	4.82	-42.80	51.98	48.50	74.00	25.50	Pass	V	PK
13	9209.4140	37.66	6.47	-42.04	49.86	51.95	74.00	22.05	Pass	V	PK

Note:

1)The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor- Antenna Factor-Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.