FCC REPORT

Applicant:	AirFixture, LLC
Address of Applicant:	51A Kansas Avenue, Kansas City, KS 66105, United States
Manufacturer/Factory:	Computime Electronics (Shenzhen) Company Limited
Address of Manufacturer/Factory:	Yuekenguangyu Industrial Park,Kangqiao Road 88#, Danzhutou Community, Nanwan Street office,Longgang District, Shenzhen, China.
Equipment Under Test (EUT)	
Product Info:	Diffuser Board
Model No.:	3000.0050.00
Trade Mark:	AirFixture
FCC ID:	2ARX3-CTLB3585
Applicable standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt:	November 29, 2018
Date of Test:	November 30, 2018-January 07, 2019
Date of report issued:	January 08, 2019
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	*January 08, 2019*	*Original*

Prepared By:	***Project Engineer***	***Date:***	*January 08, 2019*
Check By:	***Reviewer***	***Date:***	*January 08, 2019*

3 Contents

Page

1 COVER PAGE 1

2 VERSION 2

3 CONTENTS 3

4 TEST SUMMARY 4

4.1 MEASUREMENT UNCERTAINTY 4

5 GENERAL INFORMATION 5

5.1 GENERAL DESCRIPTION OF EUT 5
5.2 TEST MODE 7
5.3 DESCRIPTION OF SUPPORT UNITS 7
5.4 TEST FACILITY 7
5.5 TEST LOCATION 7
5.6 ADDITIONAL INSTRUCTIONS 7

6 TEST INSTRUMENTS LIST 8

7 TEST RESULTS AND MEASUREMENT DATA 10

7.1 ANTENNA REQUIREMENT 10
7.2 CONDUCTED EMISSIONS 11
7.3 CONDUCTED PEAK OUTPUT POWER 14
7.4 CHANNEL BANDWIDTH 17
7.5 POWER SPECTRAL DENSITY 20
7.6 BAND EDGES 23
7.6.1 Conducted Emission Method 23
7.6.2 Radiated Emission Method 25
7.7 SPURIOUS EMISSION 33
7.7.1 Conducted Emission Method 33
7.7.2 Radiated Emission Method 36

8 TEST SETUP PHOTO 49

9 EUT CONSTRUCTIONAL DETAILS 49

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark： Test according to ANSI C63.10:2013

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Info:	Diffuser Board
Model No.:	3000.0050.00
Serial No.:	001E5E0902471E14
Test sample(s) ID:	GTS201811000222-1
Sample(s) Status	Engineer sample
Hardware version:	SBR-2-1852
Software version:	20181203V10
Operation Frequency:	2405MHz~2480MHz
Channel numbers:	16
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	Integral antenna
Antenna gain:	2.00dBi (Declared by manufacturer)
Power supply:	DC 7.2V
Labeling:	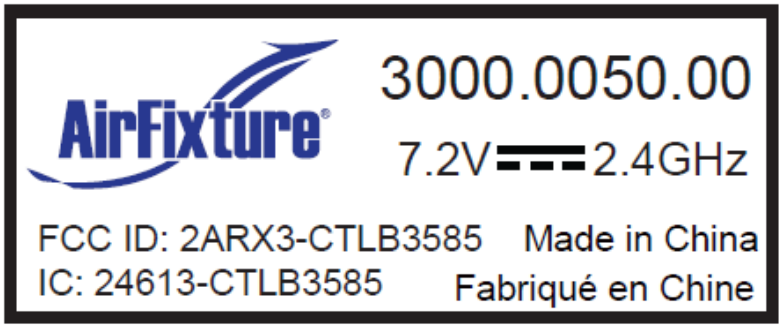

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405MHz	15	2425MHz	19	2445MHz	23	2465MHz
12	2410MHz	16	2430MHz	20	2450MHz	24	2470MHz
13	2415MHz	17	2435MHz	21	2455MHz	25	2475MHz
14	2420MHz	18	2440MHz	22	2460MHz	26	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2475MHz and 2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
MEILI	DC POWER SUPPLY	MCH-305A	011121168

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

● **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2.

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

● **CNAS (No. CNAS L5775)**

CNAS has accredited Global United Technology Services Co., Ltd., to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.
Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China
Tel: 0755-27798480
Fax: 0755-27798960

5.6 Additional instructions

Software (Used for test) from client

Test software Built-in by manufacturer, power set default

6 Test Instruments list

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019

Conducted Emission						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	June. 27 2018	June. 26 2019
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019

RF Conducted Test:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 27 2018	June. 26 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 27 2018	June. 26 2019
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 27 2018	June. 26 2019
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 27 2018	June. 26 2019
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 27 2018	June. 26 2019
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 27 2018	June. 26 2019
8	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 27 2018	June. 26 2019

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna:

The antenna is integral antenna, the best case gain of the antenna is 2.00dBi

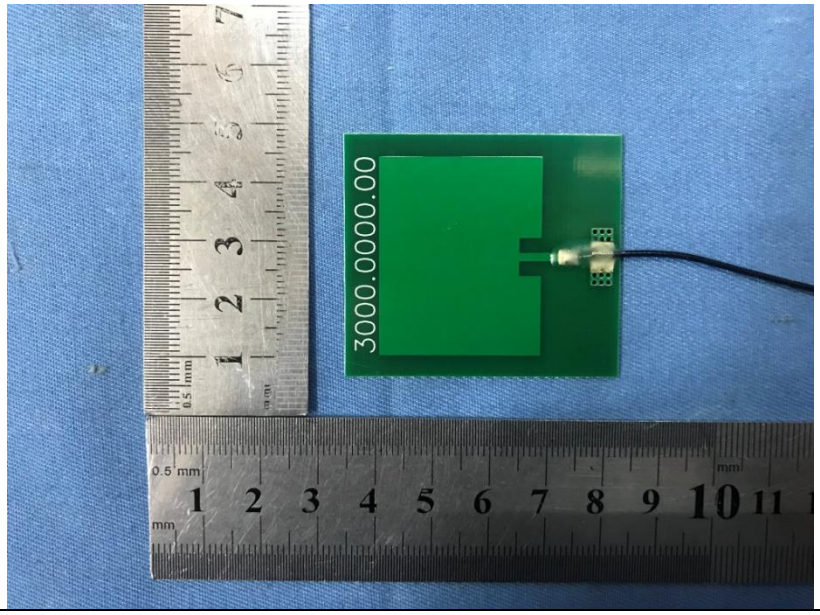

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test setup:

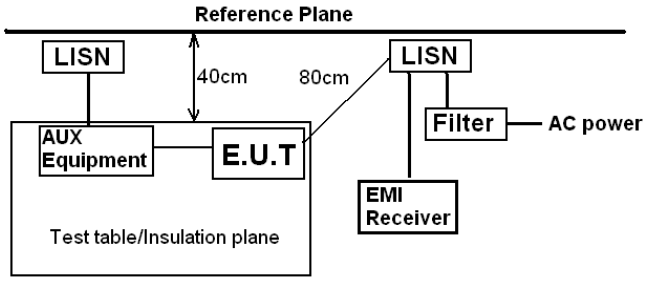

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

Test procedure:

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data

Line:

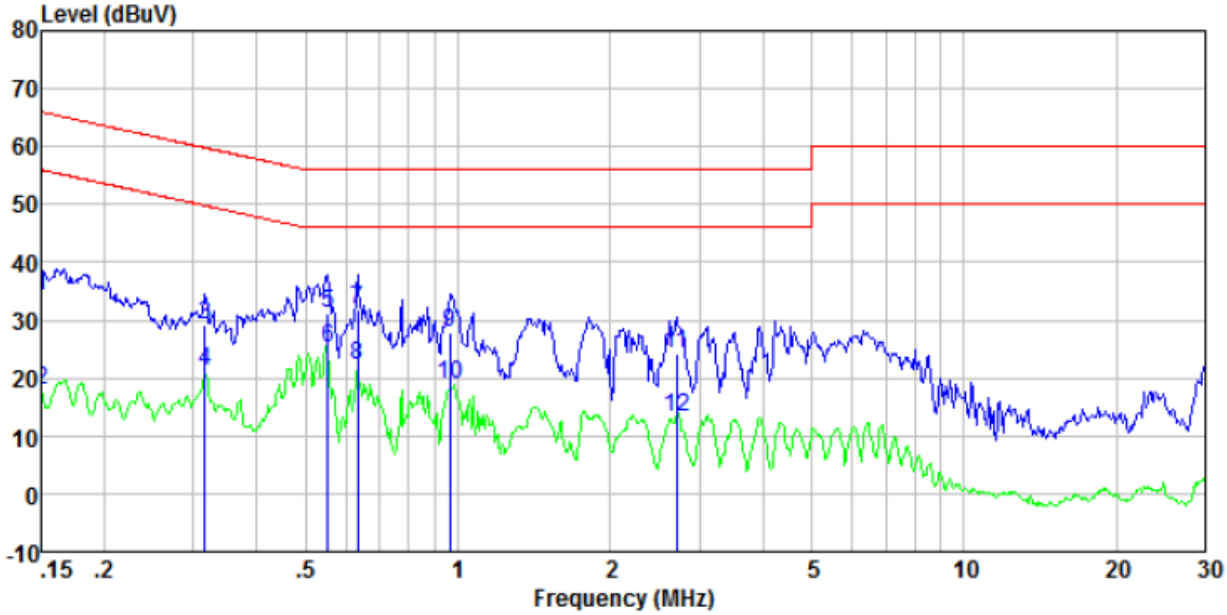

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	33.86	0.40	0.07	34.33	66.00	-31.67	QP
0.15	17.30	0.40	0.07	17.77	56.00	-38.23	Average
0.32	28.74	0.39	0.10	29.23	59.80	-30.57	QP
0.32	20.87	0.39	0.10	21.36	49.80	-28.44	Average
0.55	30.81	0.30	0.12	31.23	56.00	-24.77	QP
0.55	24.71	0.30	0.12	25.13	46.00	-20.87	Average
0.63	31.42	0.28	0.12	31.82	56.00	-24.18	QP
0.63	21.65	0.28	0.12	22.05	46.00	-23.95	Average
0.96	27.36	0.21	0.15	27.72	56.00	-28.28	QP
0.96	18.45	0.21	0.15	18.81	46.00	-27.19	Average
2.71	23.68	0.20	0.19	24.07	56.00	-31.93	QP
2.71	12.80	0.20	0.19	13.19	46.00	-32.81	Average

Neutral:

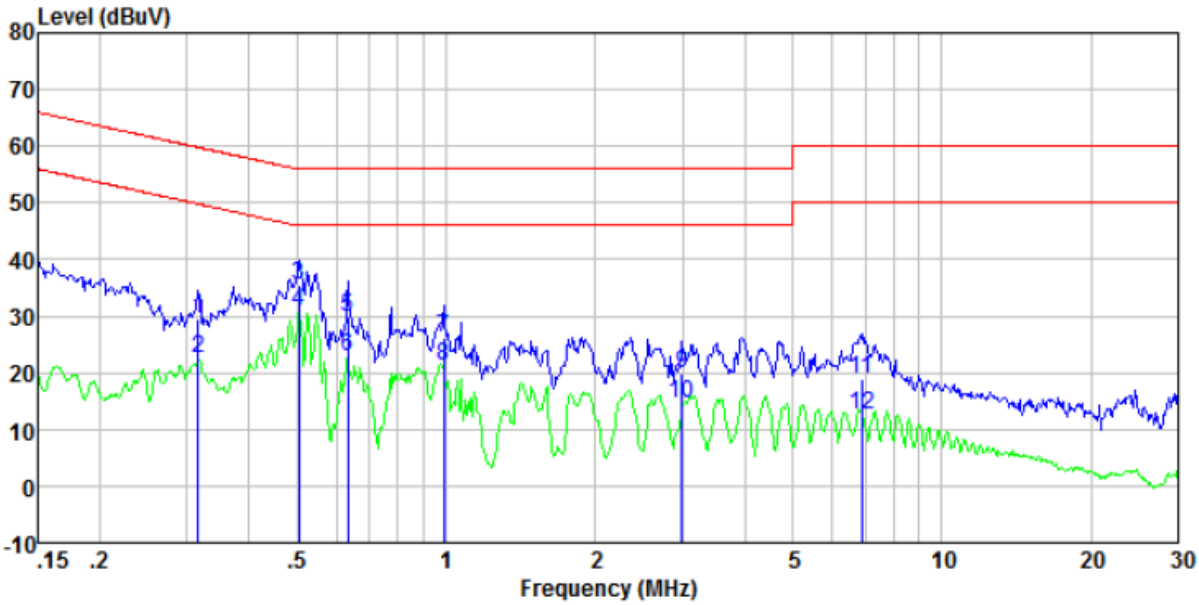

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	29.05	0.39	0.10	29.54	59.80	-30.26	QP
0.32	22.15	0.39	0.10	22.64	49.80	-27.16	Average
0.50	34.98	0.31	0.11	35.40	56.00	-20.60	QP
0.50	30.28	0.31	0.11	30.70	46.00	-15.30	Average
0.63	29.44	0.28	0.12	29.84	56.00	-26.16	QP
0.63	22.40	0.28	0.12	22.80	46.00	-23.20	Average
0.99	25.96	0.20	0.15	26.31	56.00	-29.69	QP
0.99	20.99	0.20	0.15	21.34	46.00	-24.66	Average
2.99	19.61	0.20	0.19	20.00	56.00	-36.00	QP
2.99	14.30	0.20	0.19	14.69	46.00	-31.31	Average
6.88	18.57	0.20	0.18	18.95	60.00	-41.05	QP
6.88	12.30	0.20	0.18	12.68	50.00	-37.32	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	30dBm
Test setup:	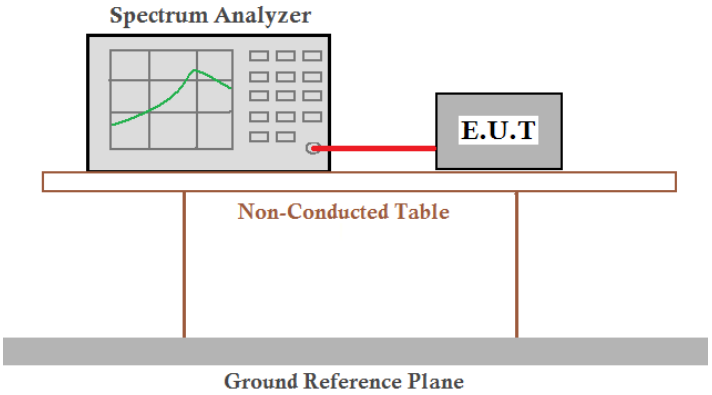
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	17.17	30	PASS
2440	17.81		
2475	16.97		
2480	-3.74		

Test plot as follows:

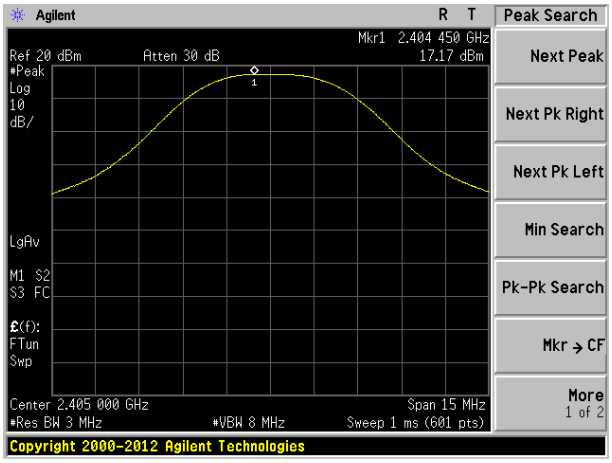

2405MHz

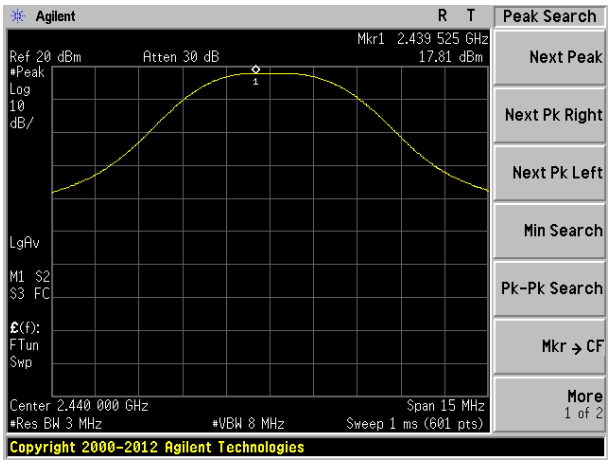

2440MHz

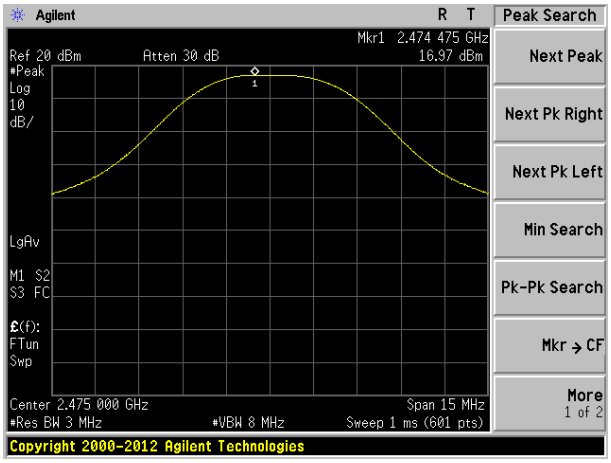

2475MHz

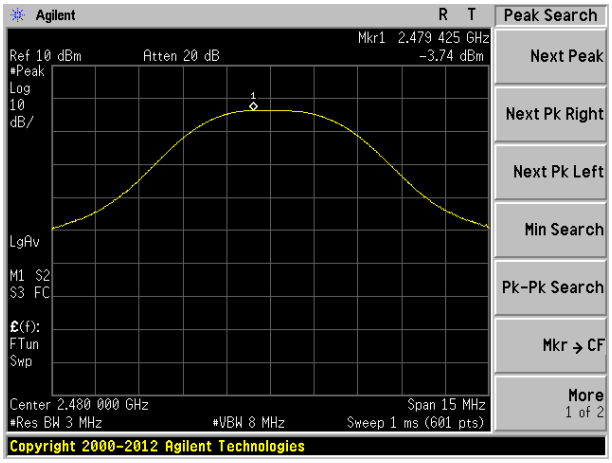

2480MHz

7.4 Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	>500KHz
Test setup:	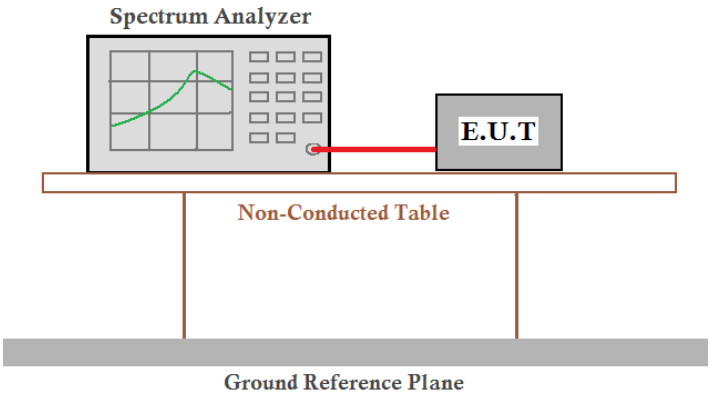
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.644	>500	Pass
2440	1.658		
2475	1.616		
2480	1.554		

Test plot as follows:

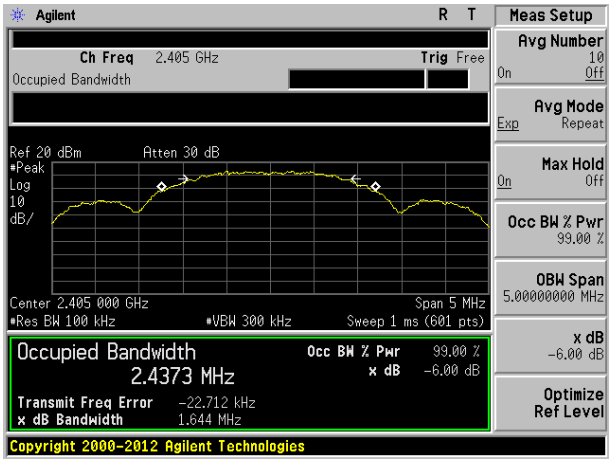

2405MHz

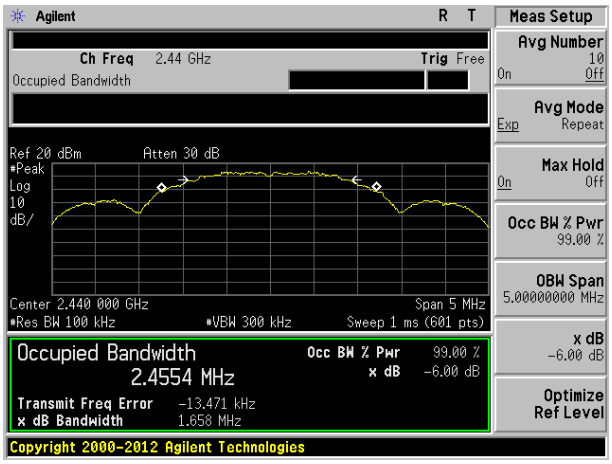

2440MHz

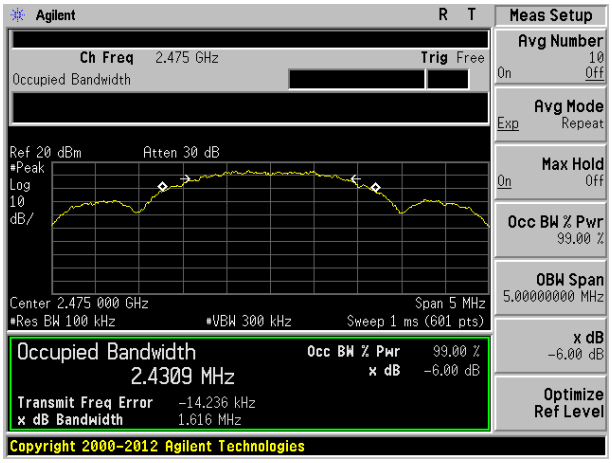

2475MHz

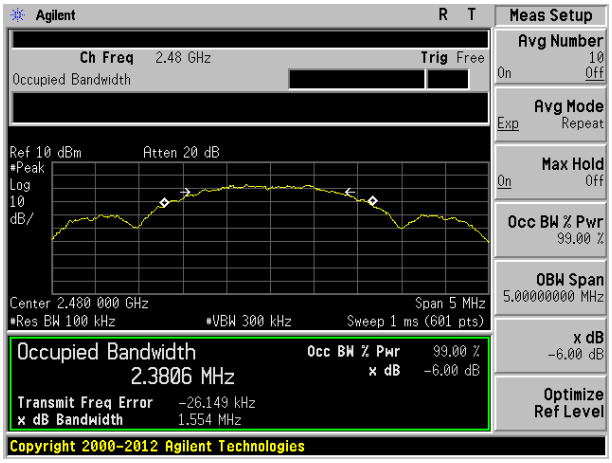

2480MHz

7.5 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	8dBm/3kHz
Test setup:	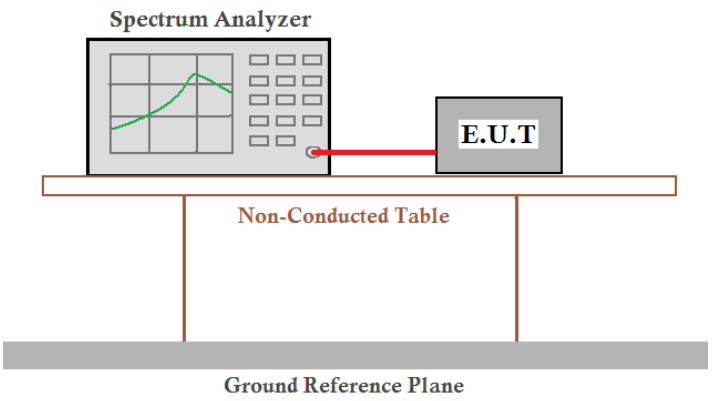
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	1.86	8.00	Pass
2440	3.05		
2475	1.82		
2480	-19.18		

Test plot as follows:

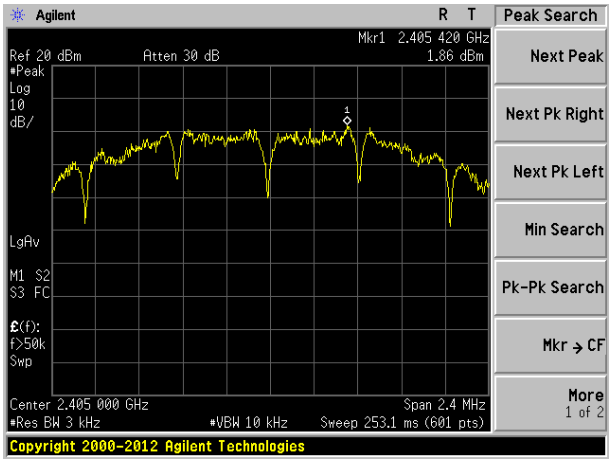

2405MHz

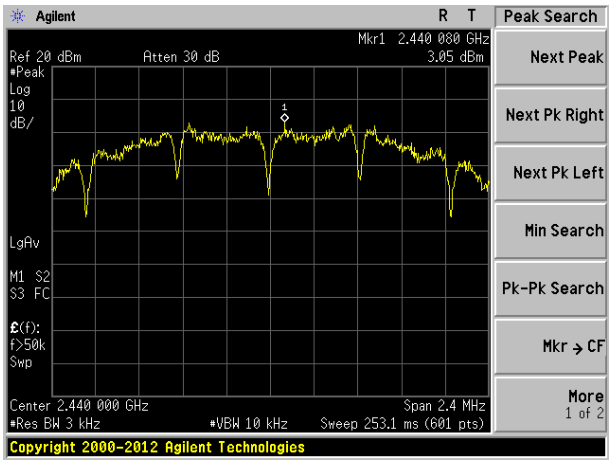

2440MHz

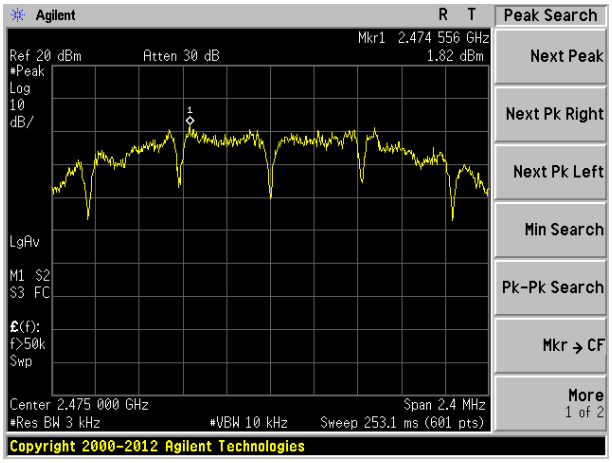

2475MHz

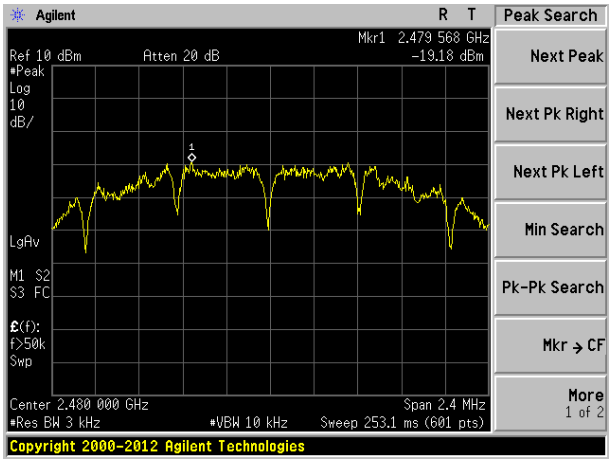

2480MHz

7.6 Band edges

7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	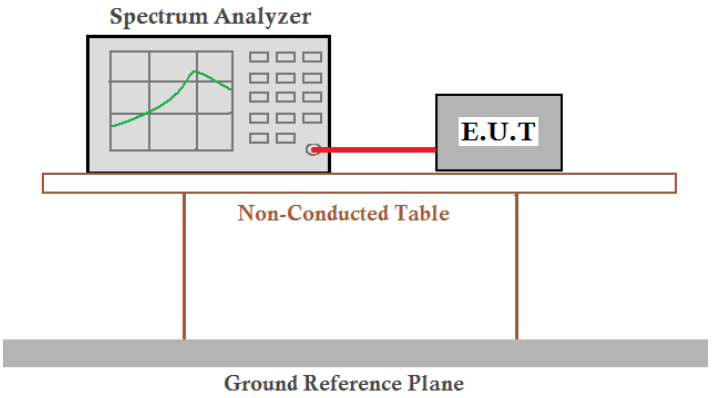
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

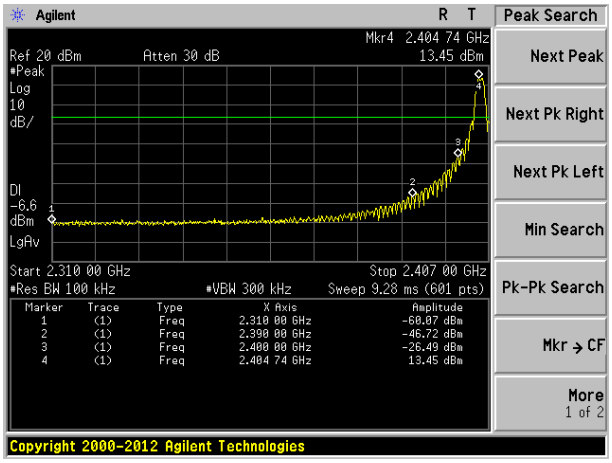

Lowest channel

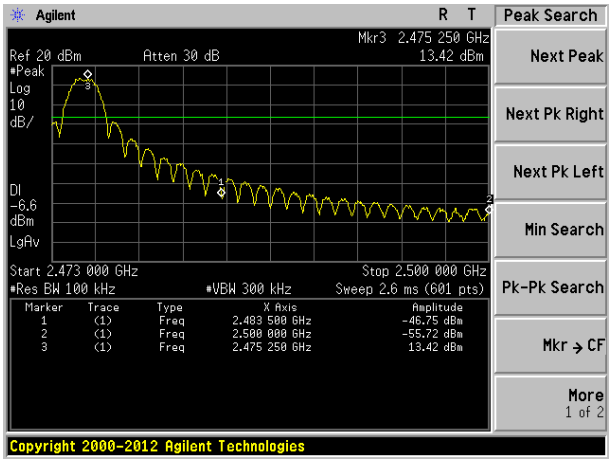

Highest channel(2475MHz)

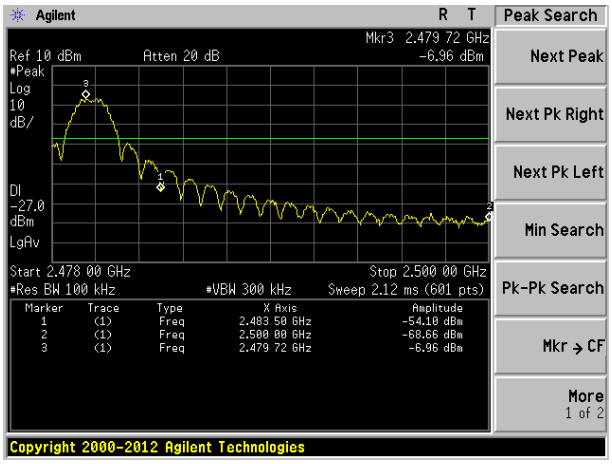

Highest channel(2480MHz)

7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205
Test Method:	ANSI C63.10:2013
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
Above 1GHz	Peak	1MHz	3MHz	Peak
	RMS	1MHz	3MHz	Average

Limit:

Frequency	Limit (dBuV/m @3m)	Value
Above 1GHz	54.00	Average
	74.00	Peak

Test setup:

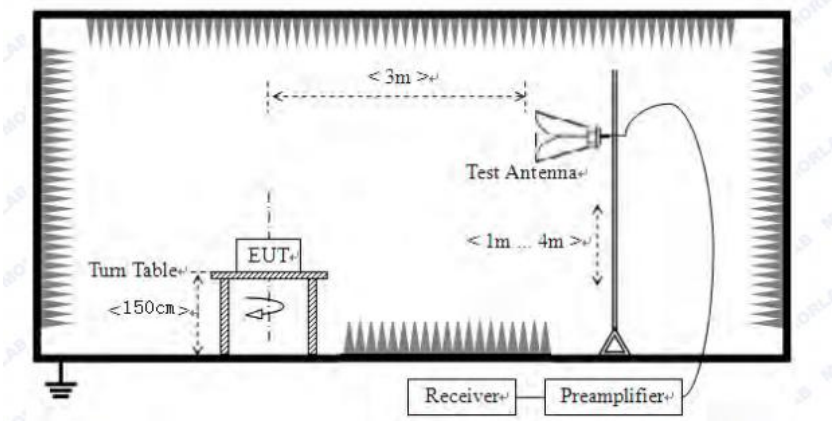

Test Procedure:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	2405MHz

Horizontal:

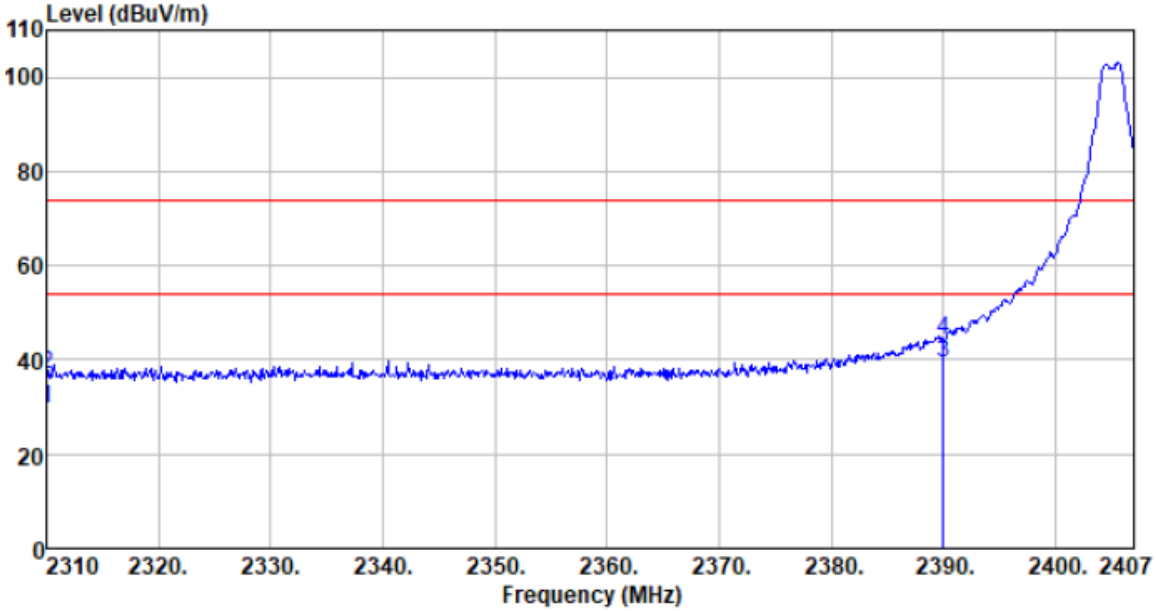

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	38.27	27.14	6.19	42.04	29.56	54.00	-24.44	Average
2310.000	45.73	27.14	6.19	42.04	37.02	74.00	-36.98	Peak
2390.025	47.63	27.37	6.31	42.11	39.20	54.00	-14.80	Average
2390.025	52.54	27.37	6.31	42.11	44.11	74.00	-29.89	Peak

Vertical:

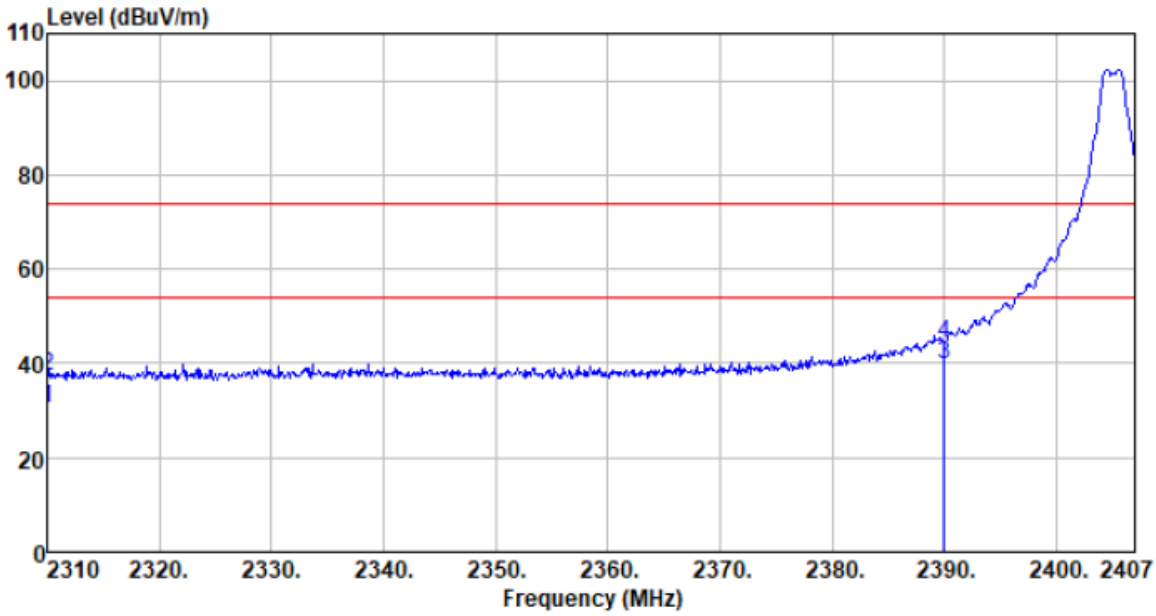

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	39.21	27.14	6.19	42.04	30.50	54.00	-23.50	Average
2310.000	46.16	27.14	6.19	42.04	37.45	74.00	-36.55	Peak
2390.025	48.11	27.37	6.31	42.11	39.68	54.00	-14.32	Average
2390.025	52.82	27.37	6.31	42.11	44.39	74.00	-29.61	Peak

Test channel:	2475MHz

Horizontal:

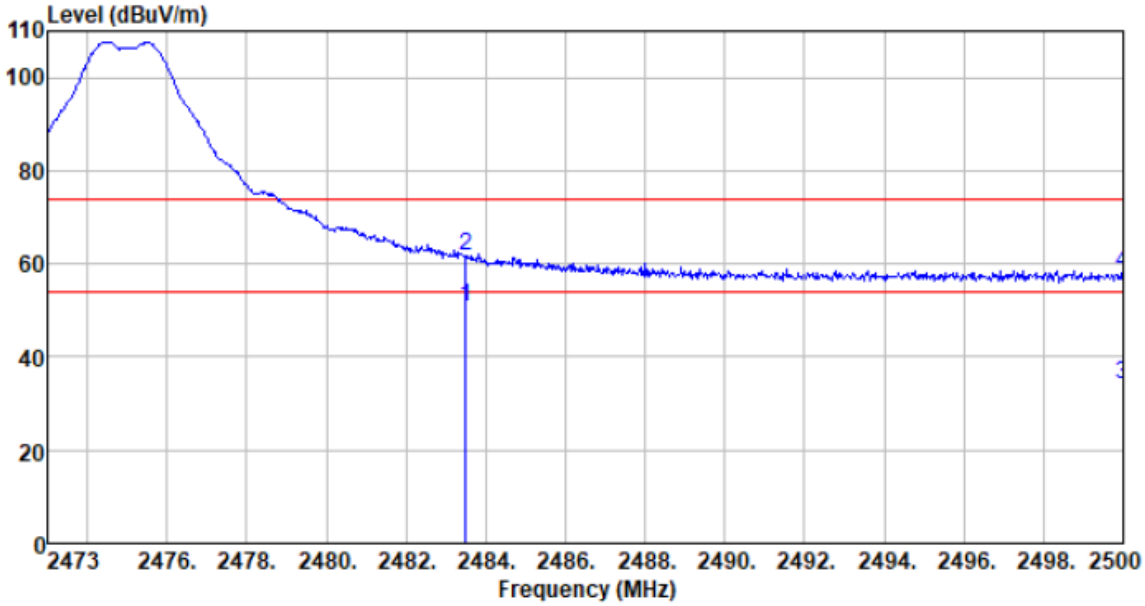

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2483.500	58.68	27.66	6.45	42.01	50.78	54.00	-3.22	Average
2483.500	69.50	27.66	6.45	42.01	61.60	74.00	-12.40	Peak
2500.000	41.93	27.70	6.47	42.00	34.10	54.00	-19.90	Average
2500.000	65.76	27.70	6.47	42.00	57.93	74.00	-16.07	Peak

Vertical:

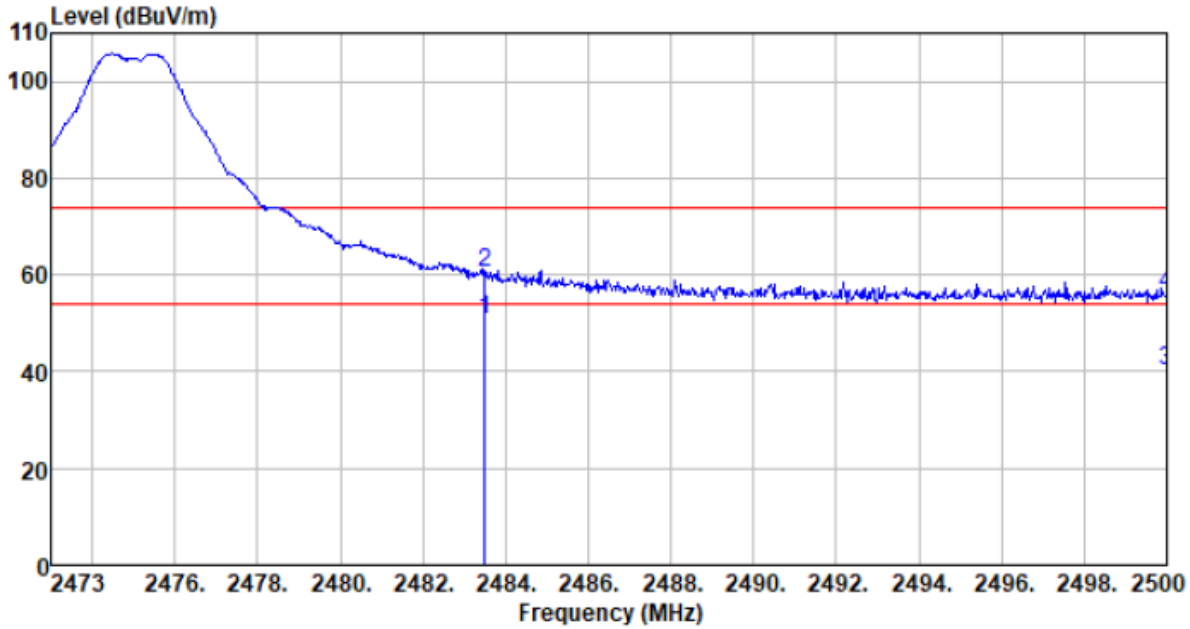

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2483.500	58.76	27.66	6.45	42.01	50.86	54.00	-3.14	Average
2483.500	68.36	27.66	6.45	42.01	60.46	74.00	-13.54	Peak
2500.000	48.19	27.70	6.47	42.00	40.36	54.00	-13.64	Average
2500.000	63.77	27.70	6.47	42.00	55.94	74.00	-18.06	Peak

Test channel:	2480MHz

Horizontal:

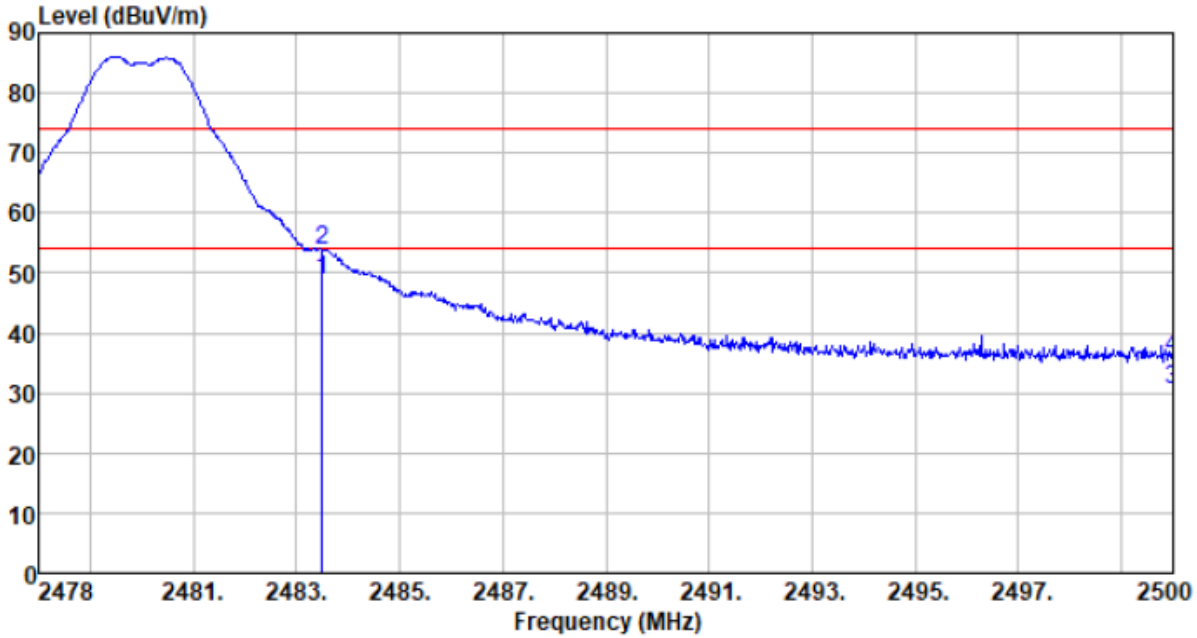

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2483.500	56.61	27.66	6.45	42.01	48.71	54.00	-5.29	Average
2483.500	61.66	27.66	6.45	42.01	53.76	74.00	-20.24	Peak
2500.000	38.41	27.70	6.47	42.00	30.58	54.00	-23.42	Average
2500.000	43.79	27.70	6.47	42.00	35.96	74.00	-38.04	Peak

Vertical:

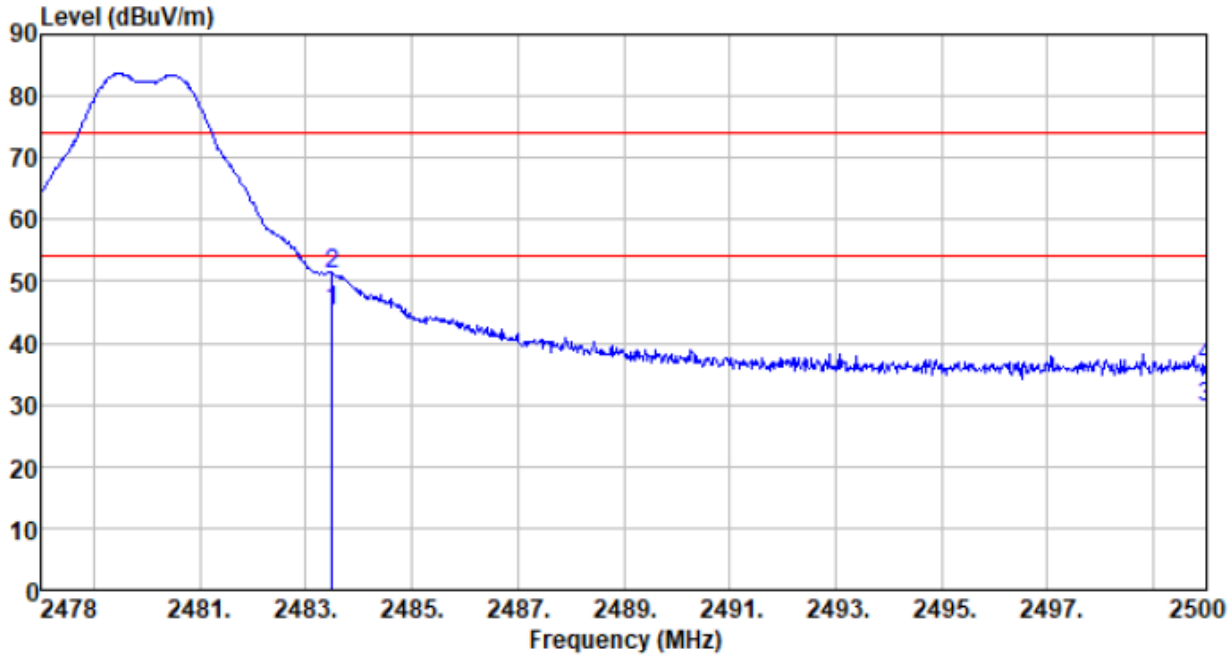

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2483.500	53.22	27.66	6.45	42.01	45.32	54.00	-8.68	Average
2483.500	59.15	27.66	6.45	42.01	51.25	74.00	-22.75	Peak
2500.000	37.45	27.70	6.47	42.00	29.62	54.00	-24.38	Average
2500.000	44.01	27.70	6.47	42.00	36.18	74.00	-37.82	Peak

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.7 Spurious Emission

7.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	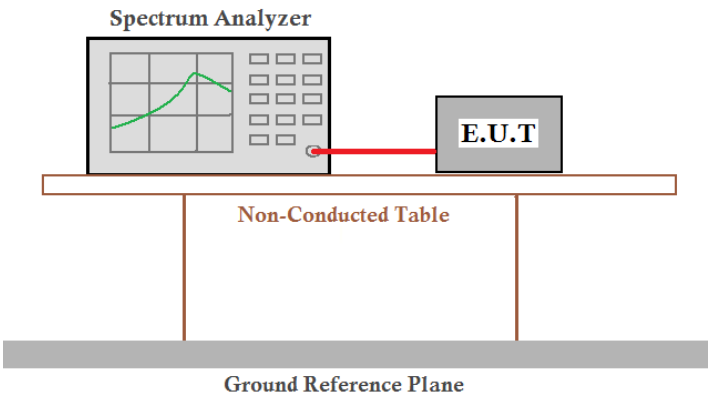
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

Lowest channel

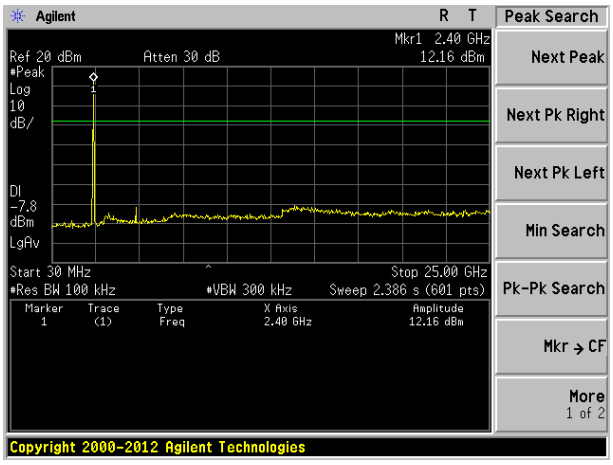

30MHz~25GHz

Middle channel

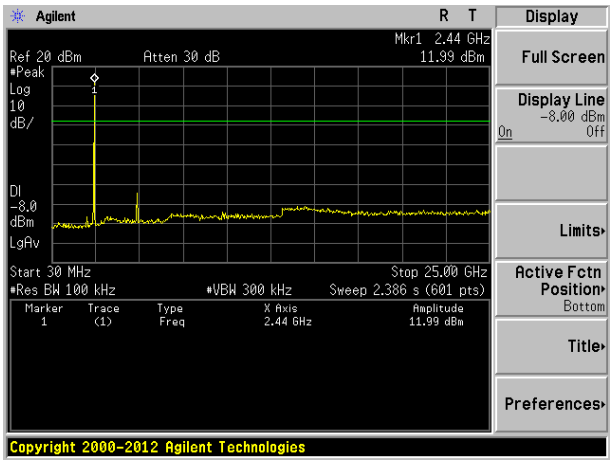

30MHz~25GHz

Highest channel (2475MHz)

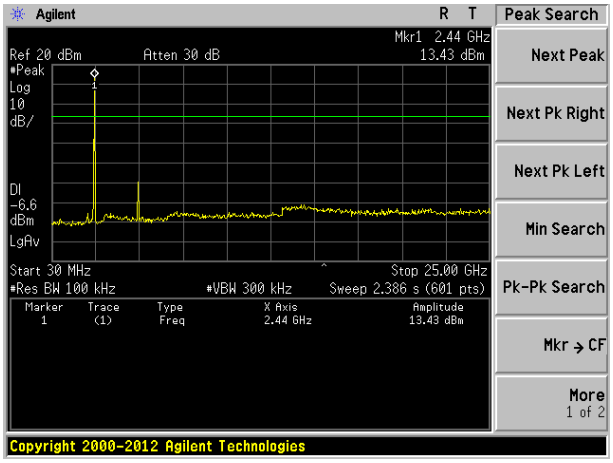

30MHz~25GHz

Highest channel (2480MHz)

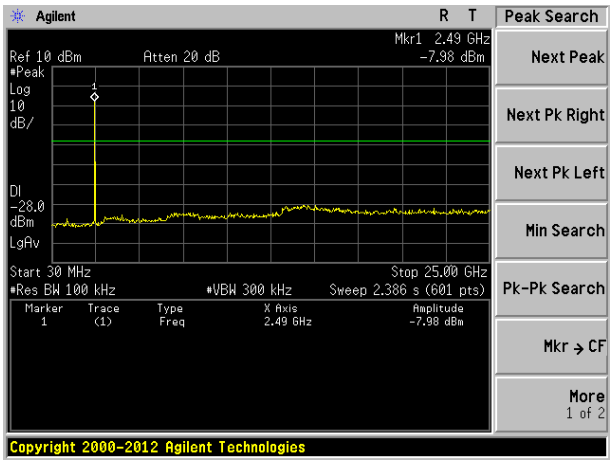

30MHz~25GHz

7.7.2 Radiated Emission Method

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.209</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10:2013</td></tr>
<tr><td>Test Frequency Range:</td><td>9kHz to 25GHz</td></tr>
<tr><td>Test site:</td><td>Measurement Distance: 3m</td></tr>
<tr><td>Receiver setup:</td><td>
<table>
<tr><th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Value</th></tr>
<tr><td>9KHz-150KHz</td><td>PK/AV/QP</td><td>200Hz</td><td>600Hz</td><td>PK/AV/QP</td></tr>
<tr><td>150KHz-30MHz</td><td>PK/AV/QP</td><td>9KHz</td><td>30KHz</td><td>PK/AV/QP</td></tr>
<tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak</td></tr>
<tr><td>RMS</td><td>1MHz</td><td>3MHz</td><td>Average</td></tr>
</table>
</td></tr>
<tr><td>Limit:
(Spurious Emissions)</td><td>
<table>
<tr><th>Frequency</th><th>Limit (uV/m)</th><th>Value</th><th>Measurement Distance</th></tr>
<tr><td>0.009MHz-0.490MHz</td><td>2400/F(KHz)</td><td>PK/AV/QP</td><td>300m</td></tr>
<tr><td>0.490MHz-1.705MHz</td><td>24000/F(KHz)</td><td>QP</td><td>30m</td></tr>
<tr><td>1.705MHz-30MHz</td><td>30</td><td>QP</td><td>30m</td></tr>
<tr><td>30MHz-88MHz</td><td>100</td><td>QP</td><td rowspan="6">3m</td></tr>
<tr><td>88MHz-216MHz</td><td>150</td><td>QP</td></tr>
<tr><td>216MHz-960MHz</td><td>200</td><td>QP</td></tr>
<tr><td>960MHz-1GHz</td><td>500</td><td>QP</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>500</td><td>Average</td></tr>
<tr><td>5000</td><td>Peak</td></tr>
</table>
</td></tr>
<tr><td>Limit:
(band edge)</td><td>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.</td></tr>
</table>

Test setup:	Below 30MHz 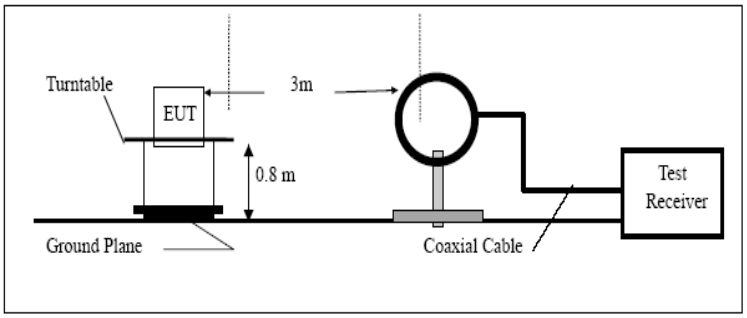 Below 1GHz 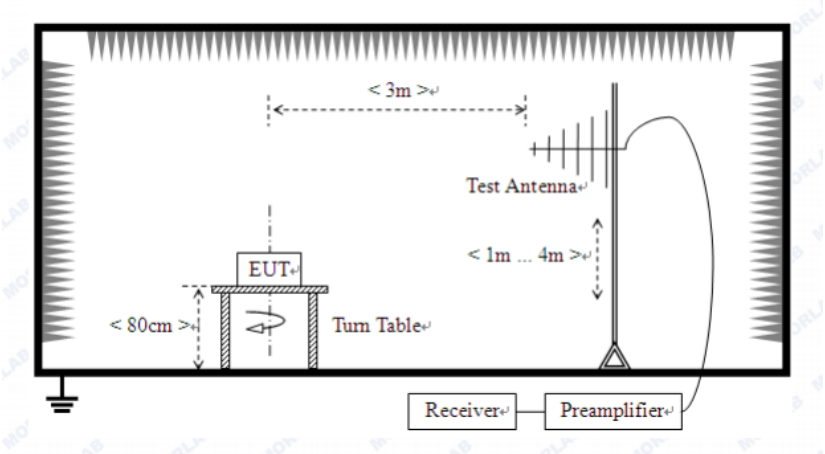 Above 1GHz 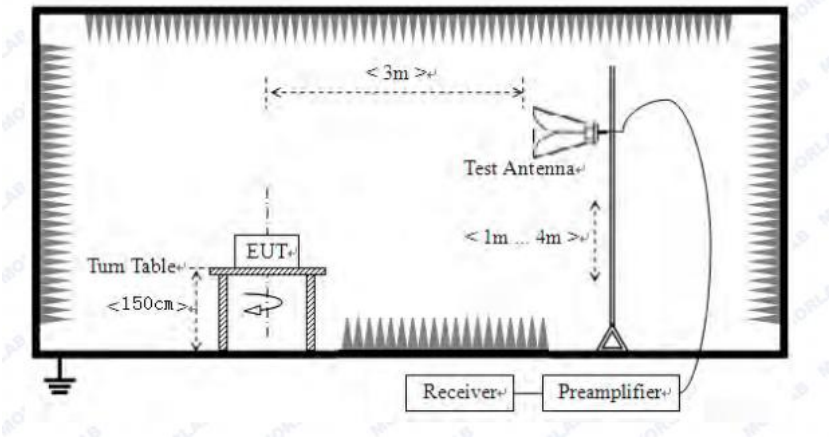
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving

	antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:

- Below 30MHz

  The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.
- No emission found for above 18GHz

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ **Below 1GHz**

Horizontal:

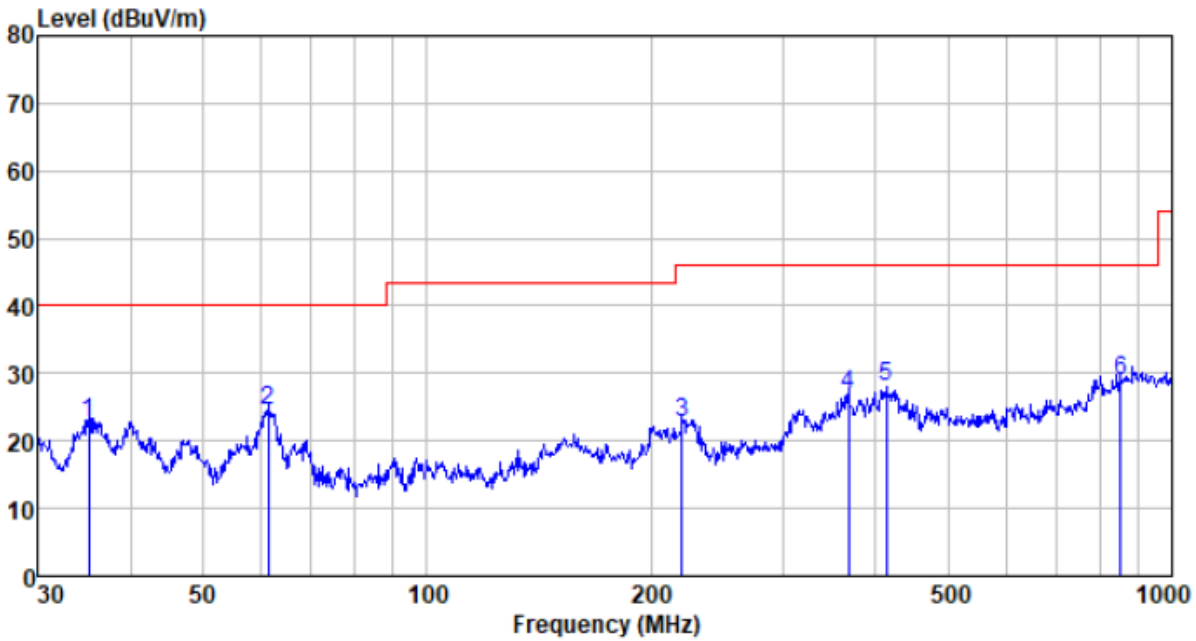

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
35.128	41.43	11.33	0.14	30.14	22.76	40.00	-17.24	QP
61.132	42.80	10.84	0.71	29.97	24.38	40.00	-15.62	QP
219.845	39.97	11.13	1.30	29.69	22.71	46.00	-23.29	QP
368.112	39.98	14.81	1.71	29.74	26.76	46.00	-19.24	QP
413.271	40.05	15.63	1.83	29.49	28.02	46.00	-17.98	QP
854.025	33.36	21.88	2.93	29.31	28.86	46.00	-17.14	QP

Vertical:

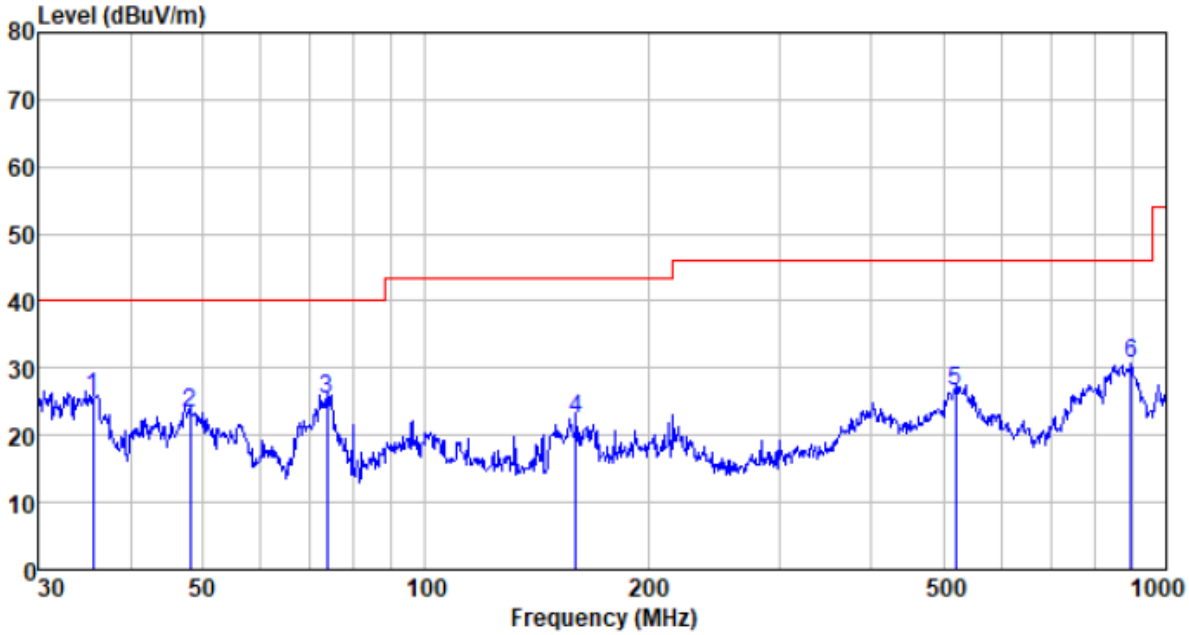

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
35.624	44.23	11.42	0.14	30.13	25.66	40.00	-14.34	QP
48.163	40.65	12.28	0.51	30.01	23.43	40.00	-16.57	QP
73.617	47.08	7.46	0.67	29.94	25.27	40.00	-14.73	QP
159.784	42.54	8.30	1.12	29.63	22.33	43.50	-21.17	QP
519.065	36.05	17.74	2.18	29.42	26.55	46.00	-19.45	QP
896.997	34.85	22.27	3.00	29.39	30.73	46.00	-15.27	QP

■ **Above 1GHz**

Test channel:	Lowest

Horizontal:

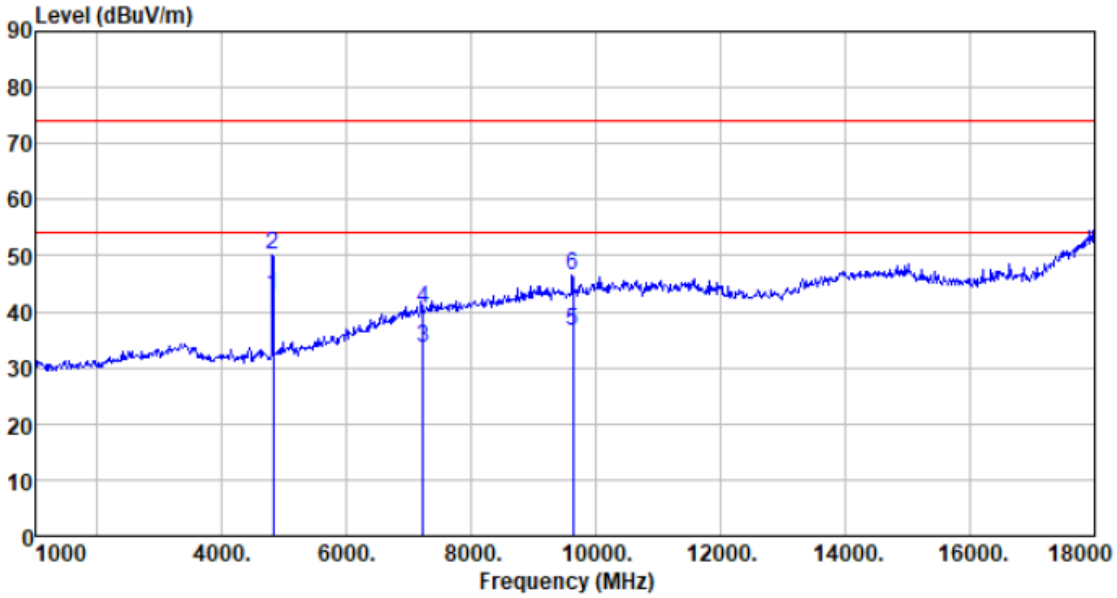

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4810.000	44.49	31.36	4.61	37.58	42.88	54.00	-11.12	Average
4810.000	51.69	31.36	4.61	37.58	50.08	74.00	-23.92	Peak
7215.000	26.58	35.92	6.50	35.45	33.55	54.00	-20.45	Average
7215.000	33.61	35.92	6.50	35.45	40.58	74.00	-33.42	Peak
9620.000	25.86	37.76	7.98	34.97	36.63	54.00	-17.37	Average
9620.000	35.73	37.76	7.98	34.97	46.50	74.00	-27.50	Peak

Vertical:

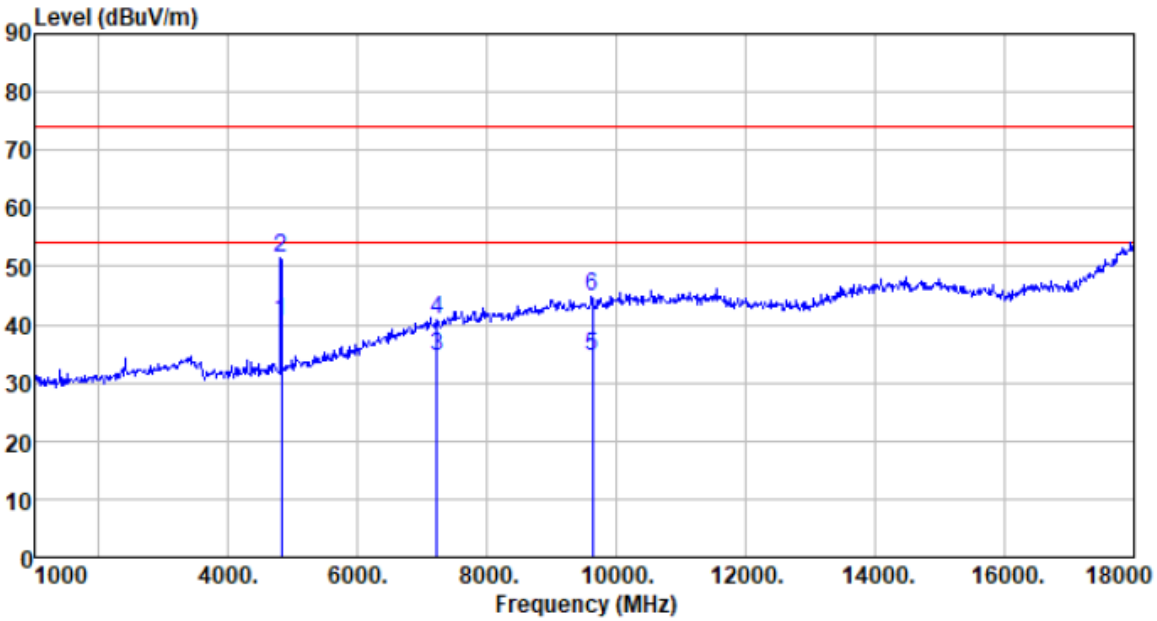

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4810.000	42.18	31.36	4.61	37.58	40.57	54.00	-13.43	Average
4810.000	53.14	31.36	4.61	37.58	51.53	74.00	-22.47	Peak
7215.000	27.62	35.92	6.50	35.45	34.59	54.00	-19.41	Average
7215.000	33.79	35.92	6.50	35.45	40.76	74.00	-33.24	Peak
9620.000	23.93	37.76	7.98	34.97	34.70	54.00	-19.30	Average
9620.000	34.00	37.76	7.98	34.97	44.77	74.00	-29.23	Peak

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle

Horizontal:

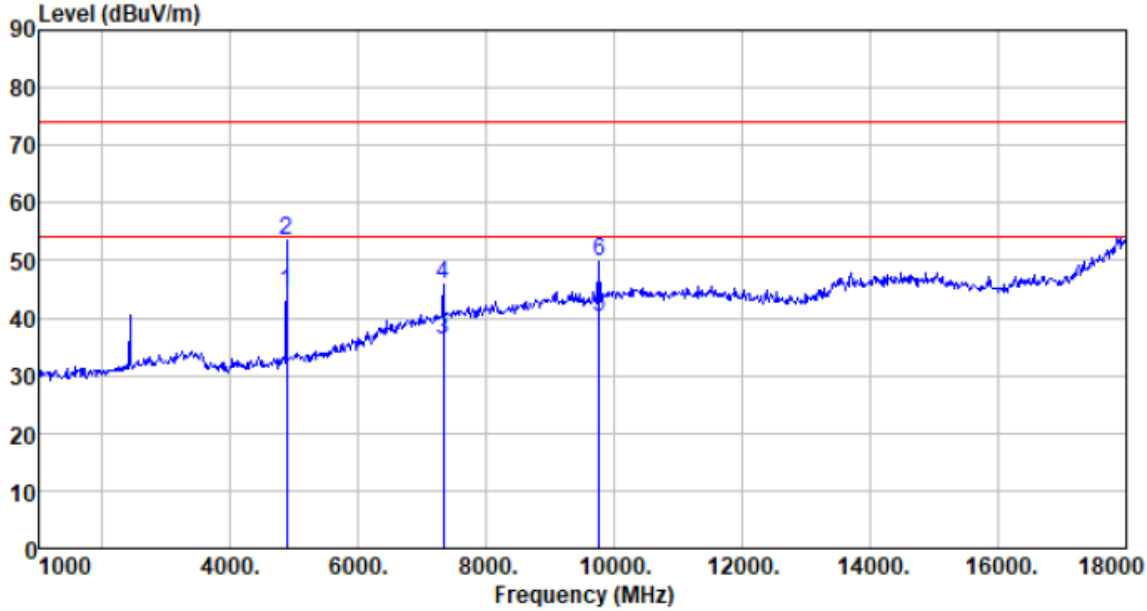

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4880.000	46.07	31.48	4.69	37.59	44.65	54.00	-9.35	Average
4880.000	54.82	31.48	4.69	37.59	53.40	74.00	-20.60	Peak
7320.000	28.72	36.17	6.63	35.47	36.05	54.00	-17.95	Average
7320.000	38.64	36.17	6.63	35.47	45.97	74.00	-28.03	Peak
9760.000	29.13	38.07	8.03	35.09	40.14	54.00	-13.86	Average
9760.000	38.93	38.07	8.03	35.09	49.94	74.00	-24.06	Peak

Vertical:

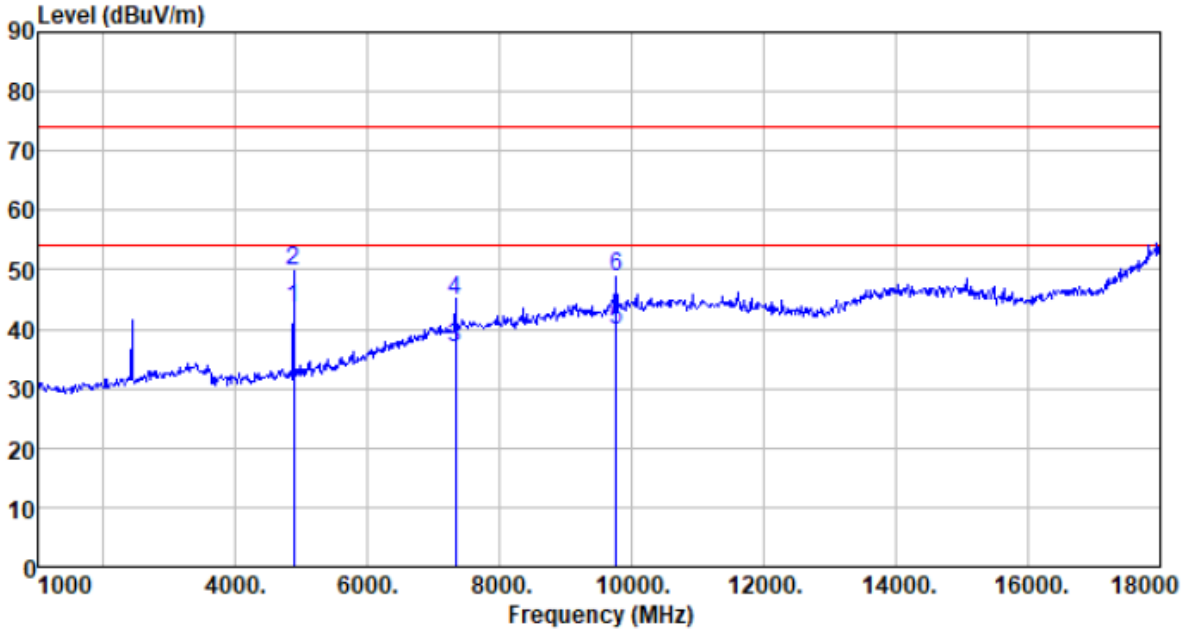

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4880.000	44.81	31.48	4.69	37.59	43.39	54.00	-10.61	Average
4880.000	51.40	31.48	4.69	37.59	49.98	74.00	-24.02	Peak
7320.000	29.50	36.17	6.63	35.47	36.83	54.00	-17.17	Average
7320.000	37.66	36.17	6.63	35.47	44.99	74.00	-29.01	Peak
9760.000	28.86	38.07	8.03	35.09	39.87	54.00	-14.13	Average
9760.000	37.76	38.07	8.03	35.09	48.77	74.00	-25.23	Peak

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest(2475MHz)

Horizontal:

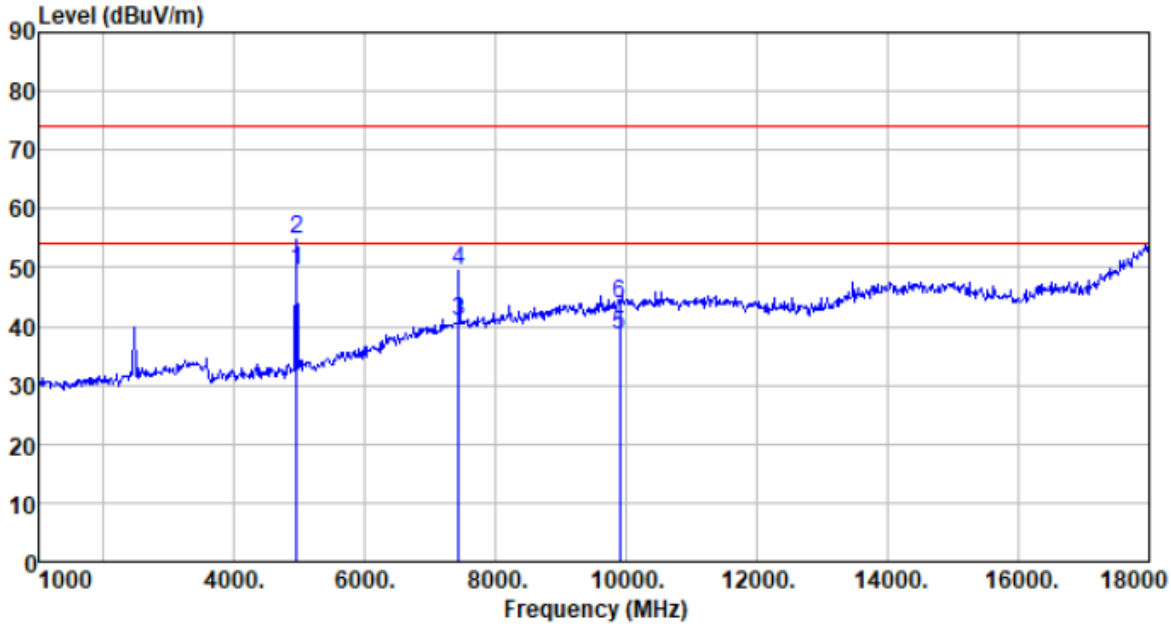

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4950.000	50.70	31.61	4.77	37.60	49.48	54.00	-4.52	Average
4950.000	56.13	31.61	4.77	37.60	54.91	74.00	-19.09	Peak
7425.000	33.04	36.42	6.75	35.49	40.72	54.00	-13.28	Average
7425.000	41.65	36.42	6.75	35.49	49.33	74.00	-24.67	Peak
9900.000	27.15	38.38	8.09	35.21	38.41	54.00	-15.59	Average
9900.000	32.55	38.38	8.09	35.21	43.81	74.00	-30.19	Peak

Vertical:

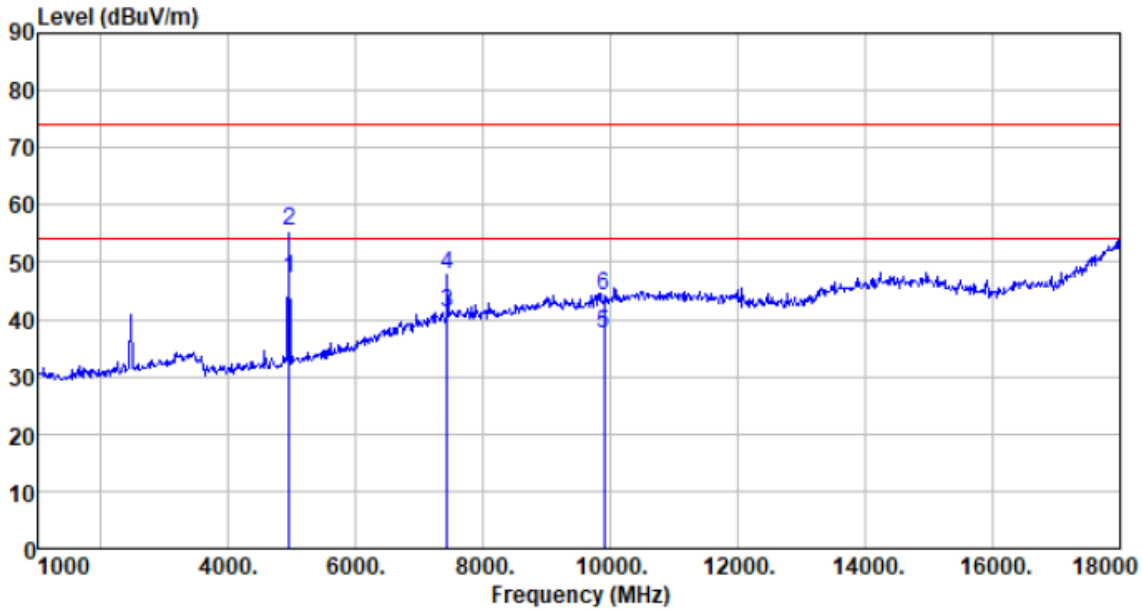

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4950.000	48.50	31.61	4.77	37.60	47.28	54.00	-6.72	Average
4950.000	56.83	31.61	4.77	37.60	55.61	74.00	-18.39	Peak
7425.000	33.49	36.42	6.75	35.49	41.17	54.00	-12.83	Average
7425.000	40.20	36.42	6.75	35.49	47.88	74.00	-26.12	Peak
9900.000	26.28	38.38	8.09	35.21	37.54	54.00	-16.46	Average
9900.000	32.82	38.38	8.09	35.21	44.08	74.00	-29.92	Peak

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest(2480MHz)

Horizontal:

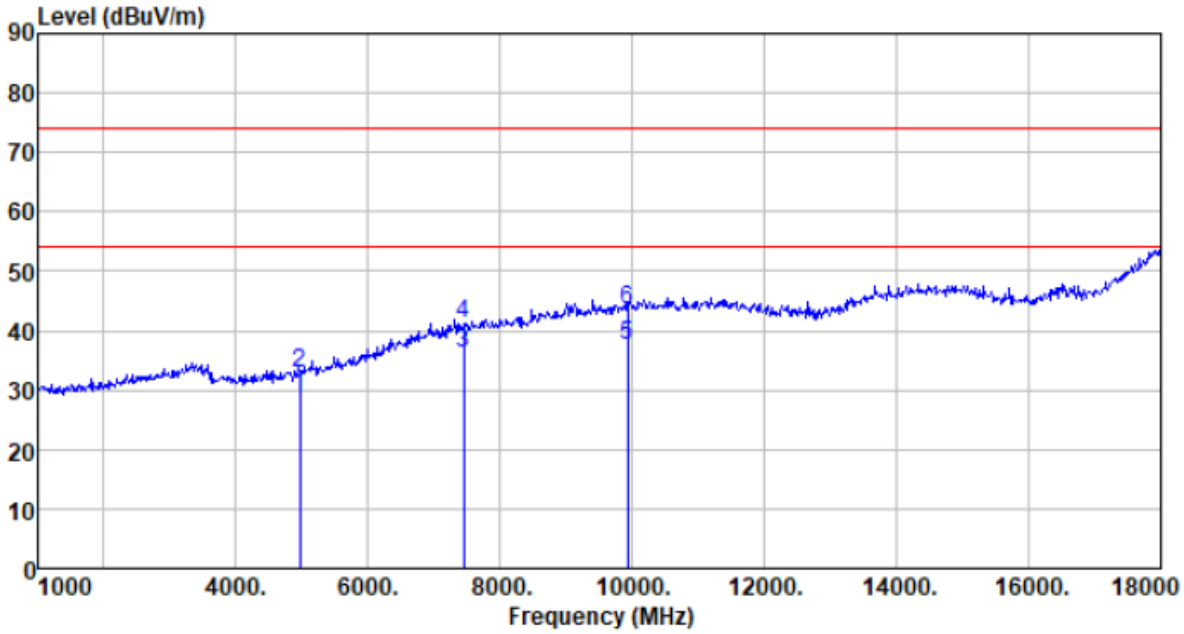

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4960.000	30.21	31.63	4.79	37.60	29.03	54.00	-24.97	Average
4960.000	34.02	31.63	4.79	37.60	32.84	74.00	-41.16	Peak
7440.000	28.55	36.46	6.77	35.49	36.29	54.00	-17.71	Average
7440.000	33.42	36.46	6.77	35.49	41.16	74.00	-32.84	Peak
9920.000	26.18	38.42	8.09	35.23	37.46	54.00	-16.54	Average
9920.000	32.31	38.42	8.09	35.23	43.59	74.00	-30.41	Peak

Vertical::

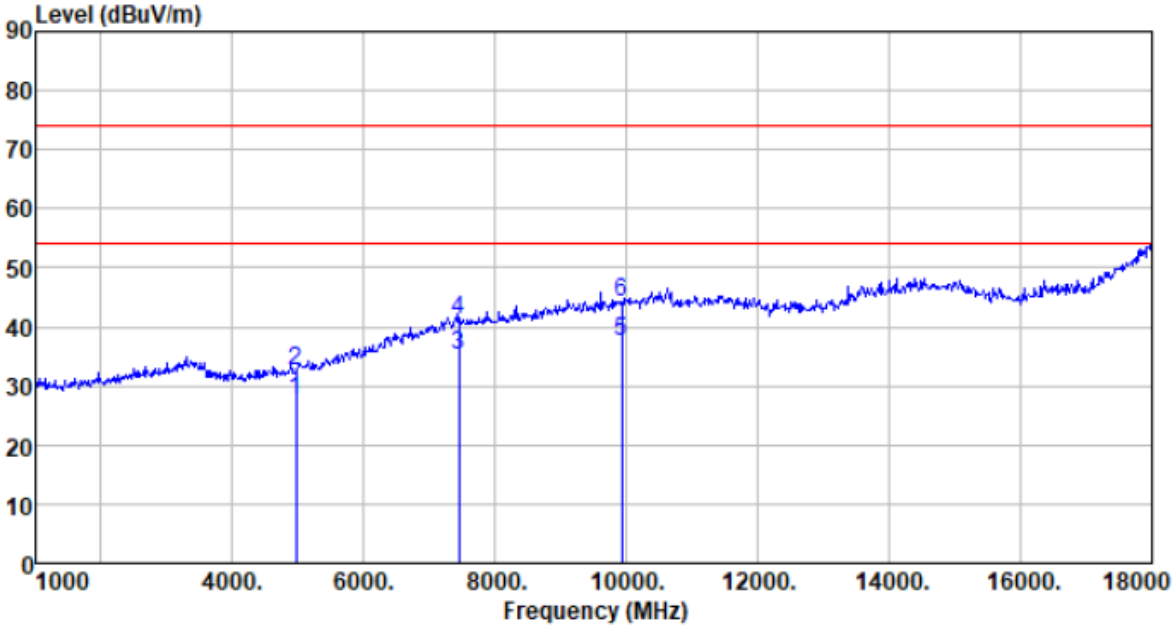

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4960.000	28.68	31.63	4.79	37.60	27.50	54.00	-26.50	Average
4960.000	33.77	31.63	4.79	37.60	32.59	74.00	-41.41	Peak
7440.000	27.58	36.46	6.77	35.49	35.32	54.00	-18.68	Average
7440.000	33.40	36.46	6.77	35.49	41.14	74.00	-32.86	Peak
9920.000	26.28	38.42	8.09	35.23	37.56	54.00	-16.44	Average
9920.000	32.96	38.42	8.09	35.23	44.24	74.00	-29.76	Peak

Remark:

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

------End------