


Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
9 kHz - 150 kHz	14.1 Hz	PK+	300 Hz	Coupled	0 dB
150 kHz - 30 MHz	932.812 Hz	PK+	10 kHz	Coupled	0 dB
30 MHz - 1 GHz	30.312 kHz	PK+	100 kHz	Coupled	0 dB
1 GHz - 2 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
2 GHz - 3 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
3 GHz - 4 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
4 GHz - 5 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
5 GHz - 6 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
6 GHz - 7 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
7 GHz - 8 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
8 GHz - 9 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB
9 GHz - 10 GHz	31.25 kHz	PK+	100 kHz	Coupled	0 dB


LTE Cat-NB1 Band 8: Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=11. MSC/TBS=3.

Low Channel:

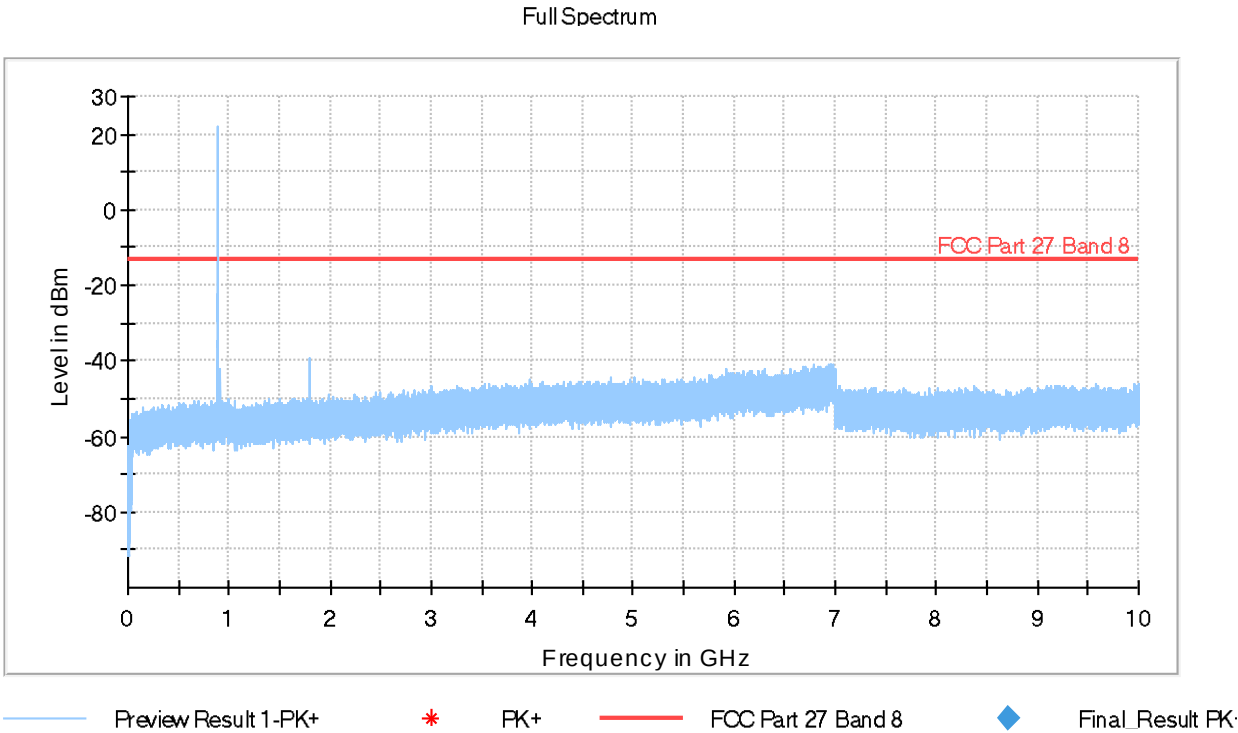

The peak above the limit is the carrier frequency.


High Channel:

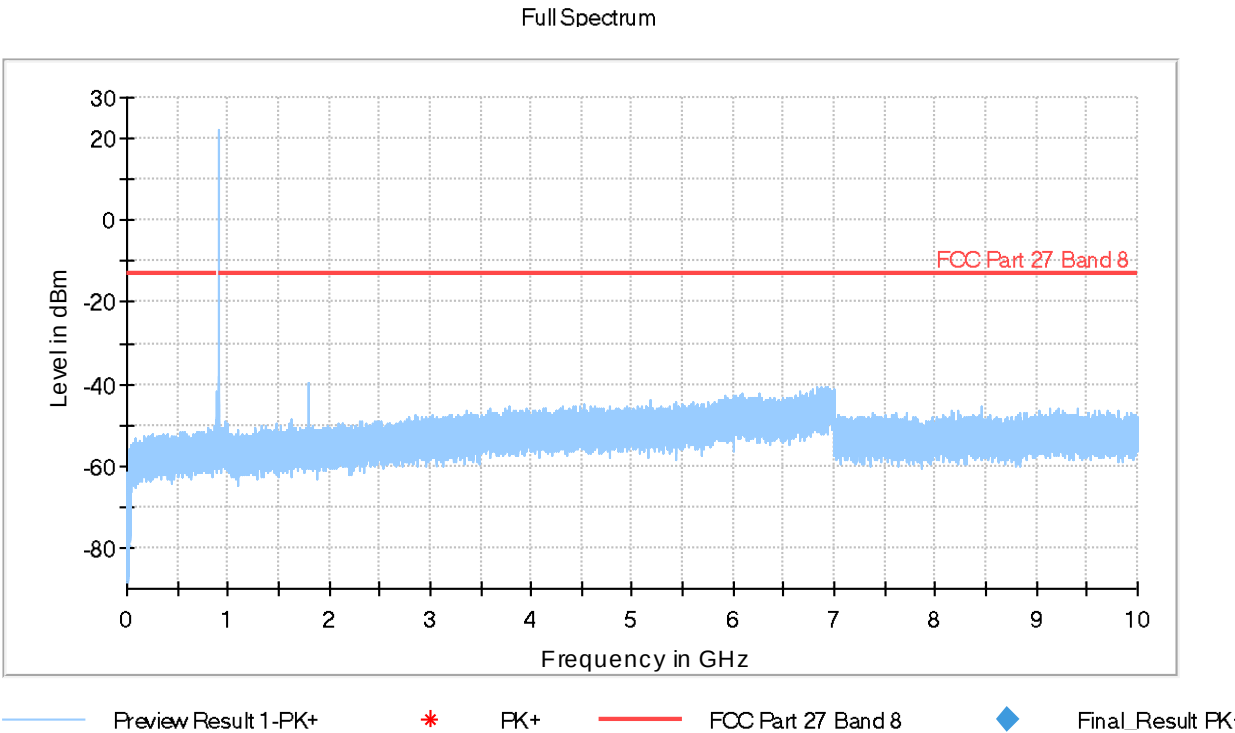



The peak above the limit is the carrier frequency.

LTE Cat-NB1 Band 13: Pi/4-QPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3.

Low Channel:

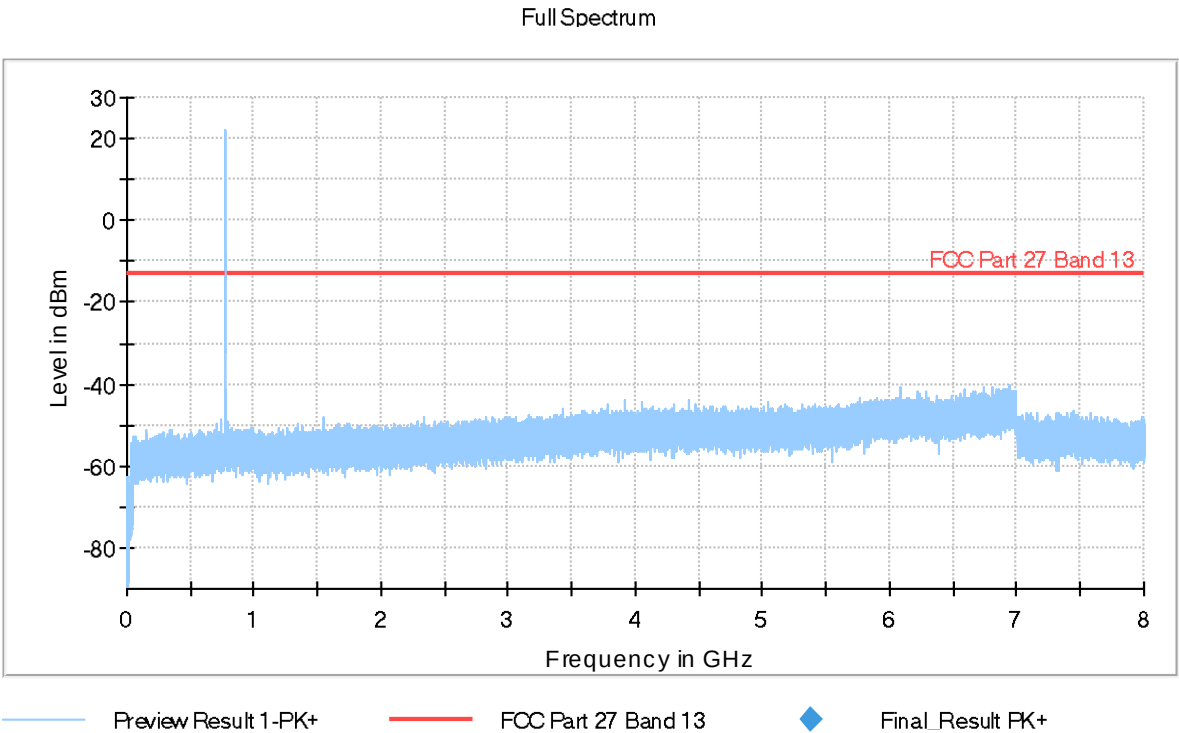


The peak above the limit is the carrier frequency.

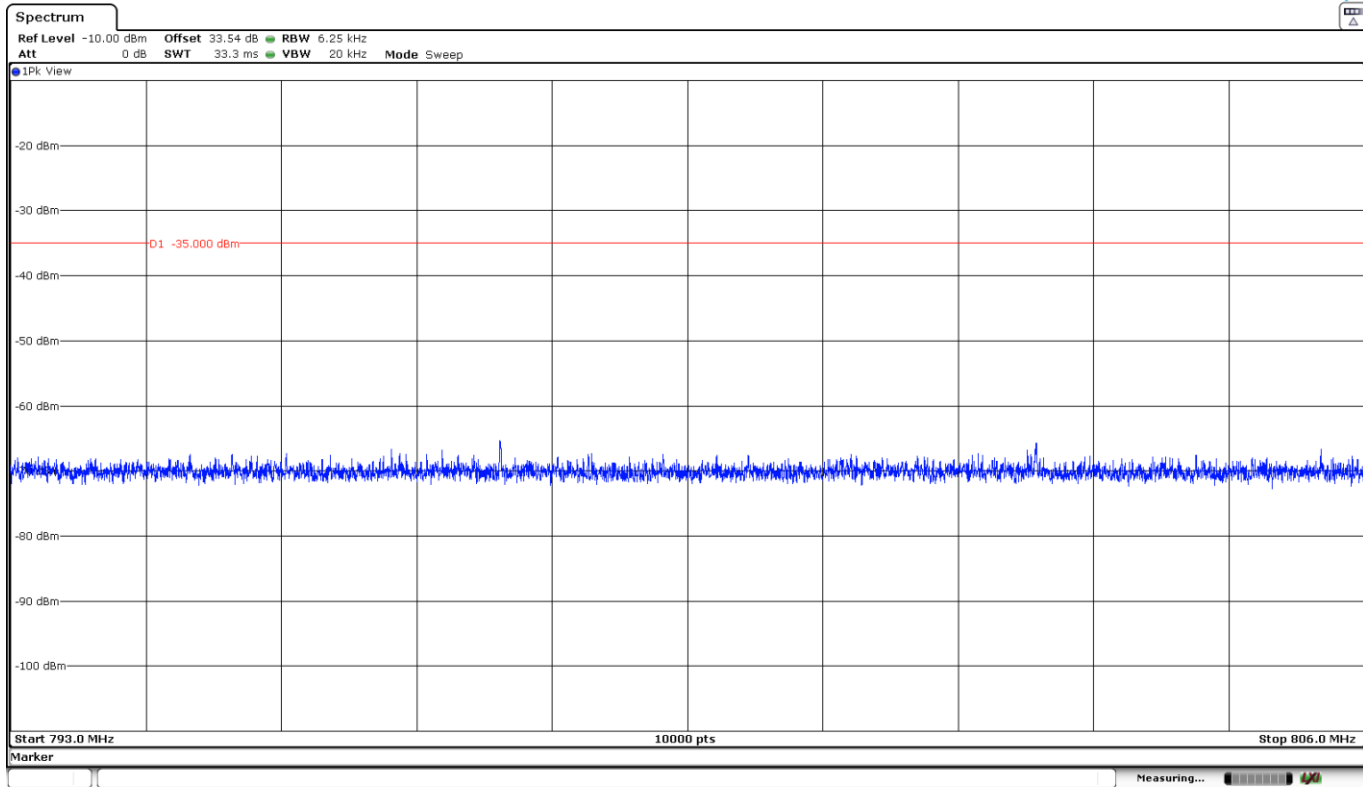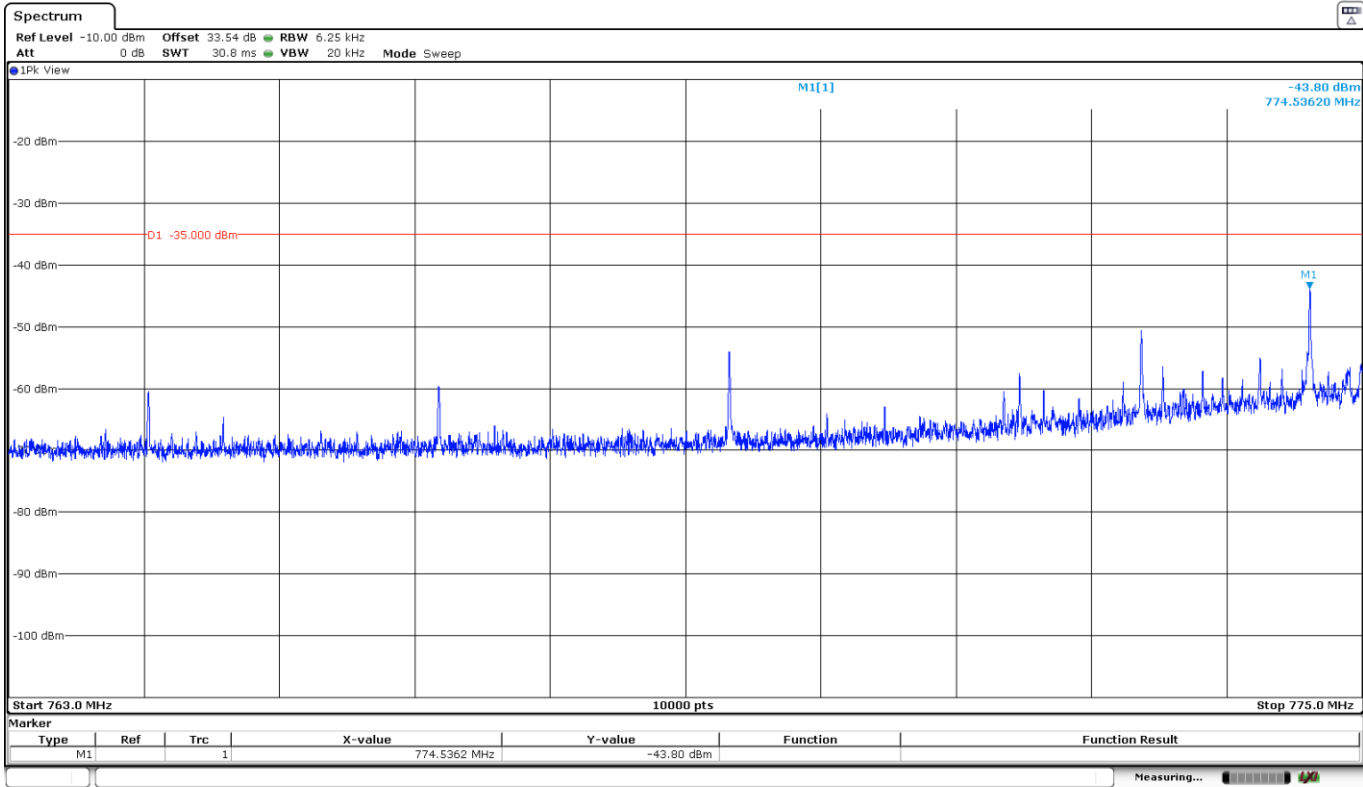



High Channel:

Full Spectrum

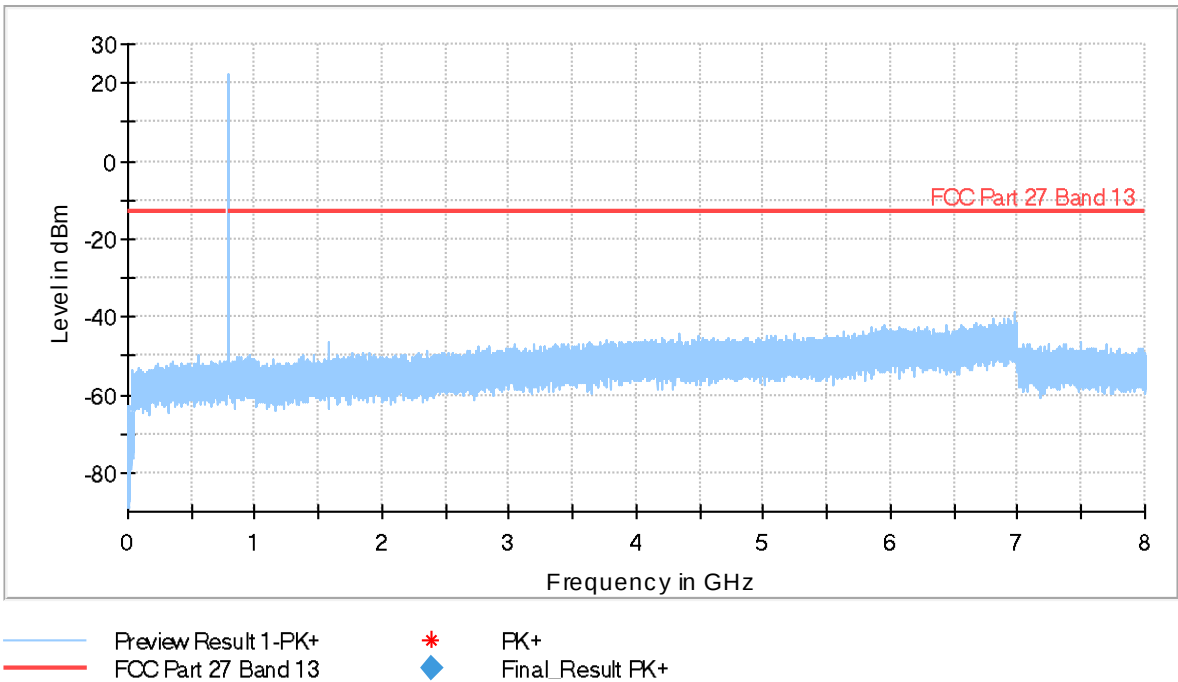

The peak above the limit is the carrier frequency.

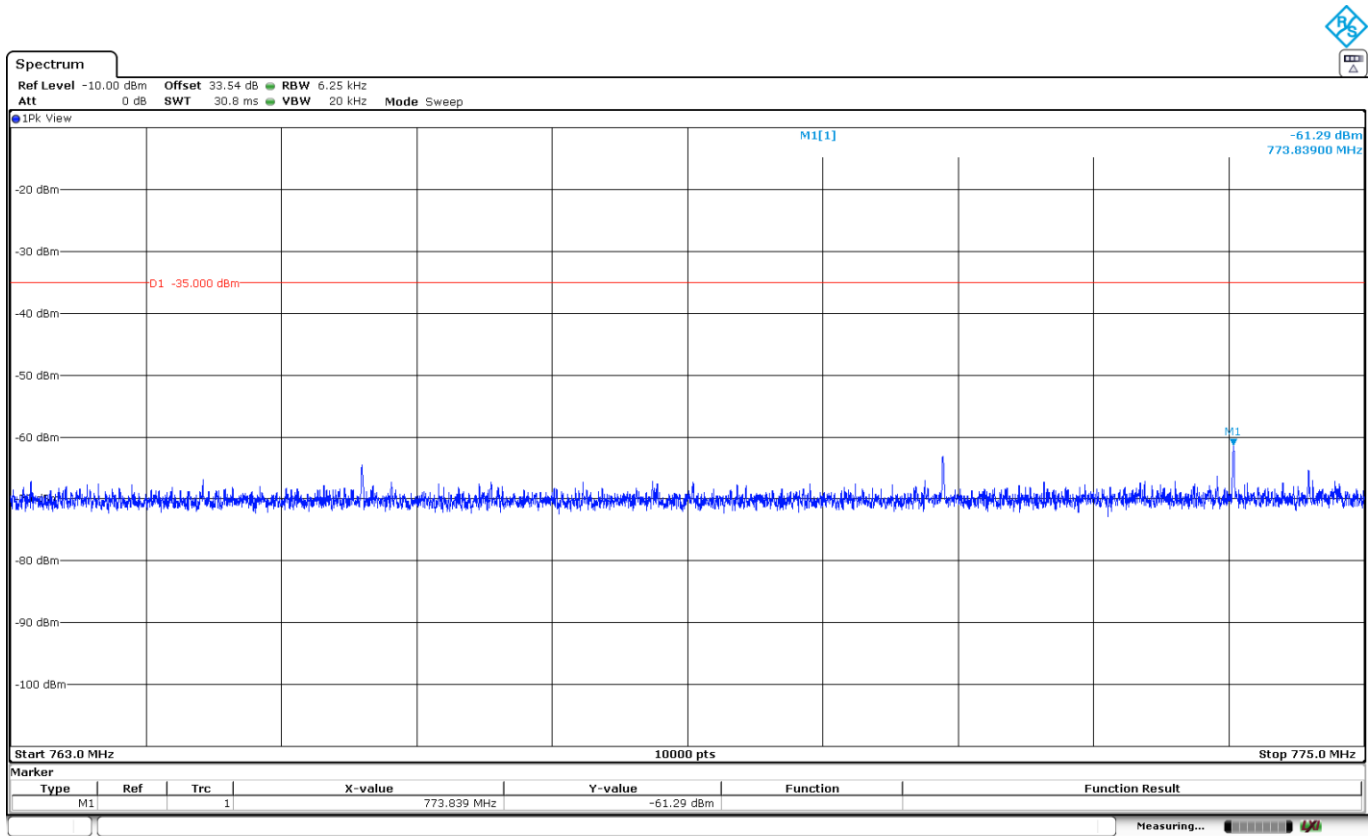


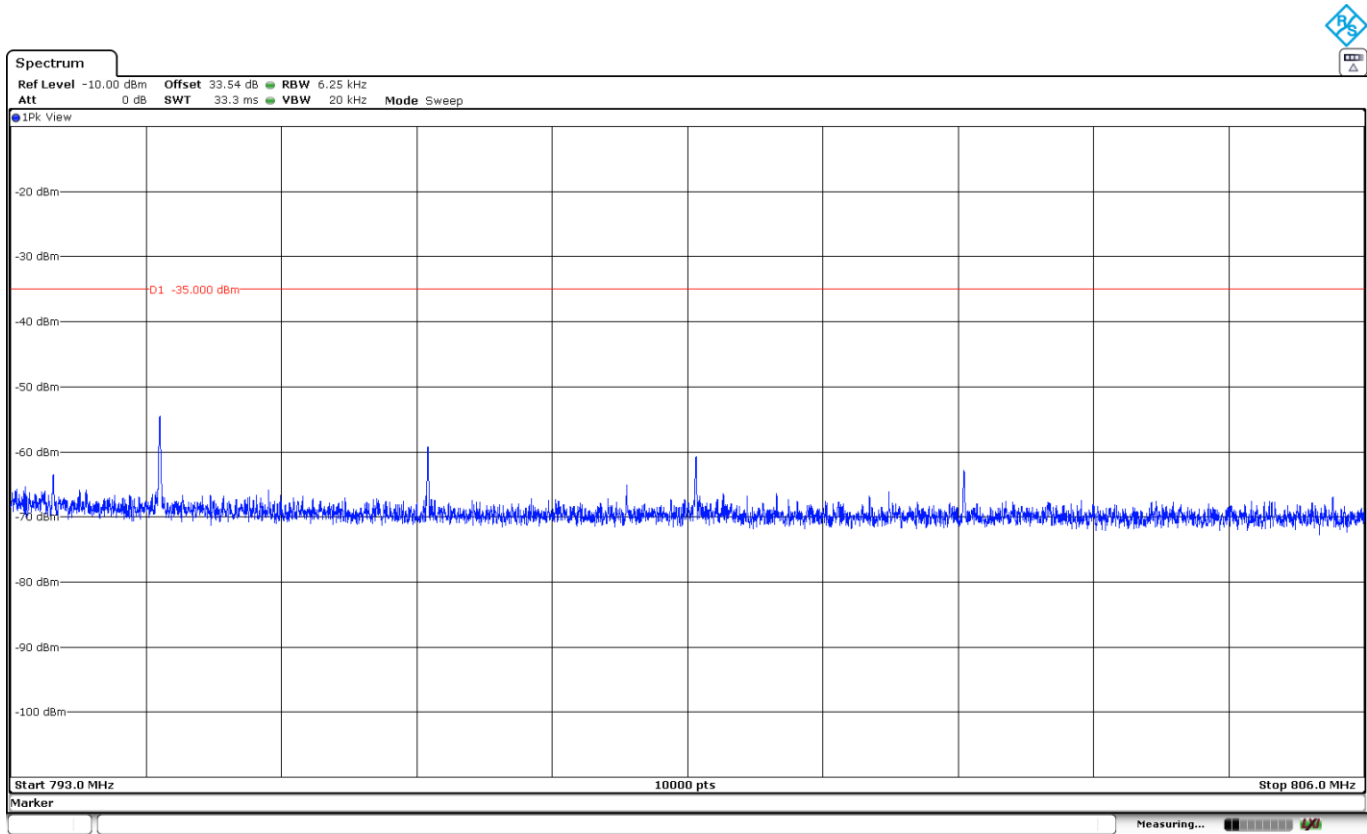

LTE Cat-NB1 Band 66: Pi/2-BPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=0.

Low Channel:


Full Spectrum

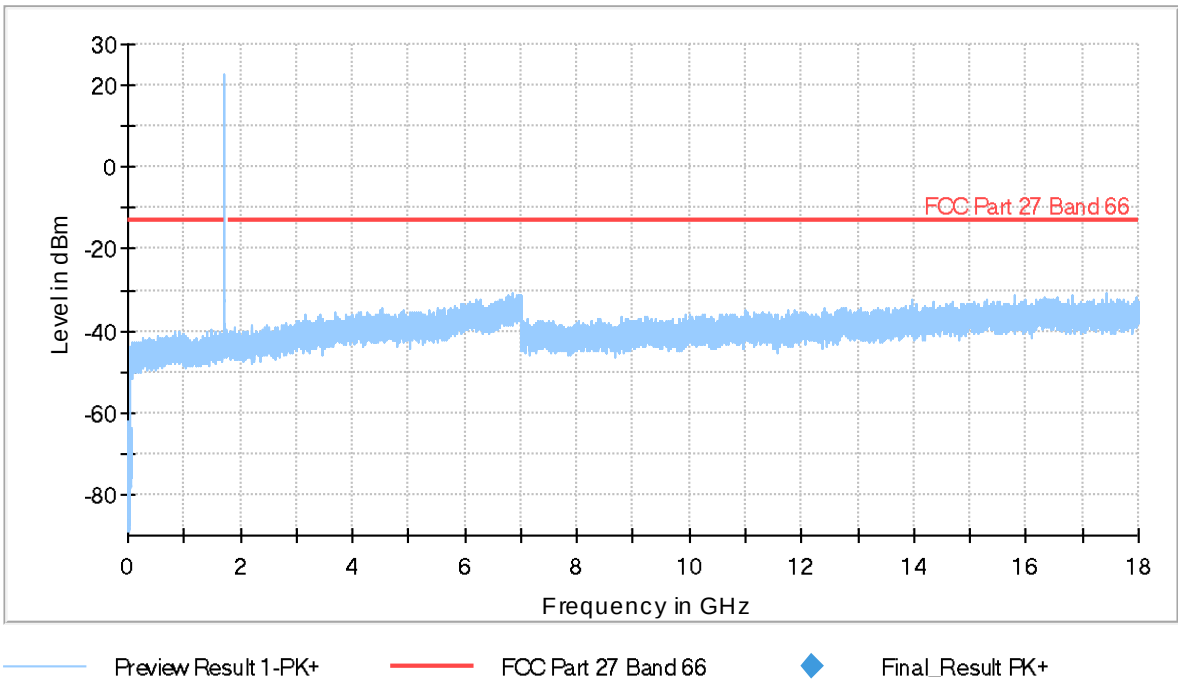

The peak above the limit is the carrier frequency.

Middle Channel:


Full Spectrum

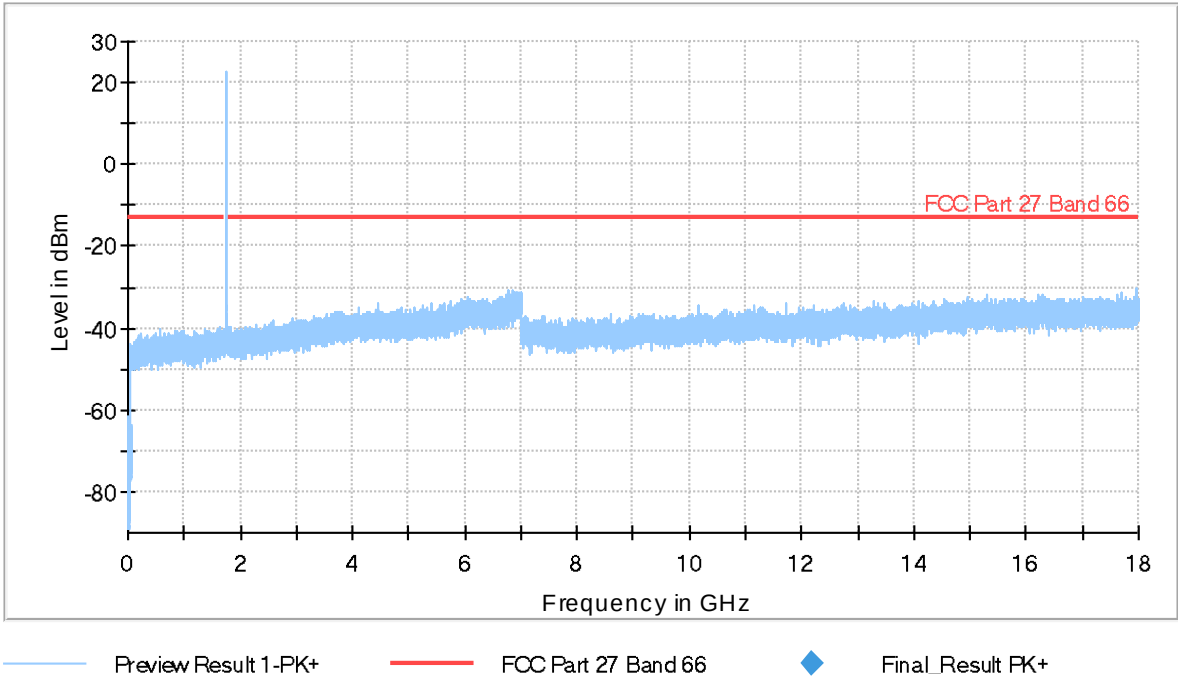

The peak above the limit is the carrier frequency.

High Channel:

Full Spectrum

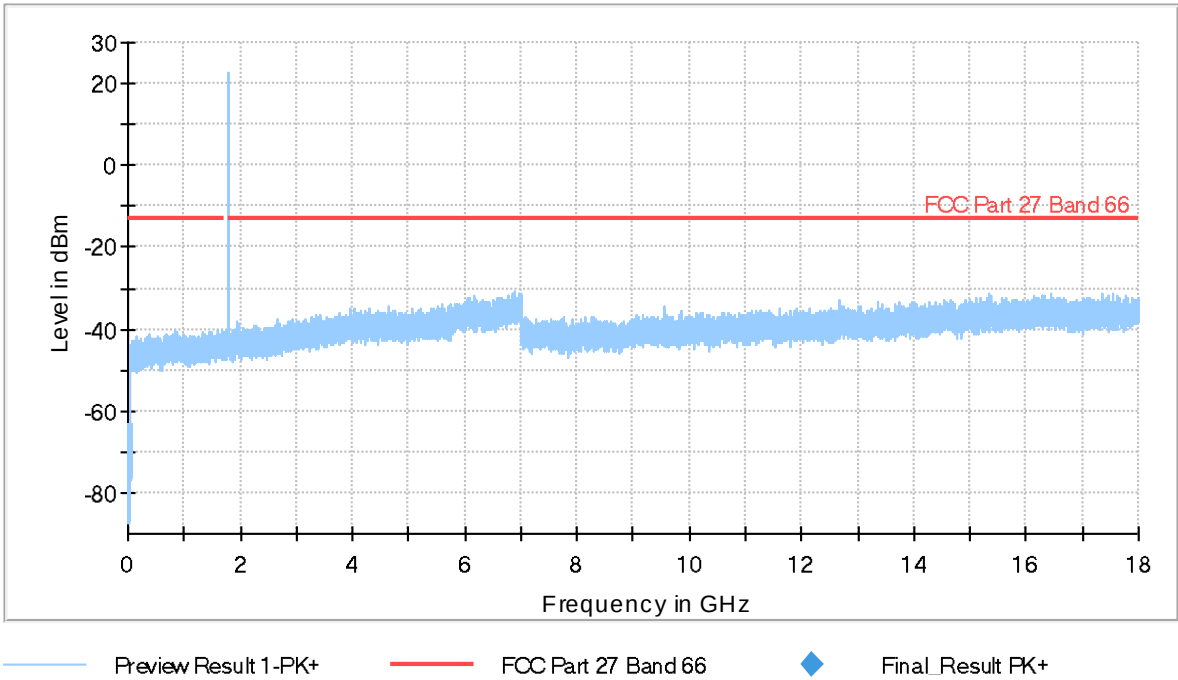


The peak above the limit is the carrier frequency.

LTE Cat-NB1 Band 85: Pi/2-BPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=47. MSC/TBS=0.

Low Channel:


Full Spectrum

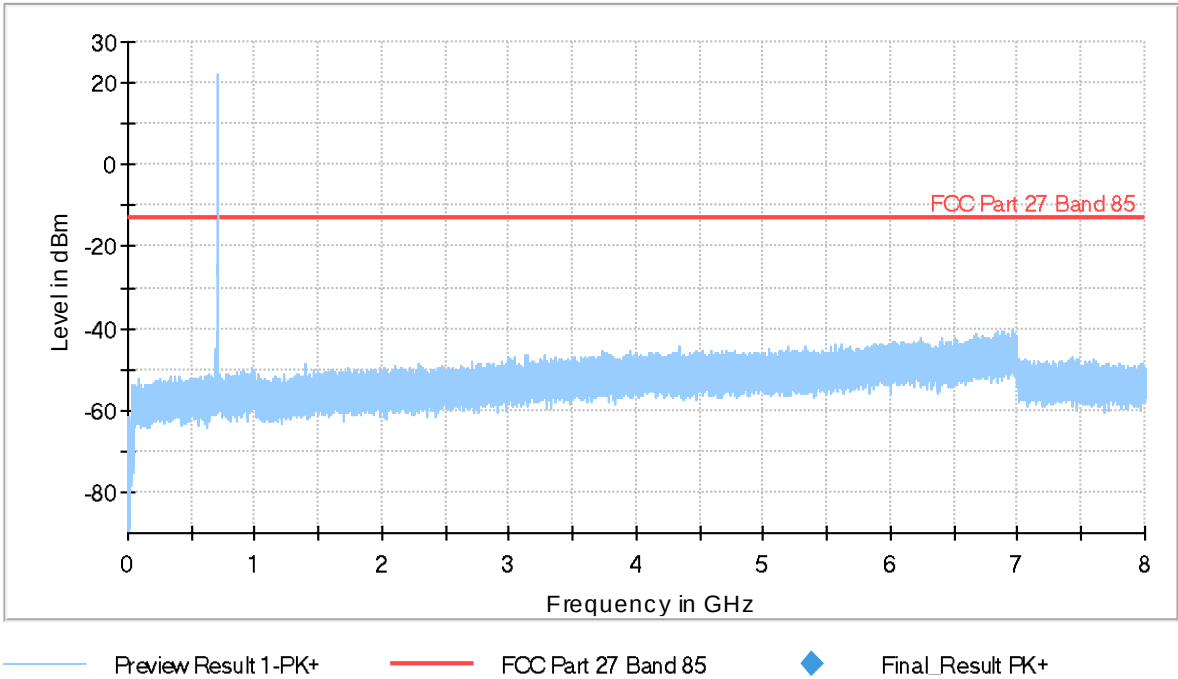

The peak above the limit is the carrier frequency.

Middle Channel:


Full Spectrum

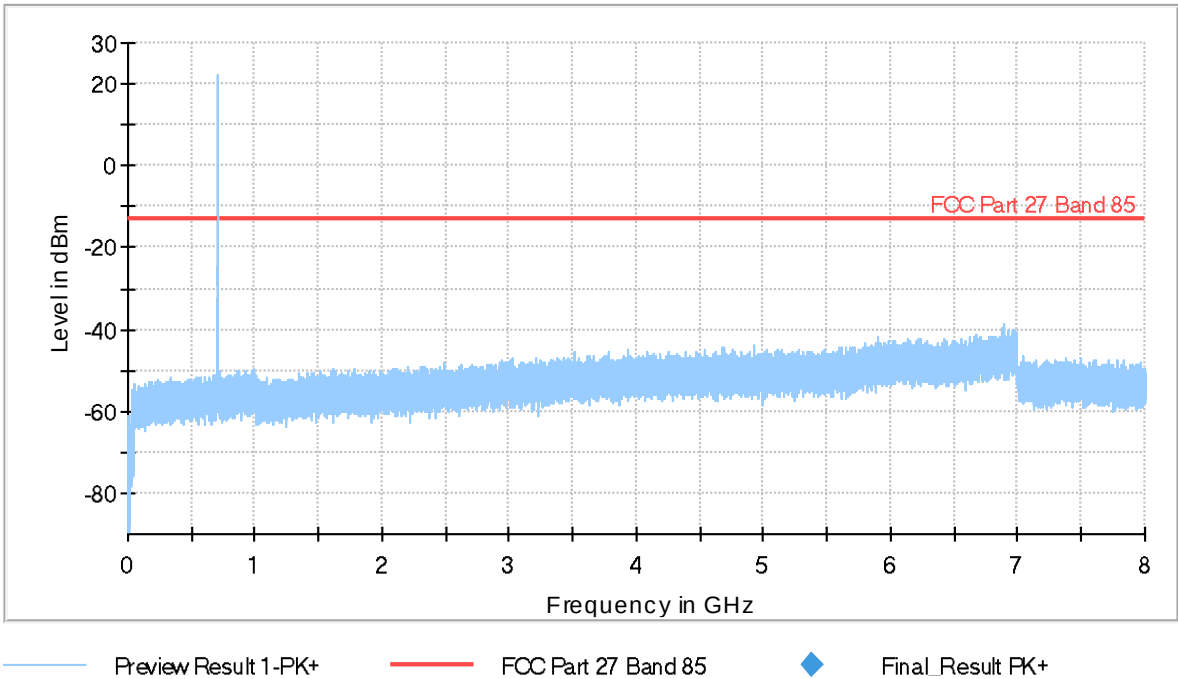

The peak above the limit is the carrier frequency.

High Channel:

Full Spectrum

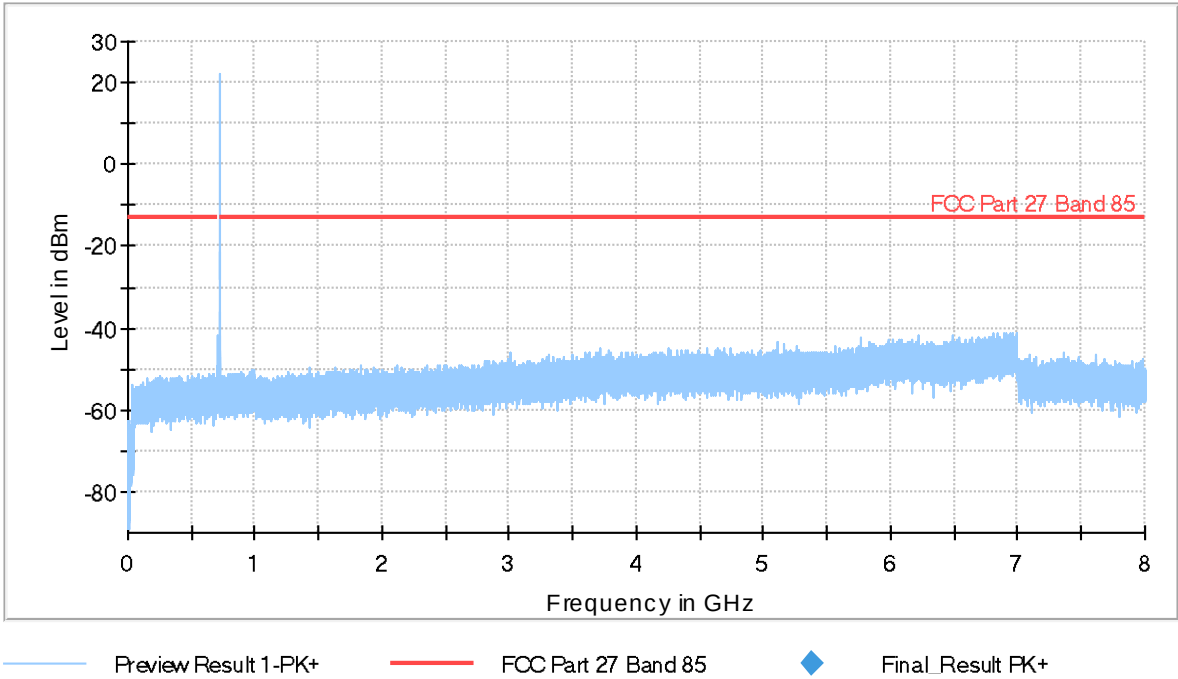

The peak above the limit is the carrier frequency.

Spurious emissions at antenna terminals at Block Edges

Limits

1. LTE Cat NB1 Band 8. FCC §27.1509 (a).

FCC §27.1509 (a):

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) in watts by at least the following amounts:

- (a) For 900 MHz broadband operations in 897.5–900.5 MHz band by at least $43 + 10 \log (P)$ dB.

2. LTE Cat NB1 Band 13.

FCC §27.53 (c):

On any frequency outside the 776-788 MHz band. the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. Compliance is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

On all frequencies between 763-775 MHz and 793-805 MHz. by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment. for mobile and portable stations. Compliance is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

RSS-130 4.7.1 and 4.7.2:

4.7.1 General unwanted emissions limits:

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} p$ (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

4.7.2 Additional unwanted emissions limits:

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

a. the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:

- i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment and
- ii. $65 + 10 \log_{10} p$ (watts), dB, for mobile and portable equipment

b. the e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

3. LTE Cat NB1 Band 66.

FCC §27.53 (h). RSS-139 5.6:

Unwanted emissions shall be measured in terms of average values.

For all equipment, the TRP or total conducted power (sum of conducted power across all antenna connectors) of the unwanted emissions outside the frequency block or frequency block group shall not exceed the limits shown in table 6.

Table 6: Unwanted emission limits	
Offset from the edge of the frequency block or frequency block group	Unwanted emission limits
1 MHz	$-13 \text{ dBm}/(1\% \text{ of OB}^*)$
>1 MHz	$-13 \text{ dBm}/\text{MHz}$

*OB is the occupied bandwidth.

In addition to complying with the above limits, equipment operating in the band 2180-2200 MHz may require additional filtering (see SRSP-519).

4. LTE Cat NB1 Band 85.

FCC §27.53 (g):

For operations in the 600 MHz band and the 698-746 MHz band. the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation. measured in watts. by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

RSS-130. Clause 4.7.1:

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s). shall be attenuated below the transmitter power. P (dBW). by at least $43 + 10 \log_{10} p$ (watts). dB.

At P_o transmitting power. the specified minimum attenuation becomes $43 + 10 \log (P_o)$. and the level in dBm relative to P_o becomes:


$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mW}) - 30] = -13 \text{ dBm}$$

Method

The EUT RF output connector was connected to a spectrum analyser and to the Universal Radio Communication tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-Ohm attenuator and a power splitter.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

Test Setup

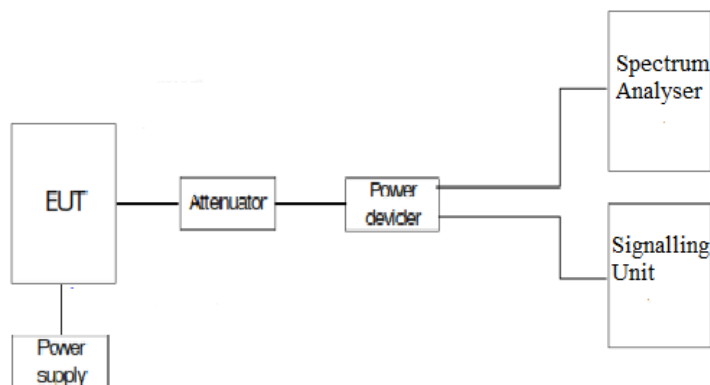

Results

LTE Cat NB1 Band 4:

Preliminary measurements determined the worst-case. Results attached are for this worst-case configuration.

Low Block Edge.

Note: Low Block Edge for LTE Cat NB1 Band 4 is the same as for LTE Cat NB1 Band 66.

High Block Edge.

LTE Cat NB1 Band 4	Pi/2-BPSK BW=3.75 kHz Tone Number=1 Tone Offset=47 MSC/TBS=0	Pi/2-BPSK BW=15 kHz Tone Number=1 Tone Offset=11 MSC/TBS=0	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>High Block Edge</u> at antenna port (dBm)	-23.86	-23.09	-23.18


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat NB1 Band 4:

LTE Cat NB1 Band 4. Pi/2-BPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=47. MSC/TBS=0. High Channel:

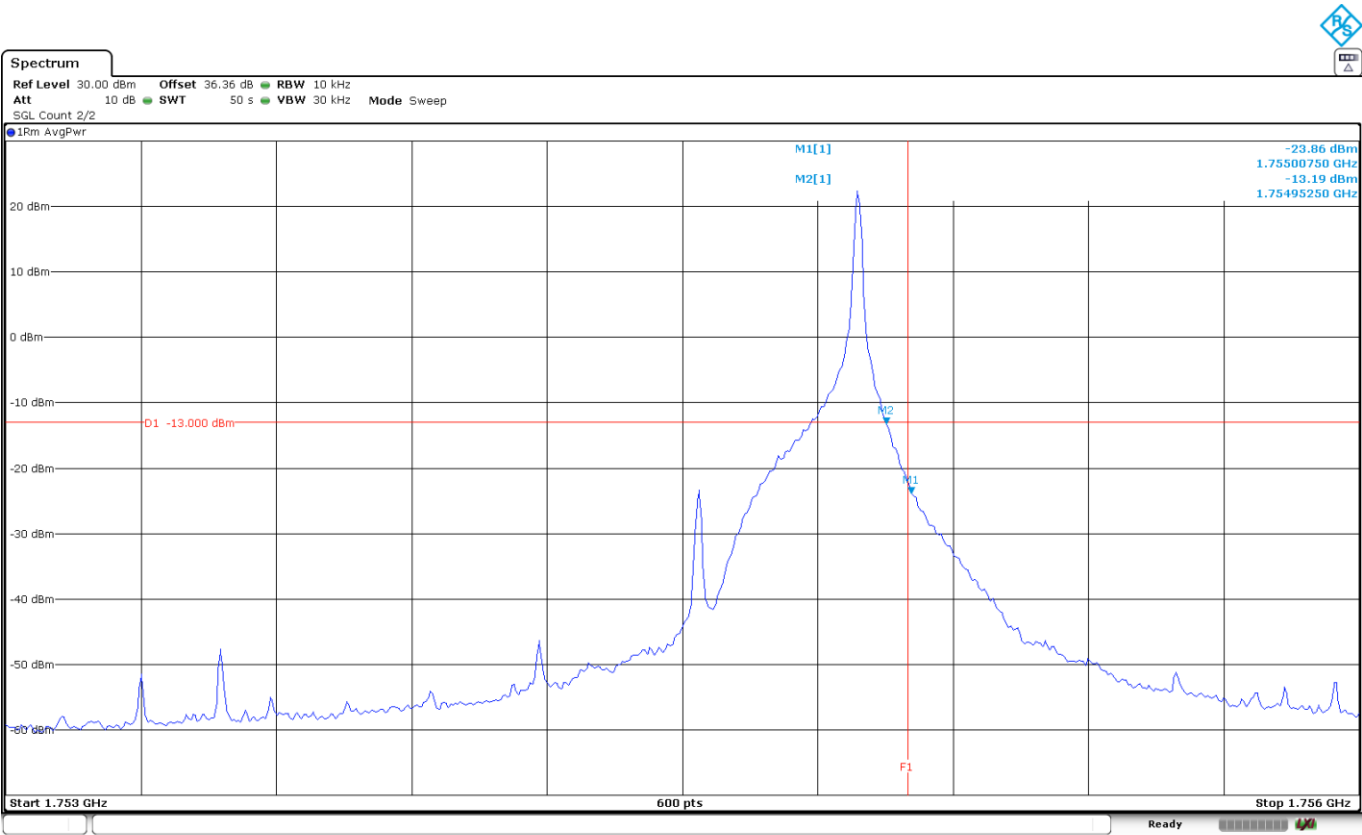


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 4. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. High Channel:

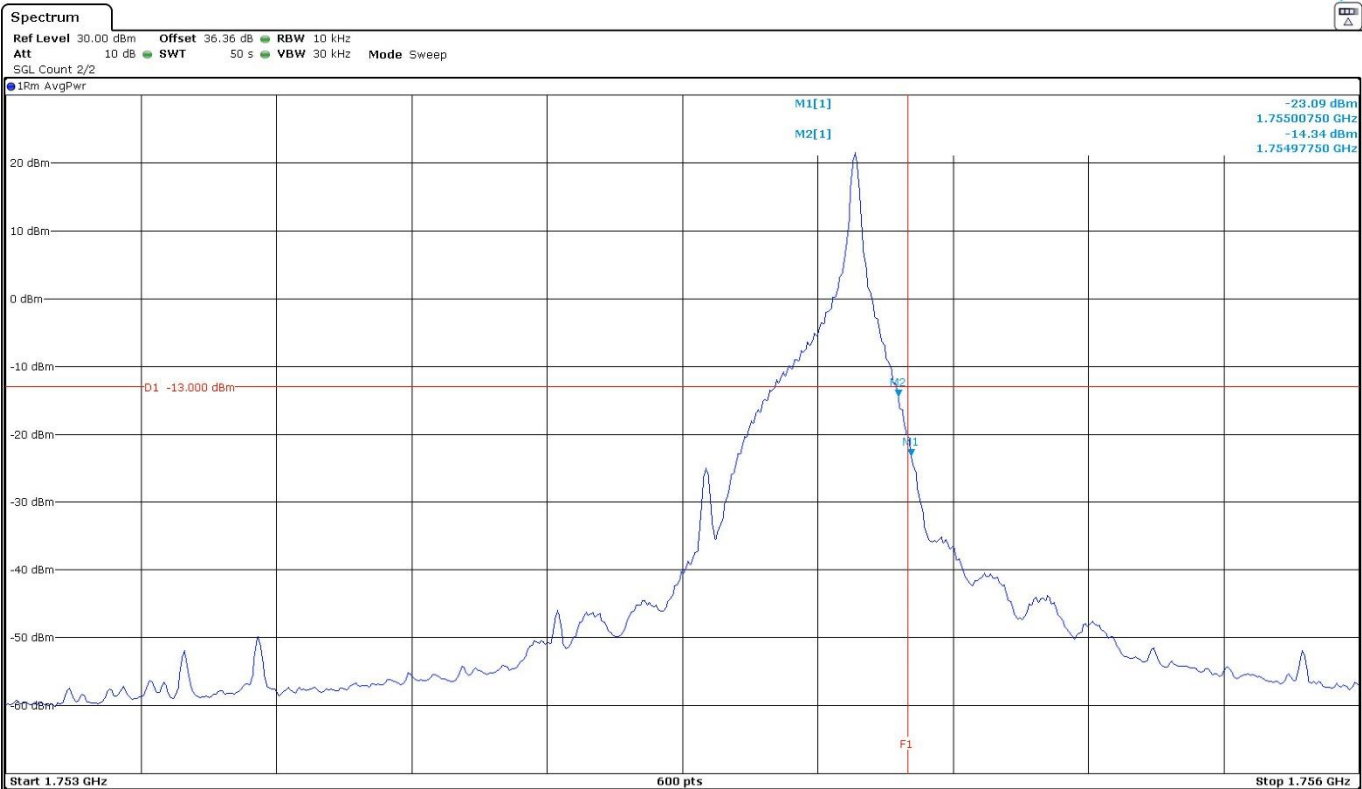

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 4. QPSK. BW=15 kHz. Tone Number=12. Tone Offset=0. MSC/TBS=5. High Channel:

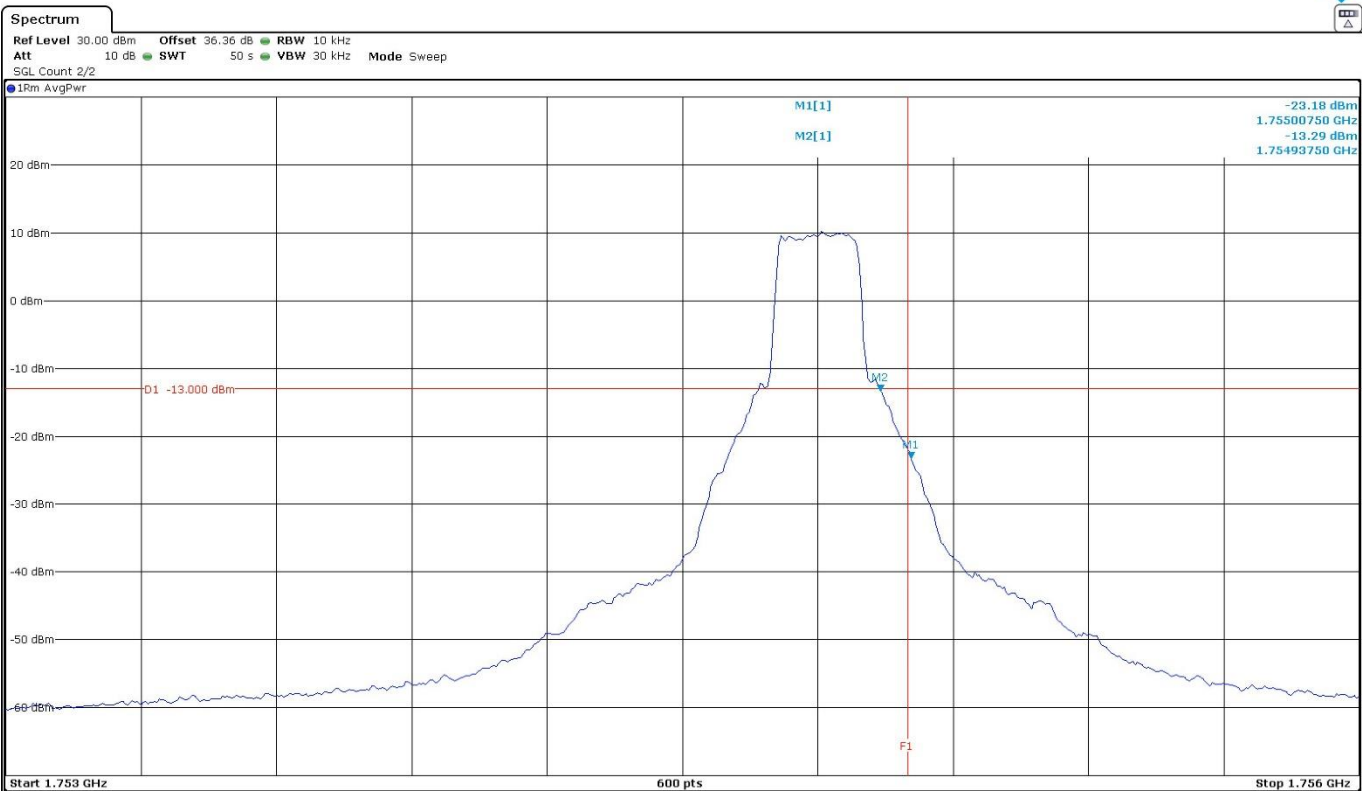

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 8:

Preliminary measurements determined the worst-case. Results attached are for this worst-case configuration.

LTE Cat NB1 Band 8	Pi/4-QPSK BW=3.75 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	Pi/4-QPSK BW=15 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)	-21	-22.74	-23.84

LTE Cat NB1 Band 8	Pi/4-QPSK BW=3.75 kHz Tone Number=1 Tone Offset=47 MSC/TBS=3	Pi/4-QPSK BW=15 kHz Tone Number=1 Tone Offset=11 MSC/TBS=3	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>High Block Edge</u> at antenna port (dBm)	-21.88	-22.71	-23.31


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat NB1 Band 8:

LTE Cat NB1 Band 8. Pi/4-QPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

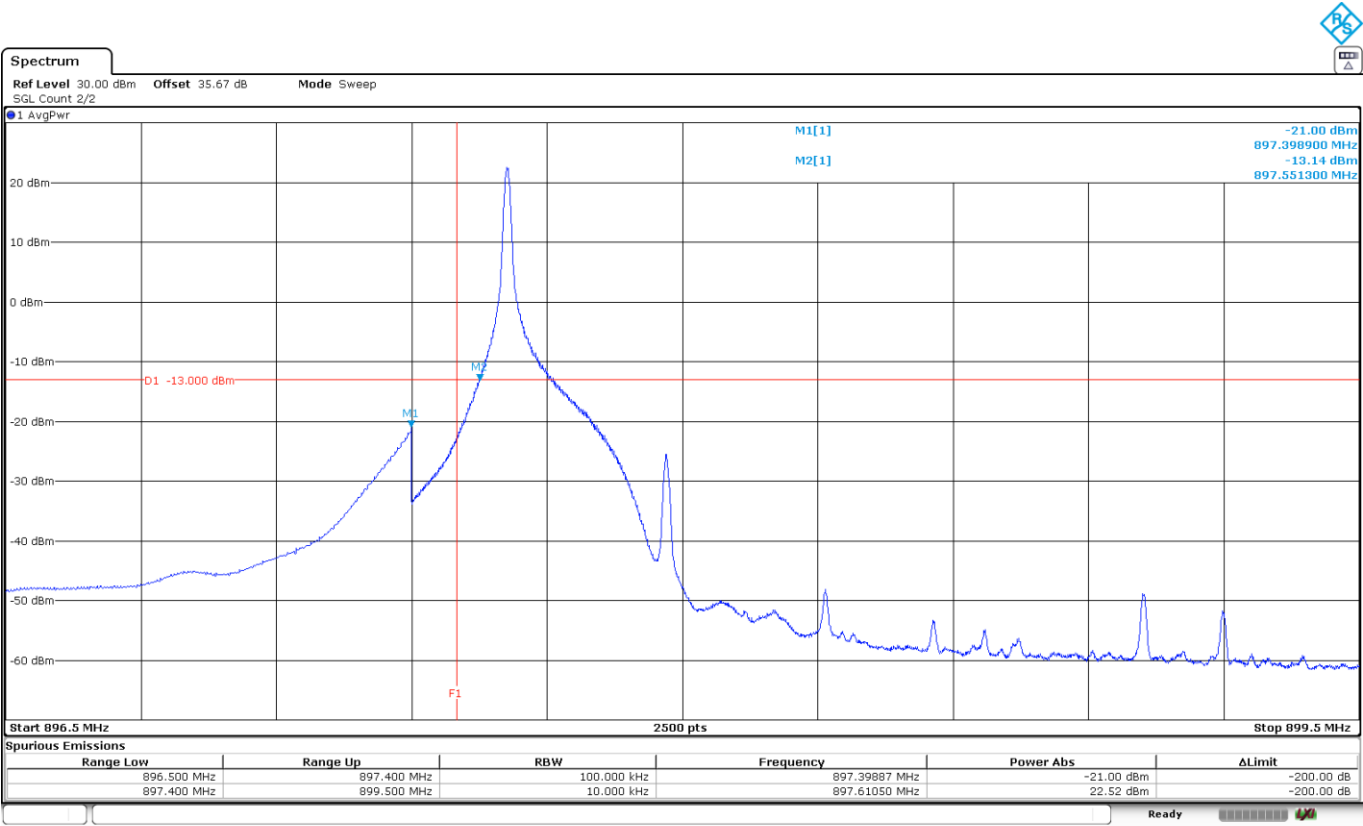


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 8. Pi/4-QPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=47. MSC/TBS=3. High Channel:

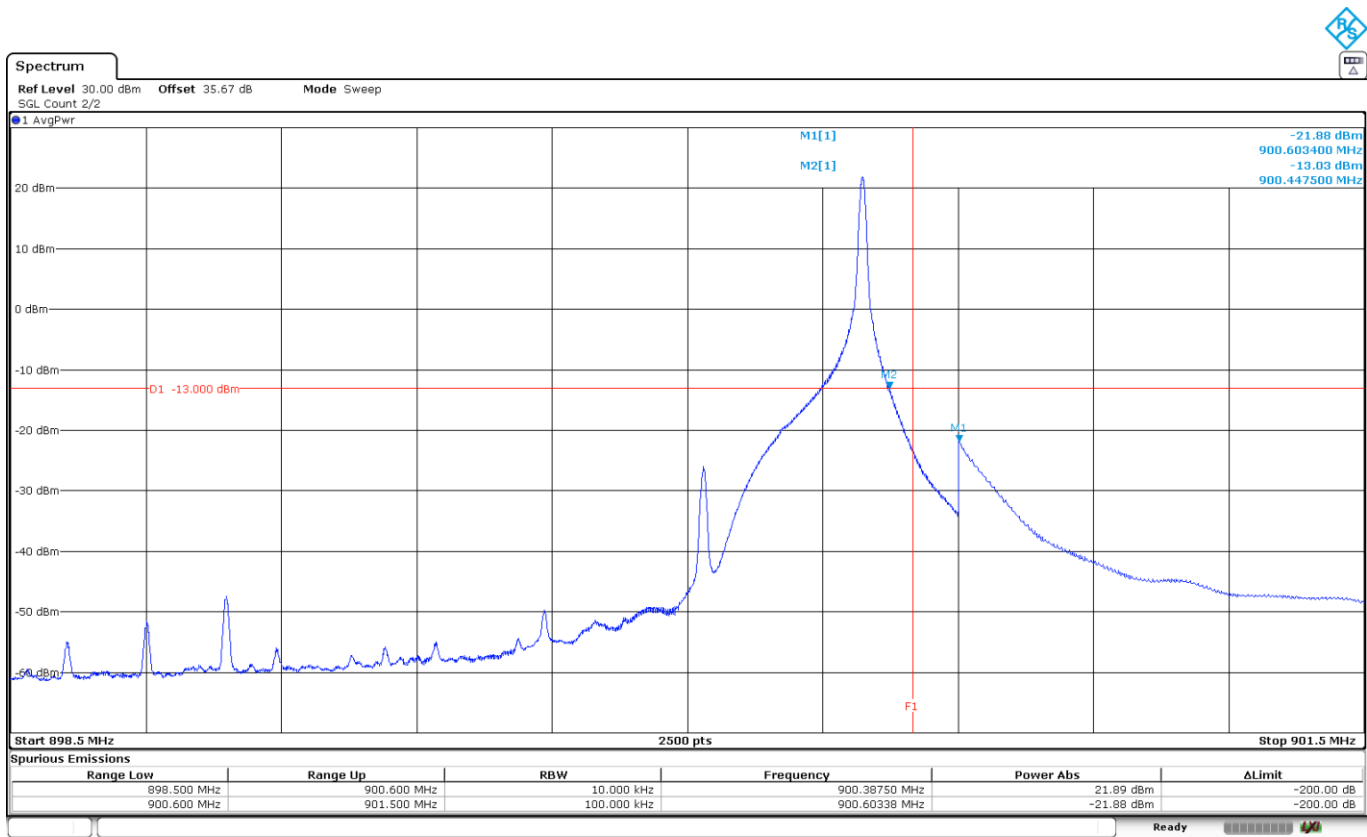


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 8. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

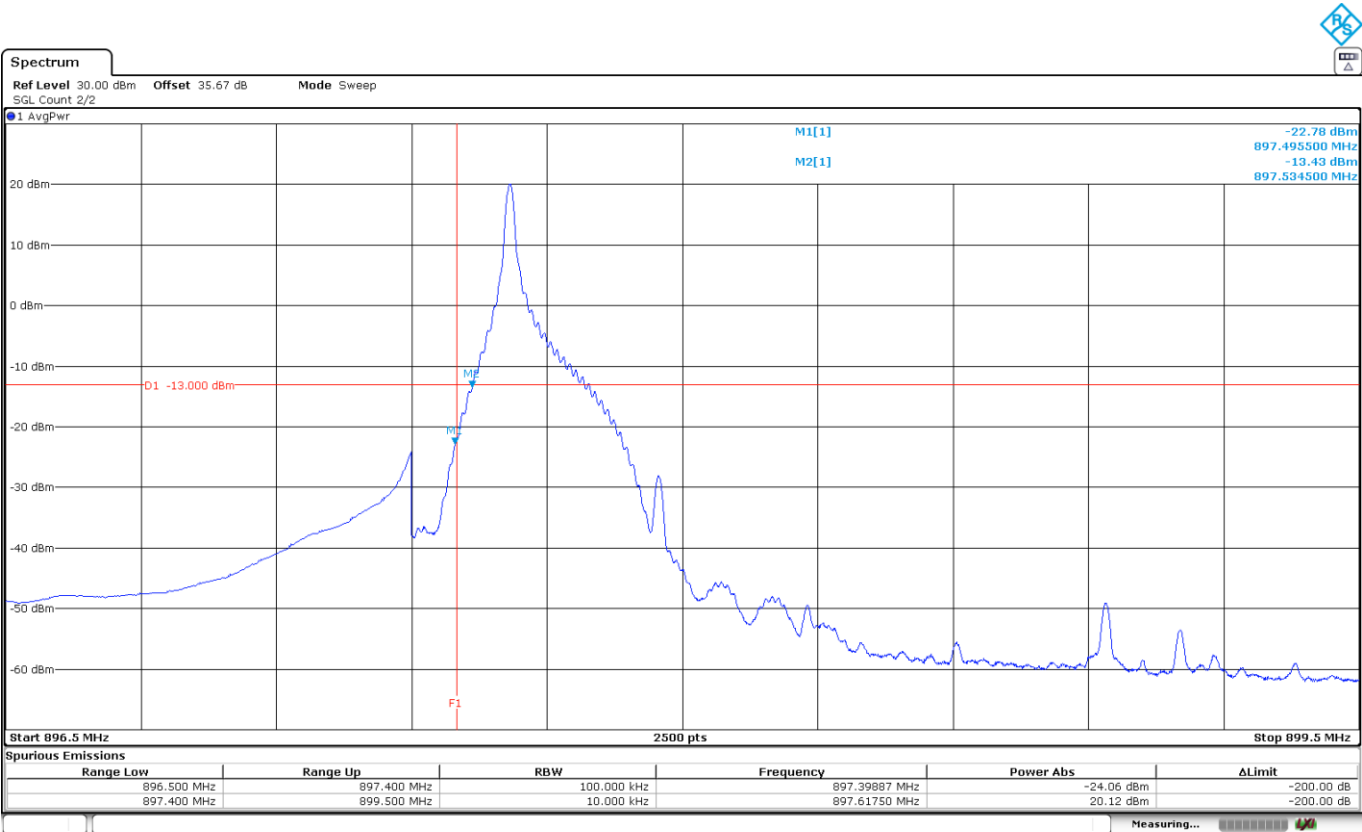


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 8. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=11. MSC/TBS=3. High Channel:

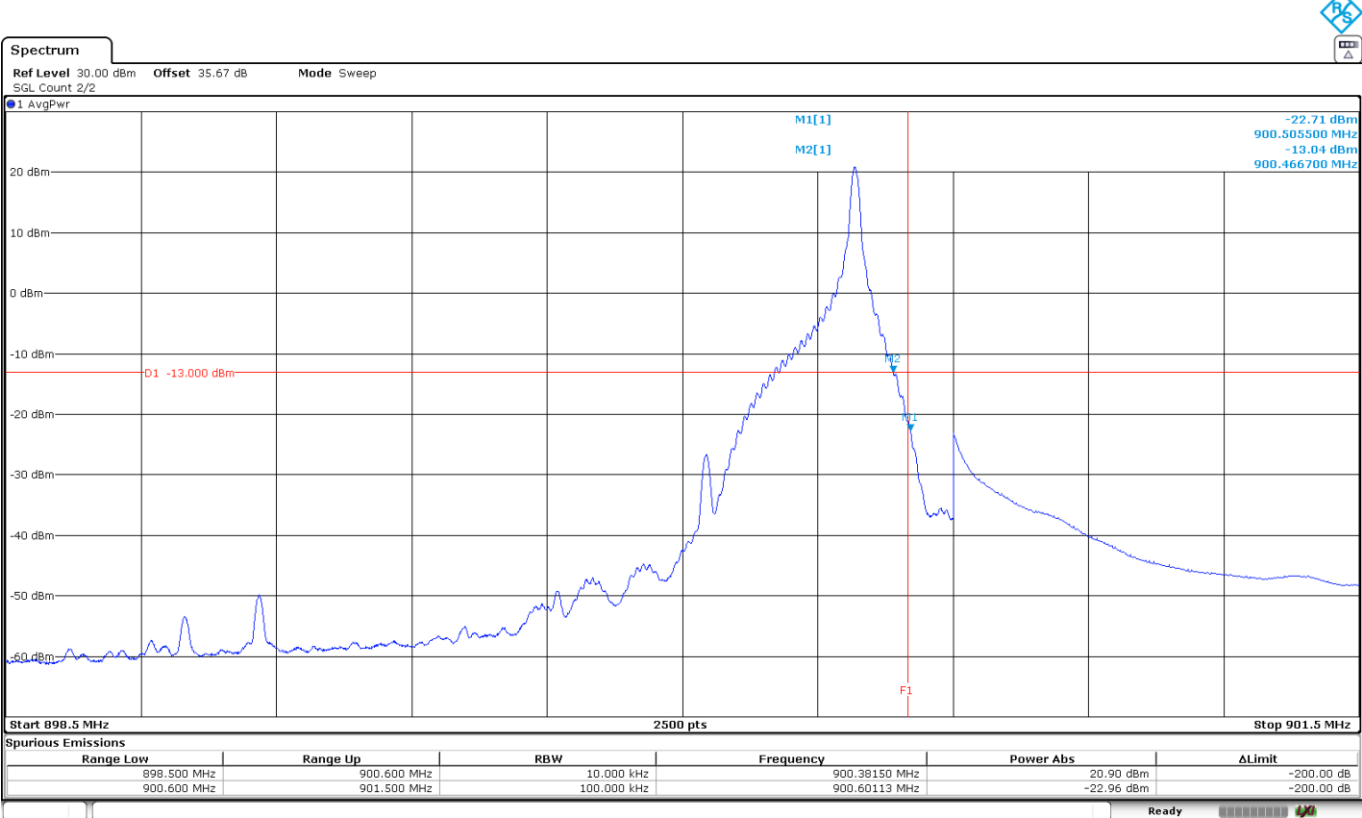


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 8. QPSK. BW=15 kHz. Tone Number=12. Tone Offset=0. MSC/TBS=5. Low Channel:

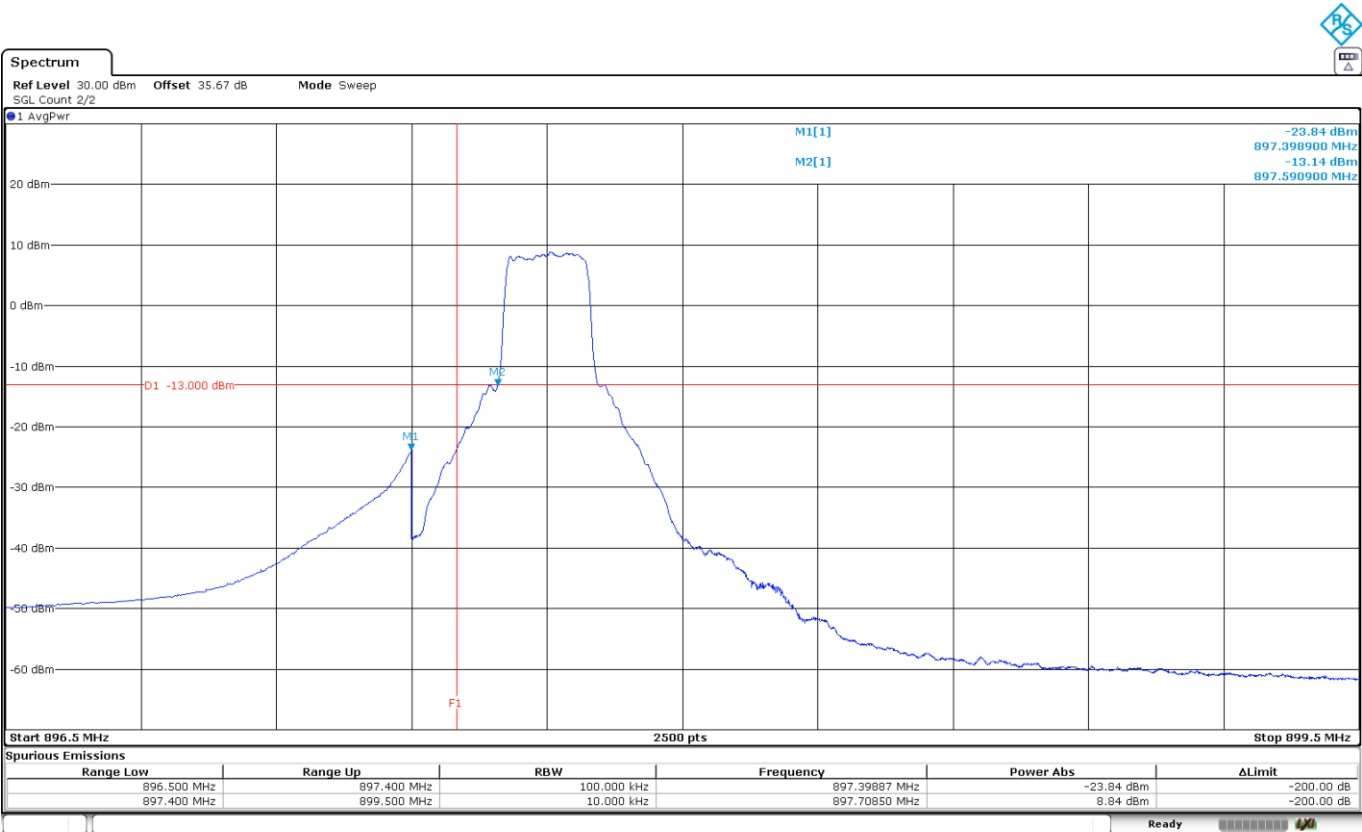

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 8. QPSK. BW=15 kHz. Tone Number=12. Tone Offset=0. MSC/TBS=5. High Channel:

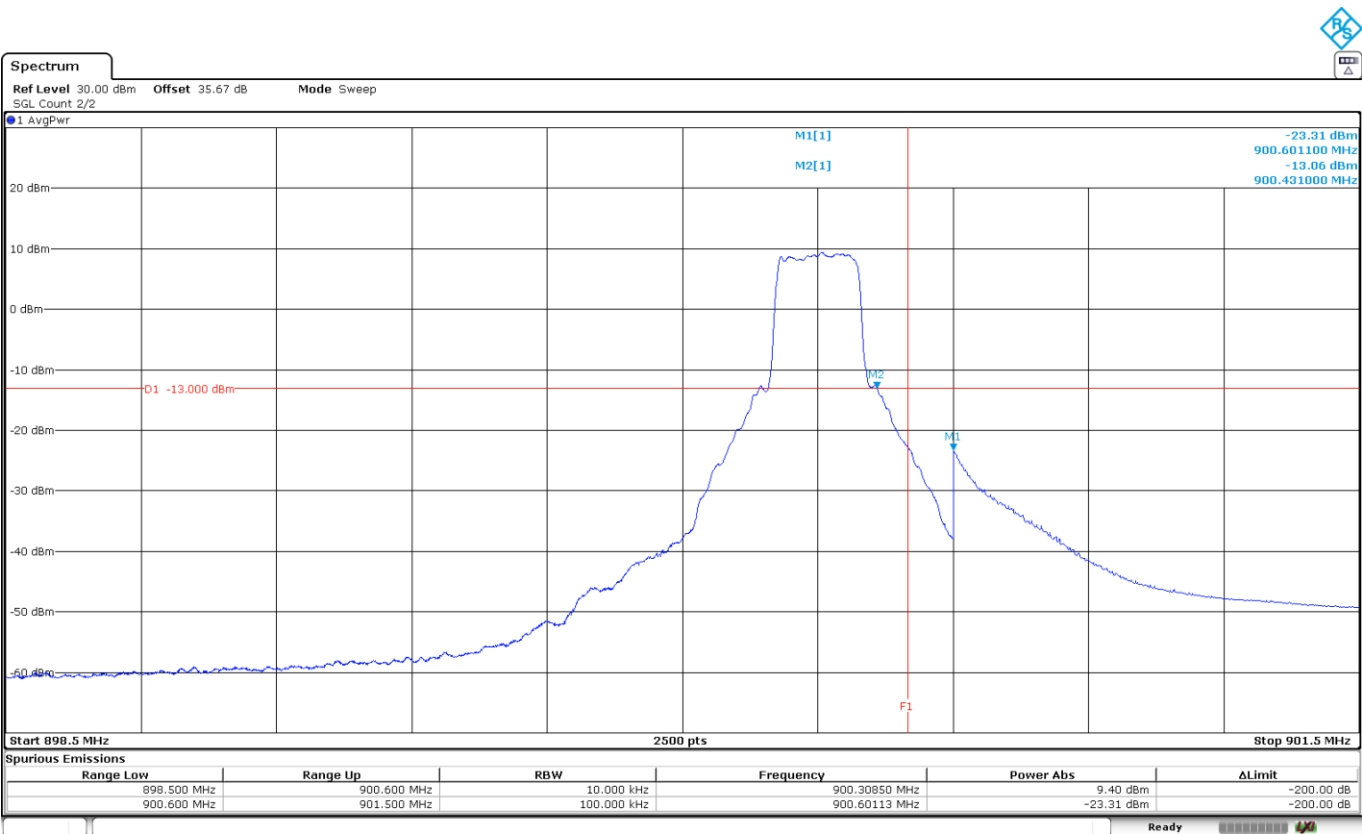

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 12:

Preliminary measurements determined the worst-case. Results attached are for this worst-case configuration.

Low Block Edge.

LTE Cat NB1 Band 12	Pi/2-BPSK BW=3.75 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	Pi/4-QPSK BW=15 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)	-48.24	-49.71	-50.56

High Block Edge.

Note: High Block Edge for LTE Cat NB1 Band 12 is the same as for LTE Cat NB1 Band 85.


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat NB1 Band 12:

LTE Cat NB1 Band 12. Pi/2-BPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

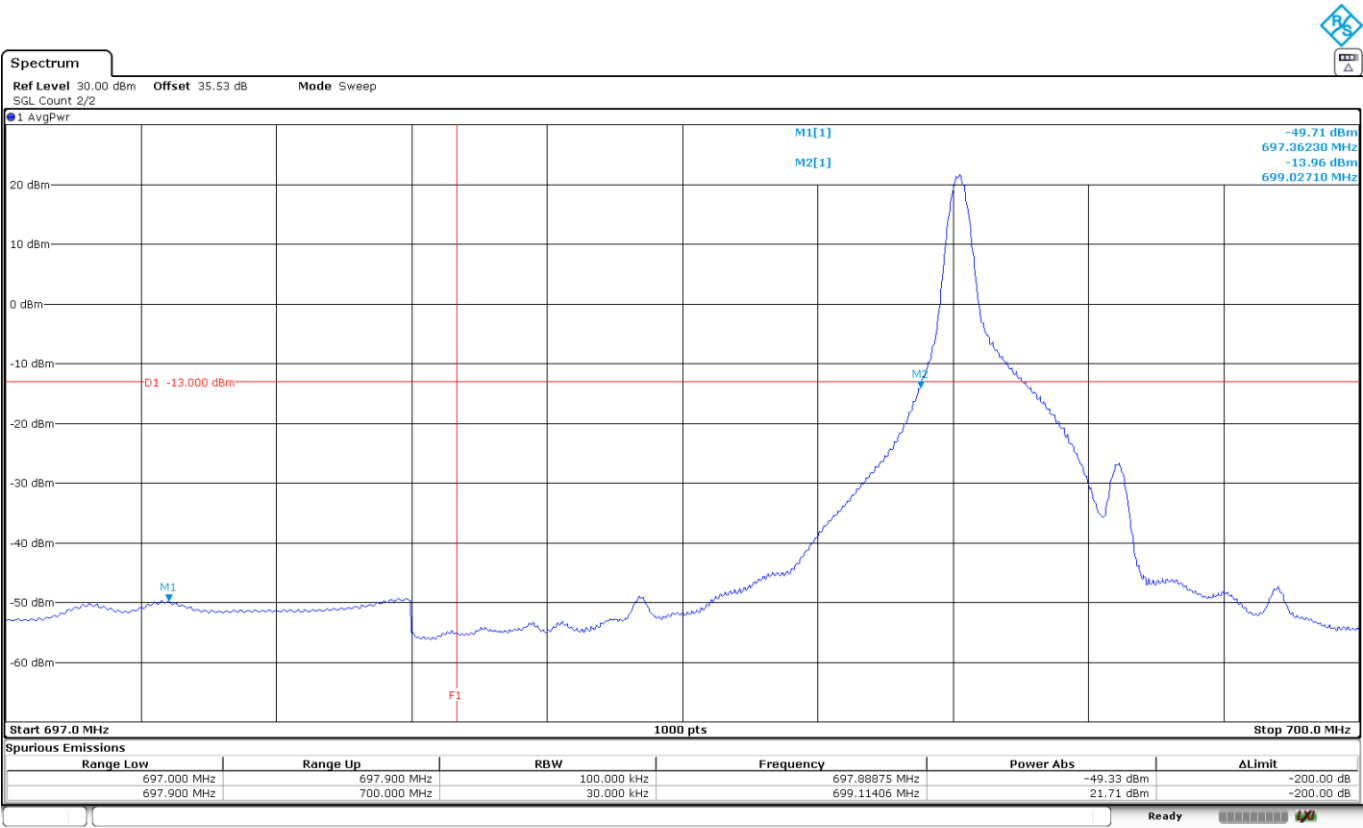


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 12. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

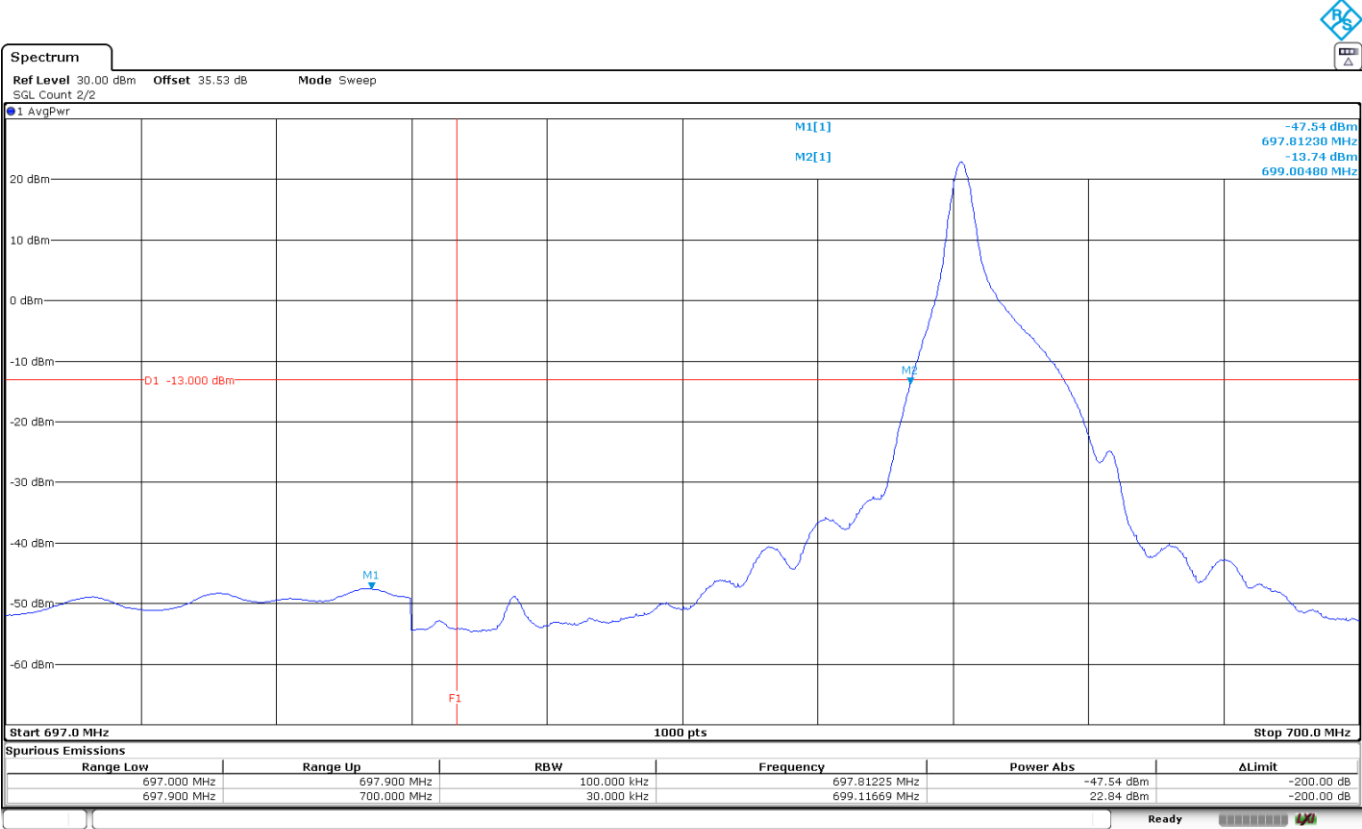

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 12. QPSK. BW=15 kHz. Tone Number=12. Tone Offset=0. MSC/TBS=5. Low Channel:

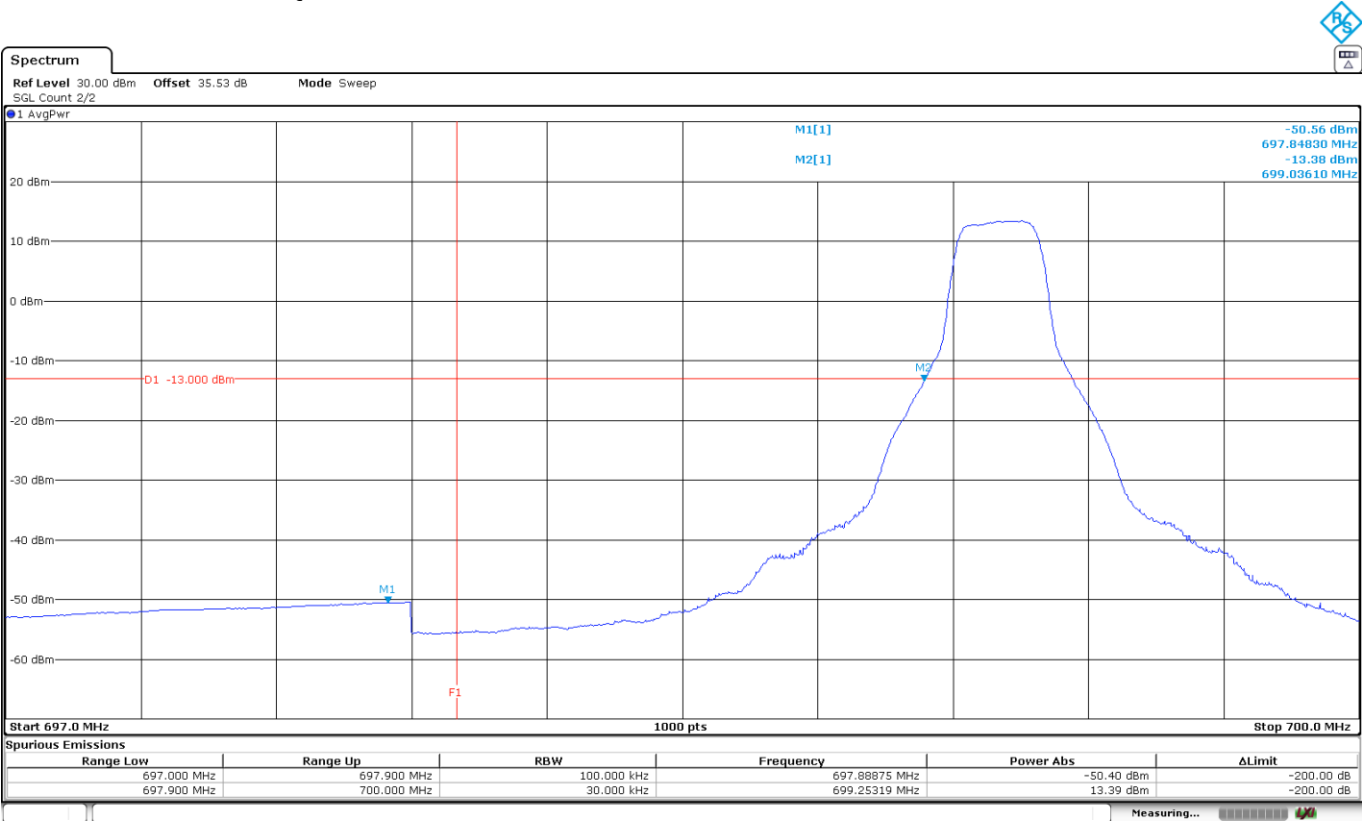

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 13:

Preliminary measurements determined the worst-case. Results attached are for this worst-case configuration.

LTE Cat NB1 Band 13	Pi/4-QPSK BW=3.75 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	Pi/4-QPSK BW=15 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)	-21.07	-20.07	-18.58

LTE Cat NB1 Band 13	Pi/4-QPSK BW=3.75 kHz Tone Number=1 Tone Offset=47 MSC/TBS=3	Pi/4-QPSK BW=15 kHz Tone Number=1 Tone Offset=11 MSC/TBS=3	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>High Block Edge</u> at antenna port (dBm)	-19.96	-19.67	-18.63


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat NB1 Band 13:

LTE Cat NB1 Band 13. Pi/4-QPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

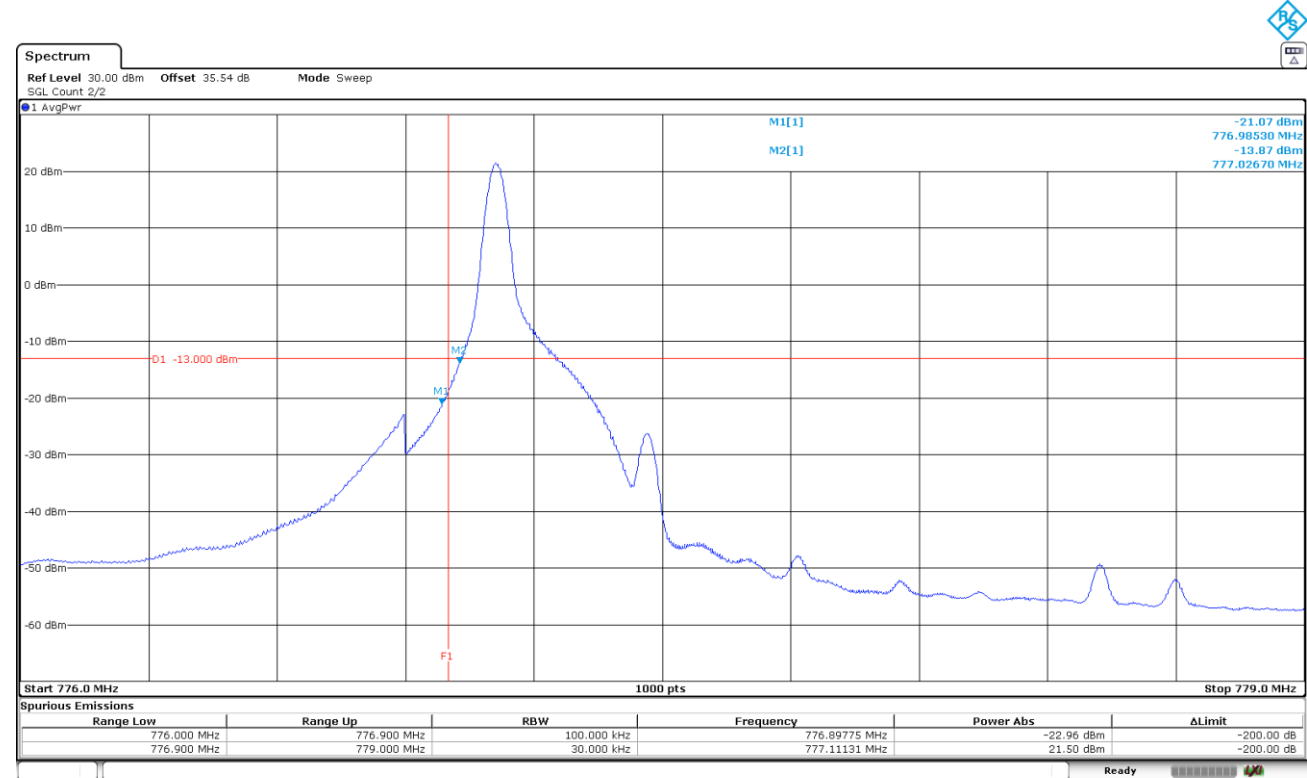

The equipment transmits at the maximum output power.


LTE Cat NB1 Band 13. Pi/4-QPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=47. MSC/TBS=3. High Channel:

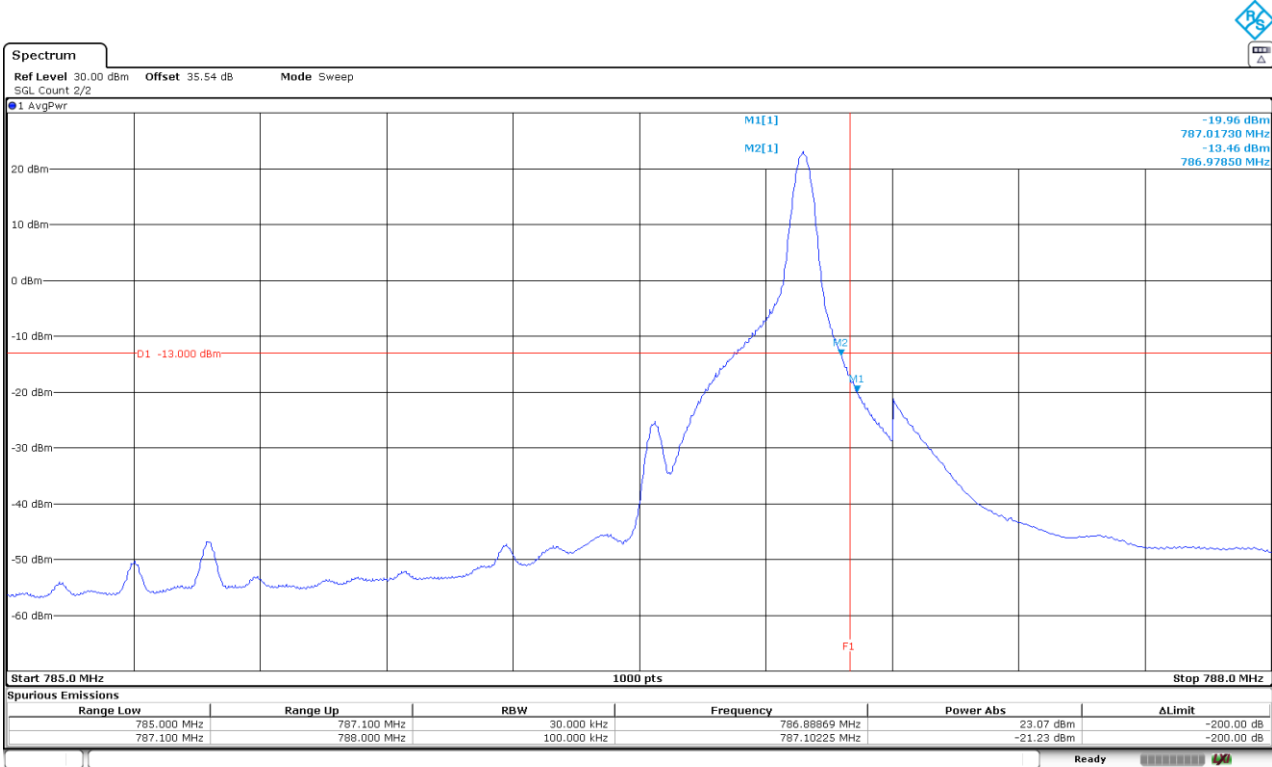

The equipment transmits at the maximum output power.


The

LTE Cat NB1 Band 13. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:


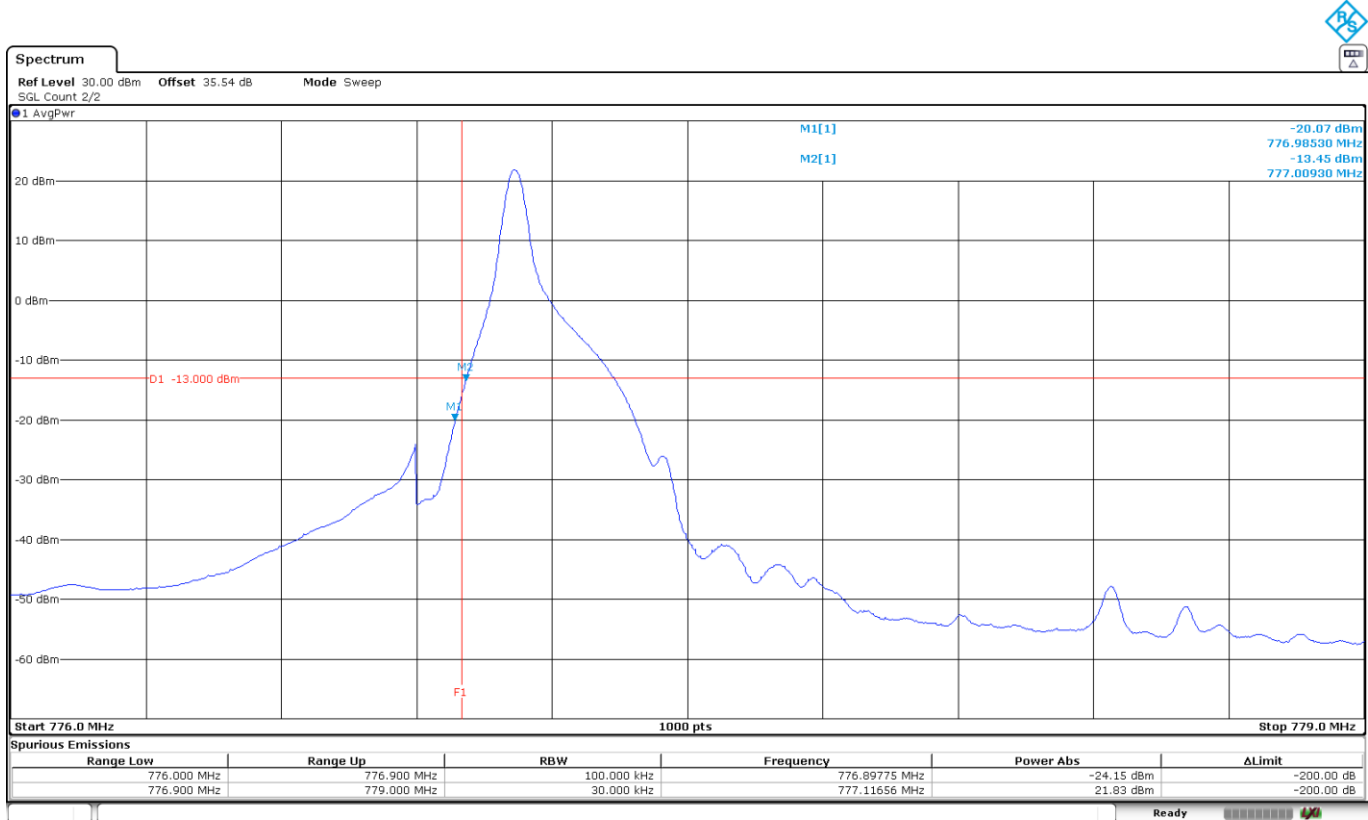


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 13. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=11. MSC/TBS=3. High Channel:

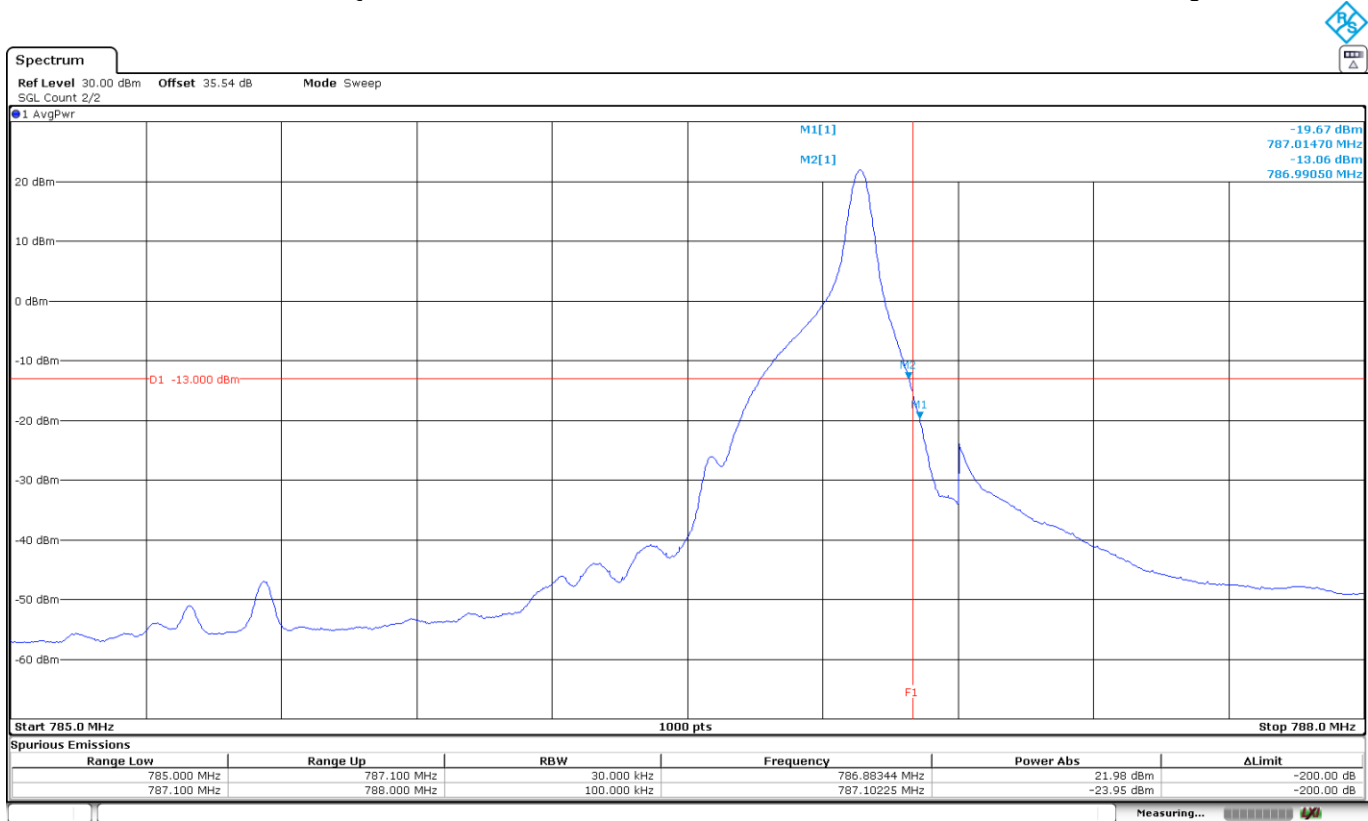

The equipment transmits at the maximum output power.



LTE Cat NB1 Band 17:

Preliminary measurements determined the worst-case. Results attached are for this worst-case configuration.

Low Block Edge.

LTE Cat NB1 Band 17	Pi/2-BPSK BW=3.75 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	Pi/4-QPSK BW=15 kHz Tone Number=1 Tone Offset=0 MSC/TBS=3	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)	-20.22	-19.59	-19.58

High Block Edge.

Note: High Block Edge for LTE Cat NB1 Band 17 is the same as for LTE Cat NB1 Band 85.


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat NB1 Band 17:

LTE Cat NB1 Band 17. Pi/2-BPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

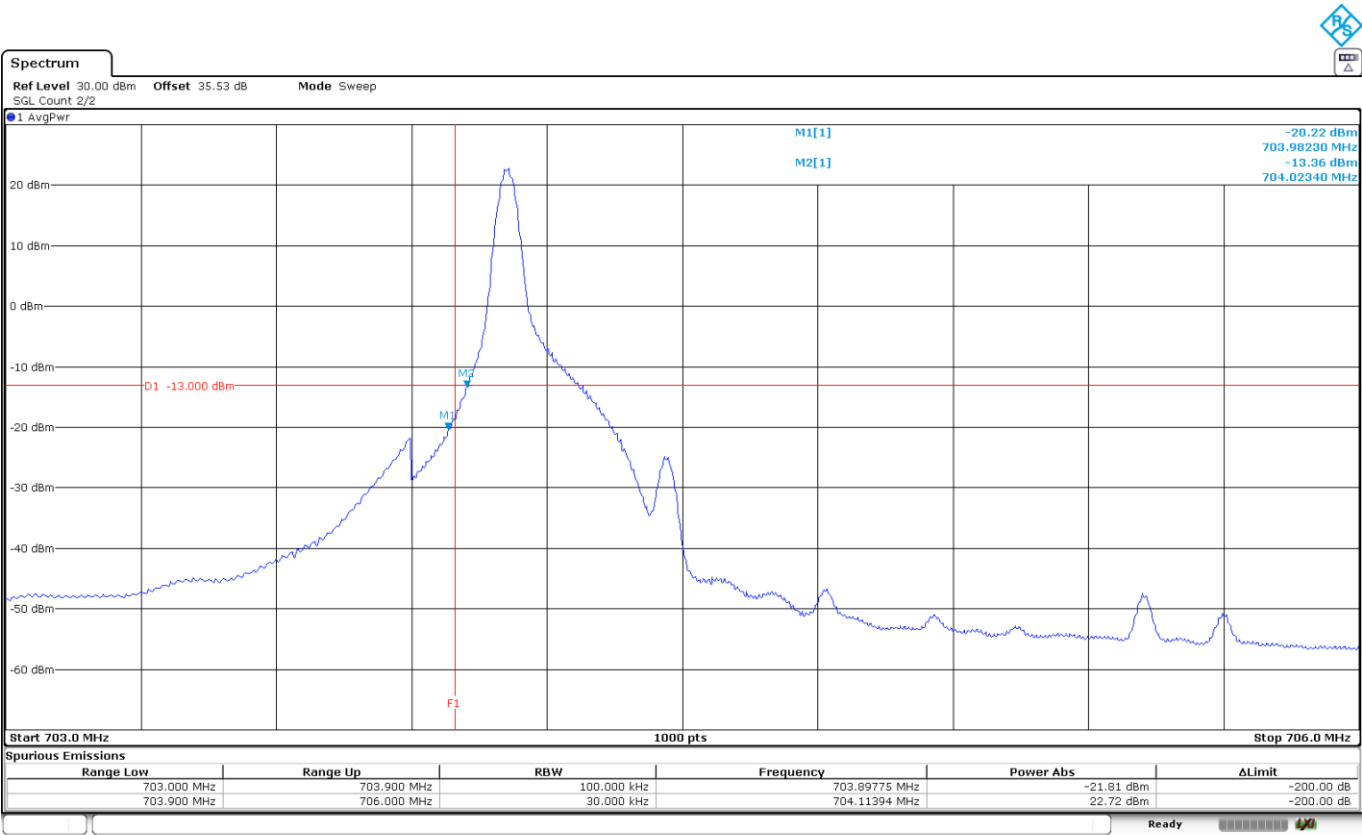


The equipment transmits at the maximum output power.

LTE Cat NB1 Band 17. Pi/4-QPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=3. Low Channel:

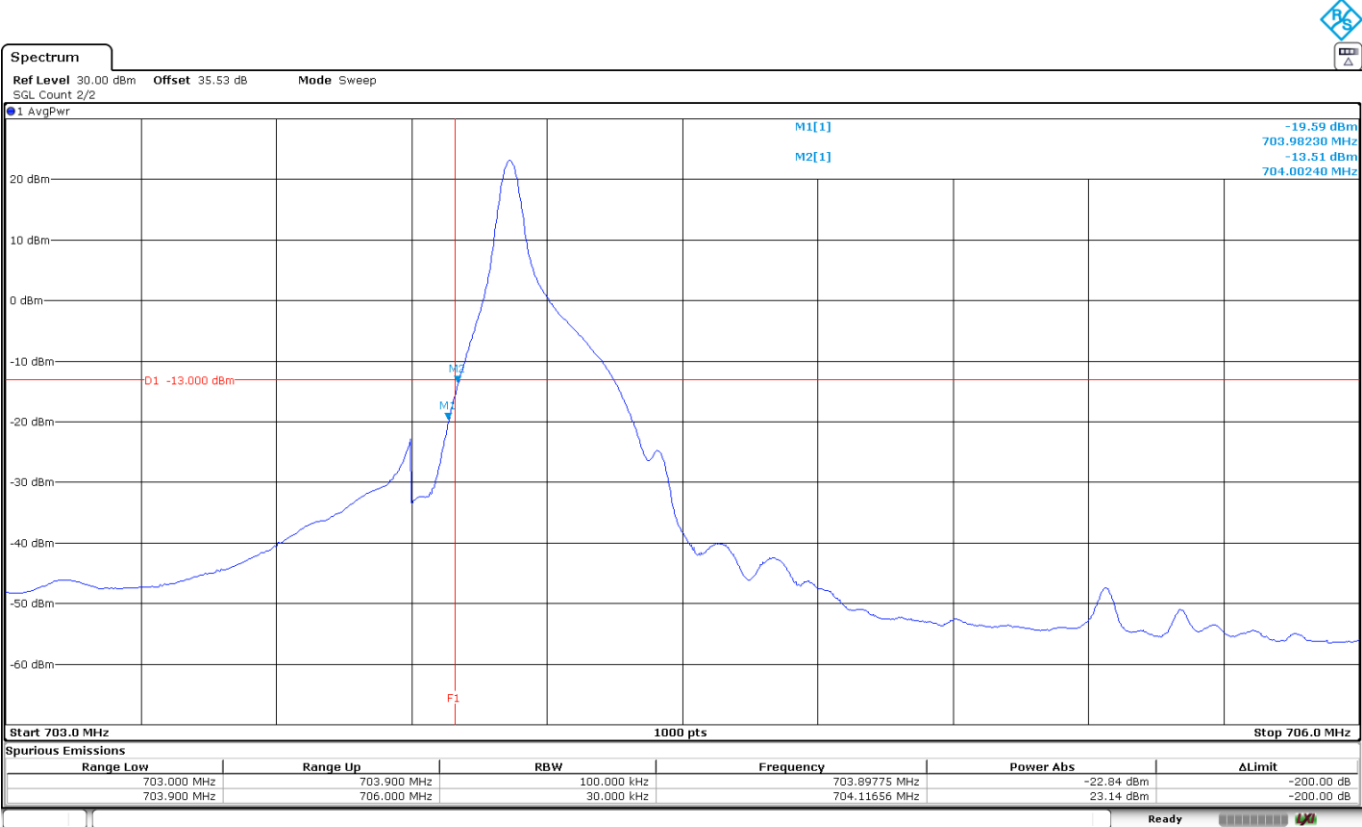

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 17. QPSK. BW=15 kHz. Tone Number=12. Tone Offset=0. MSC/TBS=5. Low Channel:

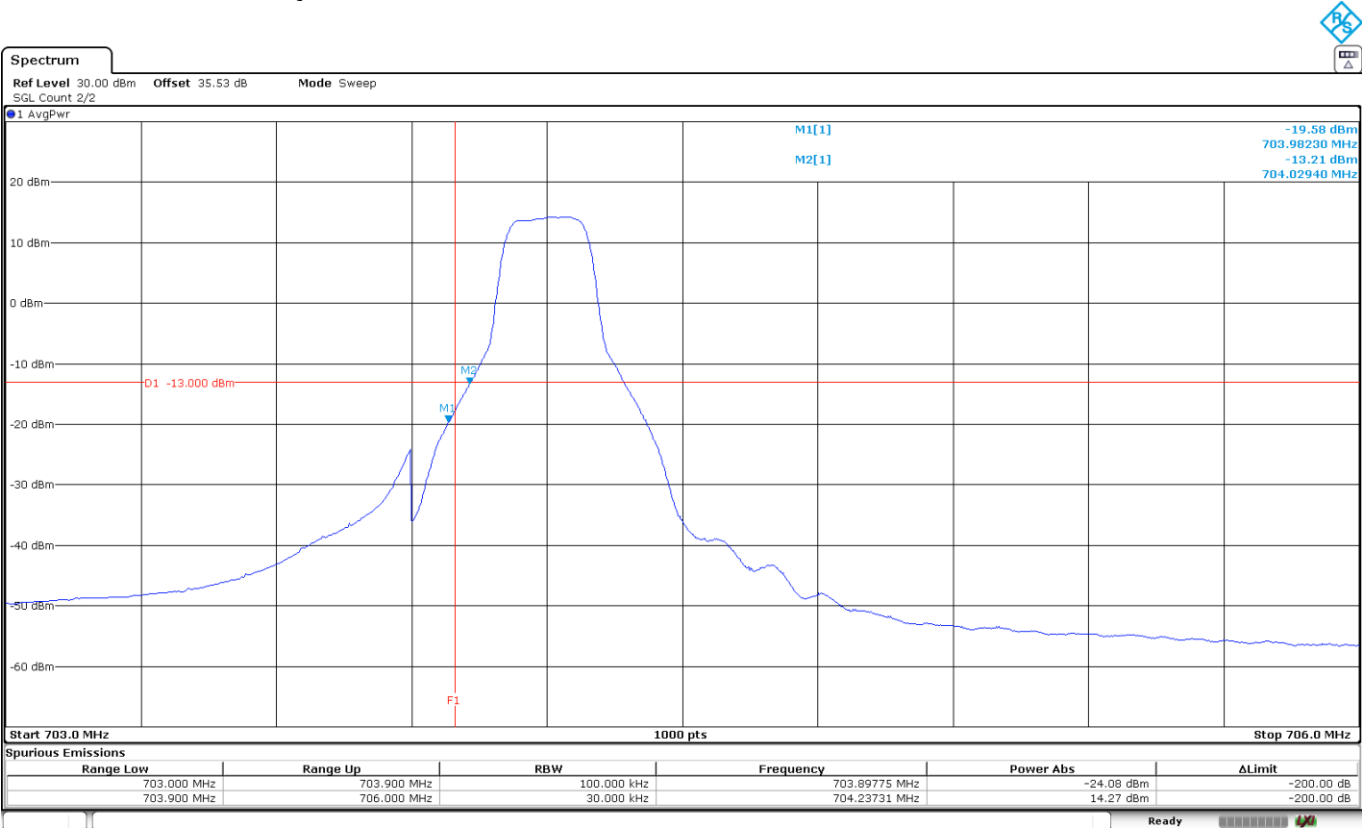

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 66:

Preliminary measurements determined the worst-case. Results attached are for this worst-case configuration.

LTE Cat NB1 Band 66	Pi/2-BPSK BW=3.75 kHz Tone Number=1 Tone Offset=0 MSC/TBS=0	Pi/2-BPSK BW=15 kHz Tone Number=1 Tone Offset=0 MSC/TBS=0	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)	-22.75	-22.65	-22.7

LTE Cat NB1 Band 66	Pi/2-BPSK BW=3.75 kHz Tone Number=1 Tone Offset=47 MSC/TBS=0	Pi/2-BPSK BW=15 kHz Tone Number=1 Tone Offset=11 MSC/TBS=0	QPSK BW=15 kHz Tone Number=12 Tone Offset=0 MSC/TBS=5
Maximum measured level at <u>High Block Edge</u> at antenna port (dBm)	-23.49	-23.6	-23.61


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat NB1 Band 66:

LTE Cat NB1 Band 66. Pi/2-BPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=0. Low Channel:

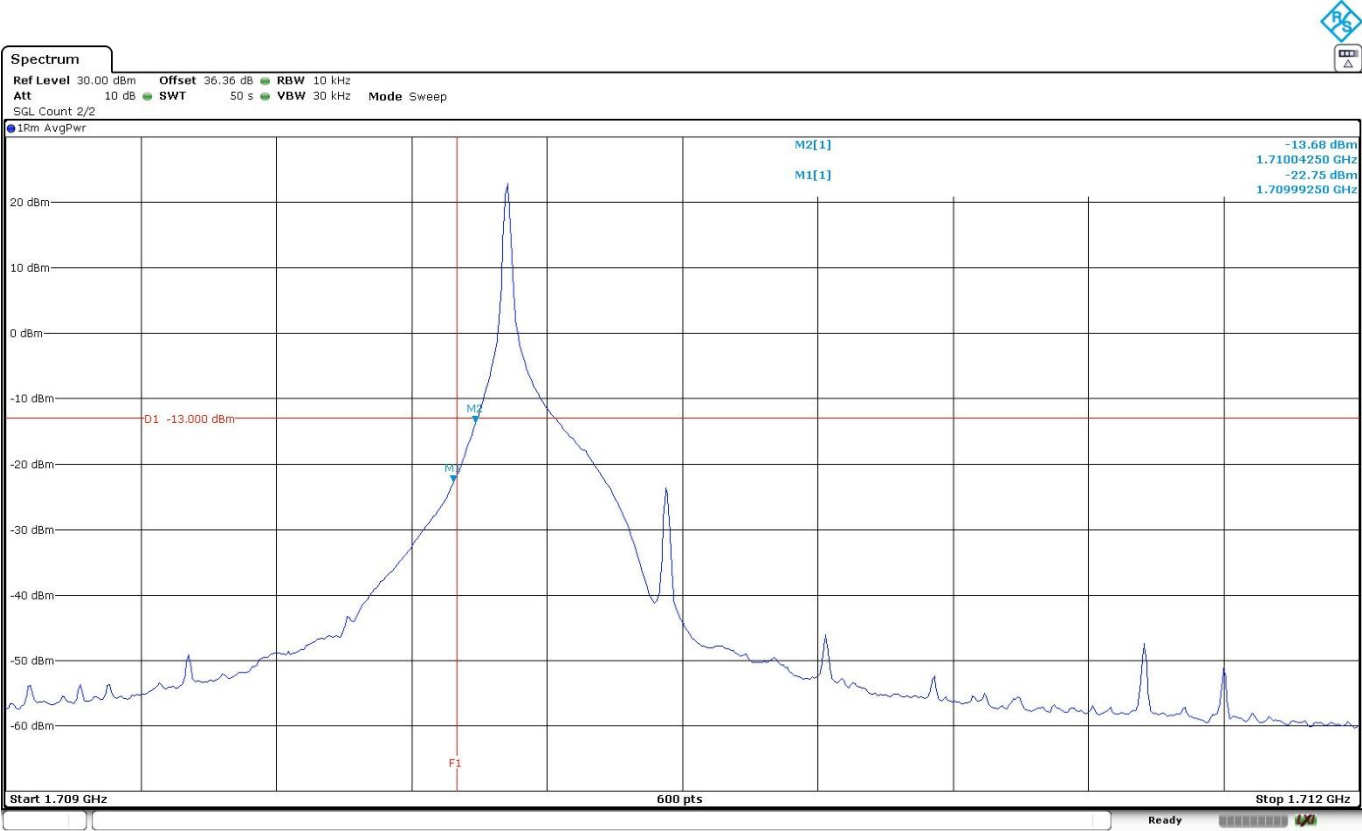

The equipment transmits at the maximum output power.


LTE Cat NB1 Band 66. Pi/2-BPSK. BW=3.75 kHz. Tone Number=1. Tone Offset=47. MSC/TBS=0. High Channel:

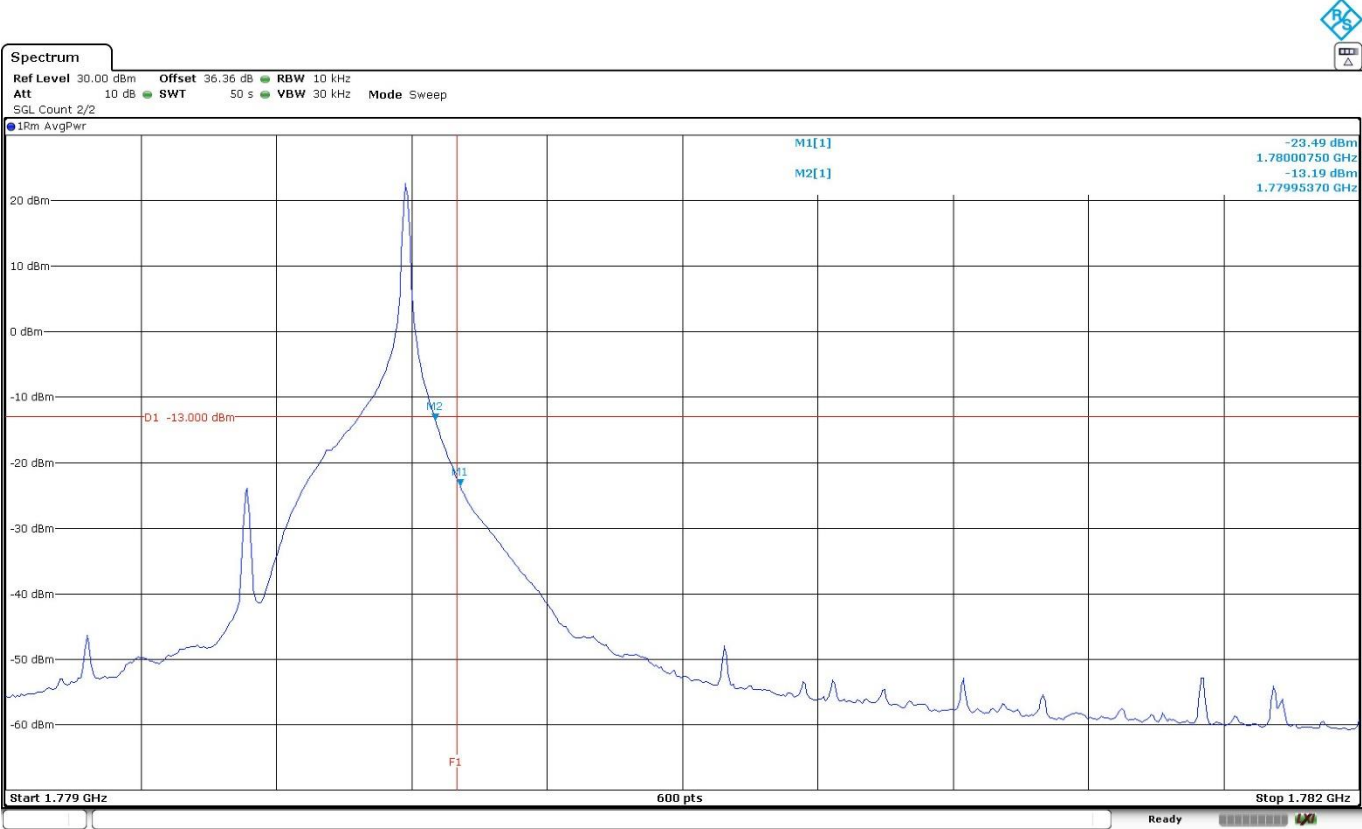

The equipment transmits at the maximum output power.




LTE Cat NB1 Band 66. Pi/2-BPSK. BW=15 kHz. Tone Number=1. Tone Offset=0. MSC/TBS=0. Low Channel:

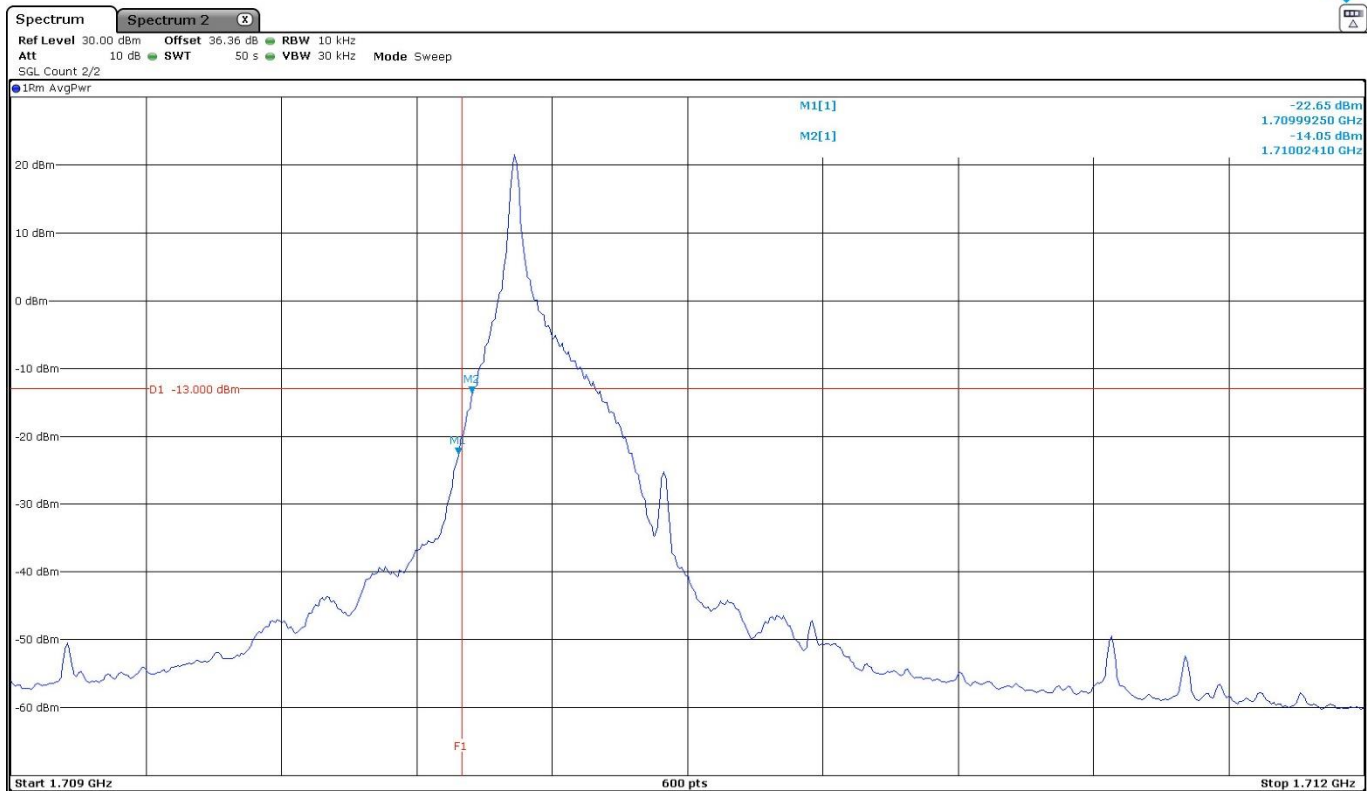

The equipment transmits at the maximum output power.

LTE Cat NB1 Band 66. Pi/2-BPSK. BW=15 kHz. Tone Number=1. Tone Offset=11. MSC/TBS=0. High Channel:

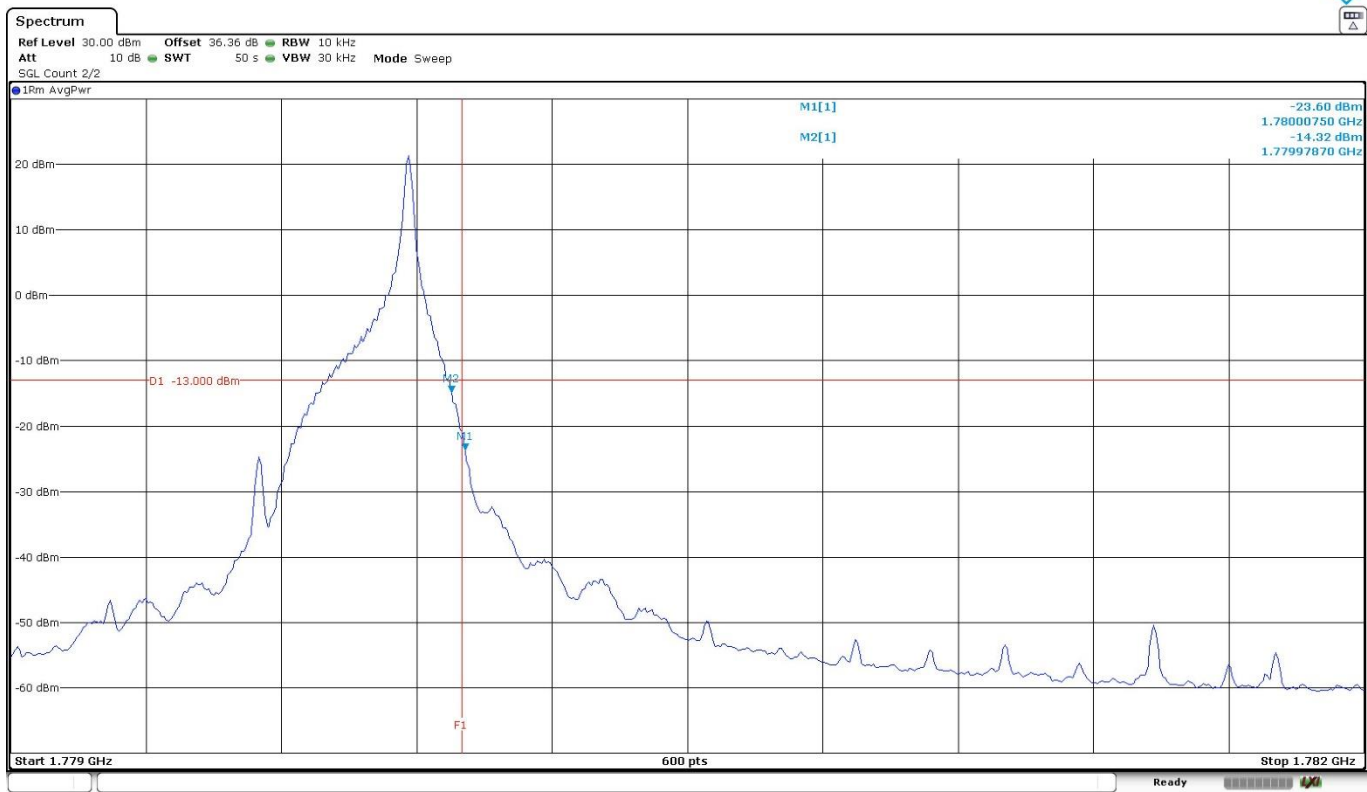

The equipment transmits at the maximum output power.