

承認書

SPECIFICATION FOR APPROVAL

客 戶:

CUSTOMER:

深圳市众和鑫电子有限公司

Shenzhen Zhonghe Xin Electronics Co., Ltd.

客 戶 料 號:

CUST P/N:

DXD 料 號:

DXD P/N:

產 品 型 號:

DESC:

A11/G43 * 5 * 0.65mm - 10mm Inner diameter: 20.5,

Number of turns: 10TS, 0.08 * 24 * 2P, 6.6 inches

日 期:

DATE:

2025-8-09

版 本:

Version:

A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
饶志鹏 (Zhipeng Rao)	许艳 (Yan Xu)	谢良 (Liang Xie)	

Address: 5th Floor, Building D, New Yongfeng Tianxin Industrial Park, Fengzheng Road, Kengwei Avenue, Shangwu Community, Shiyan Street, Bao'an District, Shenzhen City


Version Change History

[illegible]

SPECIFICATION


產 品 型 號: DESC	A11/G43 * 5 * 0.65mm - 10mm inner diameter 20.5 turns 10TS 0.08 * 24 * 2P 6.6UH	版本 Rev: A.0	客 戶 CUST:	众和鑫 (Zhonghe Xin)
			客户料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

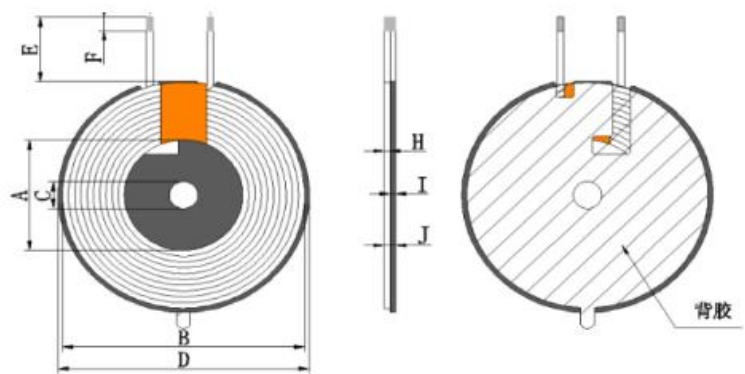

A	20.5±0.5 mm
B	38.5±1 mm
C	5±0.5 mm
D	43.5±0.5 mm
E	10±2 mm
F	4±1 mm
I	0.65±0.1 mm
H	0.8Max
J	1.6±Max

二、产品参考图 SCHEMATIC DIAGRAM:

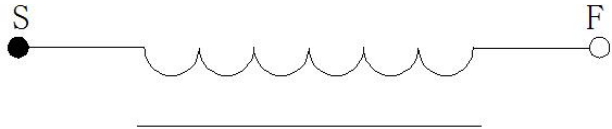

- Note:
- 1.Crossing out of the competition;
 - 2.The size of the magnetic disk is 43.5 ± 0.5 mm, and its thickness is 0.65 ± 0.1 mm.
 - 3.The back of the magnetic disk is coated with adhesive.
 - 4.Wrap the coil with 7mm brown tape and wind it 1.5 times.

SPECIFICATION

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
L1	S	F	0.08*24*2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10%	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.6uH ±10%	100KHz/1.0V	LCZ METER 1062B
3	Q 值	S-F	35MIN	100KHz/1.0V	LCZ METER 1062B
4	DCR	S-F	≤50m Ω	100KHz/1.0V	LCZ METER 1062B

拟制/日期 (Draft / Date)	审核/日期 (Review / Date)
饶志鹏(Zhipeng Rao) 2025-8-09	