



Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5180MHz by 802.11ac(20MHz)	

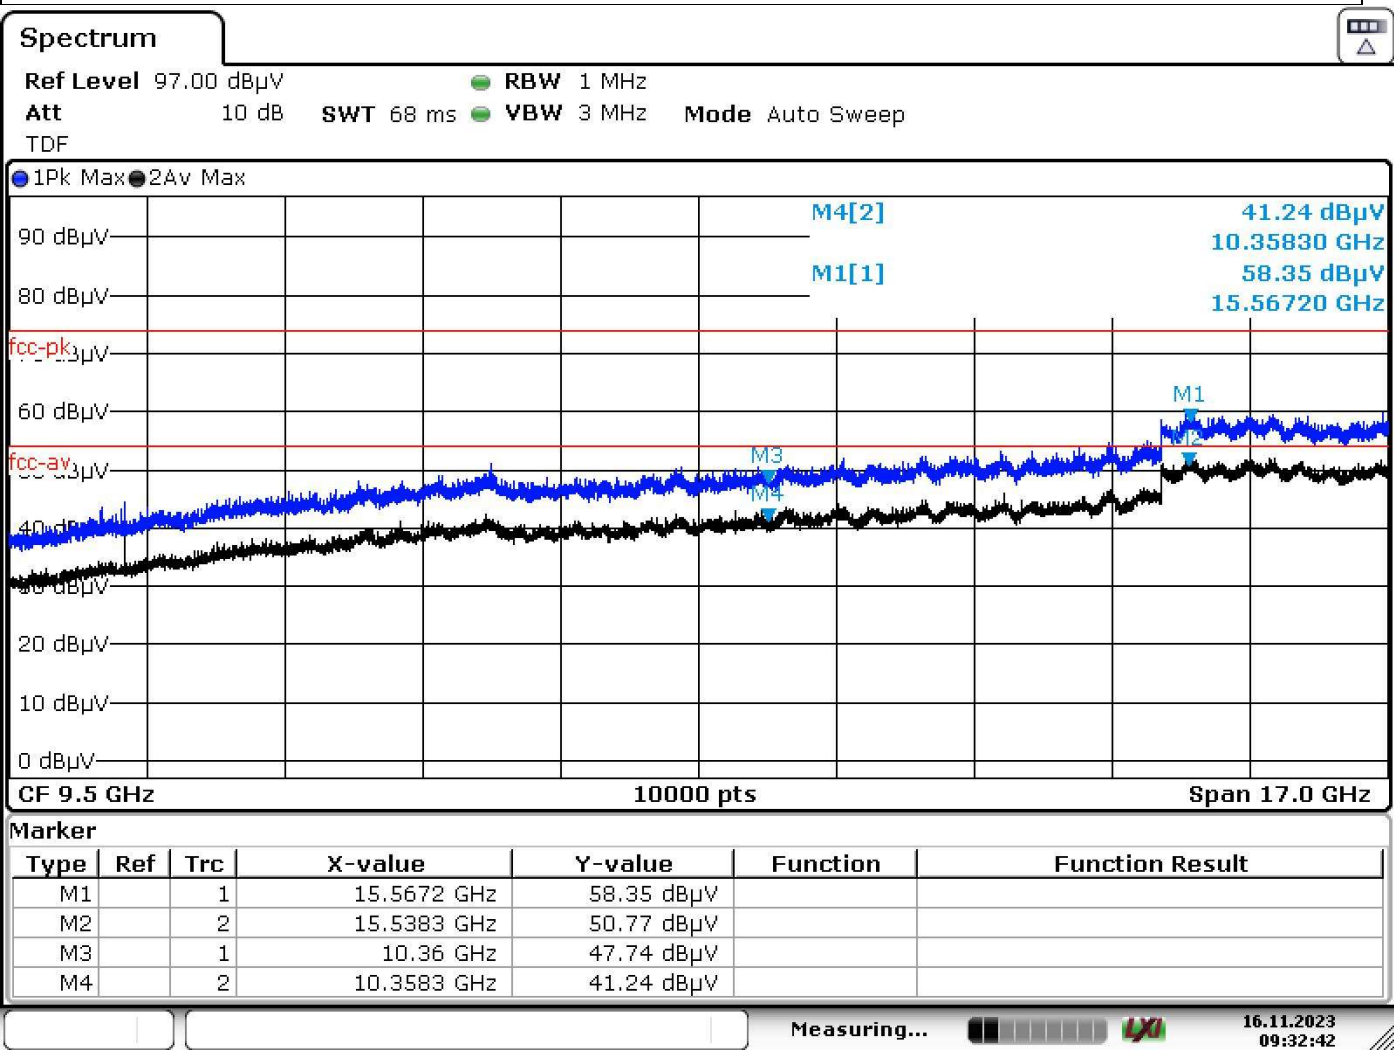

Date: 16.NOV.2023 09:32:42

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5240MHz by 802.11ac(20MHz)	

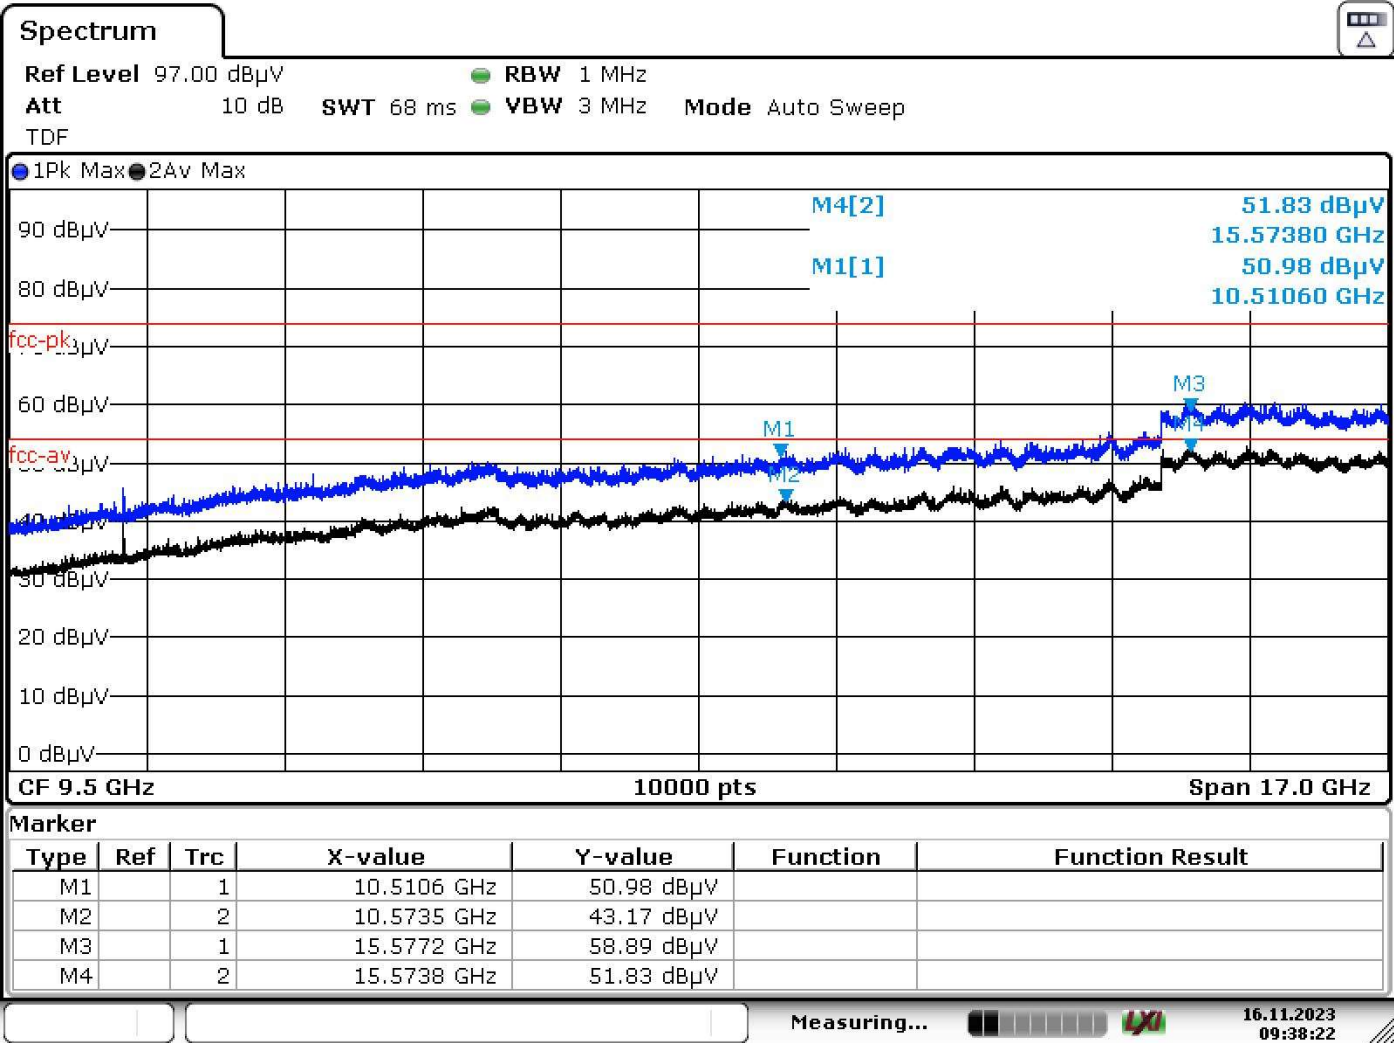

Date: 16.NOV.2023 09:38:22

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5240MHz by 802.11ac(20MHz)	

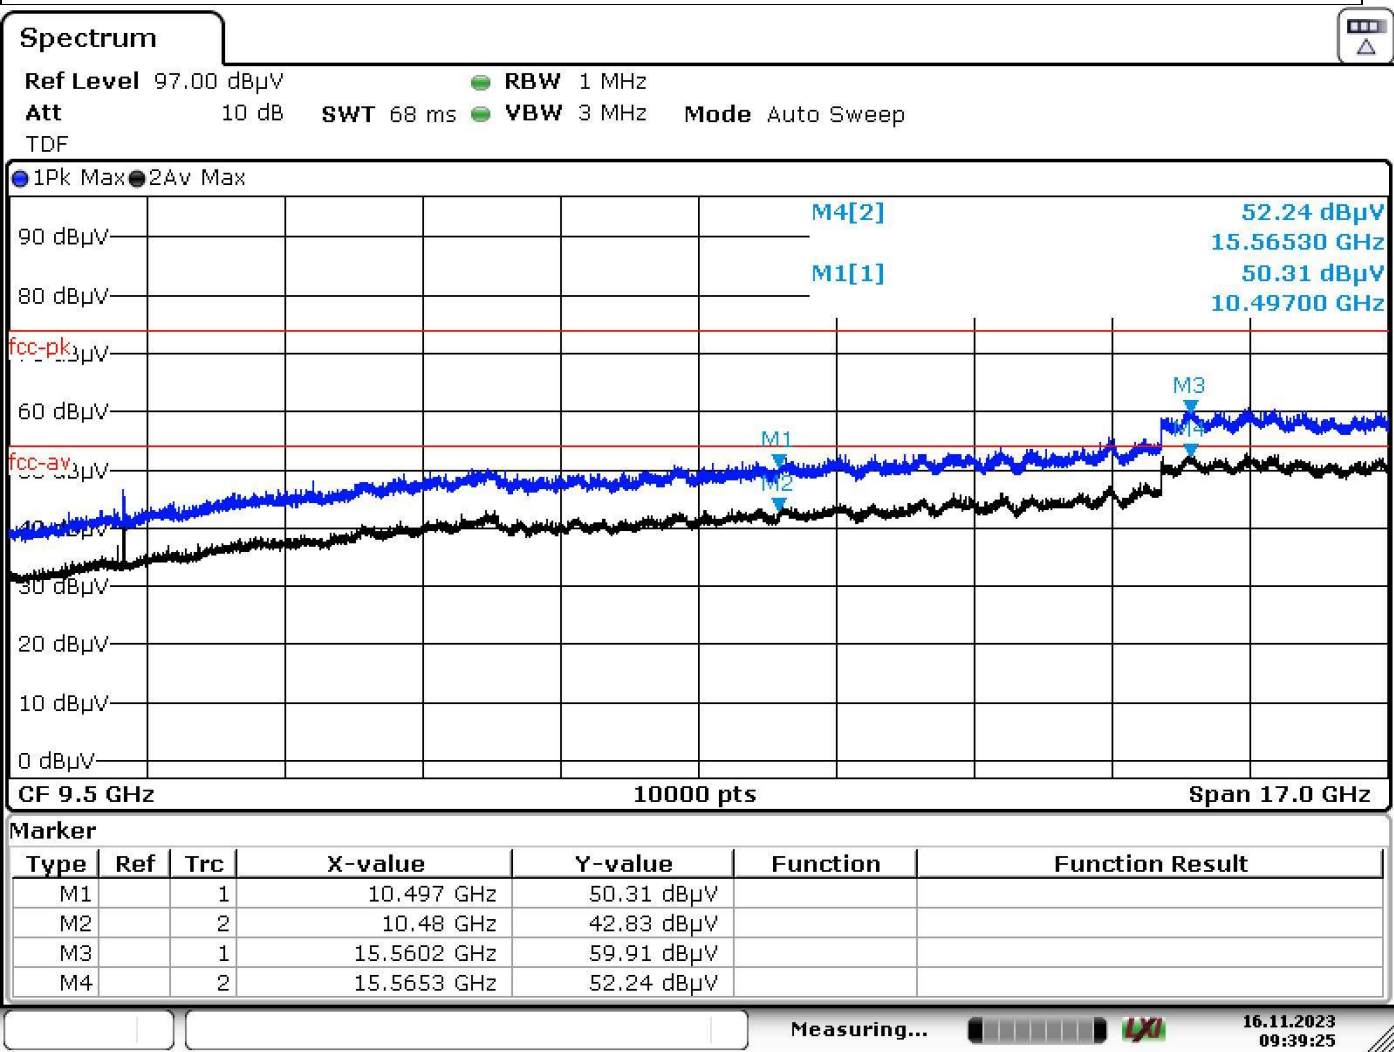

Date: 16.NOV.2023 09:39:25

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Profile: 4909379.59	Page No.: 239
Engineer: Yuliu	
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5260MHz by 802.11ac(20MHz)	

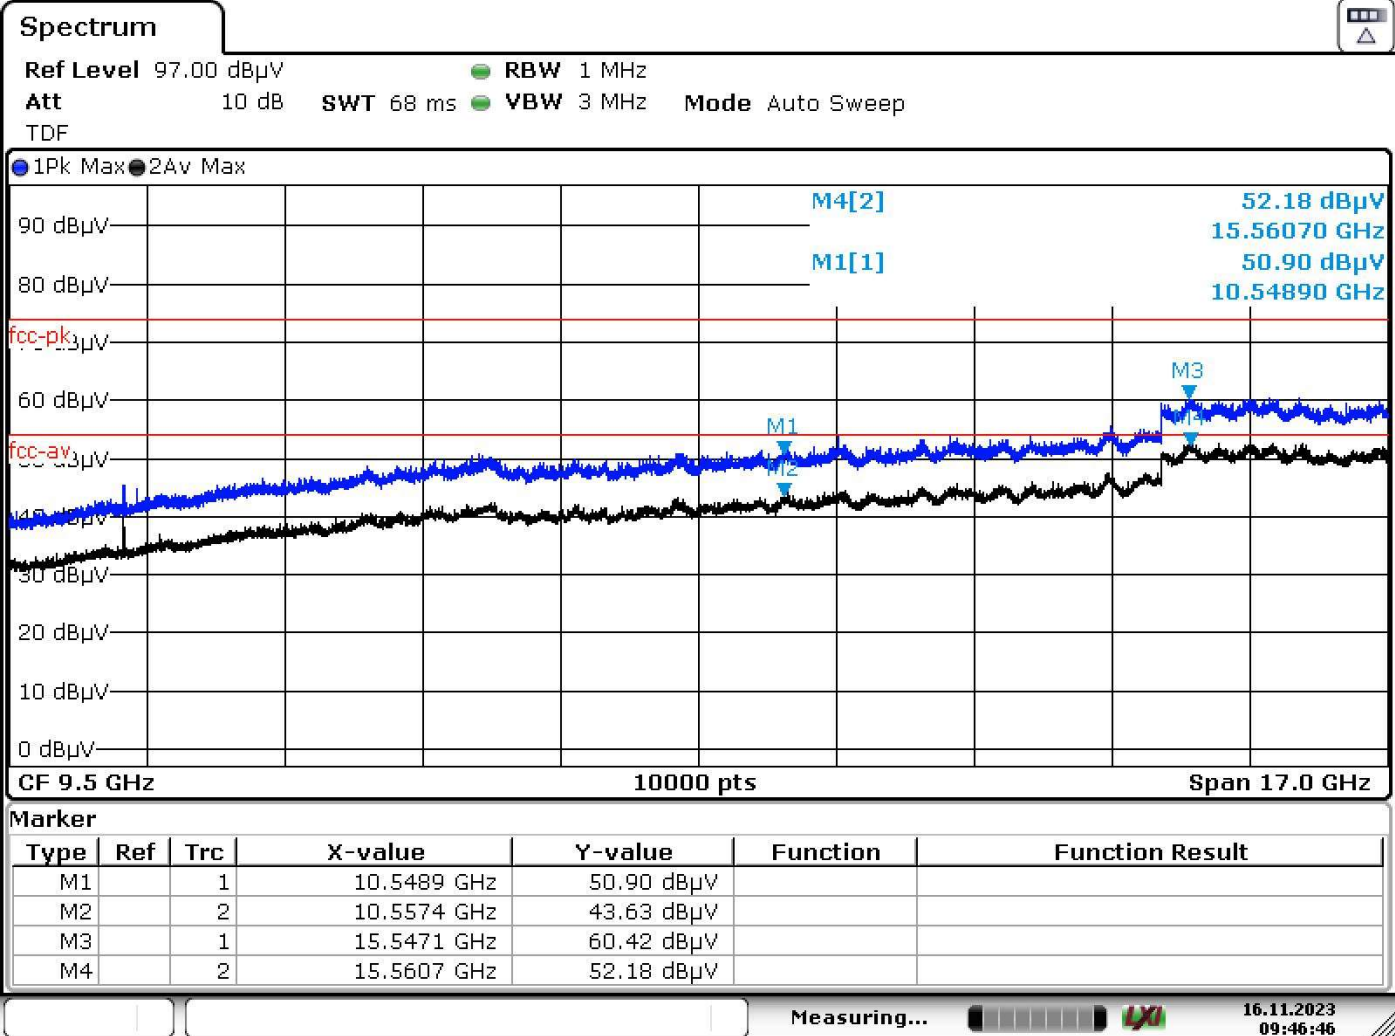

Date: 16.NOV.2023 09:46:45

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5260MHz by 802.11ac(20MHz)	

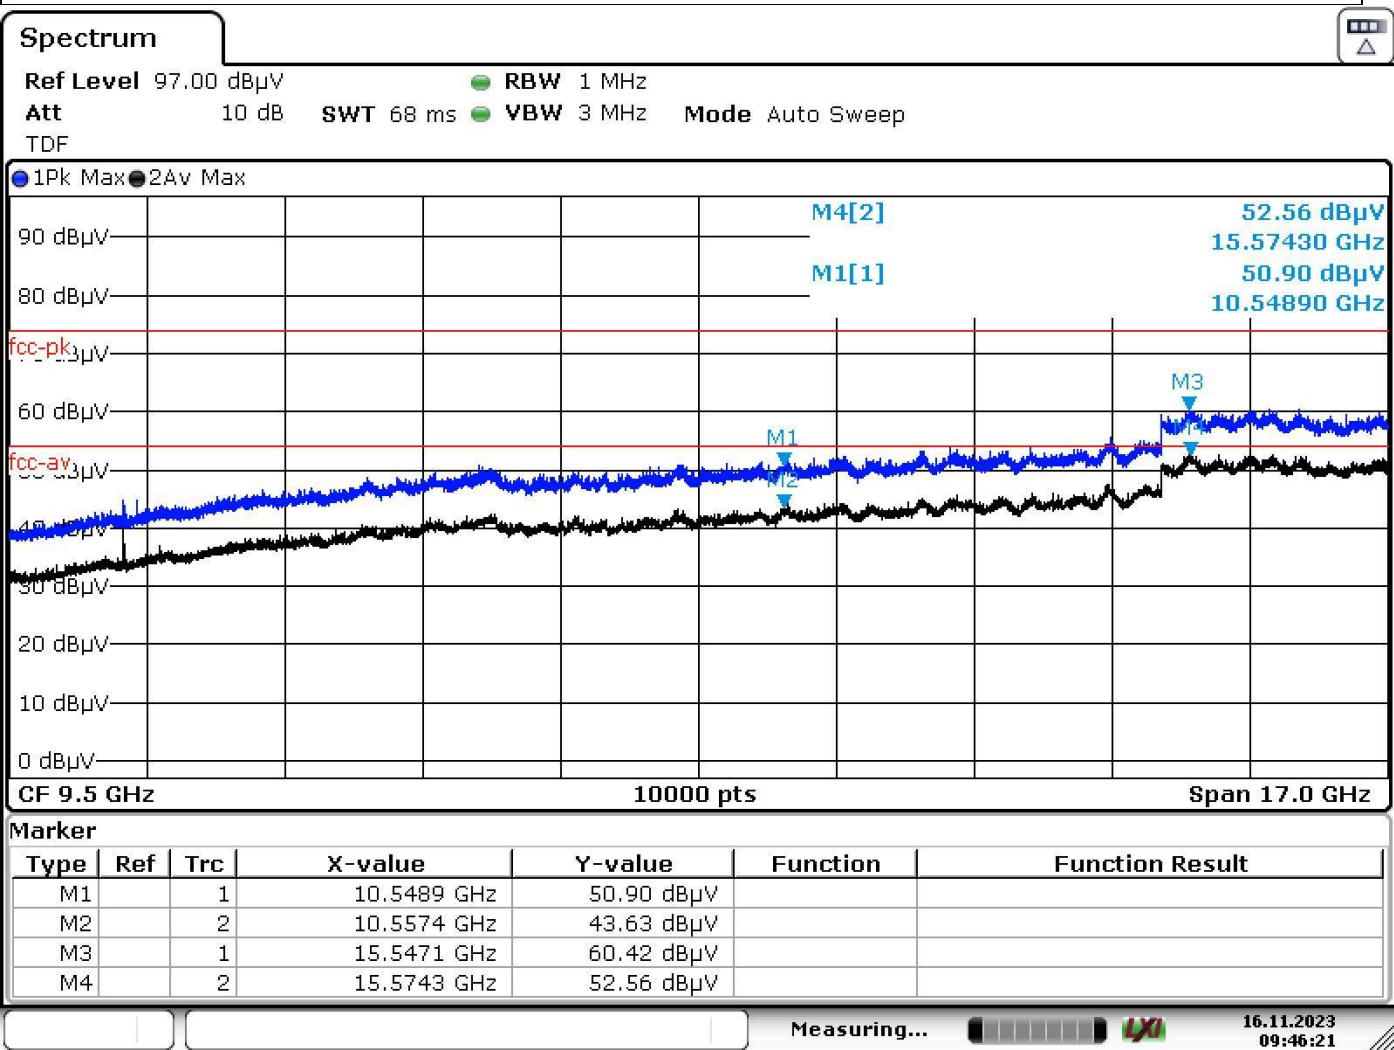

Date: 16.NOV.2023 09:46:21

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5320MHz by 802.11ac(20MHz)	

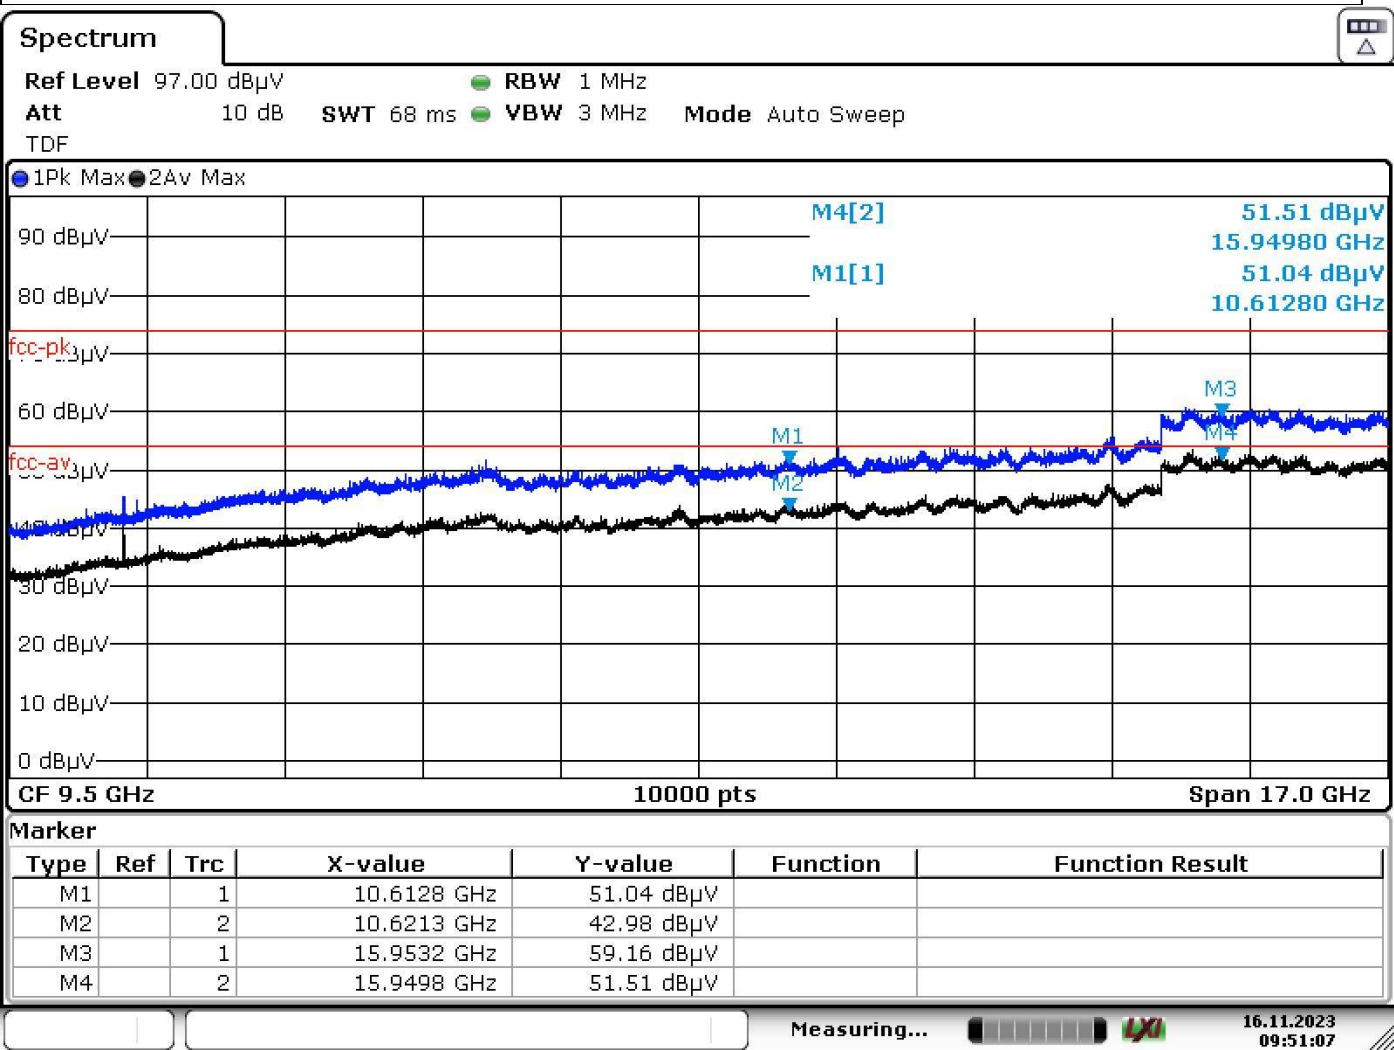

Date: 16.NOV.2023 09:51:08

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5320MHz by 802.11ac(20MHz)	

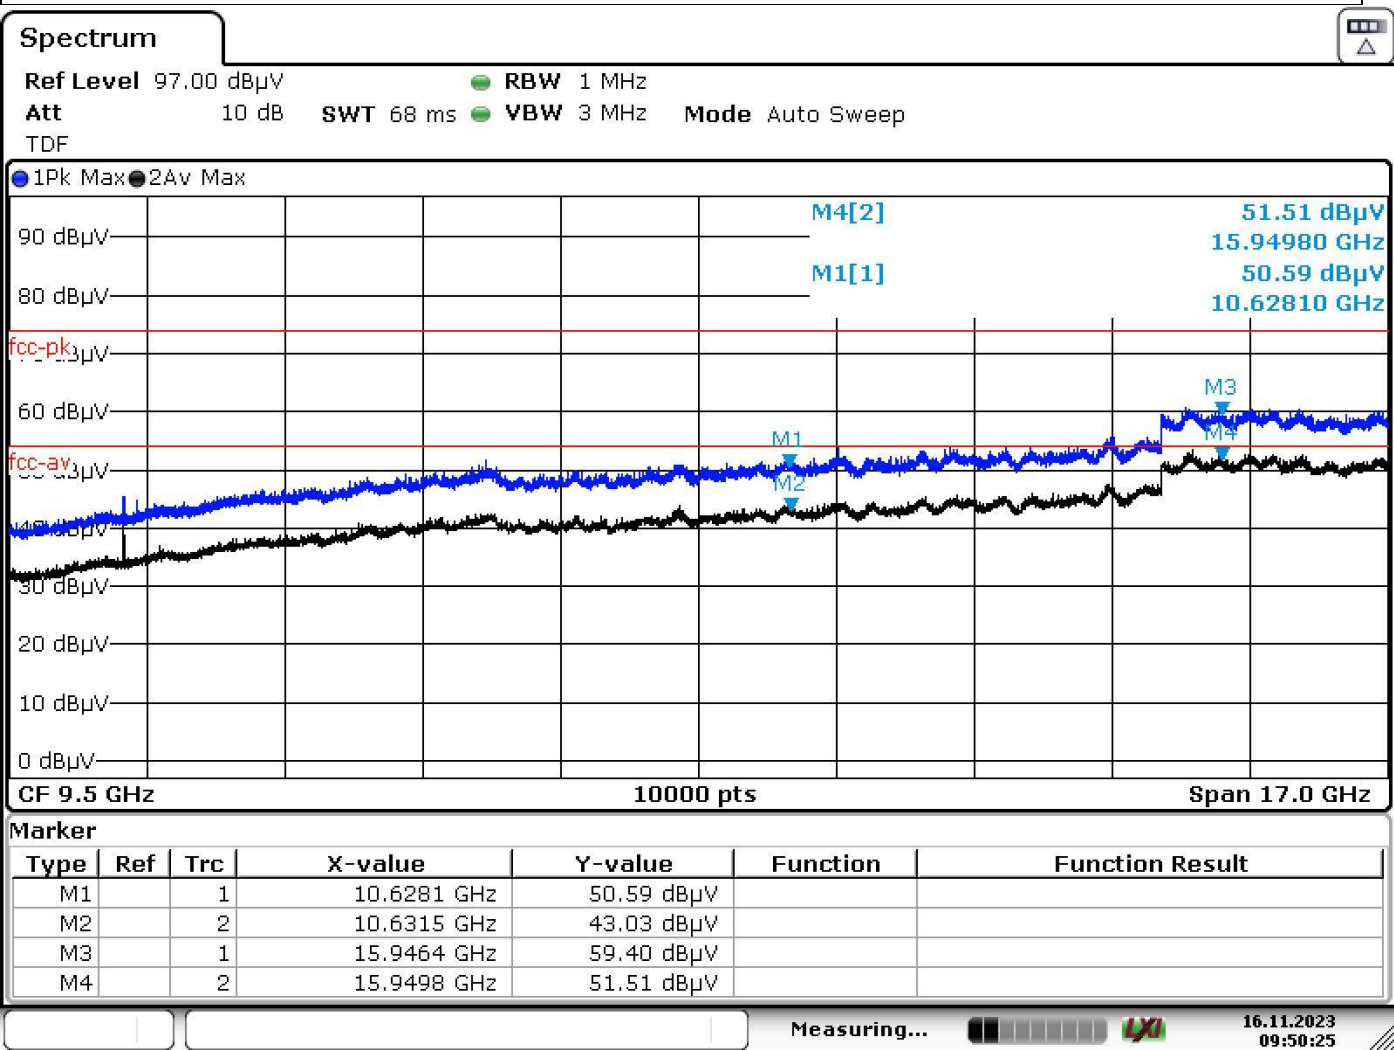

Date: 16.NOV.2023 09:50:25

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5500MHz by 802.11ac(20MHz)	

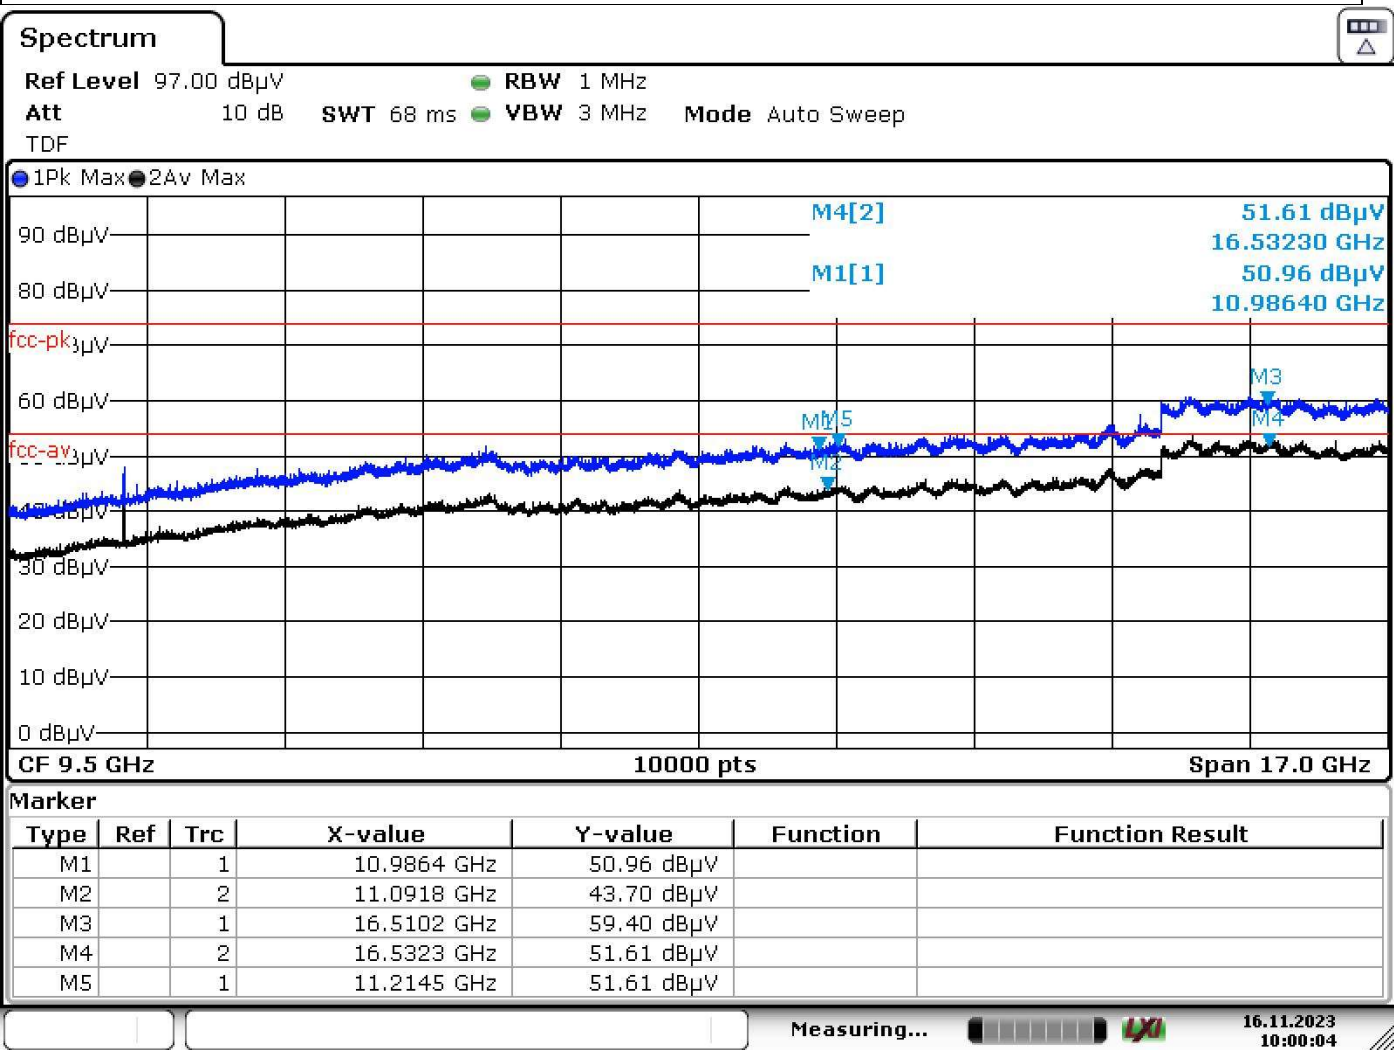

Date: 16.NOV.2023 10:00:04

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5500MHz by 802.11ac(20MHz)	

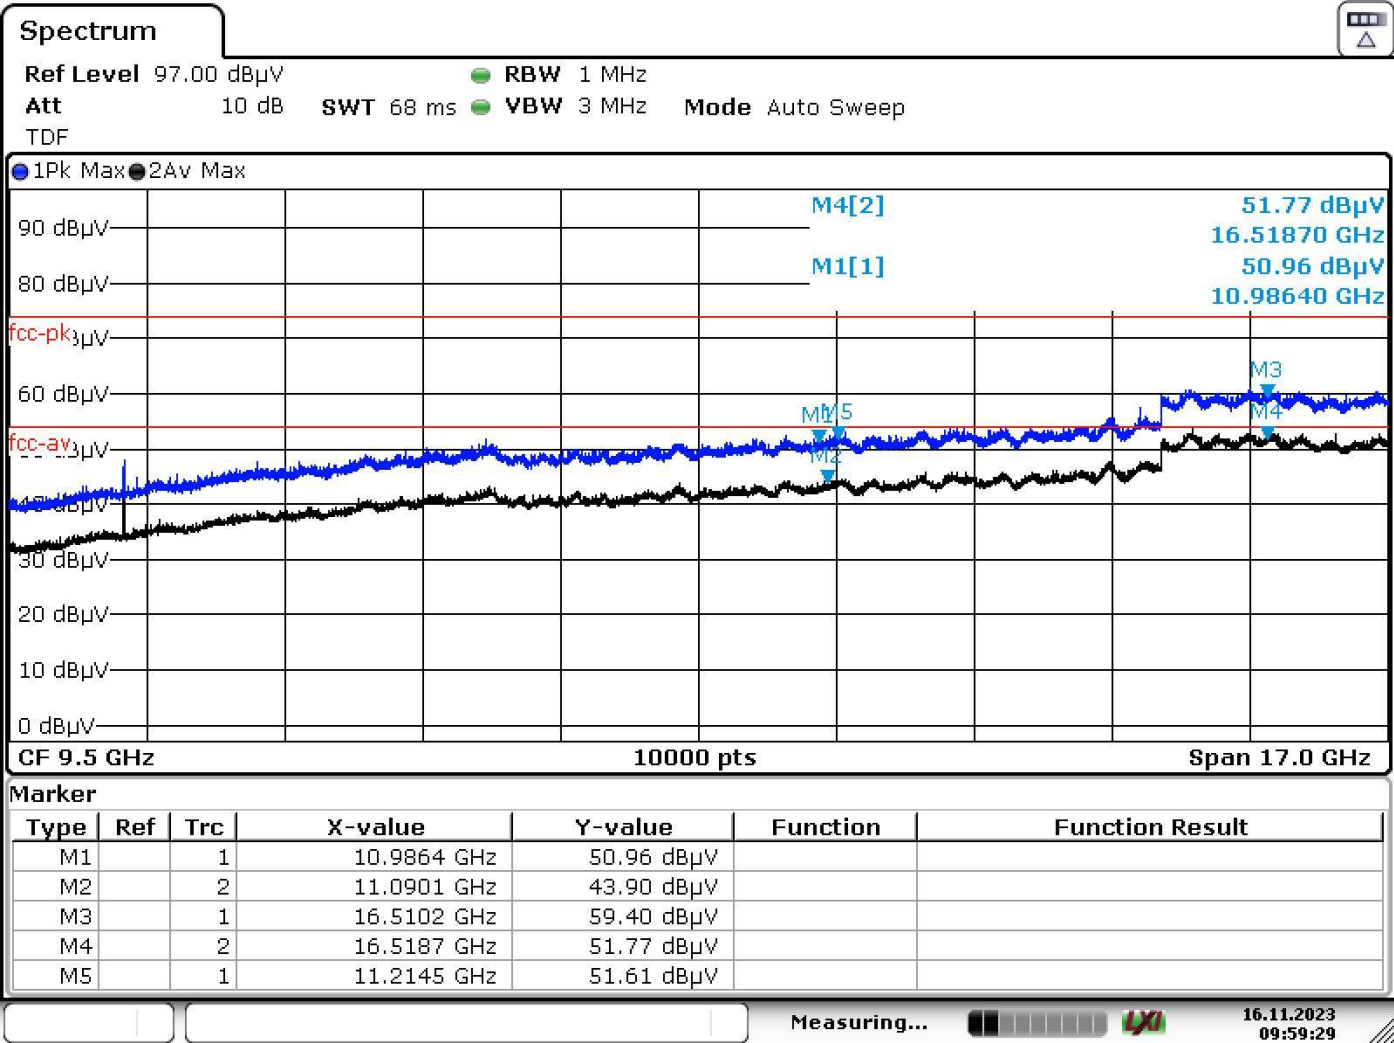

Date: 16.NOV.2023 09:59:29

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5700MHz by 802.11ac(20MHz)	

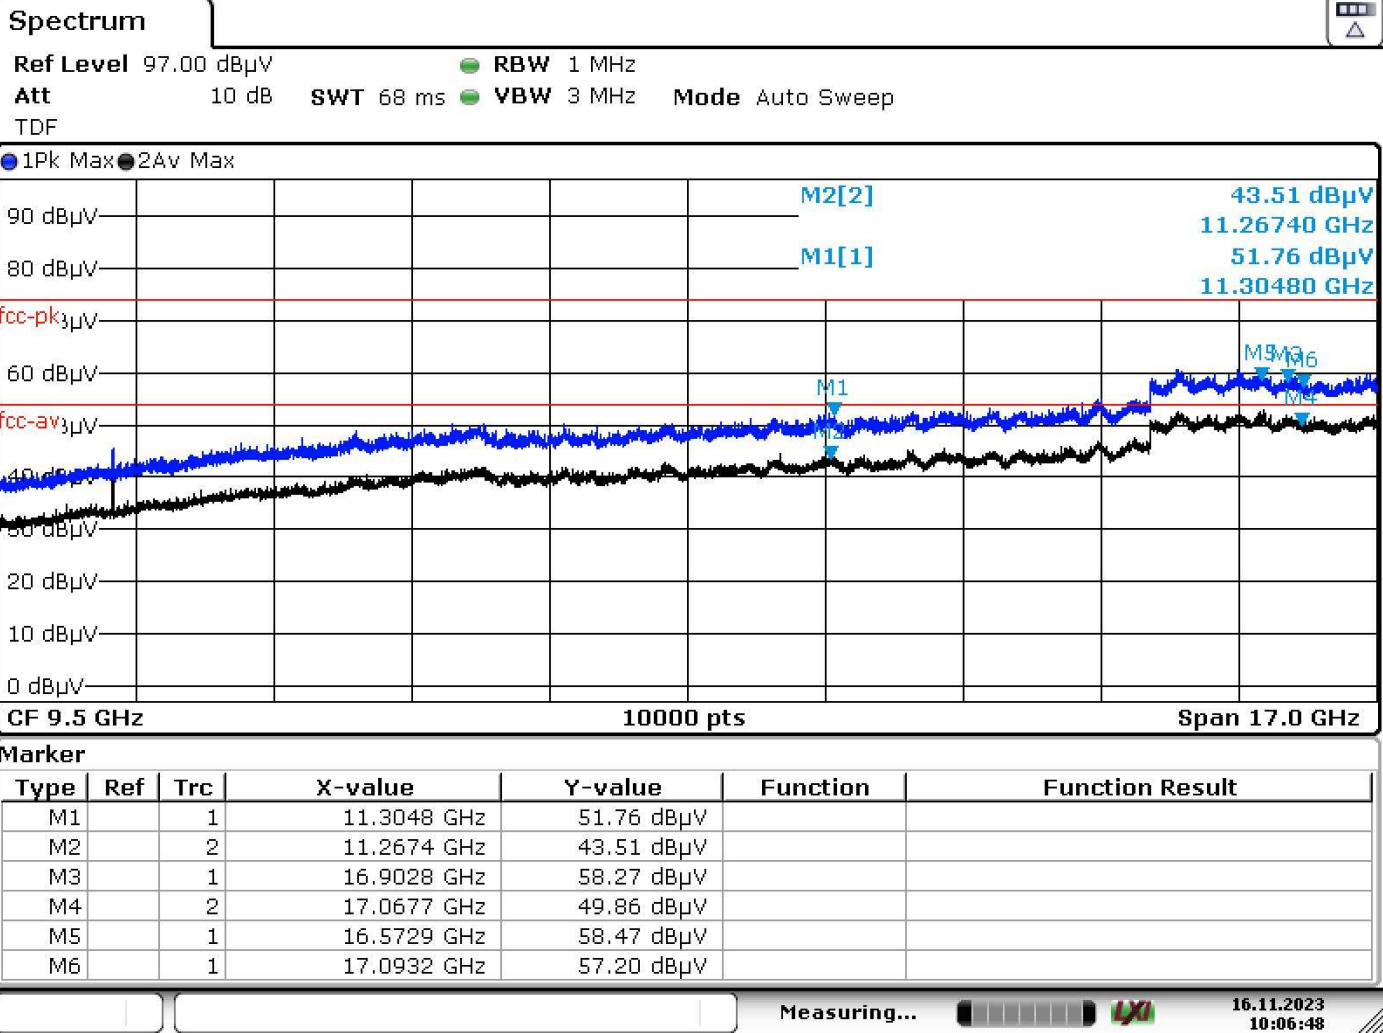

Date: 16.NOV.2023 10:06:48

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5700MHz by 802.11ac(20MHz)	

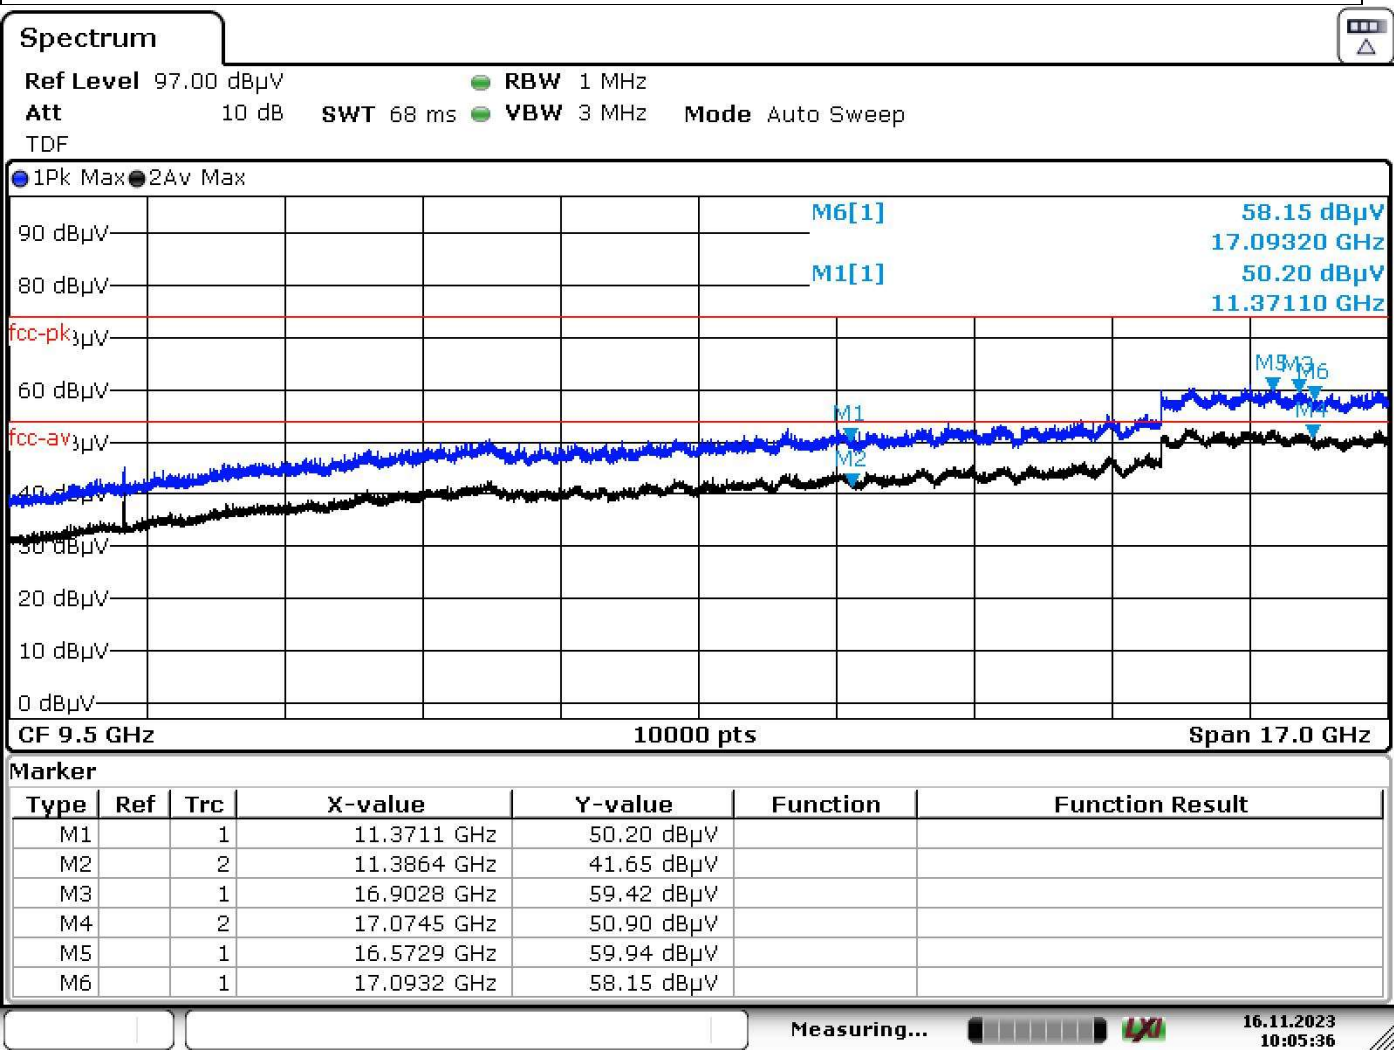

Date: 16.NOV.2023 10:05:37

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5745MHz by 802.11ac(20MHz)	

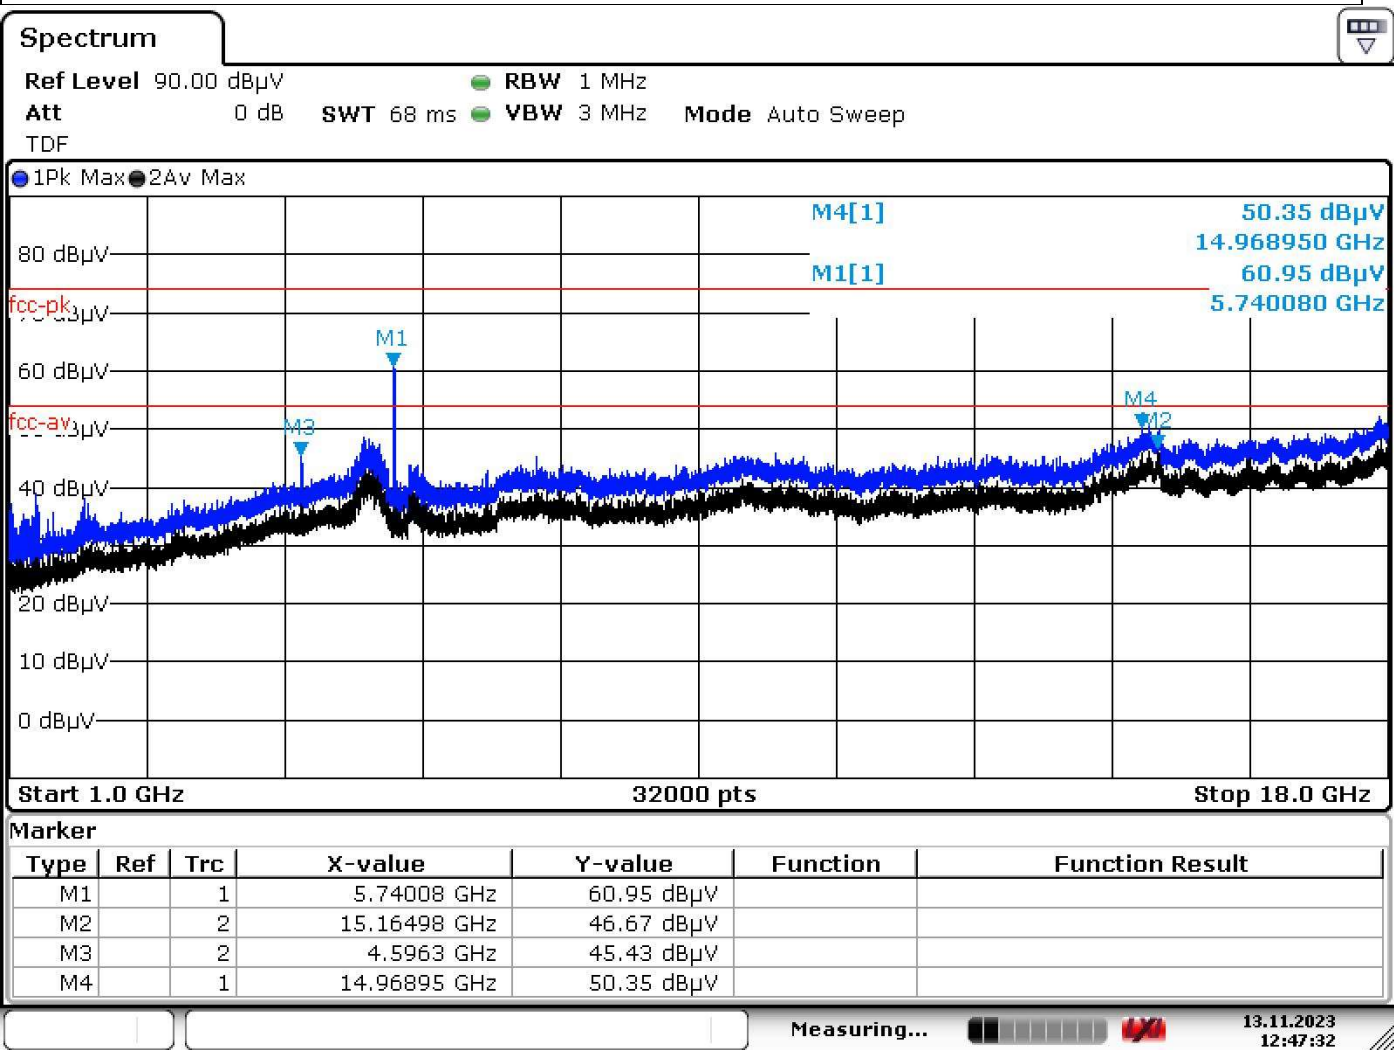

Date: 13.NOV.2023 12:47:32

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5745MHz by 802.11ac(20MHz)	

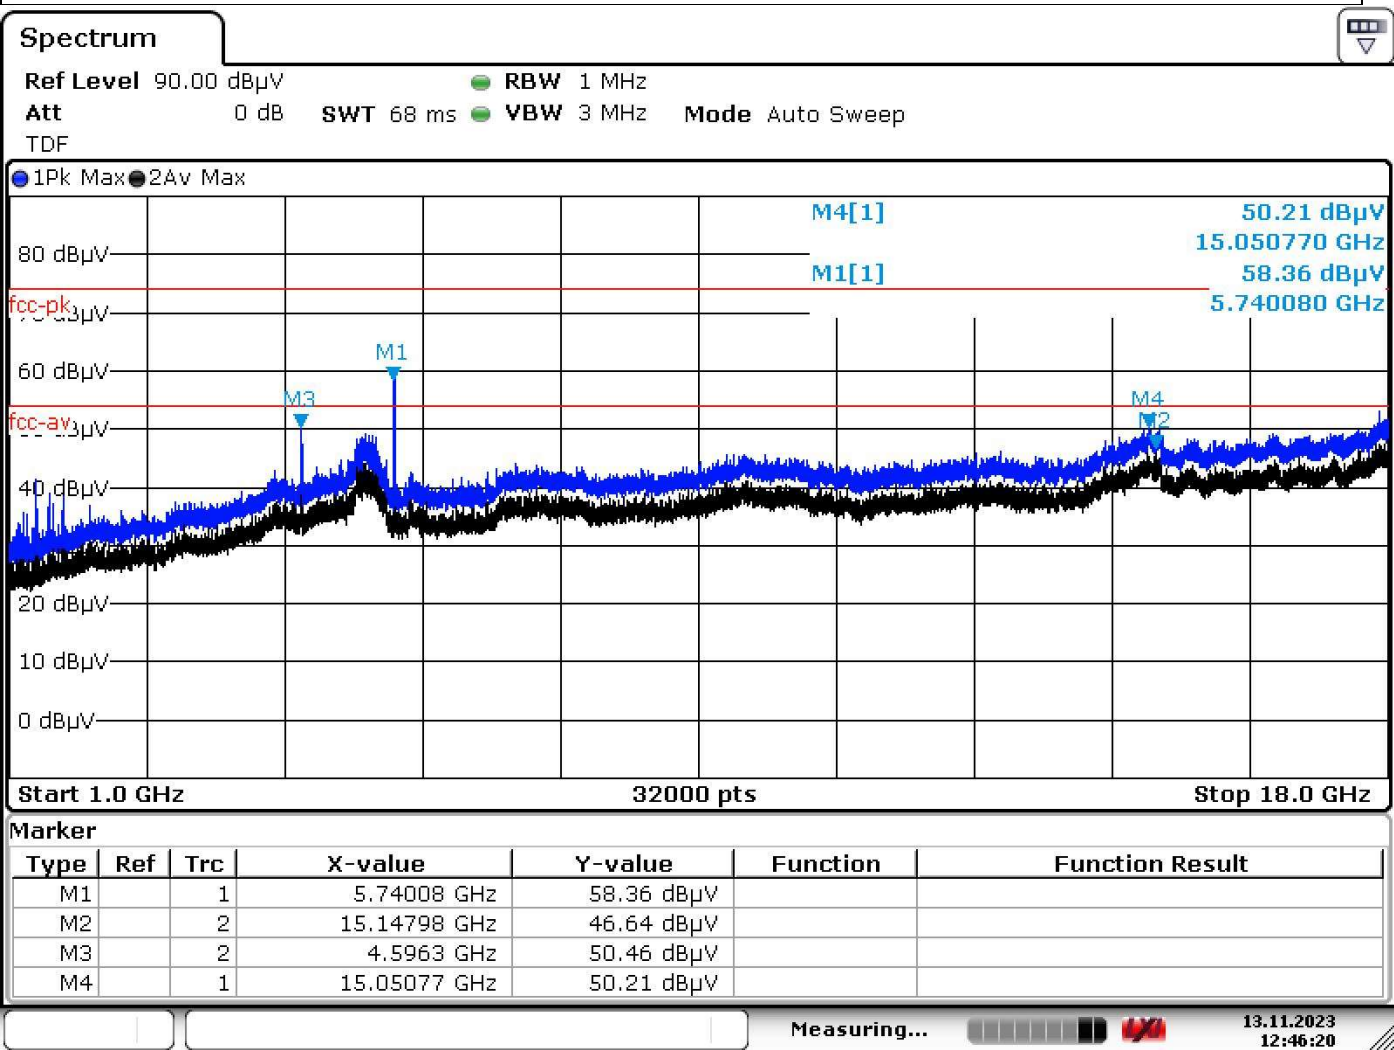

Date: 13.NOV.2023 12:46:20

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5825MHz by 802.11ac(20MHz)	

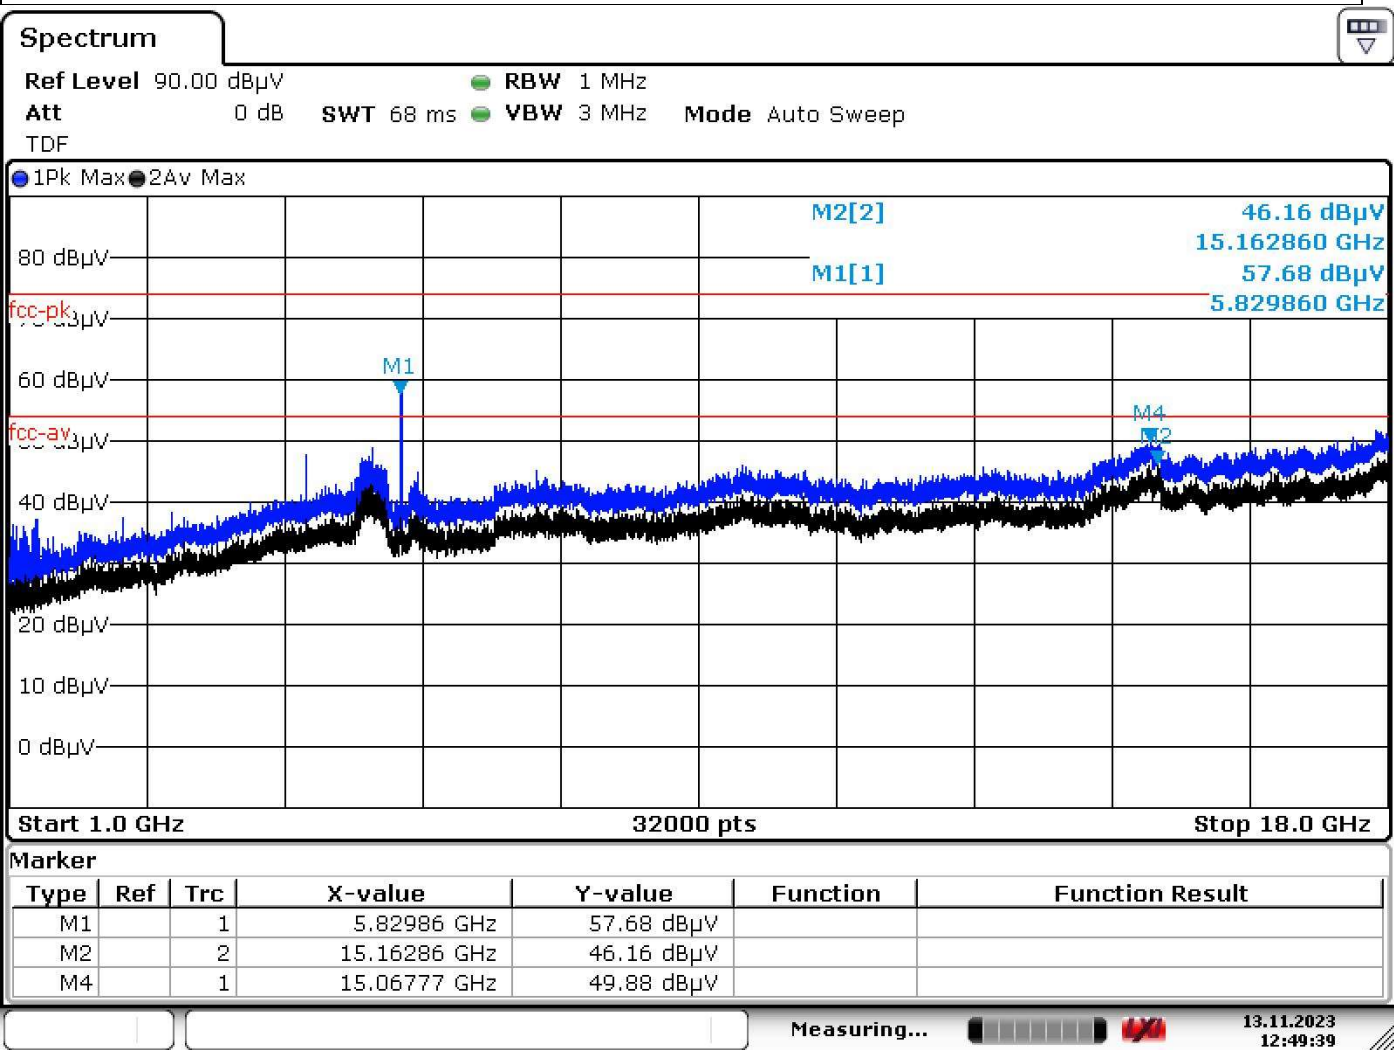

Date: 13.NOV.2023 12:49:39

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 4 : Transmit at 5825MHz by 802.11ac(20MHz)	

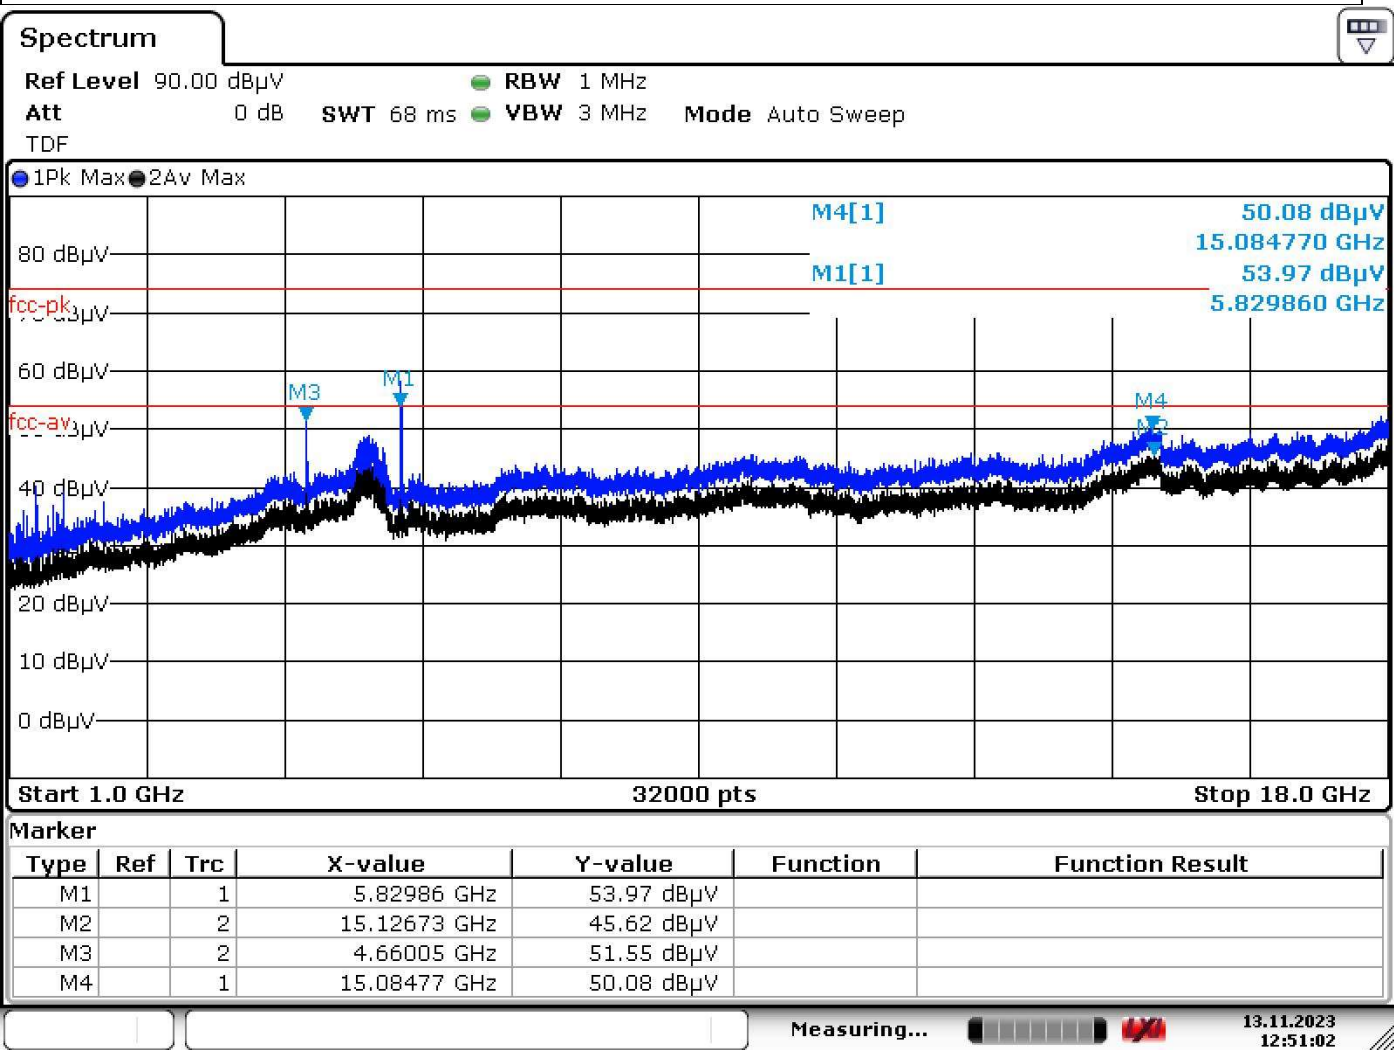

Date: 13.NOV.2023 12:51:01

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5190MHz by 802.11ac(40MHz)	

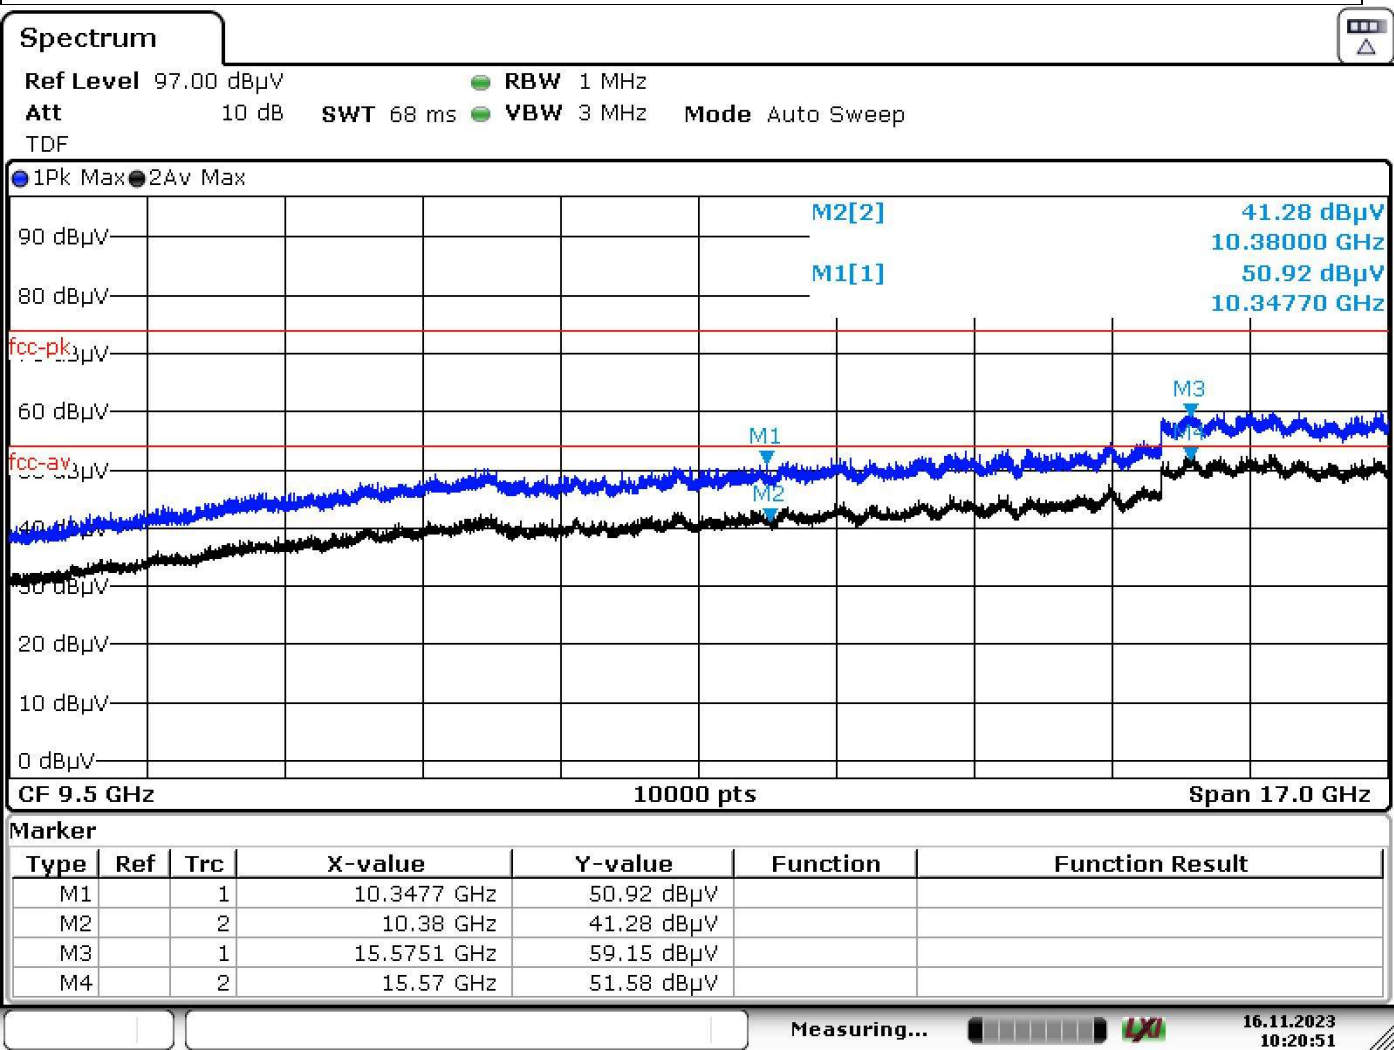

Date: 16.NOV.2023 10:20:51

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5190MHz by 802.11ac(40MHz)	

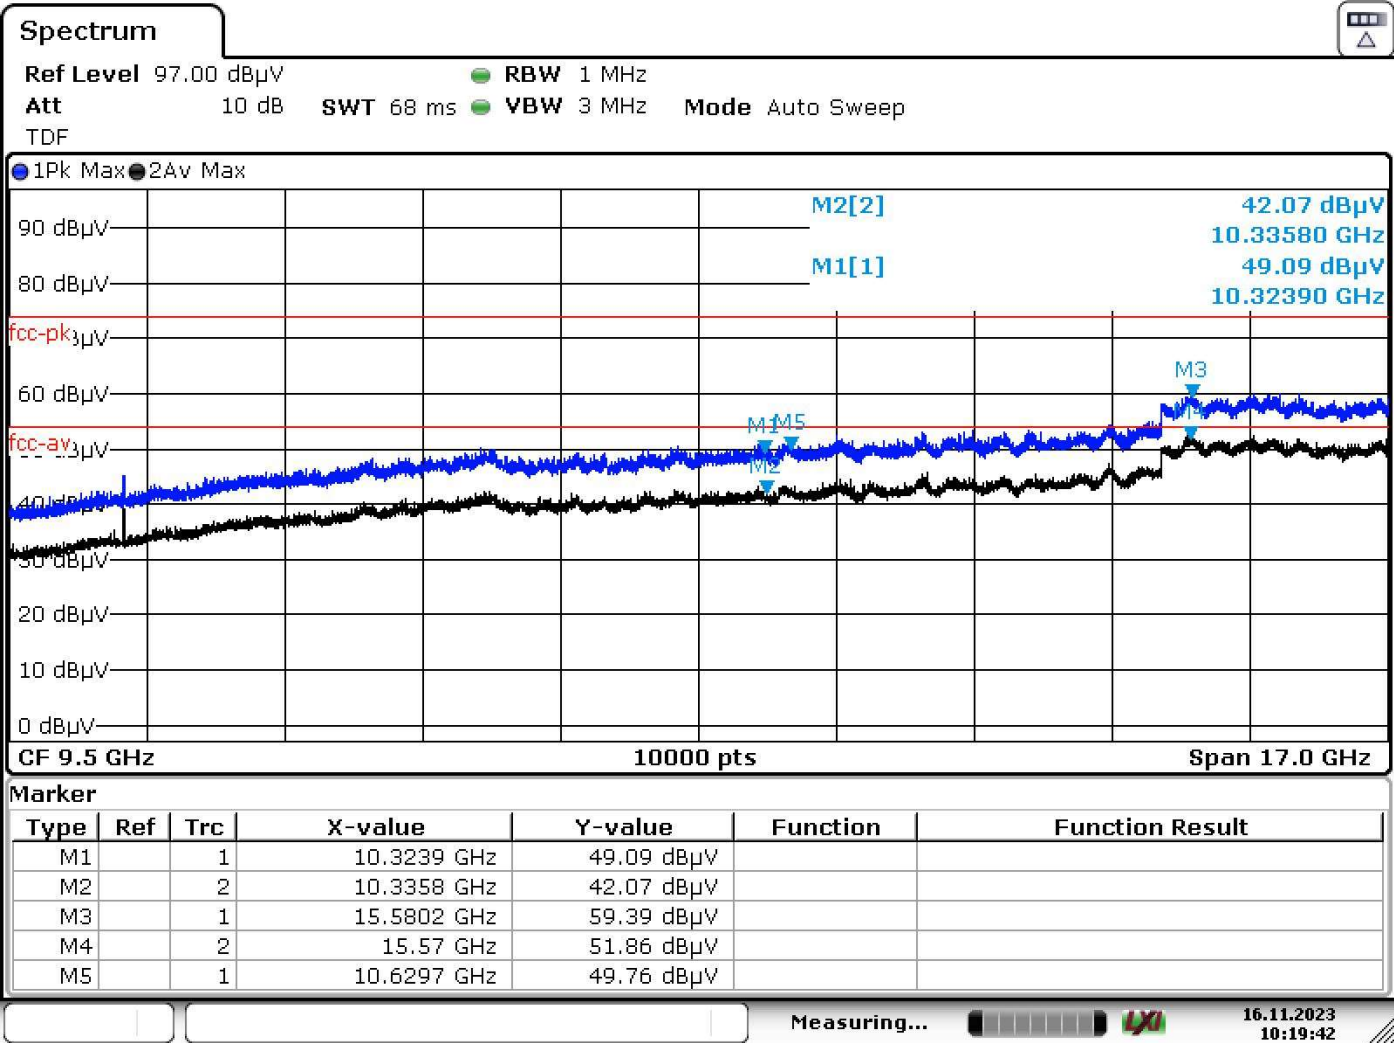

Date: 16.NOV.2023 10:19:42

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5230MHz by 802.11ac(40MHz)	

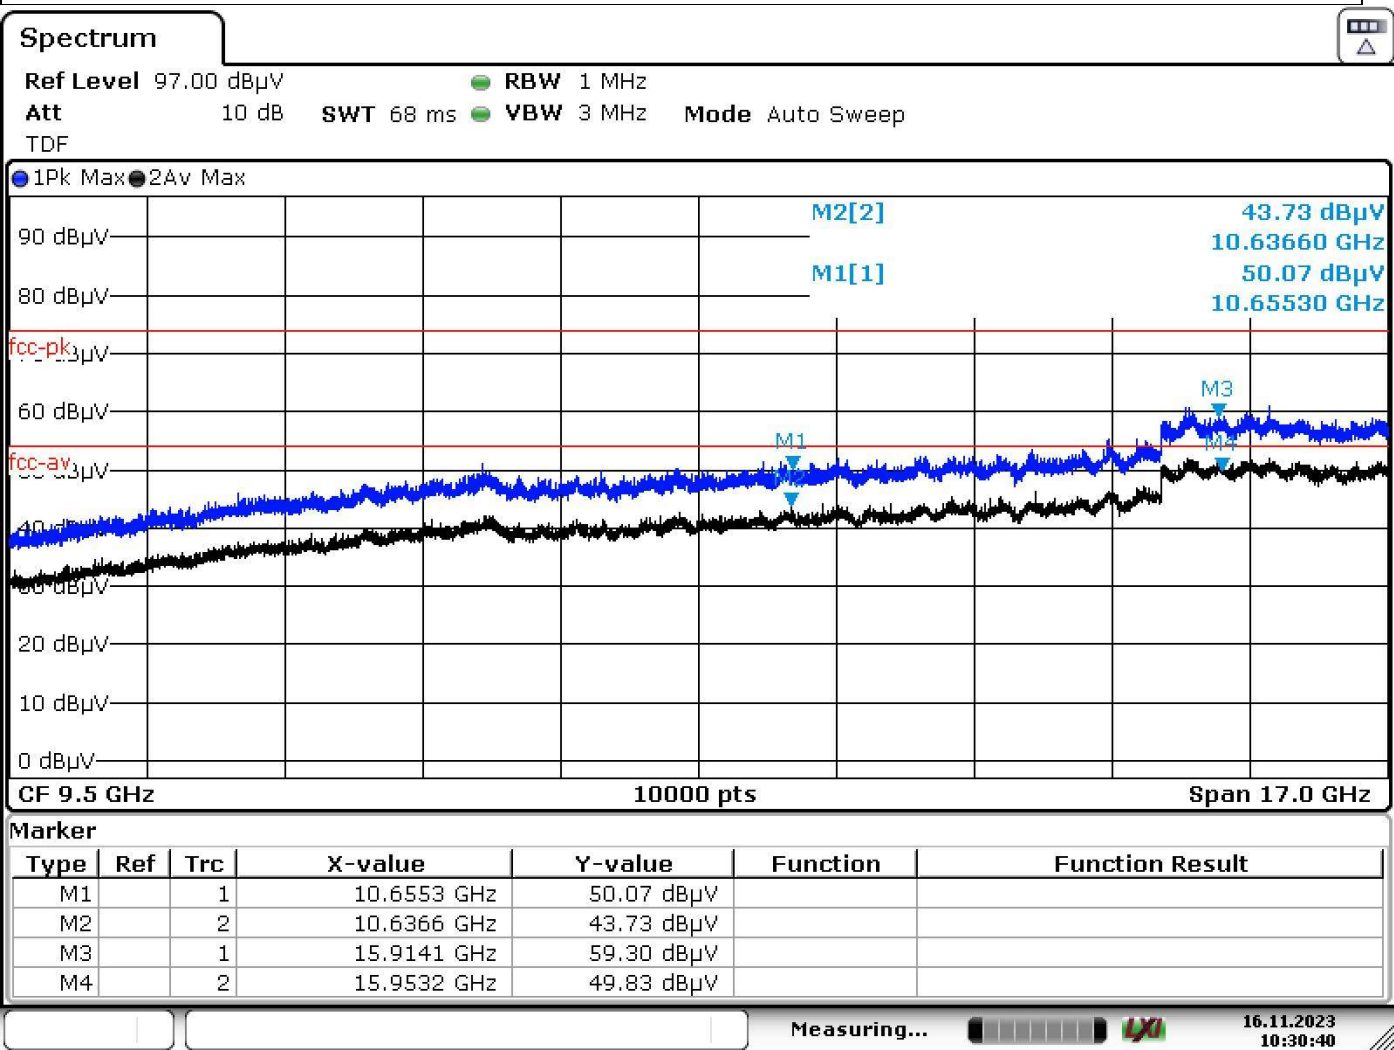

Date: 16.NOV.2023 10:30:40

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5230MHz by 802.11ac(40MHz)	

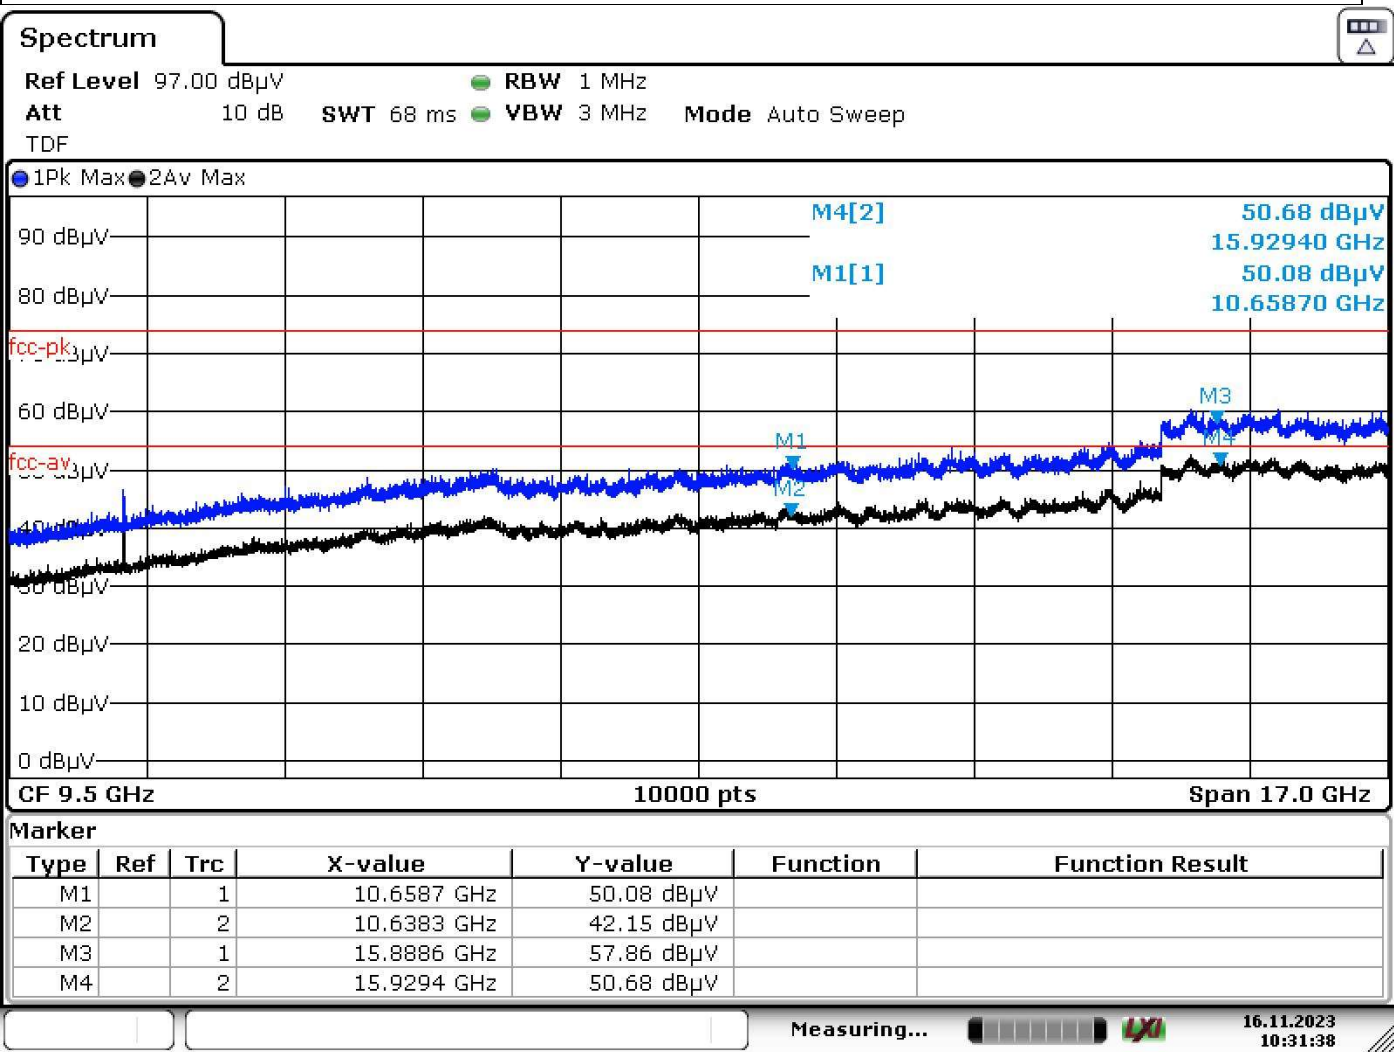

Date: 16.NOV.2023 10:31:38

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5270MHz by 802.11ac(40MHz)	

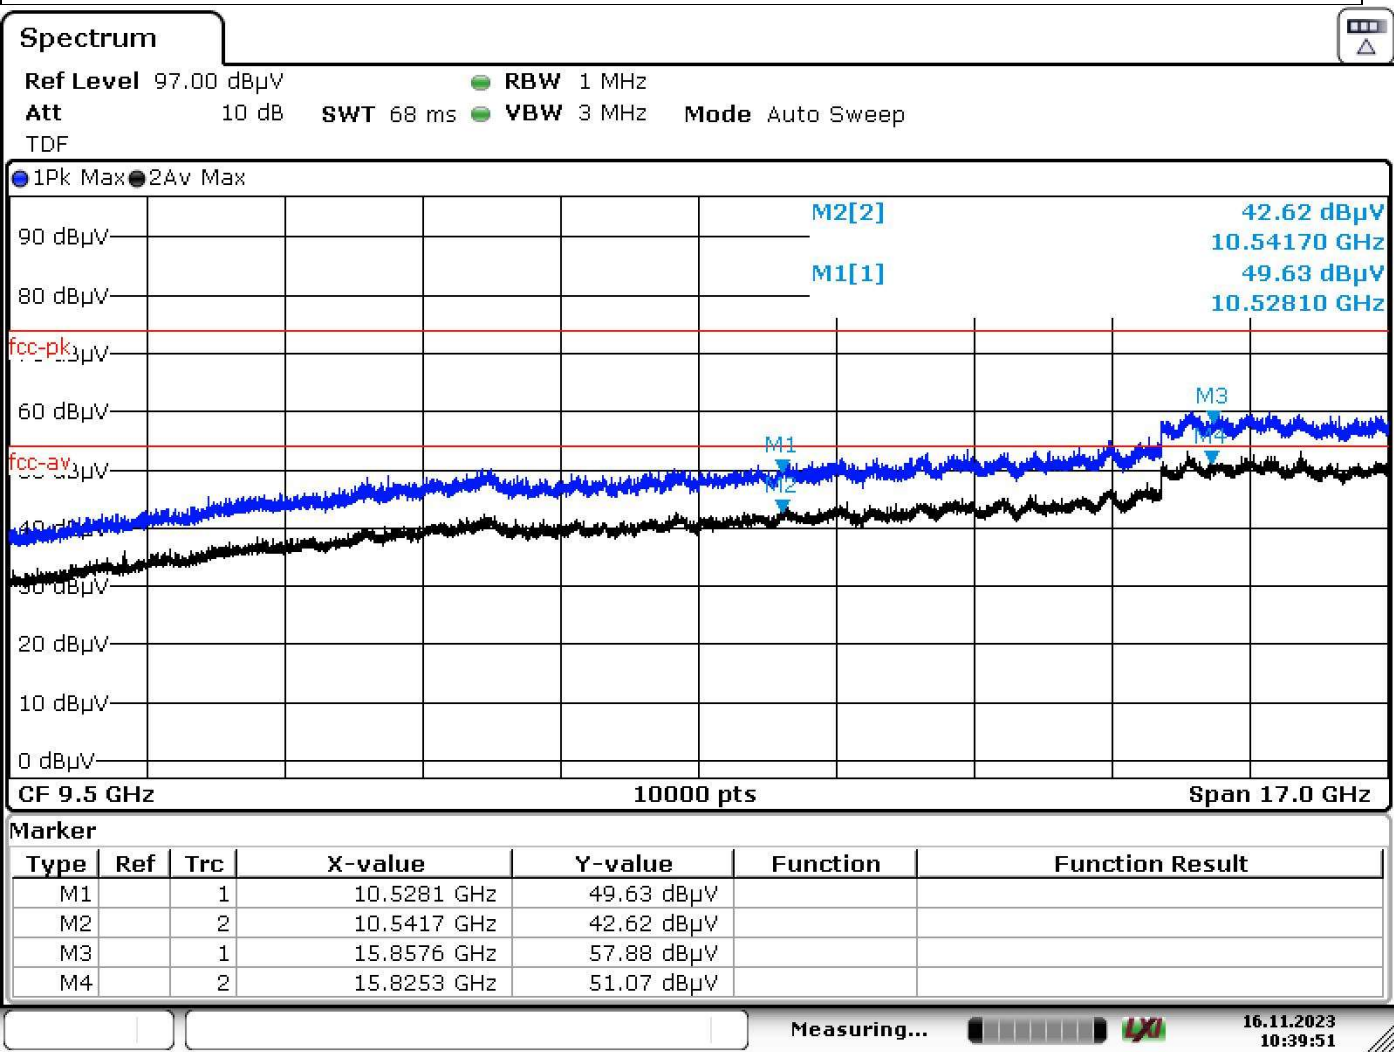

Date: 16.NOV.2023 10:39:51

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5270MHz by 802.11ac(40MHz)	

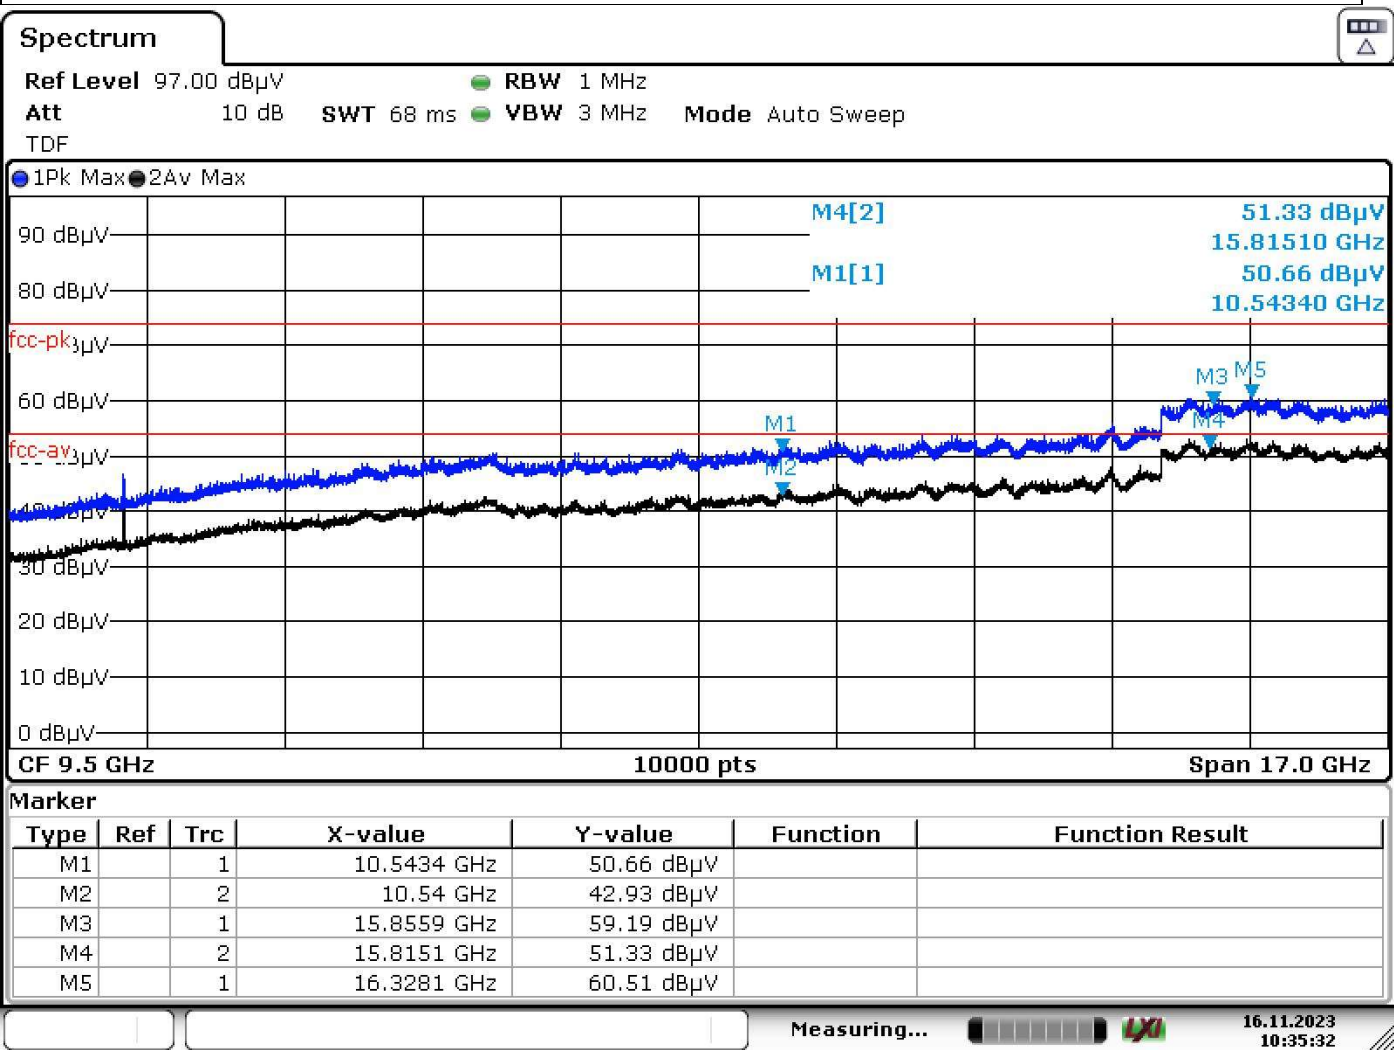

Date: 16.NOV.2023 10:35:32

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5310MHz by 802.11ac(40MHz)	

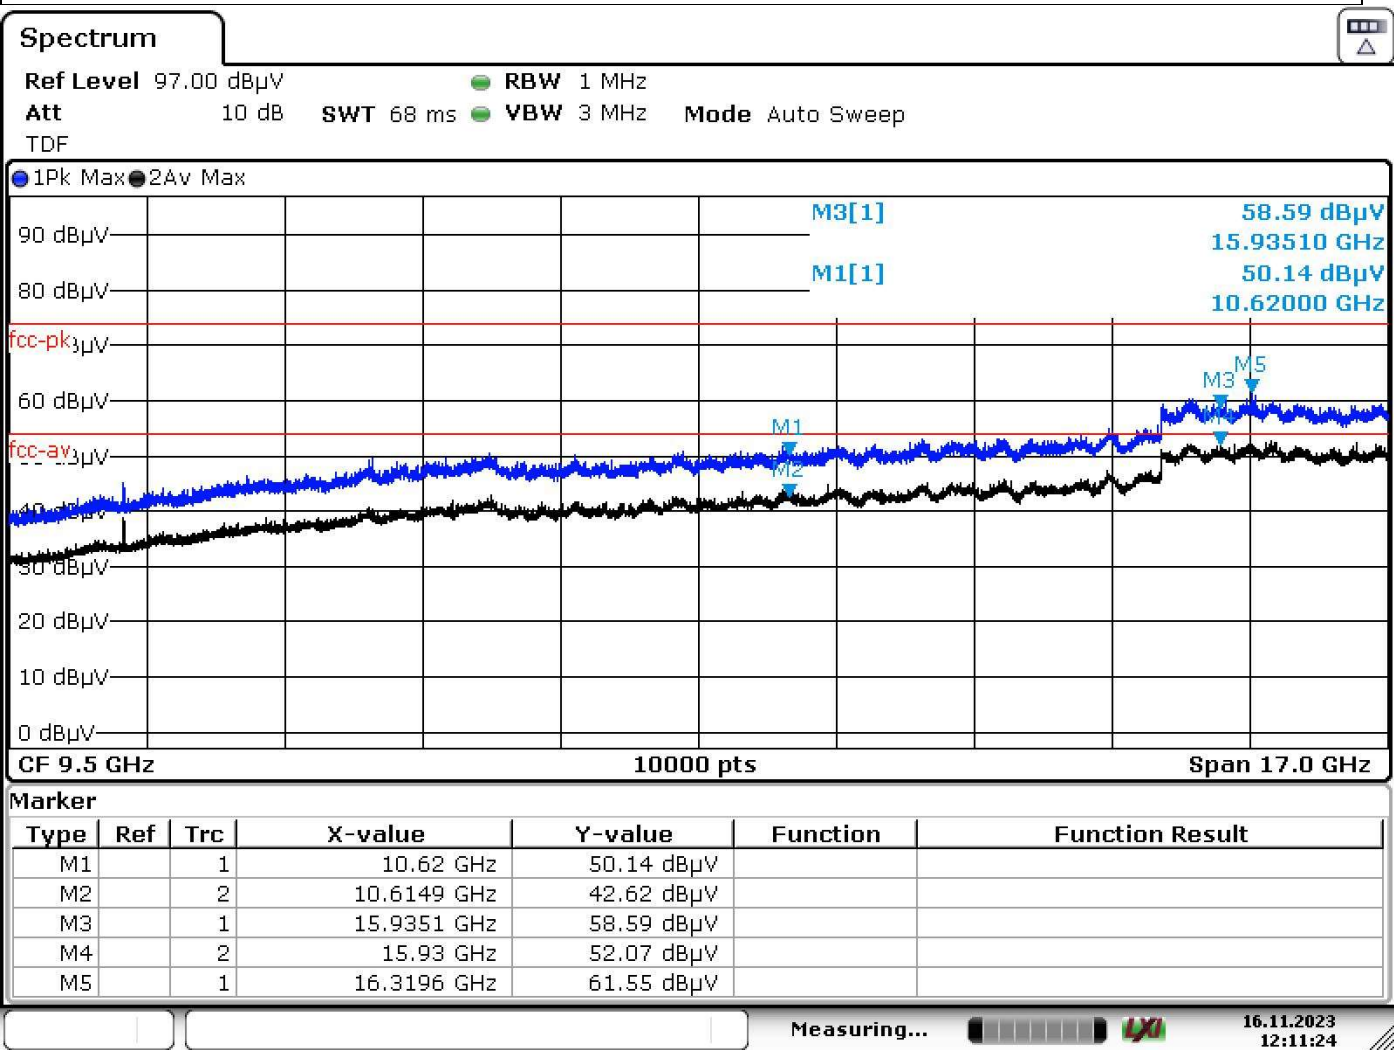

Date: 16.NOV.2023 12:11:24

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5310MHz by 802.11ac(40MHz)	

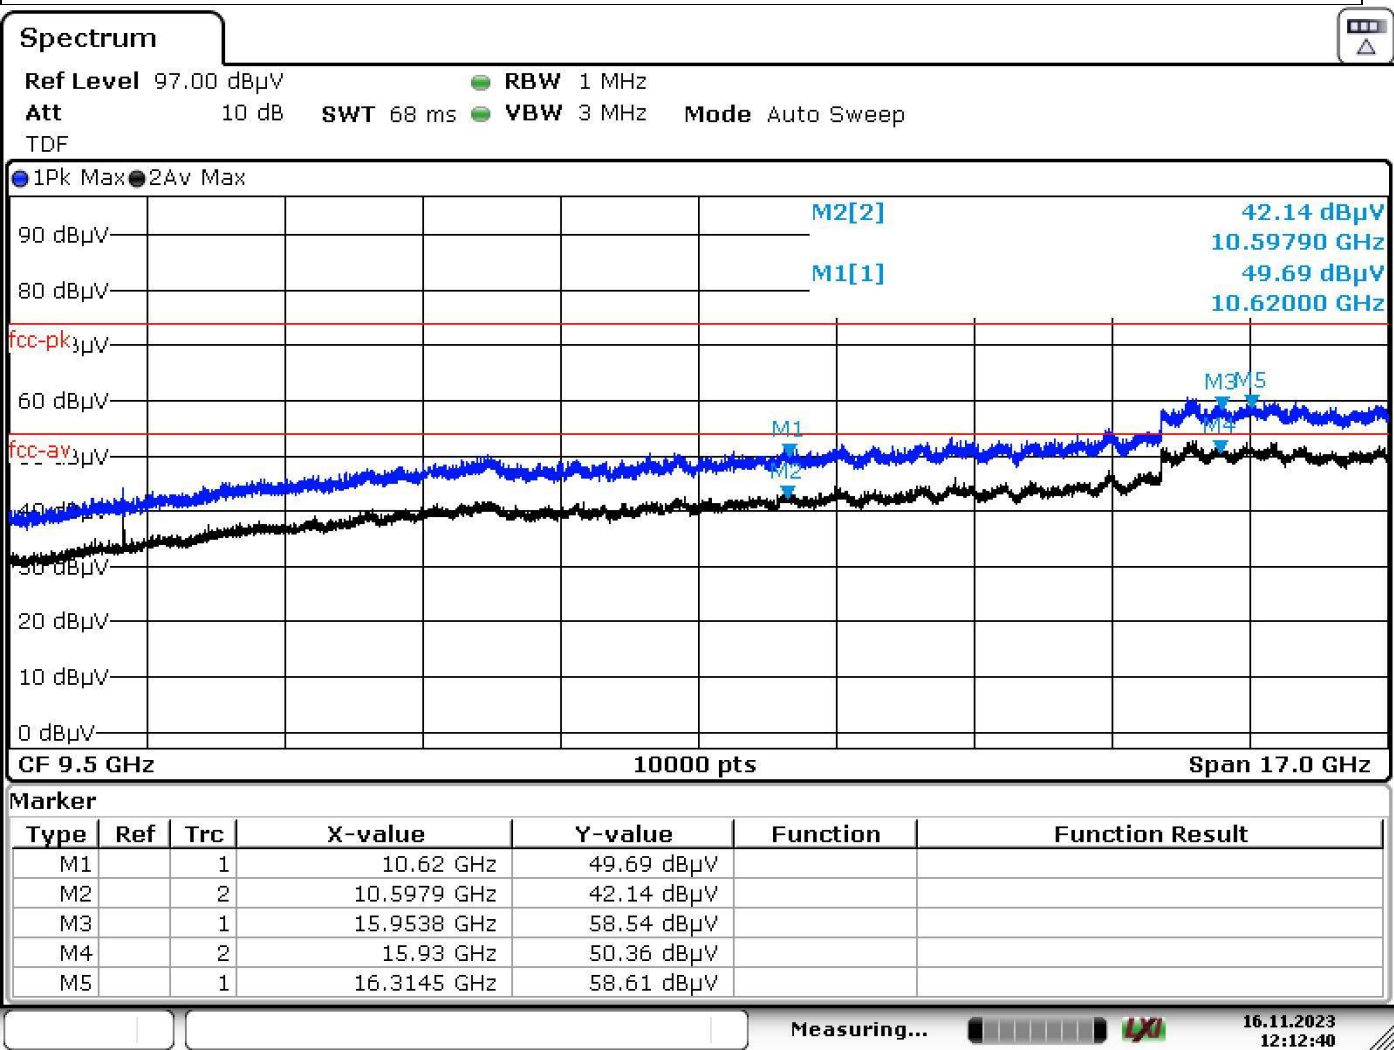

Date: 16.NOV.2023 12:12:40

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5510MHz by 802.11ac(40MHz)	

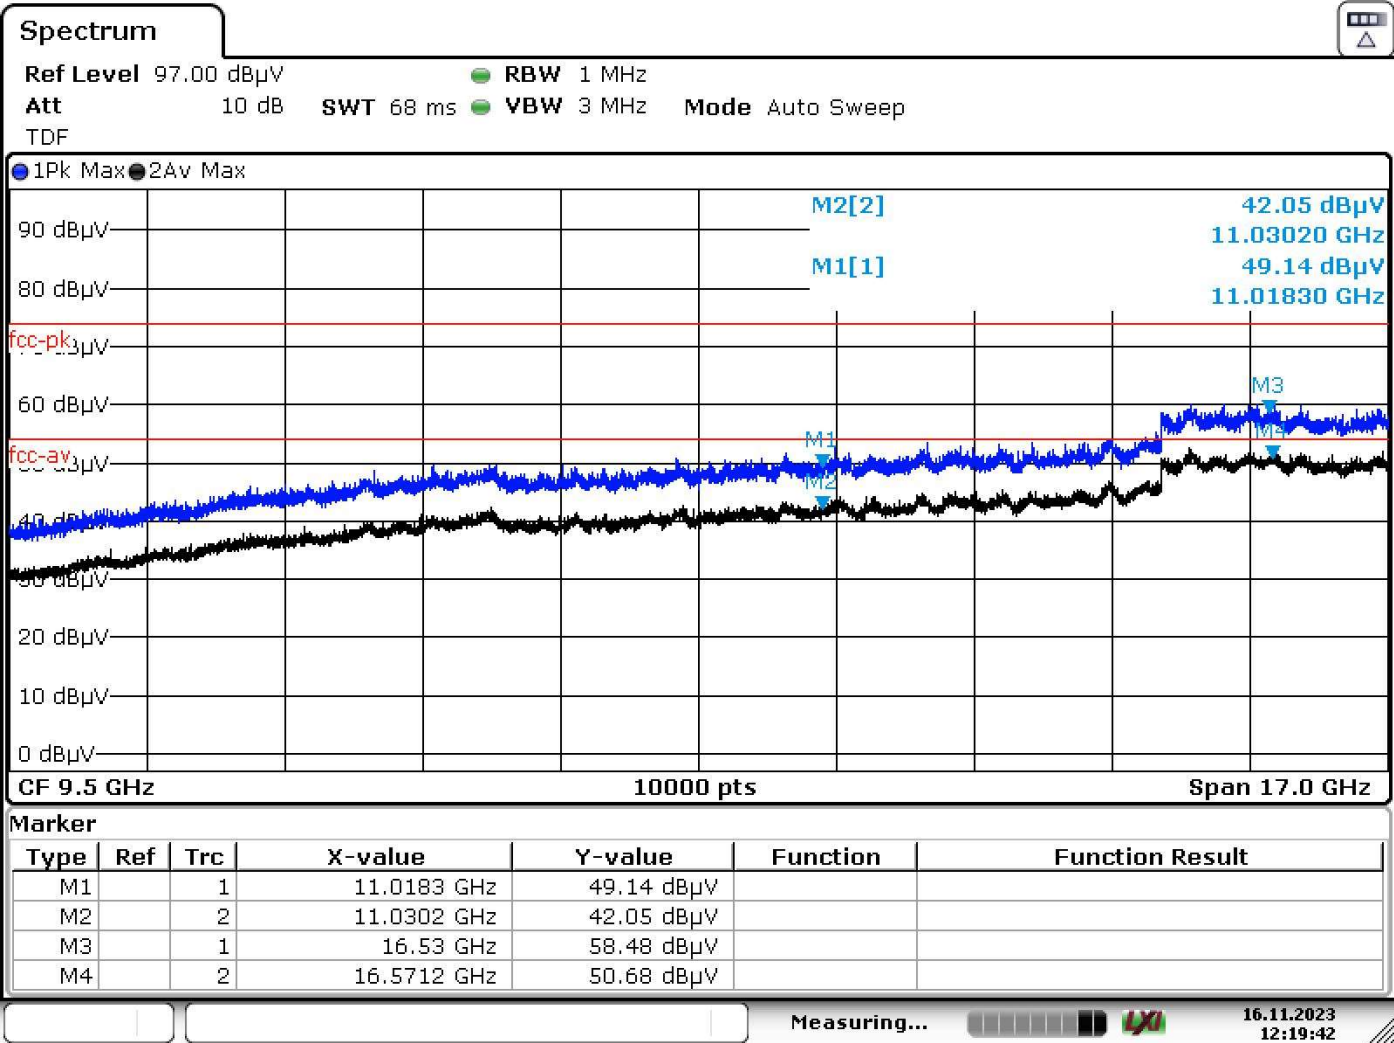

Date: 16.NOV.2023 12:19:42

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)


Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Vertical
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5510MHz by 802.11ac(40MHz)	

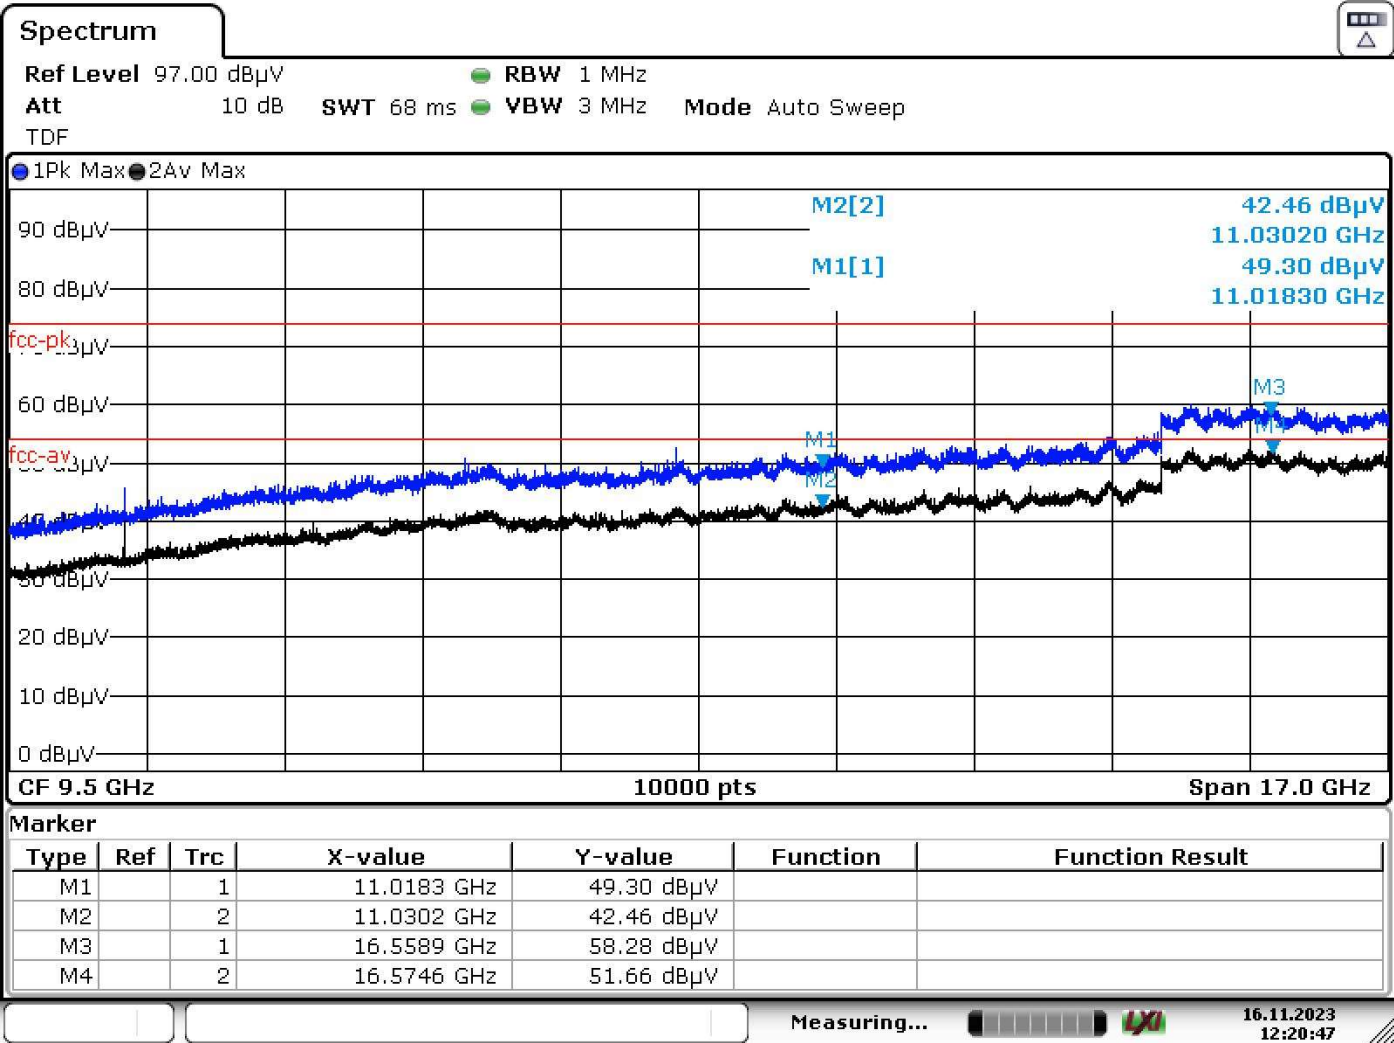

Date: 16.NOV.2023 12:20:47

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)

Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Antenna HF907(1-18GHz)	Polarity: Horizontal
EUT: EMK401	Power: By battery
Note: Mode 5 : Transmit at 5670MHz by 802.11ac(40MHz)	

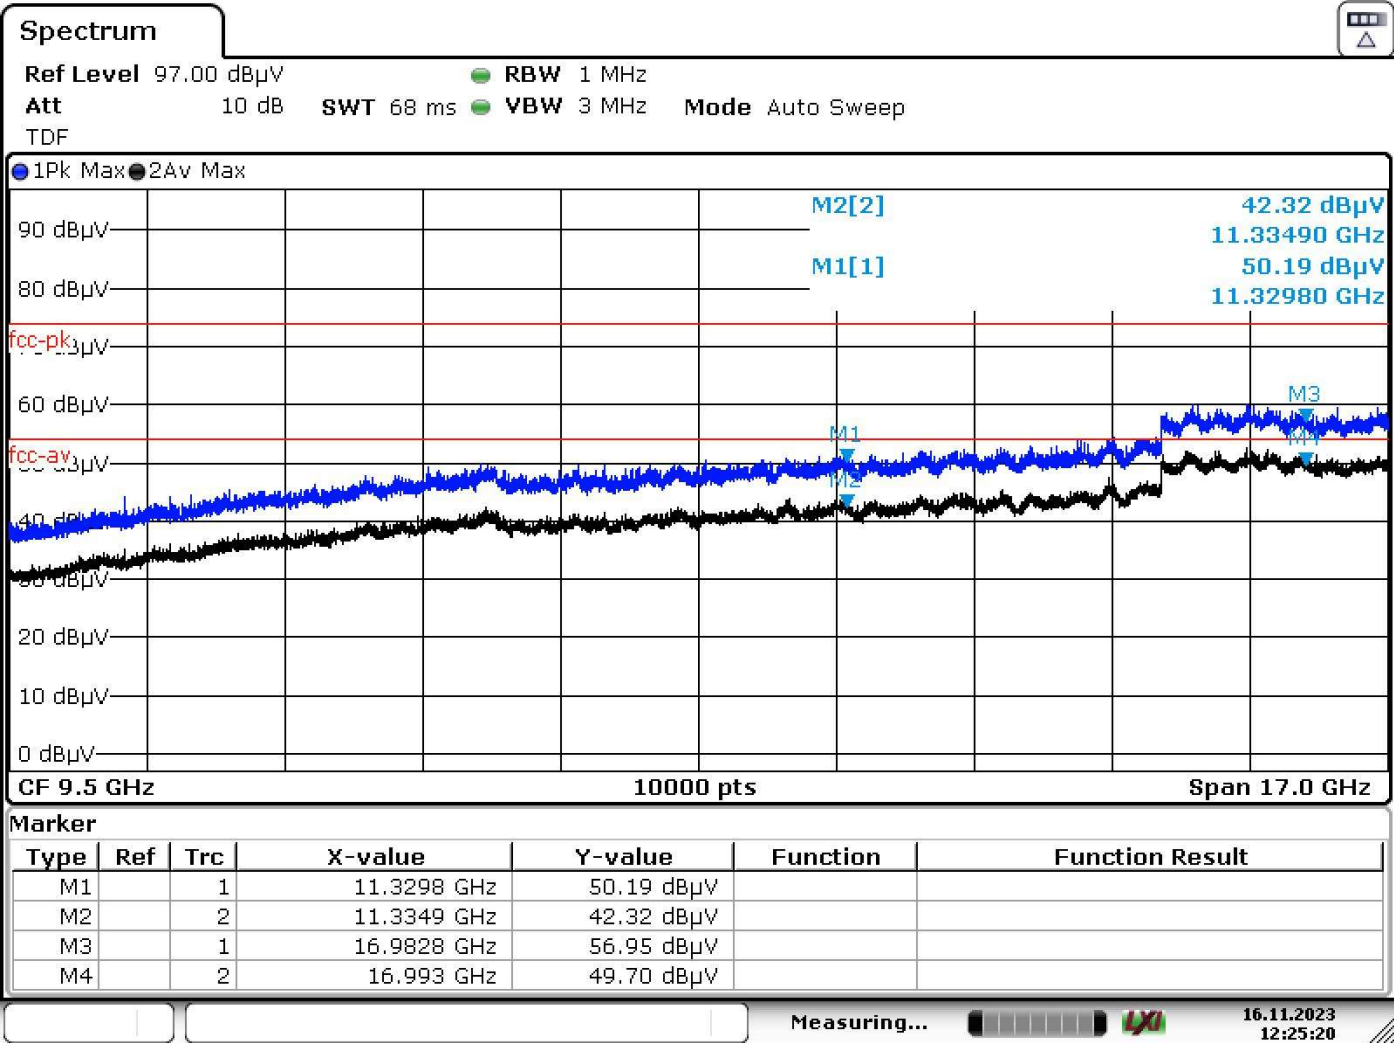

Date: 16.NOV.2023 12:25:19

Remarks: Y-Value = received value + Correction Factor (Antenna factor + Cable loss - Preamp gain)