



TEST REPORT



Report No. : KES-RF260249

Page 1 / 25

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu,
Anyang-si, Gyeonggi-do, 14057, Republic of Korea

Tel : +82-31-425-6200, Fax : +82-31-341-3838

■ FCC/IC TEST REPORT

1. Client

- Name : AMOSENSE
- Address : 19-1BL, 90, 4sandan 5-gil, Jiksan-eup, Seobuk-gu, Cheonan-si,
Chungcheongnam-do, Republic of Korea

2. Sample Description

- Product item : RKE Transceiver
- Model name : ASRKET01
- Manufacturer etc. : AMOSENSE

3. Date of test : 2026.05.18 ~ 2026.06.08

4. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

- Address : 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Rep. of Korea

5. FCC & IC Rule part(s) : Part 15 Subpart C 15.231 & RSS-210(Issue 11)

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report cannot be reproduced and copied without permission without the written consent of KES Co., Ltd.

This laboratory is not accredited for the test results marked *.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : Gu-Bong, Kang (Signature)	Name : Yeong-Jun Cho (Signature)

2026. 06. 19.

KES Co., Ltd.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
2026.06.19	KES-RF260249	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.





TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration.....	4
1.3.	Information about derivative model	5
1.4.	Accessory information	5
1.5.	Sample calculation	5
1.6.	Measurement Uncertainty	5
1.7.	Frequency/channel operations	6
2.	Summary of tests	7
3.	Test results	8
3.1.	99% Occupied Bandwidth	8
3.2.	20 dB bandwidth	10
3.3.	Radiated emission, Spurious emission and Field Strength of Fundamental.....	12
3.4.	Transmission time.....	22
3.5.	Duty cycle correction factor	23
3.6.	Antenna Requirement.....	24
Appendix A.	Measurement equipment.....	25

**1. General information**

Applicant: AMOSENSE
Applicant address: 19-1BL, 90, 4sandan 5-gil, Jiksan-eup, Seobuk-gu, Cheonan-si,
Chungcheongnam-do, Republic of Korea
Test site: KES Co., Ltd.
Test site address: ☐ #3002, #3503, #3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Rep. of Korea
☒ 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Rep. of Korea
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148
ISED CAB ID: KR0100, ISED Registration No.: 23298
FCC rule part(s): Part 15 Subpart C 15.231
IC rule part(s): RSS-210 (Issue 11), RSS-GEN (Issue 5)
FCC ID: 2AS9T-ASRKET01
IC Number : 27298-ASRKET01
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test RKE Transceiver
Frequency range 433.92 MHz
Model ASRKET01
Modulation technique FSK
Number of channels 433.92 MHz : 1 ch
Power source DC 12 V
Antenna specification Ceramic Chip Antenna // Peak gain: -1.44 dBi
H/W Version A.00
S/W Version 2633
Serial number 260428R11010553
260428R11010554

1.2. Test configuration

The **AMOSENSE // RKE Transceiver // ASRKET01 // FCC ID : 2AS9T-ASRKET01 // IC Number : 27298-ASRKET01** was tested according to the specification of EUT, the EUT must comply with following standards.

FCC Part 15 Subpart C 15.231
RSS-GEN (Issue 5) & RSS-210 (Issue 11)
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

**1.3. Information about derivative model**

N/A

1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
-	-	-	-	-

1.5. Sample calculation

Where relevant, the following sample calculation is provided

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor

between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

For Radiation test :

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

1.6. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.22 dB (SHIELD ROOM #6)
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1 GHz	4.04 dB (SAC #6)
	Above 1 GHz	5.32 dB (SAC #5)
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.		



1.7. Frequency/channel operations

Ch.	Frequency (MHz)
01	433.92





2. Summary of tests

Section in FCC Part 15	Section in RSS-210 & Gen	Parameter	Test results
-	RSS-210 Annex A.1.4, RSS-Gen 6.7	99% Occupied bandwidth	Pass
15.231 (c)	-	20 dB bandwidth	Pass
15.209(a) 15.231(b)	RSS-210 Annex A.1.3 (a), (b)	Radiated emission, Spurious emission and Field Strength of Fundamental	Pass
15.207(a)	RSS-Gen 8.8	AC Conducted emissions	N/T ^{note1}
15.231(a)	RSS-210 Annex A.1.2 (a)	Transmission time	Pass
15.203	-	Antenna Requirement	Pass

*N/T: Not Tested

Note.

1..The EUT only operate with battery.



3. Test results


3.1. 99% Occupied Bandwidth

Test procedure

For FCC, ANSI C63.10-2020 - clause 6.9.2 and 6.9.3

For IC, ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 - clause 6.9.2 and 6.9.3

Test setup



Test setting

1. Span = The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
2. RBW = The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW
3. VBW = shall be approximately three times the RBW
4. Sweep = auto
5. Detector function = Peak
6. Trace = Max hold

FCC Limit

None; for reporting purpose only.


IC Limit

According to RSS-210 Annex A.1.4, The occupied bandwidth of momentarily operated devices shall be less than or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the occupied bandwidth shall be less than or equal to 0.5% of the centre frequency.



Test results

Frequency(MHz)	99% occupied bandwidth(MHz)	Limit(MHz)
433.92	0.074	1.08

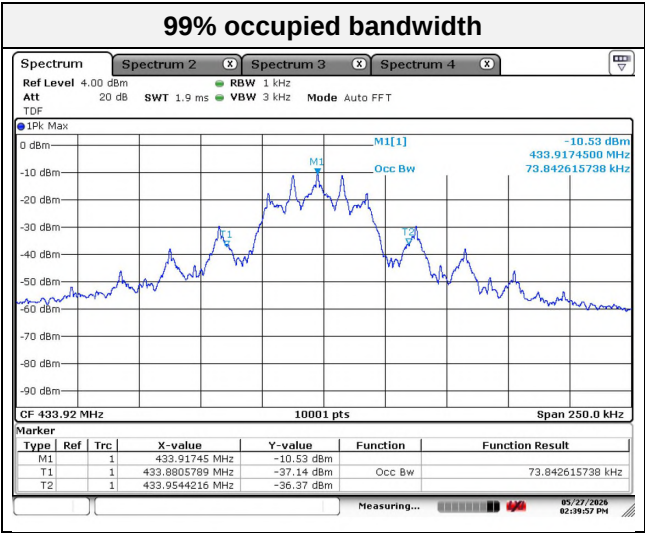




Report No. : KES-RF260249

3.2. 20 dB bandwidth**Test procedure**

For FCC, ANSI C63.10-2020

For IC, ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test setup**Test setting**

1. Span = Set between two times and five times the OBW
2. RBW $\geq 1\%$ to 5 % of the OBW
3. VBW $\geq 3 * RBW$
4. Sweep = Auto
5. Detector function = Peak
6. Sweep = Auto couple
7. Trace mode = Max hold
8. All the trace to stabilize

FCC Limit

According to 15.231(c), The bandwidth of the emissions shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.


IC Limit

None; for reporting purpose only.



Test results


Frequency(MHz)	20 dB bandwidth(MHz)	Limit(MHz)
433.92	0.048	1.08

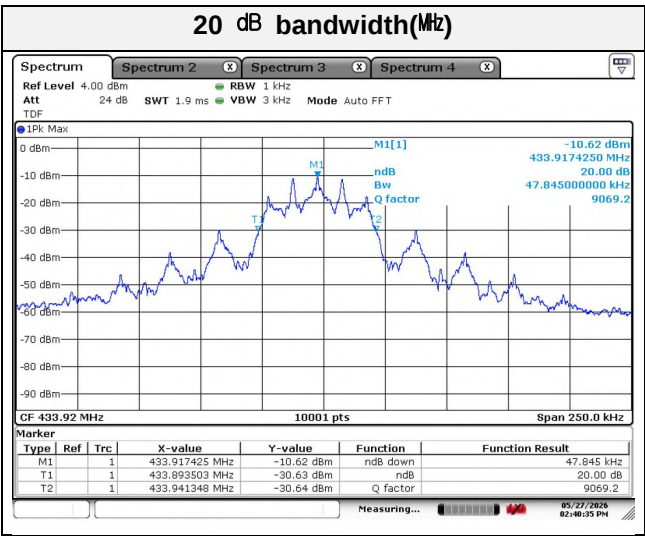




3.3. Radiated emission, Spurious emission and Field Strength of Fundamental Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

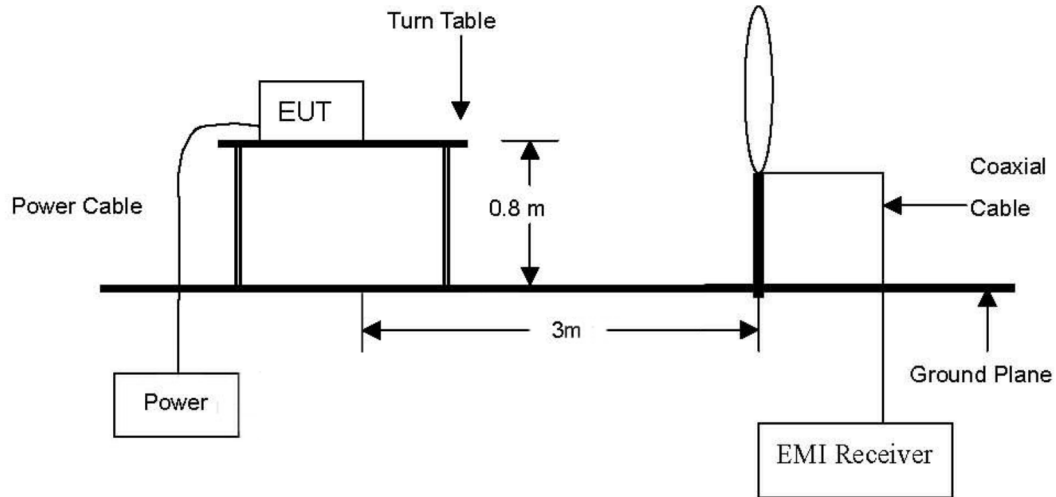


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

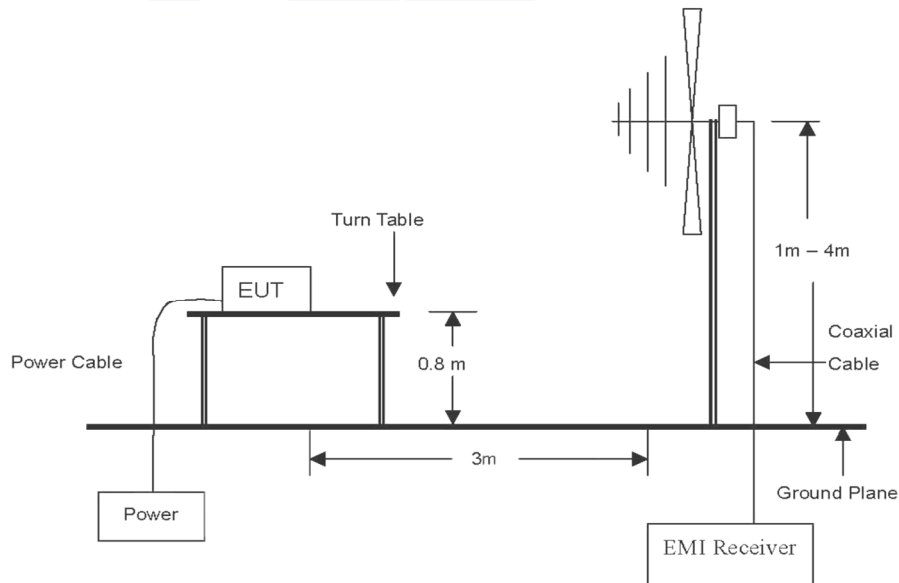



The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

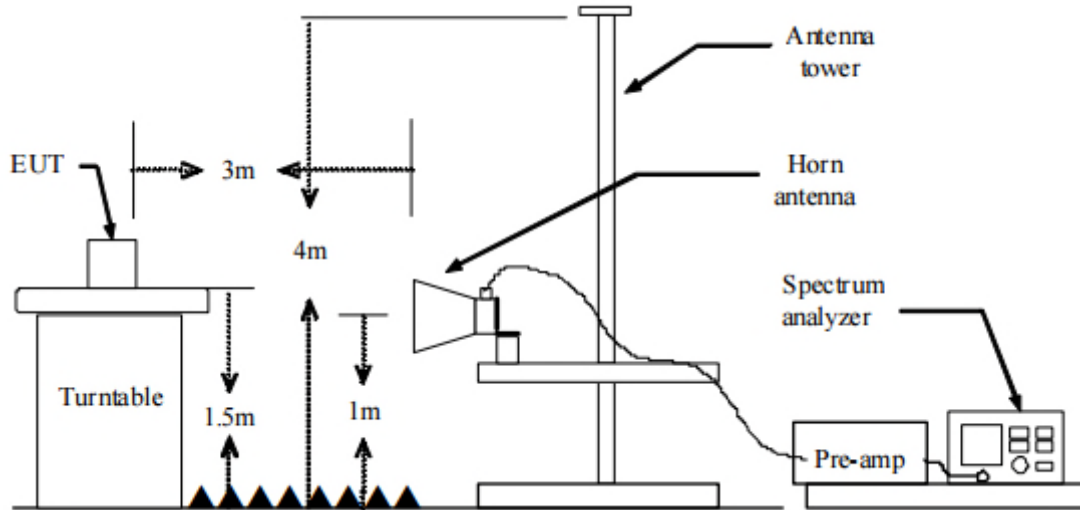

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2020 (FCC) & ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 (IC).

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that **parallel** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **parallel**.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground for 30 MHz-1 GHz and 1.5 meters for above 1 GHz at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
5. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 120 kHz
 - ③ VBW $\geq$ RBW
 - ④ Detector = quasi peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold

6. Spectrum analyzer settings for $f \geq 1$ GHz: Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW ≥ 3 MHz
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for $f \geq 1$ GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW $\geq 3 \times$ RBW
- ④ Detector = RMS, if span/(# of points in sweep) $\leq$ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Note.

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
3. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
4. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
6. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
7. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**FCC Limit**

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ($\mu\text{V/m}$)
0.009 ~ 0.490	300	2 400/F(kHz)
0.490 ~ 1.705	30	24 000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.231(b), In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field strength of fundamental (microvolts / meter)	Field strength of spurious emission (microvolts / meter)
40.66 ~ 40.70	2,250	225
70 ~ 130	1,250	125
130 ~ 174	1,250 to 3,750**	125 to 375**
174 ~ 260	3,750	375
260 ~ 470	3,750 to 12,500**	375 to 1,250**
Above 470	12,500	1,250

** Linear interpolations.

- (1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.
- (2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in § 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of § 15.205 shall be demonstrated using the measurement instrumentation specified in that section.
- (3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

**IC Limit**

According to RSS-Gen, Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Frequency (MHz)	Distance (Meters)	Radiated ($\mu\text{V/m}$)
0.009 – 0.490 ^{Note 1}	6.37/F (F in kHz)	300
0.490 – 1.705	63.7/F (F in kHz)	30
1.705 - 30	0.08	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960*	3	500

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

According to RSS-210 A1.3, The field strength of emissions from momentarily operated intentional radiators shall not exceed the limits in table A1, based on the average value of the measured emissions. The requirements of the "Pulsed operation" section of RSS-Gen apply for averaging pulsed emissions and limiting peak emissions.

Alternatively, compliance with the limits in table A1 may be demonstrated using an International Special Committee on Radio Interference (CISPR) quasi-peak detector.

Frequency (MHz)	Distance (Meters)	Radiated ($\mu\text{V/m}$)
70-130	3	1 250
130-174	3	1 250 to 3 750
174-260**	3	3 750
260-470**	3	3 750 to 12 500*
Above 470	3	12 500

* Linear interpolation with frequency, f, in MHz:

For 130-174 MHz: Field Strength ($\mu\text{V/m}$) = $(56.82 \times f) - 6136$

For 260-470 MHz: Field Strength ($\mu\text{V/m}$) = $(41.67 \times f) - 7083$

** Frequency bands 225-328.6 MHz and 335.4-399.9 MHz are designated for the exclusive use of the Government of Canada. Manufacturers should be aware of possible harmful interference and degradation of their licence-exempt radio equipment in these frequency bands.

**Test results for fundamental**

Operating frequency: 433.92 MHz

Distance of measurement: 3 meter


Frequency (MHz)	Axis (X, Y, Z)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
433.92	X	87.80	Peak	H	-7.18	-	80.62	100.83	20.21
Average			H	-7.18	-13.85	66.77	80.83	14.06	
433.92		82.21	Peak	V	-7.18	-	75.03	100.83	25.80
Average			V	-7.18	-13.85	61.18	80.83	19.65	
433.92	Y	86.44	Peak	H	-7.18	-	79.26	100.83	21.57
Average			H	-7.18	-13.85	65.41	80.83	15.42	
433.92		83.83	Peak	V	-7.18	-	76.65	100.83	24.18
Average			V	-7.18	-13.85	62.80	80.83	18.03	
433.92	Z	86.78	Peak	H	-7.18	-	79.60	100.83	21.23
Average			H	-7.18	-13.85	65.75	80.83	15.08	
433.92		82.59	Peak	V	-7.18	-	75.41	100.83	25.42
Average			V	-7.18	-13.85	61.56	80.83	19.27	

Note.

- 3m Average Limit(dBμV/m) = $20\log[41.6667 \cdot (F_{\text{MHz}}) - 7083.3333] = 80.83$
 3m Peak Limit(dBμV/m) = Average limit + 20 = 100.83
 Average Field strength = Peak Field strength + Duty Cycle Correction Factor
- Duty Cycle Correction Factor : $20\log(\text{Tx}_{\text{on time}} / 100 \text{ ms}) = 20\log(20.29 / 100.00) = -13.85$
 $\text{Tx}_{\text{on time}} = 20.29 \text{ ms}$
 $\text{Tx}_{\text{on+off}} \geq 100 \text{ ms}$ (pulse train is 100 ms)




Test Plot

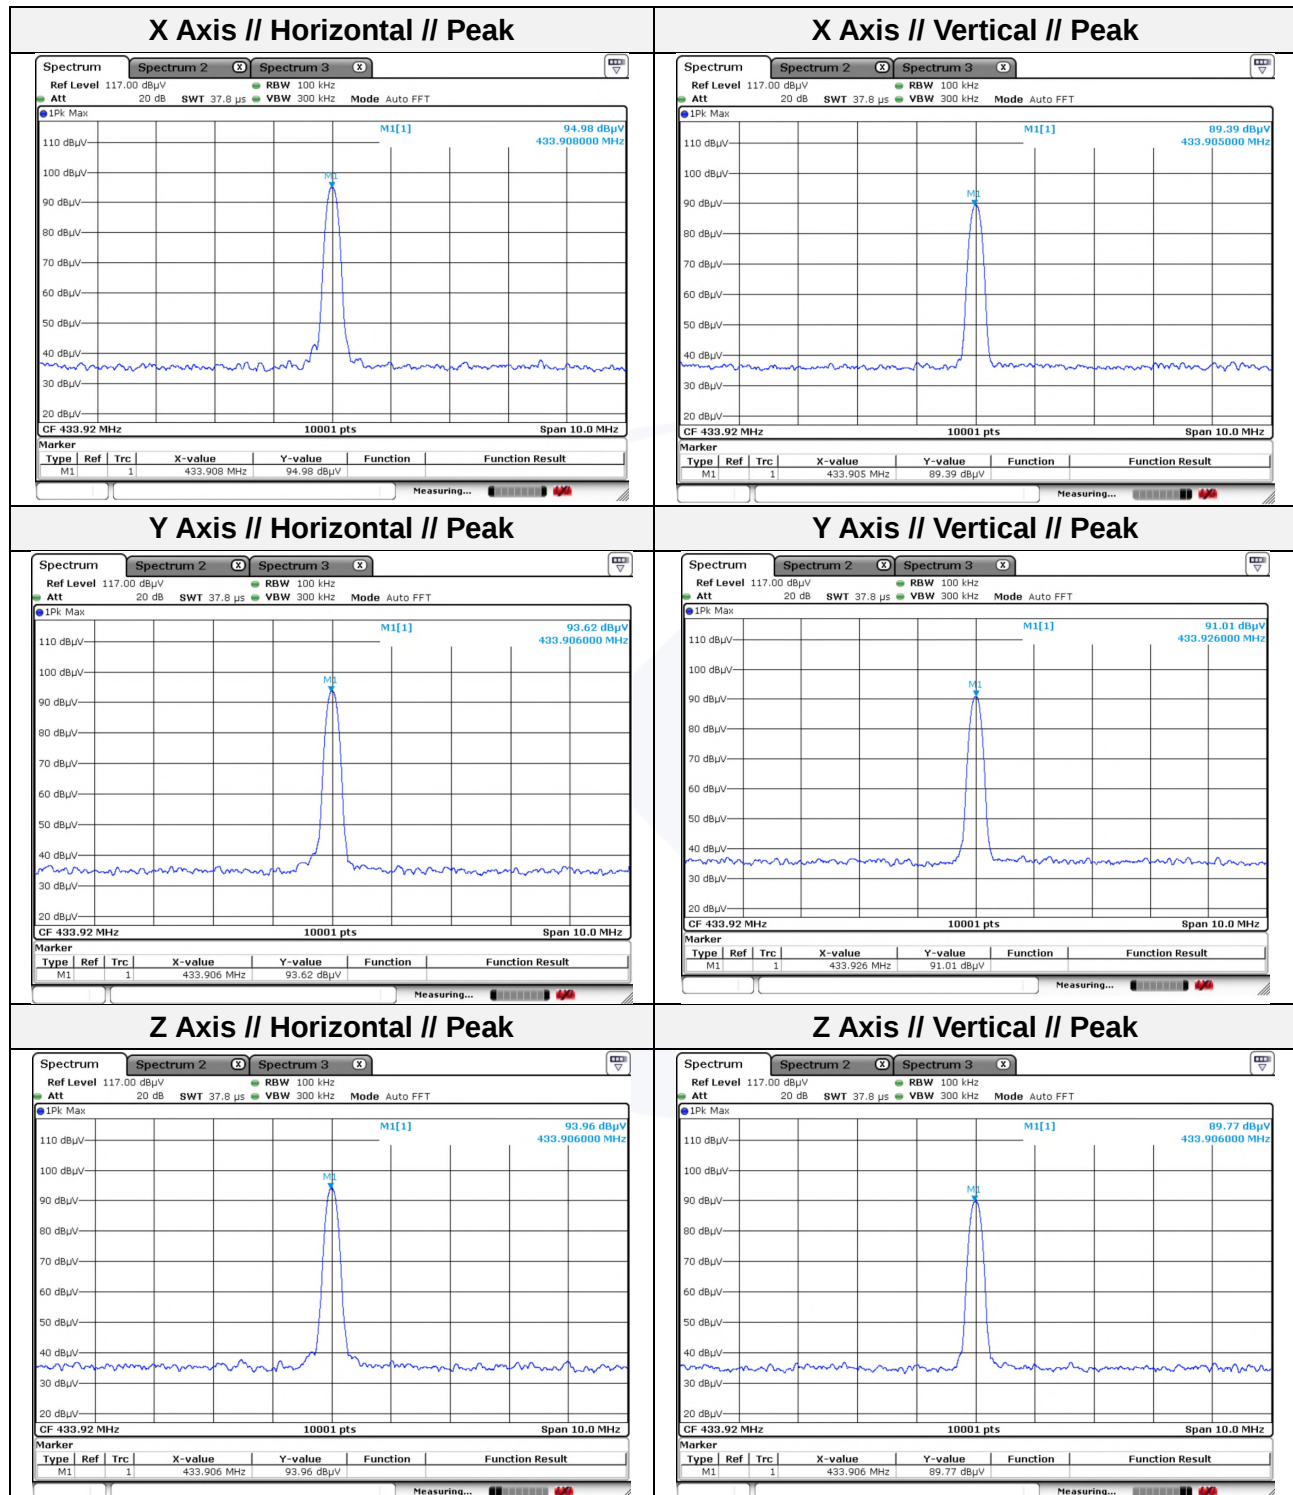



Test results (Below 30 MHz)

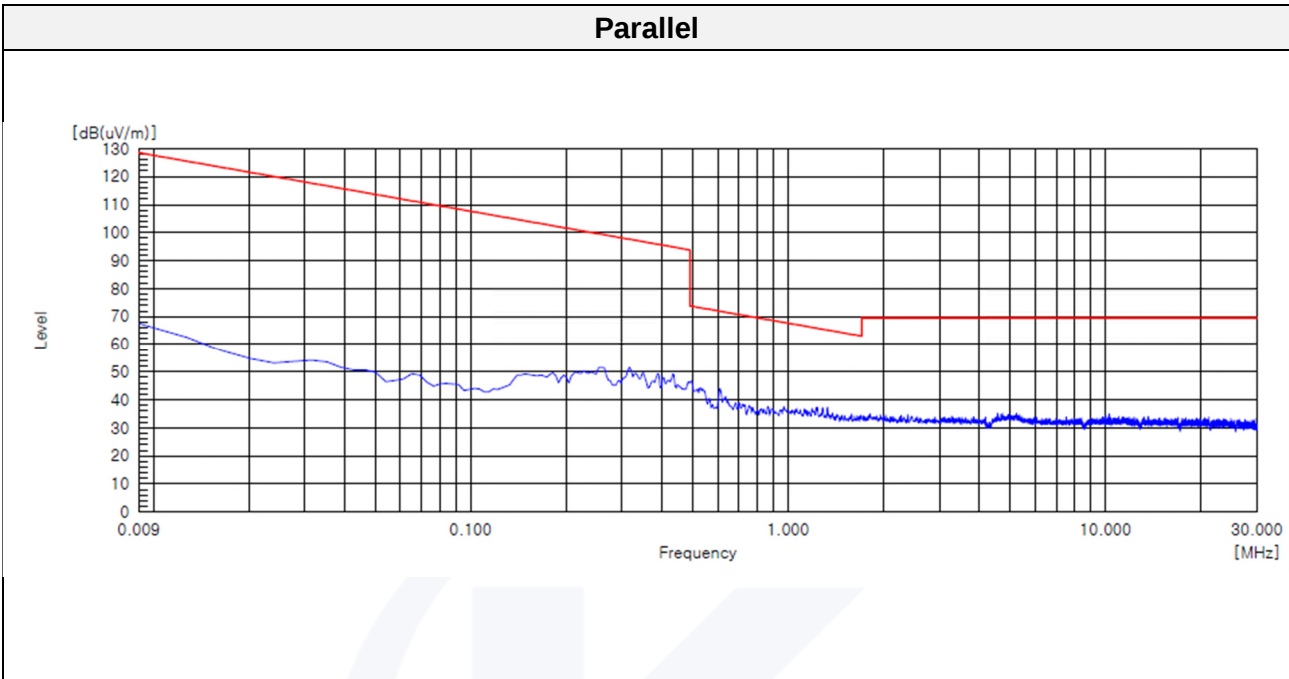


Note.

1. No spurious emission were detected under 30 MHz.



Test results (Below 1 000 MHz)

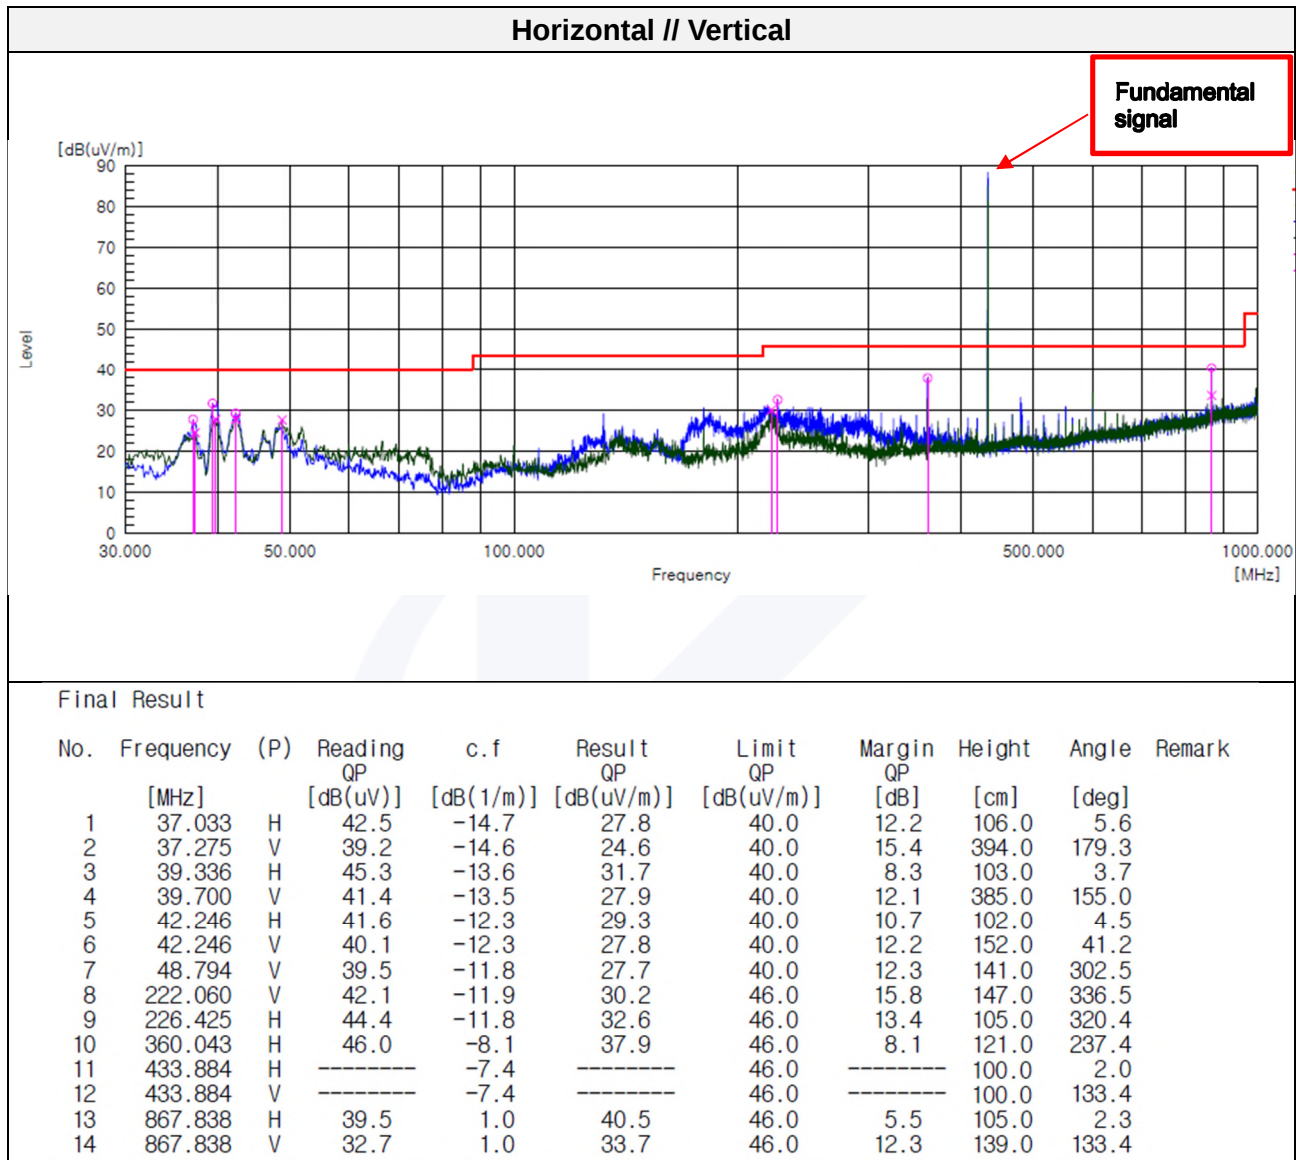


**Test results (Above 1 000 MHz)**

Mode: FSK
Distance of measurement: 3 meter

- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 011.25	44.40	Peak	V	-8.52	-	35.88	74.00	38.12
1 032.25	45.45	Peak	H	-8.39	-	37.06	74.00	36.94

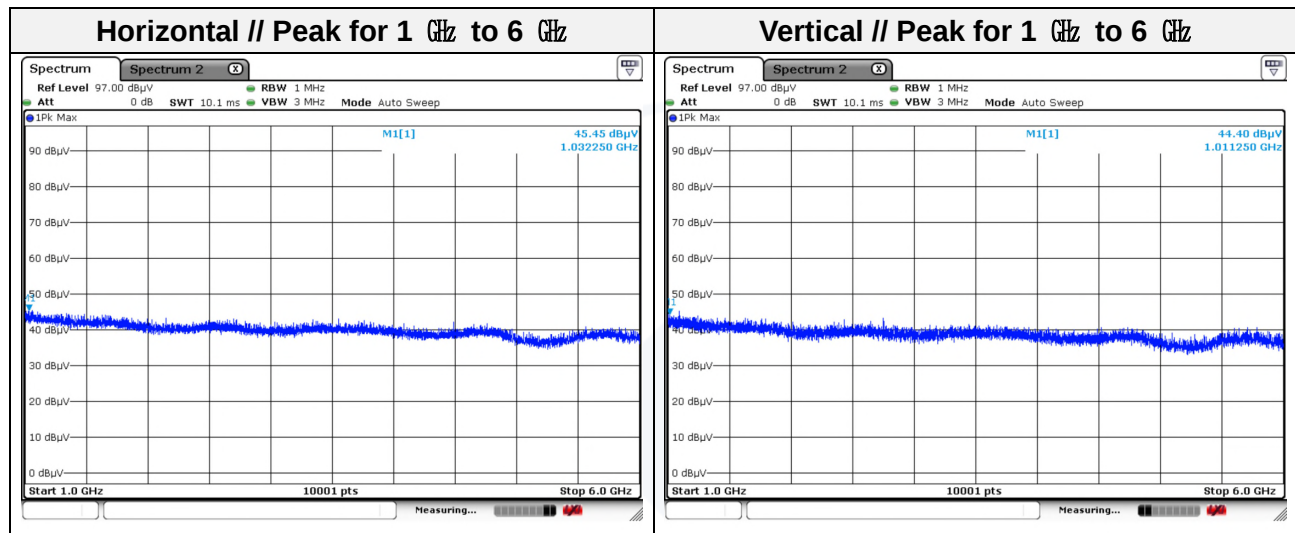


Note.

1. Average test would be performed if the peak result were greater than the average limit.



3.4. Transmission time

Test setup



Test procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=0 Hz.

FCC Limit


According to 15.231(a), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

IC Limit

According to RSS-210 Annex A1.2 (a), A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.

Test results


Frequency(MHz)	Transmission time (s)	Limit (s)
433.92	0.020	Same or less than 5 sec

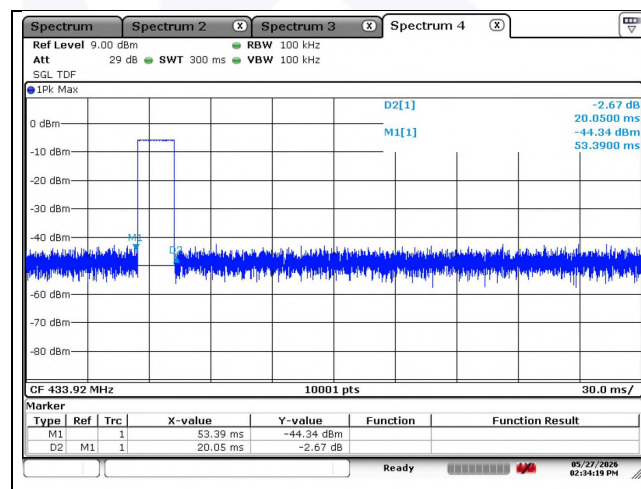



3.5. Duty cycle correction factor

Test setup



Test procedure

1. The transmitter output is connected to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=0 Hz.

Limit


None (No dedicated Limit specified in the Rules)

Test results

Duty Cycle Correction Factor : $20\log(Tx_{on\ time} / 100\ ms) = 20\log(20.29 / 100.00) = -13.85$

$Tx_{on\ time} = 20.29\ ms$

$Tx_{on+off} \geq 100\ ms$ (pulse train is 100 ms)

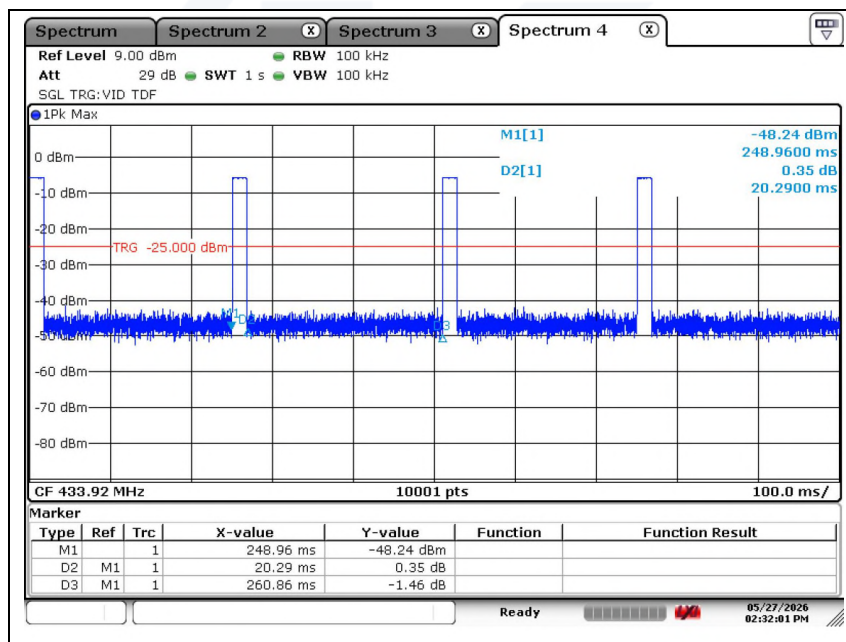



3.6. Antenna Requirement

According to 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.



**Appendix A. Measurement equipment**

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV40	101725	1 year	2026.06.10 2027.06.08
Spectrum analyzer	R&S	FSV40	101002	1 year	2027.01.06
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2027.04.02
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2027.04.02
Attenuator	Mini-Circuits	BW-S20-2W263A+	Y1	1 year	2027.02.09
TRILOG-BROADBAND ANTENNA	Schwarzbeck	VULB 9163	714	2 years	2028.04.16
Horn Antenna	A.H.	SAS-571	414	1 year	2027.01.12
Amplifier	SONOMA INSTRUMENT	310N	401123	1 year	2027.02.12
PREAMPLIFIER	8449B	AGILENT	3008A01742	1 year	2026.10.22
DC Power Supply	Agilent	6632B	MY43004090	1 year	2026.06.12 2027.06.08
Cable	-	-	#2	1 year	2026.10.31
EMI Test SW	EP5/RE	TOYO Corporation	6.0.0	-	-
Cable (SAC #5)	SUCOFLEX106	HUBER SUHNER	-	0.5 year	2026.07.25
	SUCOFLEX106	HUBER SUHNER	-	0.5 year	2026.07.25
	LH21D/2xSMA	OSI Cable	-	0.5 year	2026.07.25
Cable (SAC #6)	TCLH21D-SMSM-2.5M 0222	OSI Cable	-	0.5 year	2026.07.25
	TCLH21D-NMNM-10.0M 0222	OSI Cable	-	0.5 year	2026.07.25
	TCLH21D-SMSM-7.0M 0222	OSI Cable	-	0.5 year	2026.07.25

* Statement of Traceability: KES Co., Ltd. attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949

The End.