

TEST REPORT

Applicant : D2G Group LLC
Address : 81 Commerce Drive, Fall River, Massachusetts 02720, United States
Manufacturer : GUANGZHOU YOUGUANG OPTOELECTRONICS CO.,LTD.
Address : No.75, Pacific Ind.Zone, XintangTown, Zengcheng, Guangzhou,
China,511340.
Product Name : 21.5-inch PCAP TOUCH WALL MOUNTED AND 14OS
Model Number : DH215TLB2, DH21514G
Trademark : **DISPLAYS2GO**
FCC ID : 2ASCB-DH21514G
Test Date : April 29, 2026 to May 15, 2026
Date of Report : May 19, 2026

Test Result : This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.

Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor.1-2023

Prepared by(Test Engineer):
Zhao Di



Reviewer(Supervisor):
Ken Wu



Approved(Manager):
Abel Yu



TABLE OF CONTENT

1. General Information	5
1.1. Description of Device (EUT)	5
1.2. Channel List	5
1.3. Test configuration	6
1.4. Summary of test result	6
1.5. Special Accessories and Auxiliary Equipment	6
1.6. Test mode	7
1.7. Block Diagram	8
1.8. Test Conditions	8
1.9. Measurement Uncertainty (95% confidence levels, k=2)	8
1.10. Test Facility	9
1.11. Test Equipment	9
2. Conducted emission at the mains terminals test	11
2.1. Limit	11
2.2. Test Setup	11
2.3. Test Procedure	11
2.4. Test Result	12
3. Radiated Spurious Emissions	14
3.1. Limit	14
3.2. Test Setup	15
3.3. Test Procedure	17
3.4. Test Result	18
4. Duty cycle	26
4.1. Limit	26
4.2. Test Setup	26
4.3. Test Procedure	26
4.4. Test Result	26
5. Conducted Spurious Emissions	27
5.1. Limit	27
5.2. Test Setup	27
5.3. Test Procedure	27
5.4. Test Result	27
6. Band Edge Measurement	28
6.1. Limit	28
6.2. Test setup	28
6.3. Test Procedure	28
6.4. Test Result	28
7. -6 dB Bandwidth and 99% Bandwidth Measurement	29
7.1. Limit	29
7.2. Test Setup	29
7.3. Test Procedure	29
7.4. Test Result	29
8. Maximum Output Power	30
8.1. Limit	30
8.2. Test Setup	30
8.3. Test Procedure	30
8.4. Test Result	30
9. Power Spectral density	31
9.1. Limit	31
9.2. Test Setup	31
9.3. Test Procedure	31

9.4. Test Result.....	31
10. Antenna Requirement	32
11. TEST SETUP & EUT PHOTOGRAPH	33

[illegible]

1. General Information

1.1. Description of Device (EUT)

EUT Name	: 21.5-inch PCAP TOUCH WALL MOUNTED AND 14OS
Model No.	: DH215TLB2, DH21514G
Model Difference	: Except for the model name, everything else is the same.
Power supply	: AC 100-240V 50/60Hz 0.5A
Operation frequency	: 2412-2462MHz for 802.11b/g/n20/ax20 2422-2452MHz for 802.11n40/ax40
Modulation	: 802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ax:(1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDMA
Antenna Type	: External antenna, Maximum Gain is 2.38dBi
Intend use environment	: Residential, commercial and light industrial environment

1.2. Channel List

Frequency and Channel list for 802.11 b/g/n (HT20) /ax (HT20):

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

Frequency and Channel list for 802.11 n (HT40) /ax (HT40):

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	4	2427	5	2432	6	2437
7	2442	8	2447	9	2452		

Test Frequency and Channel for 802.11 b/g/n (HT20) /ax (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and Channel for 802.11 n (HT40) /ax (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	6	2437	9	2452

1.3.Test configuration

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	Enters the engineering mode
Power level setup	Default

1.4.Summary of test result

RF PART		
Test Items	Test Requirement	Result
Antenna requirement	FCC part 15.203/15.247 (b)	PASS
Duty cycle	ANSI C63.10 Section 11.6	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
Conducted Peak Output Power	FCC part 15.247 (b)(3)	PASS
Channel Bandwidth& 99% OCB	FCC part 15.247 (a)(2)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Band Edge	FCC part 15.247(d)	PASS
Spurious Emission	FCC part 15.205/15.209	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.5.Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
/	/	/	/	/


1.6.Test mode

The special RF test software was used to control EUT work in Continuous WIFI TX mode, and select test channel, wireless mode.


Test mode	Low channel	Middle channel	High channel
802.11b	2412MHz	2437MHz	2462MHz
802.11g	2412MHz	2437MHz	2462MHz
802.11n20	2412MHz	2437MHz	2462MHz
802.11n40	2422MHz	2437MHz	2452MHz
802.11ax20	2412MHz	2437MHz	2462MHz
802.11ax40	2422MHz	2437MHz	2452MHz
Note: Only the worst Data 1Mbps/6Mbps/6.5Mbps Record in the report			

1.7.Block Diagram

Radiated Emission



Conducted Spurious



RF Conducted Test



1.8.Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35℃	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	AC120V/60Hz	N/A

Note: N/A is an abbreviation for Not Applicable.

1.9.Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for radio frequency	$\pm 7 \times 10^{-8}$	
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$	
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$	
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$	
Radiated Emission(1GHz~6GHz)	$\pm 3.92\text{dB}$	
Radiated Emission(6GHz~18GHz)	$\pm 4.33\text{dB}$	
Radiated Emission(18GHz~40GHz)	$\pm 3.38\text{dB}$	
Uncertainty for conducted RF Power	$\pm 0.20\text{dB}$	
Conducted spurious emissions	$\pm 0.24\text{dB}$	
Uncertainty for temperature	0.6℃	
Uncertainty for humidity	1%	
Bandwidth	$\pm 1.5 \times 10^{-6}$	
Time	$\pm 2\%$	
Duty Cycle	$\pm 2\%$	

Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%

1.10.Test Facility

Site Description		
Name of Firm	:	Shenzhen NTT Testing Technology Co.,Ltd.
Site Location	:	1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial Park, No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao 'an District, Shenzhen City, Guangdong, China
FCC Designation Number	:	CN3446
FCC Test Firm Registration Number	:	129414

1.11.Test Equipment

Conducted Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	HSRCE944	/	HTEC	2025/4/30	2028/4/29
EMI Test Receiver	ESPI	/	RS	2025/9/8	2026/9/7
LISN	NNLK 8129	00603	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00694	Schwarzbeck	2025/9/8	2026/9/7
LISN	NNHV 8123-400	00680	Schwarzbeck	2025/9/8	2026/9/7
Cable	RG223-1500MM	NA	RG	2025/9/8	2026/9/7

Radiated Test Site(Below 1G and Above 1G)&RF Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/7/24	2028/7/23
EMI Test Receiver	ESCI	101018	RS	2025/9/8	2026/9/7
Amplifier (30MHz-1GHz)	BBV 9718D	00042	SCHWARZBECK	2025/9/8	2026/9/7
Bilog Antenna (30MHz-1GHz)	VULB9168	1858	SCHWARZBECK	2025/9/9	2026/9/8
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/9/9	2026/9/8
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/9/8	2026/9/7
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/9/8	2026/9/7
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/9/8	2026/9/7

Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/9/8	2026/9/7
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2025/9/8	2026/9/7
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHWARZBECK	2025/9/8	2026/9/7
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/9/8	2026/9/7
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/9/8	2026/9/7
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/9/8	2026/9/7
Power Sensor	TR1029-2	512364	Techoy	2025/9/8	2026/9/7
RF Swith	TR1029-1	512364	Techoy	2025/9/8	2026/9/7
Cable	DA800- 4000MM	NA	DA	2025/9/8	2026/9/7
Cable	DA800- 11000MM	NA	DA	2025/9/8	2026/9/7
High Pass Filter	HXHPF-3G- S	2025072200 01	luanwei	2025/9/8	2026/9/7

Test software

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

2. Conducted emission at the mains terminals test


2.1.Limit

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor.1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.2.Test Setup

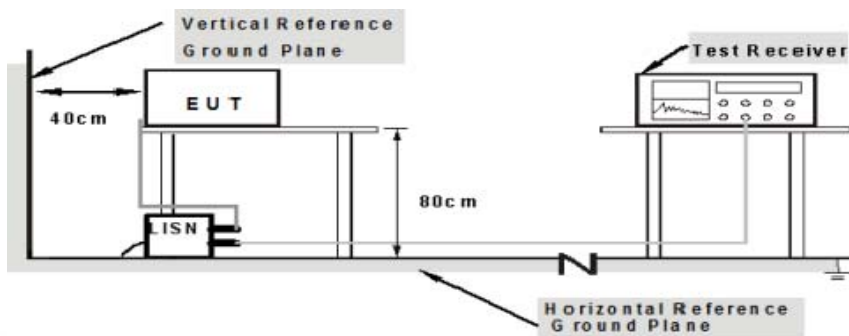


Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

2.3.Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
- 5.For the actual test configuration, please refer to the related Item - EUT Test Photos.

2.4.Test Result

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	802.11b(CH00)

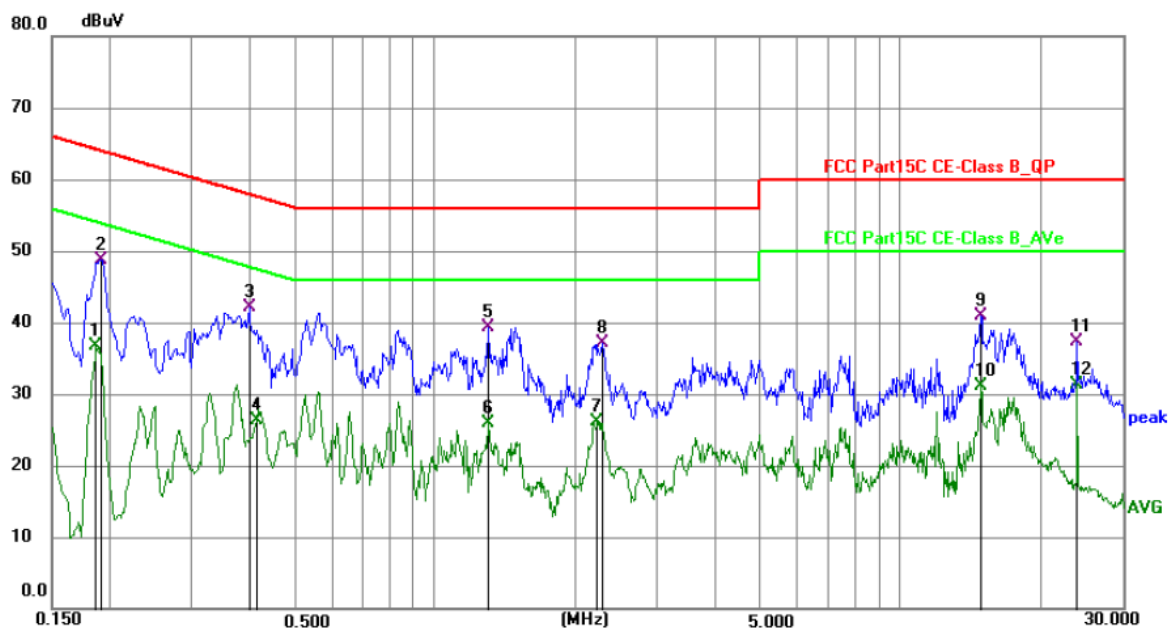


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	26.45	10.17	36.62	54.21	-17.59	AVG
2 *	0.1905	38.55	10.17	48.72	64.01	-15.29	QP
3	0.3975	31.92	10.13	42.05	57.91	-15.86	QP
4	0.4110	16.09	10.13	26.22	47.63	-21.41	AVG
5	1.3020	29.09	10.14	39.23	56.00	-16.77	QP
6	1.3020	15.84	10.14	25.98	46.00	-20.02	AVG
7	2.2334	15.95	10.16	26.11	46.00	-19.89	AVG
8	2.2875	26.91	10.16	37.07	56.00	-18.93	QP
9	14.9054	30.45	10.54	40.99	60.00	-19.01	QP
10	14.9054	20.49	10.54	31.03	50.00	-18.97	AVG
11	23.9773	26.50	10.77	37.27	60.00	-22.73	QP
12	23.9773	20.55	10.77	31.32	50.00	-18.68	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(802.11b 2412MHz) in the report

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	802.11b(CH00)

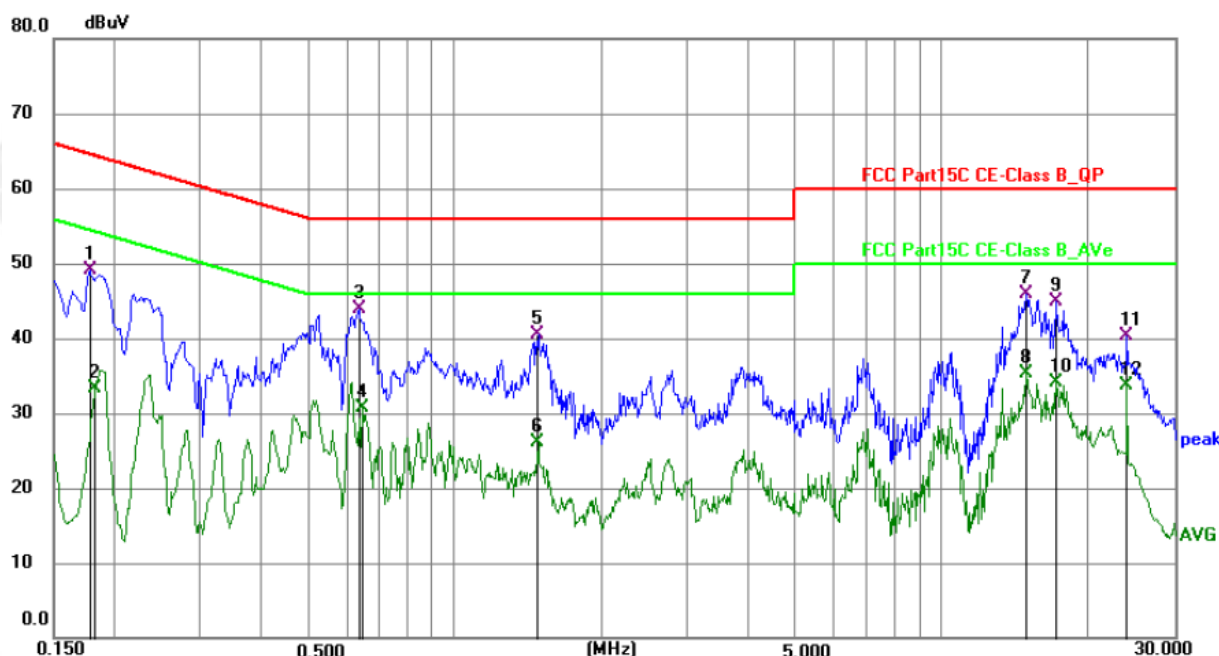

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	38.97	10.17	49.14	64.63	-15.49	QP
2	0.1824	23.14	10.17	33.31	54.38	-21.07	AVG
3 *	0.6360	33.75	10.12	43.87	56.00	-12.13	QP
4	0.6450	20.62	10.12	30.74	46.00	-15.26	AVG
5	1.4819	30.37	10.13	40.50	56.00	-15.50	QP
6	1.4819	15.91	10.13	26.04	46.00	-19.96	AVG
7	14.9054	35.30	10.52	45.82	60.00	-14.18	QP
8	14.9054	24.73	10.52	35.25	50.00	-14.75	AVG
9	17.1645	34.32	10.56	44.88	60.00	-15.12	QP
10	17.1645	23.60	10.56	34.16	50.00	-15.84	AVG
11	23.9771	29.52	10.76	40.28	60.00	-19.72	QP
12	23.9771	22.89	10.76	33.65	50.00	-16.35	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(802.11b 2412MHz) in the report

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
 ANSI C63.10-2020+Cor.1-2023
 Test Result: PASS
 Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


3.2.Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.



The test setup for emission measurement below 30MHz.

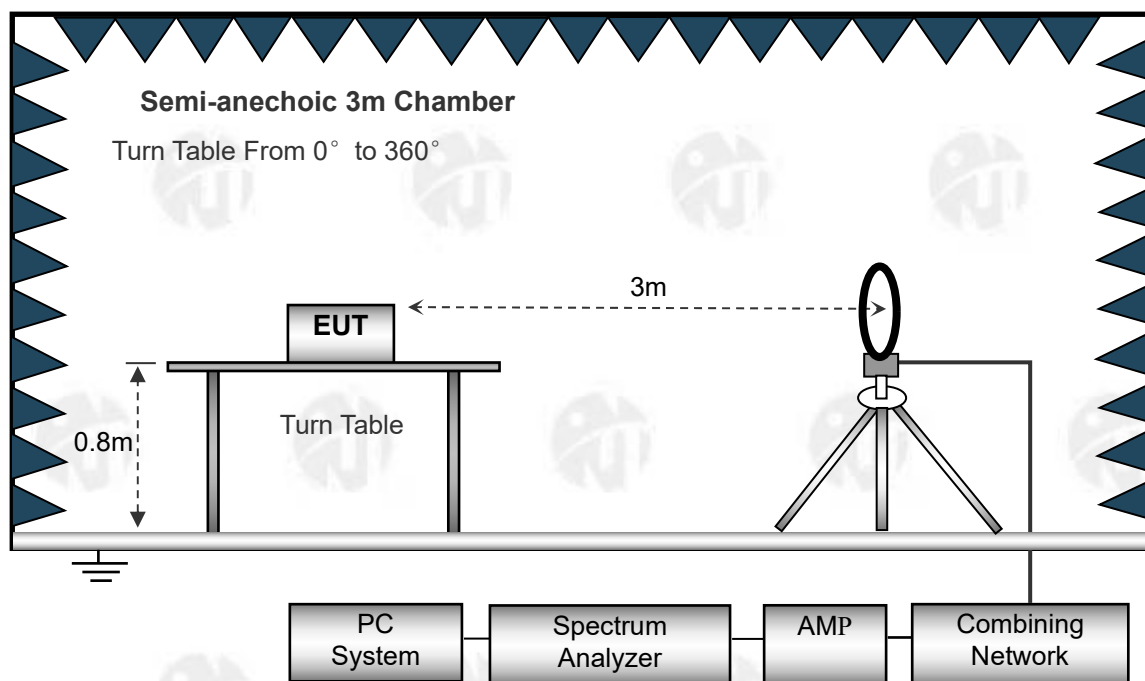

The test setup for emission measurement from 30 MHz to 1 GHz.

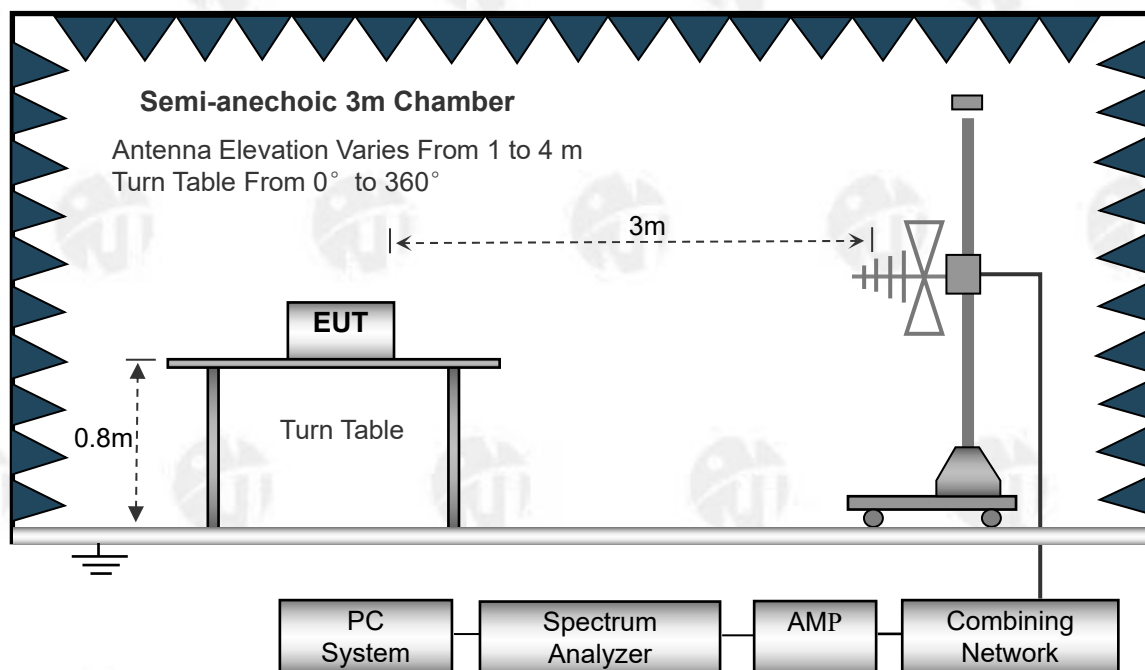

The test setup for emission measurement above 1 GHz.

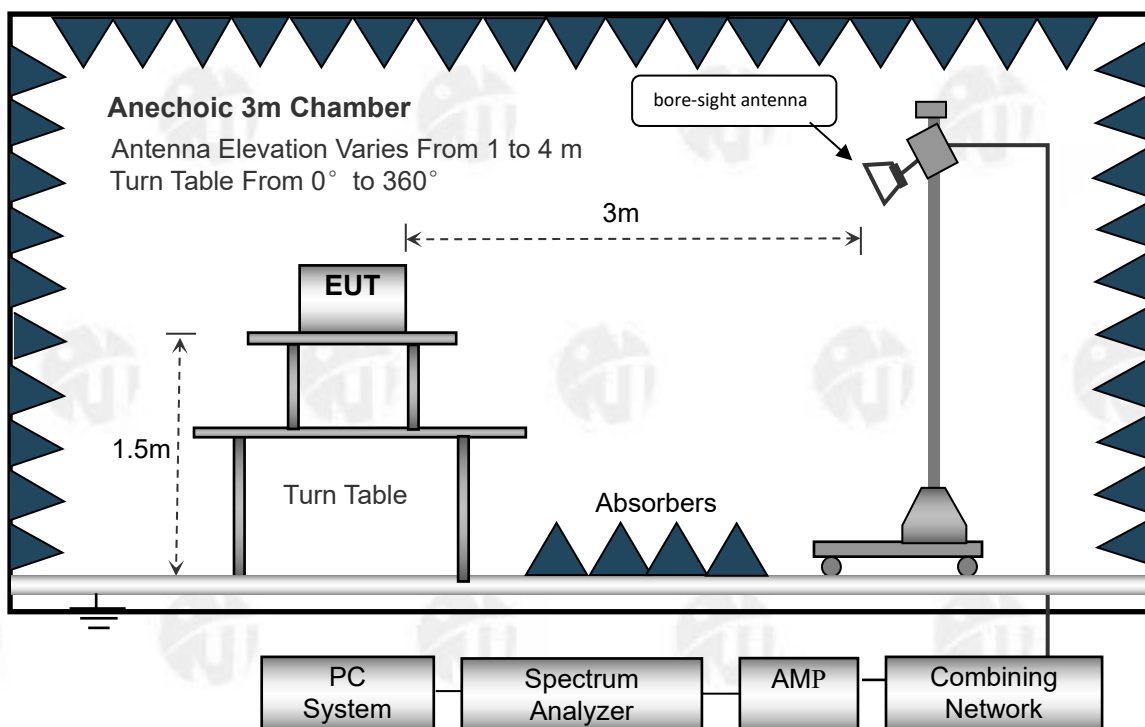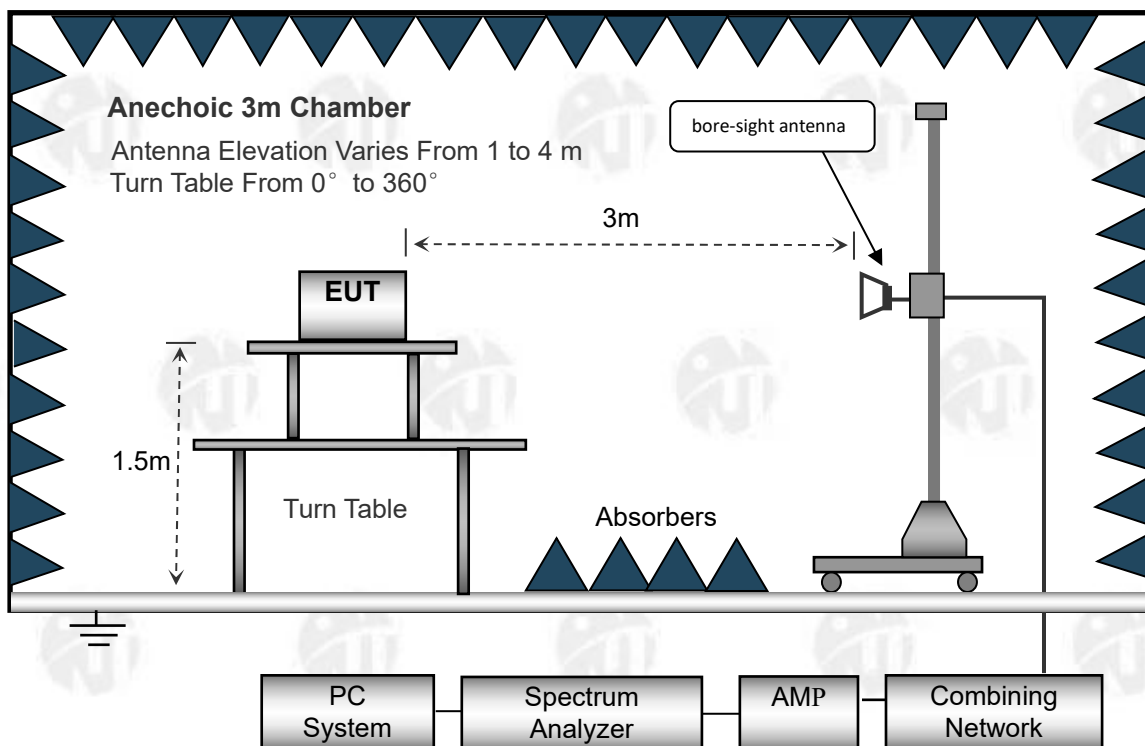

3.3.Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.


3.4.Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	802.11b(2462.00MHz)

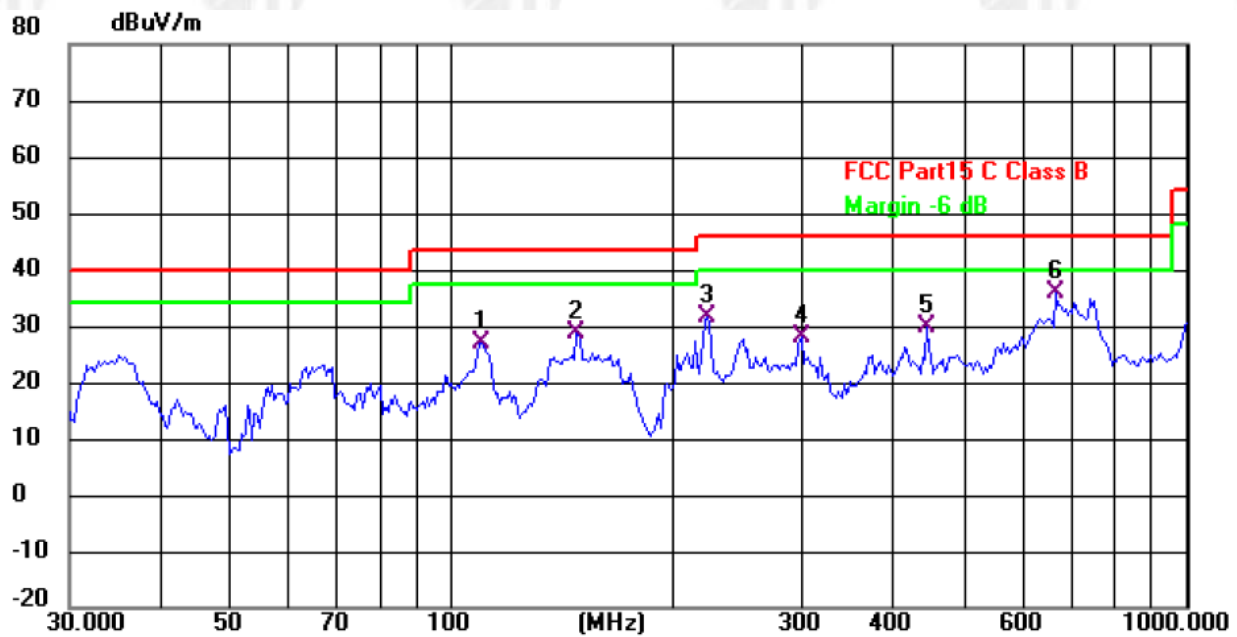

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	109.7960	41.80	-14.91	26.89	43.50	-16.61	QP
2	147.4036	41.33	-12.58	28.75	43.50	-14.75	QP
3	222.9501	46.45	-14.94	31.51	46.00	-14.49	QP
4	299.3158	40.18	-12.28	27.90	46.00	-18.10	QP
5	443.2941	38.63	-8.97	29.66	46.00	-16.34	QP
6 *	665.8034	39.88	-3.81	36.07	46.00	-9.93	QP

Note:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(802.11b) in the report

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	802.11b(2462.00MHz)

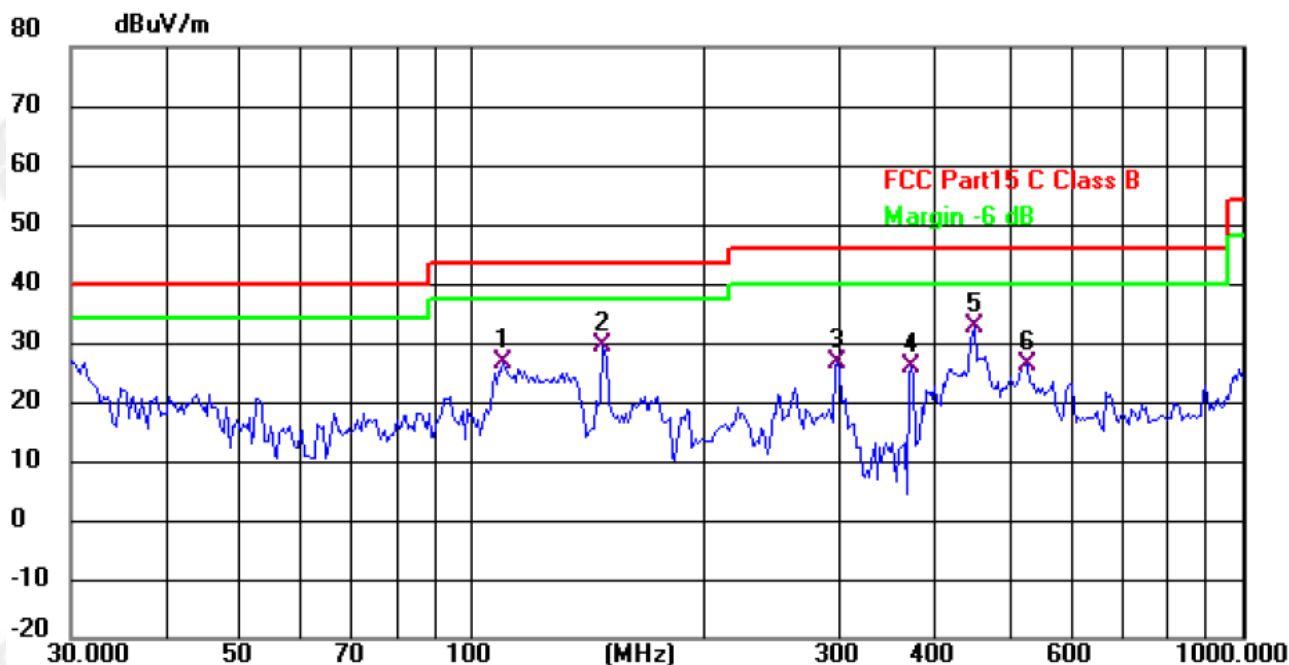

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	109.7960	41.61	-14.91	26.70	43.50	-16.80	QP
2	147.4036	42.06	-12.58	29.48	43.50	-14.02	QP
3	297.2240	39.14	-12.37	26.77	46.00	-19.23	QP
4	372.0045	36.43	-10.63	25.80	46.00	-20.20	QP
5 *	449.5557	41.59	-8.82	32.77	46.00	-13.23	QP
6	524.5540	33.41	-6.99	26.42	46.00	-19.58	QP

Note:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(802.11b) in the report

Test Frequency 1GHz-25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824	43.12	34.11	5.04	32.44	46.49	74.00	-27.51	Pk
V	4824	36.53	34.11	5.04	32.44	39.90	54.00	-14.10	AV
V	7236	40.8	32.57	6.30	35.89	50.42	74.00	-23.58	Pk
V	7236	28.21	32.57	6.30	35.89	37.83	54.00	-16.17	AV
V	9648	37.44	32.96	7.56	38.40	50.44	74.00	-23.56	Pk
V	9648	26.92	32.96	7.56	38.40	39.92	54.00	-14.08	AV
V	12060	36.33	32.06	8.92	39.01	52.20	74.00	-21.80	Pk
V	12060	24.52	32.06	8.92	39.01	40.39	54.00	-13.61	AV
H	4824	46.57	34.11	5.04	32.44	49.94	74.00	-24.06	Pk
H	4824	35.22	34.11	5.04	32.44	38.59	54.00	-15.41	AV
H	7236	38.41	32.57	6.30	35.89	48.03	74.00	-25.97	Pk
H	7236	28.93	32.57	6.30	35.89	38.55	54.00	-15.45	AV
H	9648	36.89	32.96	7.56	38.40	49.89	74.00	-24.11	Pk
H	9648	26.24	32.96	7.56	38.40	39.24	54.00	-14.76	AV
H	12060	35.97	32.06	8.92	39.01	51.84	74.00	-22.16	Pk
H	12060	24.04	32.06	8.92	39.01	39.91	54.00	-14.09	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874	46.97	34.08	5.08	32.57	50.54	74.00	-23.46	Pk
V	4874	39.10	34.08	5.08	32.57	42.67	54.00	-11.33	AV
V	7311	42.54	32.62	6.34	35.95	52.21	74.00	-21.79	Pk
V	7311	34.30	32.62	6.34	35.95	43.97	54.00	-10.03	AV
V	9748	43.79	32.93	7.58	38.40	56.84	74.00	-17.16	Pk
V	9748	33.69	32.93	7.58	38.40	46.74	54.00	-7.26	AV
V	12185	42.14	31.97	8.89	39.04	58.10	74.00	-15.90	Pk
V	12185	30.33	31.97	8.89	39.04	46.29	54.00	-7.71	AV
H	4874	45.44	34.08	5.08	32.57	49.01	74.00	-24.99	Pk
H	4874	33.94	34.08	5.08	32.57	37.51	54.00	-16.49	AV
H	7311	40.65	32.62	6.34	35.95	50.32	74.00	-23.68	Pk
H	7311	33.22	32.62	6.34	35.95	42.89	54.00	-11.11	AV
H	9748	43.96	32.93	7.58	38.40	57.01	74.00	-16.99	Pk
H	9748	26.83	32.93	7.58	38.40	39.88	54.00	-14.12	AV
H	12185	38.03	31.97	8.89	39.04	53.99	74.00	-20.01	Pk
H	12185	26.55	31.97	8.89	39.04	42.51	54.00	-11.49	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924	47.90	34.05	5.14	32.79	51.78	74.00	-22.22	Pk
V	4924	33.47	34.05	5.14	32.79	37.35	54.00	-16.65	AV
V	7386	40.09	32.67	6.36	35.99	49.77	74.00	-24.23	Pk
V	7386	27.32	32.67	6.36	35.99	37.00	54.00	-17.00	AV
V	9848	42.07	32.89	7.59	38.37	55.14	74.00	-18.86	Pk
V	9848	29.94	32.89	7.59	38.37	43.01	54.00	-10.99	AV
V	12310	34.39	31.88	8.82	39.06	50.39	74.00	-23.61	Pk
V	12310	26.77	31.88	8.82	39.06	42.77	54.00	-11.23	AV
H	4924	44.71	34.05	5.14	32.79	48.59	74.00	-25.41	Pk
H	4924	35.49	34.05	5.14	32.79	39.37	54.00	-14.63	AV
H	7386	44.30	32.67	6.36	35.99	53.98	74.00	-20.02	Pk
H	7386	29.34	32.67	6.36	35.99	39.02	54.00	-14.98	AV
H	9848	41.20	32.89	7.59	38.37	54.27	74.00	-19.73	Pk
H	9848	27.80	32.89	7.59	38.37	40.87	54.00	-13.13	AV
H	12310	36.42	31.88	8.82	39.06	52.42	74.00	-21.58	Pk
H	12310	25.41	31.88	8.82	39.06	41.41	54.00	-12.59	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(802.11b) in the report

The 1-25GHz range has been tested, and the report only records the worst performance of the 1-18G range.

Radiated Band Emission Measurement:

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
802.1 1b	Low Channel: 2412MHz									
	H	2390	57.82	35.17	3.48	27.49	53.62	74.00	-20.38	PK
	H	2390	50.91	35.17	3.48	27.49	46.71	54.00	-7.29	AV
	H	2400	61.47	35.16	3.49	27.52	57.32	74.00	-16.68	PK
	H	2400	50.59	35.16	3.49	27.52	46.44	54.00	-7.56	AV
	V	2390	59.00	35.17	3.48	27.49	54.80	74.00	-19.20	PK
	V	2390	51.34	35.17	3.48	27.49	47.14	54.00	-6.86	AV
	V	2400	60.38	35.16	3.49	27.52	56.23	74.00	-17.77	PK
	V	2400	50.60	35.16	3.49	27.52	46.45	54.00	-7.55	AV
	High Channel: 2462MHz									
	H	2483.5	58.80	35.11	3.56	27.75	55.00	74.00	-19.00	PK
	H	2483.5	49.46	35.11	3.56	27.75	45.66	54.00	-8.34	AV
	H	2500	59.73	35.1	3.57	27.8	56.00	74.00	-18.00	PK
	H	2500	50.09	35.1	3.57	27.8	46.36	54.00	-7.64	AV
	V	2483.5	59.32	35.11	3.56	27.75	55.52	74.00	-18.48	PK
	V	2483.5	50.98	35.11	3.56	27.75	47.18	54.00	-6.82	AV
	V	2500	58.43	35.1	3.57	27.8	54.70	74.00	-19.30	PK
	V	2500	50.95	35.1	3.57	27.8	47.22	54.00	-6.78	AV
802.1 1g	Low Channel: 2412MHz									
	H	2390	58.06	35.17	3.48	27.49	53.86	74.00	-20.14	PK
	H	2390	49.74	35.17	3.48	27.49	45.54	54.00	-8.46	AV
	H	2400	59.41	35.16	3.49	27.52	55.26	74.00	-18.74	PK
	H	2400	50.91	35.16	3.49	27.52	46.76	54.00	-7.24	AV
	V	2390	58.12	35.17	3.48	27.49	53.92	74.00	-20.08	PK
	V	2390	49.77	35.17	3.48	27.49	45.57	54.00	-8.43	AV
	V	2400	59.83	35.16	3.49	27.52	55.68	74.00	-18.32	PK
	V	2400	49.07	35.16	3.49	27.52	44.92	54.00	-9.08	AV
	High Channel: 2462MHz									
	H	2483.5	56.95	35.11	3.56	27.75	53.15	74.00	-20.85	PK
	H	2483.5	48.42	35.11	3.56	27.75	44.62	54.00	-9.38	AV
	H	2500	58.91	35.1	3.57	27.8	55.18	74.00	-18.82	PK
	H	2500	49.55	35.1	3.57	27.8	45.82	54.00	-8.18	AV
	V	2483.5	58.09	35.11	3.56	27.75	54.29	74.00	-19.71	PK
	V	2483.5	49.97	35.11	3.56	27.75	46.17	54.00	-7.83	AV
	V	2500	58.24	35.1	3.57	27.8	54.51	74.00	-19.49	PK
	V	2500	49.30	35.1	3.57	27.8	45.57	54.00	-8.43	AV
802.1 1 n20	Low Channel: 2412MHz									
	H	2390	58.01	35.17	3.48	27.49	53.81	74.00	-20.19	PK
	H	2390	50.56	35.17	3.48	27.49	46.36	54.00	-7.64	AV
	H	2400	61.05	35.16	3.49	27.52	56.90	74.00	-17.10	PK
	H	2400	49.96	35.16	3.49	27.52	45.81	54.00	-8.19	AV
	V	2390	58.30	35.17	3.48	27.49	54.10	74.00	-19.90	PK
	V	2390	51.29	35.17	3.48	27.49	47.09	54.00	-6.91	AV
	V	2400	60.55	35.16	3.49	27.52	56.40	74.00	-17.60	PK
	V	2400	50.23	35.16	3.49	27.52	46.08	54.00	-7.92	AV
	High Channel: 2462MHz									
	H	2483.5	57.63	35.11	3.56	27.75	53.83	74.00	-20.17	PK
	H	2483.5	48.64	35.11	3.56	27.75	44.84	54.00	-9.16	AV
	H	2500	59.10	35.1	3.57	27.8	55.37	74.00	-18.63	PK

	H	2500	50.46	35.1	3.57	27.8	46.73	54.00	-7.27	AV
	V	2483.5	58.37	35.11	3.56	27.75	54.57	74.00	-19.43	PK
	V	2483.5	50.25	35.11	3.56	27.75	46.45	54.00	-7.55	AV
	V	2500	58.84	35.1	3.57	27.8	55.11	74.00	-18.89	PK
	V	2500	50.05	35.1	3.57	27.8	46.32	54.00	-7.68	AV
802.1 1 n40	Low Channel: 2422MHz									
	H	2390	58.27	35.17	3.48	27.49	54.07	74.00	-19.93	PK
	H	2390	49.71	35.17	3.48	27.49	45.51	54.00	-8.49	AV
	H	2400	59.80	35.16	3.49	27.52	55.65	74.00	-18.35	PK
	H	2400	50.09	35.16	3.49	27.52	45.94	54.00	-8.06	AV
	V	2390	57.94	35.17	3.48	27.49	53.74	74.00	-20.26	PK
	V	2390	49.41	35.17	3.48	27.49	45.21	54.00	-8.79	AV
	V	2400	59.25	35.16	3.49	27.52	55.10	74.00	-18.9	PK
	V	2400	49.59	35.16	3.49	27.52	45.44	54.00	-8.56	AV
	High Channel: 2452MHz									
	H	2483.5	57.74	35.11	3.56	27.75	53.94	74.00	-20.06	PK
	H	2483.5	49.07	35.11	3.56	27.75	45.27	54.00	-8.73	AV
	H	2500	58.86	35.10	3.57	27.80	55.13	74.00	-18.87	PK
	H	2500	50.10	35.10	3.57	27.80	46.37	54.00	-7.63	AV
	V	2483.5	58.28	35.11	3.56	27.75	54.48	74.00	-19.52	PK
	V	2483.5	49.97	35.11	3.56	27.75	46.17	54.00	-7.83	AV
	V	2500	58.92	35.10	3.57	27.80	55.19	74.00	-18.81	PK
	V	2500	49.84	35.10	3.57	27.80	46.11	54.00	-7.89	AV
802.1 1ax2 0	Low Channel: 2412MHz									
	H	2390	57.91	35.17	3.48	27.49	53.71	74.00	-20.29	PK
	H	2390	49.94	35.17	3.48	27.49	45.74	54.00	-8.26	AV
	H	2400	59.51	35.16	3.49	27.52	55.36	74.00	-18.64	PK
	H	2400	50.14	35.16	3.49	27.52	45.99	54.00	-8.01	AV
	V	2390	58.10	35.17	3.48	27.49	53.90	74.00	-20.1	PK
	V	2390	50.24	35.17	3.48	27.49	46.04	54.00	-7.96	AV
	V	2400	59.41	35.16	3.49	27.52	55.26	74.00	-18.74	PK
	V	2400	50.20	35.16	3.49	27.52	46.05	54.00	-7.95	AV
	High Channel: 2462MHz									
	H	2483.5	57.91	35.11	3.56	27.75	54.11	74.00	-19.89	PK
	H	2483.5	49.23	35.11	3.56	27.75	45.43	54.00	-8.57	AV
	H	2500	59.07	35.10	3.57	27.80	55.34	74.00	-18.66	PK
	H	2500	49.79	35.10	3.57	27.80	46.06	54.00	-7.94	AV
	V	2483.5	58.74	35.11	3.56	27.75	54.94	74.00	-19.06	PK
	V	2483.5	49.68	35.11	3.56	27.75	45.88	54.00	-8.12	AV
	V	2500	58.36	35.10	3.57	27.80	54.63	74.00	-19.37	PK
	V	2500	49.57	35.10	3.57	27.80	45.84	54.00	-8.16	AV

802.11ax40	Low Channel: 2422MHz									
	H	2390	58.26	35.17	3.48	27.49	54.06	74.00	-19.94	PK
	H	2390	49.44	35.17	3.48	27.49	45.24	54.00	-8.76	AV
	H	2400	59.35	35.16	3.49	27.52	55.20	74.00	-18.8	PK
	H	2400	49.56	35.16	3.49	27.52	45.41	54.00	-8.59	AV
	V	2390	57.48	35.17	3.48	27.49	53.28	74.00	-20.72	PK
	V	2390	50.23	35.17	3.48	27.49	46.03	54.00	-7.97	AV
	V	2400	59.60	35.16	3.49	27.52	55.45	74.00	-18.55	PK
	V	2400	49.82	35.16	3.49	27.52	45.67	54.00	-8.33	AV
	High Channel: 2452MHz									
	H	2483.5	57.86	35.11	3.56	27.75	54.06	74.00	-19.94	PK
	H	2483.5	48.77	35.11	3.56	27.75	44.97	54.00	-9.03	AV
	H	2500	59.44	35.10	3.57	27.80	55.71	74.00	-18.29	PK
	H	2500	49.71	35.10	3.57	27.80	45.98	54.00	-8.02	AV
	V	2483.5	58.43	35.11	3.56	27.75	54.63	74.00	-19.37	PK
	V	2483.5	50.40	35.11	3.56	27.75	46.60	54.00	-7.4	AV
	V	2500	58.71	35.10	3.57	27.80	54.98	74.00	-19.02	PK
	V	2500	49.57	35.10	3.57	27.80	45.84	54.00	-8.16	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.										

4. Duty cycle

4.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor.1-2023
Test Result: PASS

4.2.Test Setup



4.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set the center frequency of the instrument to the center frequency of the transmission.
 - b) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - c) Set $VBW \geq RBW$. Detector = peak or average.
 - d) Sweep time = auto couple.
 - e) Trace mode = max hold.
 - f) Allow trace to fully stabilize.

4.4.Test Result

Please see the attachment for data.

5. Conducted Spurious Emissions

5.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor.1-2023
Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.2.Test Setup



5.3.Test Procedure

- Set instrument center frequency to DTS channel center frequency.
 - Set the span to ≥ 1.5 times the DTS bandwidth.
 - Set the RBW = 100 kHz.
 - Set the VBW $\geq [3 \times \text{RBW}]$.
 - Detector = peak.
 - Sweep time = No faster than coupled (auto) time.
 - Trace mode = max-hold.
 - Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level

Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

5.4.Test Result

Please see the attachment for data.

6. Band Edge Measurement

6.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247


Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02April 2,2019;

ANSI C63.10-2020+Cor.1-2023

Test Limit: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

6.2.Test setup



6.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
3. Establish a reference level by using the following procedure
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ~ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = No faster than coupled (auto) time.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
4. Establish an emission level by using the following procedure:

a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

6.4.Test Result

Please see the attachment for data.

7. -6 dB Bandwidth and 99% Bandwidth Measurement

7.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019; ANSI C63.10-2020+Cor.1-2023

7.2.Test Setup



7.3.Test Procedure

DTS Bandwidth

- a) Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- b) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Trace mode = max-hold.
- f) Sweep = No faster than coupled (auto) time.
- g) Allow the trace to stabilize.

99% Bandwidth

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.

7.4.Test Result

Please see the attachment for data.

8. Maximum Output Power

8.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019; ANSI C63.10-2020+Cor.1-2023

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2.Test Setup



8.3.Test Procedure

ANSI ANSI C63.10-2020+Cor.1-2023 section 11.9.2.2.5

Method AVGSA-2A uses rms detection with slow sweep with spectrum bin averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to >1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, but do not exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq [10 \times (\text{number of points in sweep}) \times (\text{total ON/OFF period of the transmitted signal})]$.
- Set detector = Power averaging (rms).
- Perform a single sweep.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band-power measurement function with band limits set equal to the OBW band-edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

8.4.Test Result

Please see the attachment for data.

9. Power Spectral density


9.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019; ANSI C63.10-2020+Cor.1-2023

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (e)	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

9.2.Test Setup

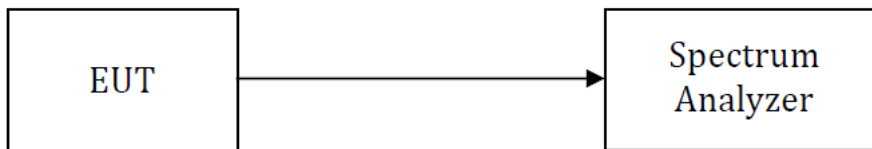

9.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02;

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set instrument center frequency to DTS channel center frequency
3. Set span to > 1.5 times the OBW.
4. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
5. Set VBW $\geq [3 \times \text{RBW}]$
6. Detector = power averaging (rms) or sample detector (when rms not available).
7. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
8. Sweep time = auto couple.
9. Employ trace averaging (rms) mode over a minimum of 100 traces.
10. Use the peak marker function to determine the maximum amplitude level.
11. If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).
12. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.4.Test Result

Please see the attachment for data.

10. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

11. TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----