



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 1 of 49

Applicant : Georg Fischer JRG AG
Address of Applicant : Hauptstrasse 130, Sissach, 4450, Switzerland

Product Name : Electrically Operated Water Valve
Brand Name : GF
Model Name : 9910.015, 9910.020, 9910.025, 9920.015, 9920.020
Sample Acquisition Method : Sent by client
Sample No. : E23090001-02#01(Radiation Prototype)
E23090001-02#02(Conduction Prototype)
FCC ID : 2ASE5-99001
ISED Number : 24912-99001

Standards : FCC CFR47 Part 15, Subpart C
RSS-Gen (Issue 5, Amd.2-Feb 2021)
RSS-247 (Issue 3, August 2023)

Date of Receipt : 2023-09-04
Date of Test : 2023-09-04 ~ 2023-09-22
Date of Issue : 2023-09-22

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:

Erik Yang
(Erik Yang)

Reviewed by:

Jennifer Zhou
(Jennifer Zhou)

Approved by:

报告专用章

Echo Mu

(Authorized signatory: Echo Mu)



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 2 of 49

Contents

1	GENERAL INFORMATION	3
1.1	TESTING LABORATORY	3
1.2	DETAILS OF APPLICATION	3
1.3	DETAILS OF EUT	3
1.4	TEST METHODOLOGY	4
1.5	TEST SUMMARY	5
2	TEST CONDITION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	EQUIPMENT LIST	6
2.3	MEASUREMENT UNCERTAINTY	6
3	TEST SET-UP AND OPERATION MODES	7
3.1	DETAILS OF TEST MODE	7
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	7
3.3	SUPPORT SOFTWARE	7
3.4	TEST SETUP DIAGRAM	8
4	TEST RESULTS	9
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	9
4.1.1	<i>Antenna Requirement</i>	9
4.1.2	<i>Maximum peak conducted output power and E.I.R.P</i>	10
4.1.3	<i>6dB Bandwidth and 99% Bandwidth</i>	14
4.1.4	<i>Maximum conducted output power spectral density</i>	21
4.1.5	<i>Conducted Spurious Emission & Authorized-band band-edge</i>	25
4.1.6	<i>Radiated Emission</i>	40
4.1.7	<i>Band Edge (Restricted-band band-edge)</i>	41
5	APPENDIXES	42
5.1	PHOTOGRAPHS OF THE SAMPLE	42
5.2	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	47
5.3	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ	47
5.4	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ	48



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 3 of 49

1 General Information

1.1 Testing Laboratory

ISED CAB identifier #	CN0081
Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd.
Address	No.1298 Pingan Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	Georg Fischer JRG AG
Address	Hauptstrasse 130, Sissach, 4450, Switzerland
Contact Person	Philippe Cachot
Telephone	+41 61975 2402
Email	philippe-cachot@georgfischer.com
Manufacturer Company Name	Georg Fischer JRG AG
Address	Hauptstrasse 130, Sissach, 4450, Switzerland

1.3 Details of EUT

Product Name	Electrically Operated Water Valve
Brand Name	GF
Test Model Name	9910.015
Series Model Name	9910.020, 9910.025, 9920.015, 9920.020
Difference Description	All models are same in electrical characteristics. The differences between them are type designation and the appearance. So, all the RF tests were performed on model 9910.015.
FCC ID	2ASE5-99001
ISED Number	24912-99001
HVIN	99001
Mode of Operation	Bluetooth BLE
Frequency Range	2402MHz ~ 2480MHz
Number of Channels	40 (at intervals of 2 MHz)
Modulation Type	BLE ☒ GFSK 1Mbps ☒ GFSK 2Mbps
Antenna Type	PCB Antenna
Antenna Gain	1.82dBi
Test Voltage	DC 36V
Hardware Version	Index D



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 4 of 49

Software Version	V576
RF power setting in TEST SW	Cute Com_Power level setting_p 0 0

Note:

- The above information was declared by the manufacture.
- For more details, please refer to the User's manual of the EUT.

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2.402GHz	14	2.430GHz	28	2.458GHz
1	2.404GHz	15	2.432GHz	29	2.460GHz
2	2.406GHz	16	2.434GHz	30	2.462GHz
3	2.408GHz	17	2.436GHz	31	2.464GHz
4	2.410GHz	18	2.438GHz	32	2.466GHz
5	2.412GHz	19	2.440GHz	33	2.468GHz
6	2.414GHz	20	2.442GHz	34	2.470GHz
7	2.416GHz	21	2.444GHz	35	2.472GHz
8	2.418GHz	22	2.446GHz	36	2.474GHz
9	2.420GHz	23	2.448GHz	37	2.476GHz
10	2.422GHz	24	2.450GHz	38	2.478GHz
11	2.424GHz	25	2.452GHz	39	2.480GHz
12	2.426GHz	26	2.454GHz		
13	2.428GHz	27	2.456GHz		

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
RSS-Gen (Issue 5, Amd.2-Feb 2021)	General Requirements for Compliance of Radio Apparatus
RSS-247 (Issue 3, August 2023)	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 5 of 49

1.5 Test Summary

Test Item	FCC Rules	ISED Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	RSS-247 5.4(f) RSS-GEN 6.8	PASS
Maximum peak conducted output power and E.I.R.P	FCC Part 15.247(b)(3)	RSS-247 5.4(d)	PASS
6dB Bandwidth and 99% Bandwidth	FCC Part 15.247(a)(2)	RSS-247 5.2(a) RSS-Gen 6.7	PASS
Maximum conducted output power spectral density	FCC Part 15.247(e)	RSS-247 5.2(b)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	RSS-247 5.5	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	RSS-GEN 8.9	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	RSS-GEN 8.10	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	RSS-Gen 8.8	N/A ^{note}

Note(s): The EUT is powered by DC 36V. Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 6 of 49

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020B	MY59260184	2023-07-27	2024-07-26
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2023-06-08	2024-06-07
Signal Generator	Rohde & Schwarz	SMR27	100184	2023-07-27	2024-07-26
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2023-06-08	2024-06-07
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2023-03-22	2025-03-21
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2023-06-13	2025-06-12
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2023-06-18	2025-06-17
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2022-07-02	2024-07-01
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2023-06-08	2024-06-07
DC Power Supply	ITECH	IT6512A	N/A	2022-06-07	2024-06-06
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2023-06-09	2026-06-08
Test Software	BL	BL410_E	Version:1.0.0.117	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter	Uncertainty
Antenna Port Conducted Emission	< 1GHz ± 1.5 dB
	> 1GHz ± 1.5 dB
Radiated Emission	< 1GHz ± 5.00 dB
	> 1GHz ± 4.88 dB
Conducted Emission on AC Mains	150KHz-30MHz ± 2.68 dB
Occupied Channel Bandwidth	± 5 %



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 7 of 49

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. Select test channel as below:

Channel	Frequency
The lowest channel(CH0)	2402MHz
The middle channel(CH19)	2440MHz
The Highest channel(CH39)	2480MHz

The basic operation modes are:

- A. On
 - 1. BLE mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
 - 2. Normal working with Bluetooth on
- B. Standby
- C. Off

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model Name	Serial No.
Laptop	SAMSUNG	3430EA	N/A
USB Cable	N/A	N/A	1.00m Unshielded

3.3 Support Software

Description	Manufacturer	Software Name
Software	N/A	Cute Com



TEST REPORT


Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 8 of 49


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

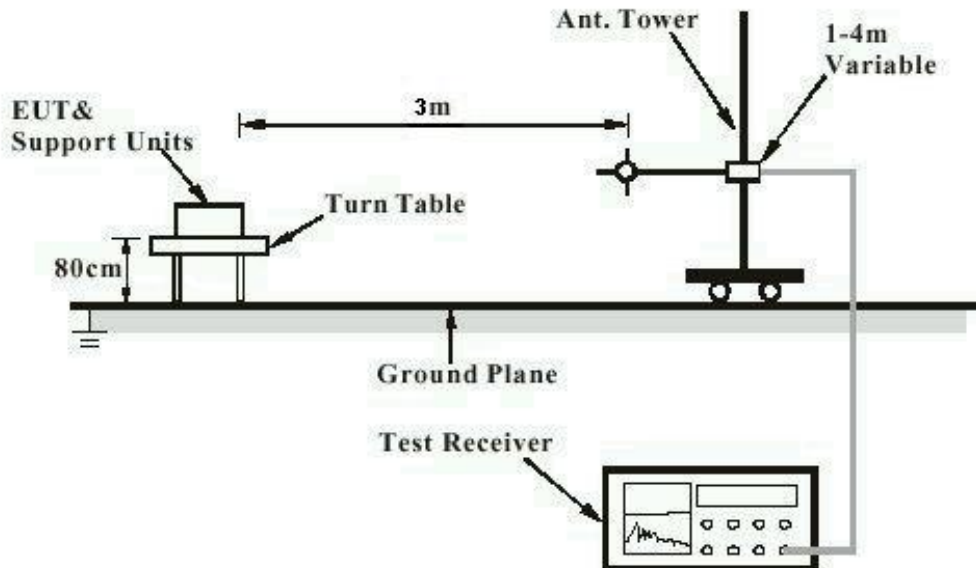

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Configuration for Transmitter Test

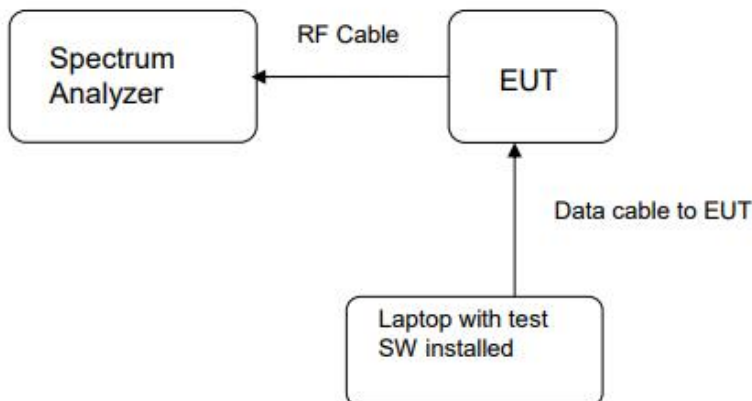



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 9 of 49

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard : FCC Part 15.247(b)(4), Part 15.203
RSS-247 5.4(f), RSS-GEN 6.8
Requirement : The use of approved antennas only with directional gains that do not exceed 6dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 1.82dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.



TEST REPORT

Report No.: SHE23090001-02AE Date: 2023-09-22 Page 10 of 49

4.1.2 Maximum peak conducted output power and E.I.R.P

RESULT: **PASS**

Test standard : FCC Part 15.247(b)(3), RSS-247 5.4(d)
Requirement : ANSI C63.10-2013 clause 11.9.1.1,
KDB 558074 clause 8.3.1.1
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.5°C
Relative humidity : 52%

Table 1: Maximum peak conducted output power

Test Mode	Test Channel (MHz)	Maximum peak conducted output power		Limit (W)
		(dBm)	(mW)	
BLE-1Mbps	2402	-0.52	0.89	< 1
	2440	-1.18	0.76	
	2480	-1.73	0.67	
BLE-2Mbps	2402	-0.45	0.90	
	2440	-1.13	0.77	
	2480	-1.70	0.68	

Table 2: E.I.R.P

Test Mode	Test Channel (MHz)	E.I.R.P		Limit (W)
		(dBm)	(mW)	
BLE-1Mbps	2402	1.30	1.35	< 4
	2440	0.64	1.16	
	2480	0.09	1.02	
BLE-2Mbps	2402	1.37	1.37	
	2440	0.69	1.17	
	2480	0.12	1.03	

Note: The antenna gain is 1.82dBi

TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 11 of 49

Figure 1: The plots of Peak Conducted Output Power, BLE-1Mbps, 2402MHz



Figure 2: The plots of Peak Conducted Output Power, BLE-1Mbps, 2440MHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 12 of 49

Figure 3: The plots of Peak Conducted Output Power, BLE-1Mbps, 2480MHz



Figure 4: The plots of Peak Conducted Output Power, BLE-2Mbps, 2402MHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 13 of 49

Figure 5: The plots of Peak Conducted Output Power, BLE-2Mbps, 2440MHz



Figure 6: The plots of Peak Conducted Output Power, BLE-2Mbps, 2480MHz





TEST REPORT

Report No.: SHE23090001-02AE Date: 2023-09-22 Page 14 of 49

4.1.3 6dB Bandwidth and 99% Bandwidth

RESULT: **PASS**

Test standard : FCC Part 15.247(a)(2), RSS-247 5.2(a)
RSS-Gen 6.7
Requirement : ANSI C63.10-2013 clause 11.8.1,
KDB 558074 clause 8.2
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.5°C
Relative humidity : 52%

Table 3: 6dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Bandwidth Limit
BLE-1Mbps	2402	0.5593	1.1190	>0.5 MHz
	2440	0.5570	1.0547	
	2480	0.5405	0.9632	
BLE-2Mbps	2402	0.7583	1.6194	
	2440	0.7983	1.6248	
	2480	0.7849	1.7870	



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 15 of 49

Figure 7: The plots of 6dB Bandwidth, BLE-1Mbps, 2402MHz


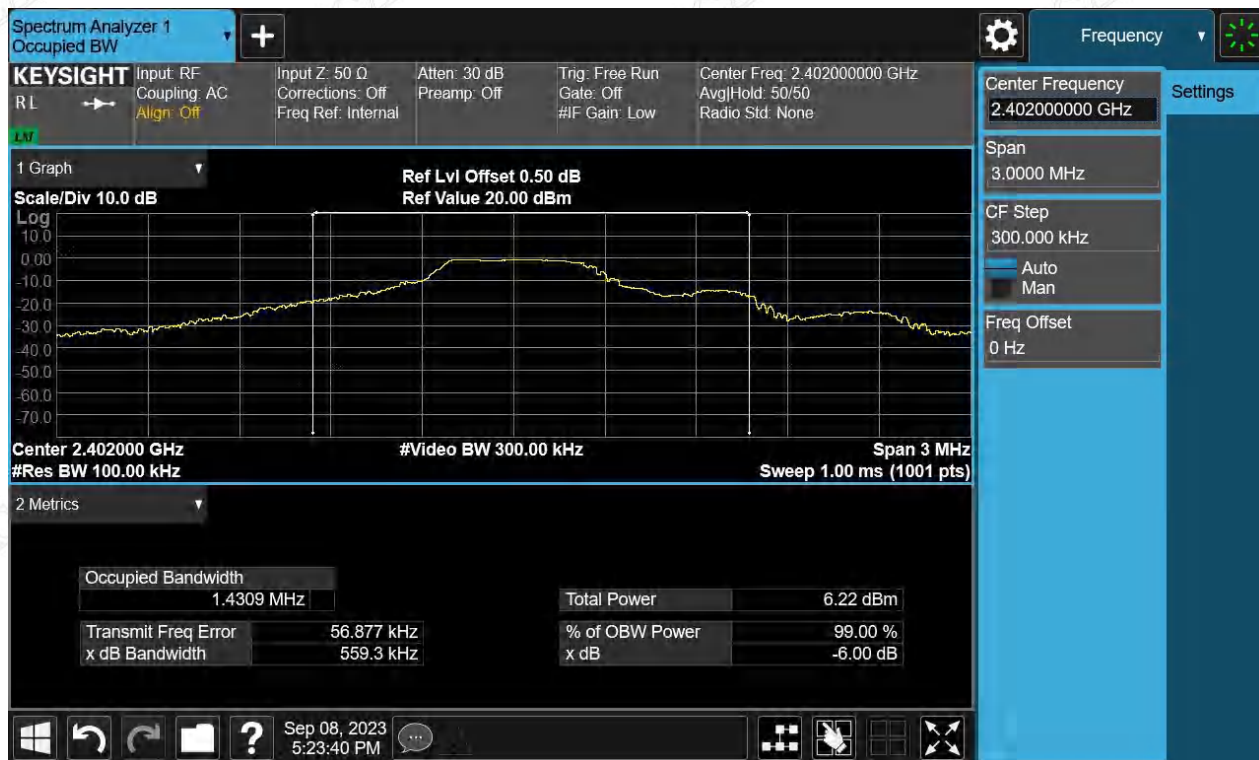


Figure 8: The plots of 99% Bandwidth, BLE-1Mbps, 2402MHz

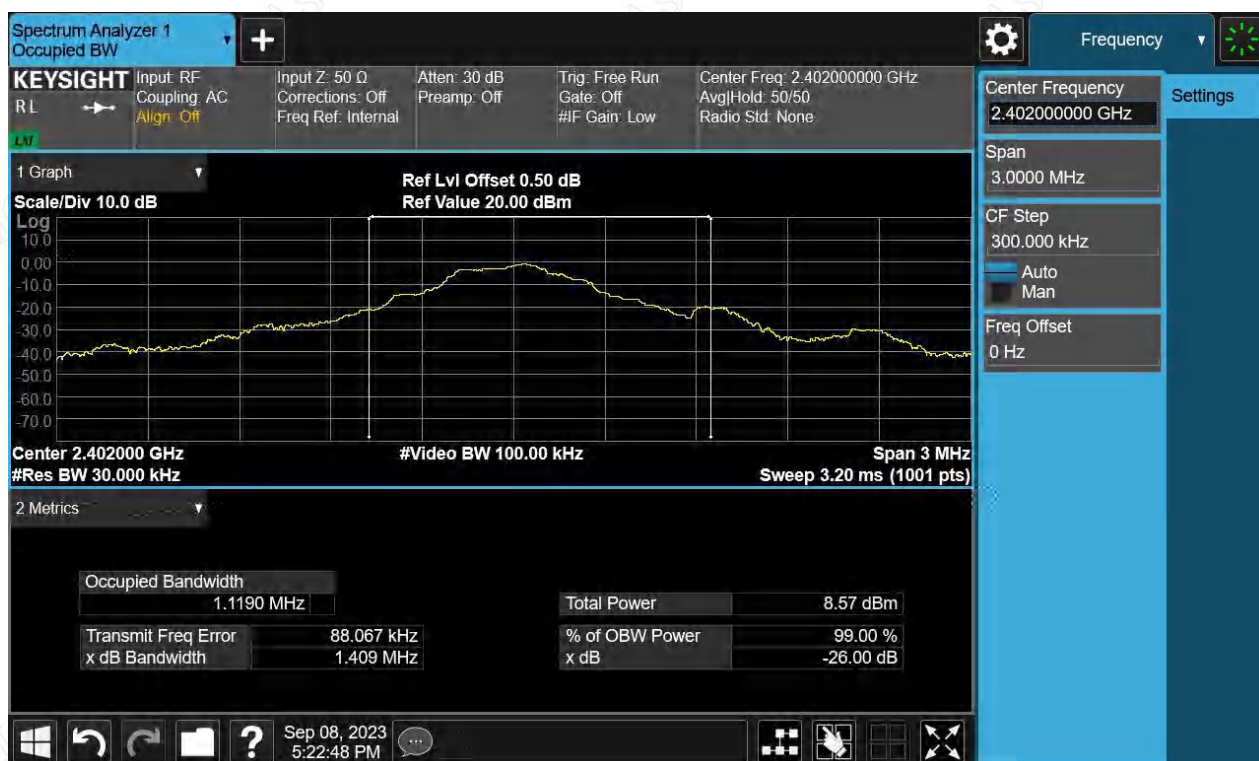

TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 16 of 49

Figure 9: The plots of 6dB Bandwidth, BLE-1Mbps, 2440MHz



Figure 10: The plots of 99% Bandwidth, BLE-1Mbps, 2440MHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 17 of 49

Figure 11: The plots of 6dB Bandwidth, BLE-1Mbps, 2480MHz

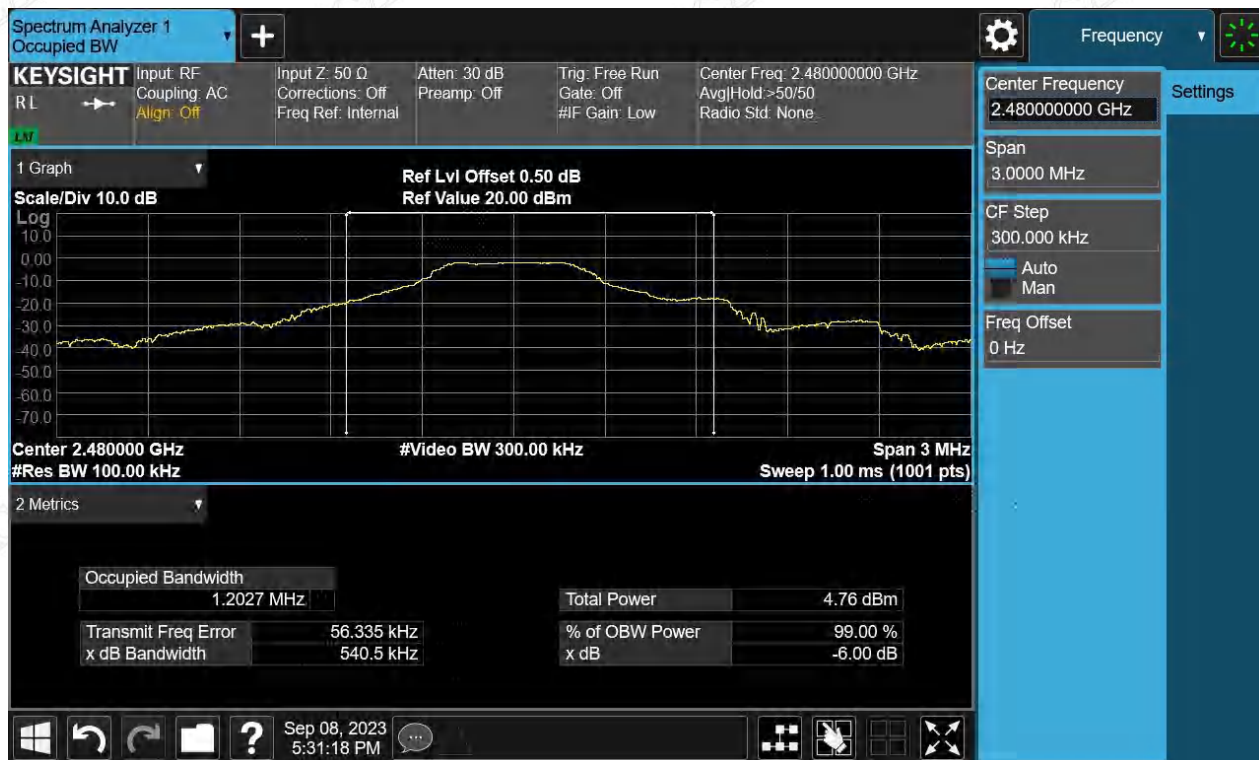


Figure 12: The plots of 99% Bandwidth, BLE-1Mbps, 2480MHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 18 of 49

Figure 13: The plots of 6dB Bandwidth, BLE-2Mbps, 2402MHz

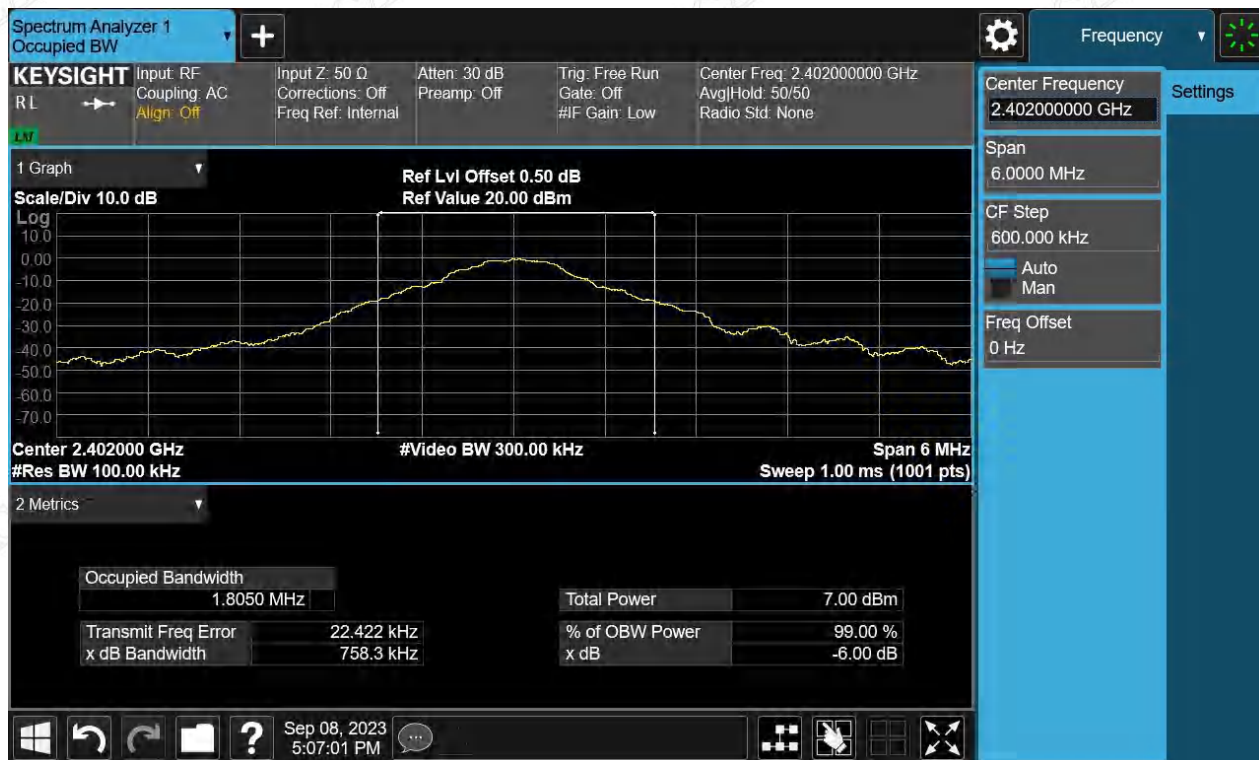


Figure 14: The plots of 99% Bandwidth, BLE-2Mbps, 2402MHz





TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 19 of 49

Figure 15: The plots of 6dB Bandwidth, BLE-2Mbps, 2440MHz

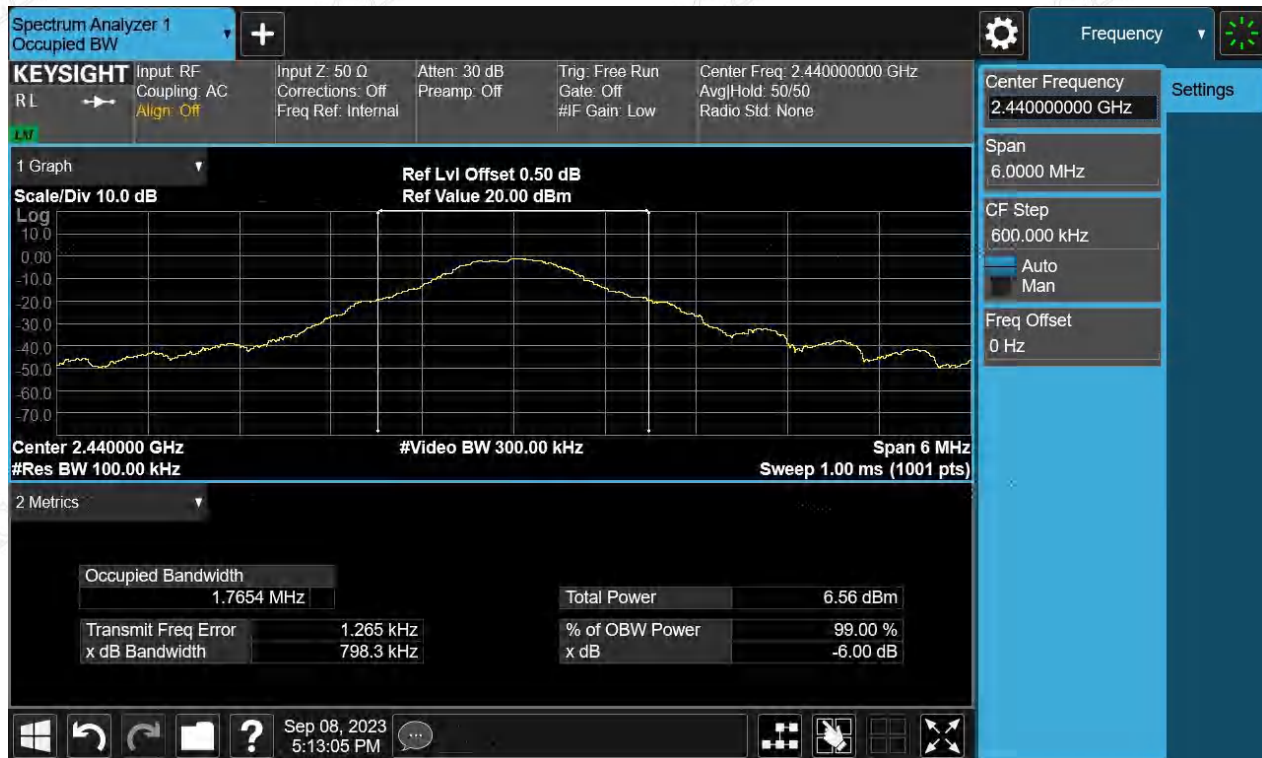


Figure 16: The plots of 99% Bandwidth, BLE-2Mbps, 2440MHz





TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 20 of 49

Figure 17: The plots of 6dB Bandwidth, BLE-2Mbps, 2480MHz

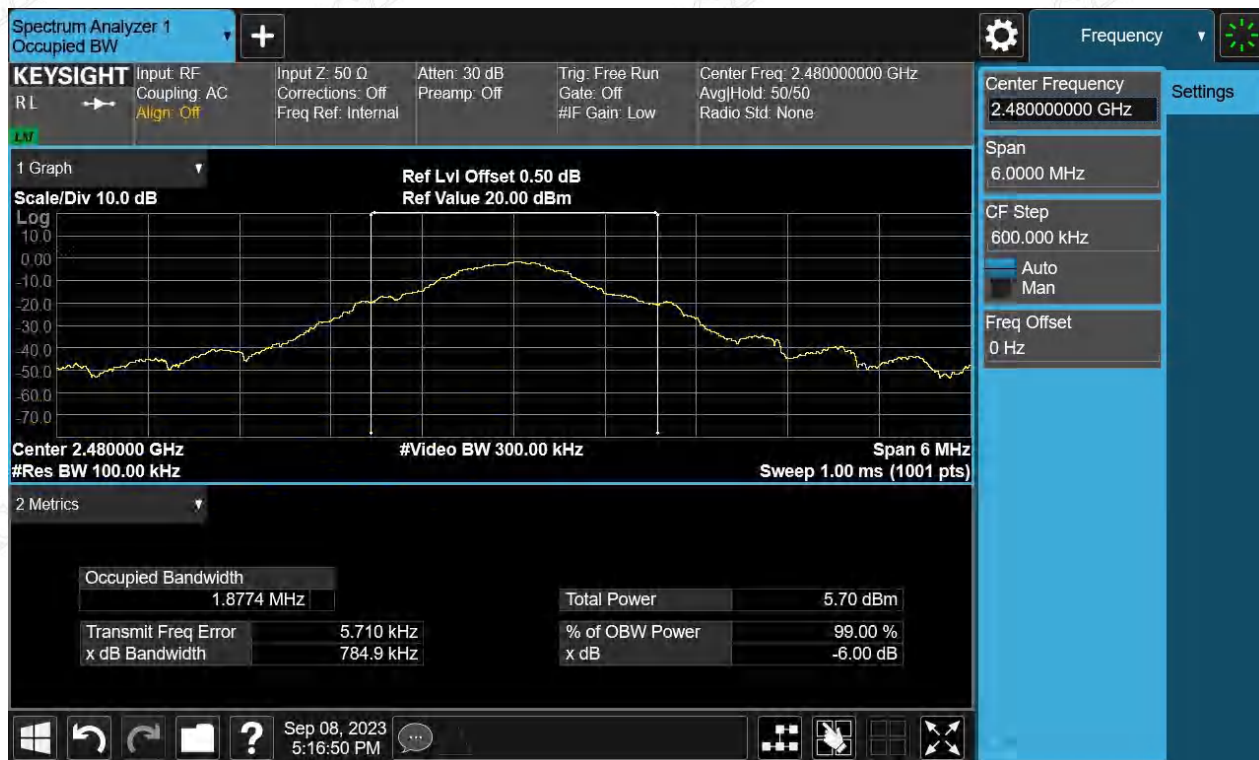


Figure 18: The plots of 99% Bandwidth, BLE-2Mbps, 2480MHz





TEST REPORT

Report No.: SHE23090001-02AE Date: 2023-09-22 Page 21 of 49

4.1.4 Maximum conducted output power spectral density

RESULT: **PASS**

Test standard : FCC Part 15.247(e), RSS-247 5.2(b)
Requirement : ANSI C63.10-2013 clause 11.10.2,
KDB 558074 clause 8.4
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 24.5°C
Relative humidity : 52%

Table 4: Maximum conducted output power spectral density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
BLE-1Mbps	2402	-9.89	8
	2440	-10.13	
	2480	-12.18	
BLE-2Mbps	2402	-13.42	
	2440	-13.90	
	2480	-14.67	

TEST REPORT

Report No.: SHE23090001-02AE


Date: 2023-09-22

Page 22 of 49

Figure 19: The plots of Power Spectral Density, BLE-1Mbps, 2402MHz



Figure 20: The plots of Power Spectral Density, BLE-1Mbps, 2440MHz

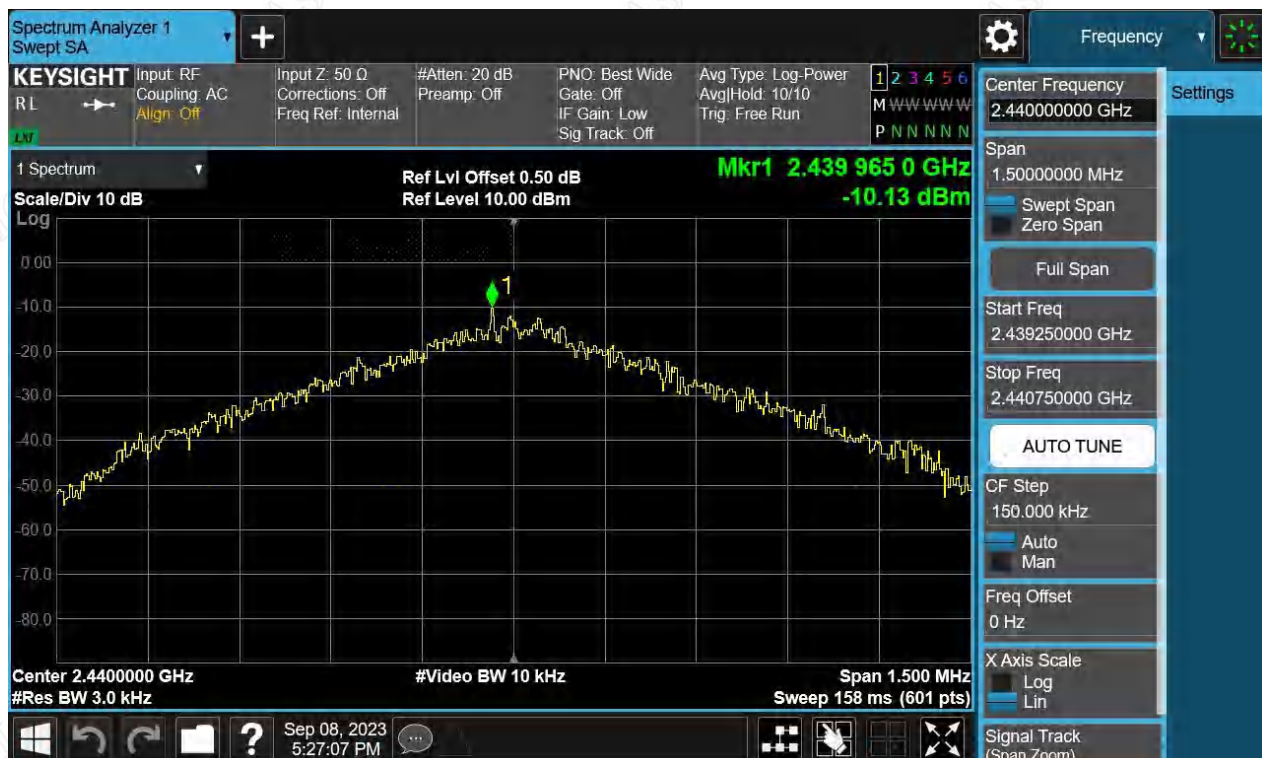



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 23 of 49

Figure 21: The plots of Power Spectral Density, BLE-1Mbps, 2480MHz



Figure 22: The plots of Power Spectral Density, BLE-2Mbps, 2402MHz





TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 24 of 49

Figure 23: The plots of Power Spectral Density, BLE-2Mbps, 2440MHz



Figure 24: The plots of Power Spectral Density, BLE-2Mbps, 2480MHz





TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 25 of 49

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS

Test standard : FCC Part 15.247(d), RSS-247 5.5
Requirement : ANSI C63.10-2013 clause 11.11,
KDB 558074 clause 8.5
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High for spurious, Low/High for Band
Edge
Operation Mode : A.1.a
Ambient temperature : 24.5°C
Relative humidity : 52%

For details refer to following test plot.



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 26 of 49

Figure 25: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-1Mbps, Carrier Level



Figure 26: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-1Mbps, Band Edge



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 27 of 49

Figure 27: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-1Mbps, Conducted spurious emissions 30MHz-3GHz

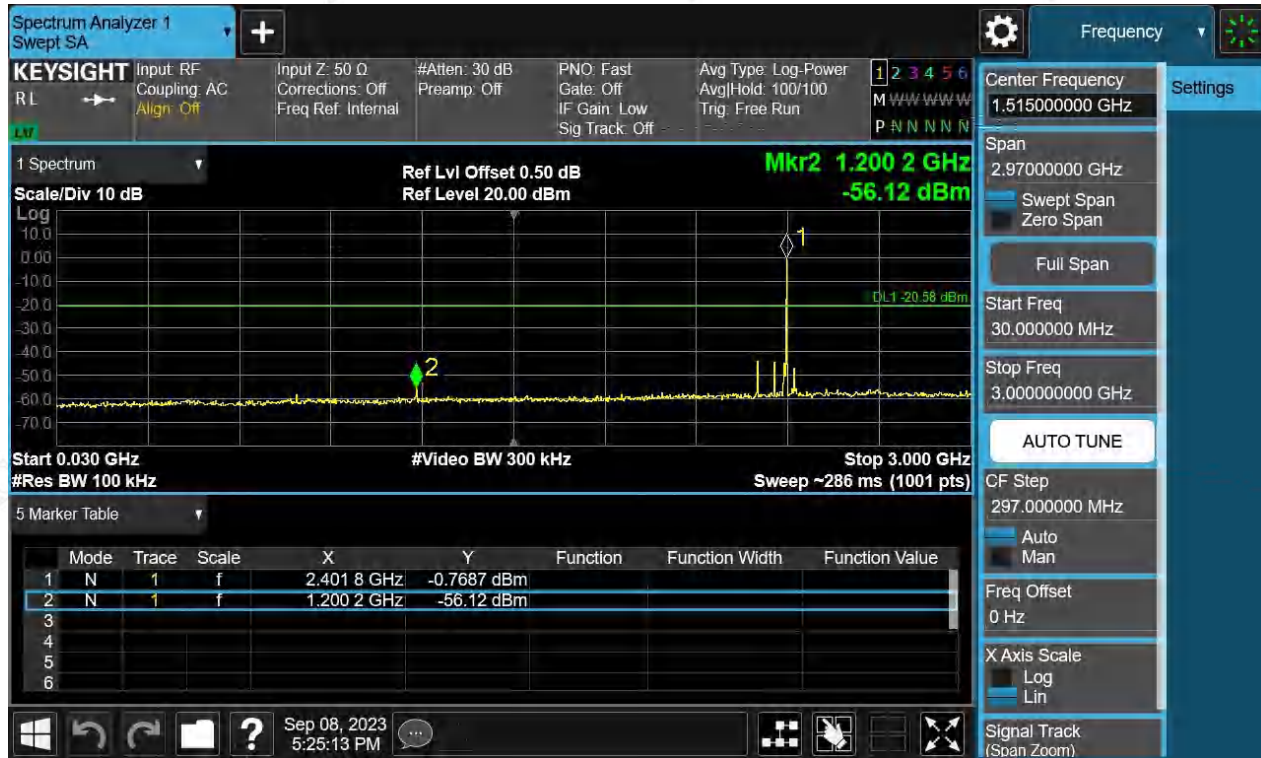


Figure 28: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-1Mbps, Conducted spurious emissions 2GHz-25GHz





TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 28 of 49

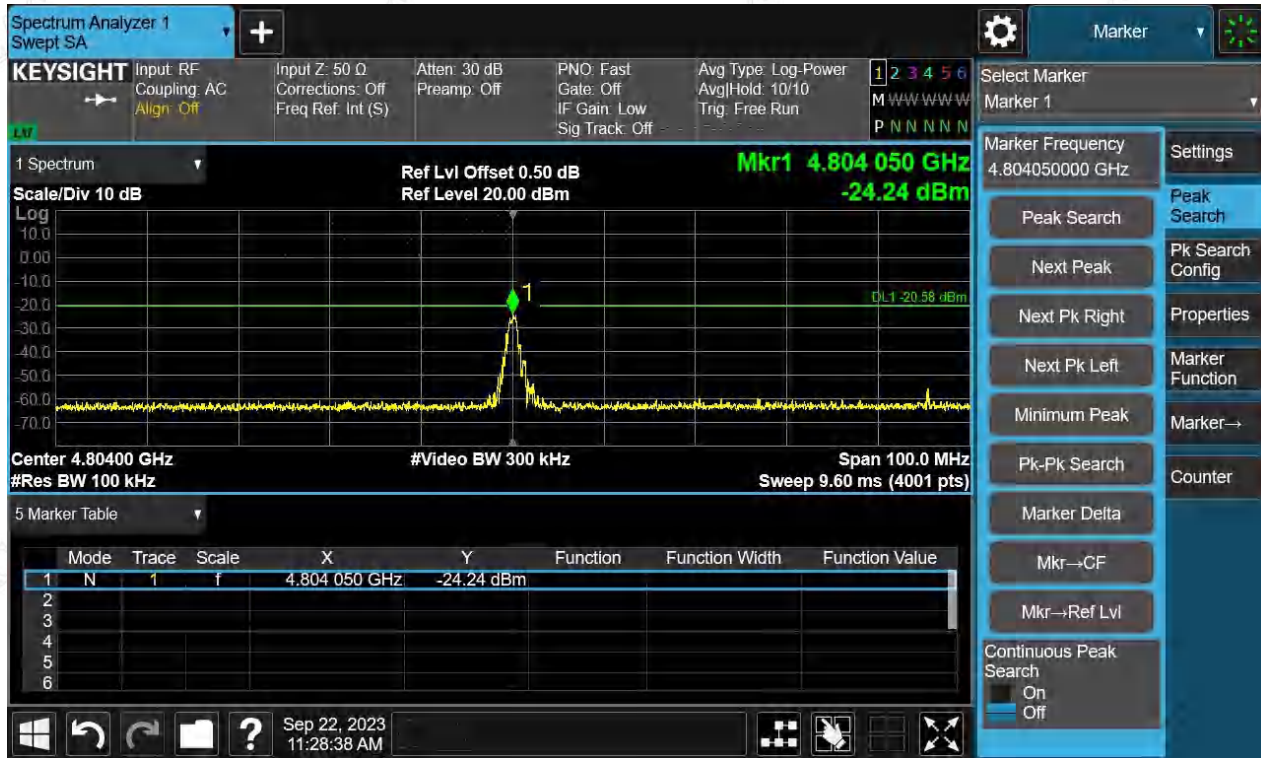


Figure 29: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-1Mbps, Carrier Level



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 29 of 49

Figure 30: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-1Mbps, Conducted spurious emissions 30MHz-3GHz

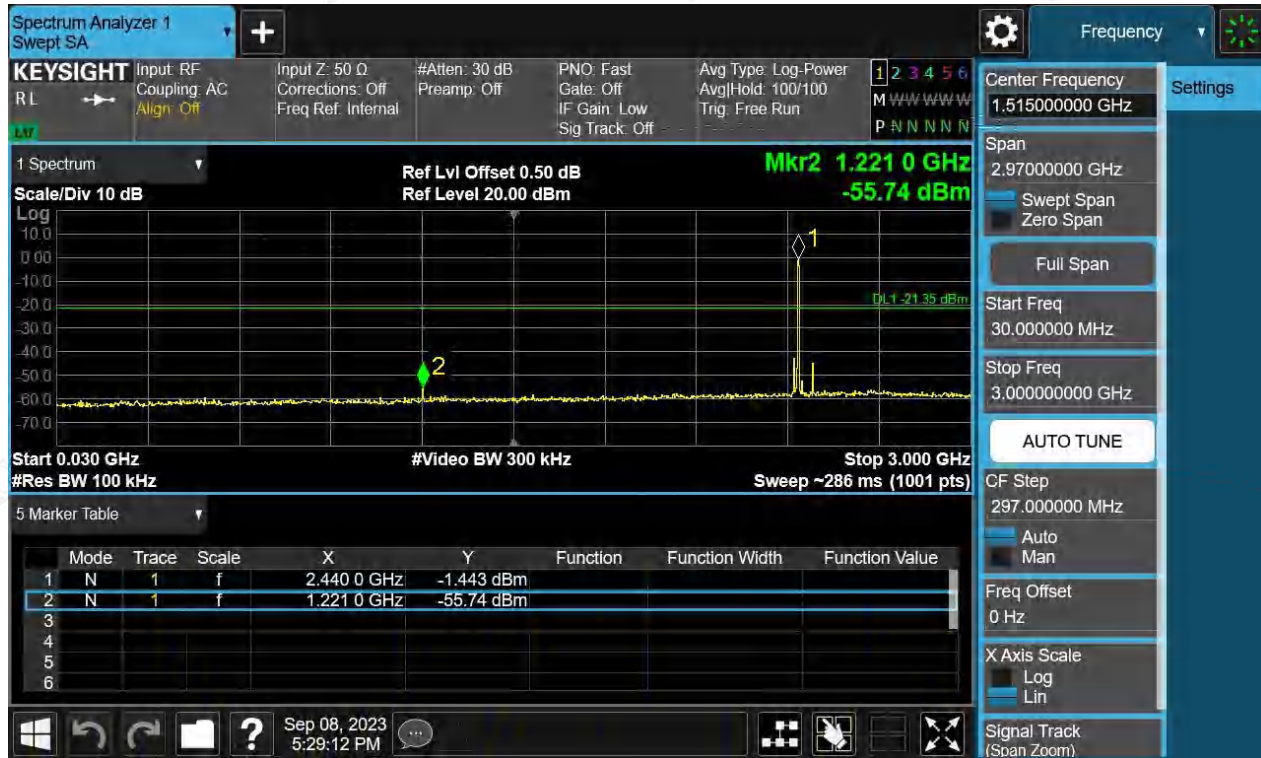


Figure 31: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-1Mbps, Conducted spurious emissions 2GHz-25GHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 30 of 49

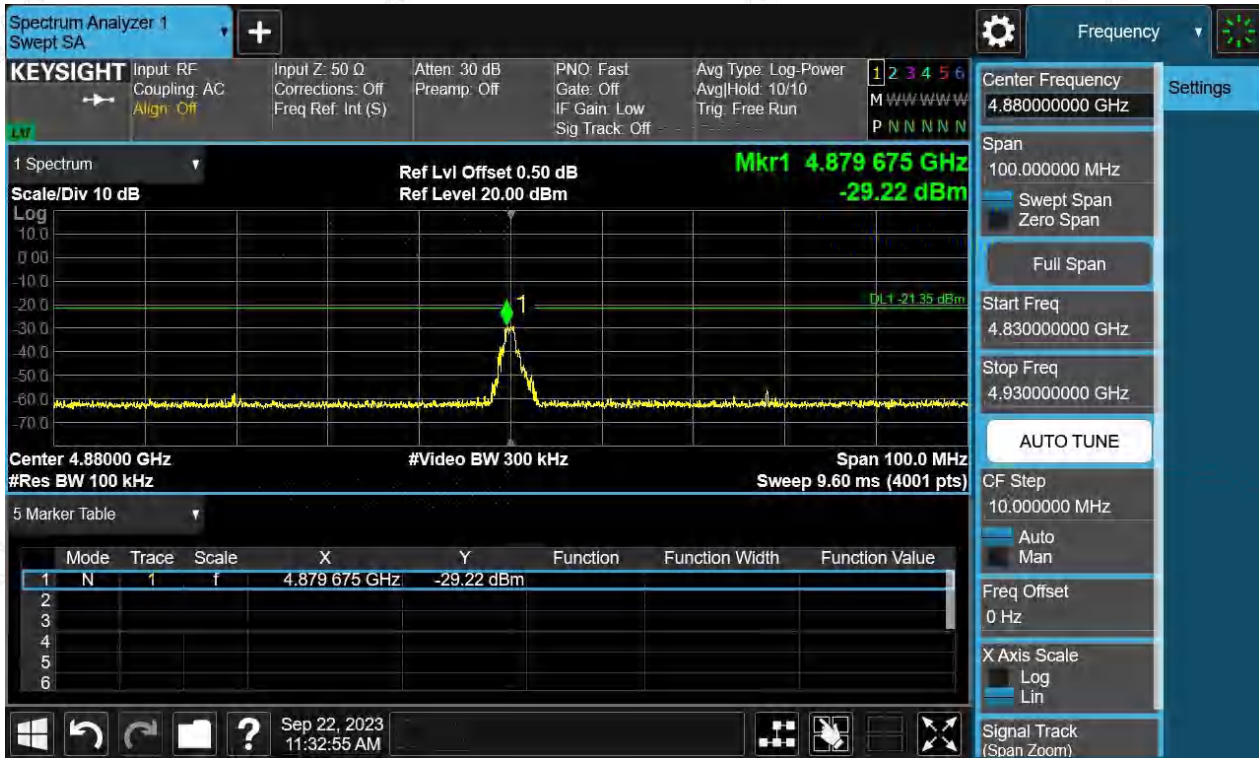


Figure 32: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-1Mbps, Carrier Level



TEST REPORT

Report No.: SHE23090001-02AE


Date: 2023-09-22

Page 31 of 49

Figure 33: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-1Mbps, Band Edge



Figure 34: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-1Mbps, Conducted spurious emissions 30MHz-3GHz

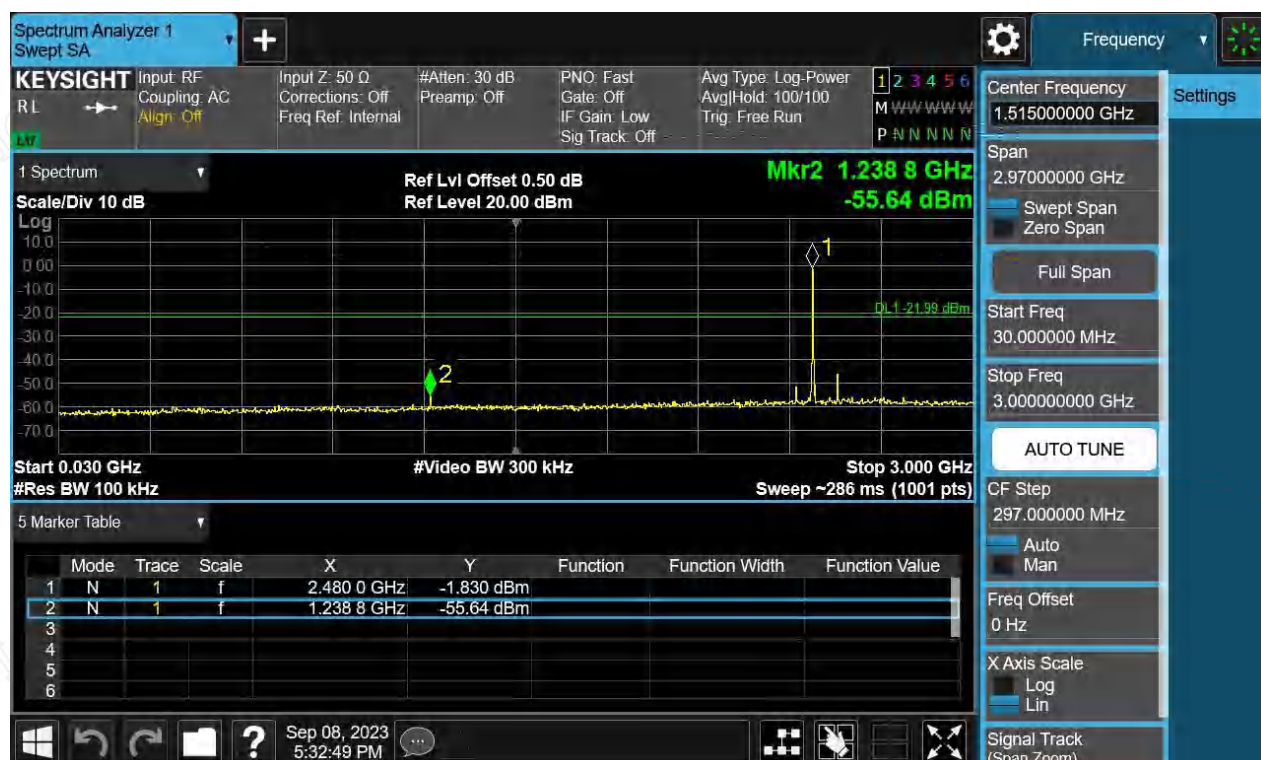




TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 32 of 49

Figure 35: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-1Mbps, Conducted spurious emissions 2GMHz-25GHz

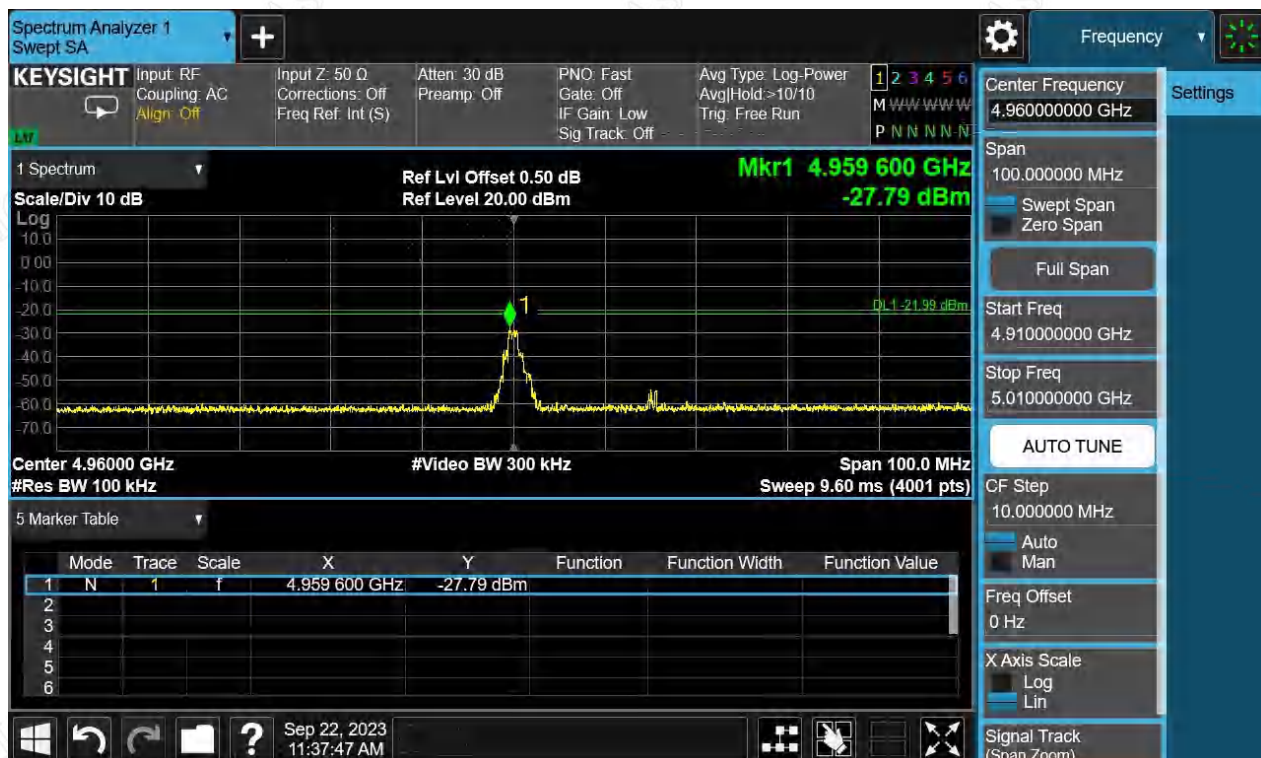



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 33 of 49

Figure 36: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-2Mbps, Carrier Level

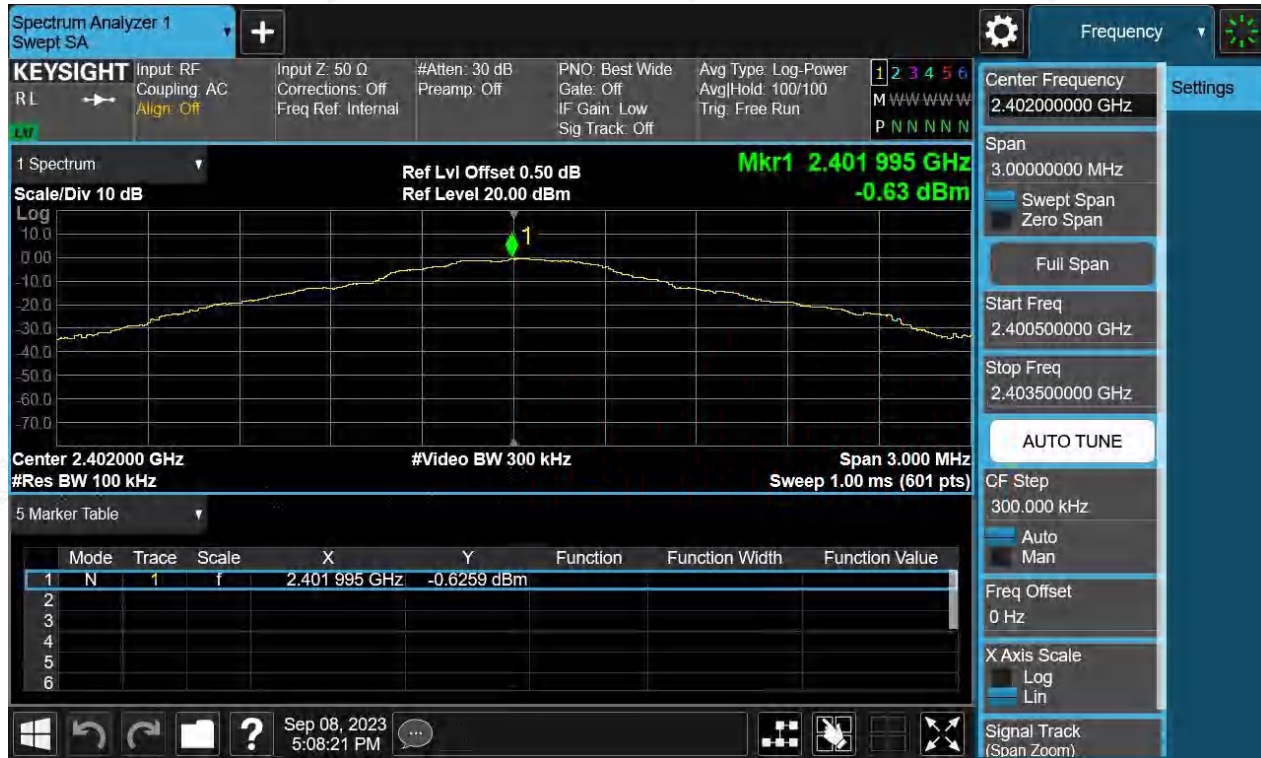


Figure 37: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-2Mbps, Band Edge



TEST REPORT

Report No.: SHE23090001-02AE Date: 2023-09-22 Page 34 of 49

Figure 38: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-2Mbps, Conducted spurious emissions 30MHz-3GHz

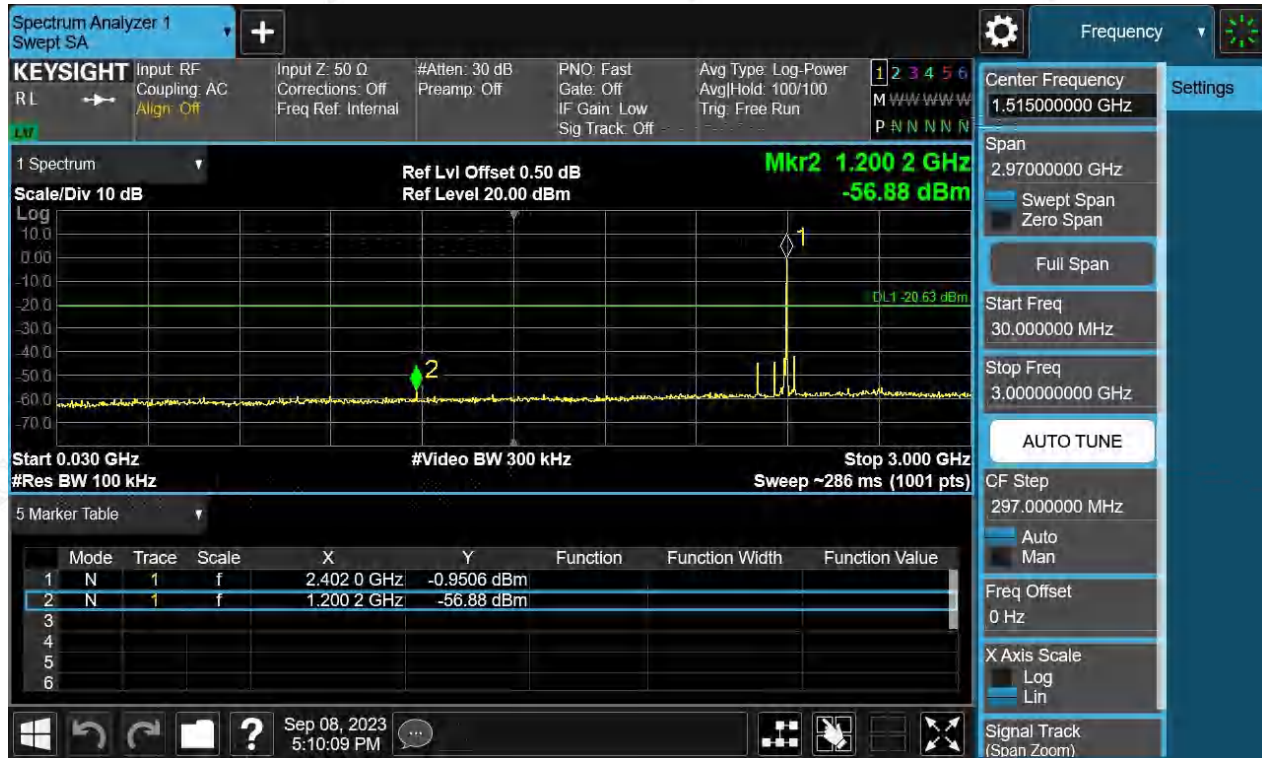


Figure 39: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2402MHz, BLE-2Mbps, Conducted spurious emissions 2GHz-25GHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 35 of 49

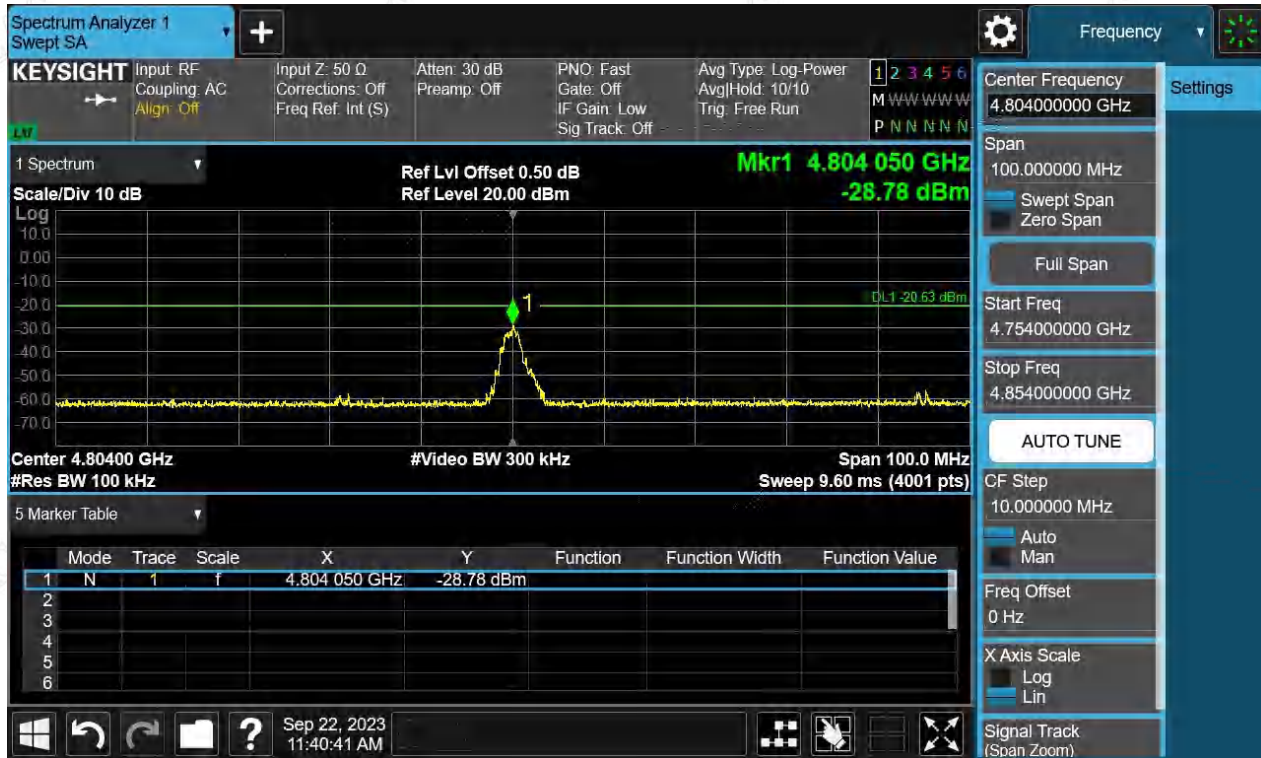


Figure 40: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-2Mbps, Carrier Level



TEST REPORT

Report No.: SHE23090001-02AE Date: 2023-09-22 Page 36 of 49

Figure 41: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-2Mbps, Conducted spurious emissions 30MHz-3GHz

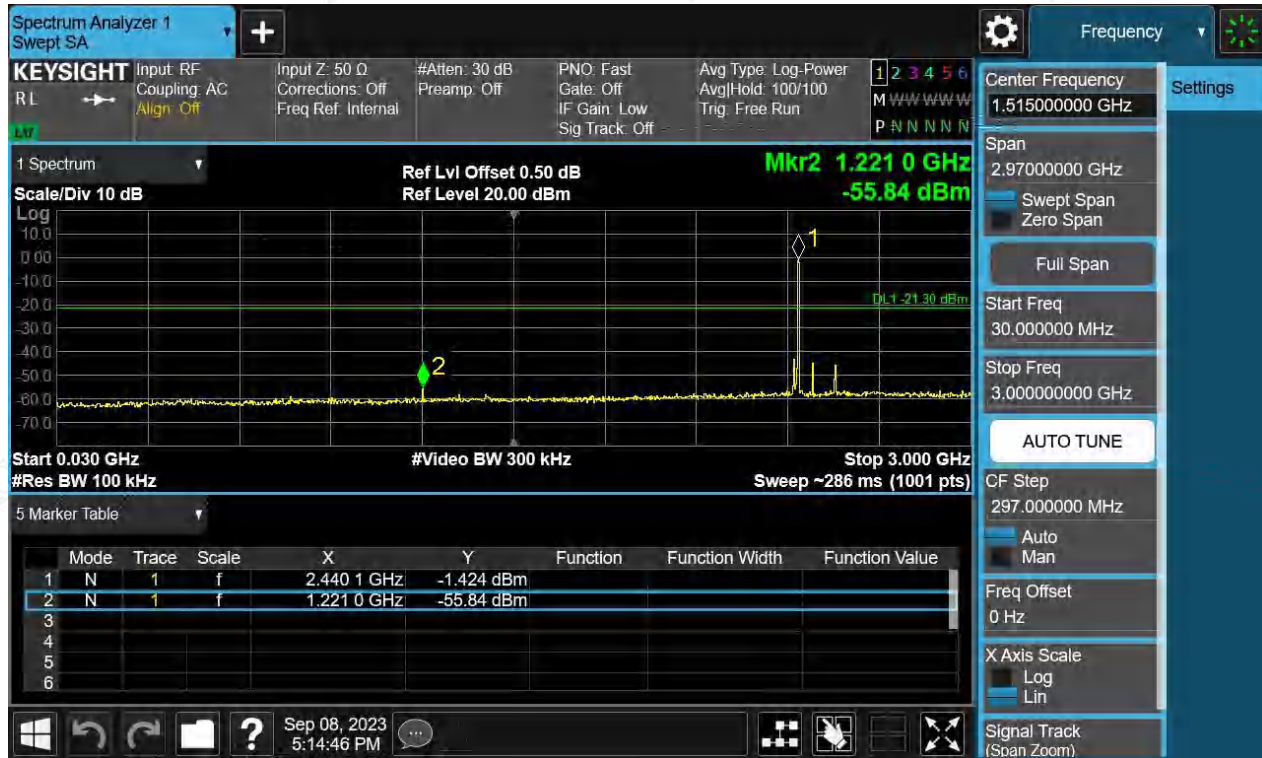


Figure 42: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2440MHz, BLE-2Mbps, Conducted spurious emissions 2GHz-25GHz



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 37 of 49

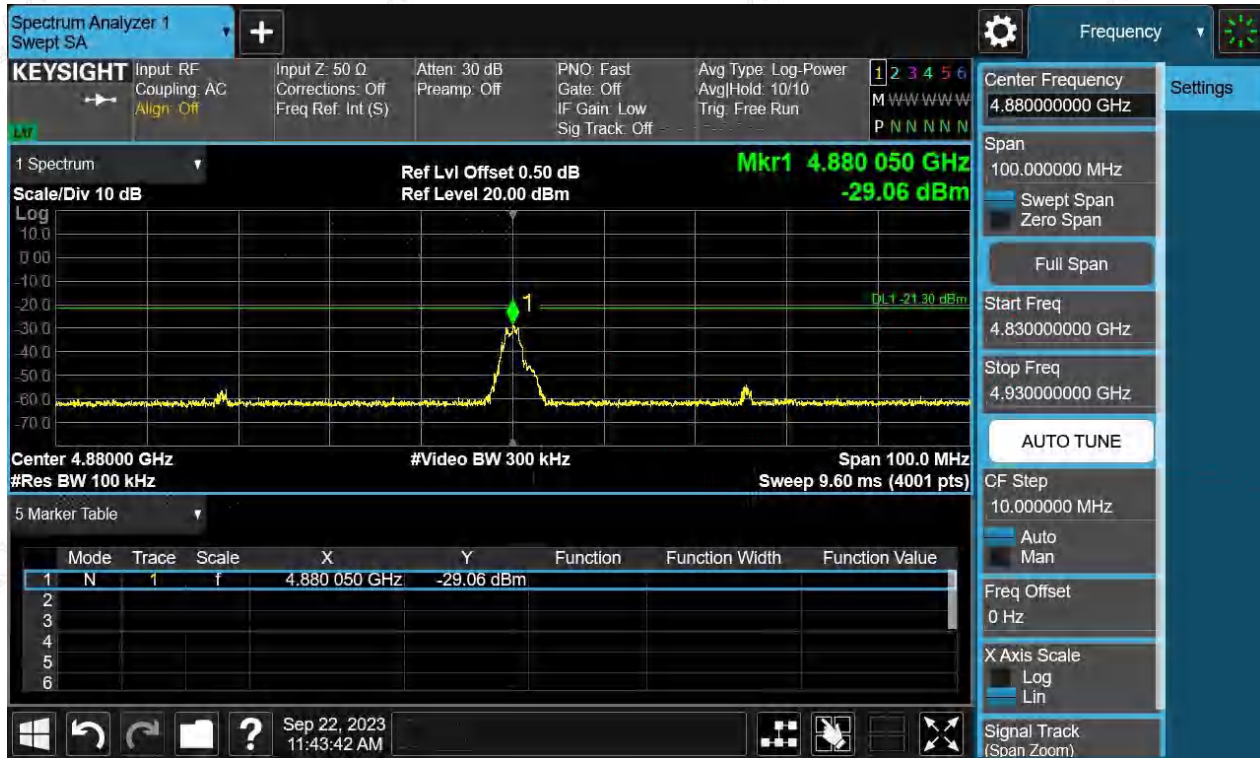


Figure 43: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-2Mbps, Carrier Level



TEST REPORT

Report No.: SHE23090001-02AE


Date: 2023-09-22

Page 38 of 49

Figure 44: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-2Mbps, Band Edge



Figure 45: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-2Mbps, Conducted spurious emissions 30MHz-3GHz

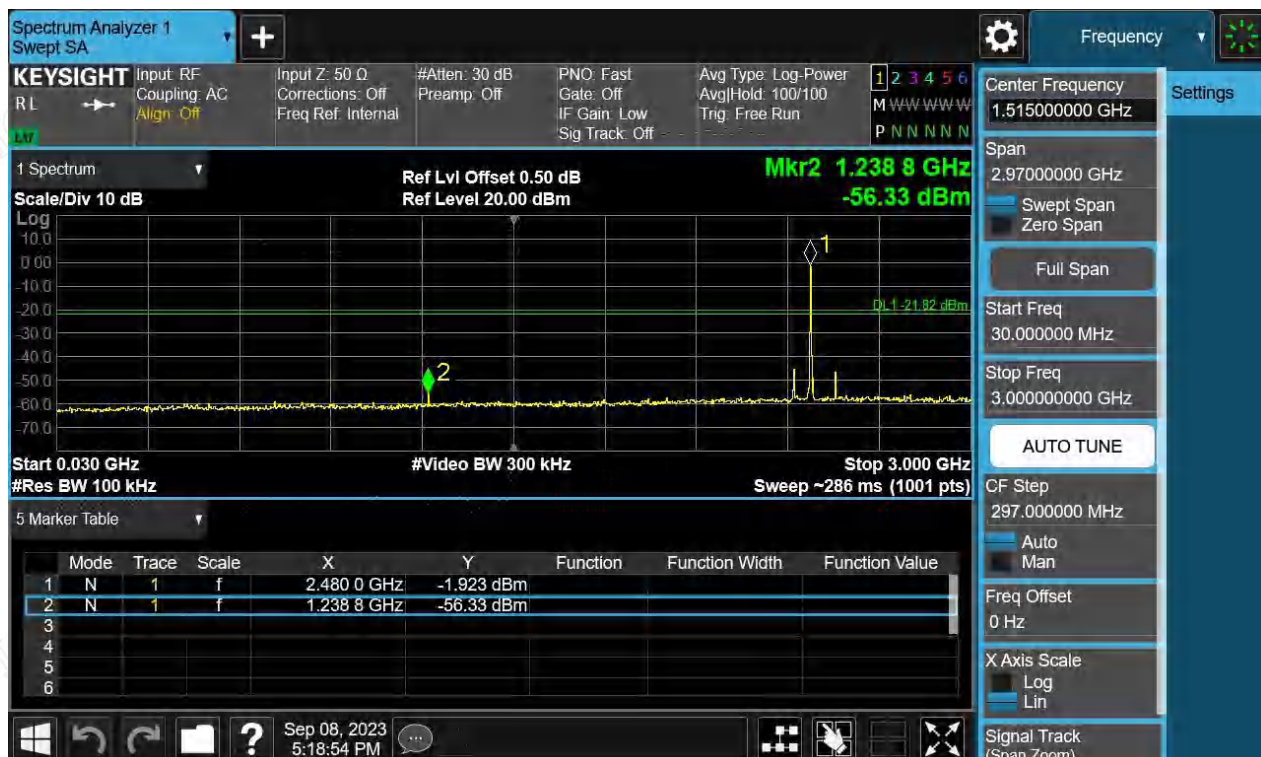




TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 39 of 49

Figure 46: The plots of Conducted Spurious Emission & Authorized-band band-edge, 2480MHz, BLE-2Mbps, Conducted spurious emissions 2GMHz-25GHz

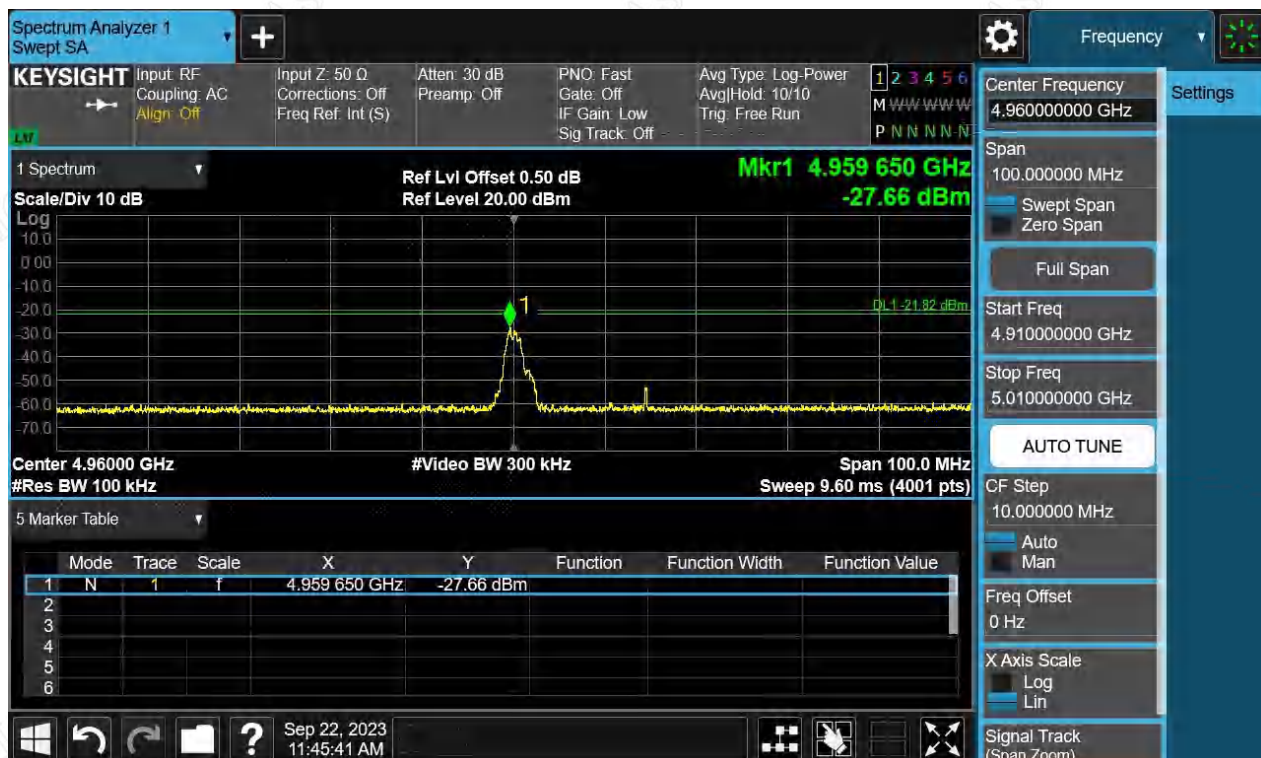



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 40 of 49

4.1.6 Radiated Emission

RESULT:

PASS

Test standard : FCC Part 15.247(d), 15.205, 15.209
RSS-GEN 8.9
Requirement : ANSI C63.10-2013 clause 11.12,
KDB 558074 clause 8.6
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25.2°C
Relative humidity : 53%

Notes

Test plots please refer to the annex document "SHE23090001-02AE DATA BLE-TX EXHIBIT A".

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. All test modes had been pre-tested, but only the BLE-1M&2M at low channel of below 1 GHz is the worst case and recorded in the report.
4. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 41 of 49

4.1.7 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard : FCC Part 15.247(d), 15.205, 15.209
RSS-GEN 8.10
Requirement : ANSI C63.10-2013 clause 11.13,
KDB 558074 clause 8.7
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/High
Operation Mode : A.1.a
Ambient temperature : 25.2°C
Relative humidity : 53%

Notes

Test plots please refer to the annex document "SHE23090001-02AE DATA BLE-TX EXHIBIT A".



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 42 of 49

5 Appendixes

5.1 Photographs of the Sample



Front of the sample



Rear of the sample



TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 43 of 49



Left of the sample



Right of the sample




TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 44 of 49

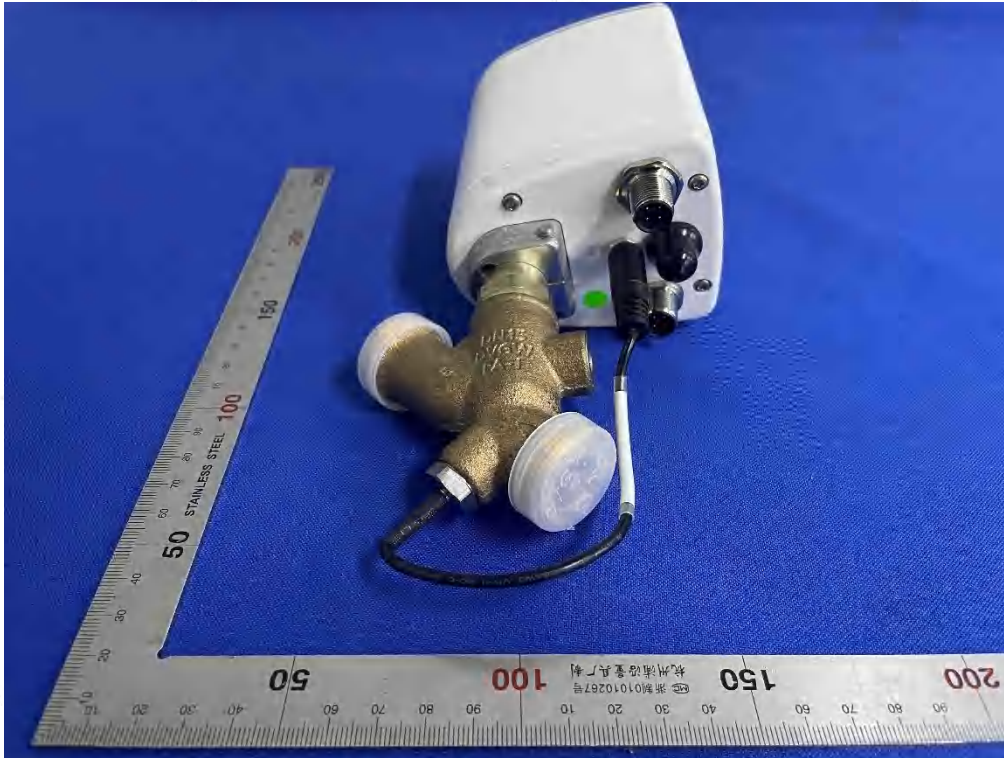

Top of the sample



Bottom of the sample



TEST REPORT


Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 45 of 49



Open of the sample

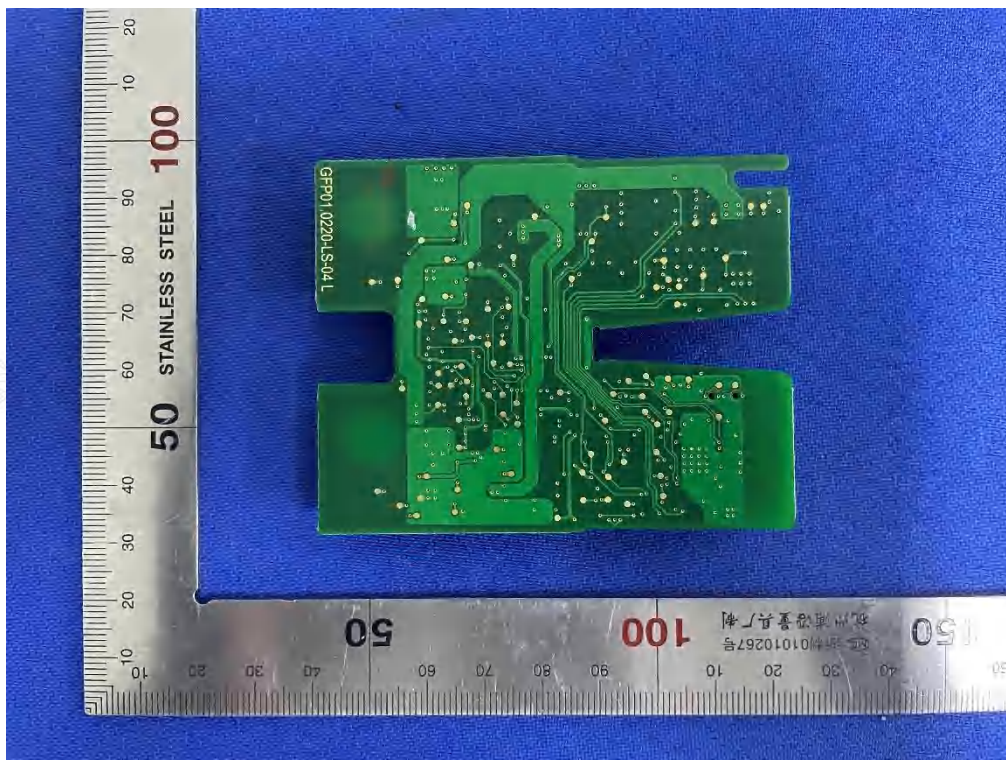

Internal-1 of the sample




TEST REPORT


Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 46 of 49

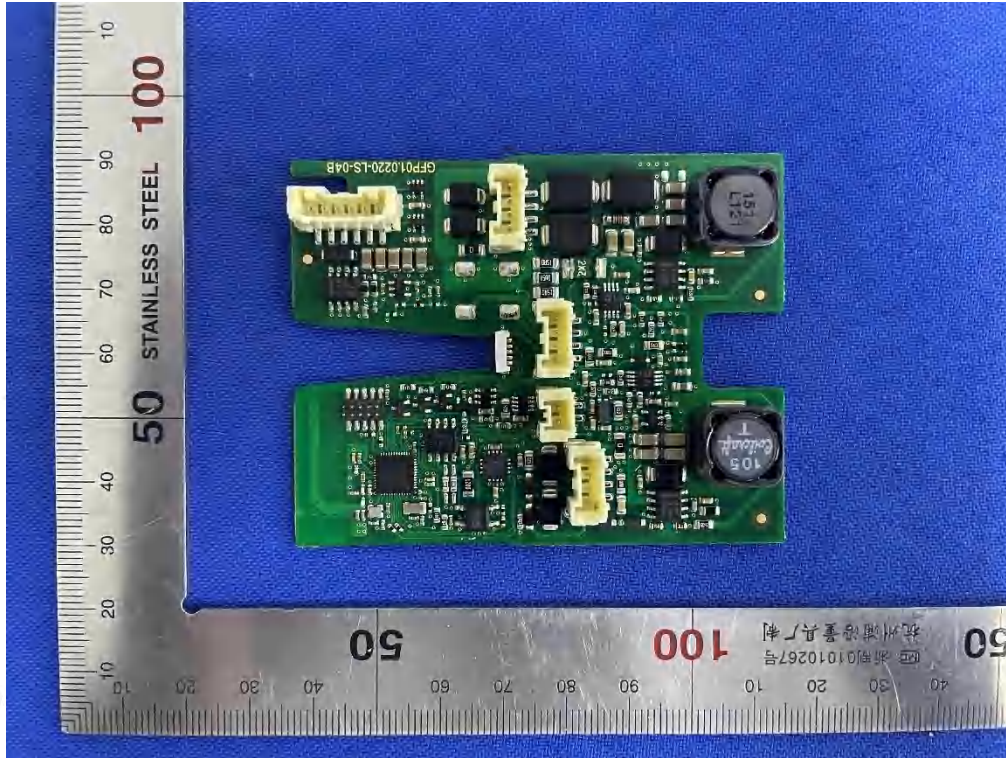

Internal-2 of the sample

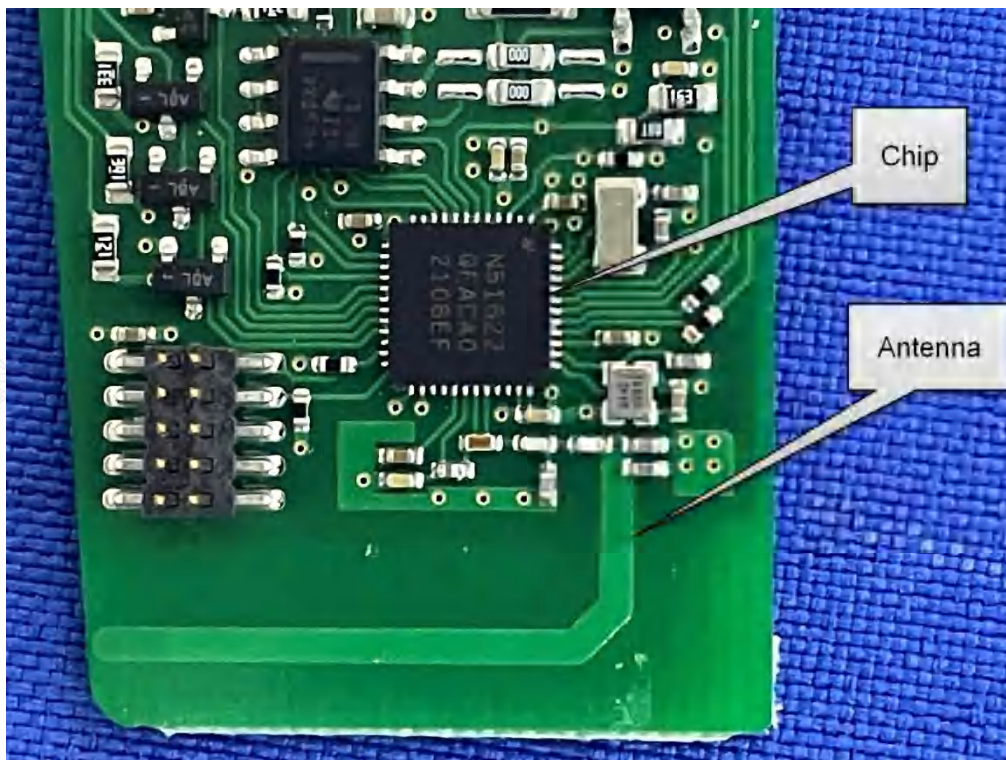

Antenna Position of the sample

TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 47 of 49

5.2 Set-up for Conducted RF test at Antenna Port



5.3 Set-up for Spurious Emissions below 1GHz





TEST REPORT

Report No.: SHE23090001-02AE

Date: 2023-09-22

Page 48 of 49

5.4 Set-up for Spurious Emissions above 1GHz



End of the report

声明 Terms & conditions

1. 英格尔检测技术服务（上海）有限公司（以下简称“本公司”）以保密的方法处理及签发有关报告予客户。在未经得本公司的同意下，该报告不得作部分翻制，或作宣传或其它未经本公司许可的用途。当该客户从本公司收到有关报告后，可以展示或传送该报告或由本公司所制定该报告的核证版本予其顾客、供应商或其它直接有关人士。除非被有关政府机构、法律或法庭命令所要求，本公司在未经客户的同意前，将不会与其他方就报告的内容进行任何讨论、书信的往来或透露。

A report will be issued in confidence to the Clients and it will be strictly treated as such by ICAS Testing Technology Service (Shanghai) Co., Ltd. (hereinafter referred to as "ICAS"). It should not be reproduced in part and it should not be used for advertising or other unauthorized purposes without the written consent of ICAS. The Clients to whom the Report is issued, however, show or send it, or a certified copy thereof prepared by ICAS, to his customer, supplier or other persons directly concerned. ICAS will, without the consent of the Clients, neither enter into any discussion or correspondence with nor disclose to any other party concerning the contents of the report unless required by the relevant governmental authorities, laws or court orders.

2. 假如该客户准备利用本公司所签发的报告在司法或仲裁程序上，该客户于呈交样品予本公司作测试前必须明确阐述此用途。
If the client is prepared to use the report issued by ICAS in the judicial or arbitral, the client must specify this use before submitting the sample to ICAS for testing.
3. 除非本公司的确进行抽样测试及于有关报告内阐明此事实，该报告只适用于已被测试的样品，而不适用于大量额度的有关货品。
Unless ICAS does carry out a sampling test and clarify this fact in the relevant report, the report applies only to the samples that have been tested and do not apply to a large amount of the relevant goods.
4. 假如该客户并未指定该测试所应用的测试方法或标准，本公司将会自行选择适当的方法或标准并在委托协议 / 合同中告知。
If the Clients do not specify the methods / standards to be applied, ICAS will choose the appropriate methods/standards and inform the client in the agreement/contract.

5. 本公司对由于利用本公司所签发的任何报告或通讯内的资料而造成的损失，概不会承担任何责任。
ICAS will not be liable or accept responsibility for any loss or damage arising from the use of in the reports issued by ICAS or communication information.
6. 假如该报告被不适当地运用，本公司将会保留权利撤回该报告，及采取任何适当的措施。
If the report is inappropriately used, ICAS will reserve the right to withdraw the report and take any appropriate action.
7. 该客户同意其委托本公司进行测试所得之报告，并不能作为针对本公司法律行动的依据。
Samples submitted for testing are accepted on the understanding that the report issued cannot form the basis of, or be the instrument for, legal action against ICAS.

8. 假如该客户的要求令致有关该样品的测试须于该客户或任何第三方的实验室进行，则本公司只会代为传送有关该测试的结果，对其准确性概不负任何责任。如本公司只可证明该客户或任何第三方的实验室已进行有关测试，则本公司只可确认某正确的样品已经被测试，而毋须为该测试的准确性负任何责任。

If the Clients require the analysis of samples by the Client's or any third party's laboratory, ICAS will only convey the result of the analysis without responsibility for its accuracy. If ICAS is only able to witness an analysis by the Client's or any third party's laboratory ICAS will only confirm that the correct sample has been analyzed without responsibility for the accuracy of any analysis or results.

9. 本公司在提供测试服务期间所衍生的任何报告、证书或其它物资，其相关的所有法律产权（包括知识产权），皆由本公司所拥有。
Any legal property right (include intellectual property) in respect of any report, certificate or other materials derived from ICAS during the provision of the testing service are owned by ICAS.
10. 当本公司收到该客户的请求，本公司可以电子媒介传递有关测试服务的结果，但该客户应注意，电子媒介传递不能保证其所含资料不会流失、延缓或被其他方截取。对于电子媒介传递导致其所含的任何资料出现泄露、差错或遗漏，本公司将不会负任何责任。
When ICAS receives the request from the Client, ICAS transmit the results of the test service in electronic media, but the Client should note that the Electronic Media Delivery does not guarantee that the information contained therein will not be lost, delayed or intercepted by third party. ICAS is not liable for any disclosure, error or omission in the content of such messages as a result of electronic transmission.

11. 本公司对其可控范围之外发生的样品质量或其它特征的变化不承担责任。本报告不具有对测试项目或样品推荐或认可的作用。
ICAS assumes no responsibility for variations in quality or other characteristics of items submitted under conditions over which ICAS has no control. This Report does not constitute a recommendation for, or endorsement of, the item or material tested.

12. 本公司经与客户协商一致出具纸质版或电子版形式的报告；报告涂改无效；无授权签字人签字无效；纸质版报告未加盖本公司“检验检测专用章”或“报告专用章”和骑缝章无效；电子版报告未加盖本公司“检验检测专用章”或“报告专用章”无效。
The company issues the report in paper or electronic form through consultation with the customer. The report is invalid if altered or without authorized signatory; The paper version of the report is invalid without the company's "special seal for inspection and testing" or "special seal for report" and the cross seal; The electronic version of the report is invalid without the company's "special seal for inspection and testing" or "special seal for report".

13. 对报告若有异议，有法律法规规定的，依照法律法规执行。其它委托类型报告应于收到报告之日起十五日内向本公司提出，逾期不予受理。
Any objection to the report should execute according to laws and regulations if exist, other entrusted report should be submitted to ICAS within 15 days from the date of receiving the report, and overdue will not be handled.

14. 样品及样品信息由客户提供及确认。本公司不负责证实样品的真伪性，不承担证实客户提供信息的准确性、适当性和（或）完整性责任。
The sample(s) and sample information should be provided and confirmed by the Client. ICAS is not responsible for verifying the authenticity of the sample and does not assume responsibility for the accuracy, appropriateness and/or completeness of the information provided by the Client.

15. 不包含 CMA 资质认定标志的报告，检测数据和结果不具有对社会的证明作用，仅供科研、教学、内部质量控制之用。中英文报告内容以中文为准。
The date and results shown in the report without CMA logo are not used as proof for society, only used for reference in study, teaching and internal quality control. The Chinese version of the report written in Chinese and English shall prevail.

备注：1. 报告中带“*”代表暂未在 CNAS 范围内，“§”代表暂未在本公司 CMA 资质认定许可技术能力。

Note: “*”in the report indicates that it is not included in the scope of CNAS, “§” indicates that it is not included in the CMA scope of ICAS.

2. “#”号代表数据来源于指定的签约实验室

“#” indicated that data comes from designated contracted lab:

CMA 资质认定证书编号 CMA Certificate No:

CNAS 注册号 CNAS Registration No:

ICAS英格尔检测中心 ICAS Testing Center
Tel:0086 21-51682918 E-mail:info@icas.org.cn
Add:上海市闵行区瓶北路155号/瓶安路1298号/徐汇区中山西路2368号18F
155 Pingbai Rd / 1298 Pingan Rd, Minhang District, Shanghai/18F,2368W.Zhongshan Rd,Xuhui District.

ICAS英格尔认证中心 ICAS Certification Center
Tel:0086 21-51114700 E-mail:info@icas.org.cn
Add:上海市徐汇区中山西路2368号华鼎大厦31F/25F
31/25F Huading Tower , 2368W.Zhongshan Rd,Xuhui District,Shanghai

ICAS全国各分支机构 温州 / 广州 / 深圳 / 福州 / 厦门 / 昆明 / 南宁 / 长沙 / 重庆 / 成都 / 南京 / 合肥 / 青岛 / 郑州 / 济南 / 江西 / 天津
ICAS National Branch Offices Wenzhou/Guangzhou/Shenzhen/Fuzhou/Xiamen/Kunming/Nanning/Changsha/Chongqing/Chengdu/Nanjing/Hefei/Qingdao/Zhengzhou/Jinan/Jiangxi/Tianjin