


Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

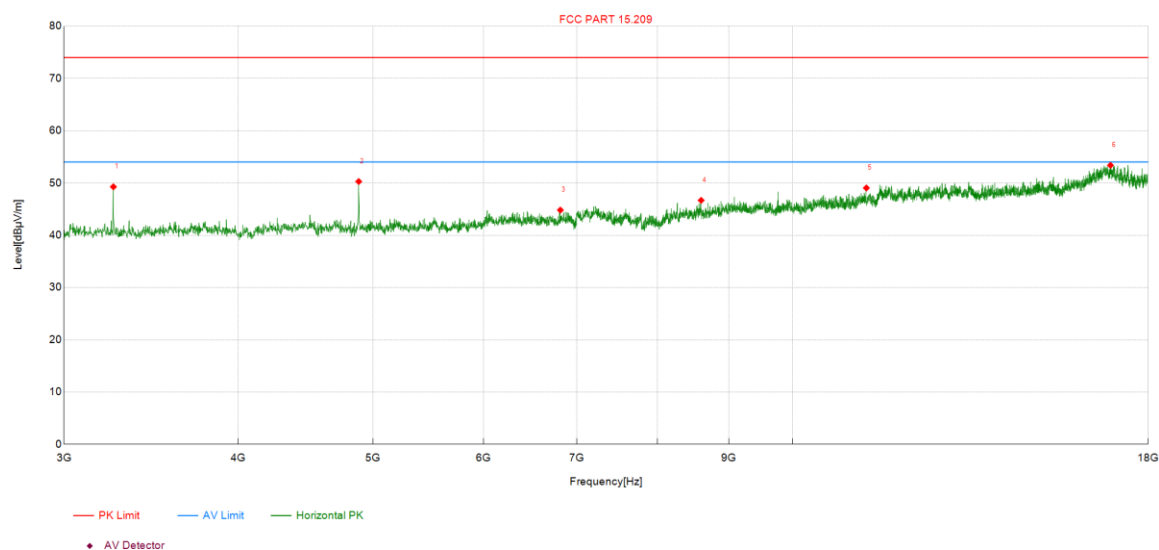

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3255.00	62.59	49.27	-13.32	74.00	24.73	Peak
2	4873.50	60.21	50.28	-9.93	74.00	23.72	Peak
3	6813.75	51.07	44.82	-6.25	74.00	29.18	Peak
4	8598.75	52.41	46.68	-5.73	74.00	27.32	Peak
5	11298.75	49.53	49.05	-0.48	74.00	24.95	Peak
6	16914.38	45.87	53.38	7.51	74.00	20.62	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

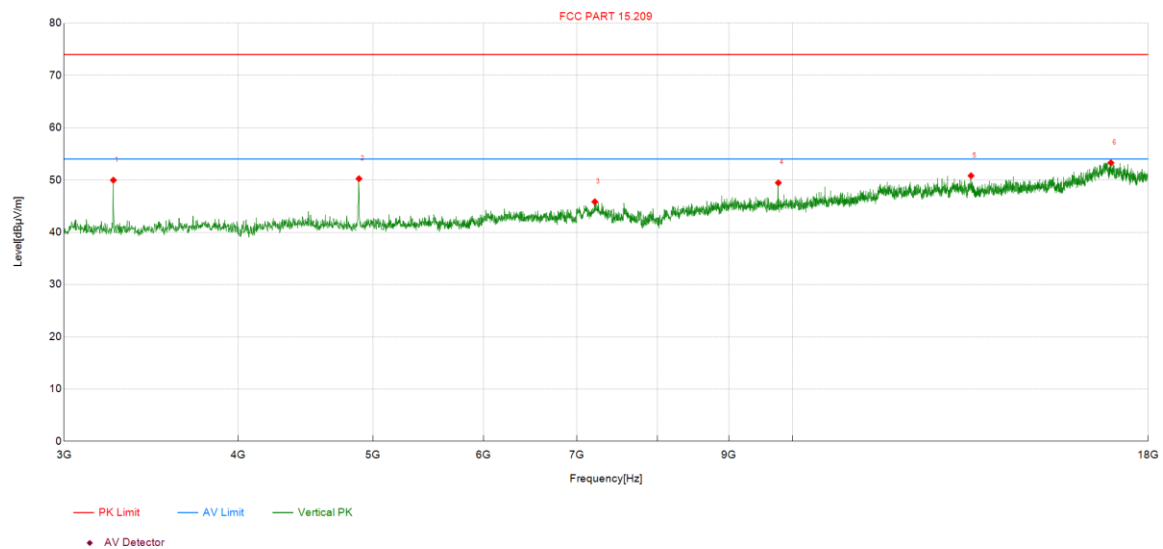

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3255.00	63.28	49.96	-13.32	74.00	24.04	Peak
2	4874.38	60.15	50.24	-9.91	74.00	23.76	Peak
3	7213.13	51.97	45.83	-6.14	74.00	28.17	Peak
4	9768.75	52.79	49.46	-3.33	74.00	24.54	Peak
5	13432.50	49.37	50.81	1.44	74.00	23.19	Peak
6	16925.63	45.79	53.29	7.50	74.00	20.71	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

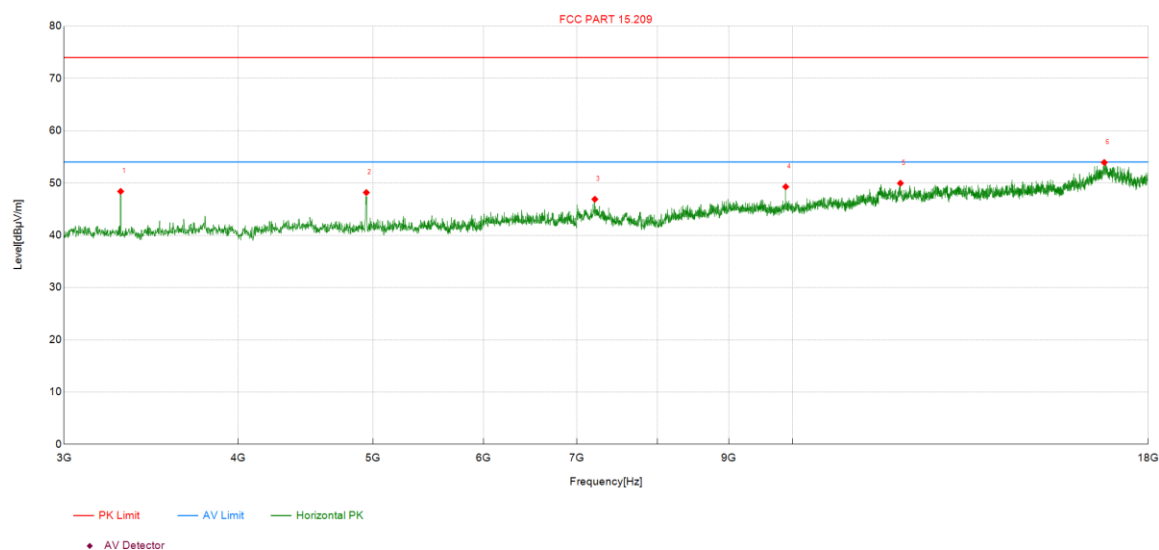

Suspected Data List

No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3294.38	61.63	48.39	-13.24	74.00	25.61	Peak
2	4924.38	57.69	48.17	-9.52	74.00	25.83	Peak
3	7213.13	53.03	46.89	-6.14	74.00	27.11	Peak
4	9888.75	52.35	49.28	-3.07	74.00	24.72	Peak
5	11953.13	49.60	49.95	0.35	74.00	24.05	Peak
6	16741.88	46.52	53.92	7.40	74.00	20.08	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

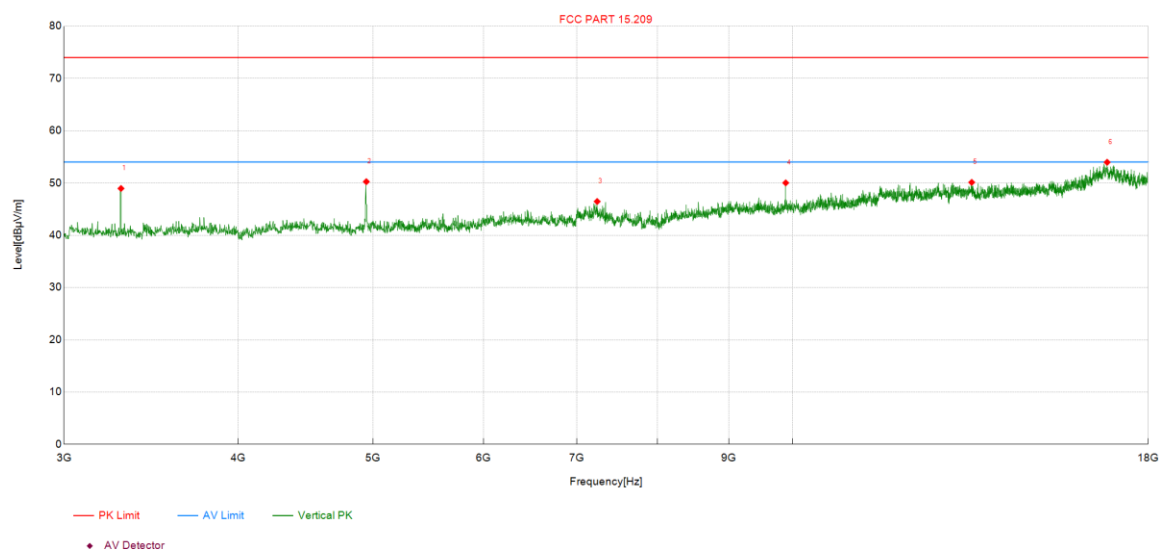

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3296.25	62.19	48.95	-13.24	74.00	25.05	Peak
2	4924.38	59.77	50.25	-9.52	74.00	23.75	Peak
3	7241.25	52.45	46.46	-5.99	74.00	27.54	Peak
4	9888.75	53.09	50.02	-3.07	74.00	23.98	Peak
5	13447.50	48.71	50.12	1.41	74.00	23.88	Peak
6	16820.63	46.41	53.96	7.55	74.00	20.04	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

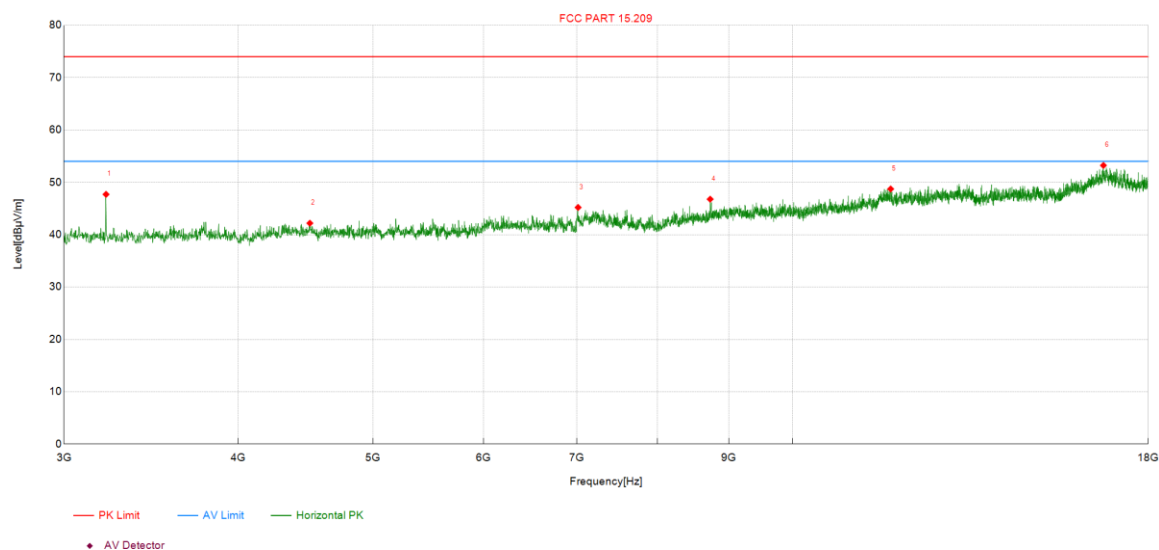

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3215.63	60.98	47.70	-13.28	74.00	26.30	Peak
2	4503.75	52.28	42.19	-10.09	74.00	31.81	Peak
3	7016.25	51.32	45.20	-6.12	74.00	28.80	Peak
4	8728.13	51.90	46.78	-5.12	74.00	27.22	Peak
5	11761.88	48.70	48.73	0.03	74.00	25.27	Peak
6	16717.50	46.03	53.23	7.20	74.00	20.77	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

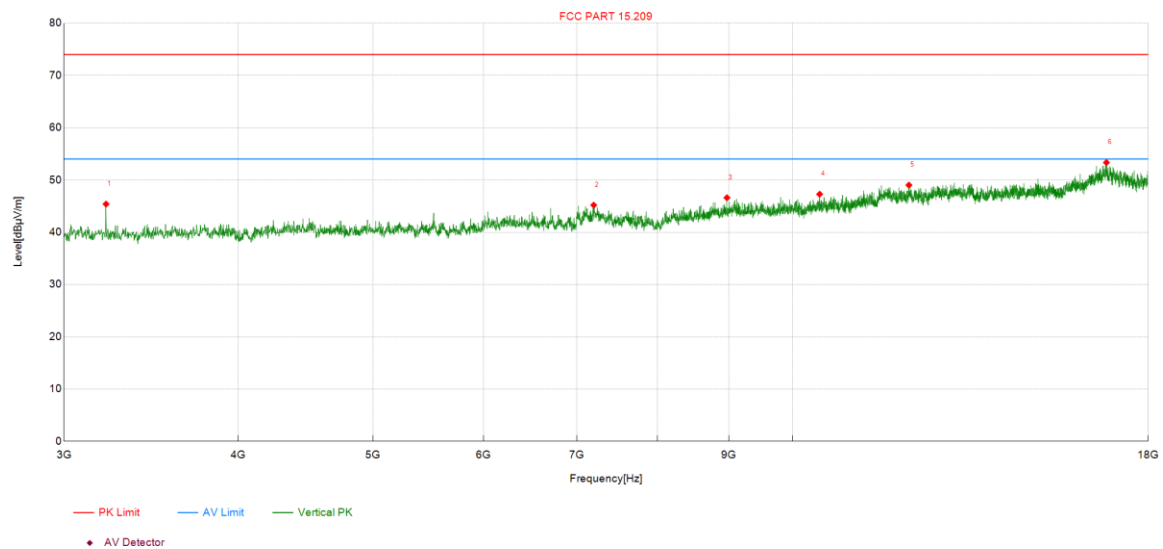

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3215.63	58.67	45.39	-13.28	74.00	28.61	Peak
2	7200.00	51.39	45.19	-6.20	74.00	28.81	Peak
3	8973.75	51.14	46.60	-4.54	74.00	27.40	Peak
4	10458.75	49.38	47.28	-2.10	74.00	26.72	Peak
5	12121.88	48.55	49.02	0.47	74.00	24.98	Peak
6	16801.88	45.77	53.34	7.57	74.00	20.66	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

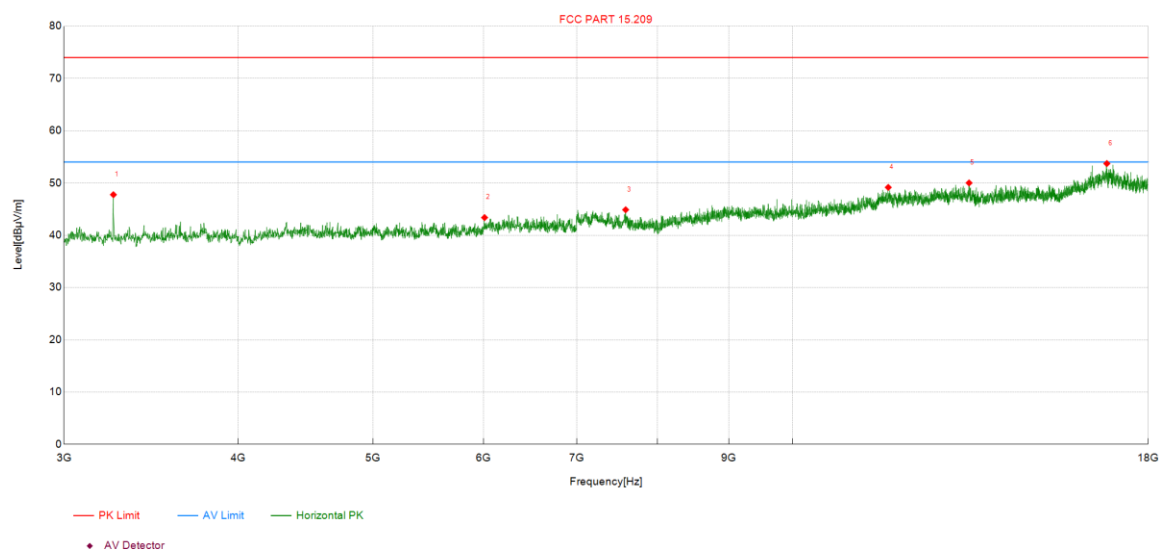

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3255.00	61.08	47.76	-13.32	74.00	26.24	Peak
2	6011.25	51.24	43.38	-7.86	74.00	30.62	Peak
3	7590.00	51.22	44.88	-6.34	74.00	29.12	Peak
4	11715.00	49.30	49.16	-0.14	74.00	24.84	Peak
5	13389.38	48.51	50.01	1.50	74.00	23.99	Peak
6	16813.13	46.15	53.72	7.57	74.00	20.28	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

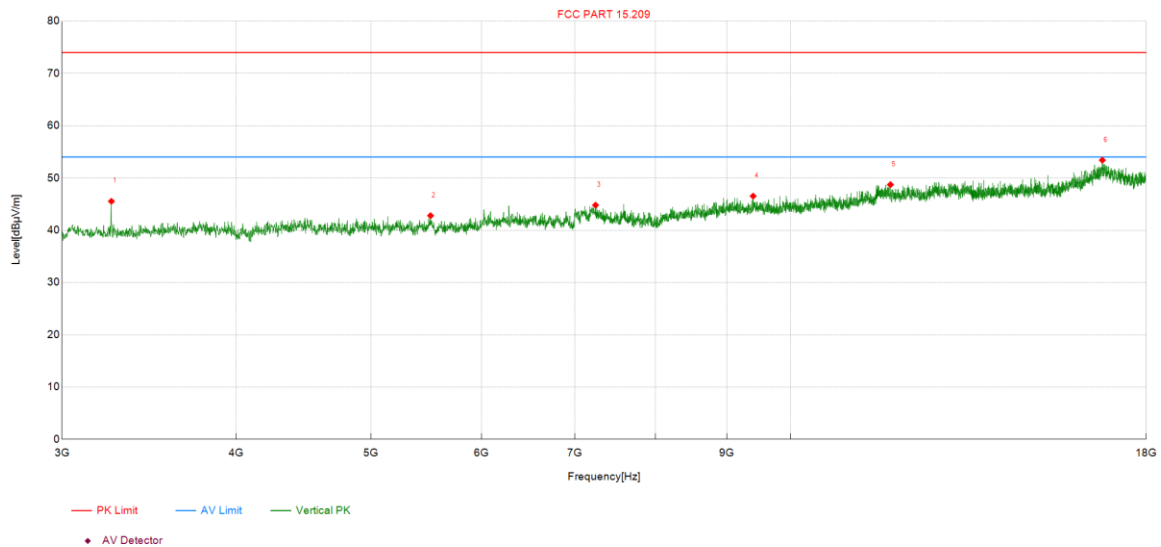

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3255.00	58.86	45.54	-13.32	74.00	28.46	Peak
2	5516.25	51.35	42.79	-8.56	74.00	31.21	Peak
3	7245.00	50.76	44.80	-5.96	74.00	29.20	Peak
4	9401.25	50.41	46.53	-3.88	74.00	27.47	Peak
5	11795.63	48.66	48.72	0.06	74.00	25.28	Peak
6	16743.75	45.99	53.41	7.42	74.00	20.59	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

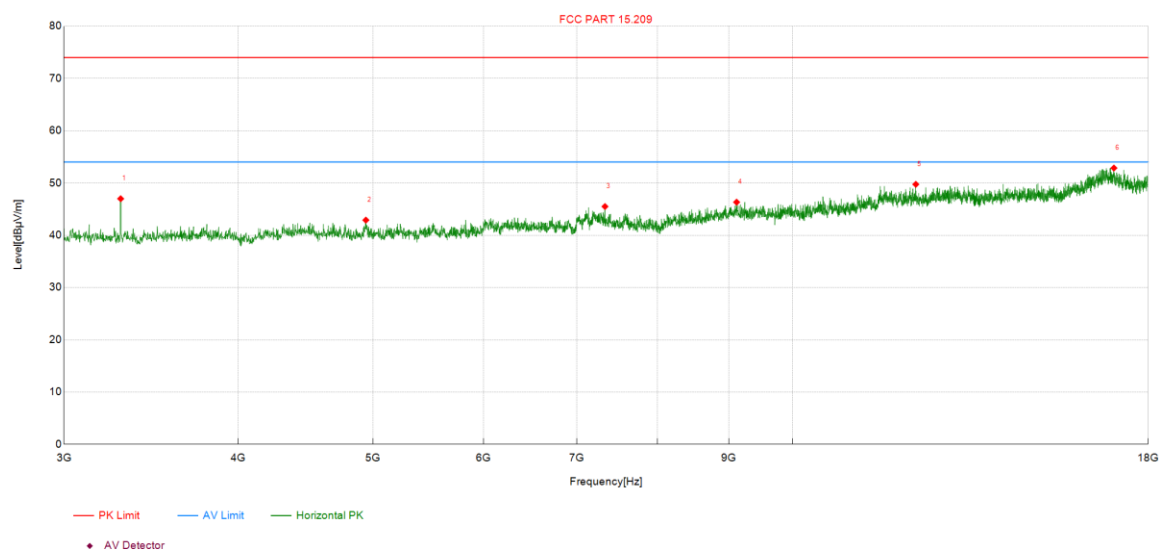

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3294.38	60.23	46.99	-13.24	74.00	27.01	Peak
2	4940.63	52.44	42.90	-9.54	74.00	31.10	Peak
3	7335.00	51.84	45.50	-6.34	74.00	28.50	Peak
4	9118.13	50.57	46.33	-4.24	74.00	27.67	Peak
5	12260.63	48.97	49.74	0.77	74.00	24.26	Peak
6	17010.00	45.30	52.86	7.56	74.00	21.14	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

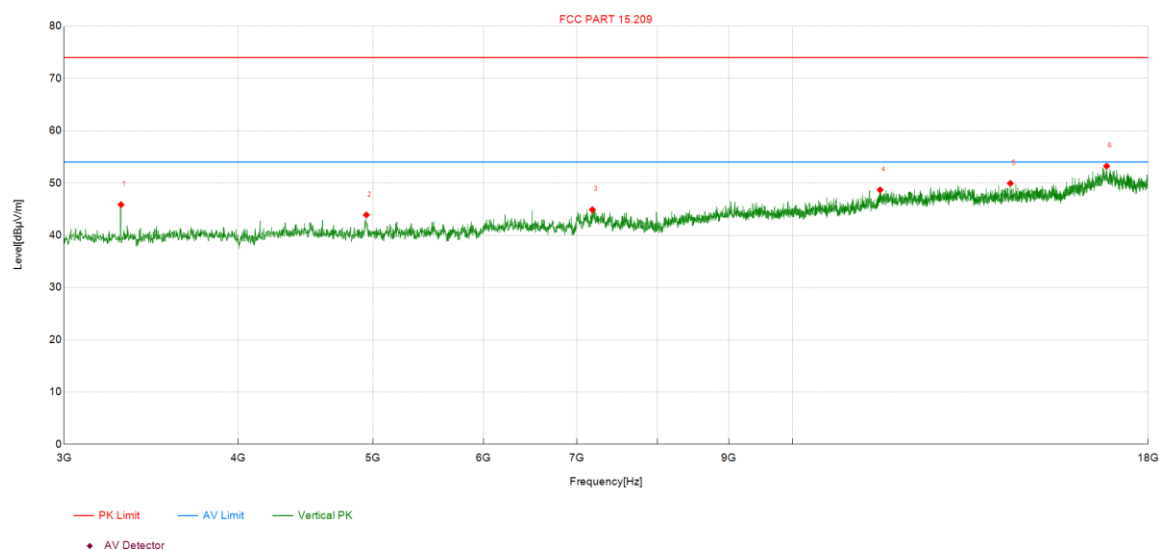

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3296.25	59.10	45.86	-13.24	74.00	28.14	Peak
2	4924.38	53.42	43.90	-9.52	74.00	30.10	Peak
3	7183.13	51.06	44.89	-6.17	74.00	29.11	Peak
4	11557.50	48.90	48.68	-0.22	74.00	25.32	Peak
5	14334.38	47.56	49.93	2.37	74.00	24.07	Peak
6	16807.50	45.65	53.22	7.57	74.00	20.78	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	LCH	Horizontal	PASS

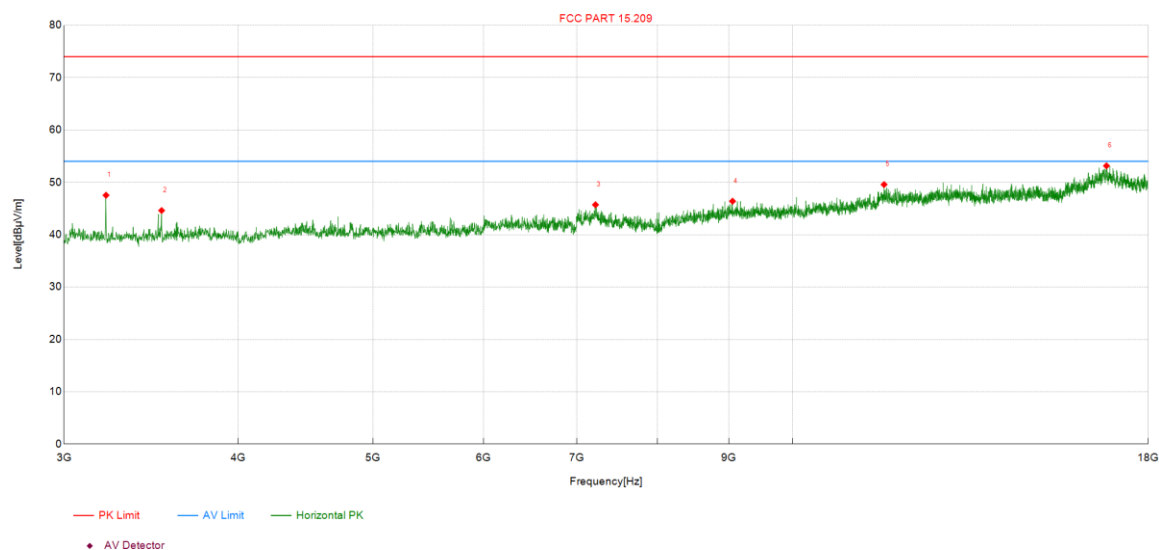

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3215.63	60.81	47.53	-13.28	74.00	26.47	Peak
2	3525.00	57.42	44.61	-12.81	74.00	29.39	Peak
3	7220.63	51.80	45.71	-6.09	74.00	28.29	Peak
4	9056.25	50.81	46.39	-4.42	74.00	27.61	Peak
5	11634.38	49.78	49.57	-0.21	74.00	24.43	Peak
6	16801.88	45.58	53.15	7.57	74.00	20.85	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	LCH	Vertical	PASS

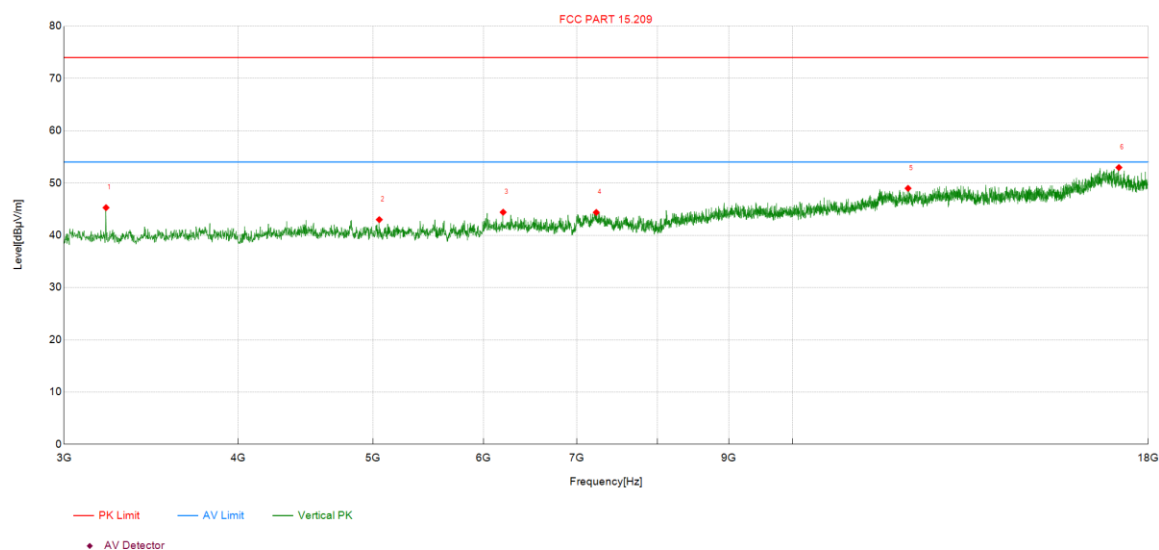

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3215.63	58.56	45.28	-13.28	74.00	28.72	Peak
2	5051.25	52.78	42.99	-9.79	74.00	31.01	Peak
3	6198.75	52.06	44.41	-7.65	74.00	29.59	Peak
4	7230.00	50.42	44.37	-6.05	74.00	29.63	Peak
5	12105.00	48.57	48.98	0.41	74.00	25.02	Peak
6	17150.63	45.50	52.96	7.46	74.00	21.04	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	MCH	Horizontal	PASS

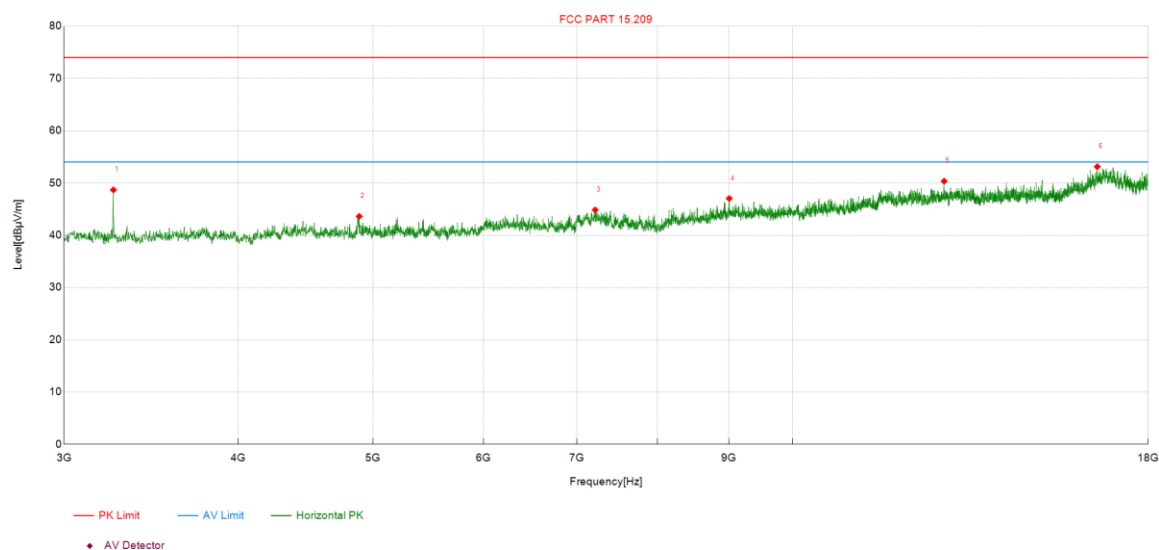

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3255.00	61.99	48.67	-13.32	74.00	25.33	Peak
2	4876.25	53.49	43.61	-9.88	74.00	30.39	Peak
3	7216.88	50.95	44.84	-6.11	74.00	29.16	Peak
4	9007.50	51.55	47.03	-4.52	74.00	26.97	Peak
5	12849.38	48.90	50.34	1.44	74.00	23.66	Peak
6	16548.75	46.22	53.11	6.89	74.00	20.89	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	MCH	Vertical	PASS

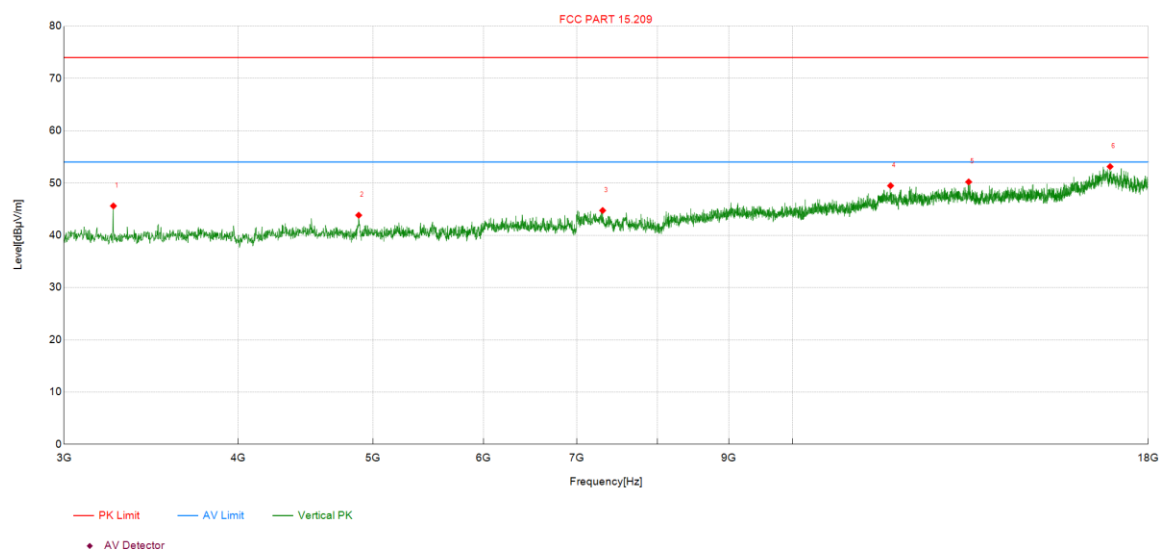

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3255.00	58.93	45.61	-13.32	74.00	28.39	Peak
2	4874.50	53.76	43.83	-9.93	74.00	30.17	Peak
3	7306.88	51.06	44.74	-6.32	74.00	29.26	Peak
4	11760.00	49.44	49.47	0.03	74.00	24.53	Peak
5	13380.00	48.71	50.20	1.49	74.00	23.80	Peak
6	16903.13	45.63	53.13	7.50	74.00	20.87	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	HCH	Horizontal	PASS

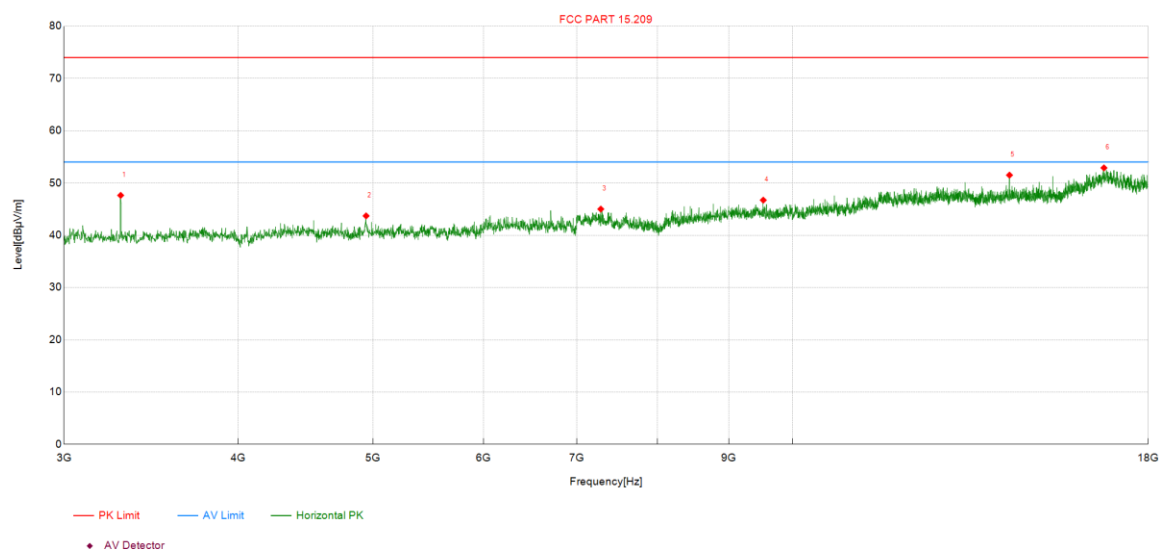

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3294.38	60.87	47.63	-13.24	74.00	26.37	Peak
2	4923.50	53.24	43.71	-9.53	74.00	30.29	Peak
3	7284.38	51.20	45.01	-6.19	74.00	28.99	Peak
4	9528.75	50.45	46.72	-3.73	74.00	27.28	Peak
5	14313.75	49.15	51.50	2.35	74.00	22.50	Peak
6	16732.50	45.57	52.89	7.32	74.00	21.11	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	HCH	Vertical	PASS

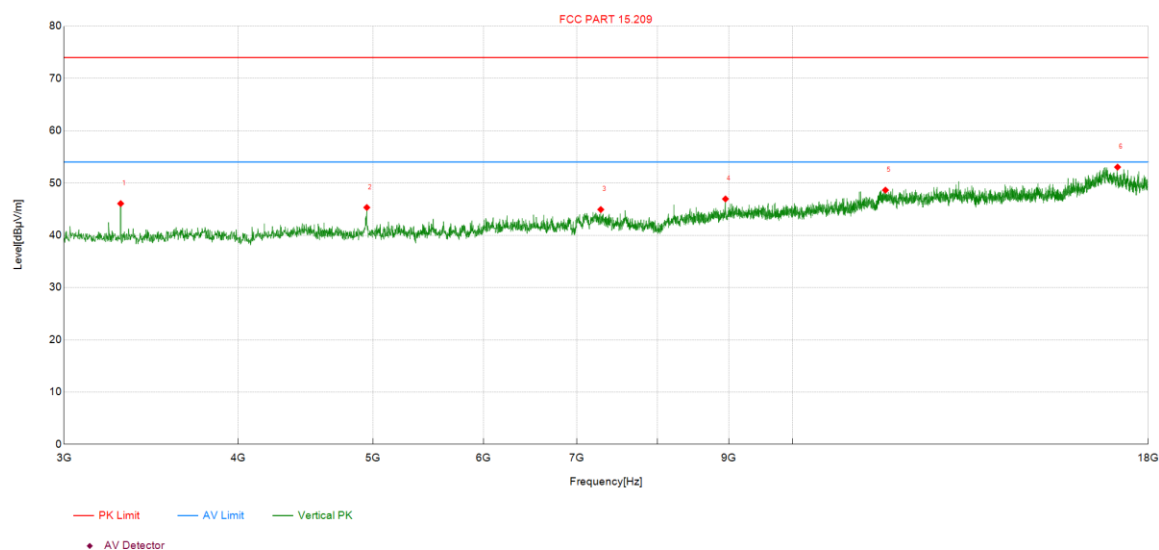

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3294.38	59.30	46.06	-13.24	74.00	27.94	Peak
2	4924.13	54.82	45.31	-9.51	74.00	28.69	Peak
3	7284.38	51.11	44.92	-6.19	74.00	29.08	Peak
4	8951.25	51.50	46.95	-4.55	74.00	27.05	Peak
5	11660.63	48.85	48.63	-0.22	74.00	25.37	Peak
6	17113.13	45.49	53.03	7.54	74.00	20.97	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	LCH	Horizontal	PASS

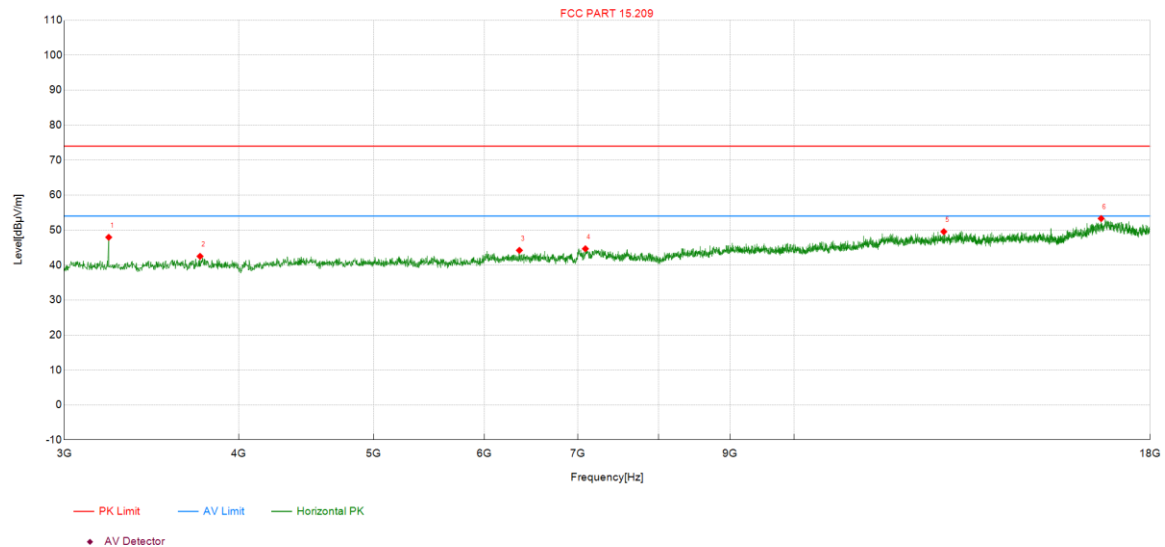

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	3228.75	61.24	47.95	-13.29	74.00	26.05	Peak
2	3753.75	54.58	42.51	-12.07	74.00	31.49	Peak
3	6358.13	51.37	44.21	-7.16	74.00	29.79	Peak
4	7089.38	50.78	44.67	-6.11	74.00	29.33	Peak
5	12808.13	48.29	49.55	1.26	74.00	24.45	Peak
6	16605.00	46.39	53.31	6.92	74.00	20.69	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	LCH	Vertical	PASS

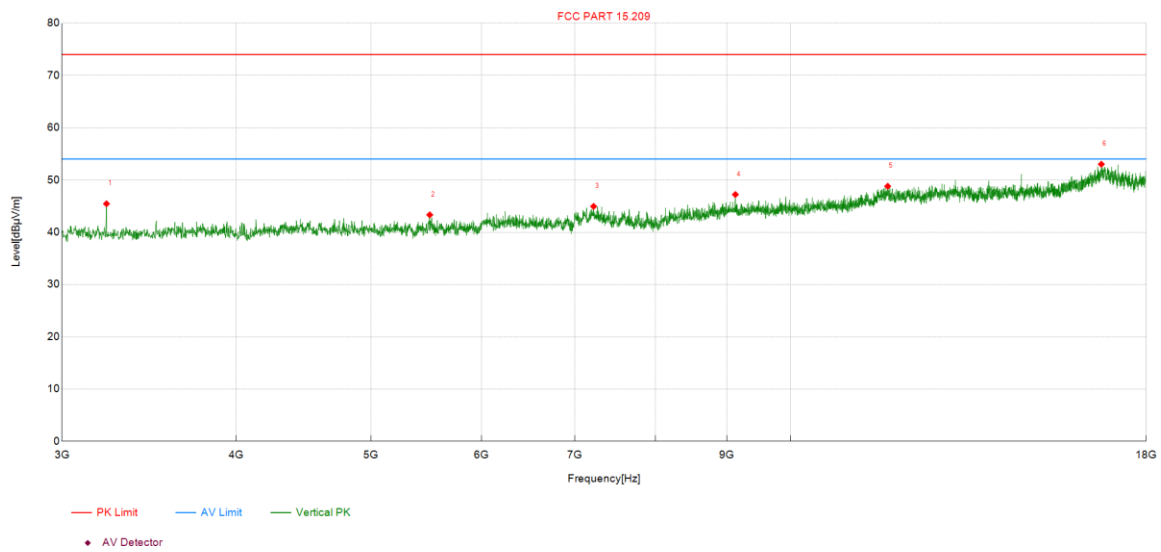

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	3228.75	58.74	45.45	-13.29	74.00	28.55	Peak
2	5508.75	51.93	43.33	-8.60	74.00	30.67	Peak
3	7222.50	51.04	44.95	-6.09	74.00	29.05	Peak
4	9129.38	51.42	47.21	-4.21	74.00	26.79	Peak
5	11743.13	48.80	48.80	0.00	74.00	25.20	Peak
6	16715.63	45.83	53.01	7.18	74.00	20.99	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	MCH	Horizontal	PASS

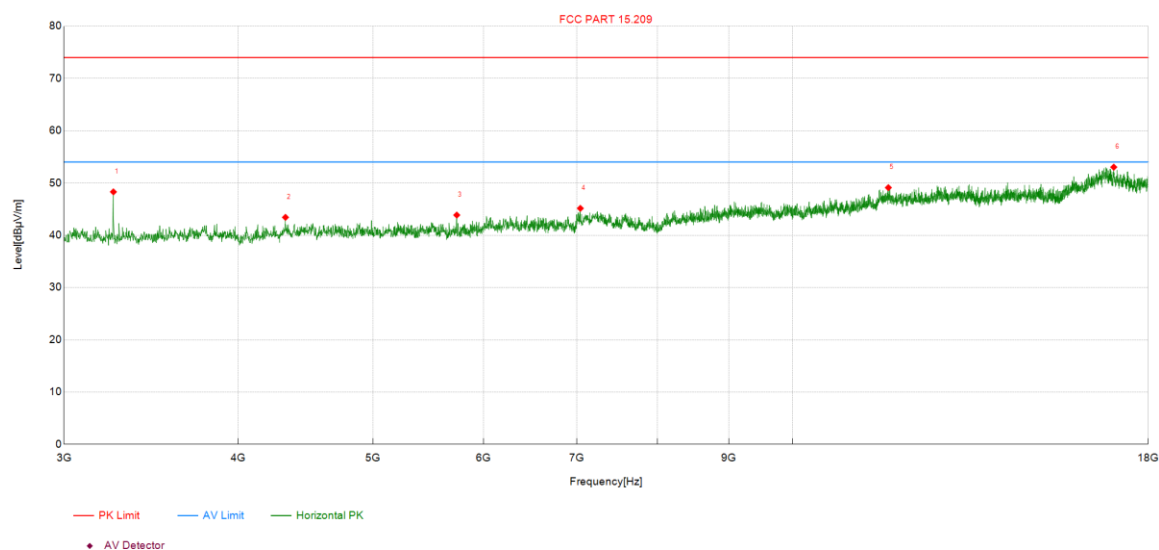

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	3255.00	61.62	48.30	-13.32	74.00	25.70	Peak
2	4325.63	54.32	43.43	-10.89	74.00	30.57	Peak
3	5741.25	52.55	43.86	-8.69	74.00	30.14	Peak
4	7042.50	51.27	45.15	-6.12	74.00	28.85	Peak
5	11716.88	49.24	49.11	-0.13	74.00	24.89	Peak
6	17006.25	45.44	53.03	7.59	74.00	20.97	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	MCH	Vertical	PASS

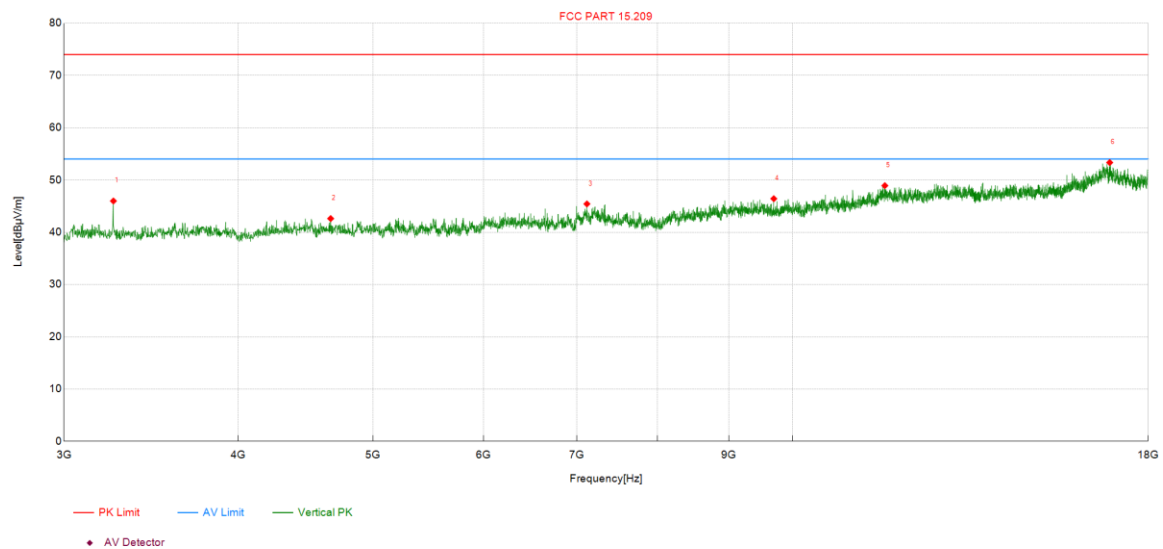

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	3255.00	59.30	45.98	-13.32	74.00	28.02	Peak
2	4661.25	52.86	42.62	-10.24	74.00	31.38	Peak
3	7119.38	51.52	45.42	-6.10	74.00	28.58	Peak
4	9695.63	49.99	46.42	-3.57	74.00	27.58	Peak
5	11649.38	49.14	48.92	-0.22	74.00	25.08	Peak
6	16891.88	45.81	53.33	7.52	74.00	20.67	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	HCH	Horizontal	PASS

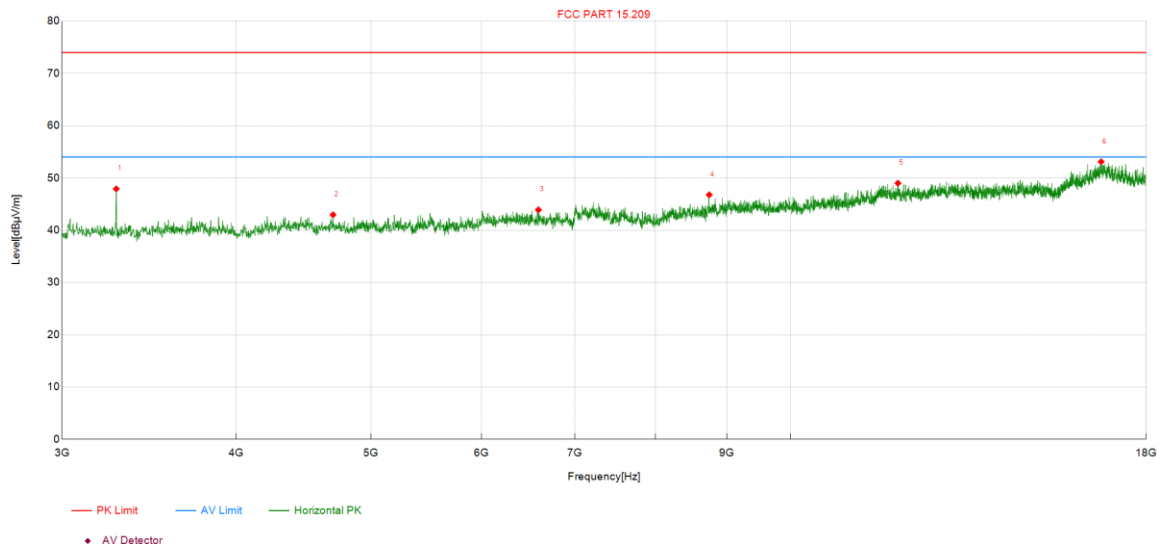

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	3281.25	61.18	47.92	-13.26	74.00	26.08	Peak
2	4695.00	52.93	42.96	-9.97	74.00	31.04	Peak
3	6592.50	50.69	43.91	-6.78	74.00	30.09	Peak
4	8743.13	51.92	46.78	-5.14	74.00	27.22	Peak
5	11943.75	48.67	49.00	0.33	74.00	25.00	Peak
6	16710.00	45.98	53.10	7.12	74.00	20.90	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	HCH	Vertical	PASS

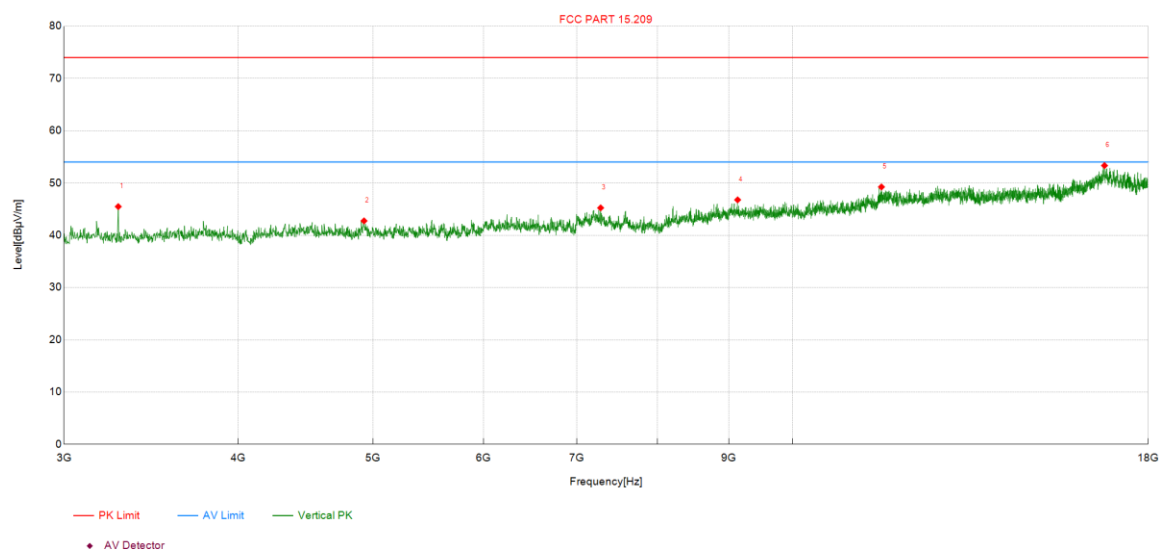

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	3281.25	58.74	45.48	-13.26	74.00	28.52	Peak
2	4925.63	52.34	42.75	-9.59	74.00	31.25	Peak
3	7282.50	51.42	45.24	-6.18	74.00	28.76	Peak
4	9133.13	50.97	46.77	-4.20	74.00	27.23	Peak
5	11583.75	49.43	49.24	-0.19	74.00	24.76	Peak
6	16747.50	45.89	53.33	7.44	74.00	20.67	Peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Part III: 18GHz~26.5GHz:

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

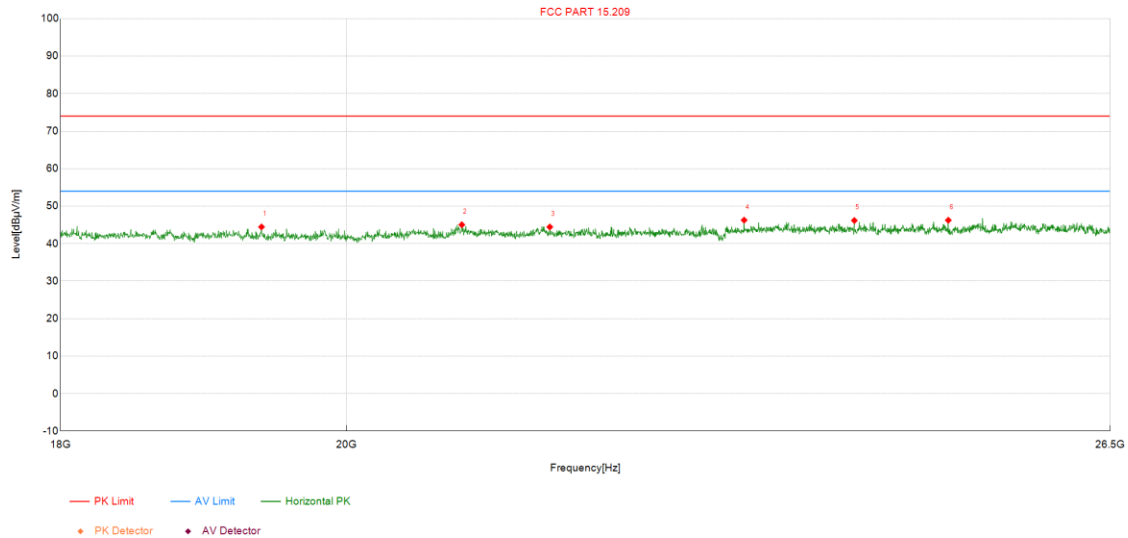

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	19383.25	59.37	44.46	-14.91	74.00	29.54	Peak
2	20868.25	59.54	45.04	-14.50	74.00	28.96	Peak
3	21555.75	58.90	44.45	-14.45	74.00	29.55	Peak
4	23156.25	59.74	46.27	-13.47	74.00	27.73	Peak
5	24116.00	59.46	46.17	-13.29	74.00	27.83	Peak
6	24965.75	59.33	46.24	-13.09	74.00	27.76	Peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

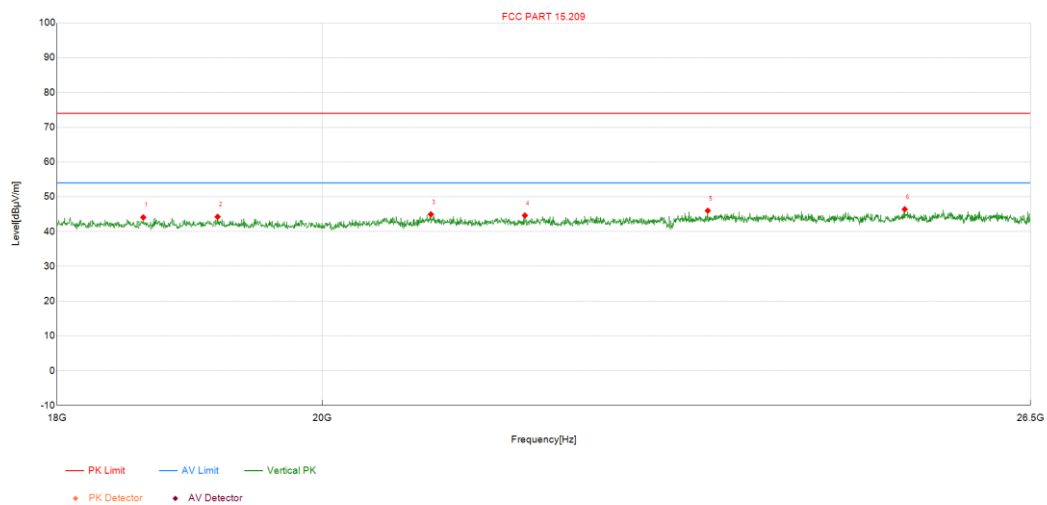

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV/m)	(dB)	
1	18627.00	58.81	44.08	-14.73	74.00	29.92	Peak
2	19185.25	59.15	44.25	-14.90	74.00	29.75	Peak
3	20882.00	59.45	44.96	-14.49	74.00	29.04	Peak
4	21676.75	59.08	44.64	-14.44	74.00	29.36	Peak
5	23310.25	59.41	46.00	-13.41	74.00	28.00	Peak
6	25207.75	59.51	46.42	-13.09	74.00	27.58	Peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Part IV: 30MHz~1GHz:

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

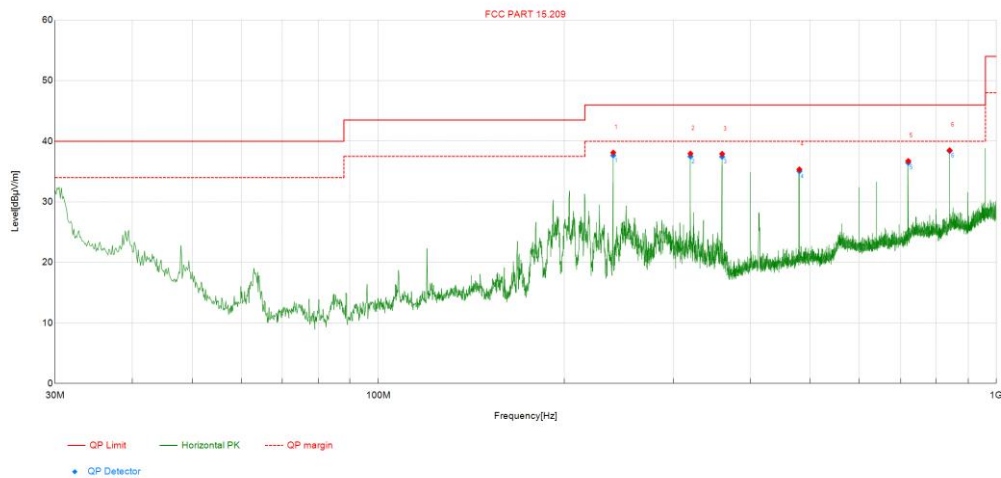


No.	Frequency (MHz)	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Remark
1	240.01	-22.05	59.7	37.65	46.00	8.35	QP
2	320.03	-19.89	57.38	37.49	46.00	8.51	QP
3	360.04	-18.80	56.24	37.44	46.00	8.56	QP
4	480.08	-15.56	50.61	35.05	46.00	10.95	QP
5	720.16	-10.87	47.32	36.45	46.00	9.55	QP
6	840.07	-8.55	46.94	38.39	46.00	7.61	QP

Note: 1. Measurement = Reading Level + Correct Factor.

2. QP: Quasi-Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

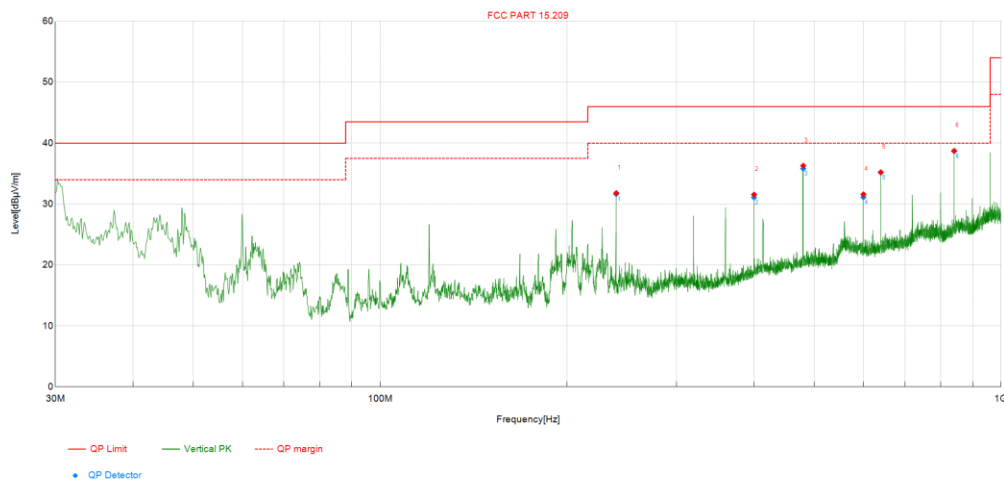


No.	Frequency (MHz)	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Remark
1	240.01	-22.05	53.7	31.65	46.00	14.35	QP
2	400.06	-17.14	48.22	31.08	46.00	14.92	QP
3	480.08	-15.56	51.38	35.82	46.00	10.18	QP
4	600.12	-12.92	44.04	31.12	46.00	14.88	QP
5	640.01	-12.17	47.34	35.17	46.00	10.83	QP
6	840.07	-8.55	47.23	38.68	46.00	7.32	QP

Note: 1. Measurement = Reading Level + Correct Factor.

2. QP: Quasi-Peak detector.

Part V: Below 30MHz:

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

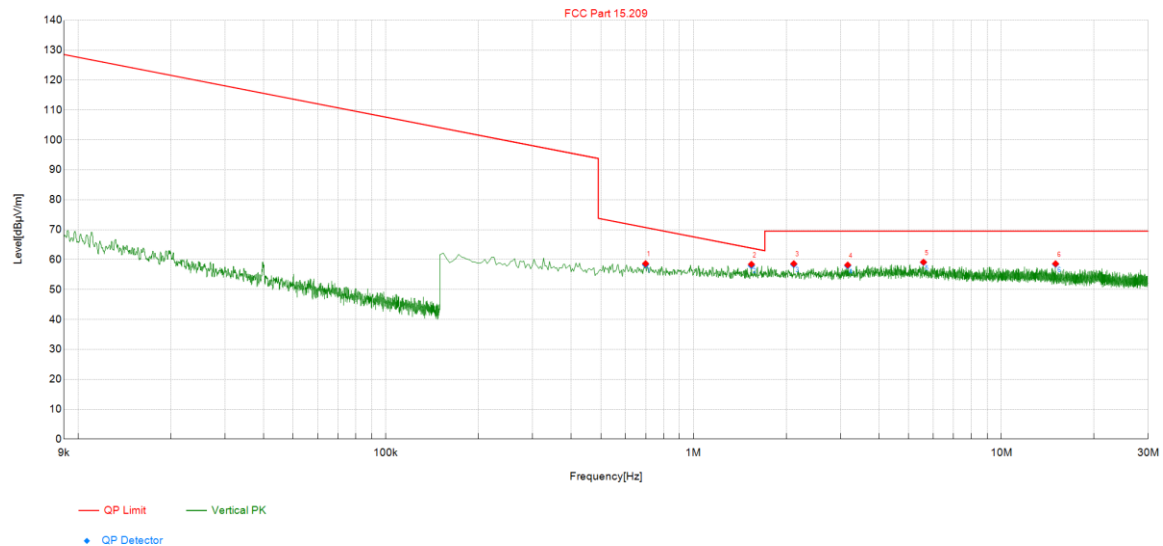

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
1	0.70	39.35	18.94	58.29	70.72	12.43	Peak
2	1.54	39.26	18.71	57.97	63.84	5.87	Peak
3	2.12	39.28	19.08	58.36	69.54	11.18	Peak
4	3.17	39.40	18.52	57.92	69.54	11.62	Peak
5	5.59	39.44	19.62	59.06	69.54	10.48	Peak
6	15.01	39.36	19.09	58.45	69.54	11.09	Peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.


3. Only the worst-case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

10. Radiated Band Edge Compliance

10.1. General Information

Test date	2026-04-19	Test engineer	Caleb Fu	
Climate condition	Ambient temperature	18.9℃	Relative humidity	68.2%
	Atmospheric pressure	101.3kPa		
Test place	3m chamber			

10.2. Block diagram of test setup

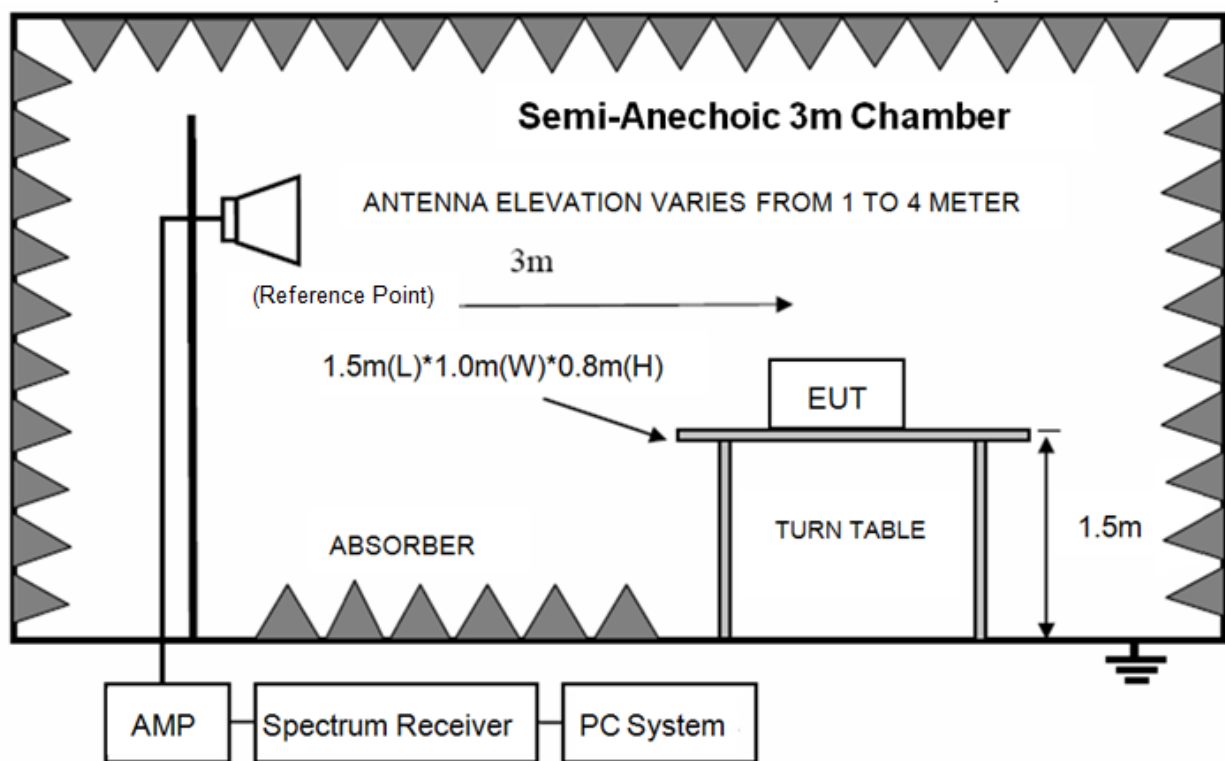

10.3. Limit

All restricted frequency bands (FCC part15.205) shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions.

10.4. Test procedure

Same with clause 5.3 except change investigated frequency range.

Remark: All restriction band have been tested, and shown in report.


10.5. Test result

Pass. (See below detailed test result)

Note: All modes were test and the worst case was record in this report.

Radiated Emission Test Result

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

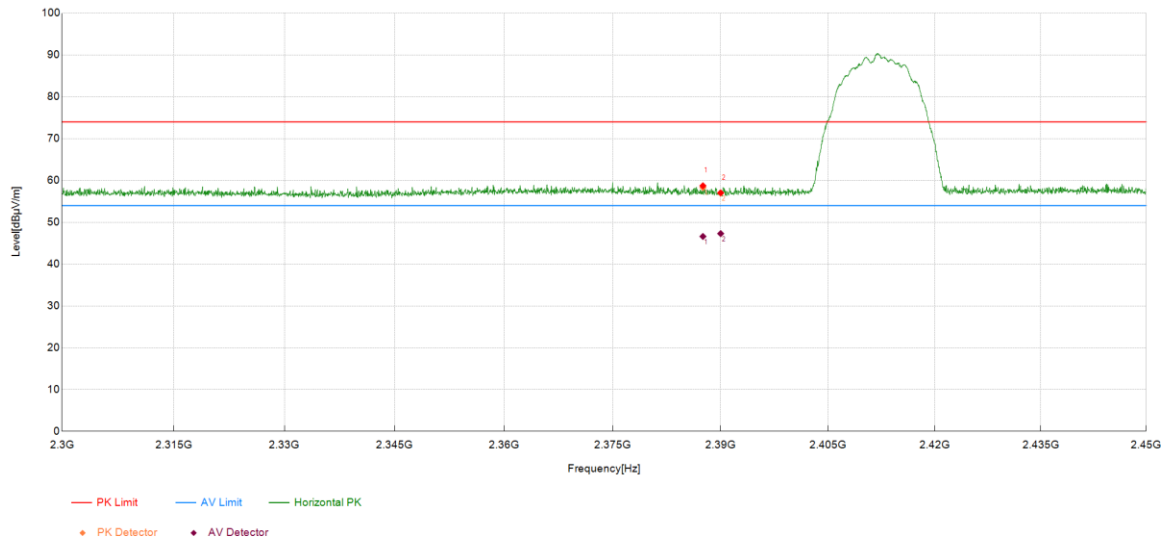

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2387.53	56.80	58.73	1.93	74.00	15.27	Peak
2	2390.00	55.07	57.03	1.96	74.00	16.97	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2387.53	1.93	44.68	46.61	54.00	7.39	AV
2	2390.00	1.96	45.33	47.29	54.00	6.71	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

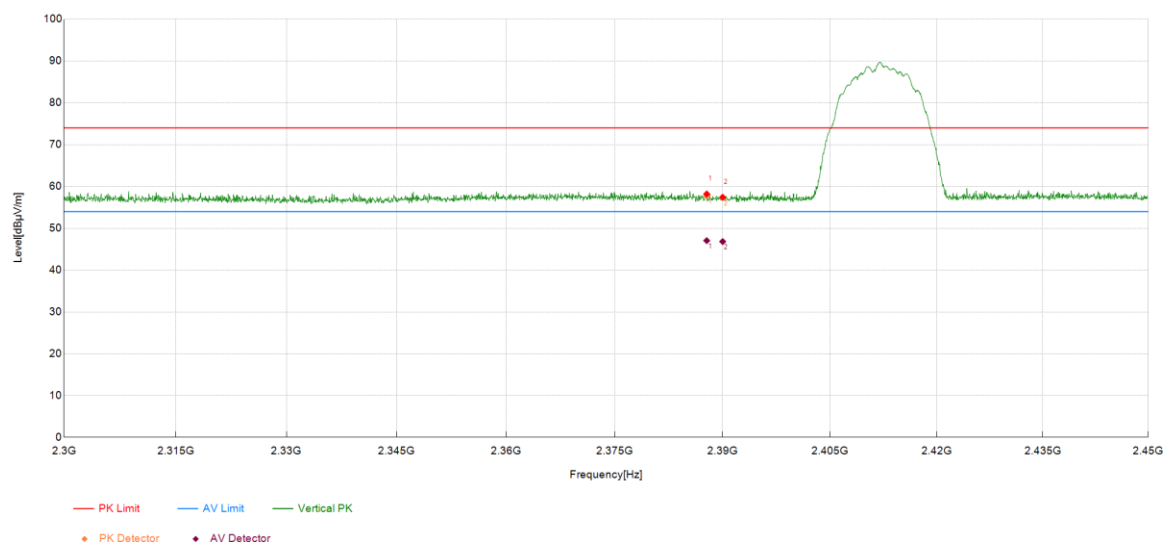

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2387.78	56.27	58.20	1.93	74.00	15.80	Peak
2	2390.00	55.47	57.43	1.96	74.00	16.57	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2387.78	1.93	45.11	47.04	54.00	6.96	AV
2	2390.00	1.96	44.86	46.82	54.00	7.18	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

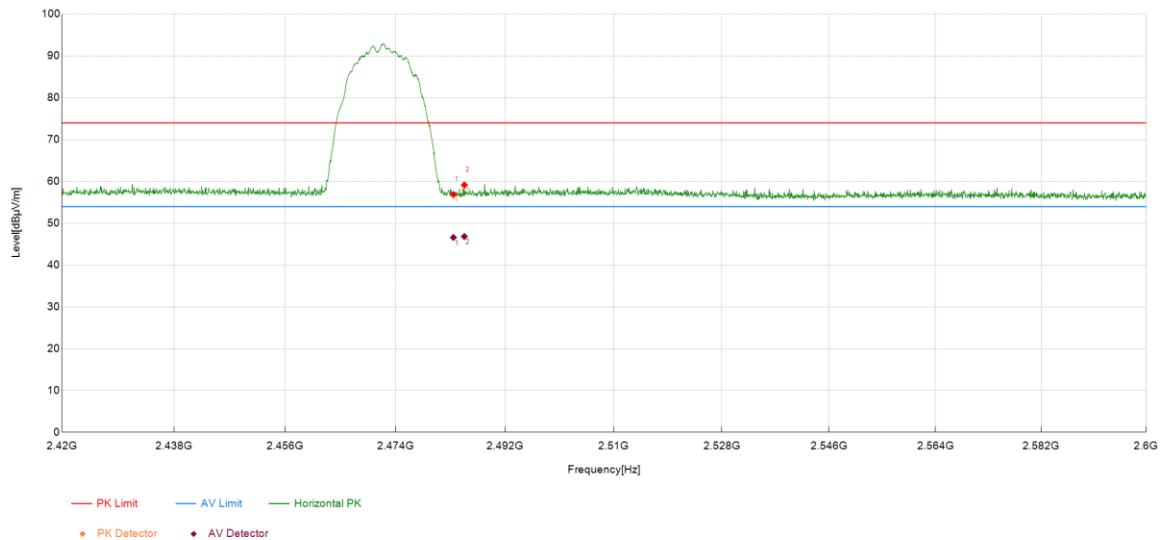

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.50	54.99	56.91	1.92	74.00	17.09	Peak
2	2485.30	57.23	59.15	1.92	74.00	14.85	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	44.69	46.61	54.00	7.39	AV
2	2485.30	1.92	44.91	46.83	54.00	7.17	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

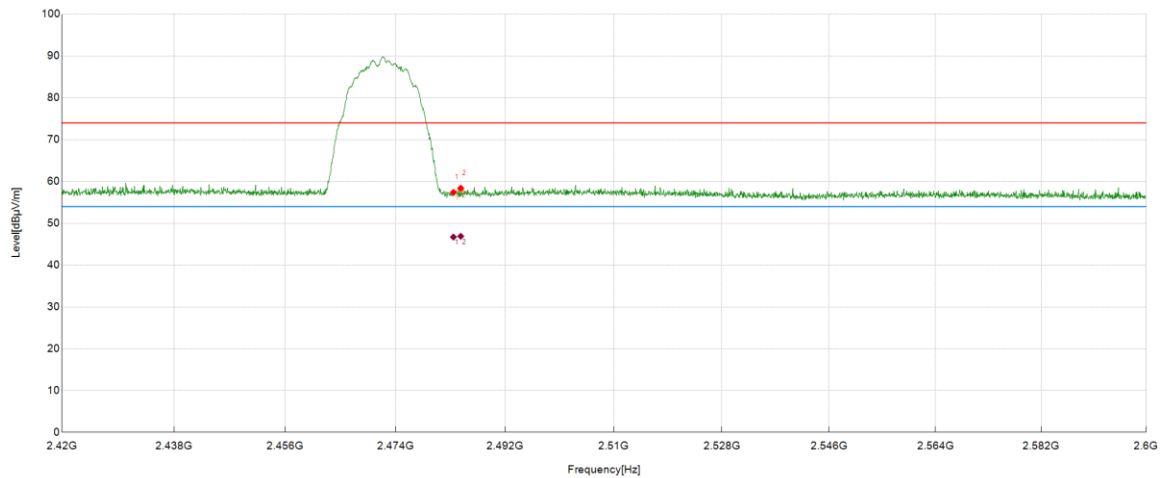

— PK Limit — AV Limit — Vertical PK
 • PK Detector • AV Detector

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2483.50	55.48	57.40	1.92	74.00	16.60	Peak
2	2484.70	56.46	58.39	1.93	74.00	15.61	Peak

Final Data List							
No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	44.79	46.71	54.00	7.29	AV
2	2484.70	1.93	44.96	46.89	54.00	7.11	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

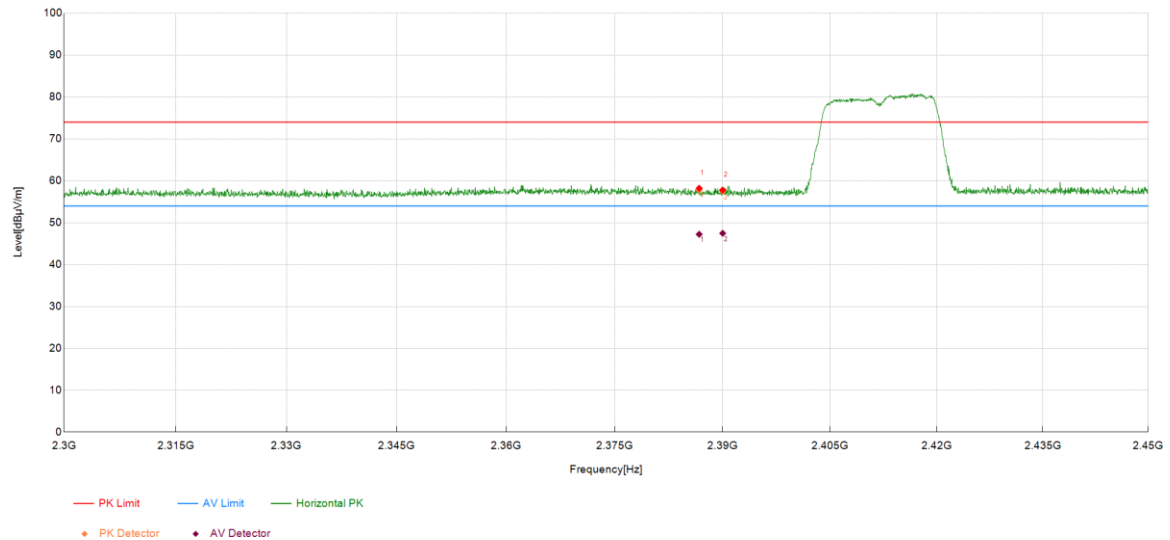

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2386.73	56.30	58.22	1.92	74.00	15.78	Peak
2	2390.00	55.84	57.80	1.96	74.00	16.20	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2386.73	1.92	45.31	47.23	54.00	6.77	AV
2	2390.00	1.96	45.51	47.47	54.00	6.53	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

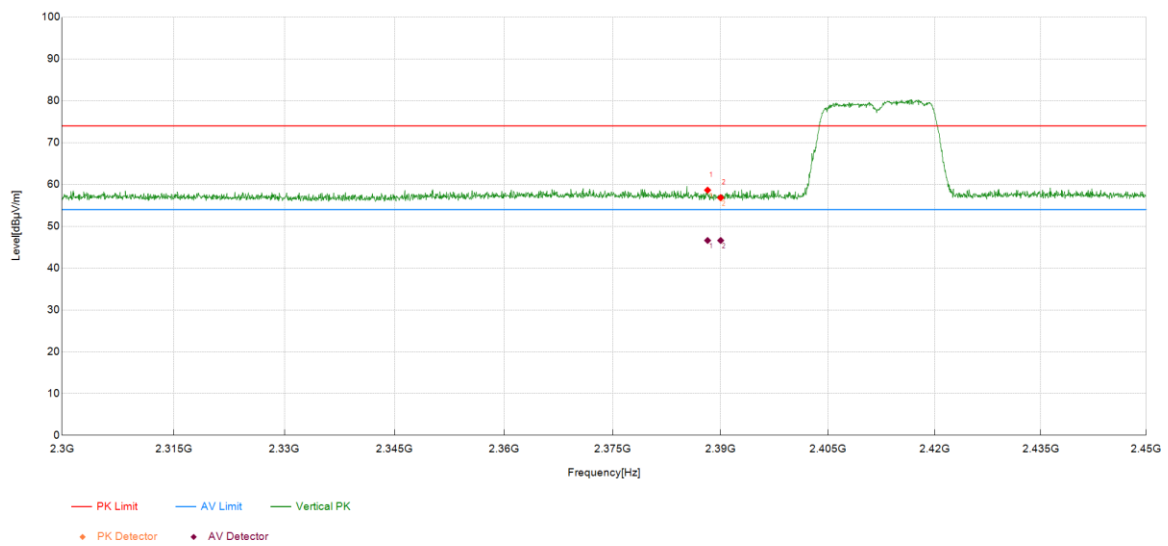

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.18	56.70	58.64	1.94	74.00	15.36	Peak
2	2390.00	54.91	56.87	1.96	74.00	17.13	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2388.18	1.94	44.66	46.60	54.00	7.40	AV
2	2390.00	1.96	44.64	46.60	54.00	7.40	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

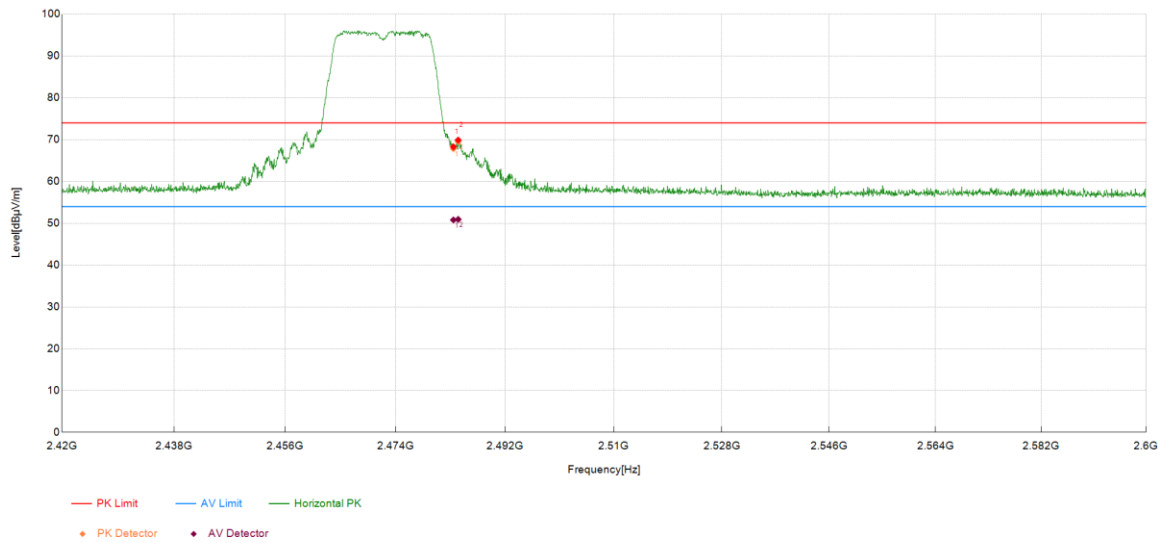

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2483.50	66.37	68.29	1.92	74.00	5.71	Peak
2	2484.28	67.97	69.90	1.93	74.00	4.10	Peak

Final Data List							
No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	48.87	50.79	54.00	3.21	AV
2	2484.28	1.93	49.00	50.93	54.00	3.07	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

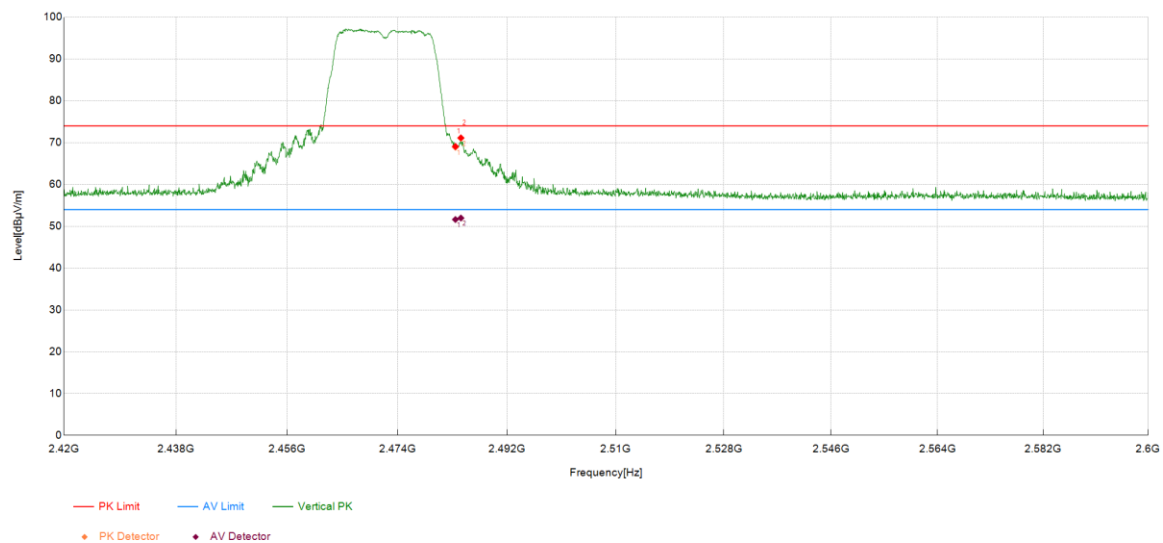

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.50	67.16	69.08	1.92	74.00	4.92	Peak
2	2484.40	69.20	71.13	1.93	74.00	2.87	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	49.70	51.62	54.00	2.38	AV
2	2484.40	1.93	50.04	51.97	54.00	2.03	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	LCH	Horizontal	PASS

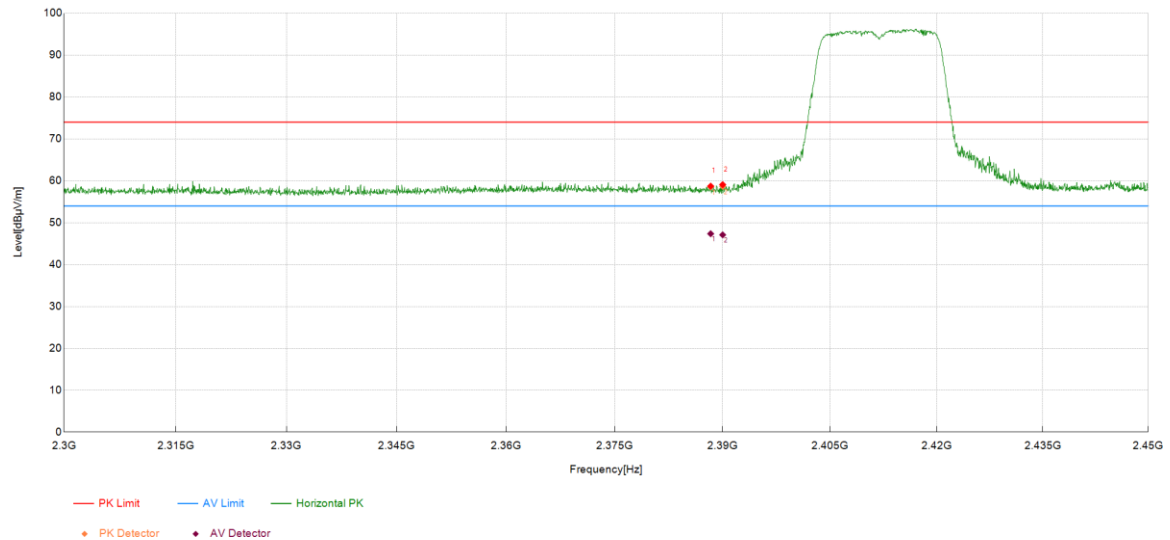

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2388.33	56.79	58.73	1.94	74.00	15.27	Peak
2	2390.00	57.13	59.09	1.96	74.00	14.91	Peak

Final Data List							
No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2388.33	1.94	45.42	47.36	54.00	6.64	AV
2	2390.00	1.96	45.14	47.10	54.00	6.90	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	LCH	Vertical	PASS

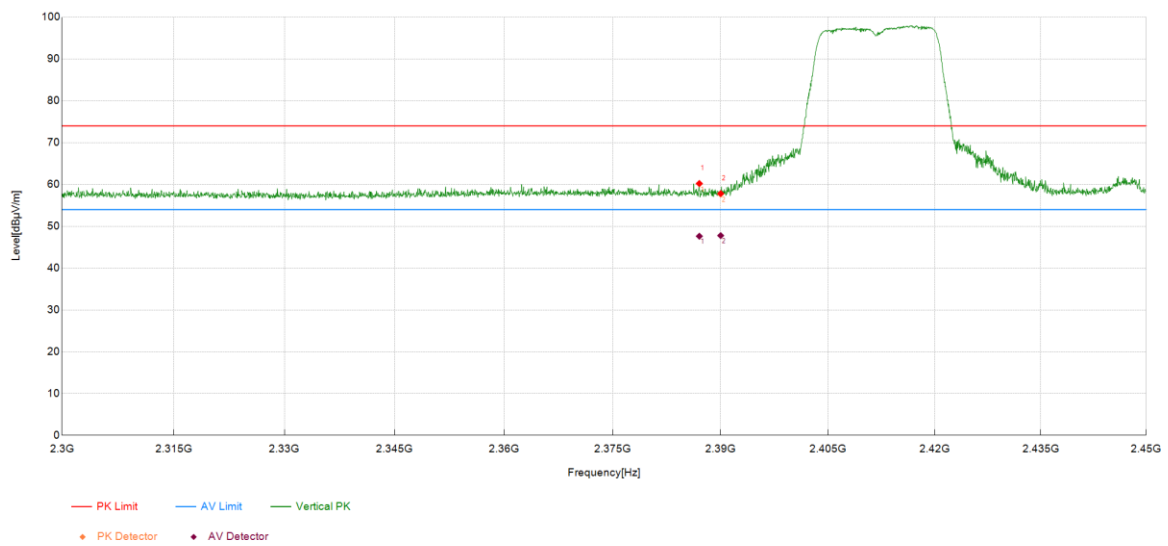

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2387.03	58.29	60.22	1.93	74.00	13.78	Peak
2	2390.00	55.87	57.83	1.96	74.00	16.17	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2387.03	1.93	45.69	47.62	54.00	6.38	AV
2	2390.00	1.96	45.81	47.77	54.00	6.23	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	HCH	Horizontal	PASS

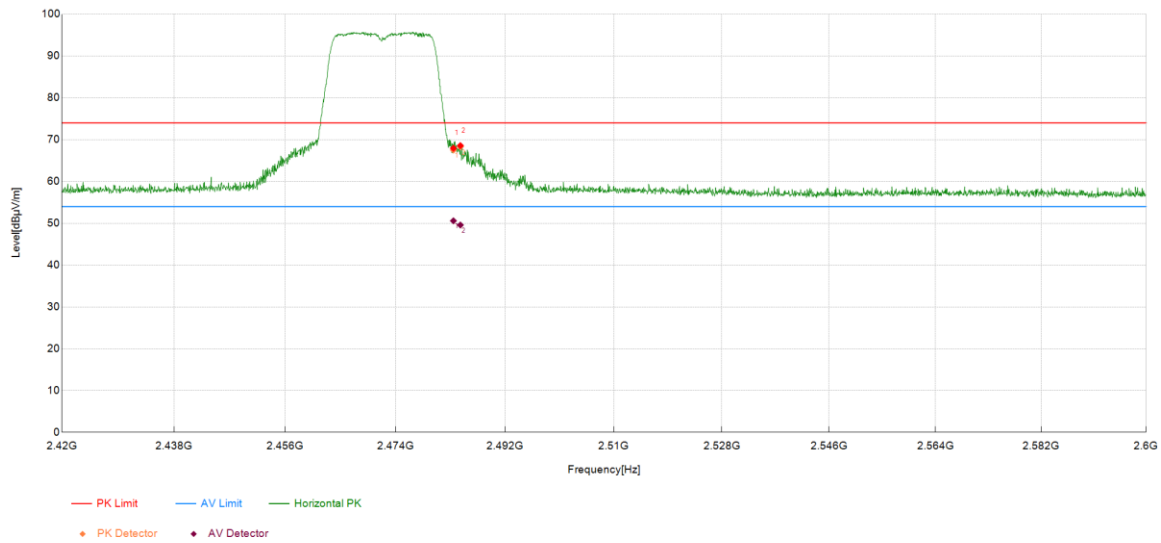

Suspected Data List

No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2483.50	66.03	67.95	1.92	74.00	6.05	Peak
2	2484.64	66.64	68.57	1.93	74.00	5.43	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	48.67	50.59	54.00	3.41	AV
2	2484.64	1.93	47.65	49.58	54.00	4.42	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N20	HCH	Vertical	PASS

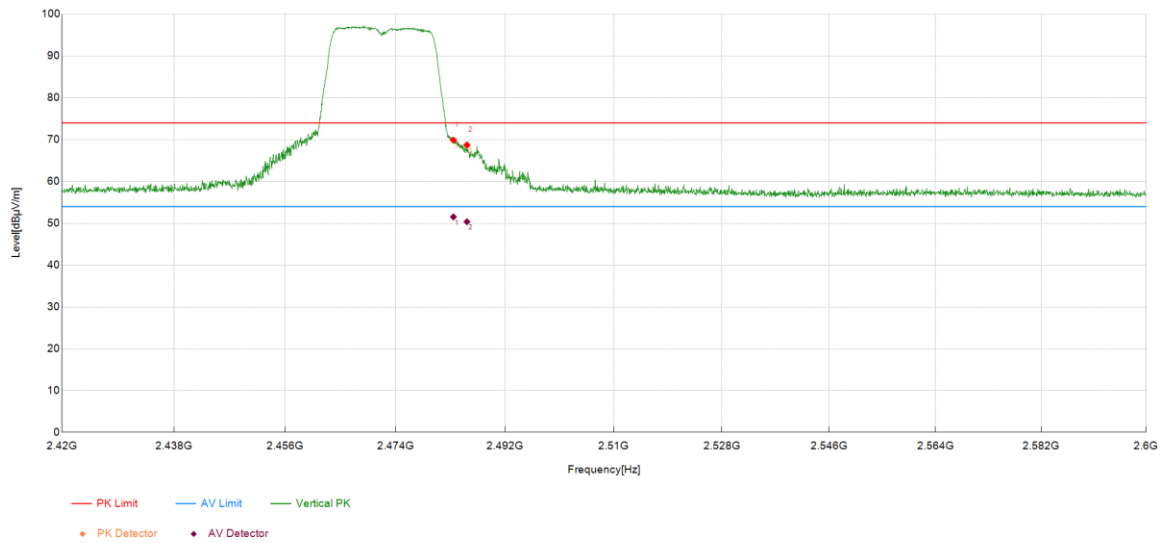

Suspected Data List

No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2483.50	67.98	69.90	1.92	74.00	4.10	Peak
2	2485.72	66.82	68.74	1.92	74.00	5.26	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	49.60	51.52	54.00	2.48	AV
2	2485.72	1.92	48.44	50.36	54.00	3.64	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	LCH	Horizontal	PASS

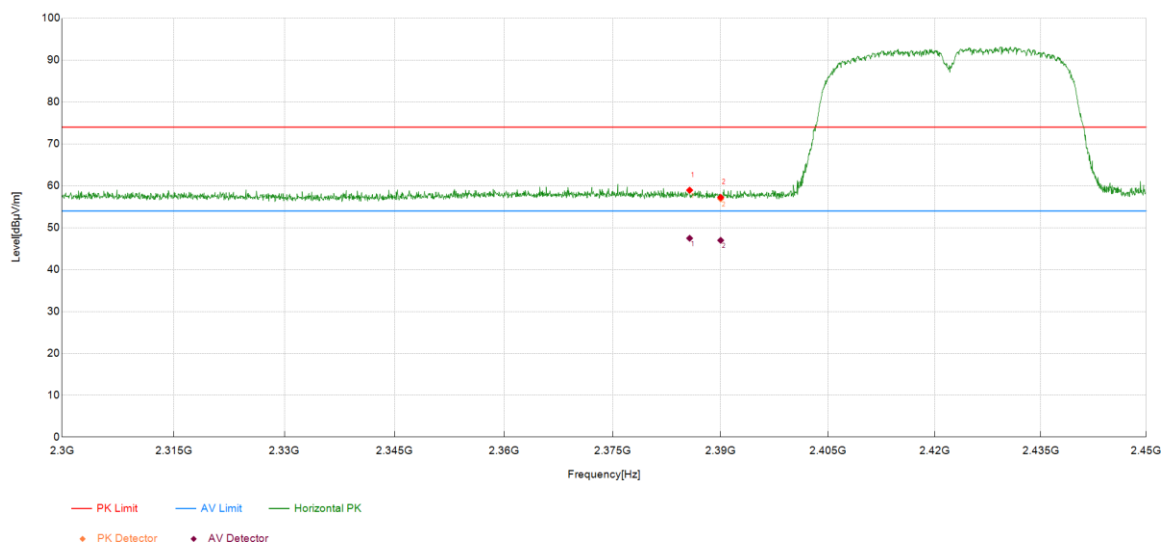

Suspected Data List							
No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2385.68	57.04	58.95	1.91	74.00	15.05	Peak
2	2390.00	55.27	57.23	1.96	74.00	16.77	Peak

Final Data List							
No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2385.68	1.91	45.57	47.48	54.00	6.52	AV
2	2390.00	1.96	45.02	46.98	54.00	7.02	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	LCH	Vertical	PASS

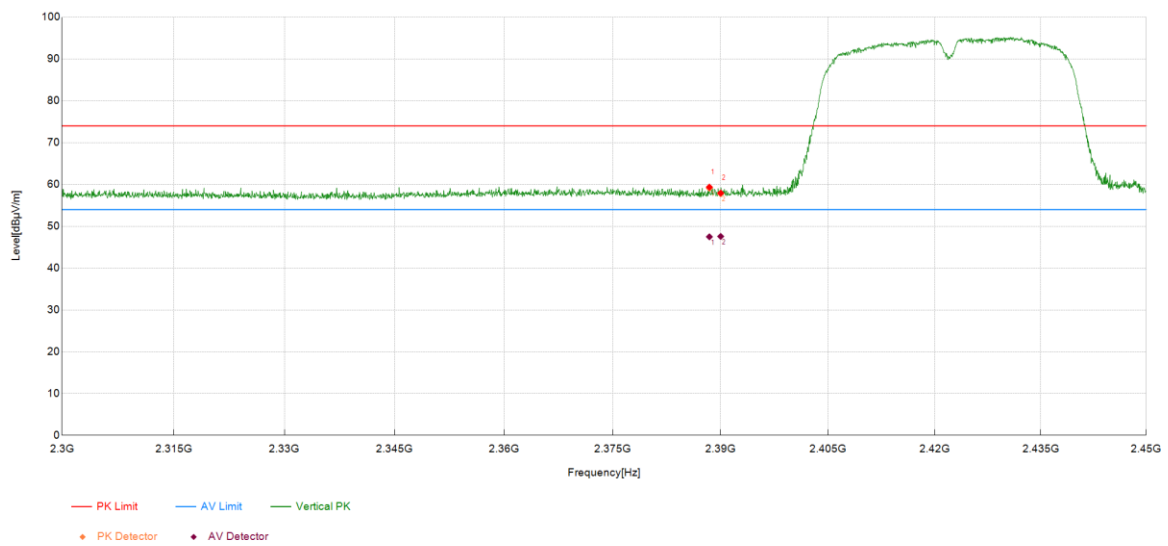

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.43	57.42	59.36	1.94	74.00	14.64	Peak
2	2390.00	55.98	57.94	1.96	74.00	16.06	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2388.43	1.94	45.54	47.48	54.00	6.52	AV
2	2390.00	1.96	45.61	47.57	54.00	6.43	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	HCH	Horizontal	PASS

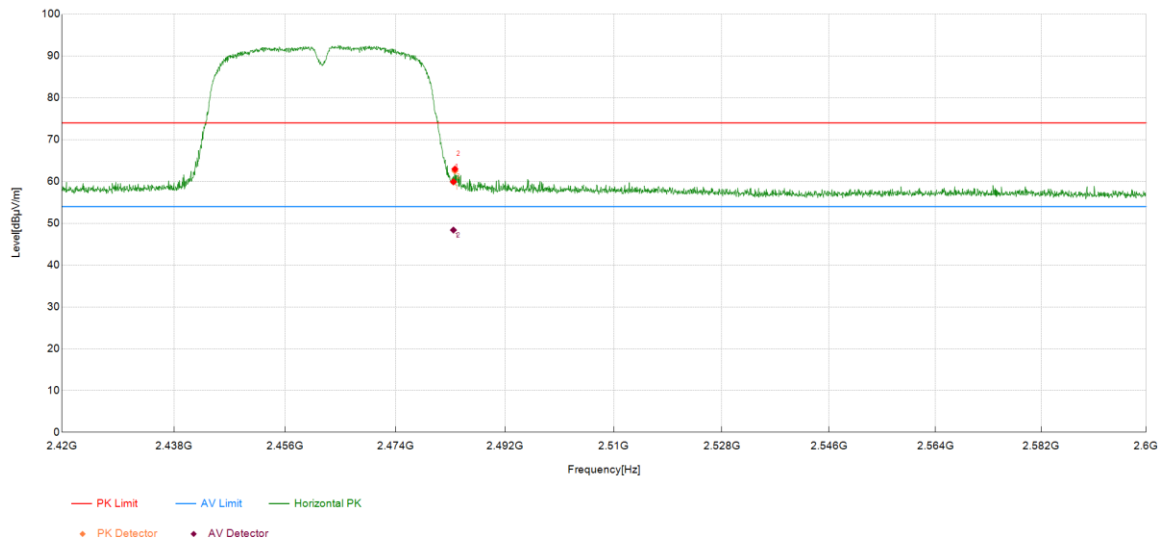

Suspected Data List

No.	Frequency (MHz)	Reading Level (dBμV)	Result (dBμV/m)	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.50	58.00	59.92	1.92	74.00	14.08	Peak
2	2483.74	61.04	62.96	1.92	74.00	11.04	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	46.45	48.37	54.00	5.63	AV
2	2483.74	1.92	46.52	48.44	54.00	5.56	AV


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

Test Mode	Channel	Polarization	Verdict
11N40	HCH	Vertical	PASS

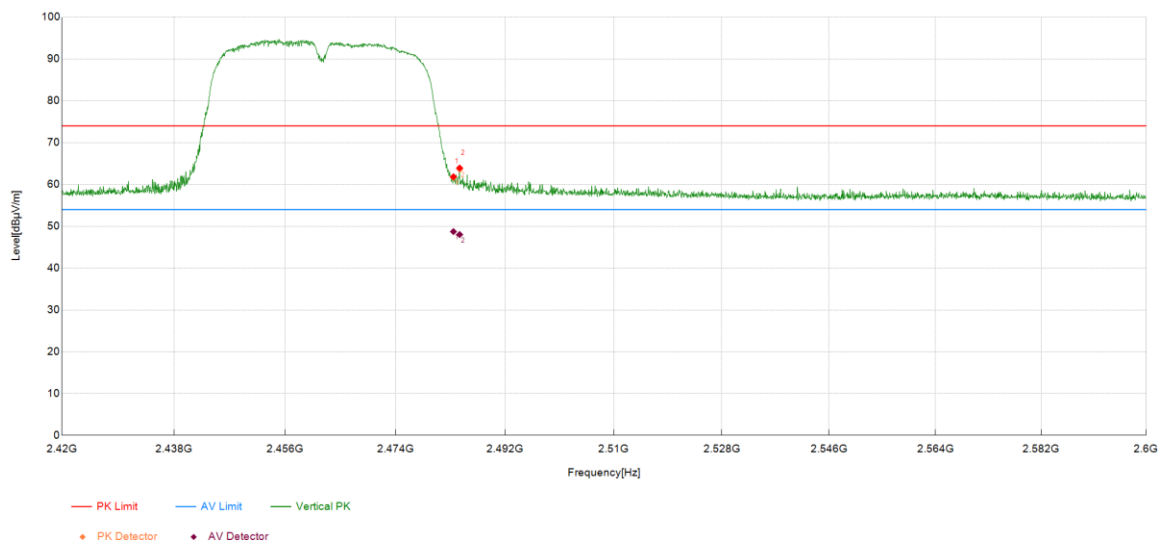

Suspected Data List

No.	Frequency	Reading Level	Result	Correct Factor	Limit	Margin	Remark
	(MHz)	(dBμV)	(dBμV/m)	(dB/m)	(dBμV/m)	(dB)	
1	2483.50	59.92	61.84	1.92	74.00	12.16	Peak
2	2484.52	62.00	63.93	1.93	74.00	10.07	Peak

Final Data List

No.	Frequency (MHz)	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Remark
1	2483.50	1.92	46.81	48.73	54.00	5.27	AV
2	2484.52	1.93	46.09	48.02	54.00	5.98	AV

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

11. Power Line Conducted Emission

11.1. General Information

Test date	N/A	Test engineer	/	
Climate condition	Ambient temperature	/	Relative humidity	/
	Atmospheric pressure	/		
Test place	/			

11.2. Block diagram of test setup

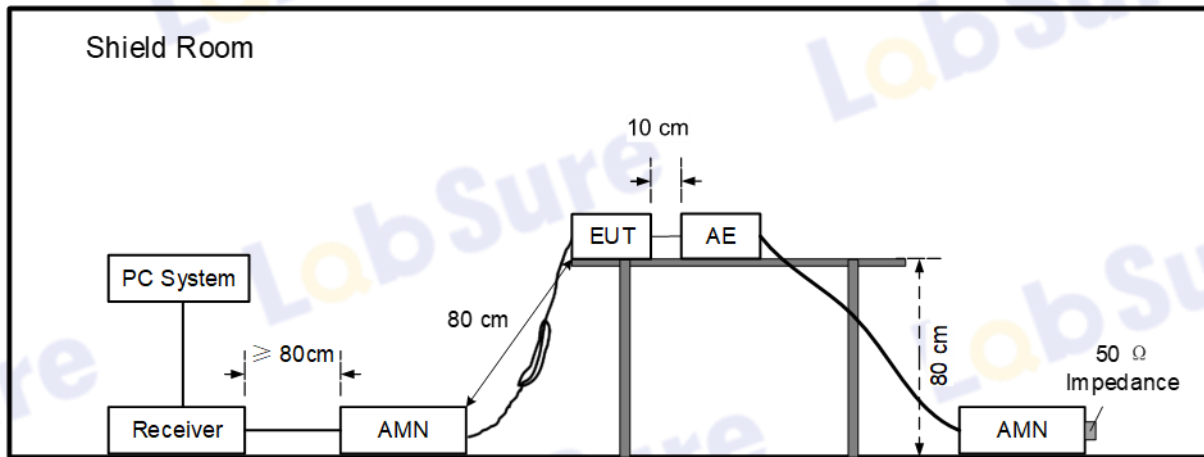

11.3. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.4. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 3.0 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.5. Test result

Not applicable, the power is supplied by DC 3.7V Polymer Li-ion built-in battery in Vapor Pro Floater.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Result

The antenna used for this product is FPC antenna and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 1.25 dBi

13. Test Setup Photograph

See the Appendix Test Setup Photos

14. Photos of the EUT

See the Appendix External EUT Photos and Appendix Internal EUT Photos

END OF REPORT