Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: IPTV Set-Top Box

Test Model: SML-5045W6

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Ling Zhu
Supervised by:	Li Huan

D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	18.255	---	Pass
NVNT	a	5200	Ant0	18.261	---	Pass
NVNT	a	5240	Ant0	18.463	---	Pass
NVNT	n20	5180	Ant0	19.367	---	Pass
NVNT	n20	5200	Ant0	19.29	---	Pass
NVNT	n20	5240	Ant0	19.241	---	Pass
NVNT	n40	5190	Ant0	38.708	---	Pass
NVNT	n40	5230	Ant0	38.758	---	Pass
NVNT	ac20	5180	Ant0	19.356	---	Pass
NVNT	ac20	5200	Ant0	19.372	---	Pass
NVNT	ac20	5240	Ant0	19.307	---	Pass
NVNT	ac40	5190	Ant0	38.904	---	Pass
NVNT	ac40	5230	Ant0	38.695	---	Pass
NVNT	ac80	5210	Ant0	86.753	---	Pass
NVNT	ax20	5180	Ant0	20.336	---	Pass
NVNT	ax20	5200	Ant0	20.599	---	Pass
NVNT	ax20	5240	Ant0	20.521	---	Pass
NVNT	ax40	5190	Ant0	39.43	---	Pass
NVNT	ax40	5230	Ant0	39.562	---	Pass
NVNT	ax80	5210	Ant0	80.866	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

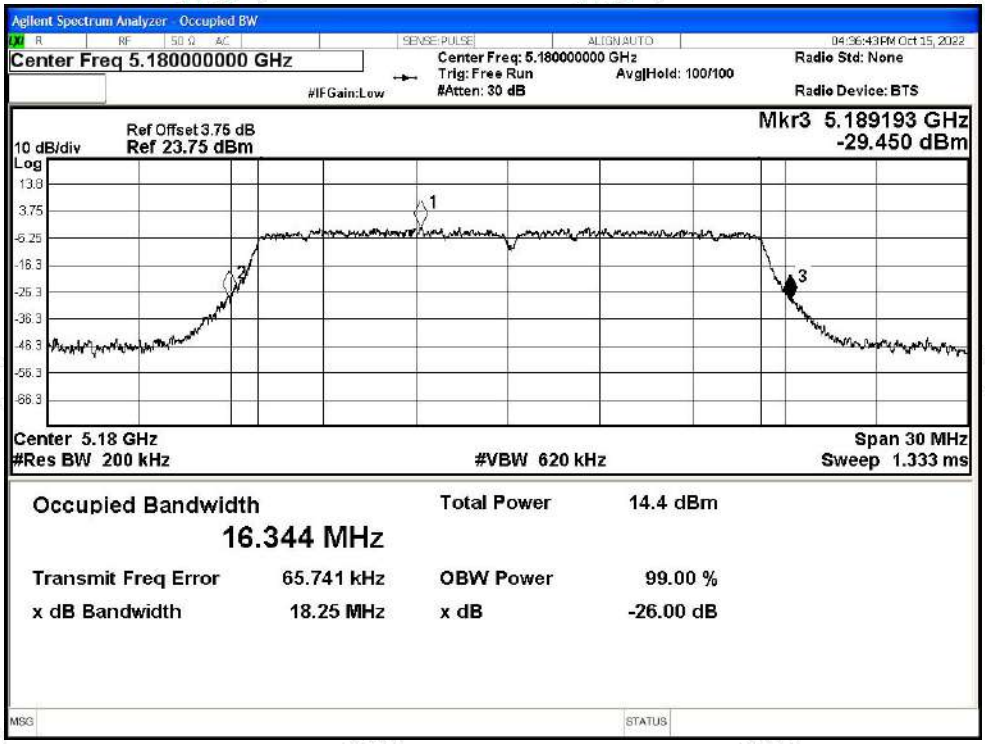

-26dB Bandwidth NVNT a 5200MHz Ant0

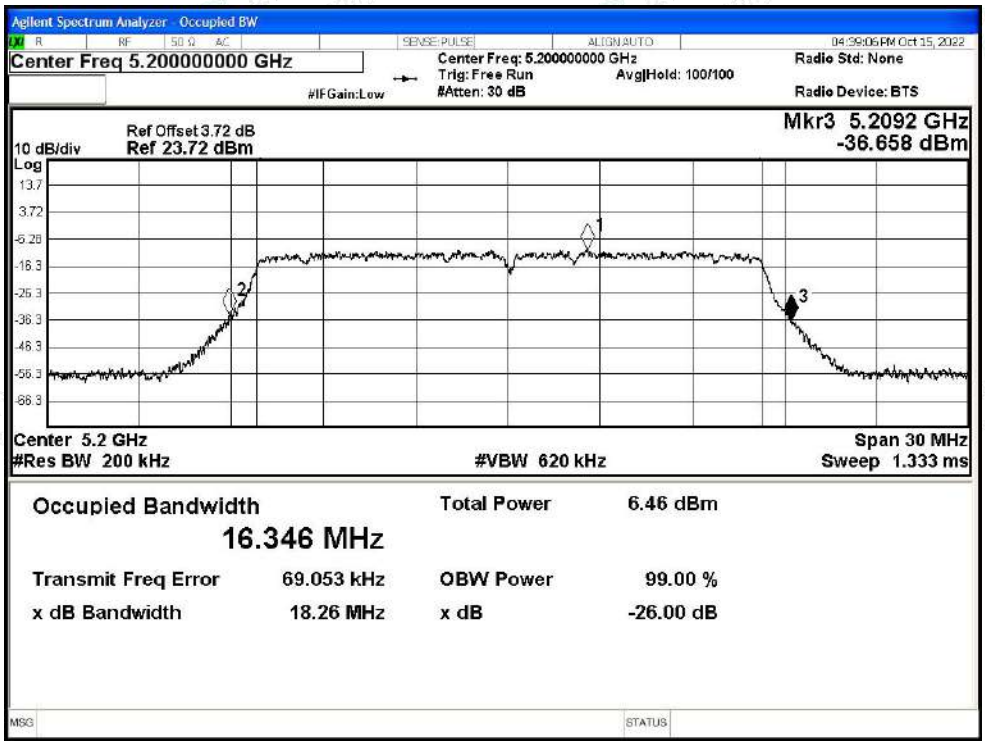

-26dB Bandwidth NVNT a 5240MHz Ant0

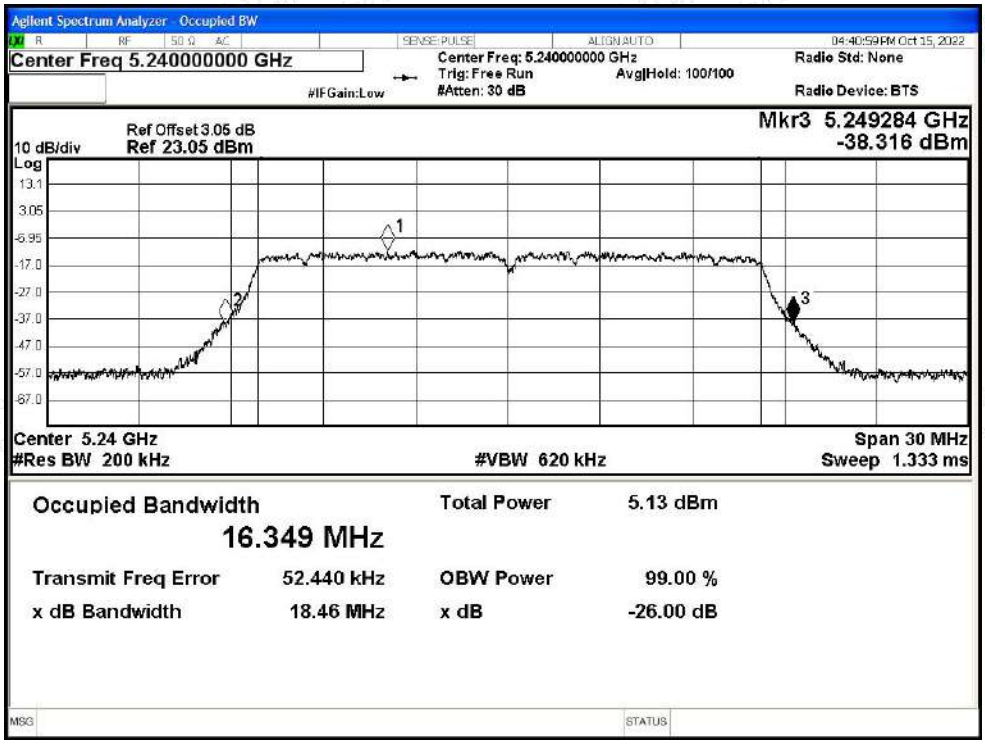

-26dB Bandwidth NVNT n20 5180MHz Ant0

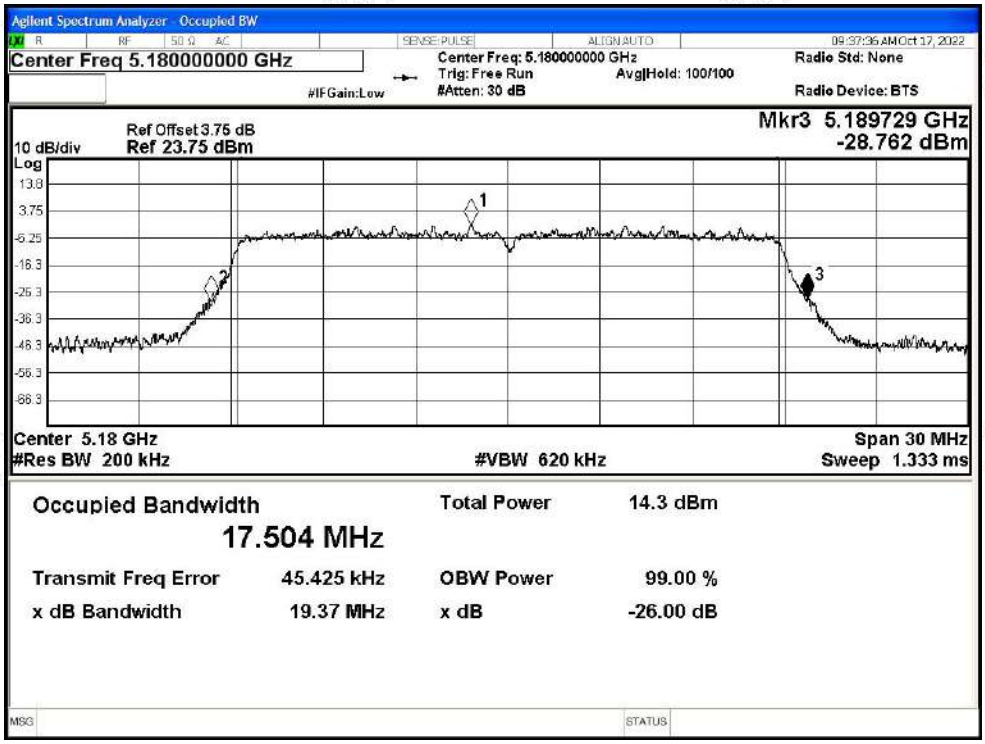

-26dB Bandwidth NVNT n20 5200MHz Ant0

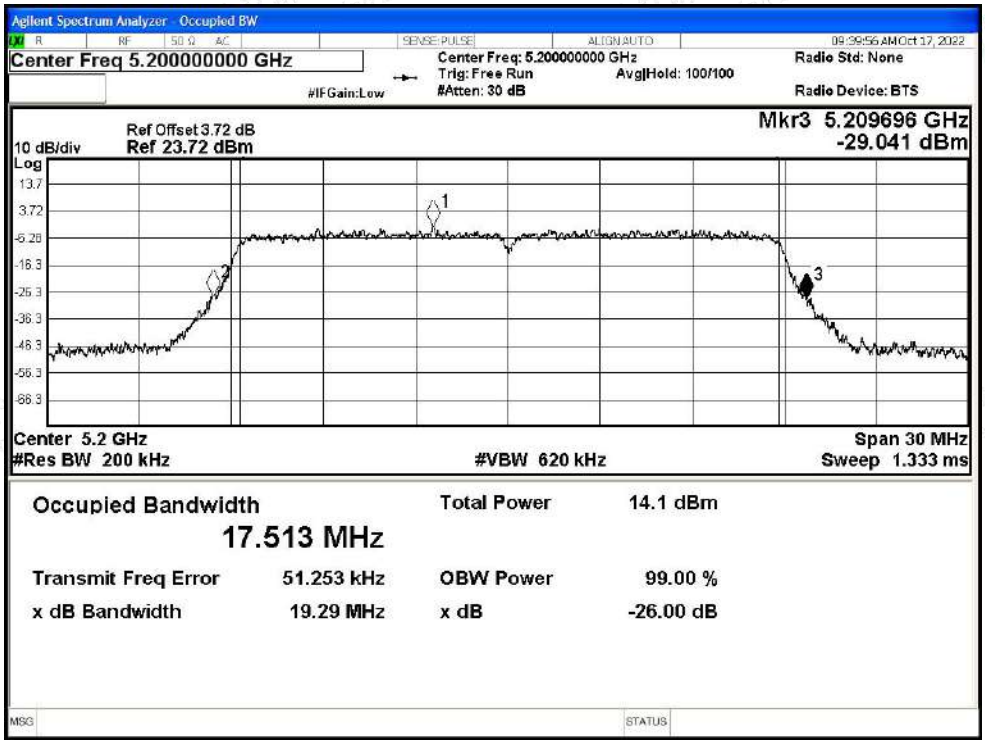

-26dB Bandwidth NVNT n20 5240MHz Ant0

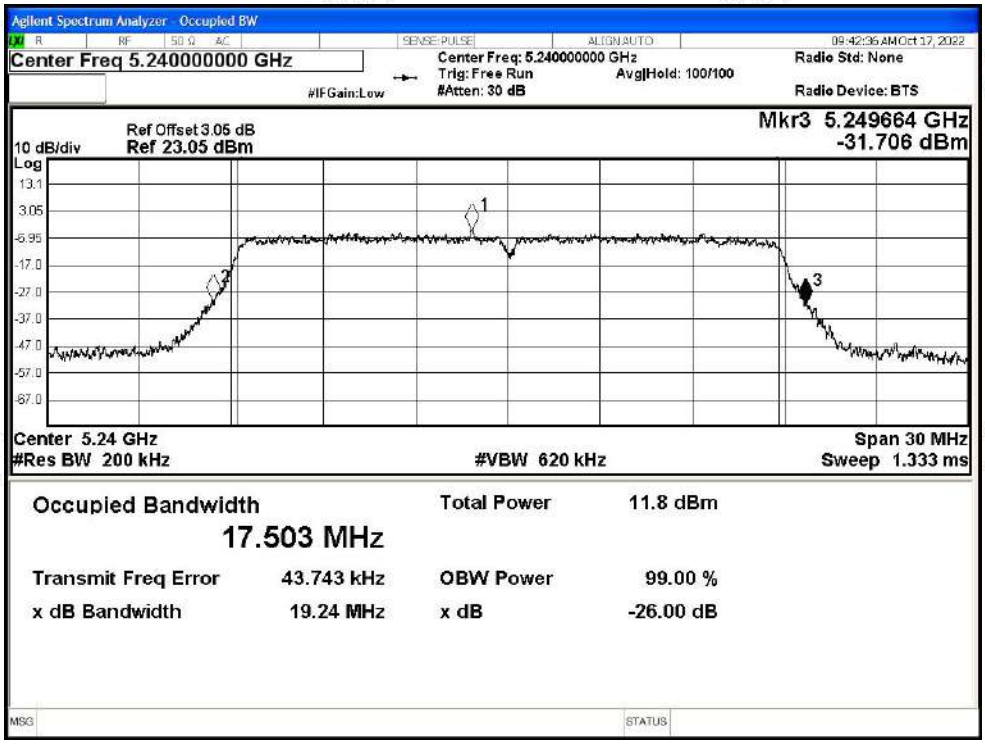

-26dB Bandwidth NVNT n40 5190MHz Ant0

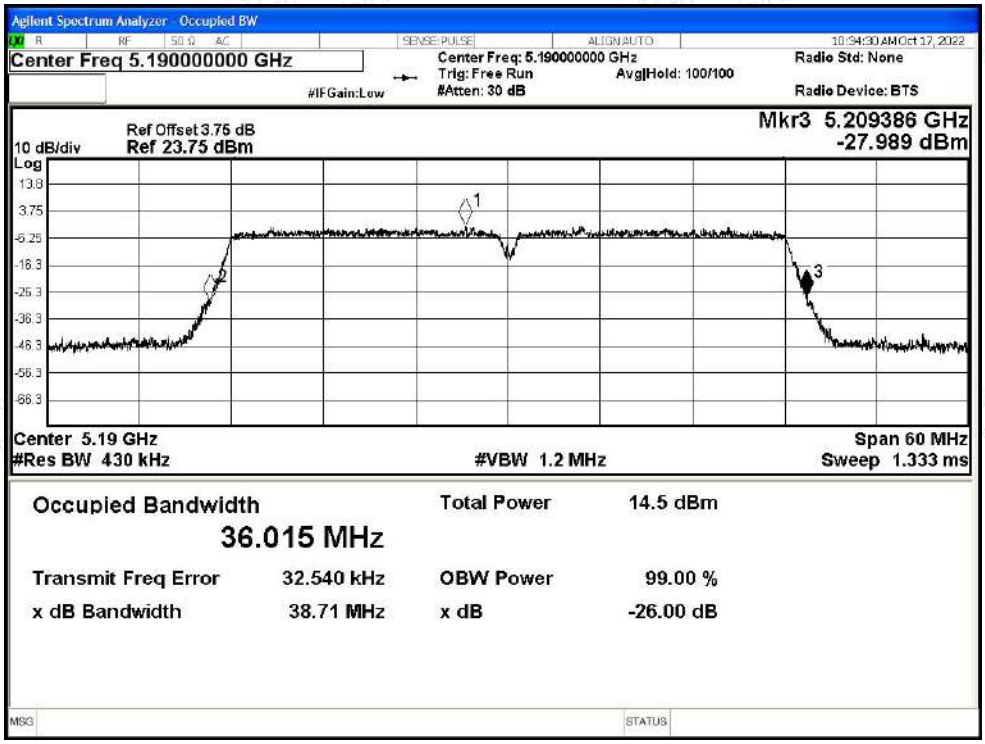

-26dB Bandwidth NVNT n40 5230MHz Ant0

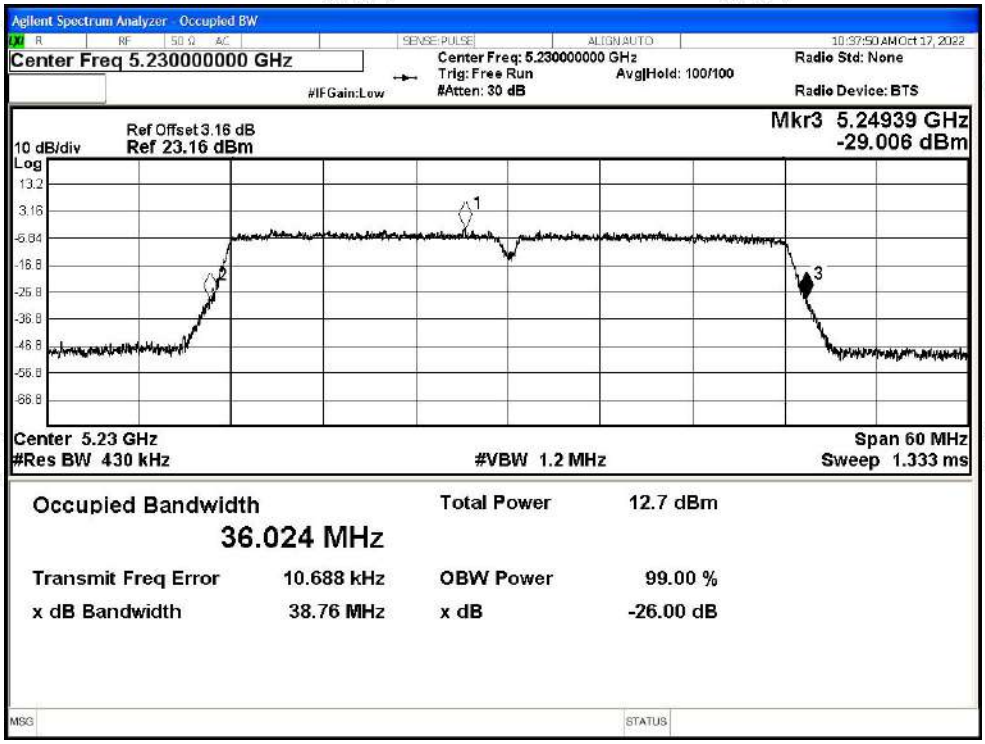

-26dB Bandwidth NVNT ac20 5180MHz Ant0

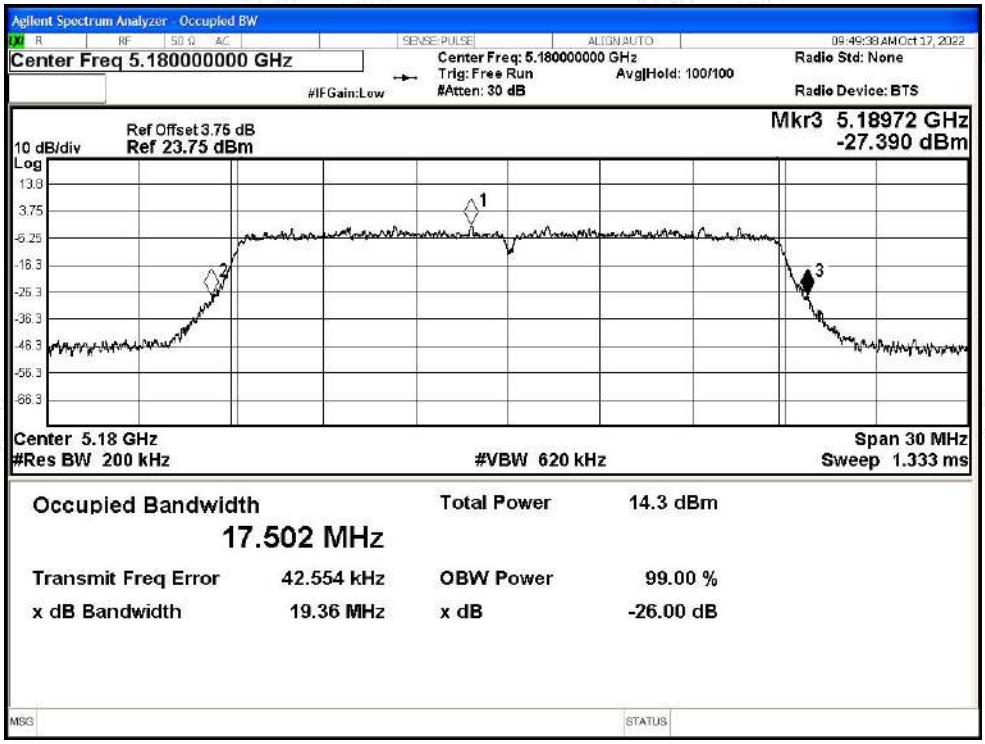

-26dB Bandwidth NVNT ac20 5200MHz Ant0

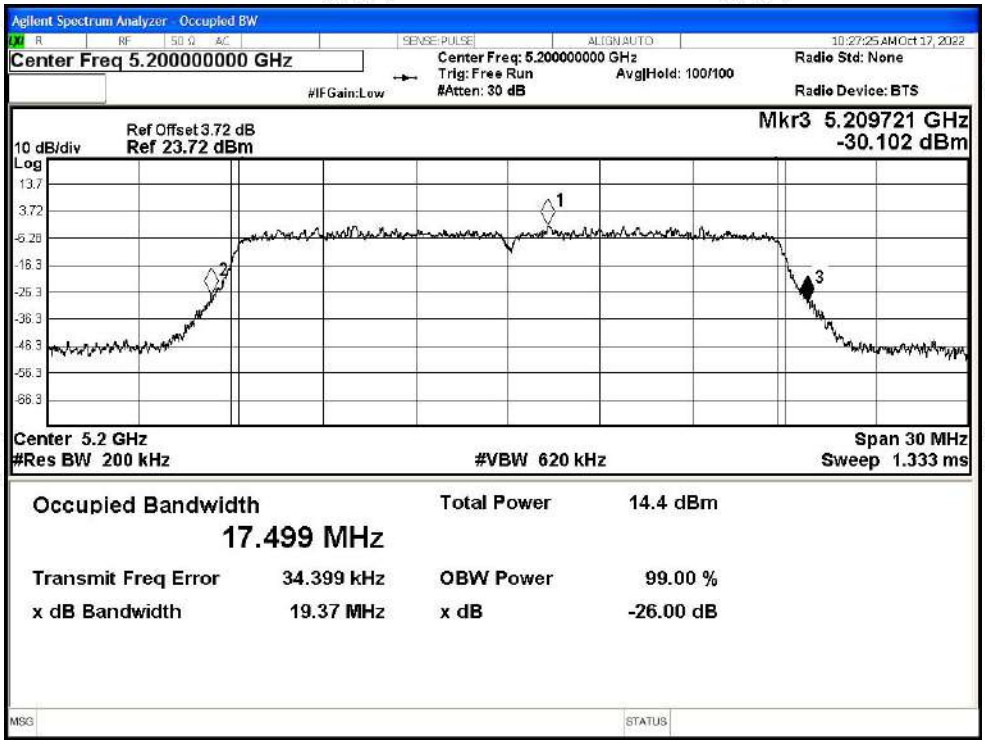

-26dB Bandwidth NVNT ac20 5240MHz Ant0

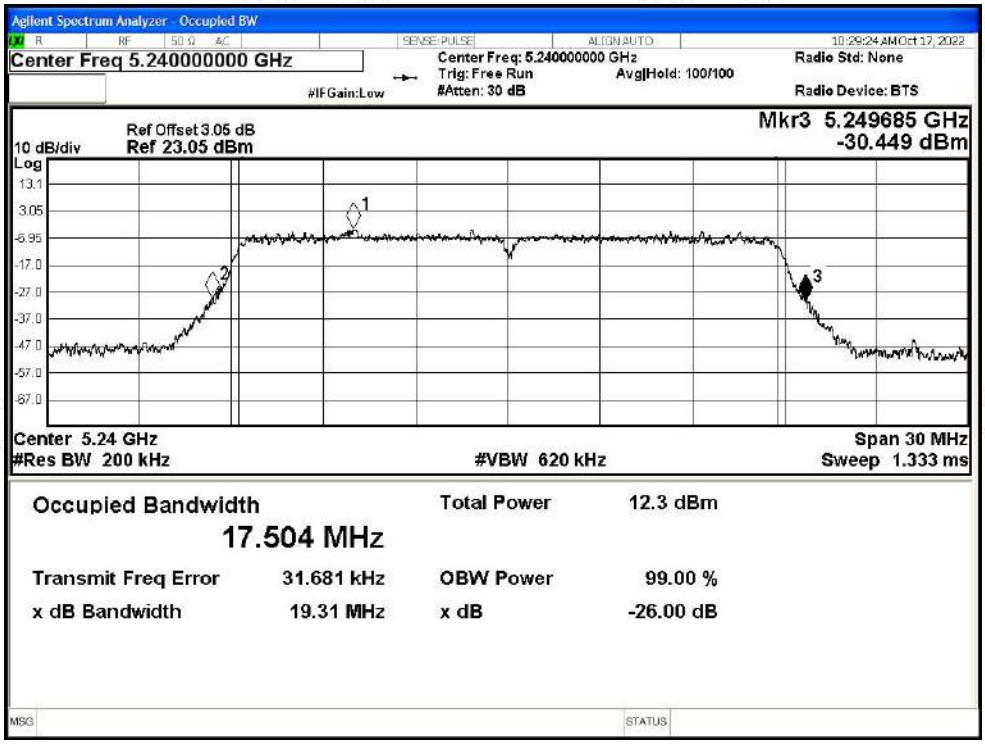

-26dB Bandwidth NVNT ac40 5190MHz Ant0

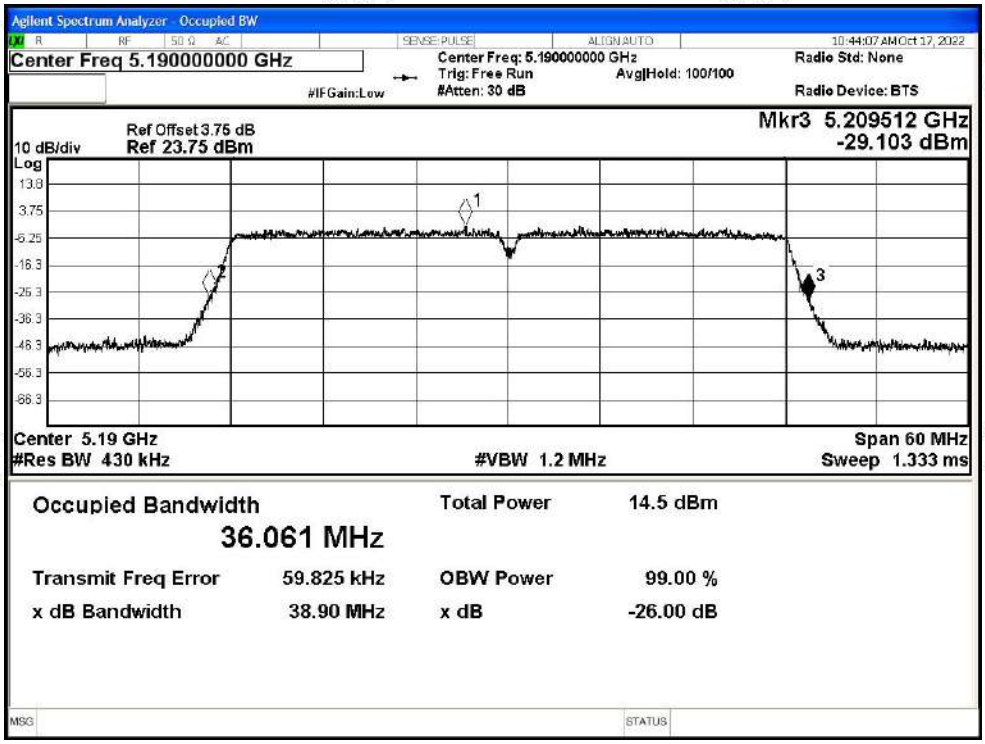

-26dB Bandwidth NVNT ac40 5230MHz Ant0

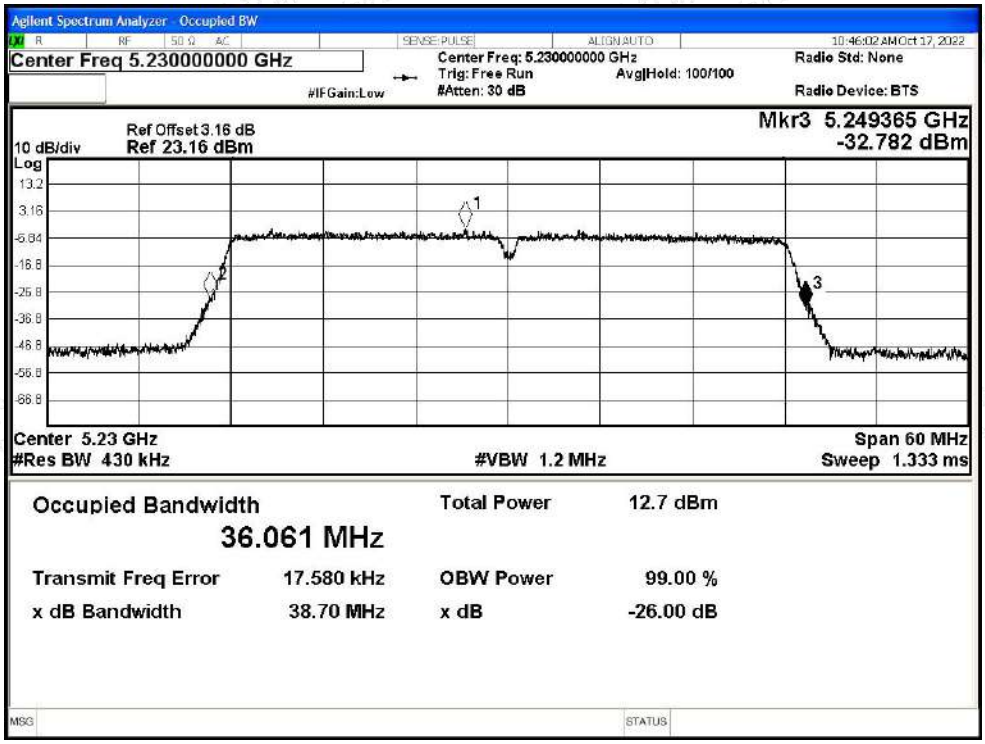

-26dB Bandwidth NVNT ac80 5210MHz Ant0

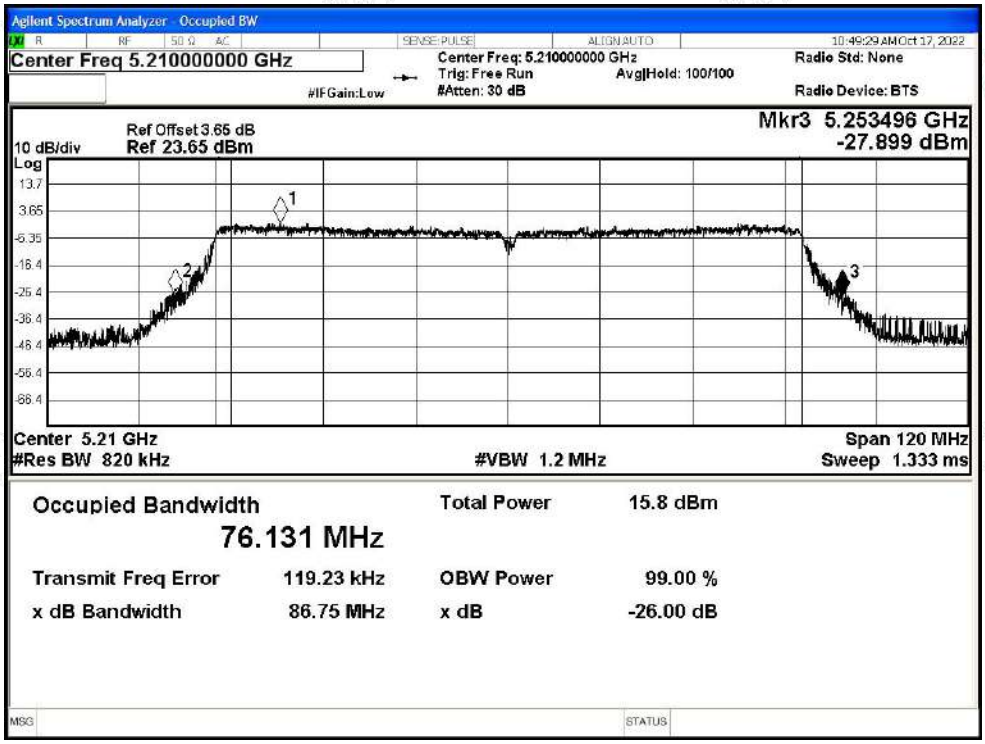

-26dB Bandwidth NVNT ax20 5180MHz Ant0

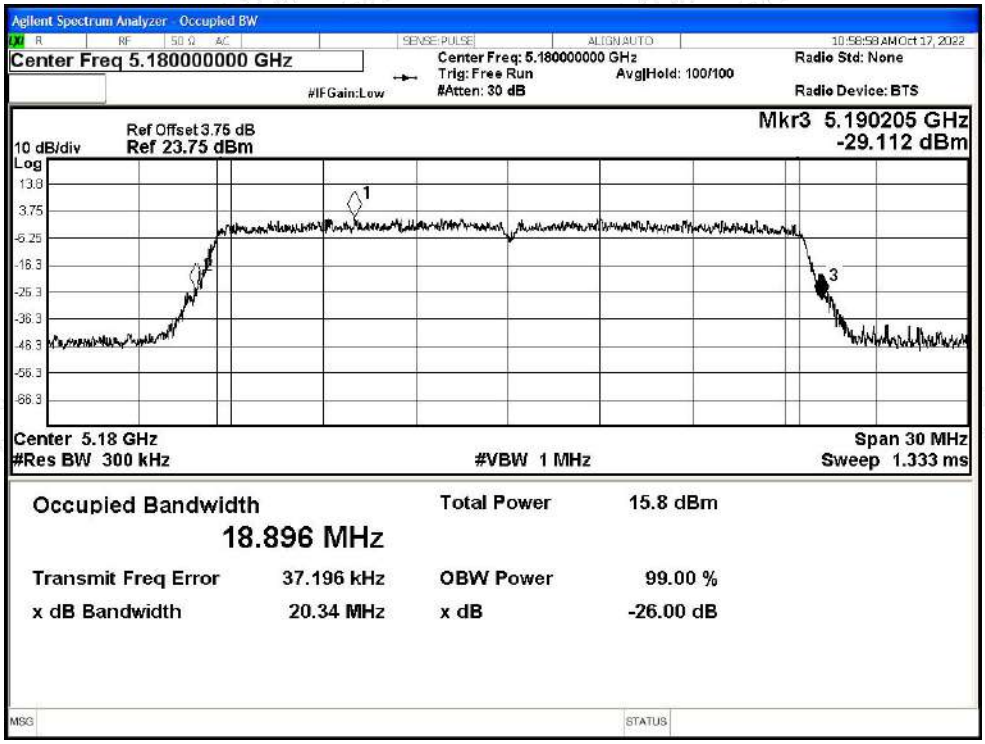

-26dB Bandwidth NVNT ax20 5200MHz Ant0

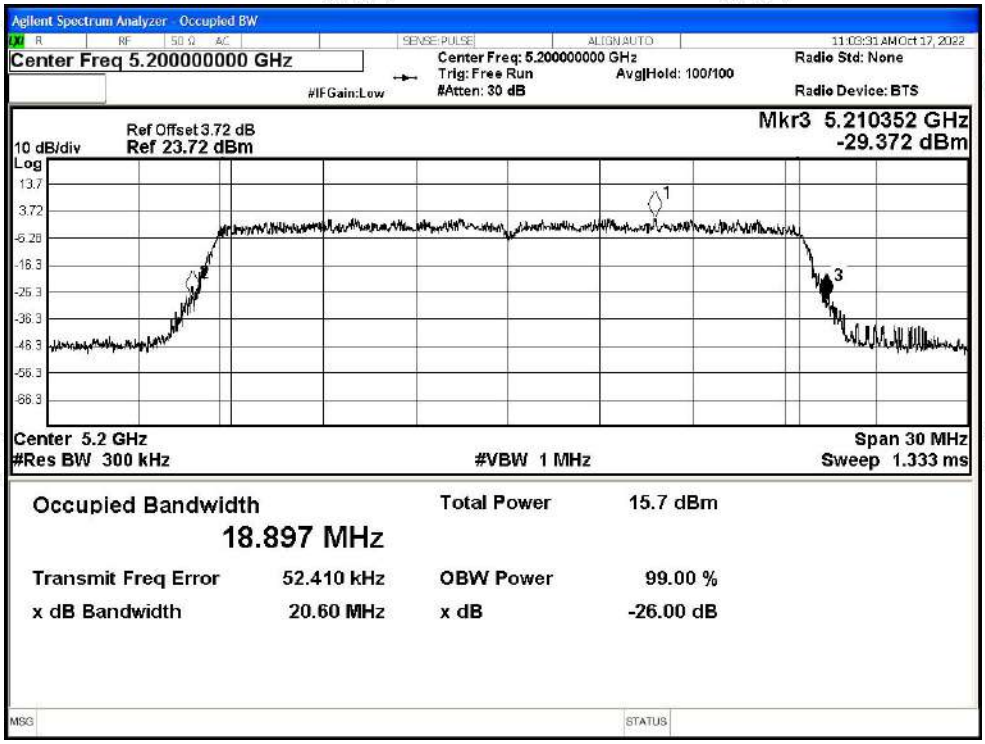

-26dB Bandwidth NVNT ax20 5240MHz Ant0

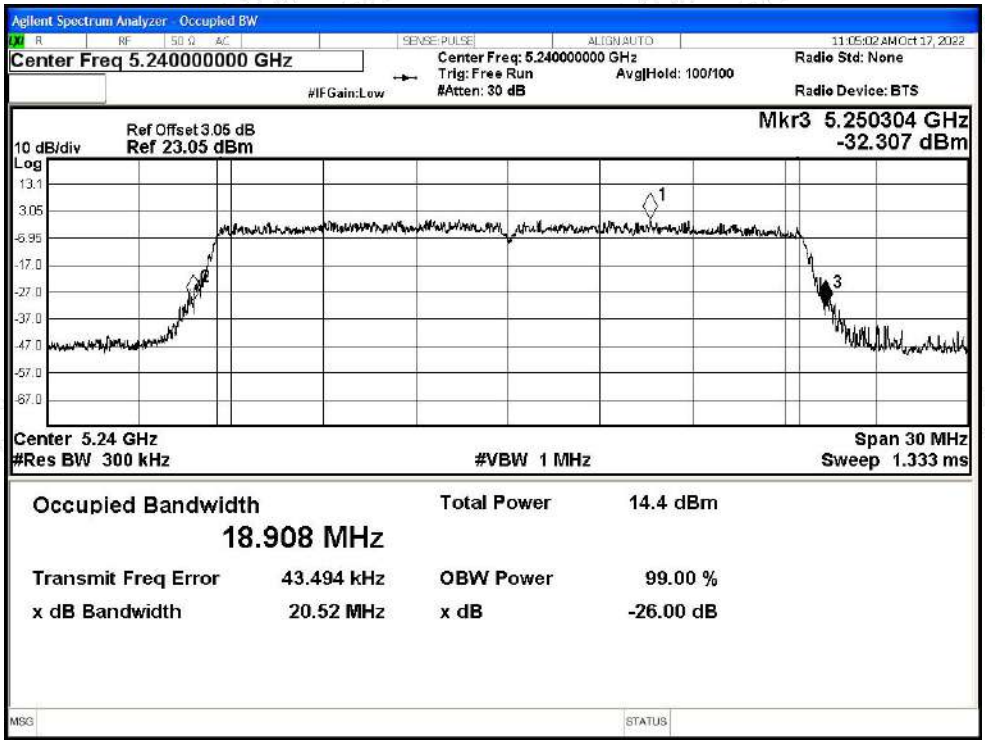

-26dB Bandwidth NVNT ax40 5190MHz Ant0

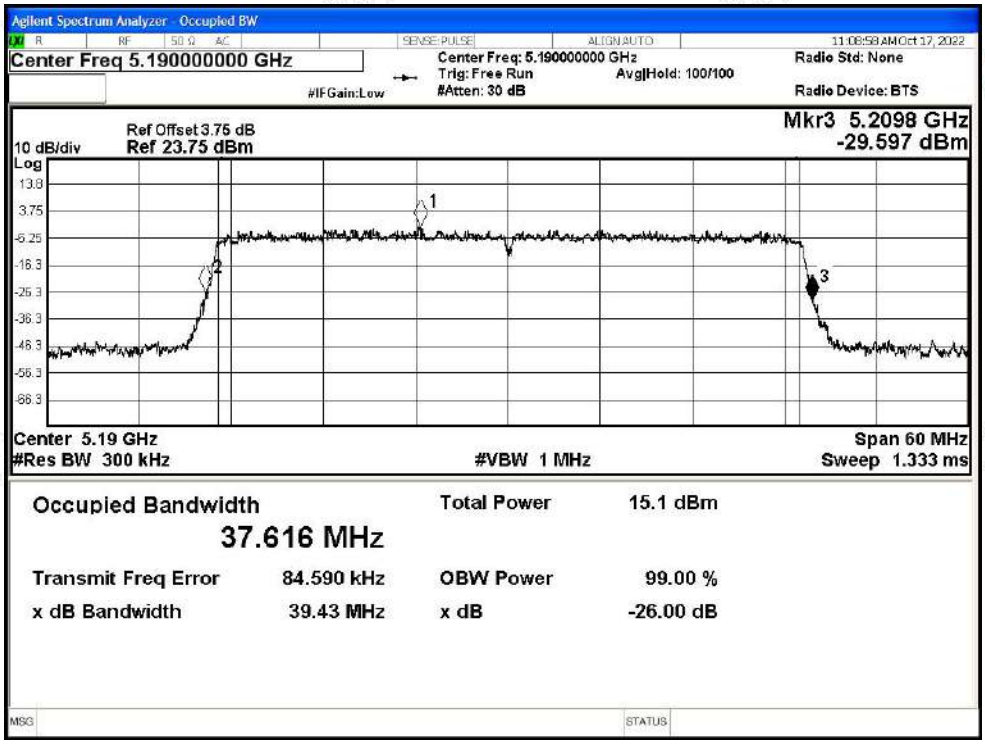

-26dB Bandwidth NVNT ax40 5230MHz Ant0

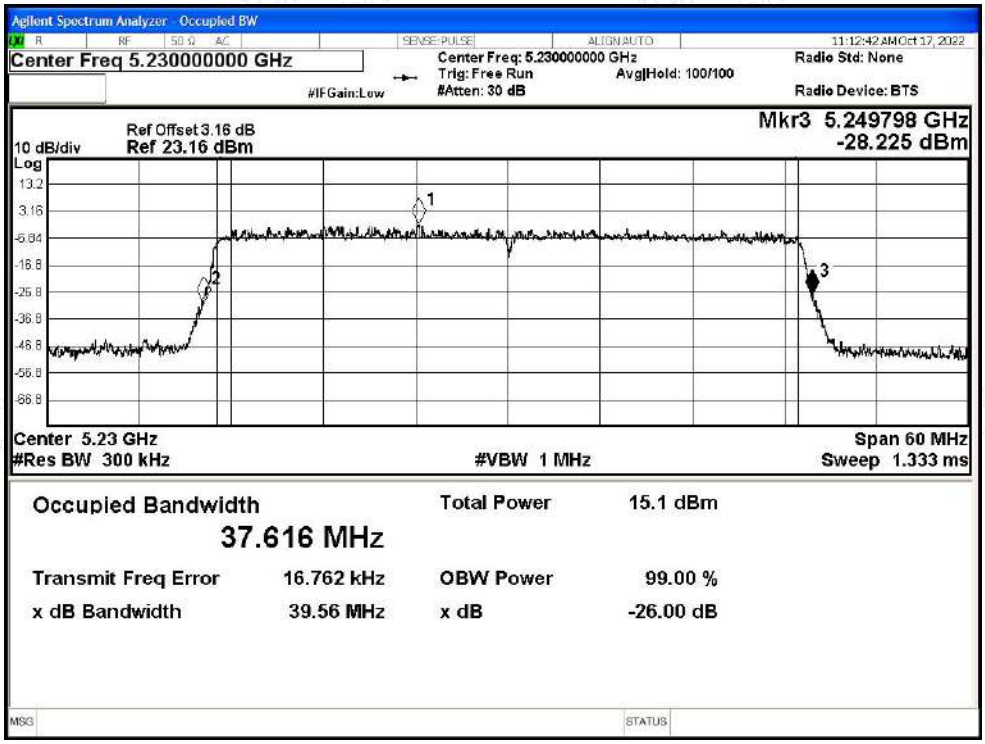

-26dB Bandwidth NVNT ax80 5210MHz Ant0

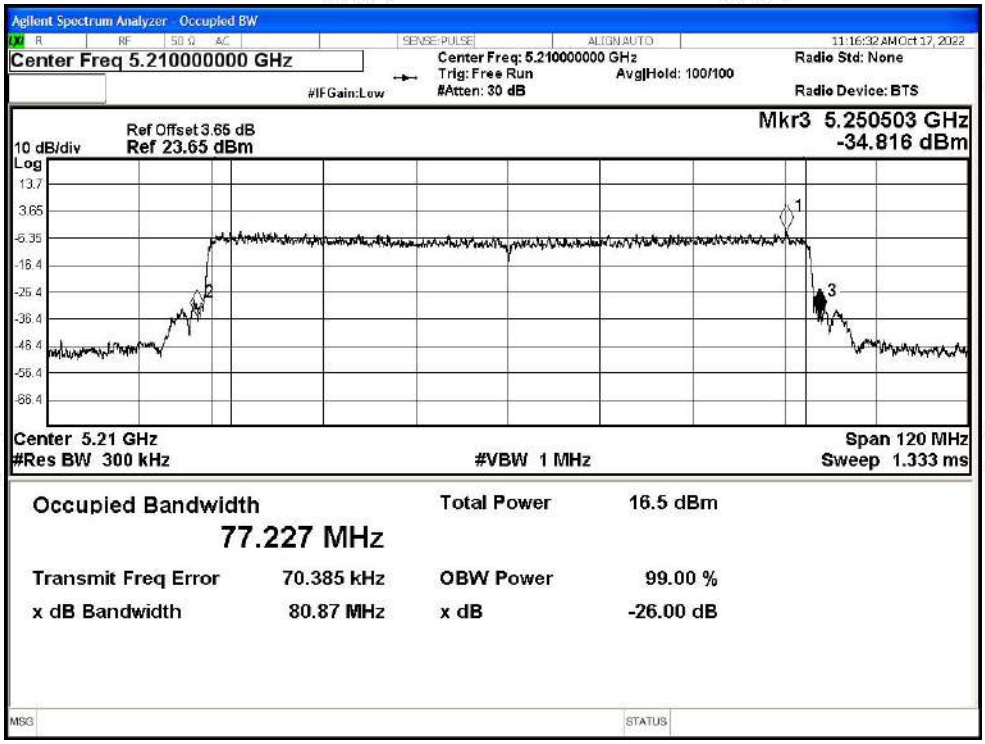

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	18.482	---	Pass
NVNT	a	5200	Ant1	18.428	---	Pass
NVNT	a	5240	Ant1	18.396	---	Pass
NVNT	n20	5180	Ant1	18.192	---	Pass
NVNT	n20	5200	Ant1	18.313	---	Pass
NVNT	n20	5240	Ant1	18.29	---	Pass
NVNT	n40	5190	Ant1	38.799	---	Pass
NVNT	n40	5230	Ant1	38.892	---	Pass
NVNT	ac20	5180	Ant1	18.32	---	Pass
NVNT	ac20	5200	Ant1	18.486	---	Pass
NVNT	ac20	5240	Ant1	18.376	---	Pass
NVNT	ac40	5190	Ant1	38.69	---	Pass
NVNT	ac40	5230	Ant1	38.873	---	Pass
NVNT	ac80	5210	Ant1	86.494	---	Pass
NVNT	ax20	5180	Ant1	18.65	---	Pass
NVNT	ax20	5200	Ant1	18.731	---	Pass
NVNT	ax20	5240	Ant1	18.629	---	Pass
NVNT	ax40	5190	Ant1	39.544	---	Pass
NVNT	ax40	5230	Ant1	39.507	---	Pass
NVNT	ax80	5210	Ant1	80.639	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

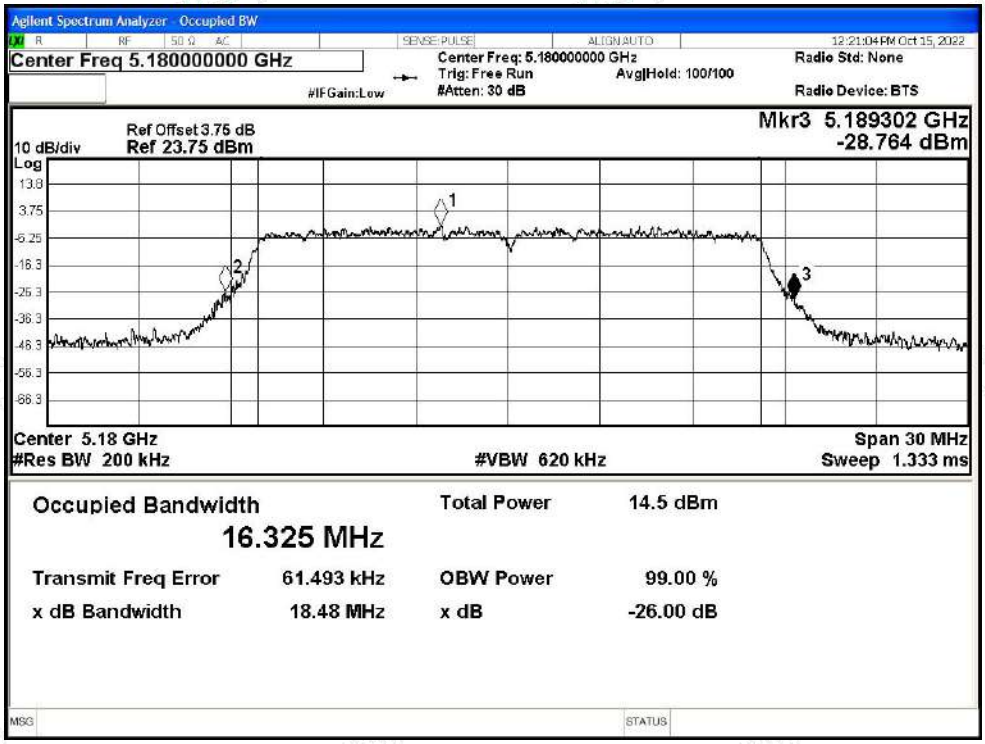

-26dB Bandwidth NVNT a 5200MHz Ant1

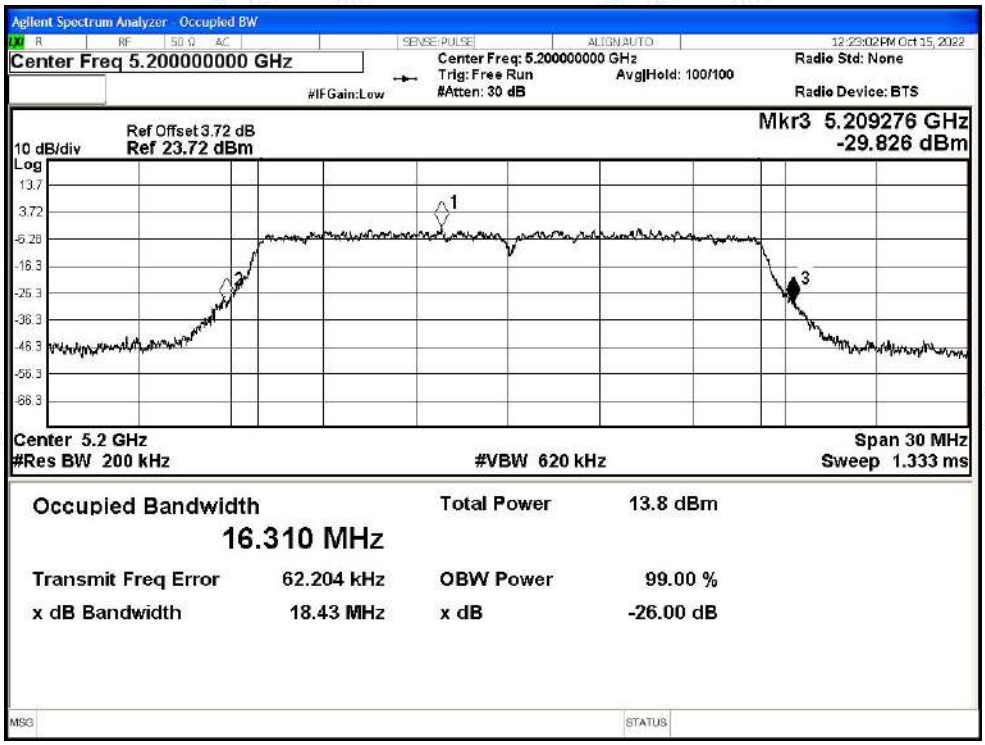

-26dB Bandwidth NVNT a 5240MHz Ant1

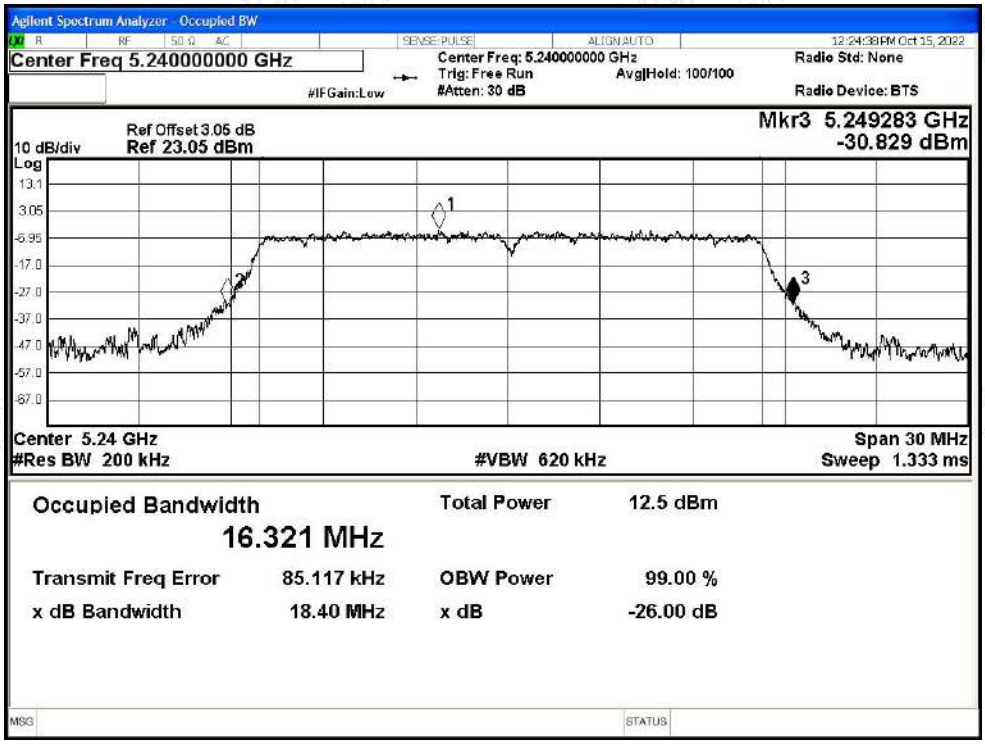

-26dB Bandwidth NVNT n20 5180MHz Ant1

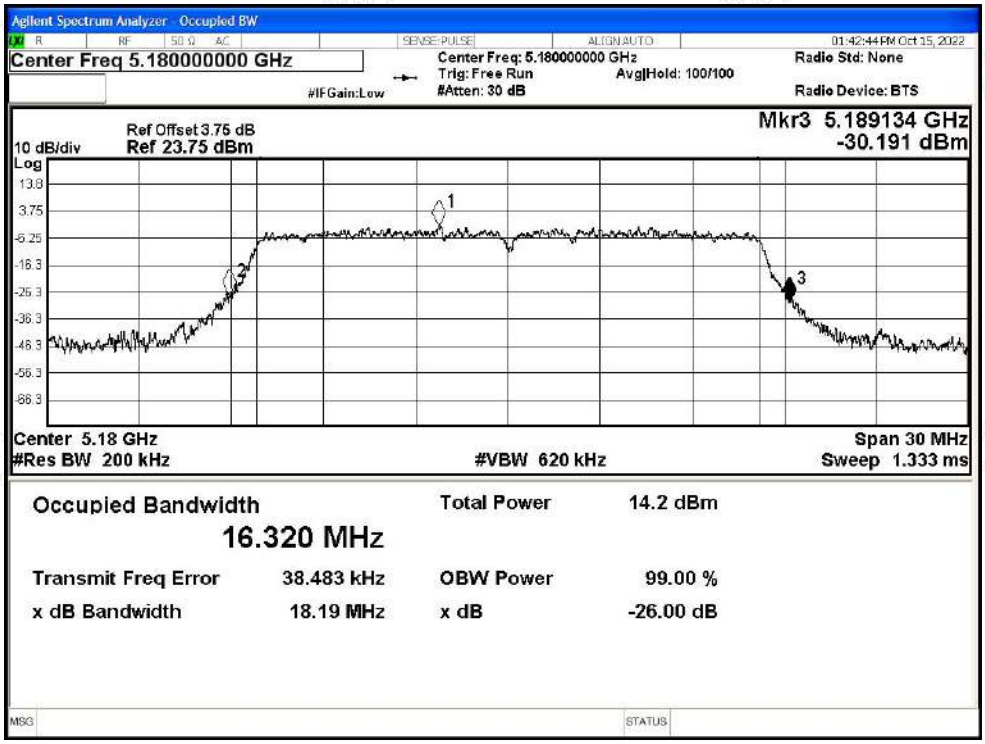

-26dB Bandwidth NVNT n20 5200MHz Ant1

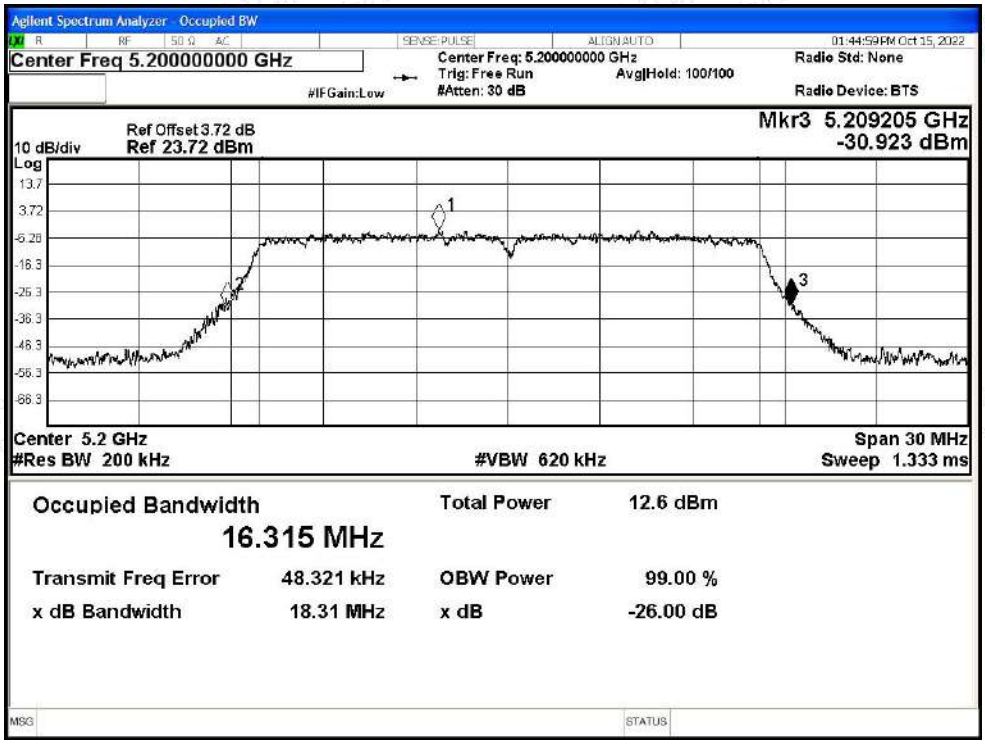

-26dB Bandwidth NVNT n20 5240MHz Ant1

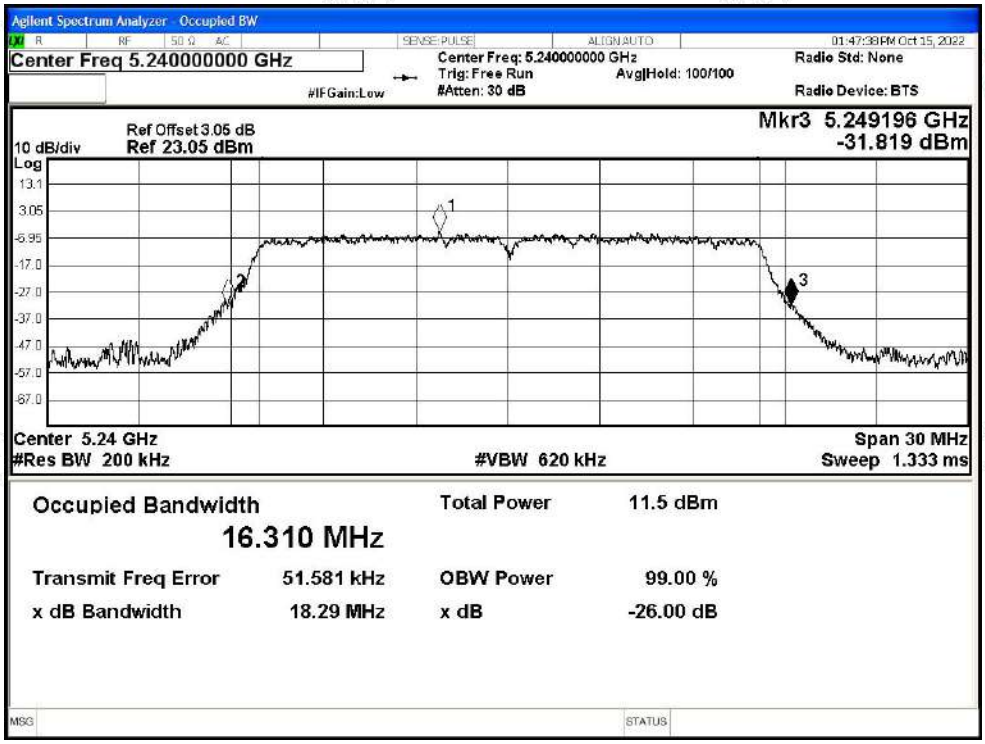

-26dB Bandwidth NVNT n40 5190MHz Ant1

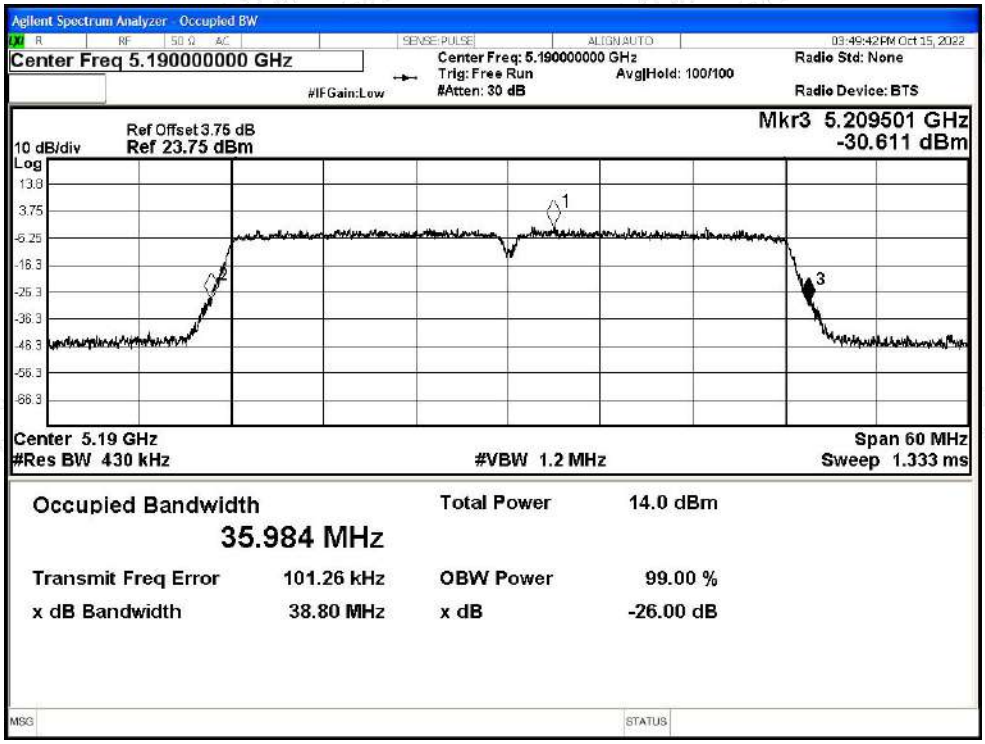

-26dB Bandwidth NVNT n40 5230MHz Ant1

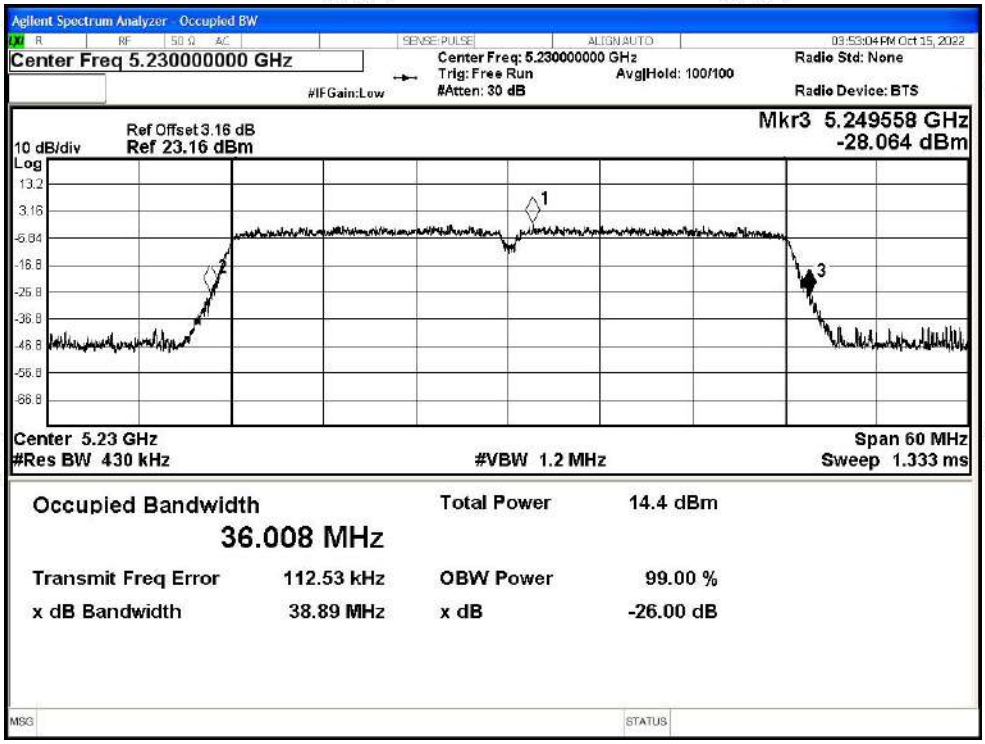

-26dB Bandwidth NVNT ac20 5180MHz Ant1

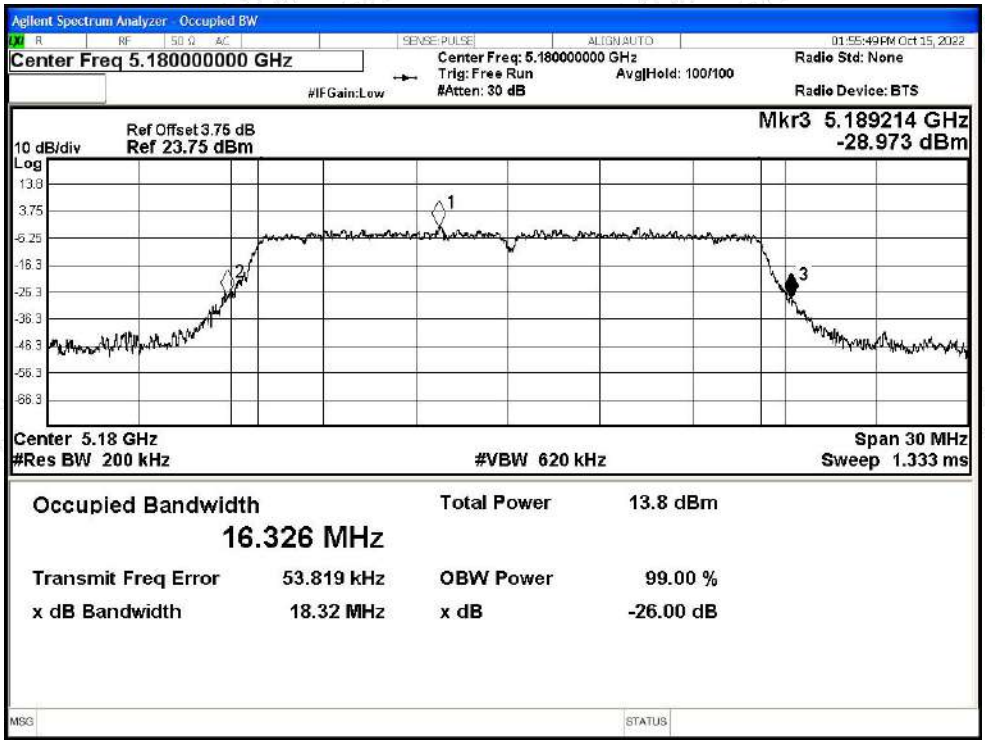

-26dB Bandwidth NVNT ac20 5200MHz Ant1

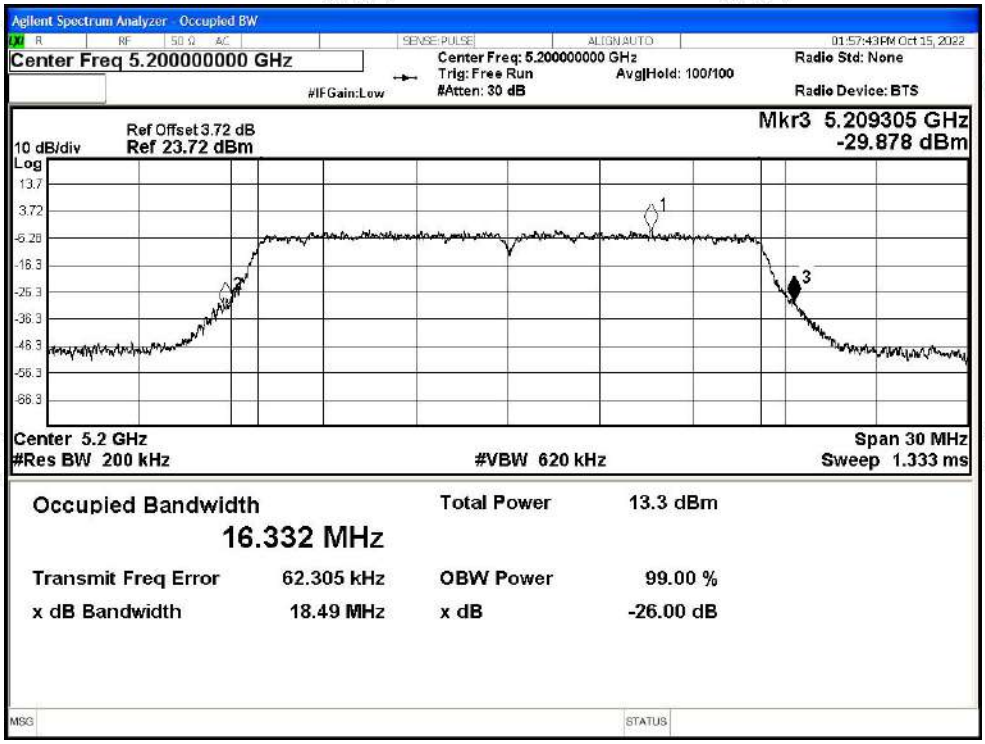

-26dB Bandwidth NVNT ac20 5240MHz Ant1

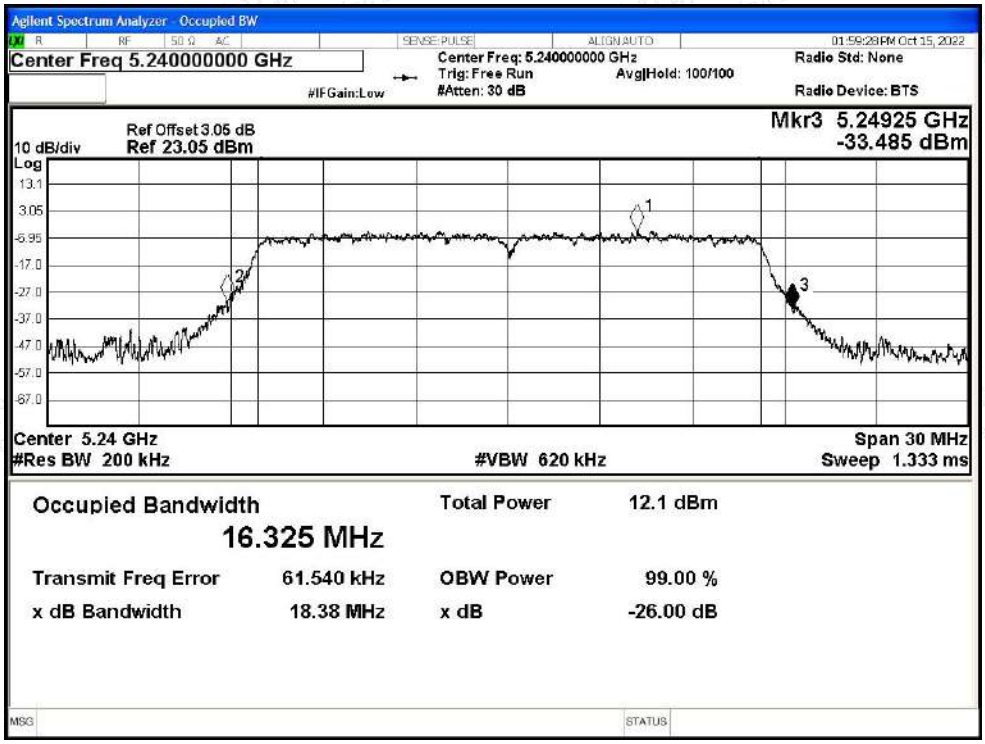

-26dB Bandwidth NVNT ac40 5190MHz Ant1

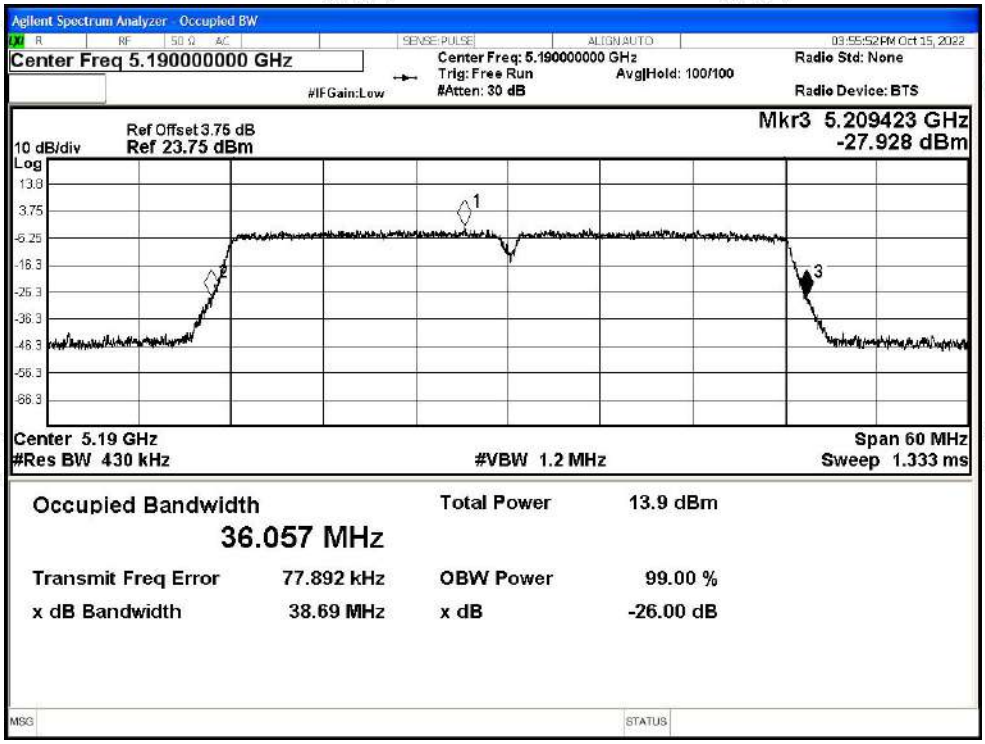

-26dB Bandwidth NVNT ac40 5230MHz Ant1

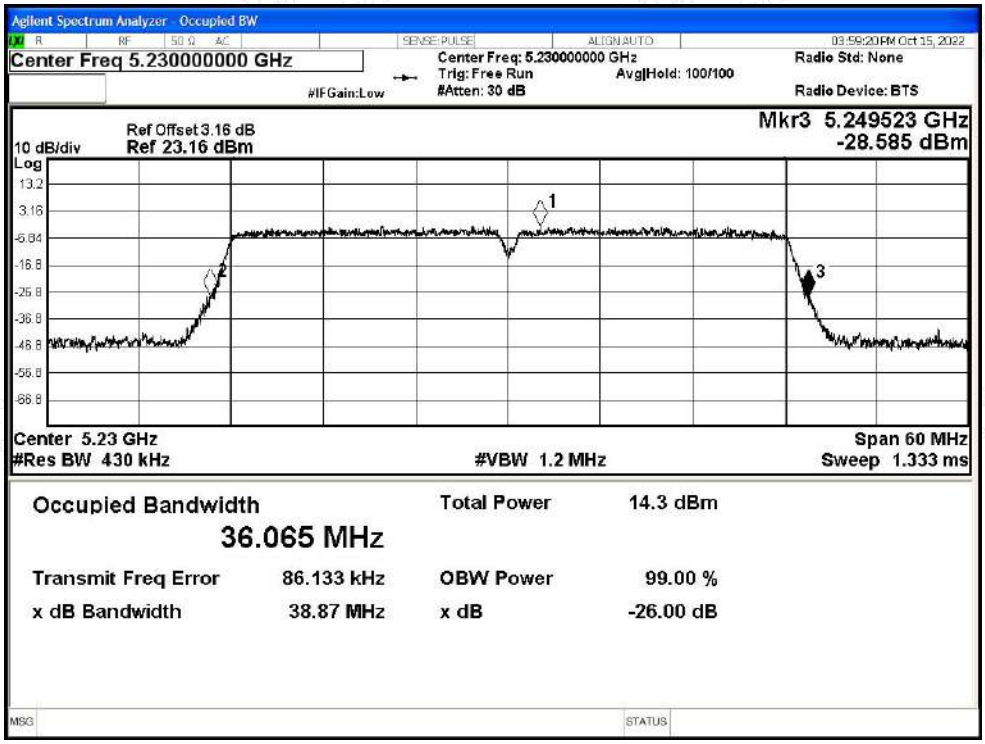

-26dB Bandwidth NVNT ac80 5210MHz Ant1

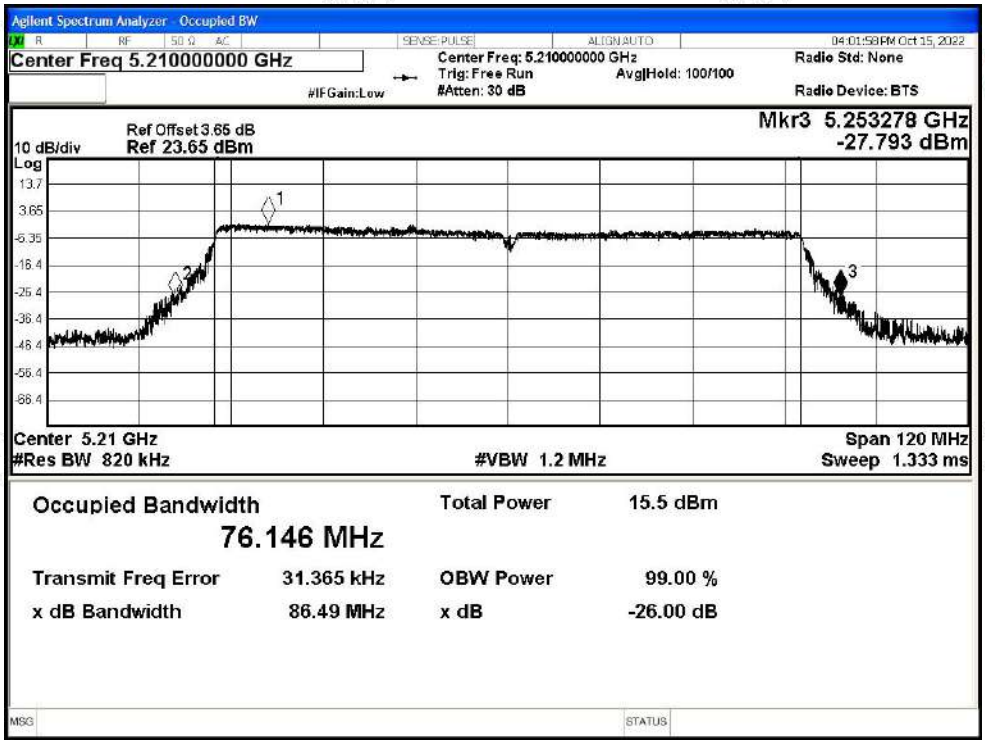

-26dB Bandwidth NVNT ax20 5180MHz Ant1

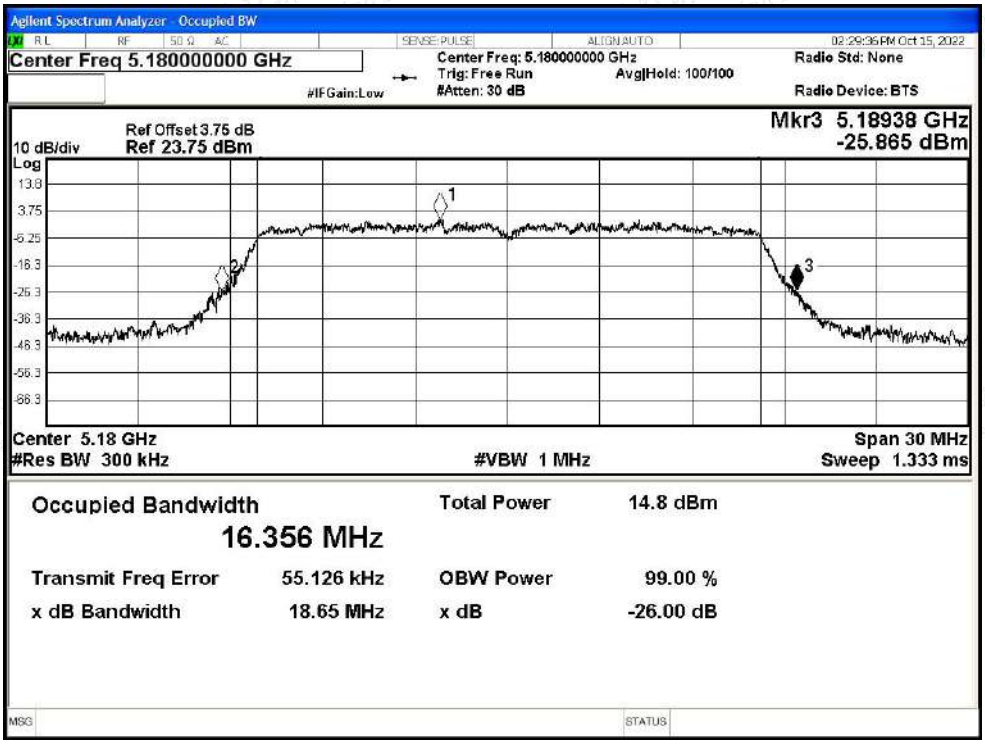

-26dB Bandwidth NVNT ax20 5200MHz Ant1

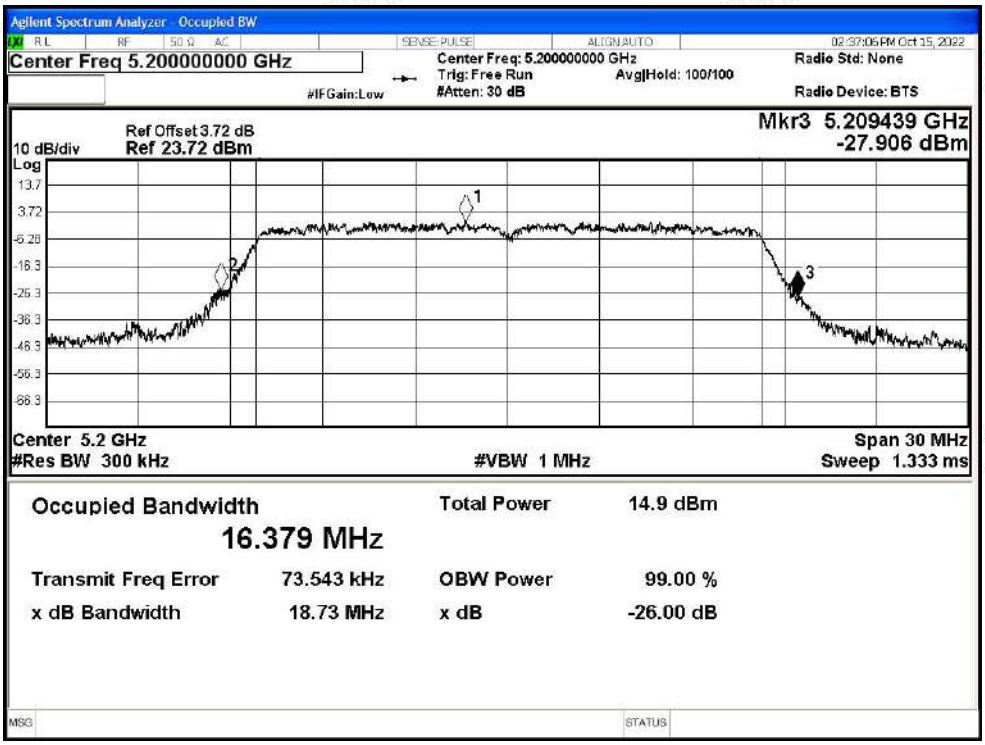

-26dB Bandwidth NVNT ax20 5240MHz Ant1

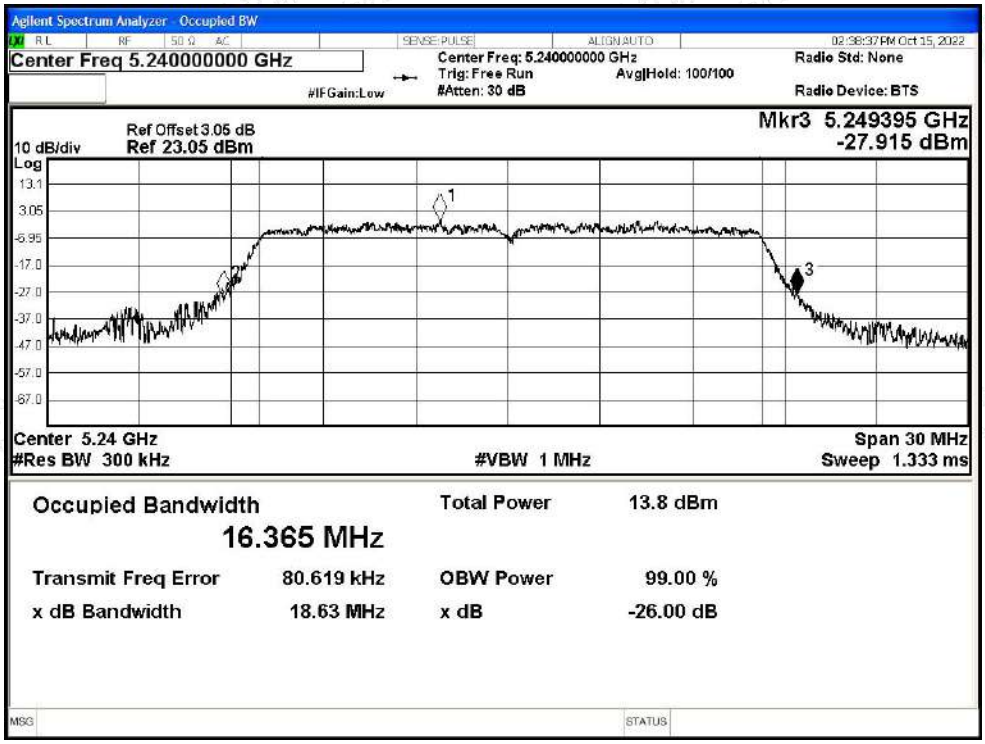

-26dB Bandwidth NVNT ax40 5190MHz Ant1

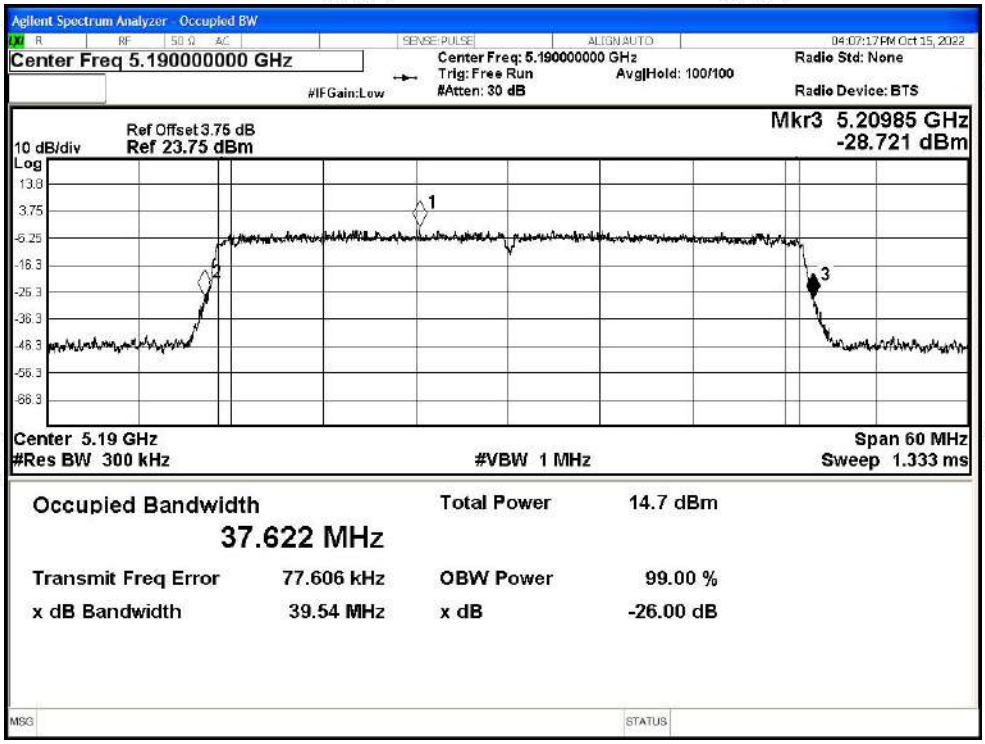

-26dB Bandwidth NVNT ax40 5230MHz Ant1

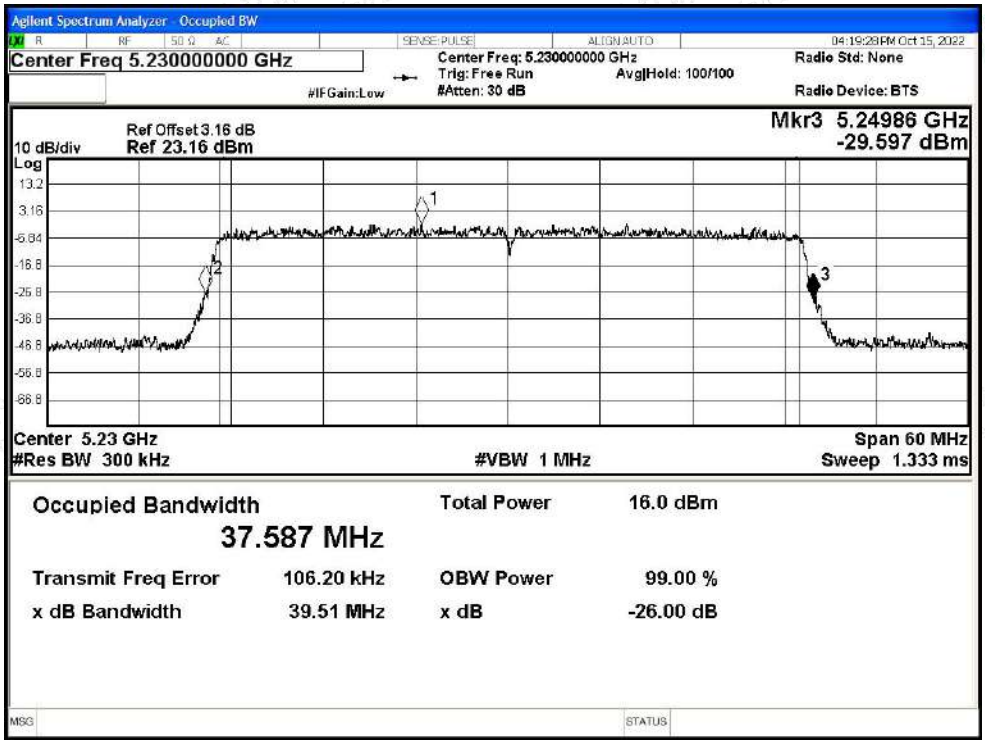

-26dB Bandwidth NVNT ax80 5210MHz Ant1

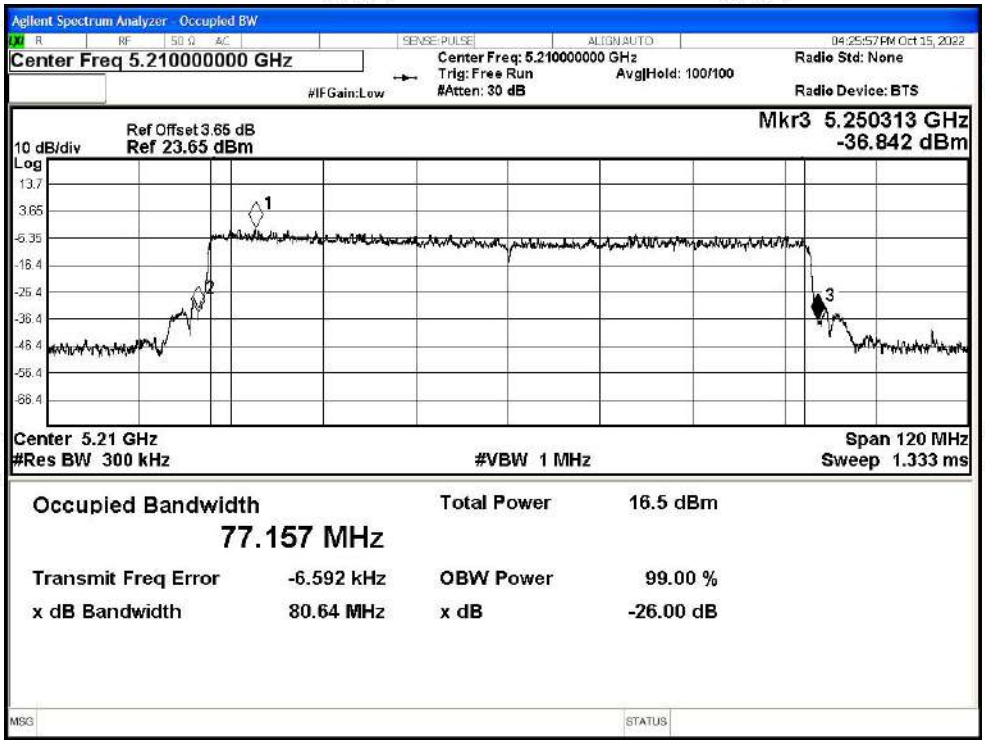

D.2 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant0	16.337
NVNT	a	5200	Ant0	16.353
NVNT	a	5240	Ant0	16.338
NVNT	n20	5180	Ant0	17.505
NVNT	n20	5200	Ant0	17.511
NVNT	n20	5240	Ant0	17.509
NVNT	n40	5190	Ant0	36.05
NVNT	n40	5230	Ant0	36.04
NVNT	ac20	5180	Ant0	17.499
NVNT	ac20	5200	Ant0	17.497
NVNT	ac20	5240	Ant0	17.504
NVNT	ac40	5190	Ant0	36.069
NVNT	ac40	5230	Ant0	36.039
NVNT	ac80	5210	Ant0	76.156
NVNT	ax20	5180	Ant0	18.89
NVNT	ax20	5200	Ant0	18.904
NVNT	ax20	5240	Ant0	18.884
NVNT	ax40	5190	Ant0	37.66
NVNT	ax40	5230	Ant0	37.614
NVNT	ax80	5210	Ant0	77.34

Test Graphs

OBW NVNT a 5180MHz Ant0

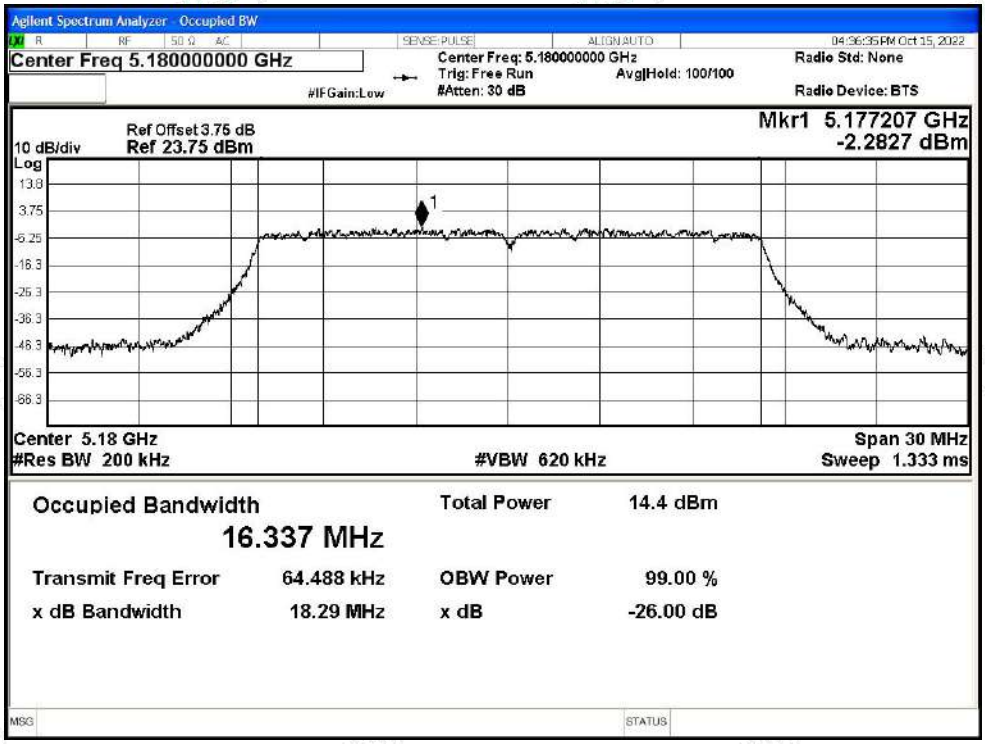

OBW NVNT a 5200MHz Ant0

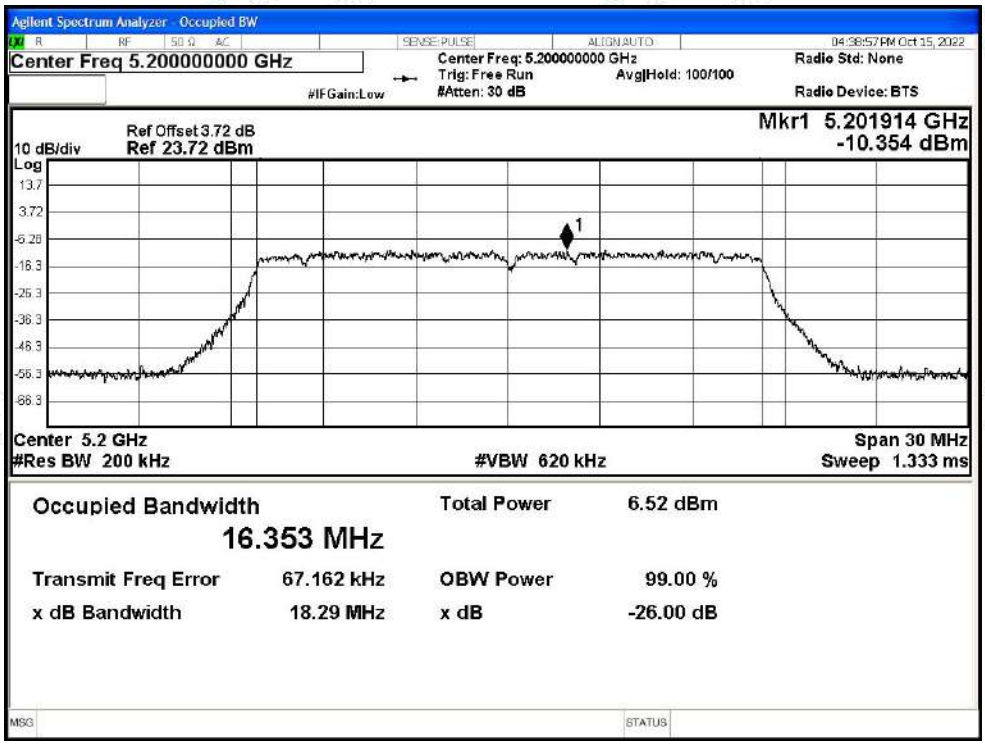

OBW NVNT a 5240MHz Ant0

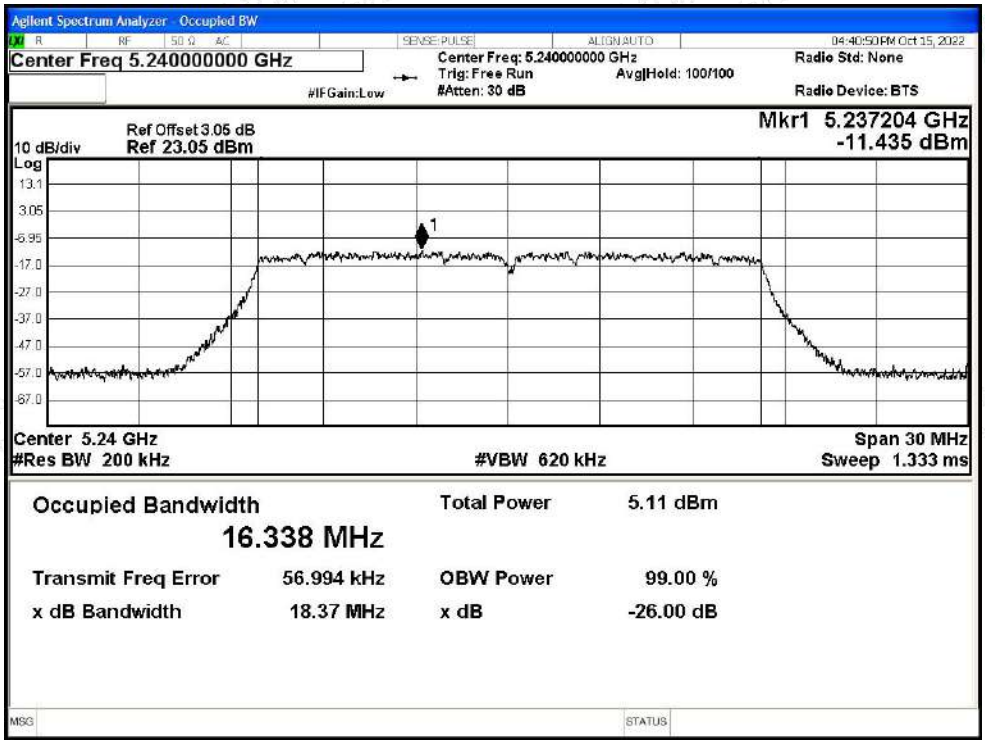

OBW NVNT n20 5180MHz Ant0

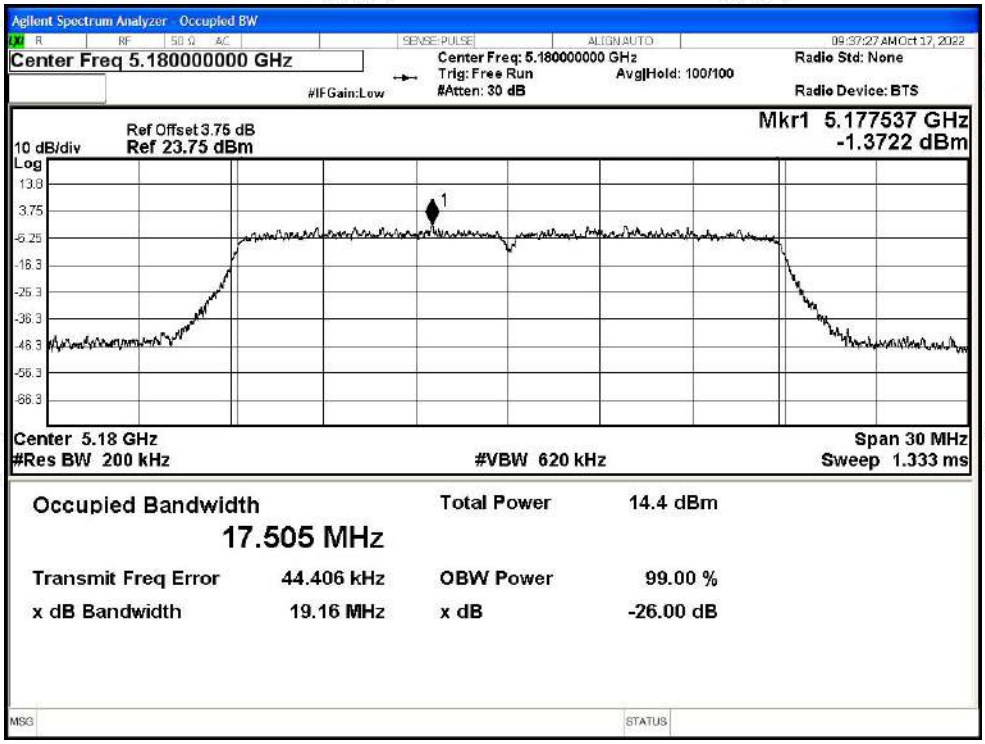

OBW NVNT n20 5200MHz Ant0

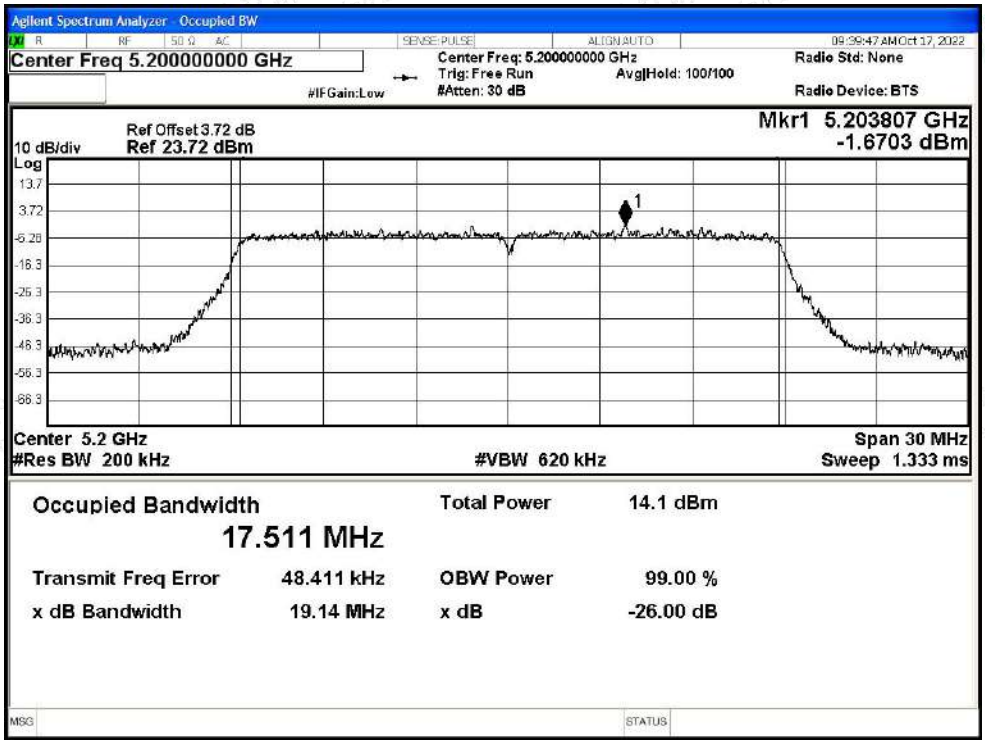

OBW NVNT n20 5240MHz Ant0

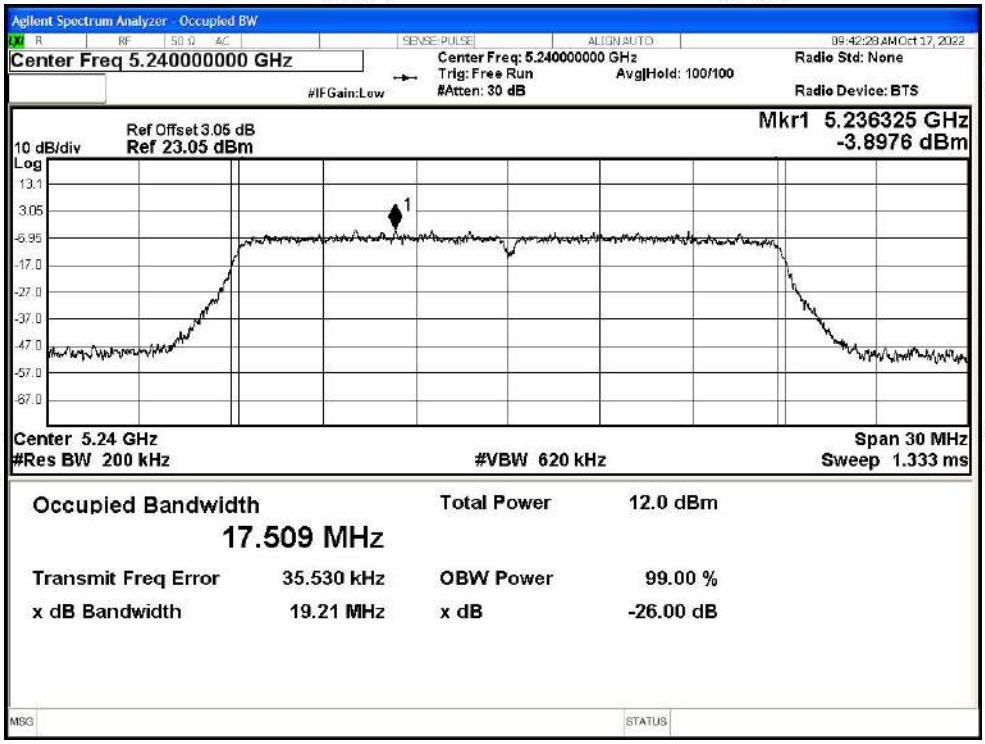

OBW NVNT n40 5190MHz Ant0

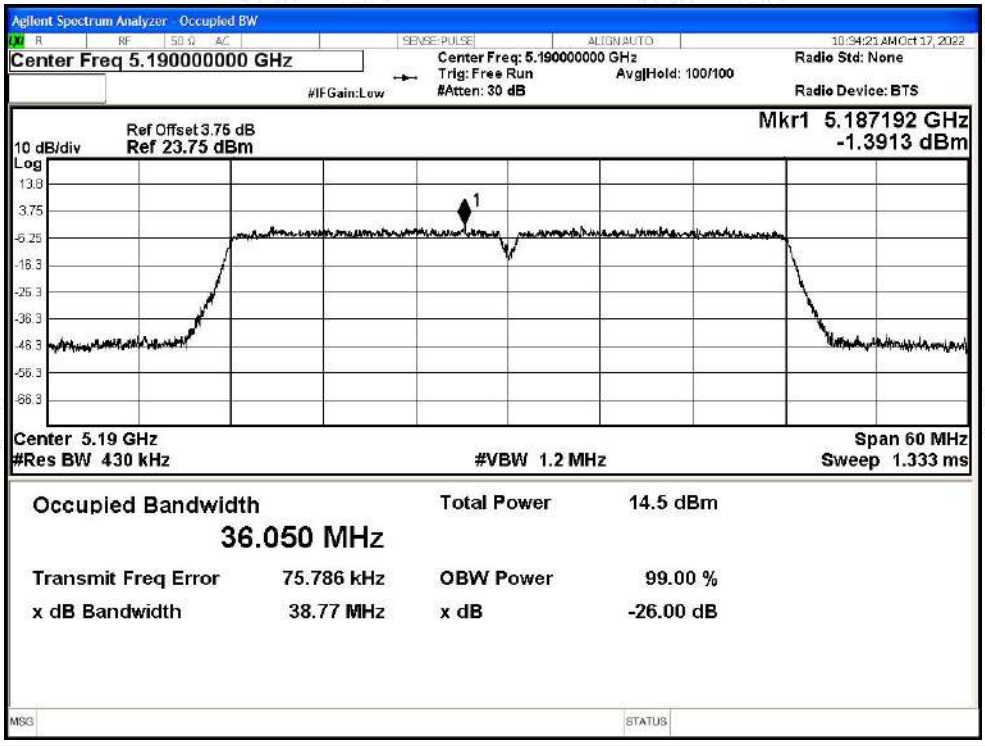

OBW NVNT n40 5230MHz Ant0

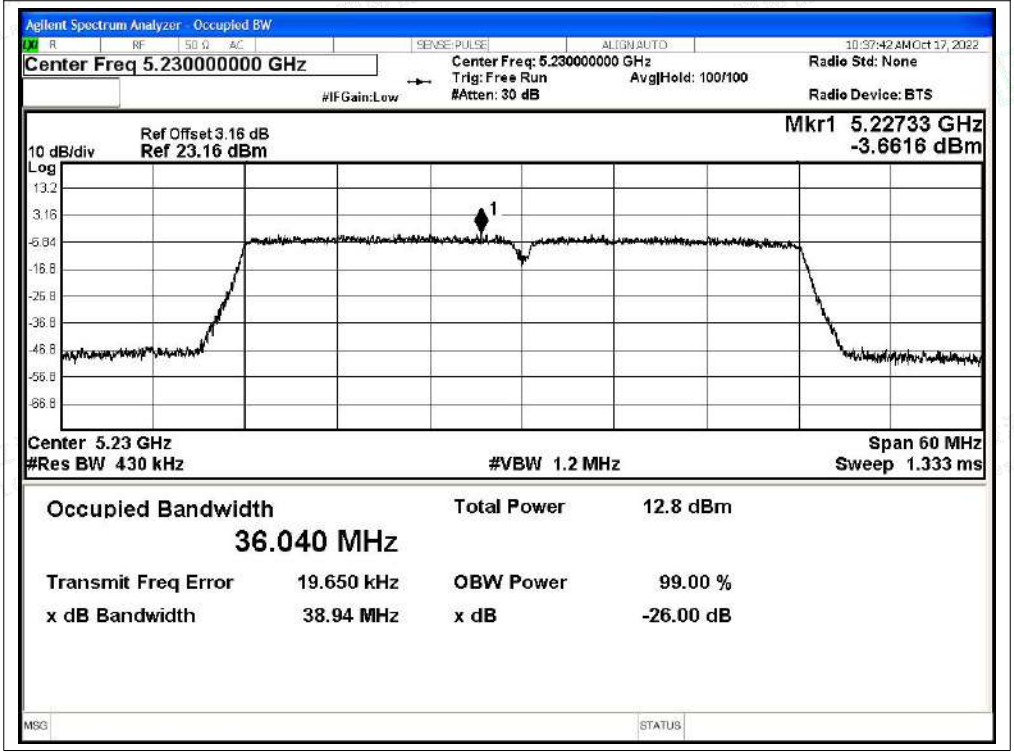

OBW NVNT ac20 5180MHz Ant0

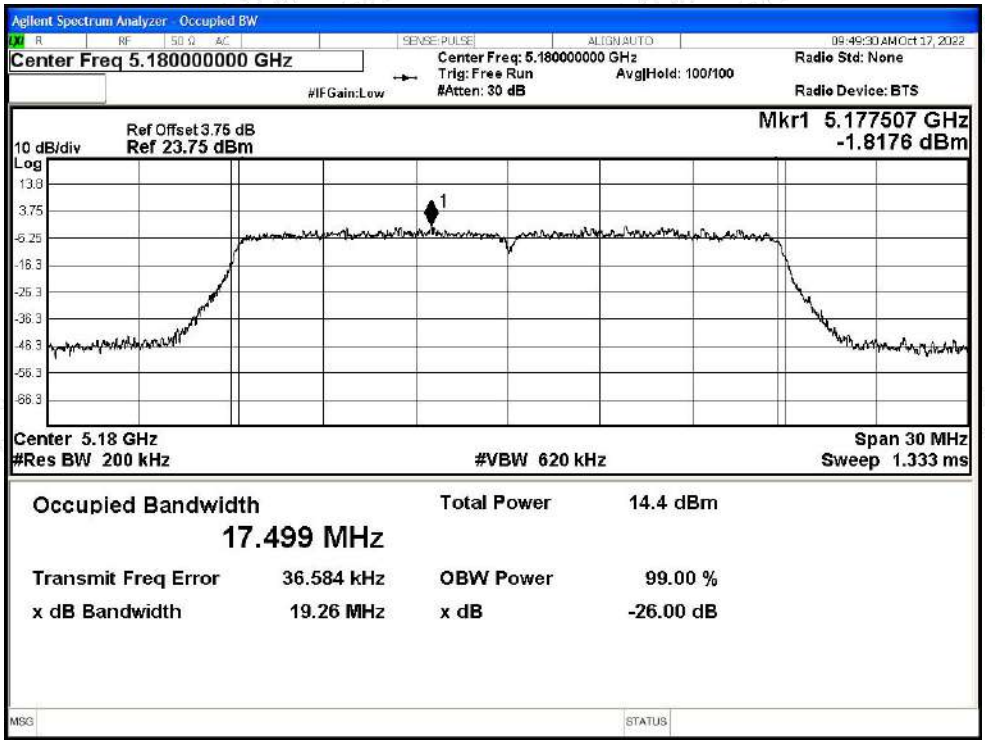

OBW NVNT ac20 5200MHz Ant0

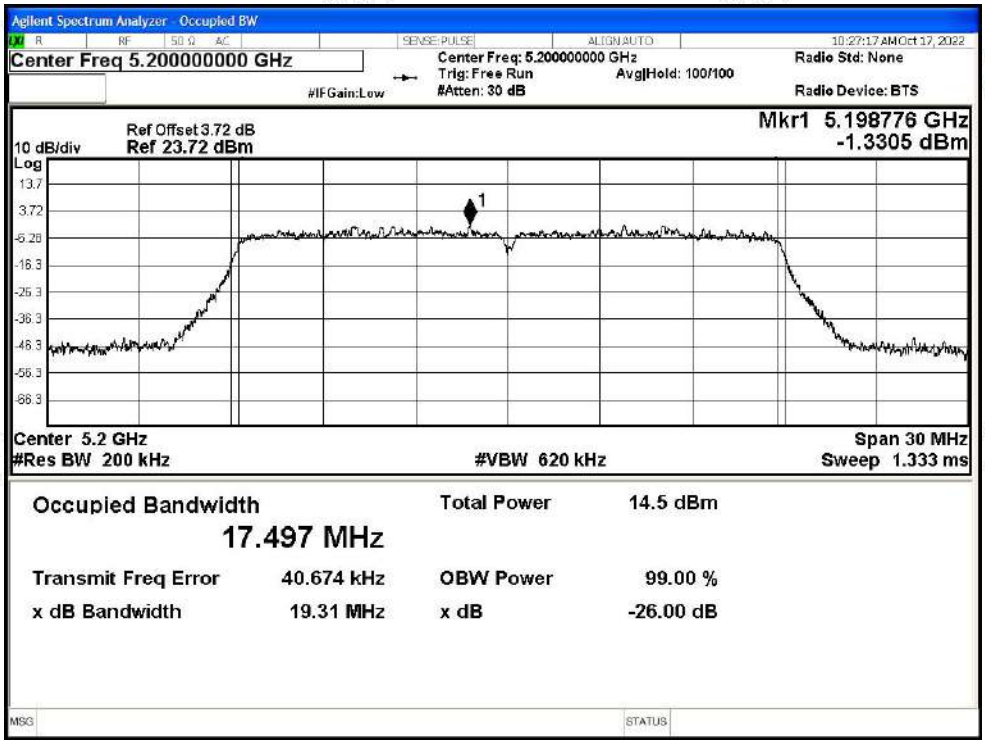

OBW NVNT ac20 5240MHz Ant0

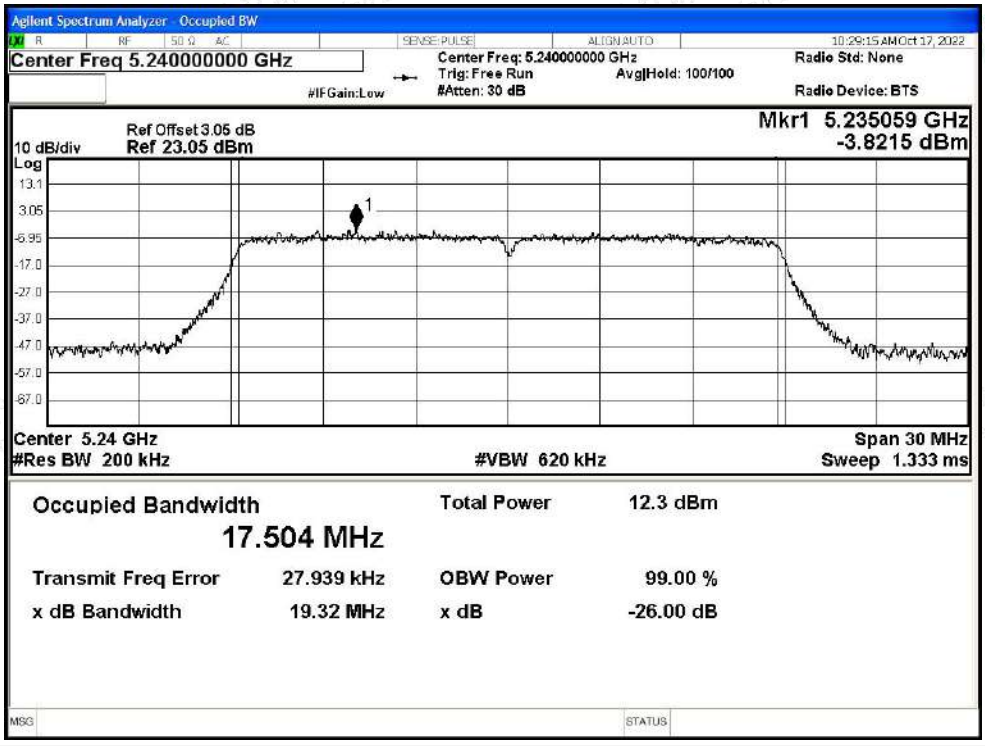

OBW NVNT ac40 5190MHz Ant0

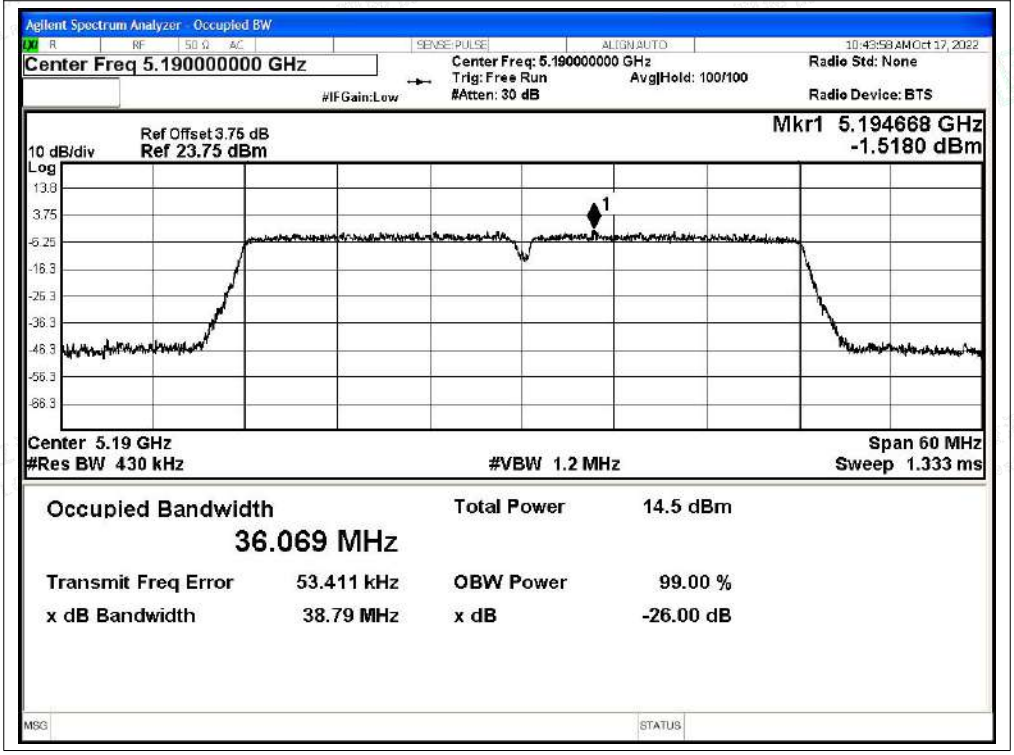

OBW NVNT ac40 5230MHz Ant0

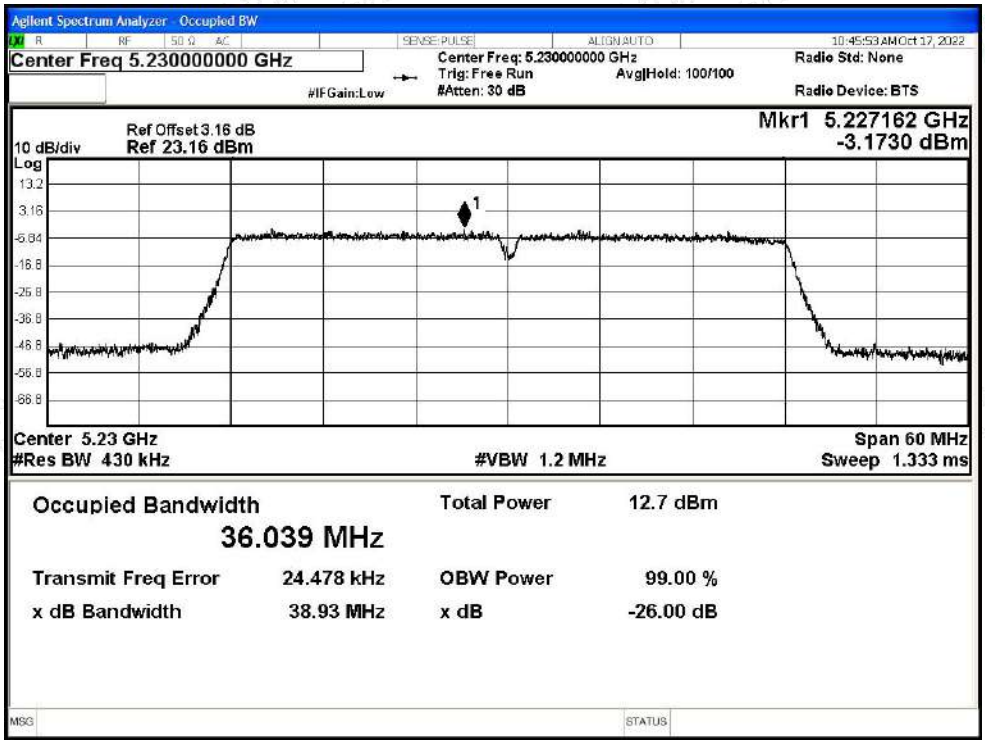

OBW NVNT ac80 5210MHz Ant0

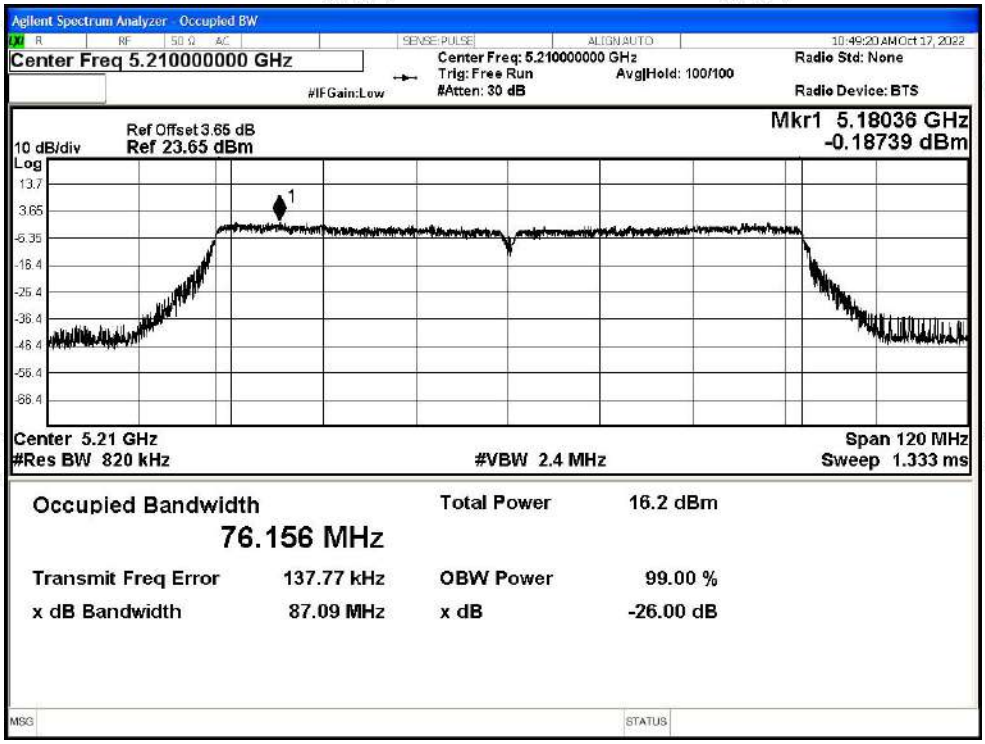

OBW NVNT ax20 5180MHz Ant0

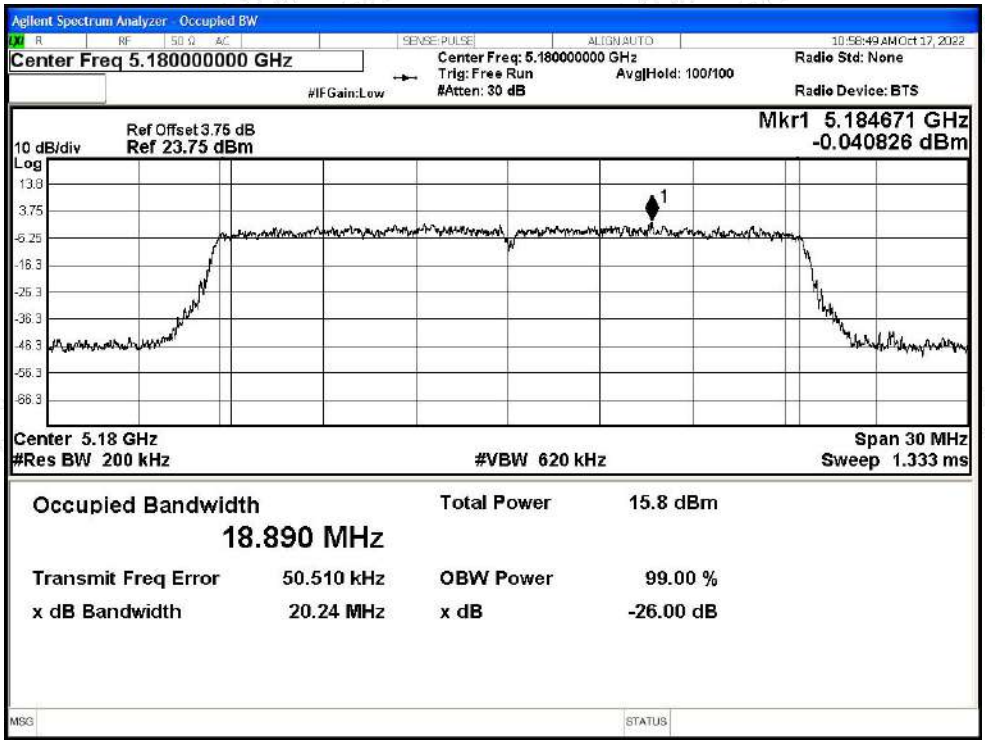

OBW NVNT ax20 5200MHz Ant0

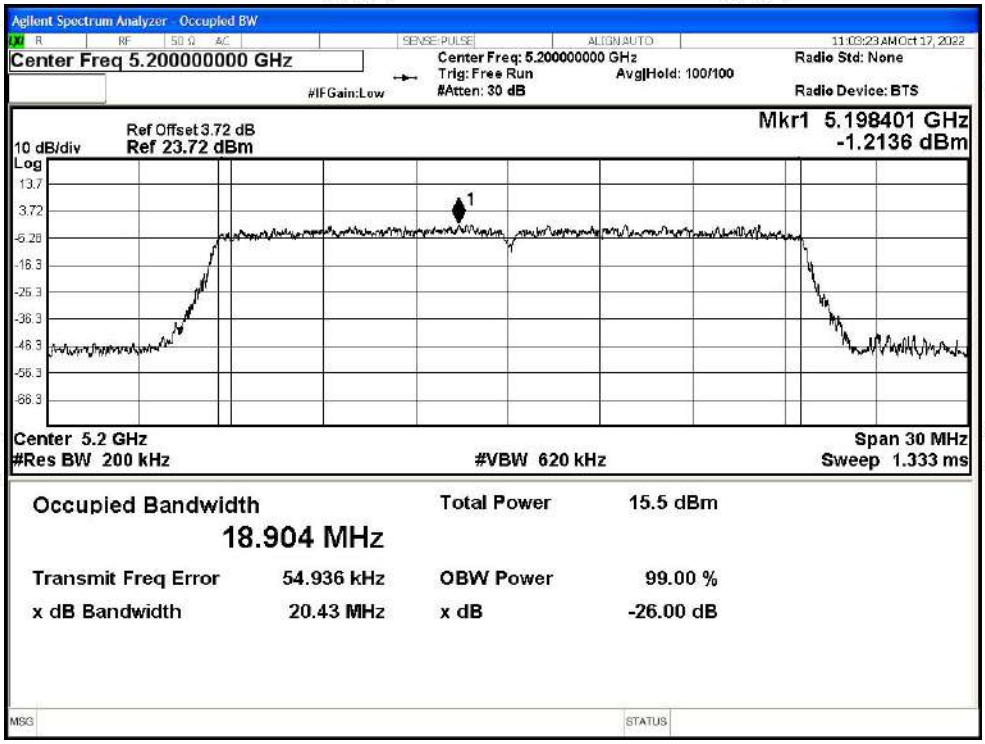

OBW NVNT ax20 5240MHz Ant0

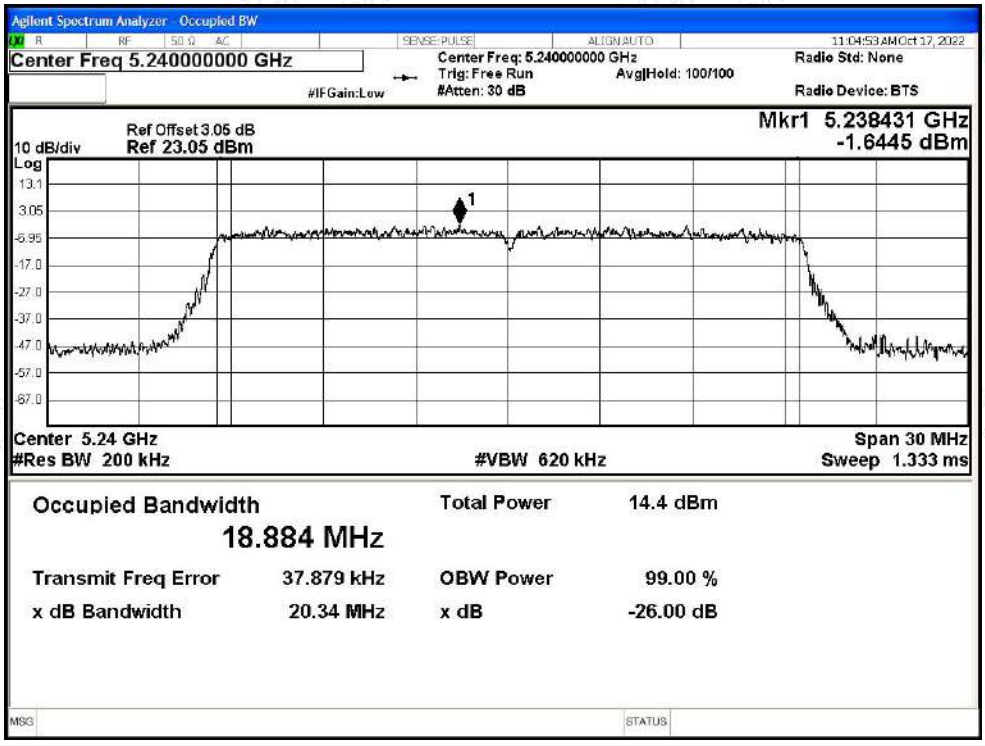

OBW NVNT ax40 5190MHz Ant0

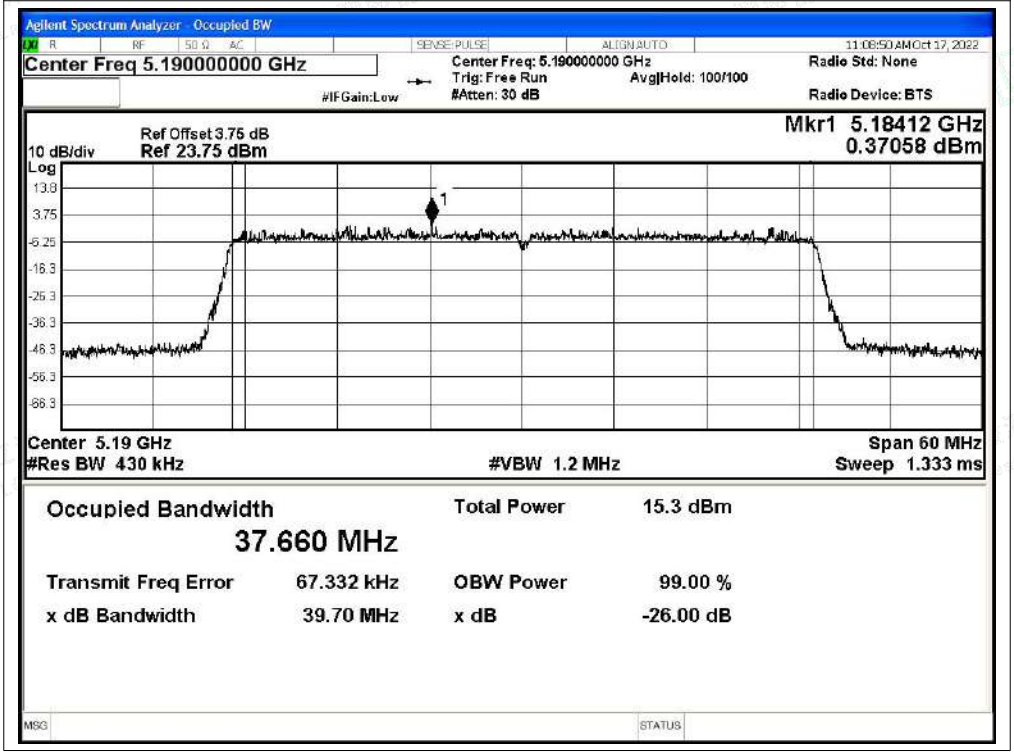

OBW NVNT ax40 5230MHz Ant0

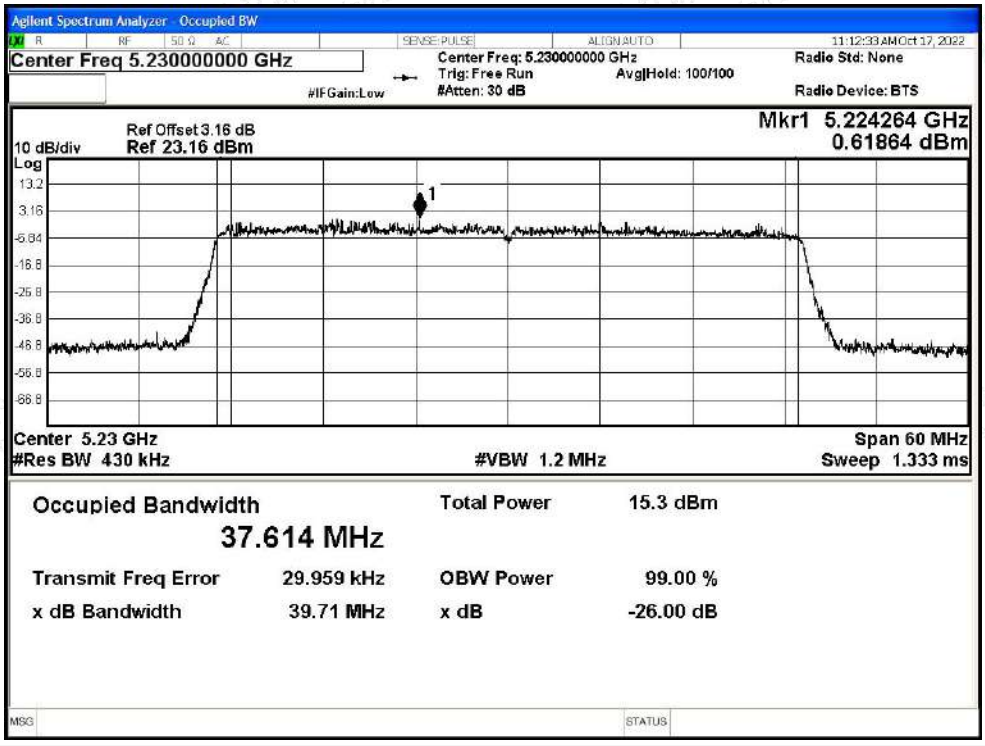

OBW NVNT ax80 5210MHz Ant0

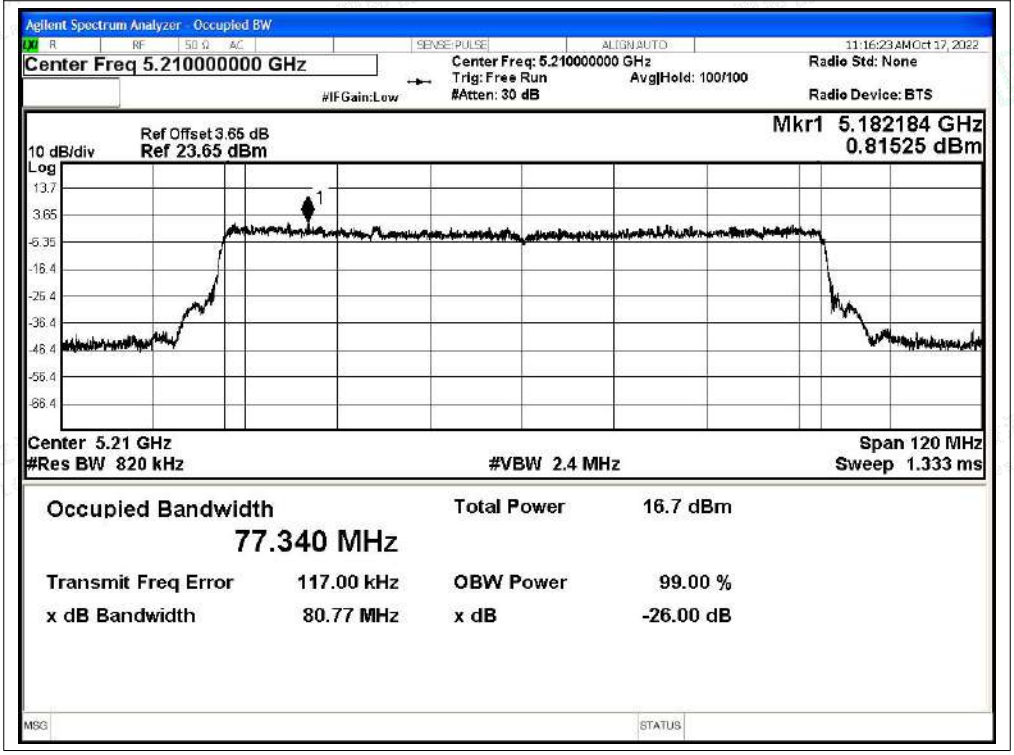

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.331
NVNT	a	5200	Ant1	16.333
NVNT	a	5240	Ant1	16.335
NVNT	n20	5180	Ant1	16.346
NVNT	n20	5200	Ant1	16.313
NVNT	n20	5240	Ant1	16.315
NVNT	n40	5190	Ant1	35.992
NVNT	n40	5230	Ant1	36.02
NVNT	ac20	5180	Ant1	16.332
NVNT	ac20	5200	Ant1	16.338
NVNT	ac20	5240	Ant1	16.326
NVNT	ac40	5190	Ant1	36.042
NVNT	ac40	5230	Ant1	36.026
NVNT	ac80	5210	Ant1	76.102
NVNT	ax20	5180	Ant1	16.327
NVNT	ax20	5200	Ant1	16.309
NVNT	ax20	5240	Ant1	16.333
NVNT	ax40	5190	Ant1	37.613
NVNT	ax40	5230	Ant1	37.623
NVNT	ax80	5210	Ant1	77.282

Test Graphs

OBW NVNT a 5180MHz Ant1

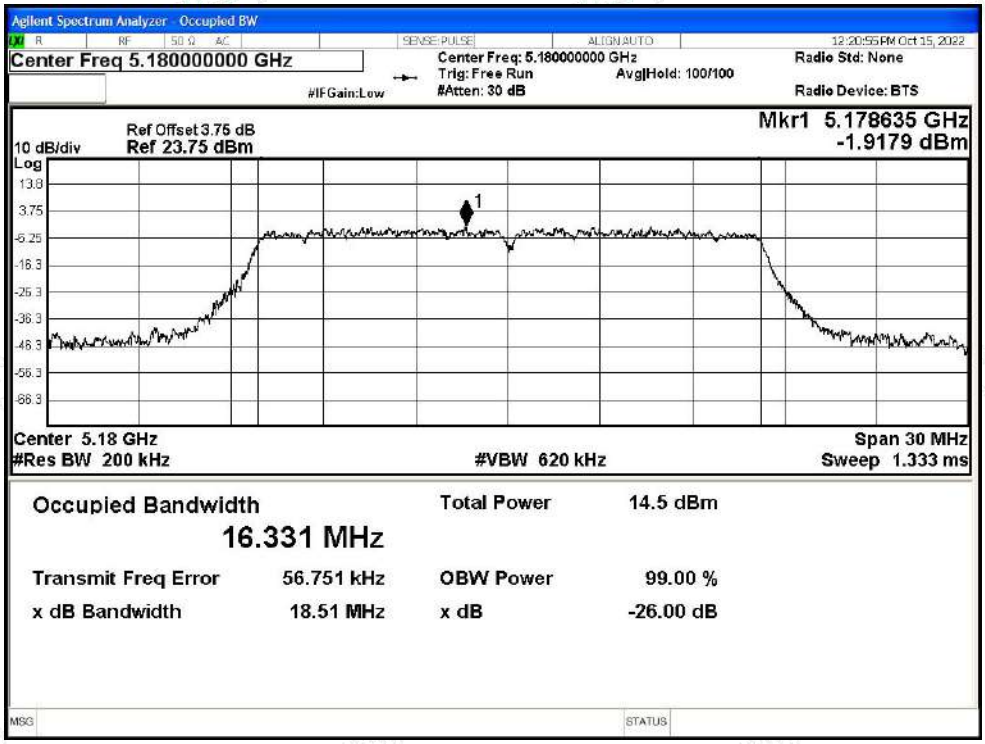

OBW NVNT a 5200MHz Ant1

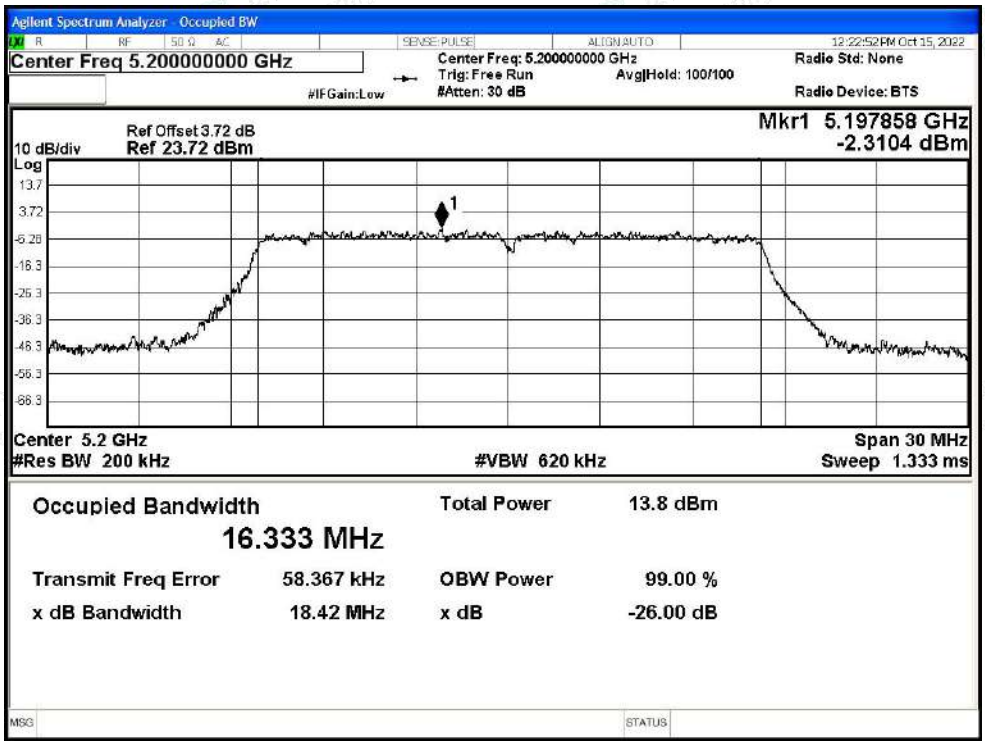

OBW NVNT a 5240MHz Ant1

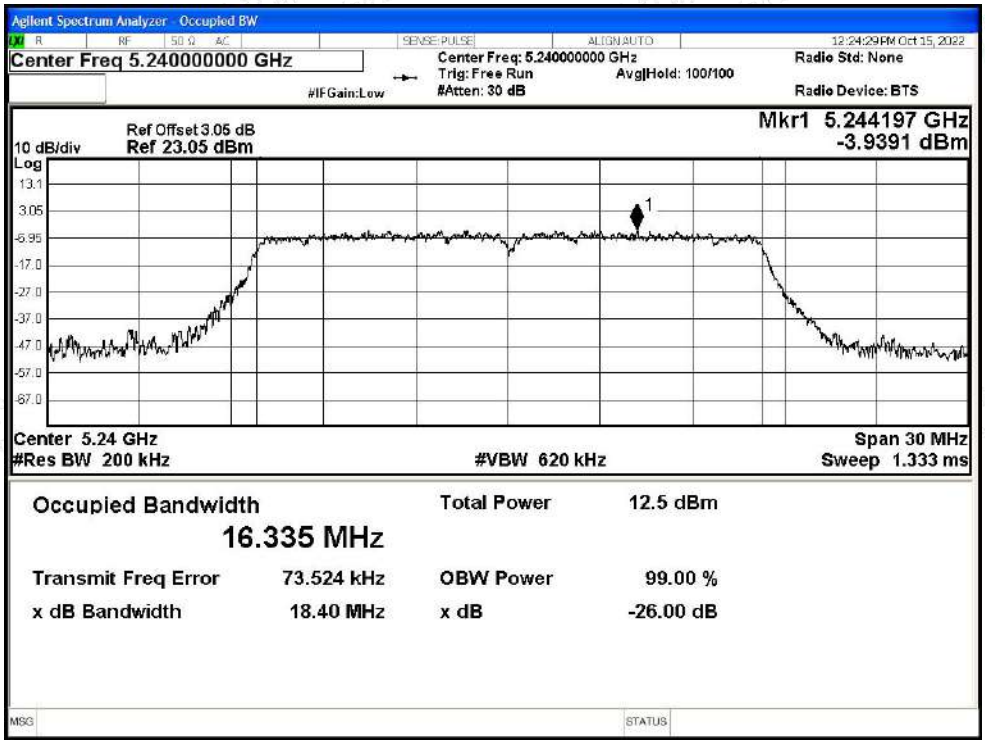

OBW NVNT n20 5180MHz Ant1

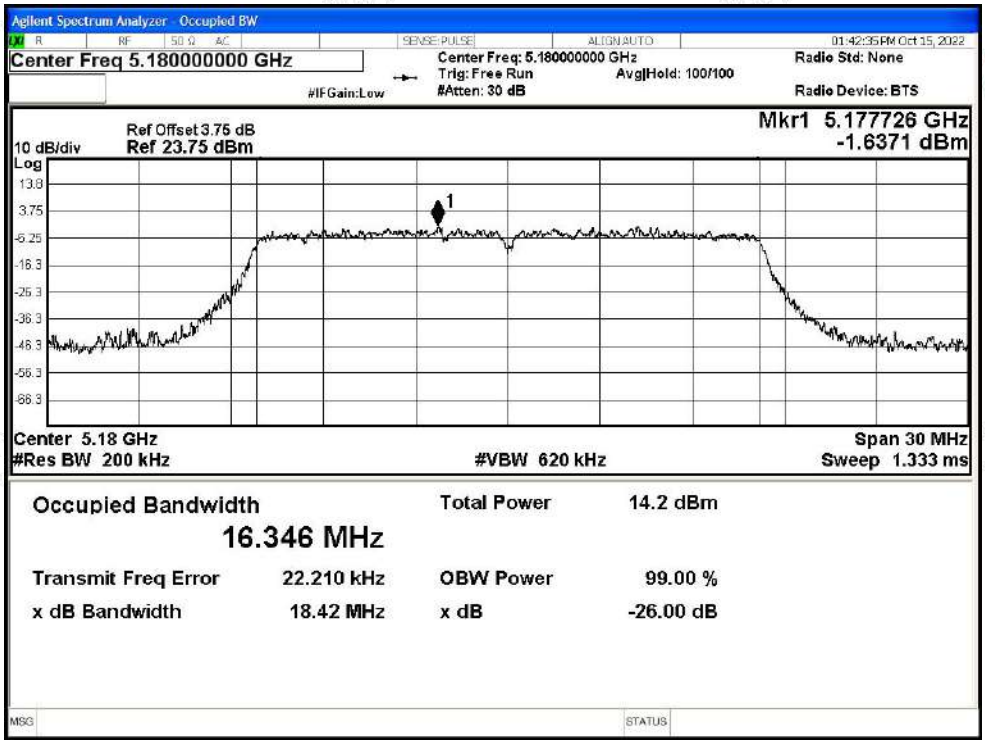

OBW NVNT n20 5200MHz Ant1

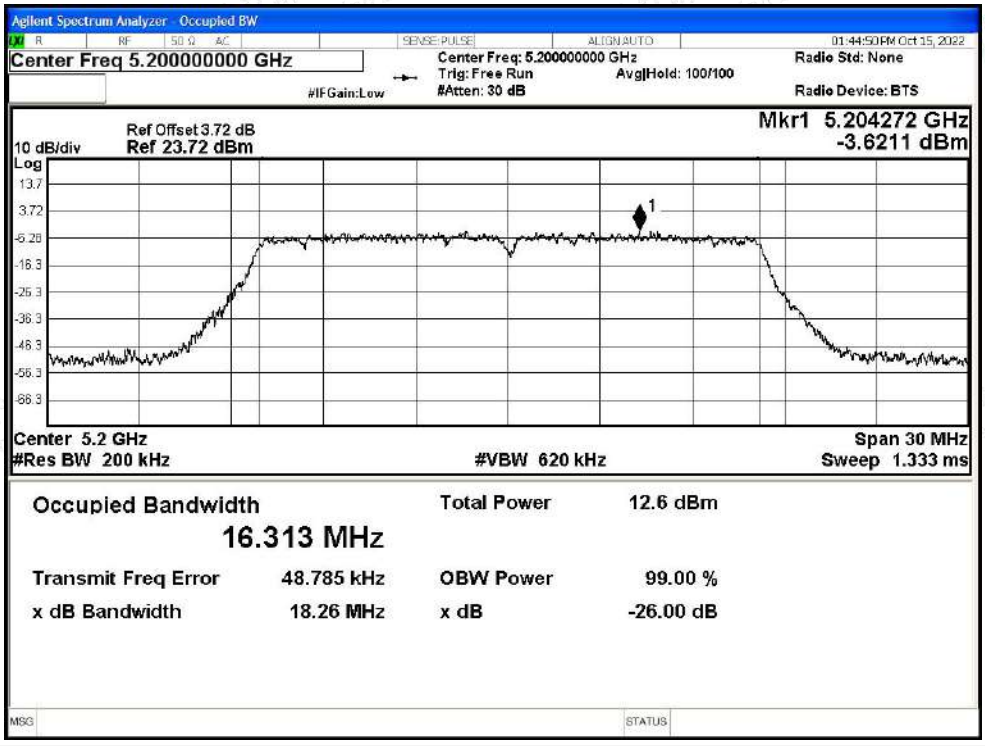

OBW NVNT n20 5240MHz Ant1

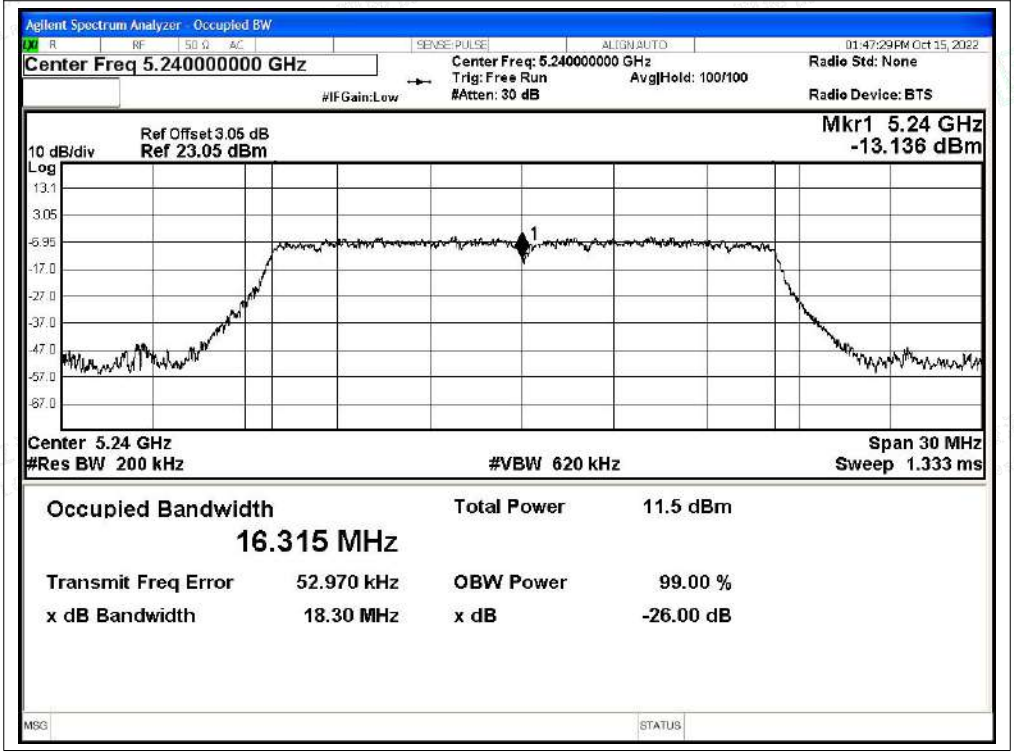

OBW NVNT n40 5190MHz Ant1

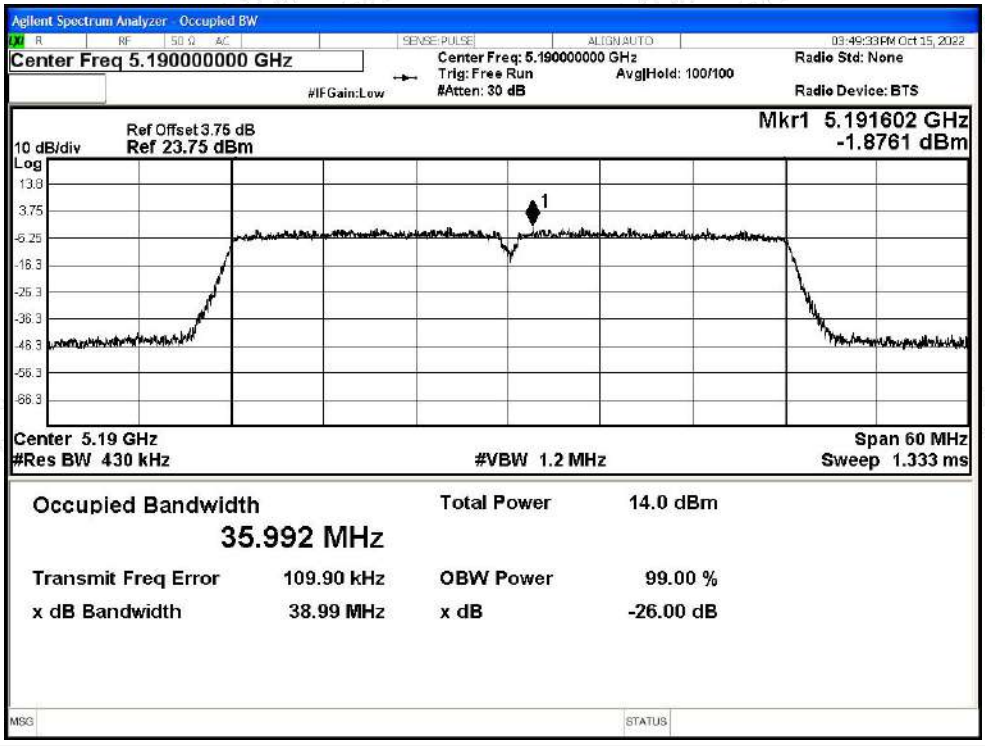

OBW NVNT n40 5230MHz Ant1

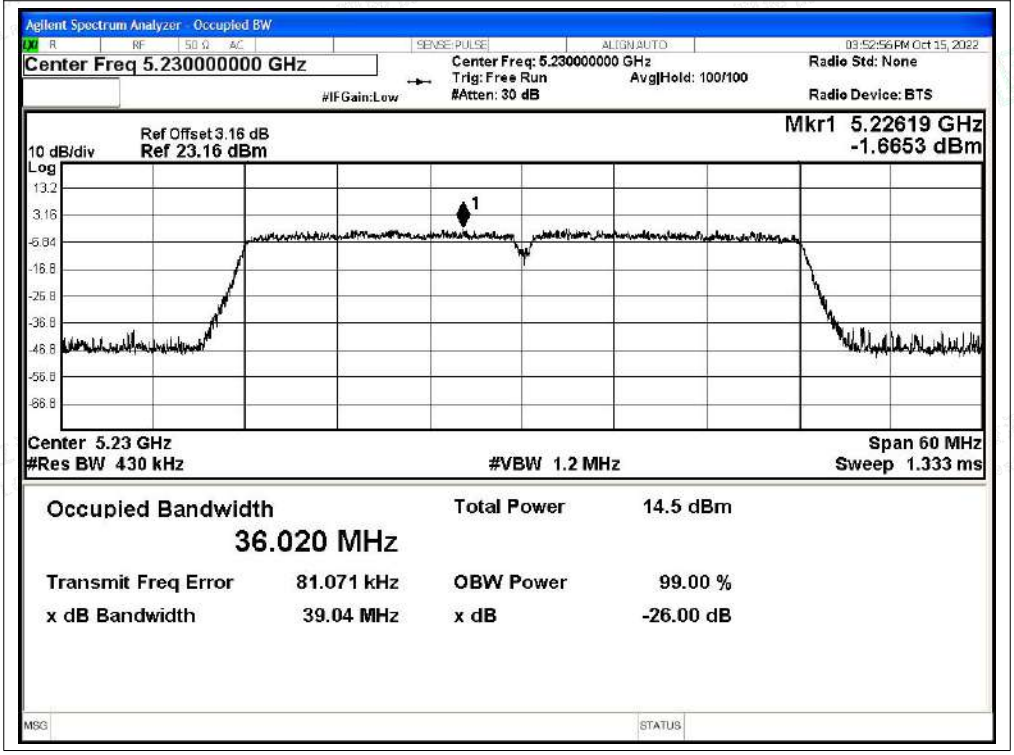

OBW NVNT ac20 5180MHz Ant1

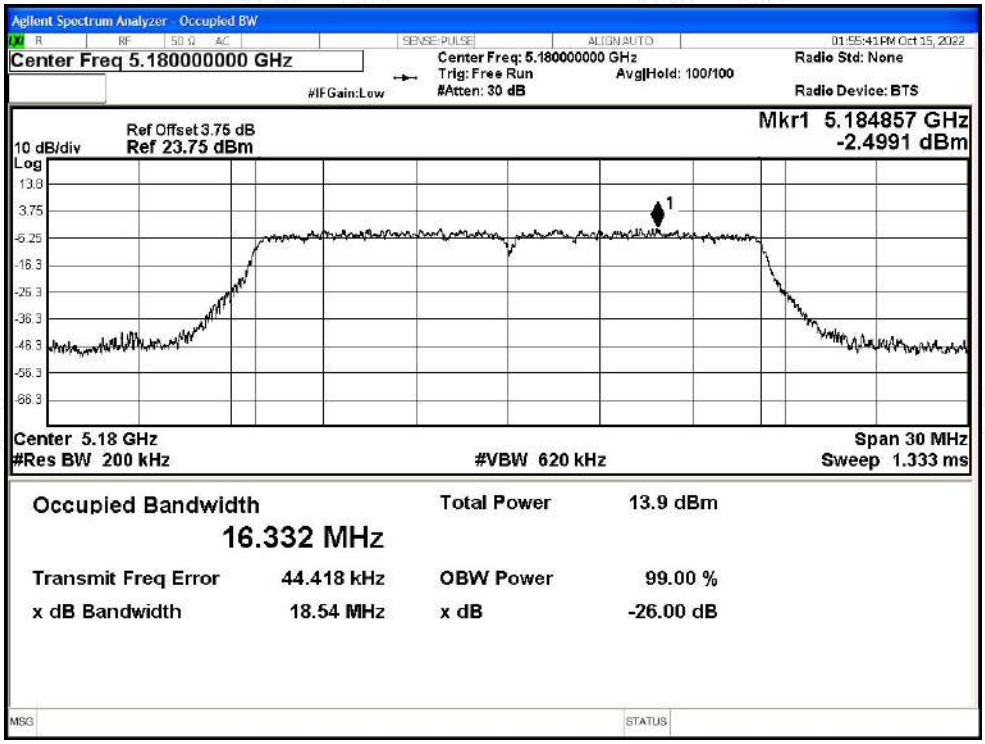

OBW NVNT ac20 5200MHz Ant1

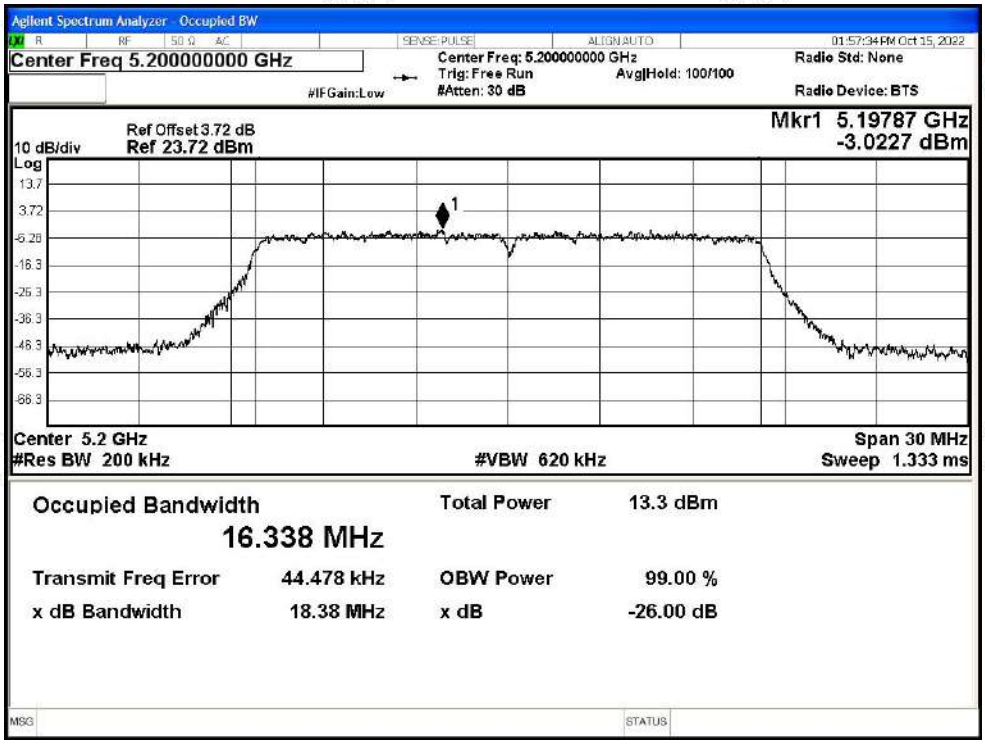

OBW NVNT ac20 5240MHz Ant1

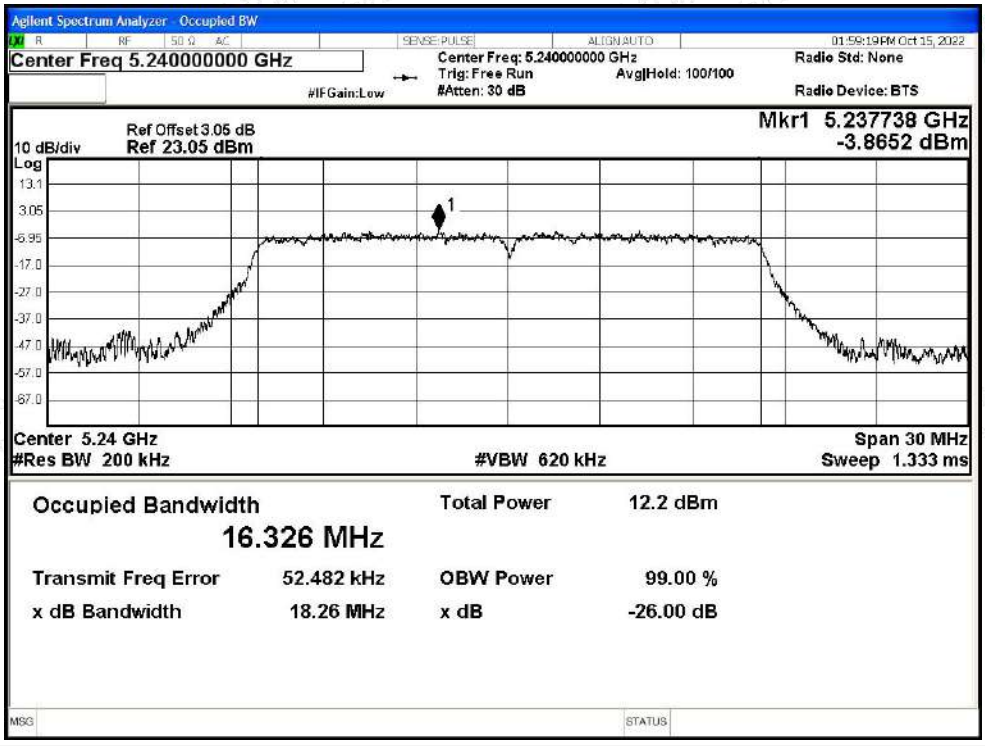

OBW NVNT ac40 5190MHz Ant1

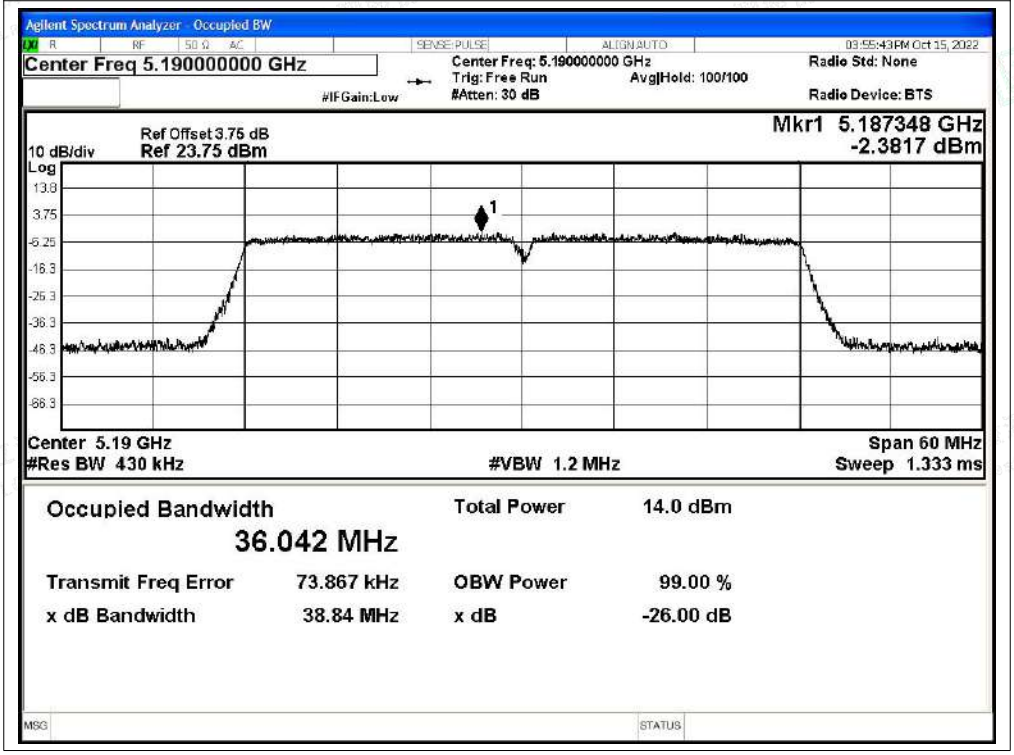

OBW NVNT ac40 5230MHz Ant1

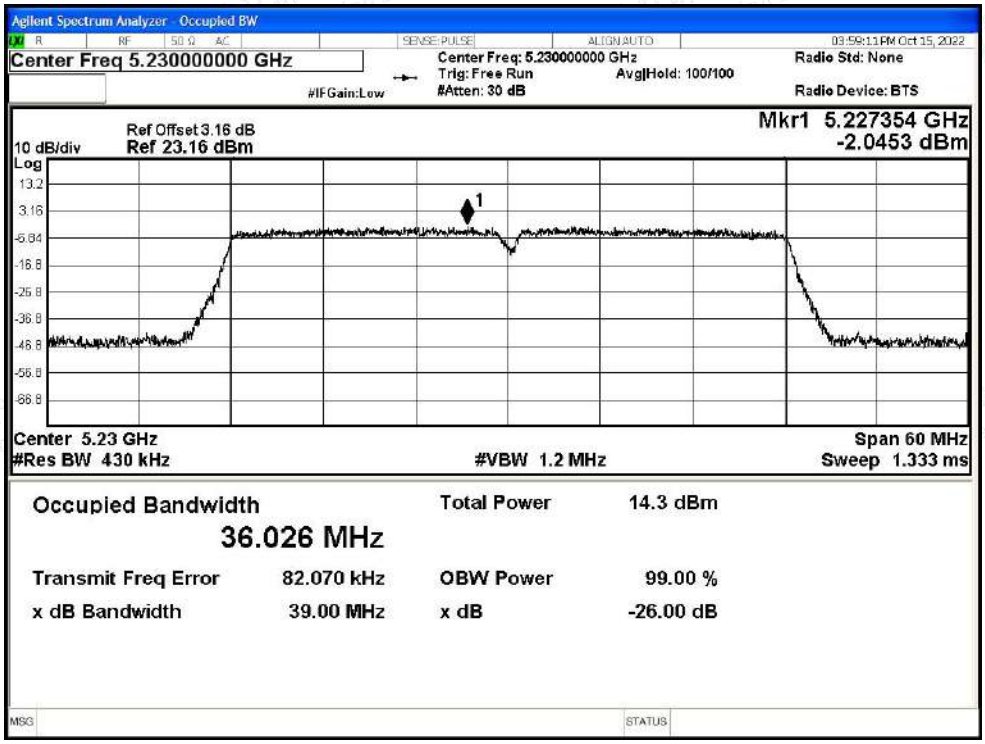

OBW NVNT ac80 5210MHz Ant1

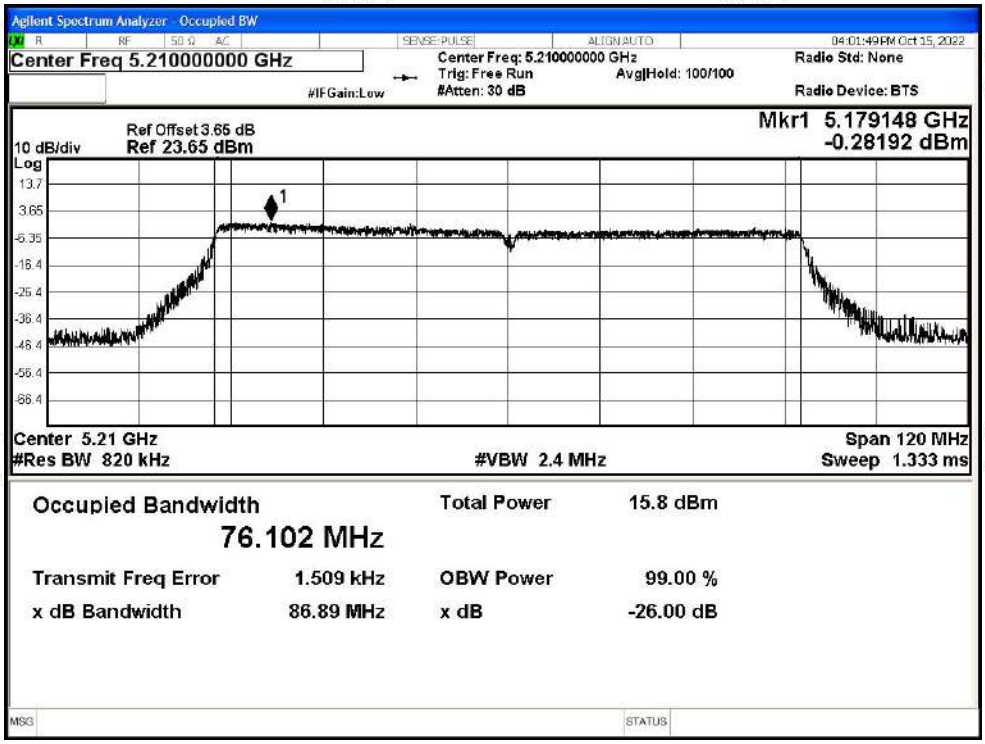

OBW NVNT ax20 5180MHz Ant1

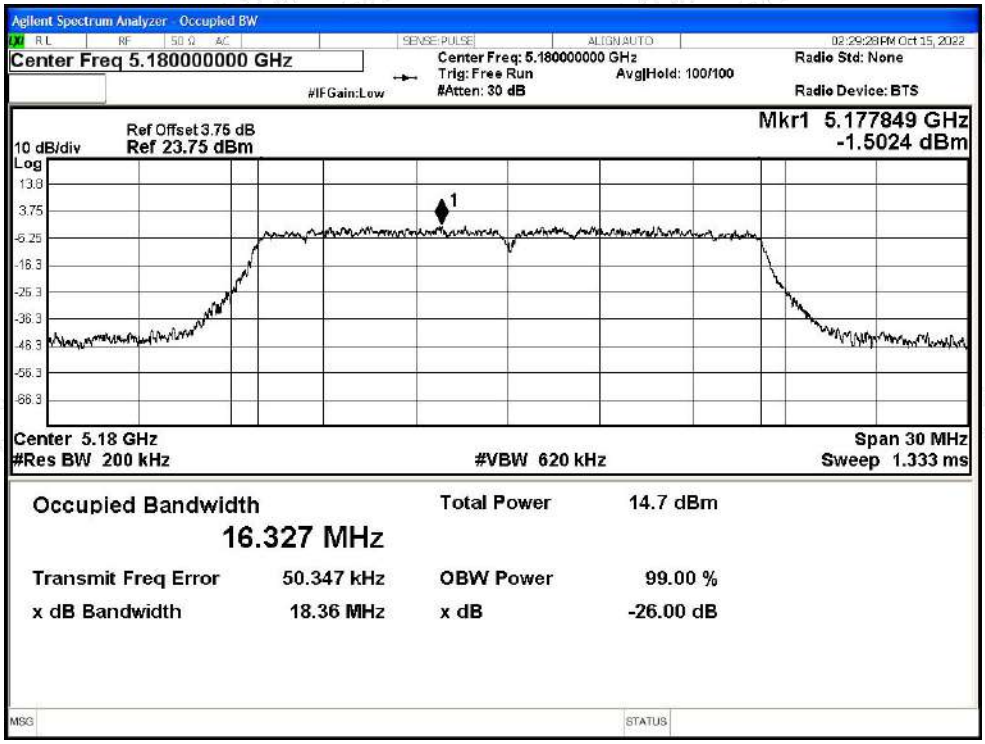

OBW NVNT ax20 5200MHz Ant1

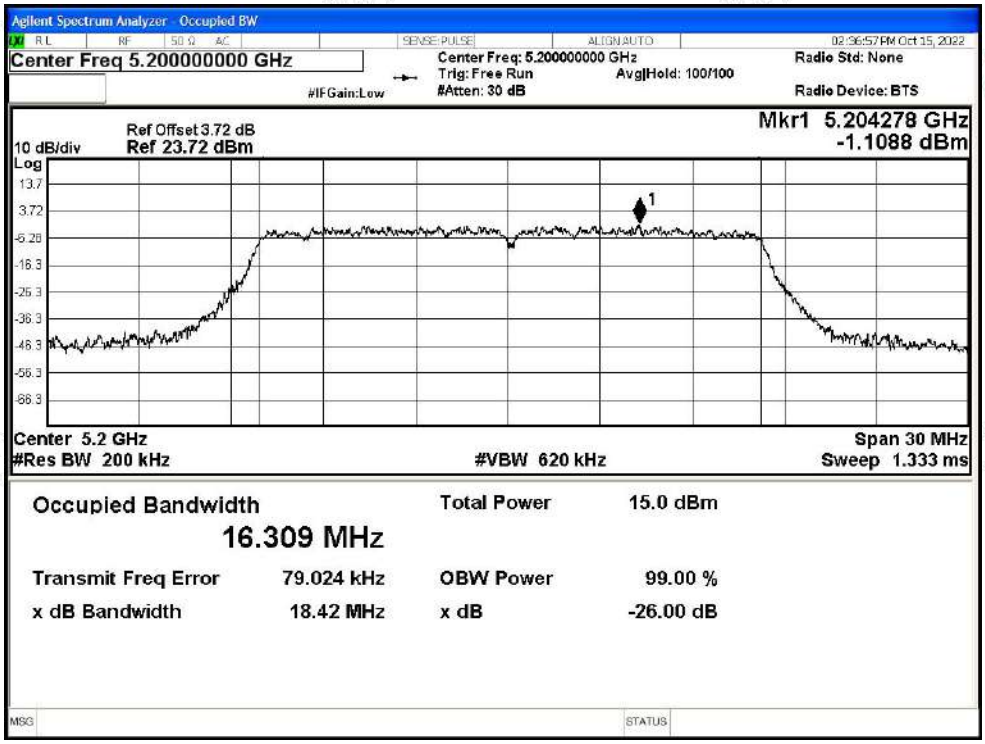

OBW NVNT ax20 5240MHz Ant1

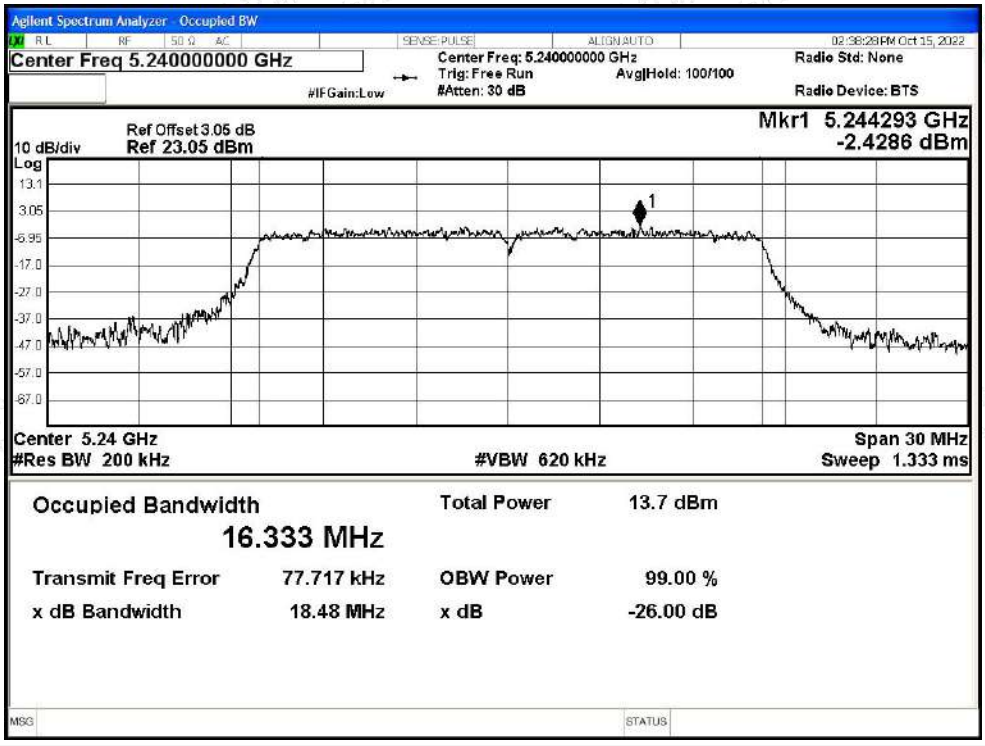

OBW NVNT ax40 5190MHz Ant1

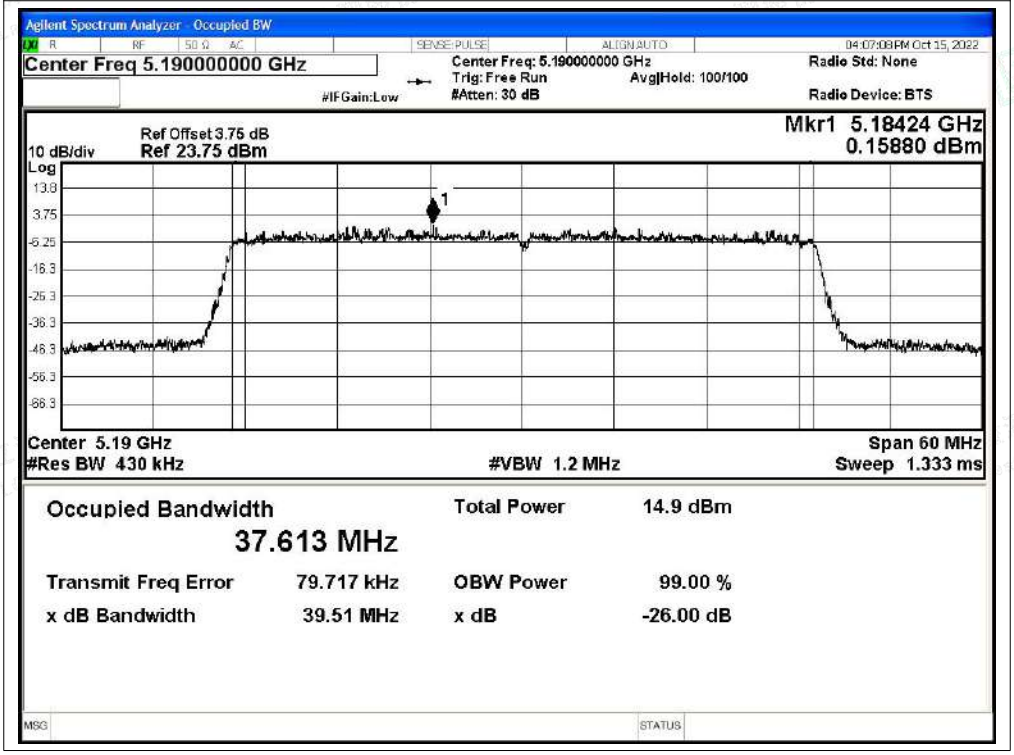

OBW NVNT ax40 5230MHz Ant1

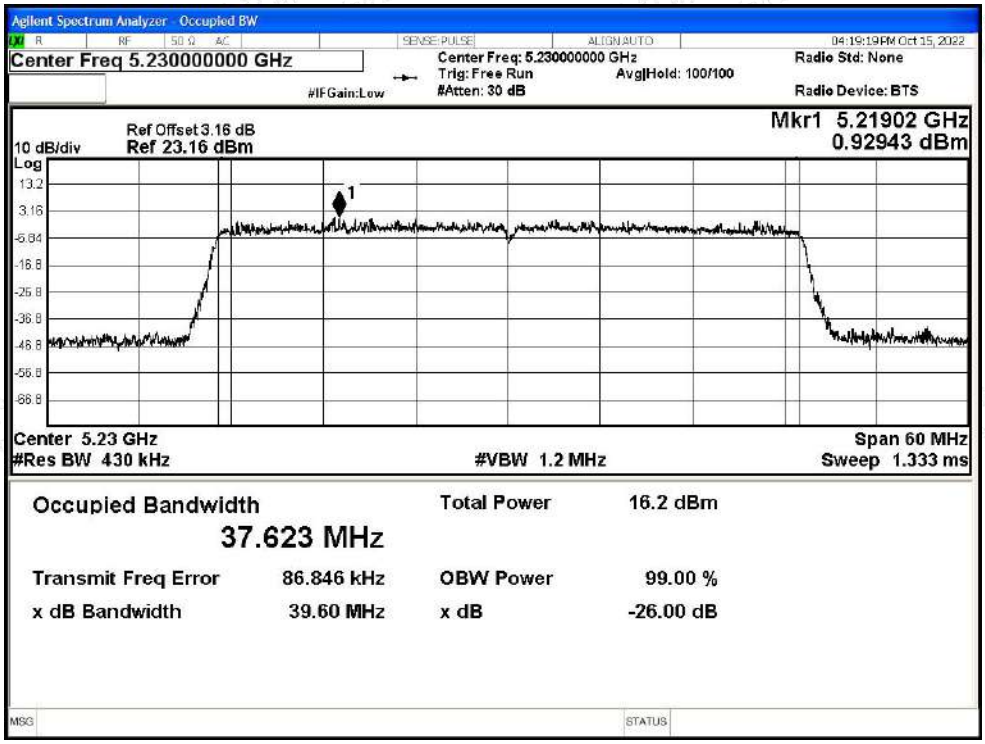

OBW NVNT ax80 5210MHz Ant1

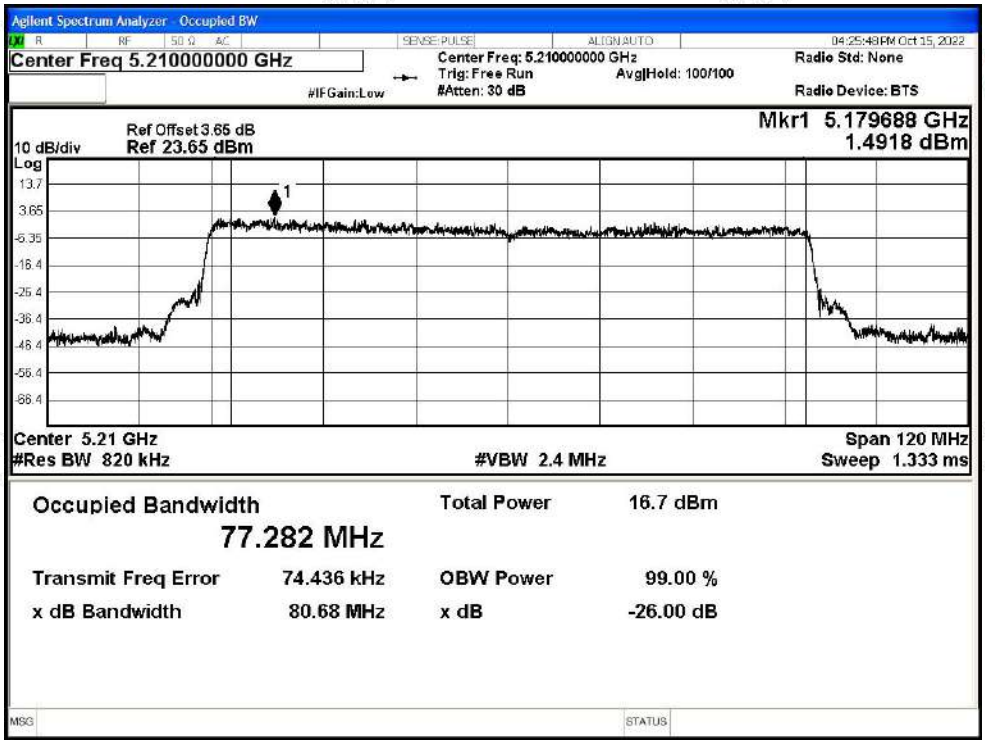

D.3 Maximum Conducted Output Power and e.i.r.p.

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	FCC Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
NVNT	a	5180	Ant0	9.41	0	9.41	24.0	2.84	12.25	22.13	Pass
NVNT	a	5200	Ant0	9.72	0	9.72	24.0	2.84	12.56	22.14	Pass
NVNT	a	5240	Ant0	9.48	0	9.48	24.0	2.84	12.32	22.13	Pass
NVNT	n20	5180	Ant0	8.89	0	8.89	24.0	2.84	11.73	22.43	Pass
NVNT	n20	5200	Ant0	8.81	0	8.81	24.0	2.84	11.65	22.43	Pass
NVNT	n20	5240	Ant0	9.23	0	9.23	24.0	2.84	12.07	22.43	Pass
NVNT	n40	5190	Ant0	9.05	0	9.05	24.0	2.84	11.89	23.01	Pass
NVNT	n40	5230	Ant0	9.3	0	9.3	24.0	2.84	12.14	23.01	Pass
NVNT	ac20	5180	Ant0	9.03	0	9.03	24.0	2.84	11.87	22.43	Pass
NVNT	ac20	5200	Ant0	9.11	0	9.11	24.0	2.84	11.95	22.43	Pass
NVNT	ac20	5240	Ant0	9.55	0	9.55	24.0	2.84	12.39	22.43	Pass
NVNT	ac40	5190	Ant0	9.02	0	9.02	24.0	2.84	11.86	23.01	Pass
NVNT	ac40	5230	Ant0	9.17	0	9.17	24.0	2.84	12.01	23.01	Pass
NVNT	ac80	5210	Ant0	9.47	0.09	9.56	24.0	2.84	12.4	23.01	Pass
NVNT	ax20	5180	Ant0	9.44	0	9.44	24.0	2.84	12.28	22.76	Pass
NVNT	ax20	5200	Ant0	9.27	0	9.27	24.0	2.84	12.11	22.77	Pass
NVNT	ax20	5240	Ant0	9.41	0	9.41	24.0	2.84	12.25	22.76	Pass
NVNT	ax40	5190	Ant0	8.78	0	8.78	24.0	2.84	11.62	23.01	Pass
NVNT	ax40	5230	Ant0	8.74	0	8.74	24.0	2.84	11.58	23.01	Pass
NVNT	ax80	5210	Ant0	9.47	0.11	9.58	24.0	2.84	12.42	23.01	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	FCC Limit (dBm)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
NVNT	a	5180	Ant1	9.16	0	9.16	24.0	1.4	10.56	22.13	Pass
NVNT	a	5200	Ant1	8.52	0	8.52	24.0	1.4	9.92	22.13	Pass
NVNT	a	5240	Ant1	8.82	0	8.82	24.0	1.4	10.22	22.13	Pass
NVNT	n20	5180	Ant1	9.03	0	9.03	24.0	1.4	10.43	22.13	Pass
NVNT	n20	5200	Ant1	9.12	0	9.12	24.0	1.4	10.52	22.13	Pass
NVNT	n20	5240	Ant1	9.86	0	9.86	24.0	1.4	11.26	22.13	Pass
NVNT	n40	5190	Ant1	8.64	0	8.64	24.0	1.4	10.04	23.01	Pass
NVNT	n40	5230	Ant1	8.77	0	8.77	24.0	1.4	10.17	23.01	Pass
NVNT	ac20	5180	Ant1	8.64	0	8.64	24.0	1.4	10.04	22.13	Pass
NVNT	ac20	5200	Ant1	9.16	0	9.16	24.0	1.4	10.56	22.13	Pass
NVNT	ac20	5240	Ant1	8.84	0	8.84	24.0	1.4	10.24	22.13	Pass
NVNT	ac40	5190	Ant1	8.56	0	8.56	24.0	1.4	9.96	23.01	Pass
NVNT	ac40	5230	Ant1	8.8	0	8.8	24.0	1.4	10.2	23.01	Pass
NVNT	ac80	5210	Ant1	9.23	0.1	9.30	24.0	1.4	10.7	23.01	Pass
NVNT	ax20	5180	Ant1	9.43	0	9.43	24.0	1.4	10.83	22.13	Pass
NVNT	ax20	5200	Ant1	9.65	0	9.65	24.0	1.4	11.05	22.12	Pass
NVNT	ax20	5240	Ant1	8.68	0	8.68	24.0	1.4	10.08	22.13	Pass
NVNT	ax40	5190	Ant1	8.42	0	8.42	24.0	1.4	9.82	23.01	Pass
NVNT	ax40	5230	Ant1	9.76	0	9.76	24.0	1.4	11.16	23.01	Pass
NVNT	ax80	5210	Ant1	9.7	0.09	9.79	24.0	1.4	11.19	23.01	Pass

MIMO

TestMode	Channel	Conducted Power (dBm)			FCC Limit [dBm]	Directional Gain (dBi)	EIRP (dBm)	EIRP Limit [dBm]	Verdict
		Ant0	Ant1	MIMO					
n20	5180	8.89	9.03	11.97	24	2.84	14.81	22.13	PASS
	5200	8.81	9.12	11.98	24	2.84	14.82	22.13	PASS
	5240	9.23	9.86	12.57	24	2.84	15.41	22.13	PASS
n40	5190	9.05	8.64	11.86	24	2.84	14.7	23.01	PASS
	5230	9.3	8.77	12.05	24	2.84	14.89	23.01	PASS
ac20	5180	9.03	8.64	11.85	24	2.84	14.69	22.13	PASS
	5200	9.11	9.16	12.15	24	2.84	14.99	22.13	PASS
	5240	9.55	8.84	12.22	24	2.84	15.06	22.13	PASS
ac40	5190	9.02	8.56	11.81	24	2.84	14.65	23.01	PASS
	5230	9.17	8.8	12.00	24	2.84	14.84	23.01	PASS
ac80	5210	9.56	9.30	12.44	24	2.84	15.28	23.01	PASS
ax20	5180	9.44	9.43	12.45	24	2.84	15.29	22.13	PASS
	5200	9.27	9.65	12.47	24	2.84	15.31	22.12	PASS
	5240	9.41	8.68	12.07	24	2.84	14.91	22.13	PASS
ax40	5190	8.78	8.42	11.61	24	2.84	14.45	23.01	PASS
	5230	8.74	9.76	12.29	24	2.84	15.13	23.01	PASS
ax80	5210	9.58	9.79	12.70	24	2.84	15.54	23.01	PASS

D.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm/MHz)	FCC Limit (dBm/MHz)	Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant0	-2.65	0	-2.65	11	2.84	0.19	10	Pass
NVNT	a	5200	Ant0	-3.04	0	-3.04	11	2.84	-0.2	10	Pass
NVNT	a	5240	Ant0	-3.27	0	-3.27	11	2.84	-0.43	10	Pass
NVNT	n20	5180	Ant0	-3.91	0	-3.91	11	2.84	-1.07	10	Pass
NVNT	n20	5200	Ant0	-4	0	-4	11	2.84	-1.16	10	Pass
NVNT	n20	5240	Ant0	-3.64	0	-3.64	11	2.84	-0.8	10	Pass
NVNT	n40	5190	Ant0	-7.02	0	-7.02	11	2.84	-4.18	10	Pass
NVNT	n40	5230	Ant0	-6.26	0	-6.26	11	2.84	-3.42	10	Pass
NVNT	ac20	5180	Ant0	-3.57	0	-3.57	11	2.84	-0.73	10	Pass
NVNT	ac20	5200	Ant0	-3.86	0	-3.86	11	2.84	-1.02	10	Pass
NVNT	ac20	5240	Ant0	-3.56	0	-3.56	11	2.84	-0.72	10	Pass
NVNT	ac40	5190	Ant0	-7.03	0	-7.03	11	2.84	-4.19	10	Pass
NVNT	ac40	5230	Ant0	-6.45	0	-6.45	11	2.84	-3.61	10	Pass
NVNT	ac80	5210	Ant0	-9.26	0.09	-9.16	11	2.84	-6.32	10	Pass
NVNT	ax20	5180	Ant0	-3.65	0	-3.65	11	2.84	-0.81	10	Pass
NVNT	ax20	5200	Ant0	-4.08	0	-4.08	11	2.84	-1.24	10	Pass
NVNT	ax20	5240	Ant0	-3.71	0	-3.71	11	2.84	-0.87	10	Pass
NVNT	ax40	5190	Ant0	-7.5	0	-7.5	11	2.84	-4.66	10	Pass
NVNT	ax40	5230	Ant0	-7.49	0	-7.49	11	2.84	-4.65	10	Pass
NVNT	ax80	5210	Ant0	-8.67	0.11	-8.56	11	2.84	-5.72	10	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm/MHz)	FCC Limit (dBm/MHz)	Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	-3.16	0	-3.16	11	1.4	-1.76	10	Pass
NVNT	a	5200	Ant1	-3.97	0	-3.97	11	1.4	-2.57	10	Pass
NVNT	a	5240	Ant1	-3.44	0	-3.44	11	1.4	-2.04	10	Pass
NVNT	n20	5180	Ant1	-3.55	0	-3.55	11	1.4	-2.15	10	Pass
NVNT	n20	5200	Ant1	-3.34	0	-3.34	11	1.4	-1.94	10	Pass
NVNT	n20	5240	Ant1	-3.09	0	-3.09	11	1.4	-1.69	10	Pass
NVNT	n40	5190	Ant1	-7.27	0	-7.27	11	1.4	-5.87	10	Pass
NVNT	n40	5230	Ant1	-6.56	0	-6.56	11	1.4	-5.16	10	Pass
NVNT	ac20	5180	Ant1	-3.58	0	-3.58	11	1.4	-2.18	10	Pass
NVNT	ac20	5200	Ant1	-3.66	0	-3.66	11	1.4	-2.26	10	Pass
NVNT	ac20	5240	Ant1	-3.72	0	-3.72	11	1.4	-2.32	10	Pass
NVNT	ac40	5190	Ant1	-7.13	0	-7.13	11	1.4	-5.73	10	Pass
NVNT	ac40	5230	Ant1	-7.11	0	-7.11	11	1.4	-5.71	10	Pass
NVNT	ac80	5210	Ant1	-8.74	0.1	-8.64	11	1.4	-7.24	10	Pass
NVNT	ax20	5180	Ant1	-3.18	0	-3.18	11	1.4	-1.78	10	Pass
NVNT	ax20	5200	Ant1	-2.71	0	-2.71	11	1.4	-1.31	10	Pass
NVNT	ax20	5240	Ant1	-4	0	-4	11	1.4	-2.6	10	Pass
NVNT	ax40	5190	Ant1	-7.76	0	-7.76	11	1.4	-6.36	10	Pass
NVNT	ax40	5230	Ant1	-6.33	0	-6.33	11	1.4	-4.93	10	Pass
NVNT	ax80	5210	Ant1	-8.32	0.09	-8.23	11	1.4	-6.83	10	Pass

MIMO

TestMode	Channel	Result [dBm/MHz]			FCC Limit[dBm/MHz]	Directional Gain (dBi)	EIRP PSD (dBm)	EIRP PSD Limit [dBm]	Verdict
		Ant0	Ant1	MIMO					
n20	5180	-3.91	-3.55	-0.72	≤11.00	5.85	5.13	≤10	PASS
	5200	-4	-3.34	-0.65	≤11.00	5.85	5.2	≤10	PASS
	5240	-3.64	-3.09	-0.35	≤11.00	5.85	5.5	≤10	PASS
n40	5190	-7.02	-7.27	-4.13	≤11.00	5.85	1.72	≤10	PASS
	5230	-6.26	-6.56	-3.40	≤11.00	5.85	2.45	≤10	PASS
ac20	5180	-3.57	-3.58	-0.56	≤11.00	5.85	5.29	≤10	PASS
	5200	-3.86	-3.66	-0.75	≤11.00	5.85	5.1	≤10	PASS
	5240	-3.56	-3.72	-0.63	≤11.00	5.85	5.22	≤10	PASS
ac40	5190	-7.03	-7.13	-4.07	≤11.00	5.85	1.78	≤10	PASS
	5230	-6.45	-7.11	-3.76	≤11.00	5.85	2.09	≤10	PASS
ac80	5210	-9.16	-8.64	-5.88	≤11.00	5.85	-0.03	≤10	PASS
ax20	5180	-3.65	-3.18	-0.40	≤11.00	5.85	5.45	≤10	PASS
	5200	-4.08	-2.71	-0.33	≤11.00	5.85	5.52	≤10	PASS
	5240	-3.71	-4	-0.84	≤11.00	5.85	5.01	≤10	PASS
ax40	5190	-7.5	-7.76	-4.62	≤11.00	5.85	1.23	≤10	PASS
	5230	-7.49	-6.33	-3.86	≤11.00	5.85	1.99	≤10	PASS
ax80	5210	-8.56	-8.23	-5.38	≤11.00	5.85	0.47	≤10	PASS

Test Graphs

PSD NVNT a 5180MHz Ant0

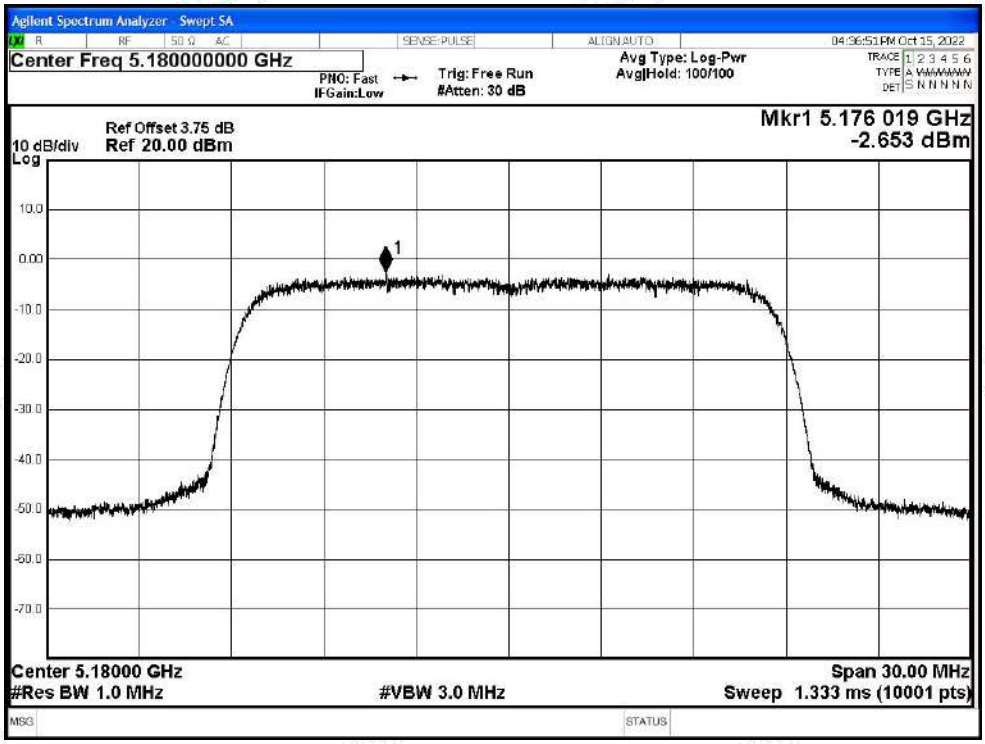

PSD NVNT a 5200MHz Ant0

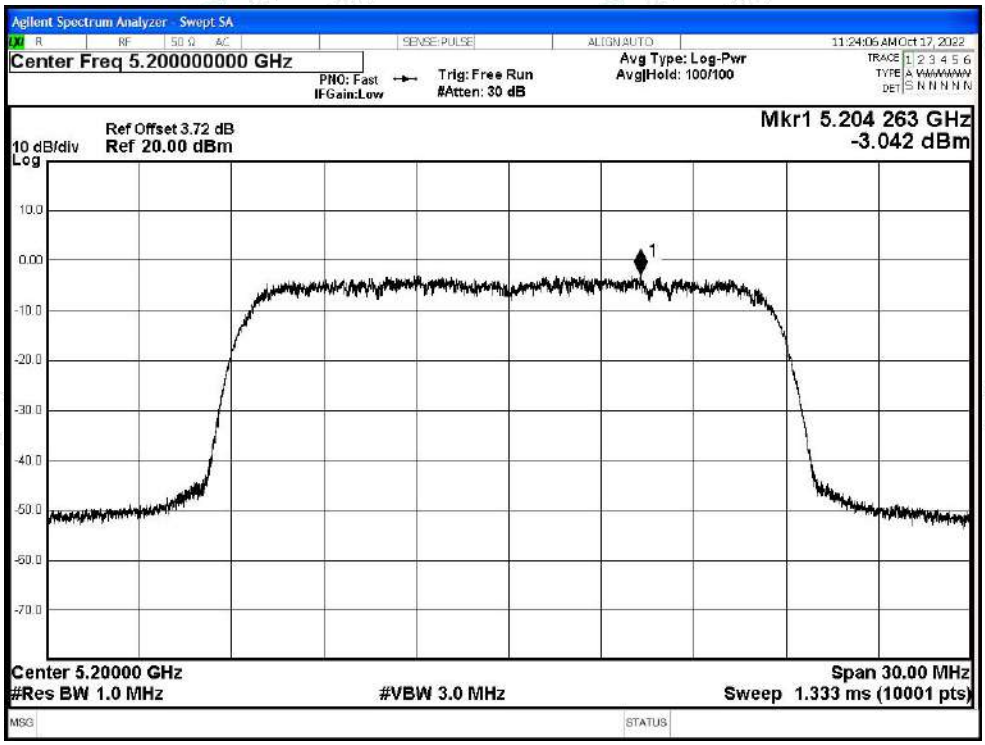

PSD NVNT a 5240MHz Ant0

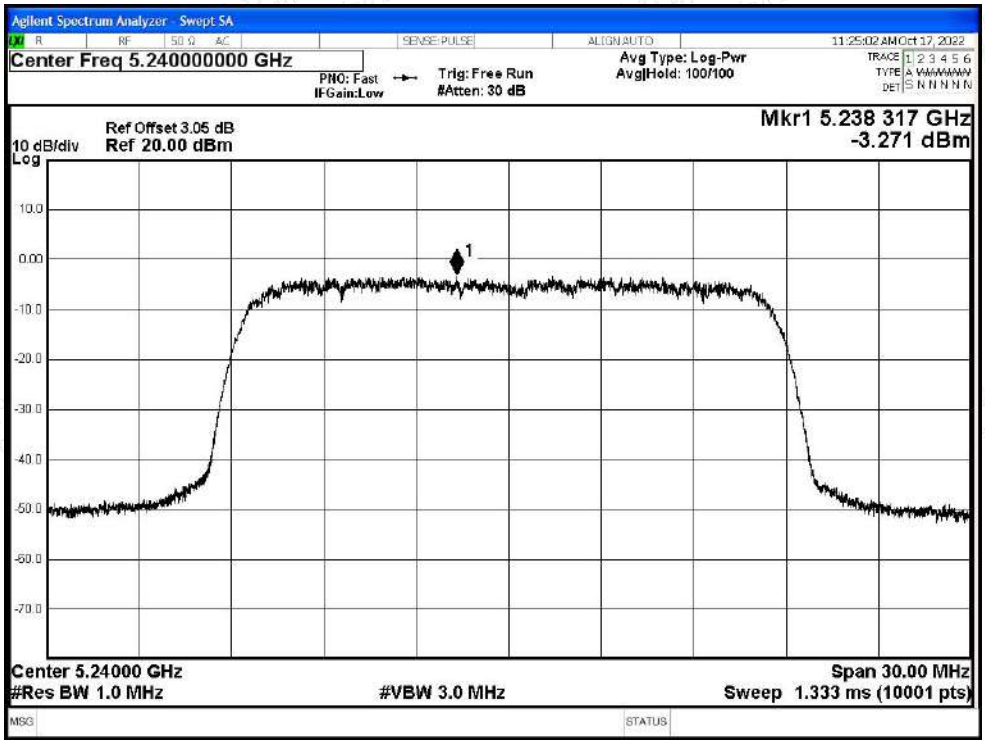

PSD NVNT n20 5180MHz Ant0

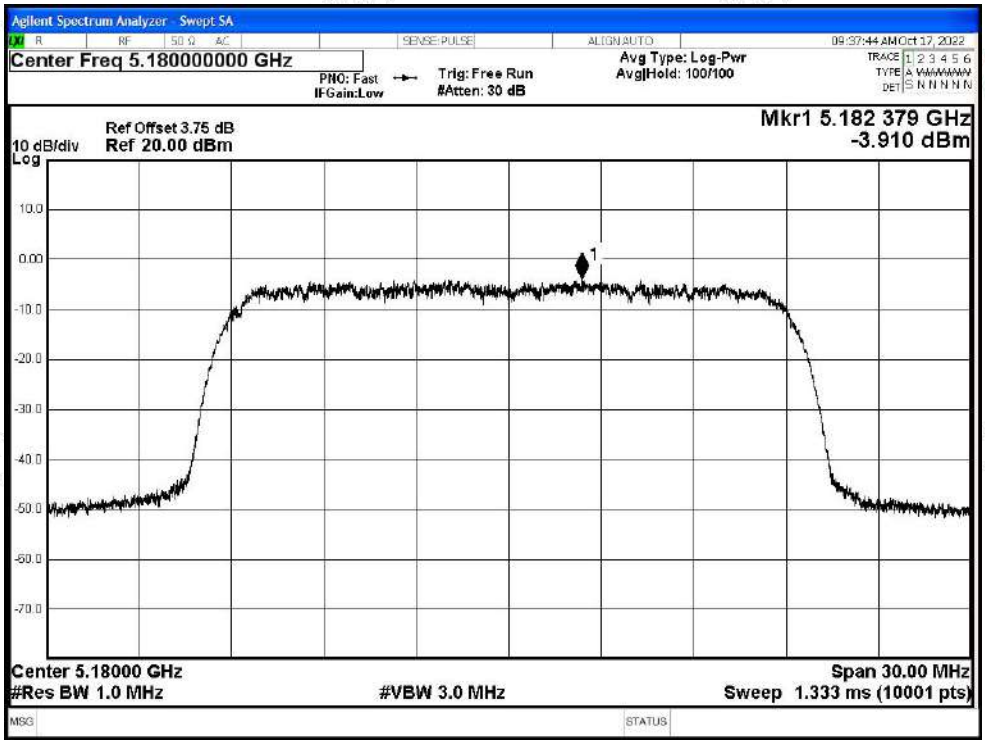

PSD NVNT n20 5200MHz Ant0

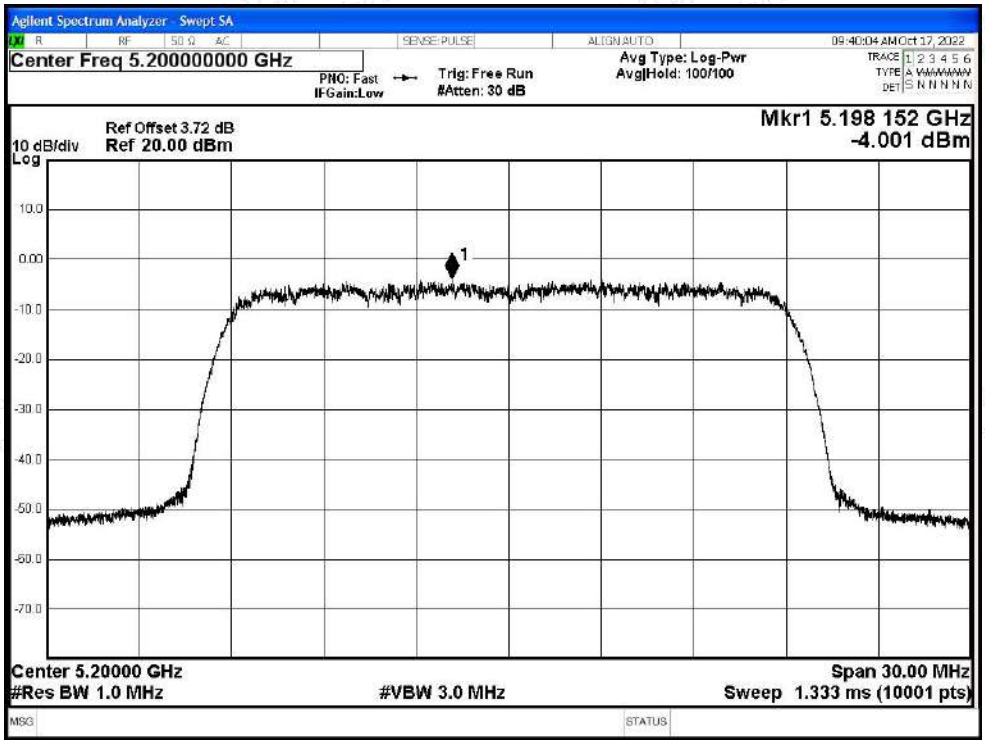

PSD NVNT n20 5240MHz Ant0

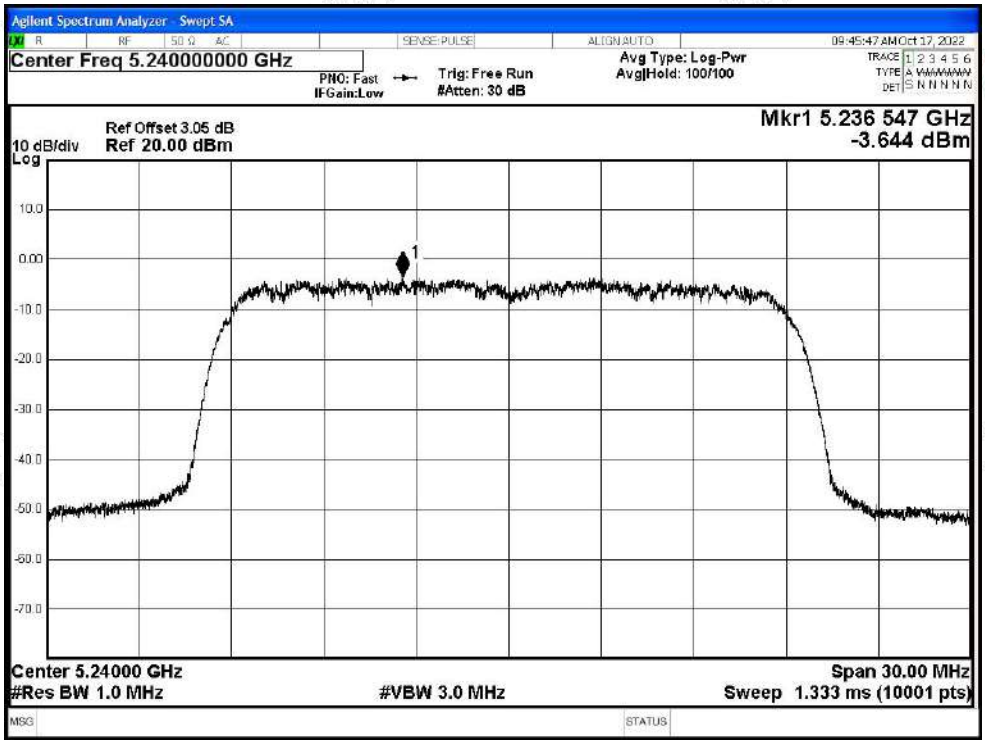

PSD NVNT n40 5190MHz Ant0

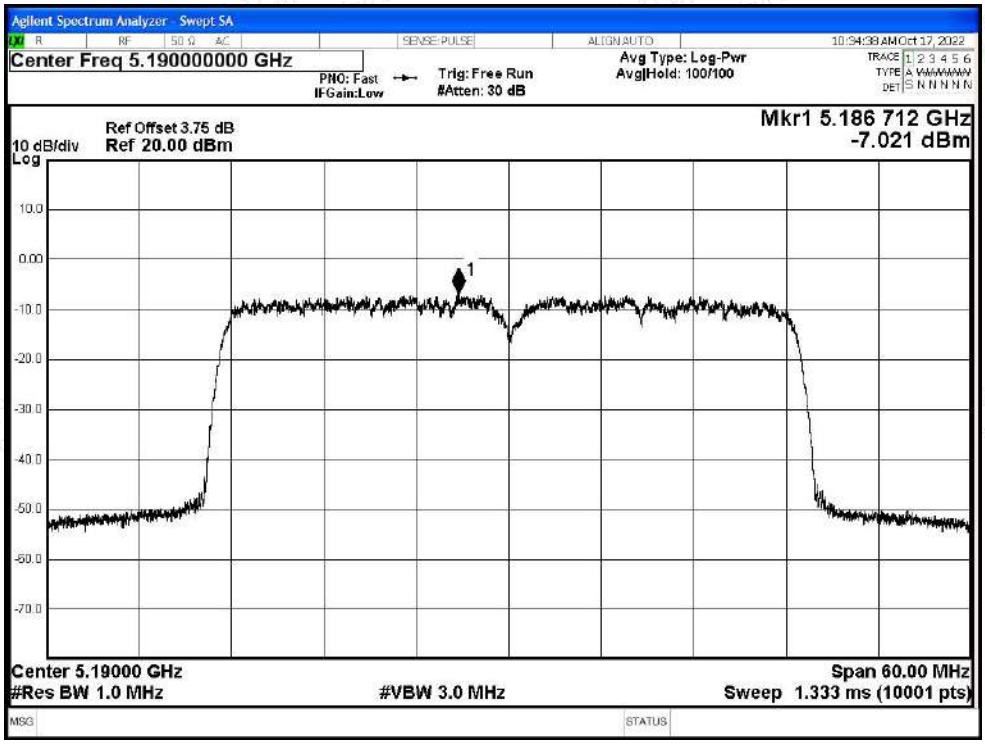

PSD NVNT n40 5230MHz Ant0

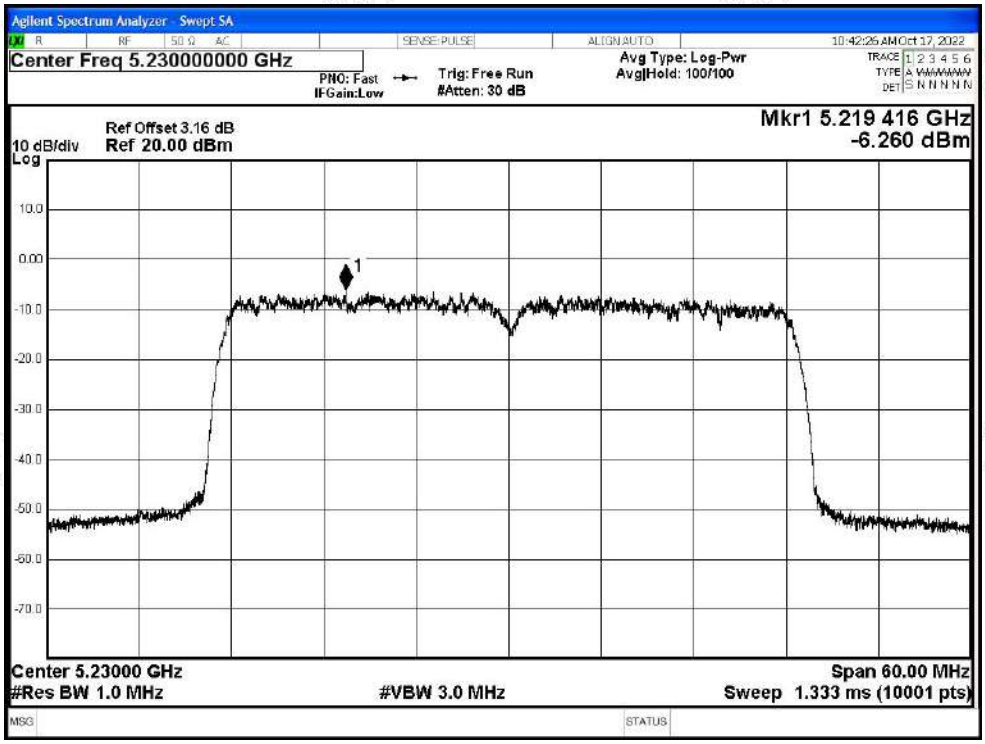

PSD NVNT ac20 5180MHz Ant0

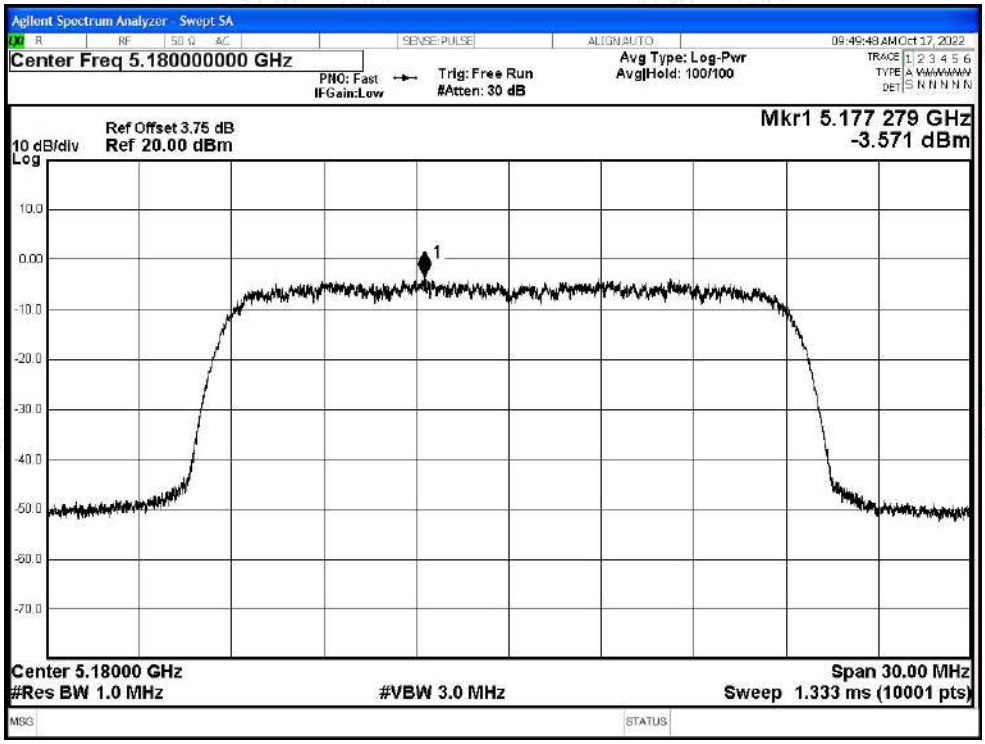

PSD NVNT ac20 5200MHz Ant0

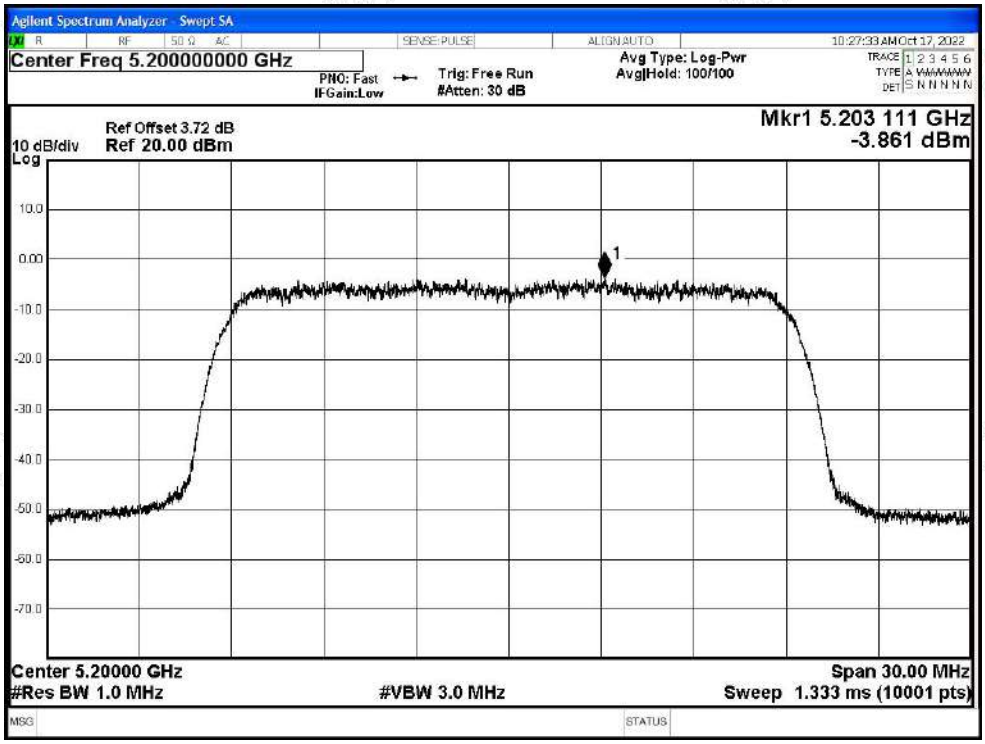

PSD NVNT ac20 5240MHz Ant0

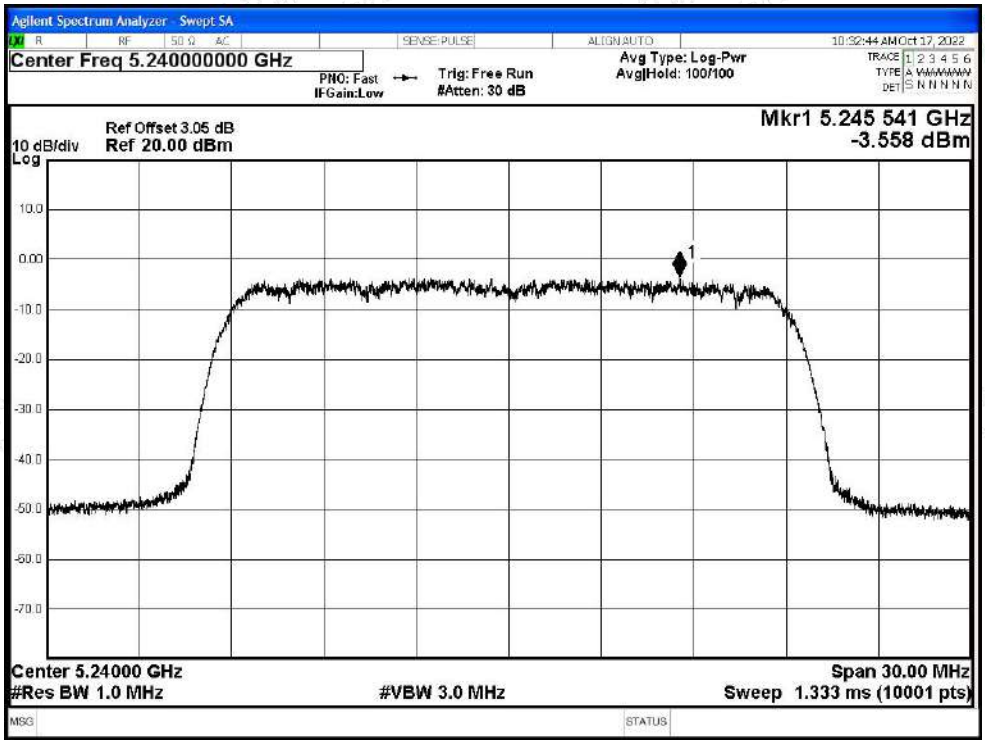

PSD NVNT ac40 5190MHz Ant0

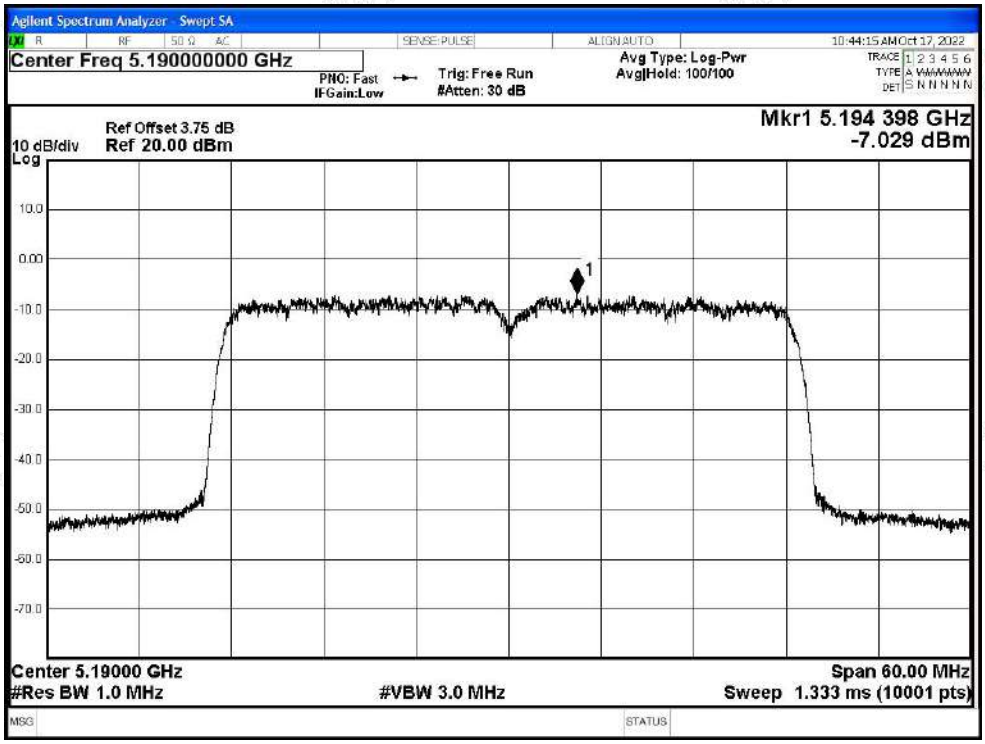

PSD NVNT ac40 5230MHz Ant0

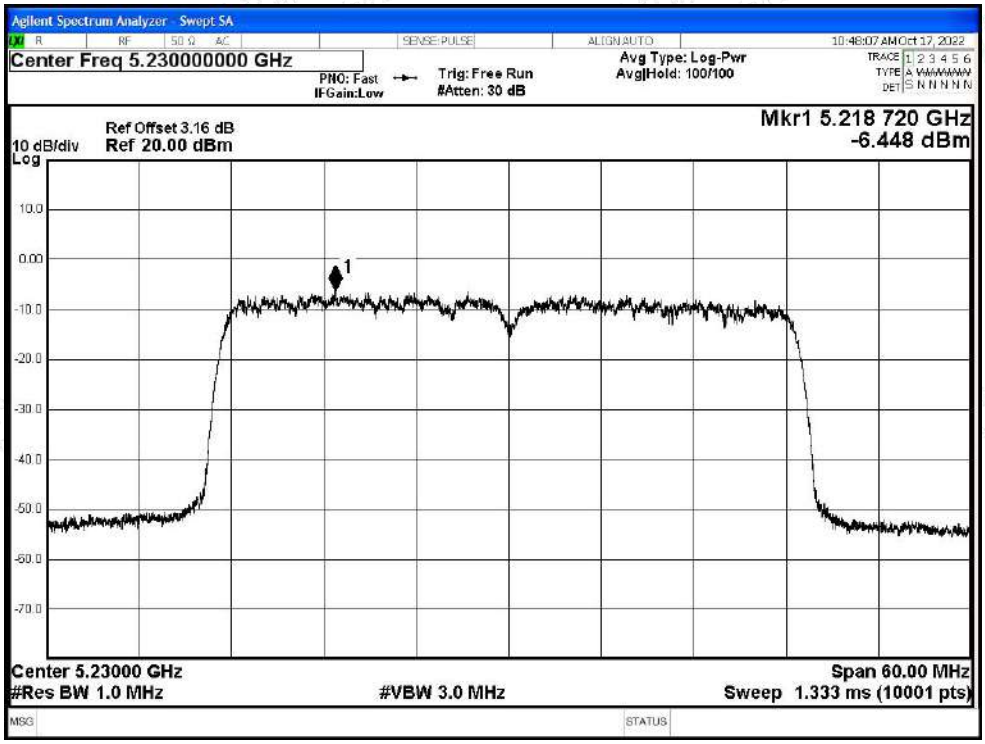

PSD NVNT ac80 5210MHz Ant0

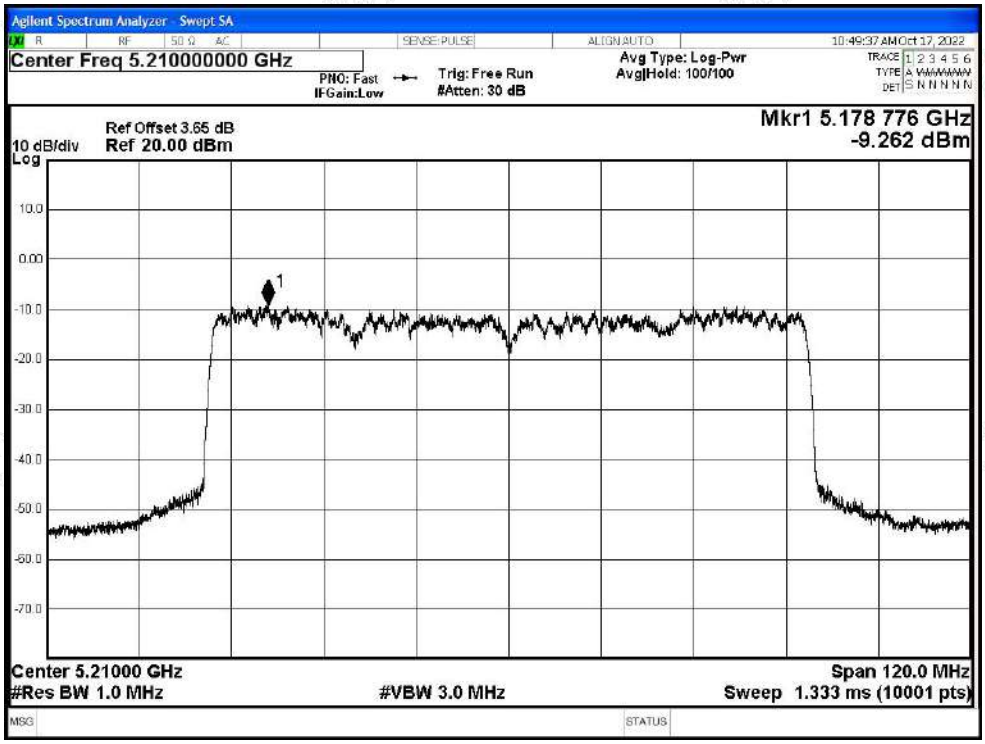

PSD NVNT ax20 5180MHz Ant0

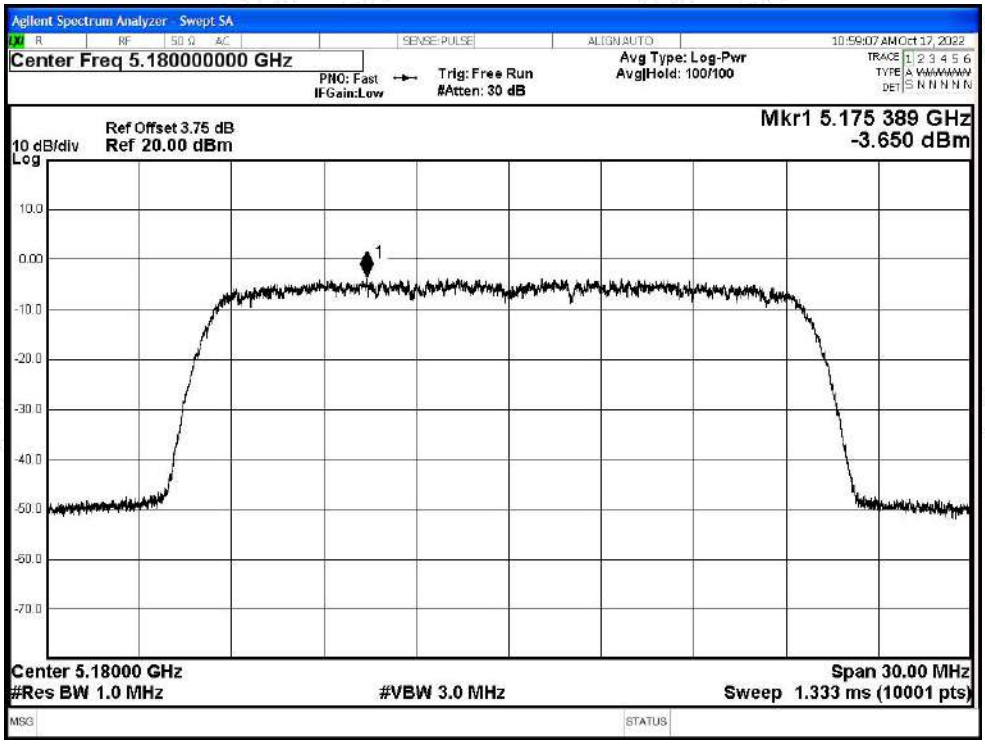

PSD NVNT ax20 5200MHz Ant0

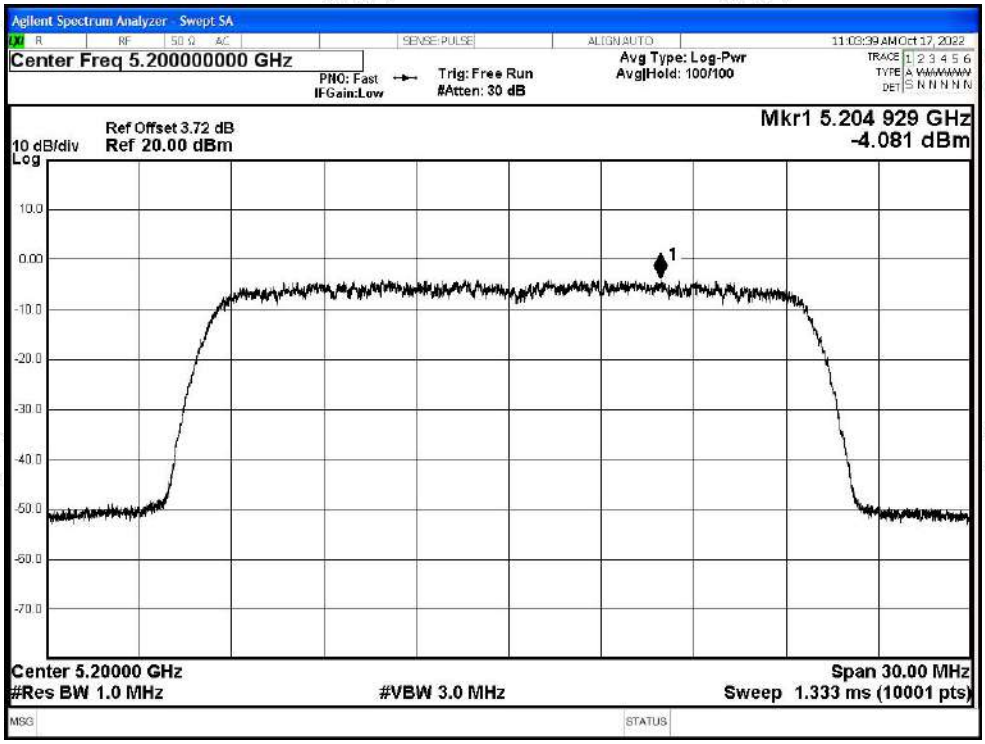

PSD NVNT ax20 5240MHz Ant0

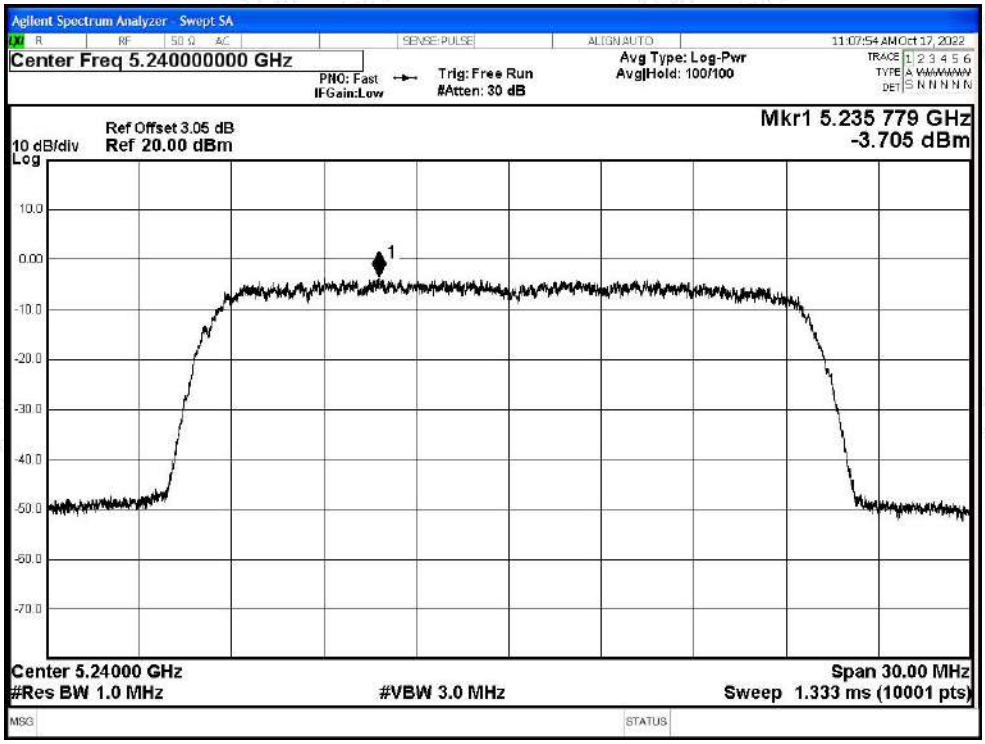

PSD NVNT ax40 5190MHz Ant0

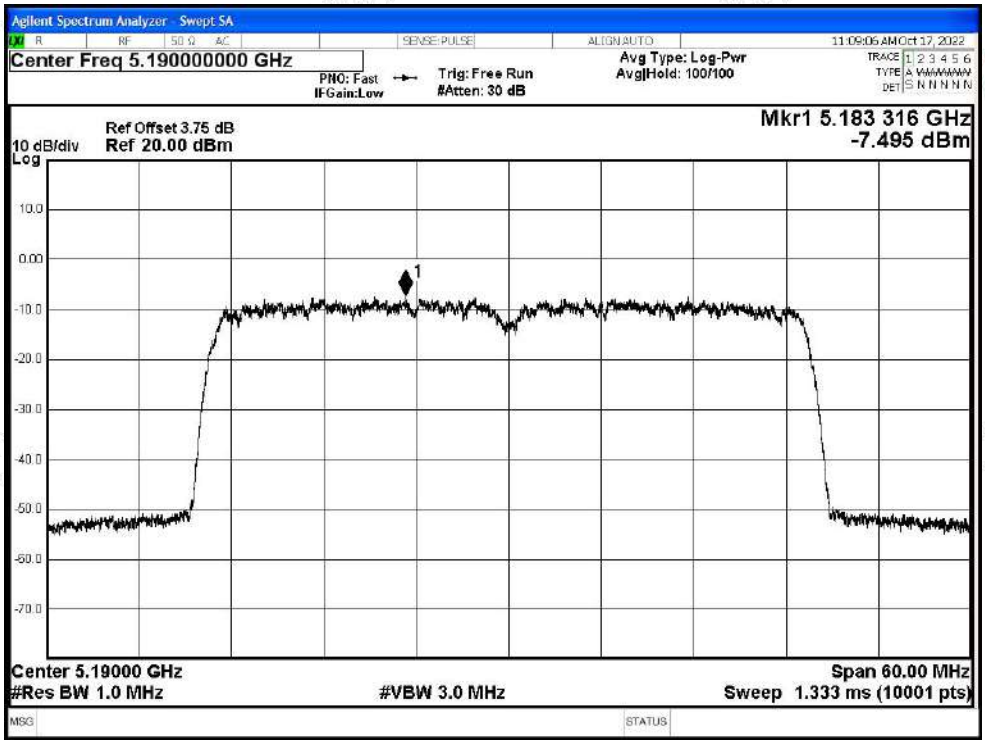

PSD NVNT ax40 5230MHz Ant0

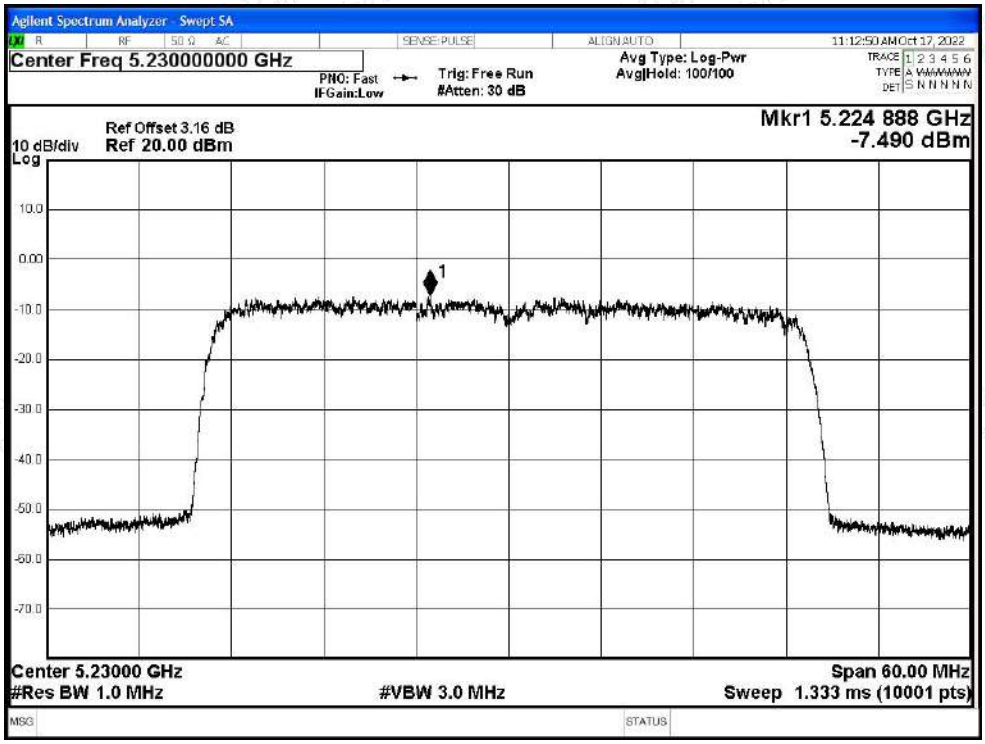

PSD NVNT ax80 5210MHz Ant0

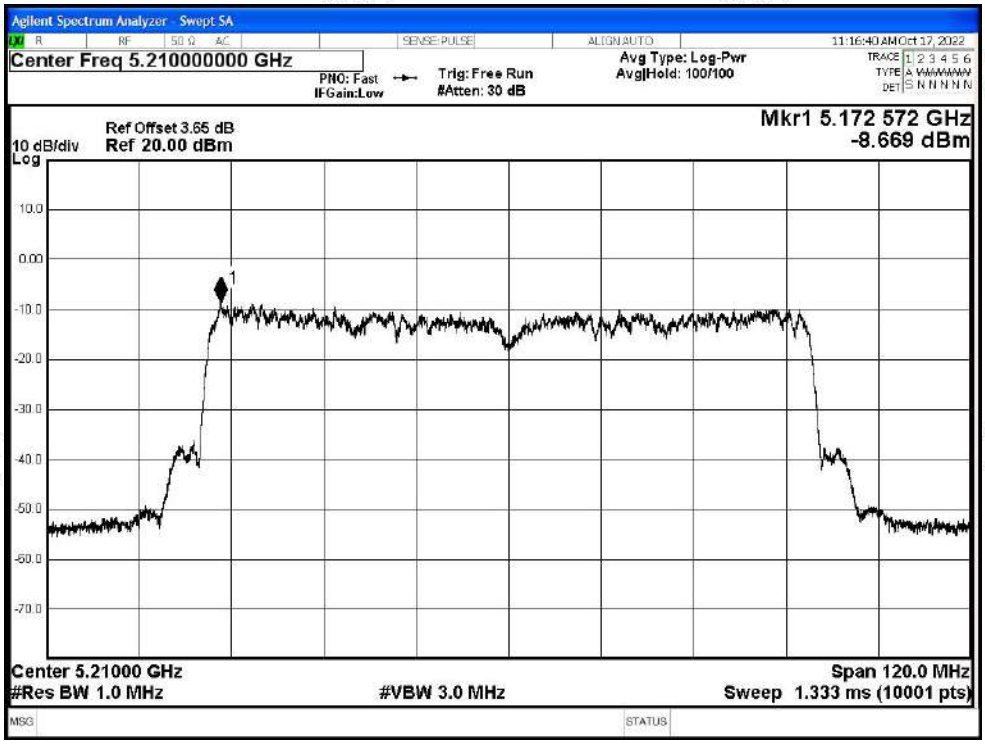

Test Graphs

PSD NVNT a 5180MHz Ant1

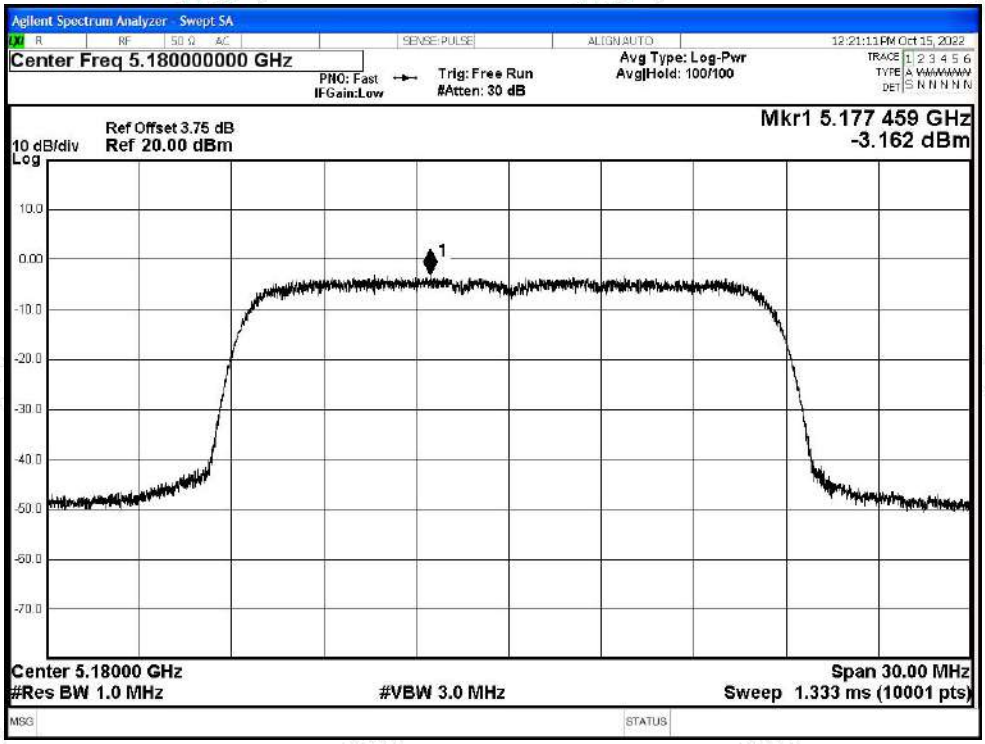

PSD NVNT a 5200MHz Ant1

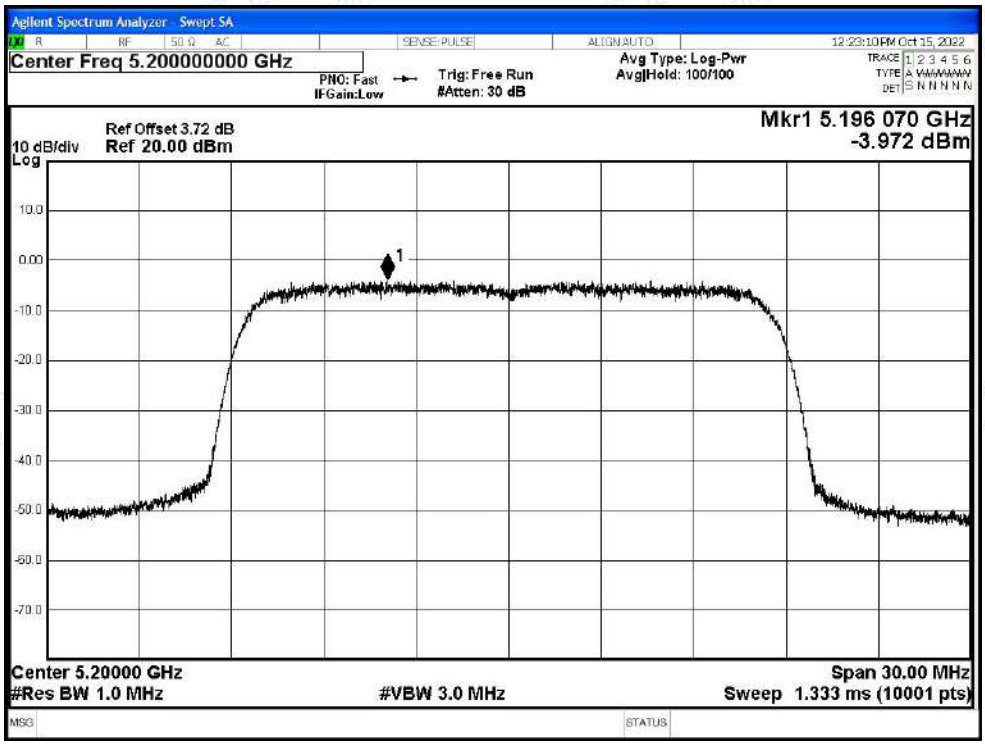

PSD NVNT a 5240MHz Ant1

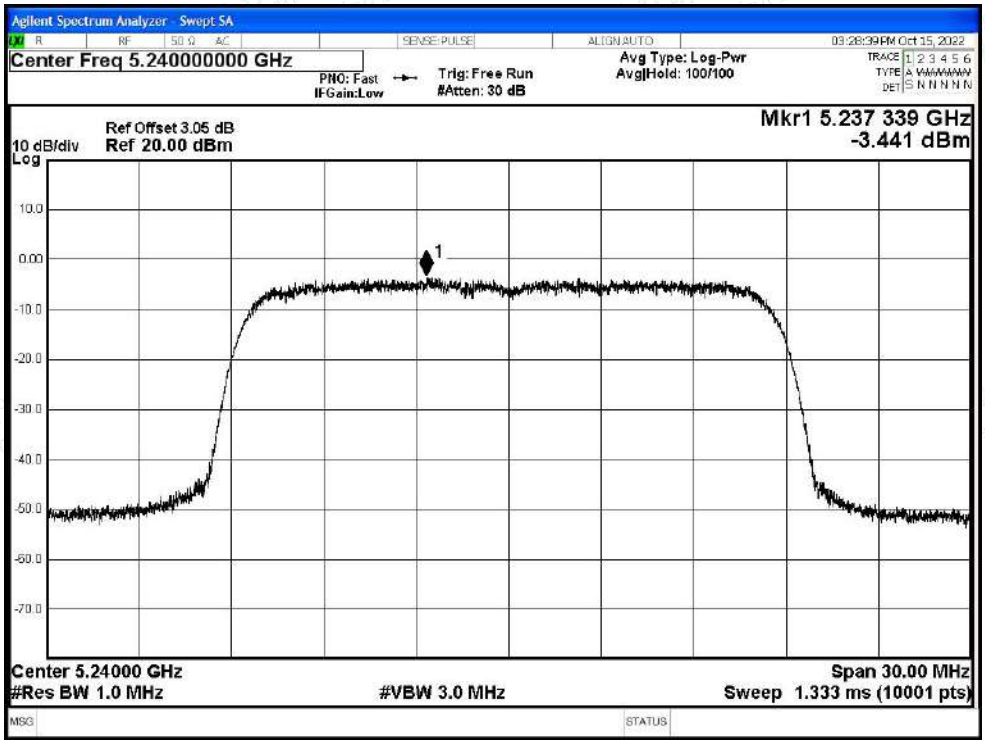

PSD NVNT n20 5180MHz Ant1

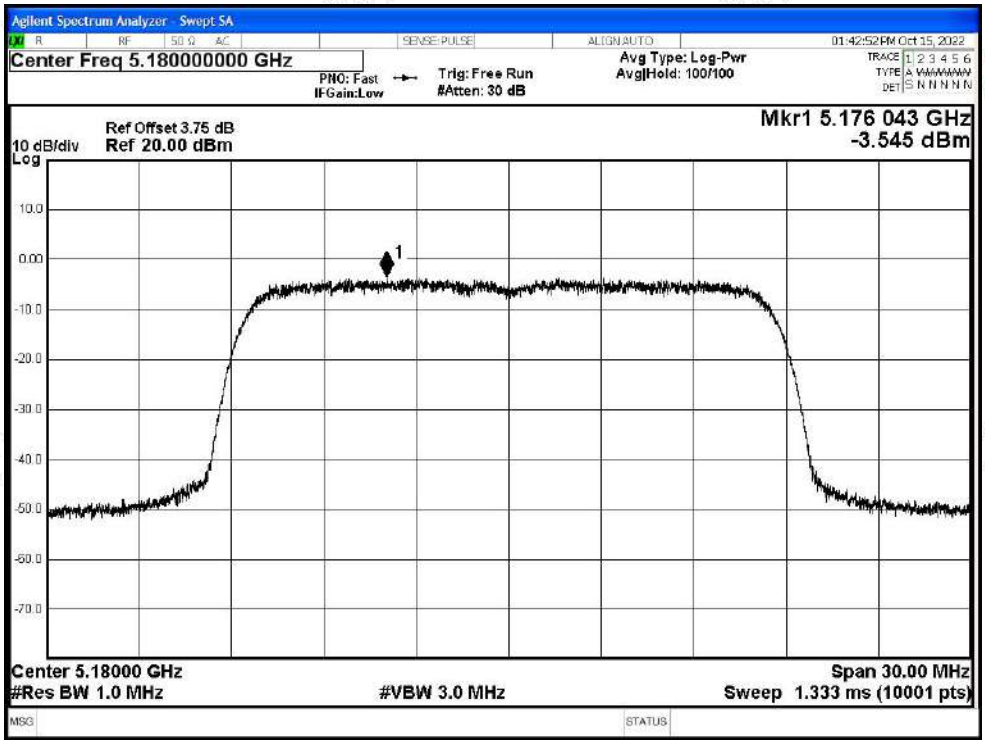

PSD NVNT n20 5200MHz Ant1

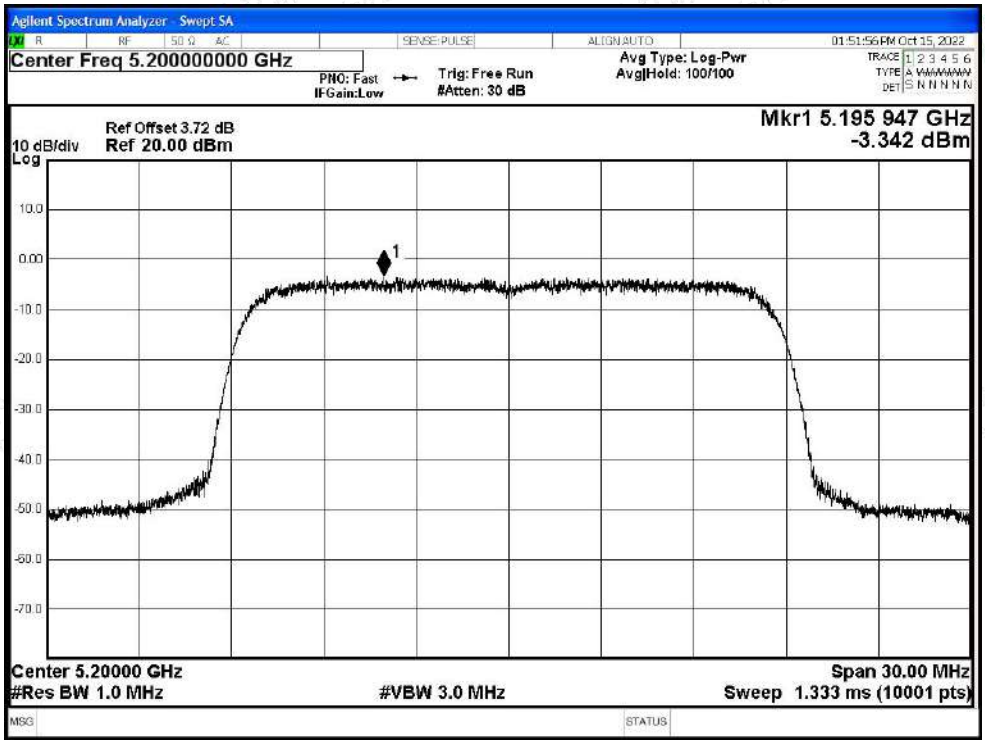

PSD NVNT n20 5240MHz Ant1

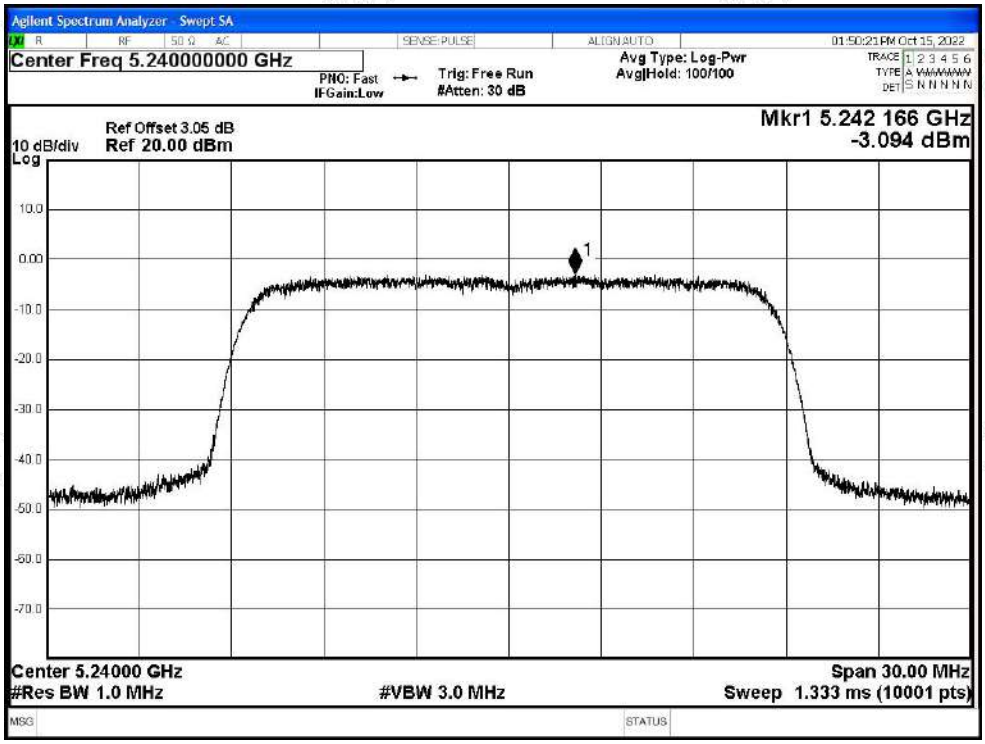

PSD NVNT n40 5190MHz Ant1

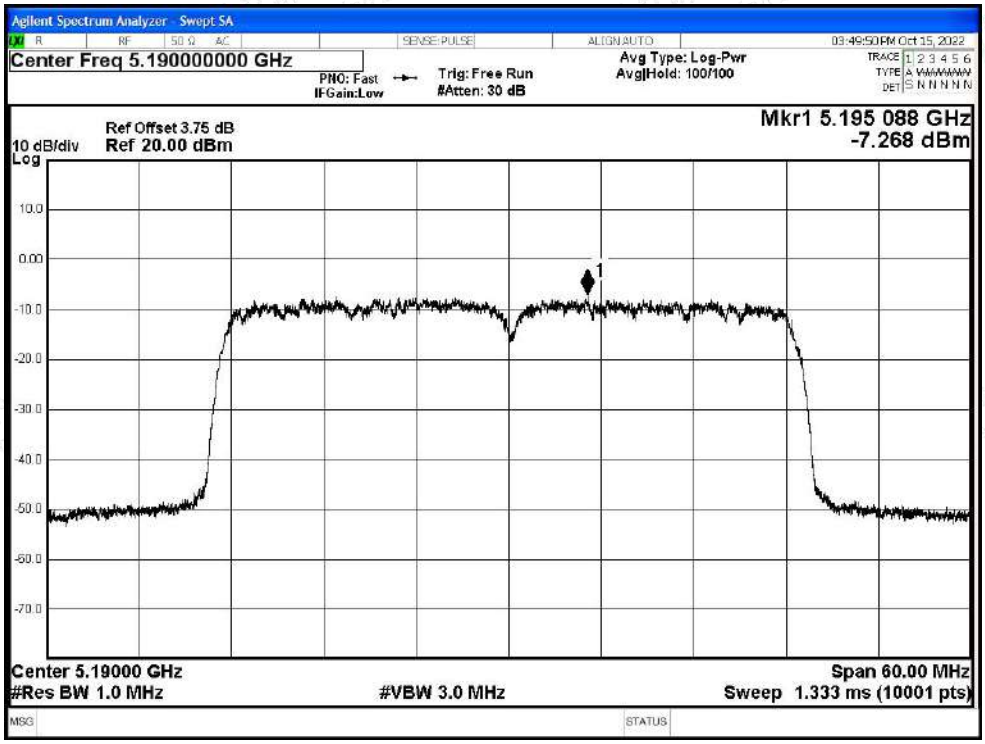

PSD NVNT n40 5230MHz Ant1

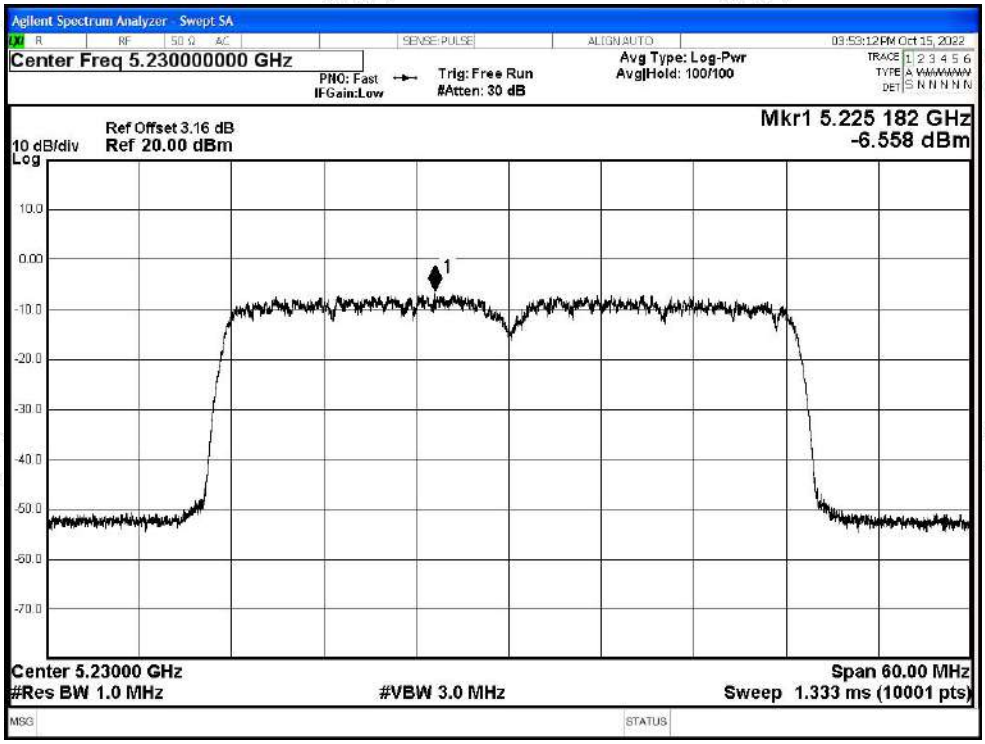

PSD NVNT ac20 5180MHz Ant1

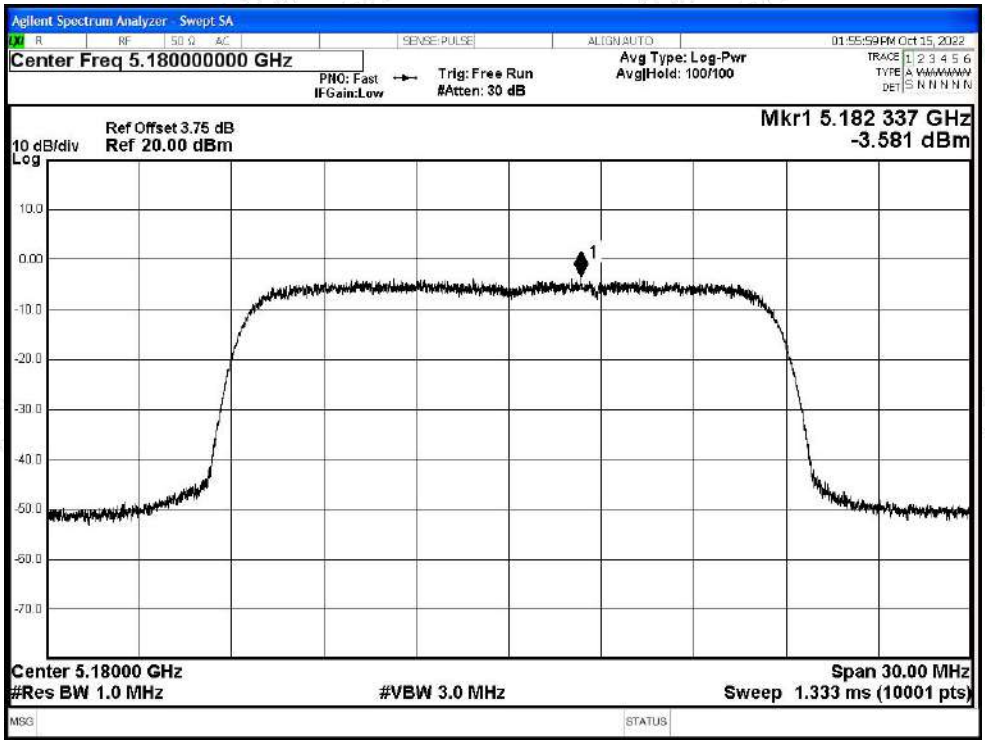
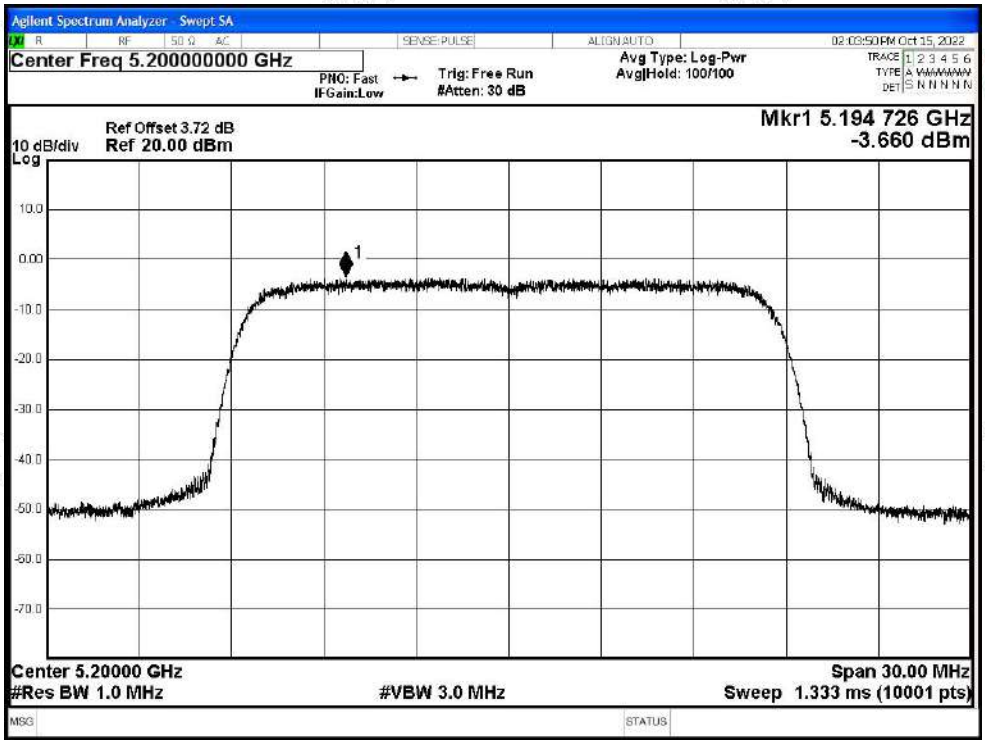
PSD NVNT ac20 5200MHz Ant1