


ASSEMBLY INSTRUCTIONS

Step 5

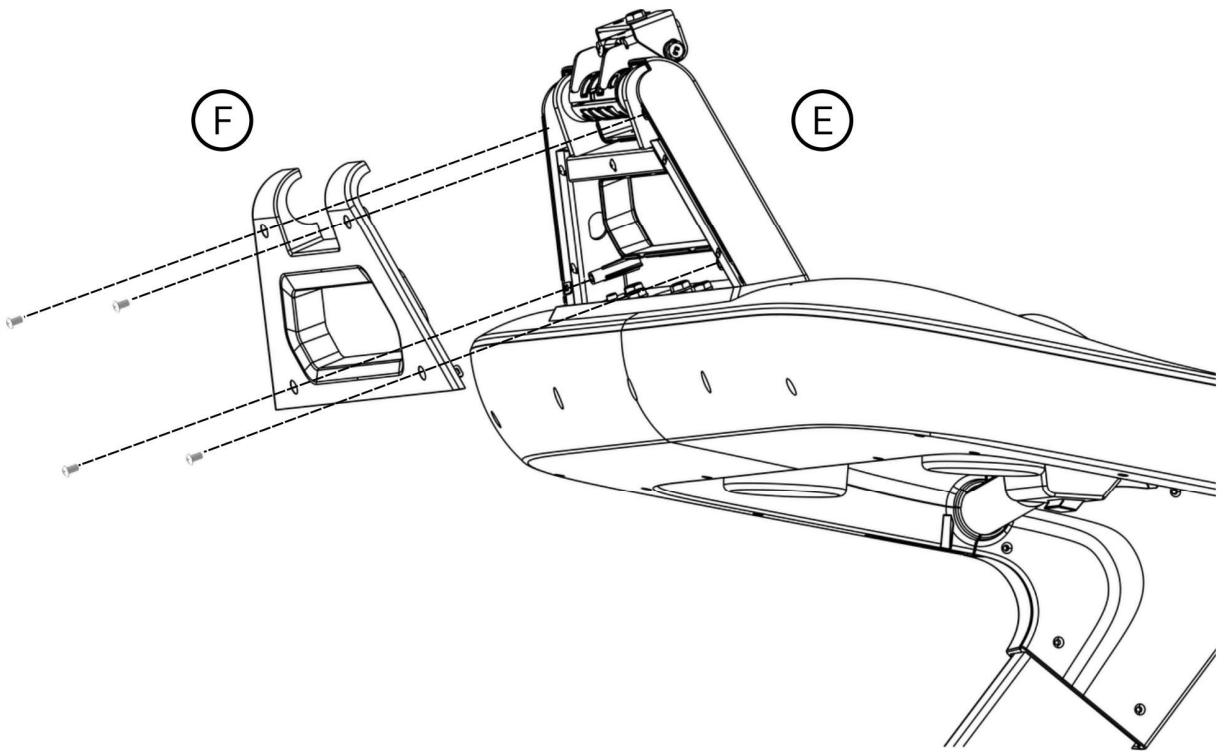

Parts:

(E) (F)

Tools:

(5)


Fasteners:

(F5)

Position the Console Bracket Cover (F) at the back of the Console Bracket (E) and secure it with 4x M5 screws (F5) using the Phillips Screwdriver.

ASSEMBLY INSTRUCTIONS

Step 6 (A)

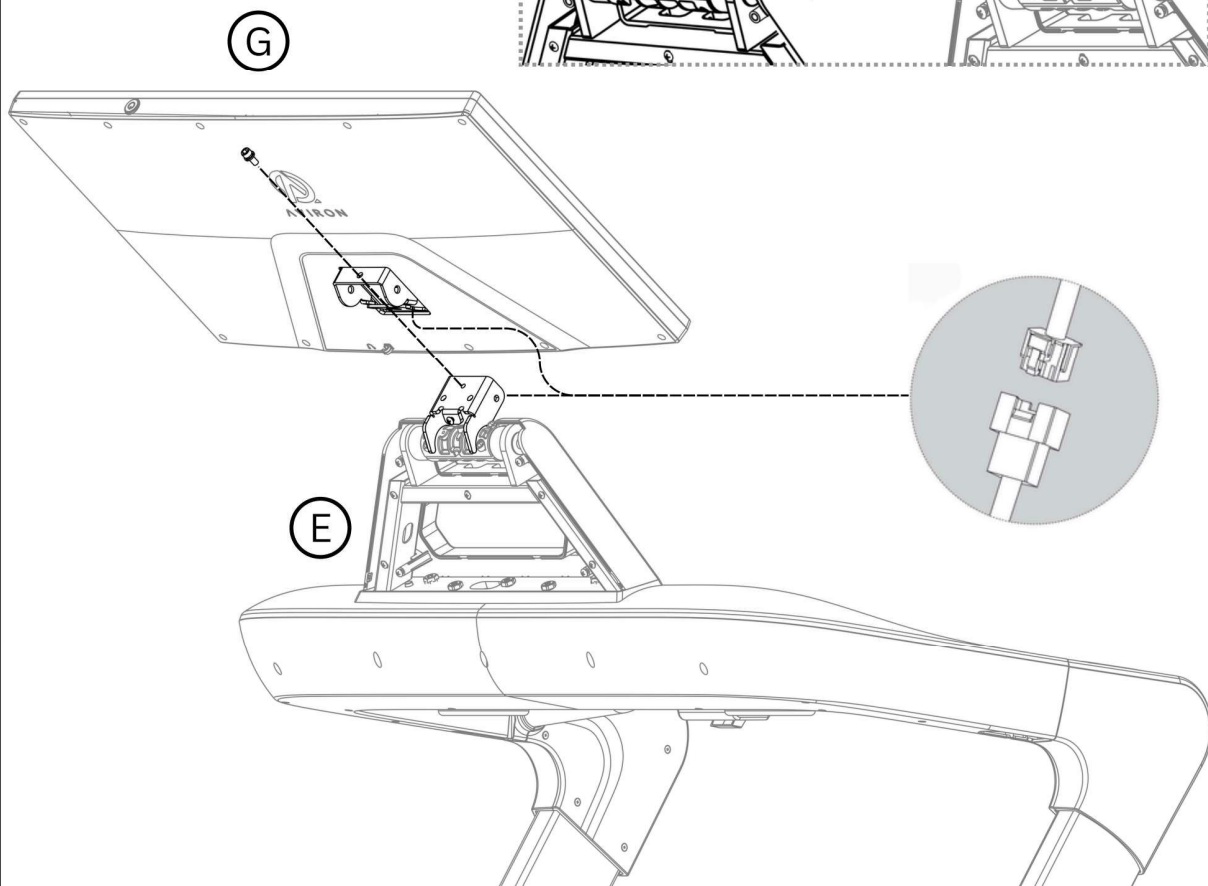

Parts:

(E) (G)

Tools:

(1)

Fasteners:


(F6)

Set the Console (G) onto the Console Bracket (E), then install the M6 bolt (F6) to the top of the assembly using the M5 Allen Key. Connect the internal wires ensuring the wires are properly adjusted inside the bracket groove to prevent pinching.

TIP: To ease the installation, tilt the Console Bracket to its highest angle before installing the Console.

ASSEMBLY INSTRUCTIONS

Step 6 (B)

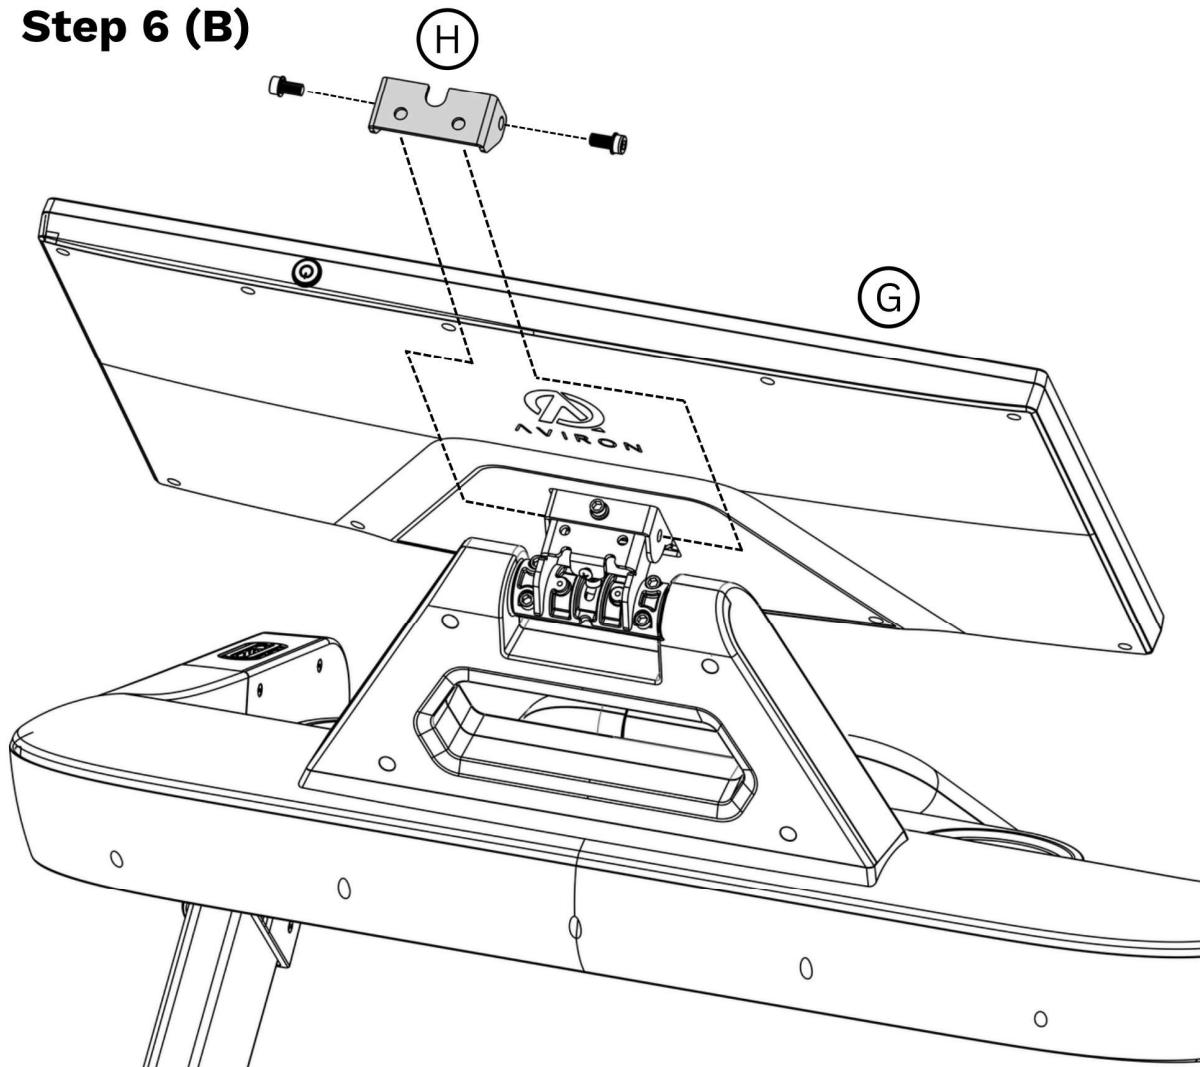

Parts:

(G) (H)

Tools:

(2)

Fasteners:


(F3)

Position the Console Fixing Bracket (H) over the Console Bracket, align all the holes, and install 2x M8 bolts (F3) to the sides using the M6 Allen Key.

NOTE: For easier assembly, start by tightening all screws halfway, beginning with the side screws before moving on to the top ones. Once all screws are in place, tighten them fully.

ASSEMBLY INSTRUCTIONS

Step 6 (C)

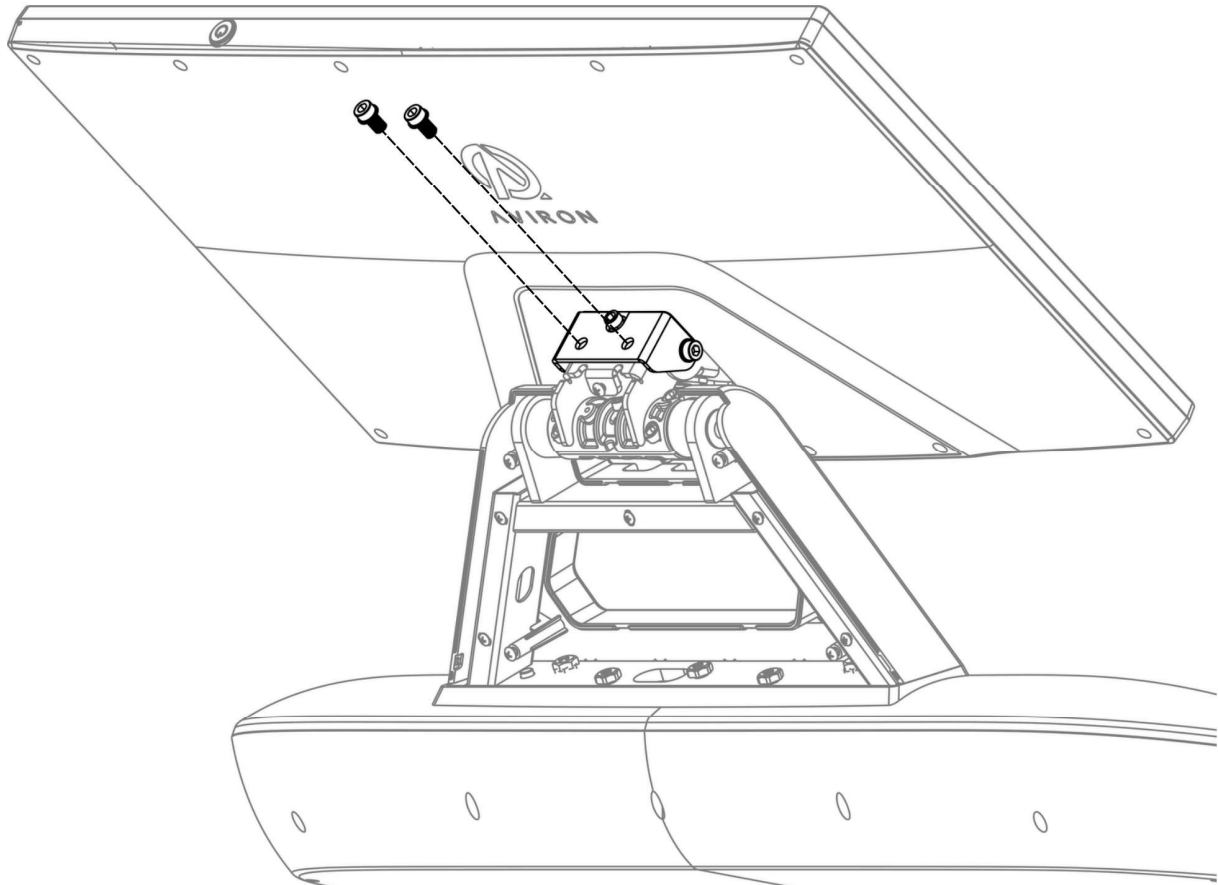

Parts:

Tools:

Fasteners:

(2)


(F3)

Finish the assembly by installing 2x M8 bolts (F3) to the top using the M6 Allen Key .

NOTE: For easier assembly, start by tightening all screws halfway, beginning with the side screws before moving on to the top ones. Once all screws are in place, tighten them fully.

ASSEMBLY INSTRUCTIONS

Step 7

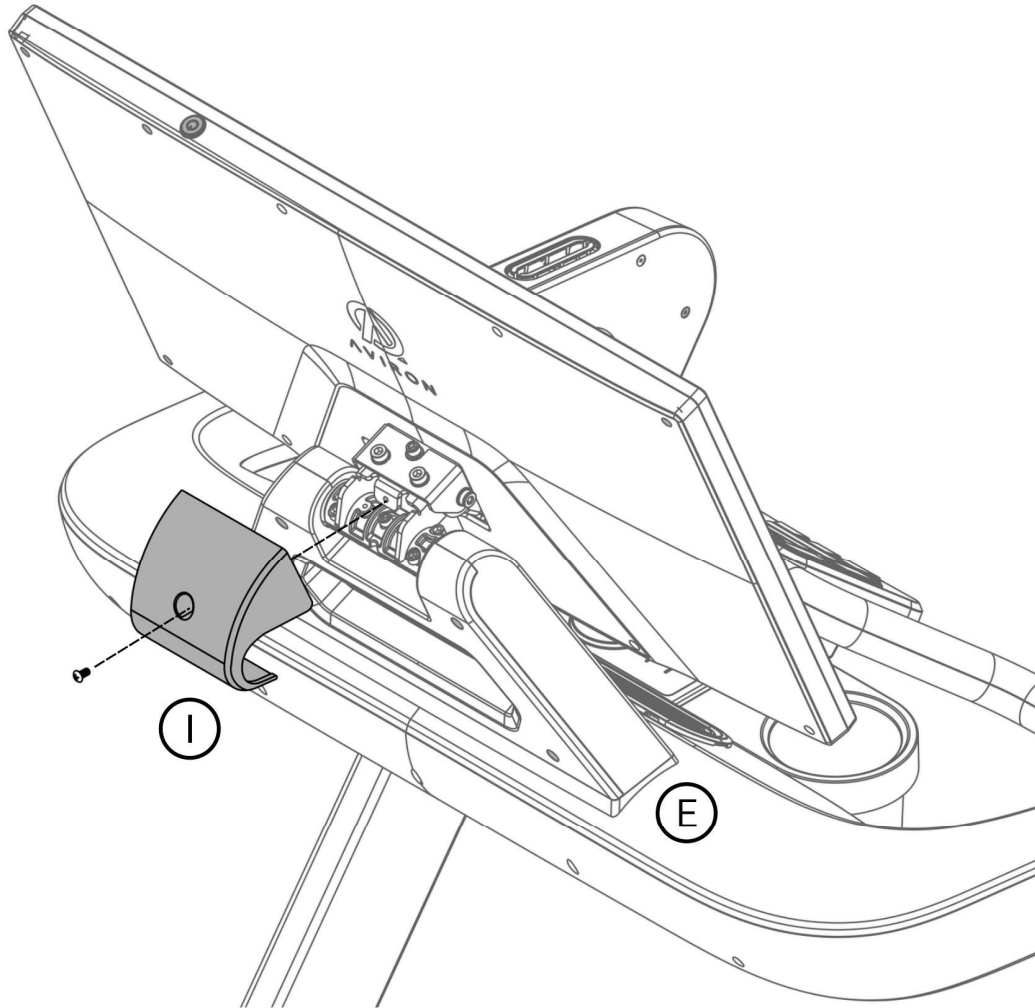

Parts:

(E) (I)

Tools:

(5)


Fasteners:

(F5)

Position the Console Bracket Top Cover (I) over the Console Bracket (E) and secure it with 1x M5 screw (F5) using the Phillips Screwdriver.

ASSEMBLY INSTRUCTIONS

Step 8

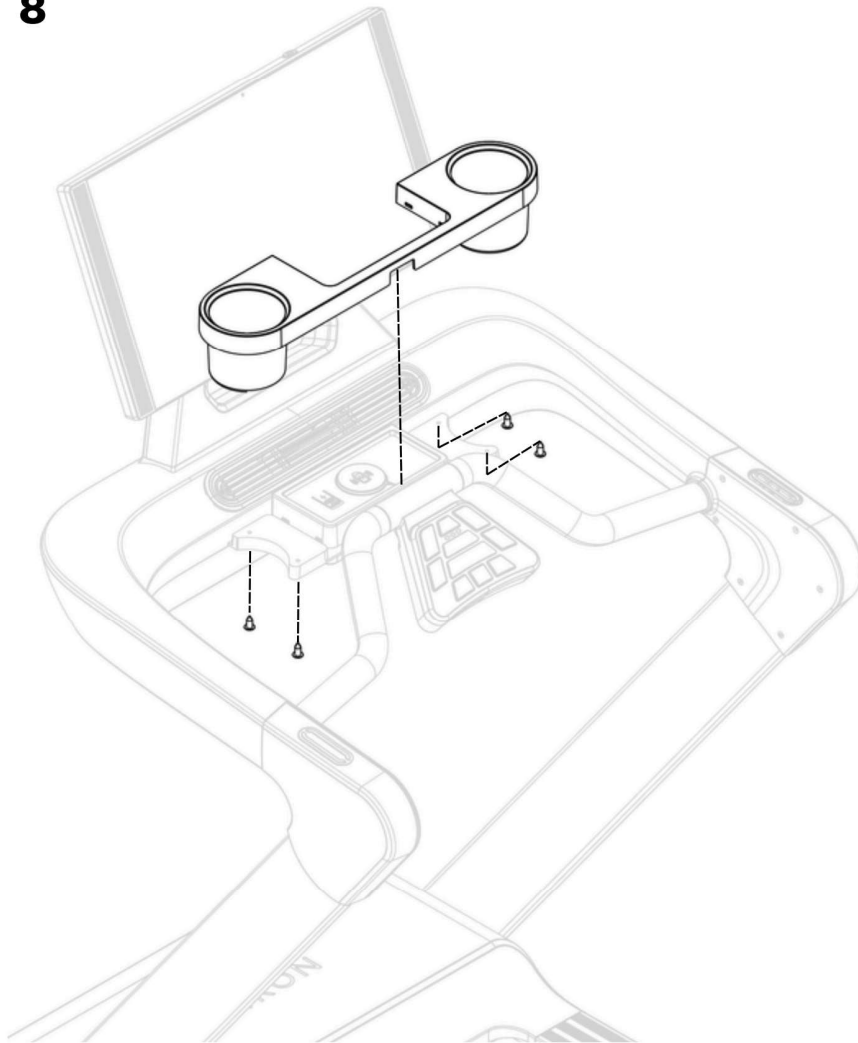

Parts:

(D) (J)

Tools:

(5)


Fasteners:

(F7)

Position the Bottle Holder (J) over the Console Base (D) and secure it with 4x M4 screws (F7) using the Phillips Screwdriver.

ASSEMBLY INSTRUCTIONS

Step 9 (A)

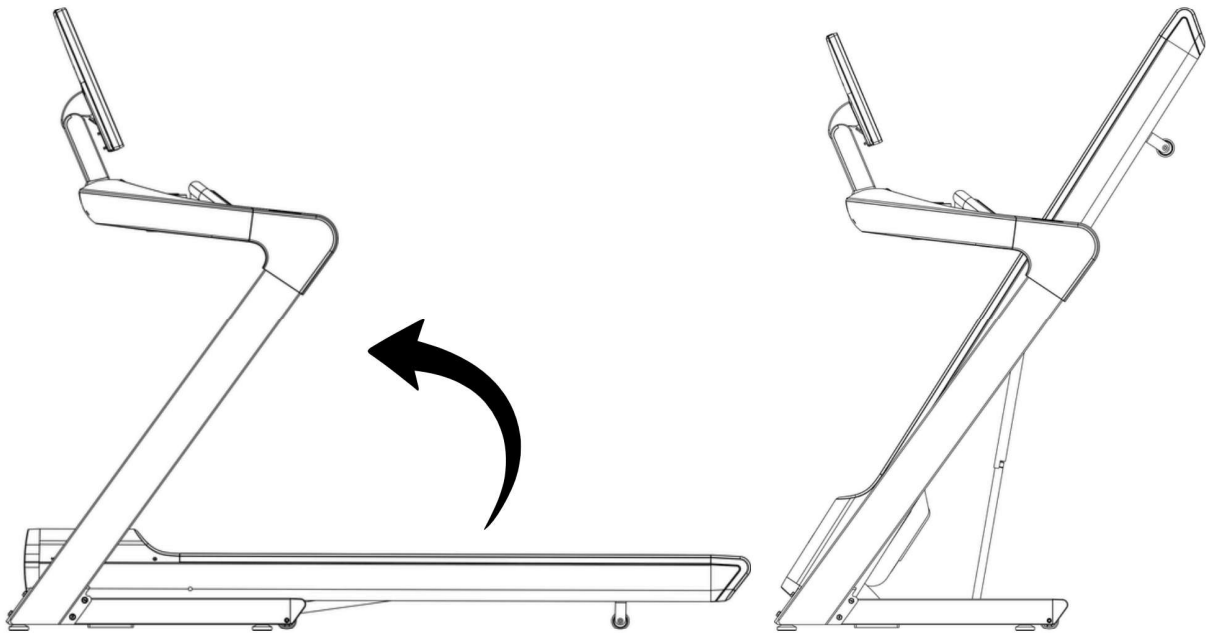

Parts:


Tools:

Fasteners:

Lift the rear end of the deck with both hands to the folded position. The deck is fully folded when the lock pin engages and locks in place.

ASSEMBLY INSTRUCTIONS

Step 9 (B)

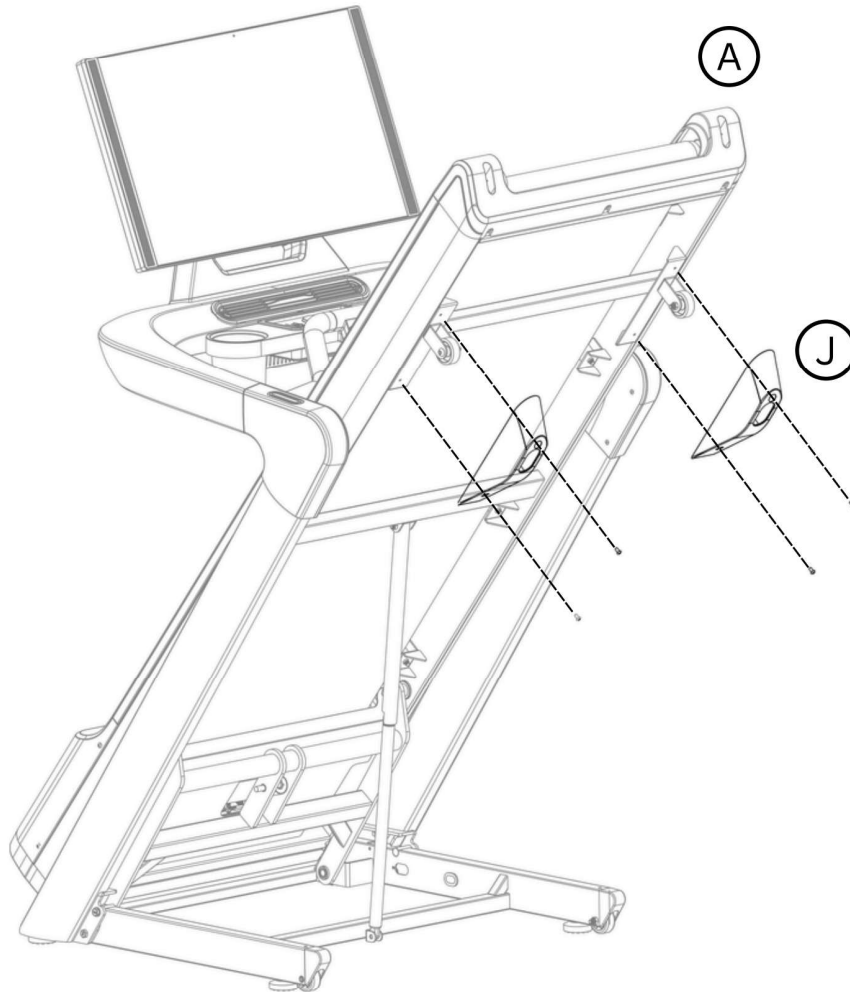

Parts:

(A) (J)

Tools:

(5)


Fasteners:

(F5)

Position the Rear Wheel Cover (J) over the wheels at the rear of the Main Frame (A), then secure with 4x M5 screws (F5) using the Phillips screwdriver.

ASSEMBLY INSTRUCTIONS

Step 8 (C)

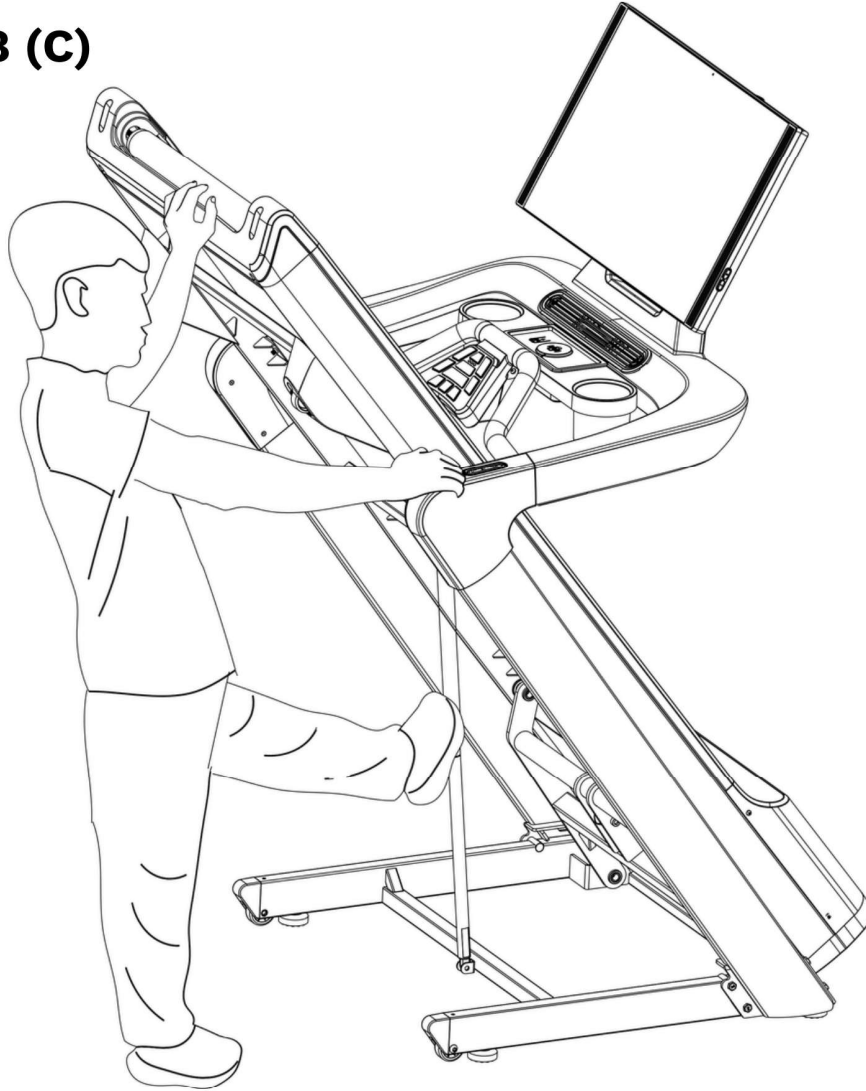

Parts:

Tools:

Fasteners:


To release the deck from the folded position, hold it firmly with one hand and gently press the release mechanism shown in the callout to disengage the locking pin. Once disengaged, the piston will lower the deck to the ground automatically. Release your hand once the deck begins moving down.

CONNECTING TO A NETWORK

Once the treadmill is assembled, you can connect to your network by plugging an Ethernet cable into the port located at the rear of the console, or you can follow the instructions below for Wi-Fi connection.

Note: For commercial memberships, follow the instructions on "Accessing Admin and System Settings" to log in as an admin and access the system settings.

1. Connect the treadmill to the power cable via the power plug then flick the switch to the I position. The console will power on automatically.

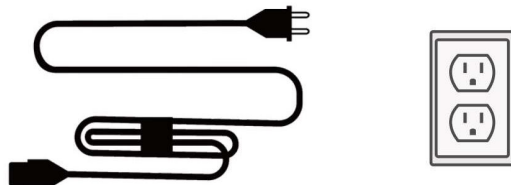

2. Select the gear icon located at the bottom left of the screen.



3. Select "WIFI SETTINGS".

