

HONG KONG RETEKESS CO.,LIMITED

Product Technical Specifications

Approval Certificate

APPROVAL SHEET

品名規格 Specification: 15/0.08 25MM

物料編號 Material NO: 30905-0024-00

送樣日期 Sent Sample Date:2026-08-24

承認日期: Approved Date: 2026-08-24

LiXiang admittamce table(Signature&Chop):

製錶 Designed by	審核 Checked by	核准 Approved by
林秀	刘灿模	余赋成

Customer admittamce table(Signature&Chop)

製錶 Designed by	審核 Checked by	核准 Approved by

公司地址 Add:

FLAT/RM 1019B 10/F LIVEN HOUSE NO.61-63 KING YIP STREET KWUN TONG KL

電話 Tel: 0755- 85289923

傳真 Fax: 85289923

業務聯繫人 Business Contactor: 余生

HONG KONG RETEKESS CO.,LIMITED

15/0.08 25mm Enameled Wire

Specifications:

1. Electrical properties: (15C/Ø0.08)*1C; resistance $\leq 0.55 \Omega/m$
2. Flexing/swing test:
 - a. Weight: 200g; b. Angle: $\pm 65^\circ$; c. Frequency: 30 cycles/minute;
 - d. Lifespan: >2,000 cycles with no electrical abnormalities;
3. Tensile test:
 - 3-1. Wire/Cable: $\geq 1.0\text{kg}$ for 1 minute; no electrical abnormalities;
 - 3-2. Insulation/Jacket: $\geq 1.0\text{kg}$ for 1 minute; no abnormalities;
4. Physical properties:
 - 4-1. Non-migration: 65°C constant temperature / 500g load / 48 hours; no migration or discoloration;
 - 4-2. Hazardous substance standards: Compliant with RoHS (2002/95/EC)


Additional notes:

- Conductor consists of multiple stranded insulated copper wires
- Easy to cut
- Resistant to acids, alkalis, oil, moisture, and mold
- Passes vertical flame retardancy test

Applications

- General electronic and electrical equipment

Illustration

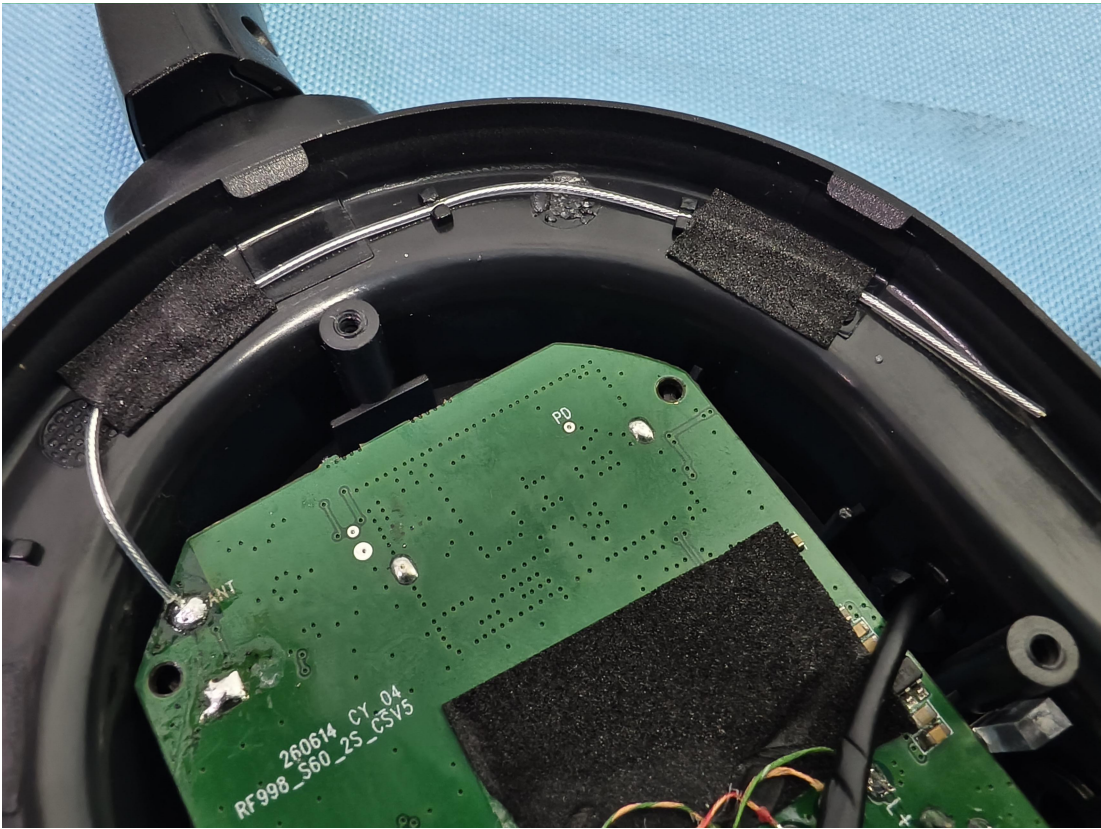

Color	Length	Insulation thickness	Finished outer diameter	Number of strands / Strand diameter	Rubber compound softness
Enamel color	25mm±2mm	0. 2mm	0. 6mm±0. 05mm	15*0. 08	TPEE