


Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

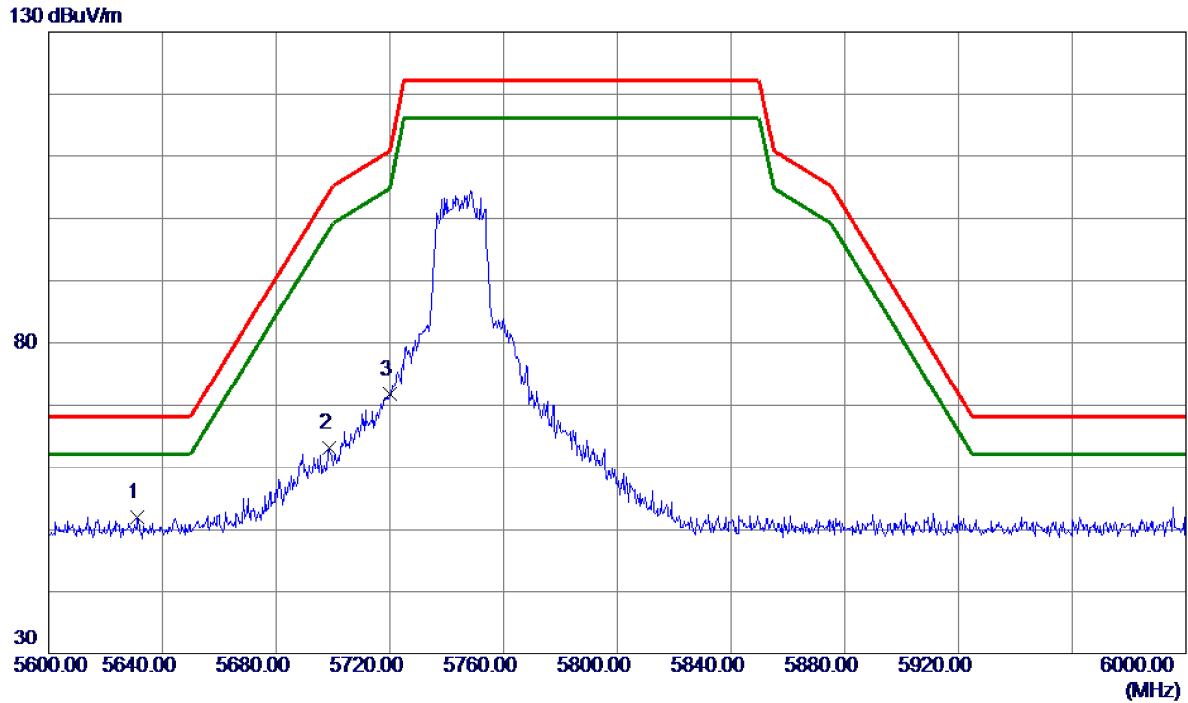

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5631.2000	42.90	9.19	52.09	68.20	-16.11	Peak	
2	5698.6000	53.81	9.30	63.11	104.16	-41.05	Peak	
3	5720.2000	62.39	9.33	71.72	111.26	-39.54	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

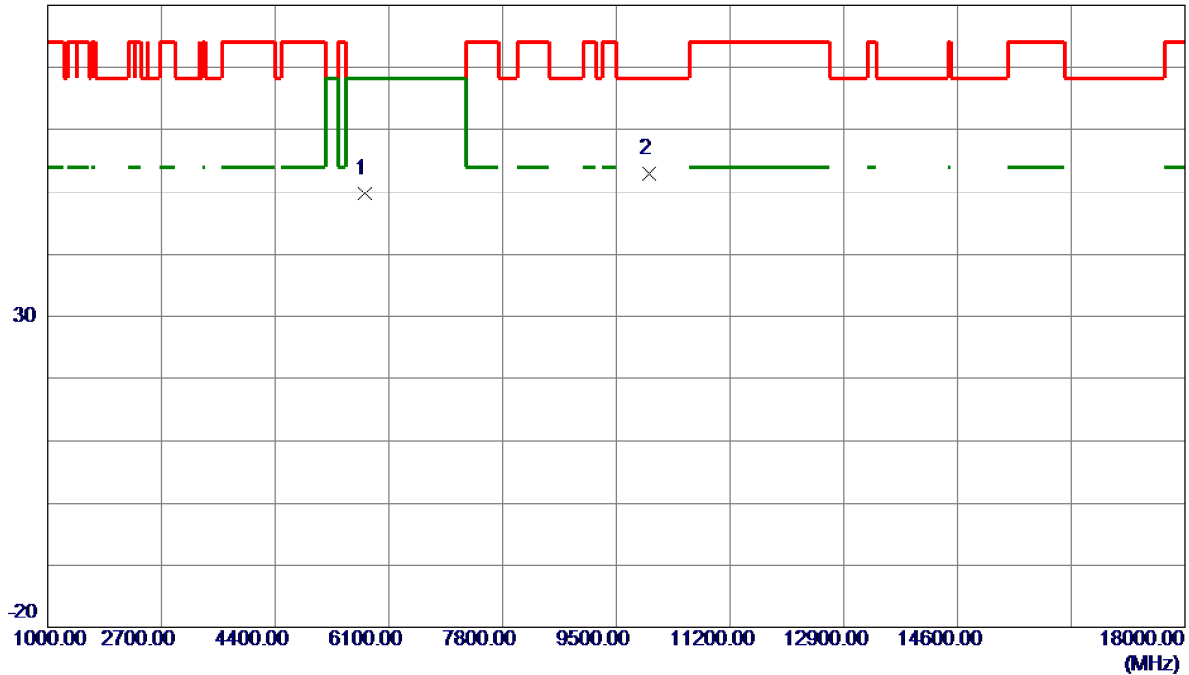


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5745.5500	50.42	-0.63	49.79	68.20	-18.41	Peak	
2 *	9998.9500	48.36	4.68	53.04	68.20	-15.16	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

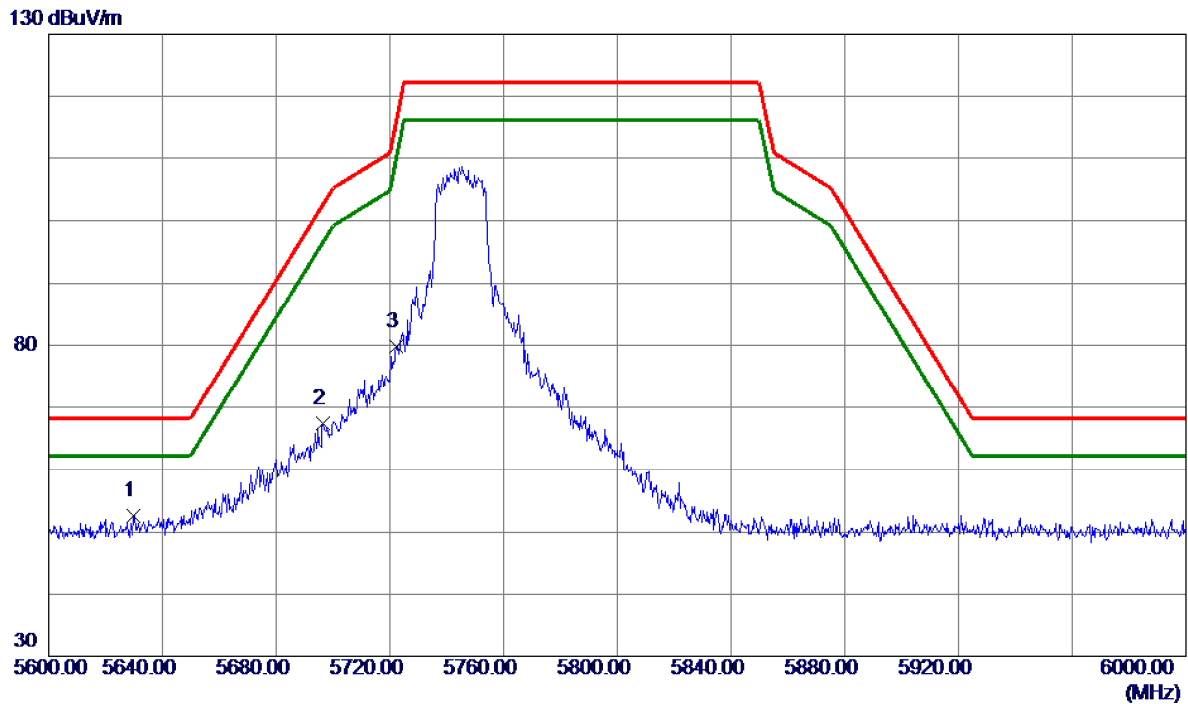

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5629.8000	43.41	9.18	52.59	68.20	-15.61	Peak	
2	5696.6000	58.07	9.29	67.36	102.68	-35.32	Peak	
3	5722.4000	70.44	9.33	79.77	116.27	-36.50	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

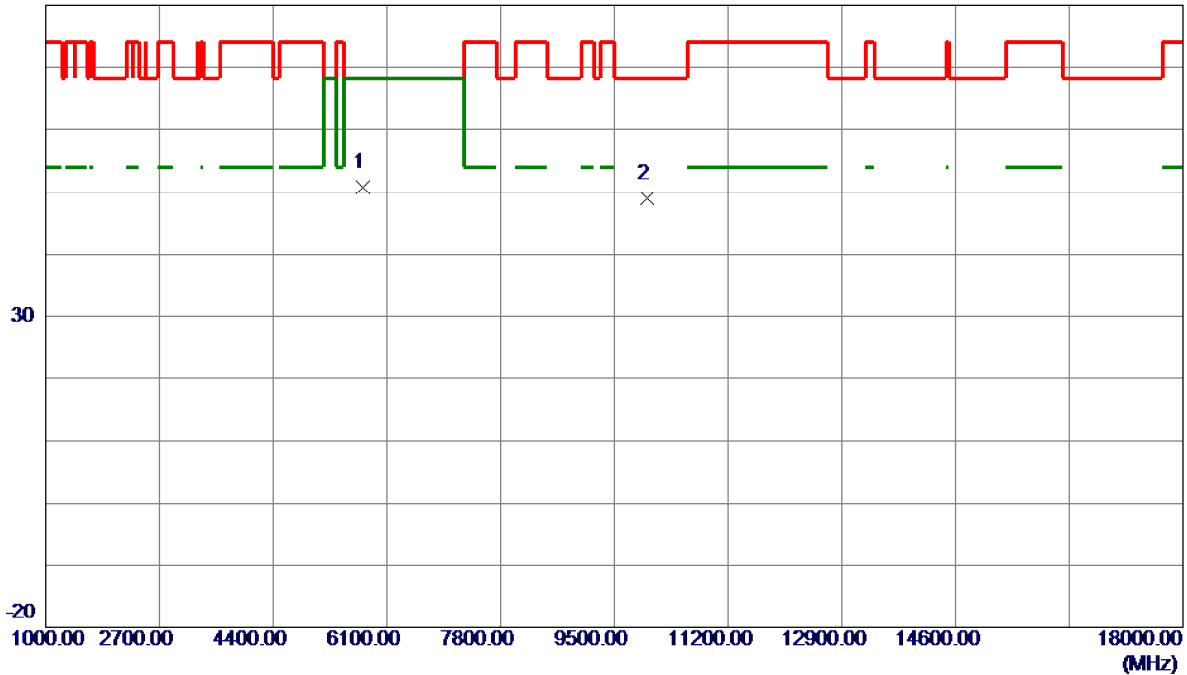

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5746.4000	51.38	-0.63	50.75	68.20	-17.45	Peak	
2	9999.8000	44.33	4.68	49.01	68.20	-19.19	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

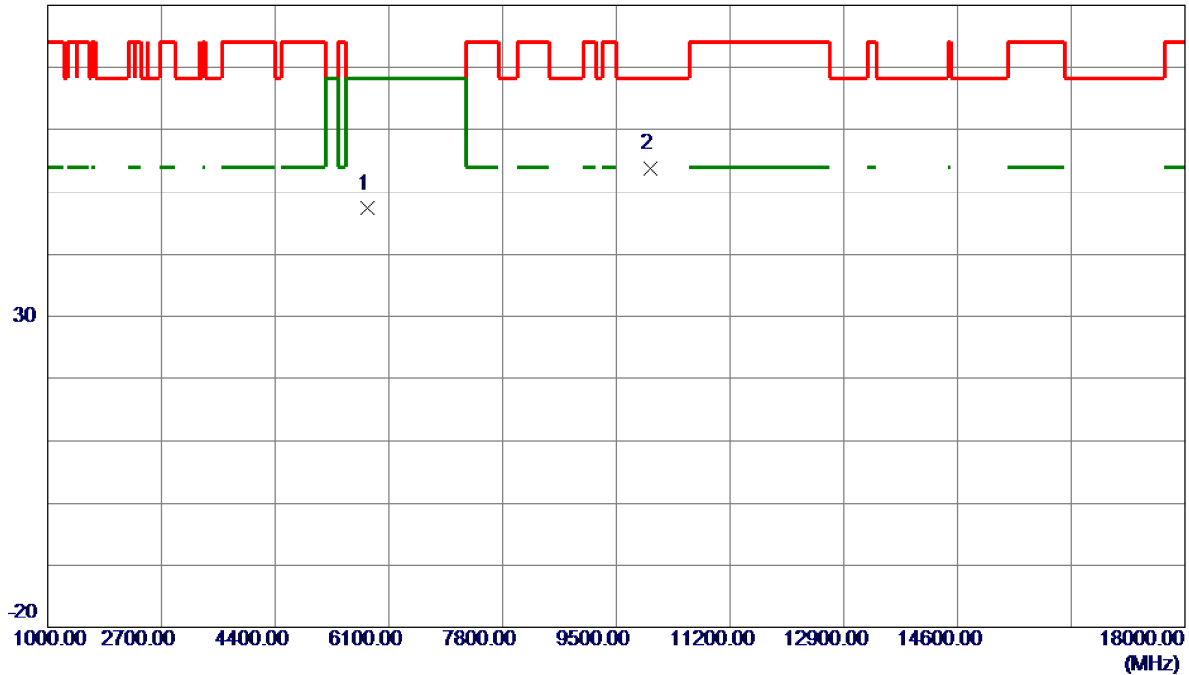

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5784.6500	47.98	-0.56	47.42	68.20	-20.78	Peak	
2 *	10002.3500	49.06	4.68	53.74	68.20	-14.46	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

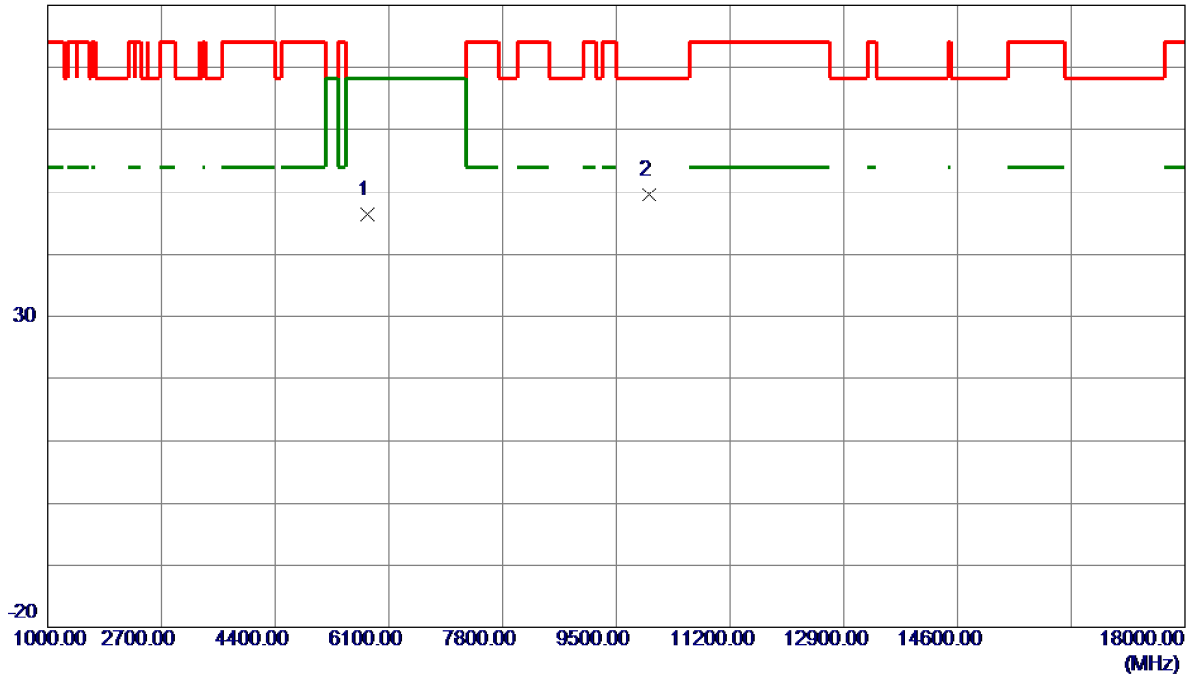

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5783.8000	47.02	-0.56	46.46	68.20	-21.74	Peak	
2 *	9998.9500	44.94	4.68	49.62	68.20	-18.58	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

130 dBuV/m

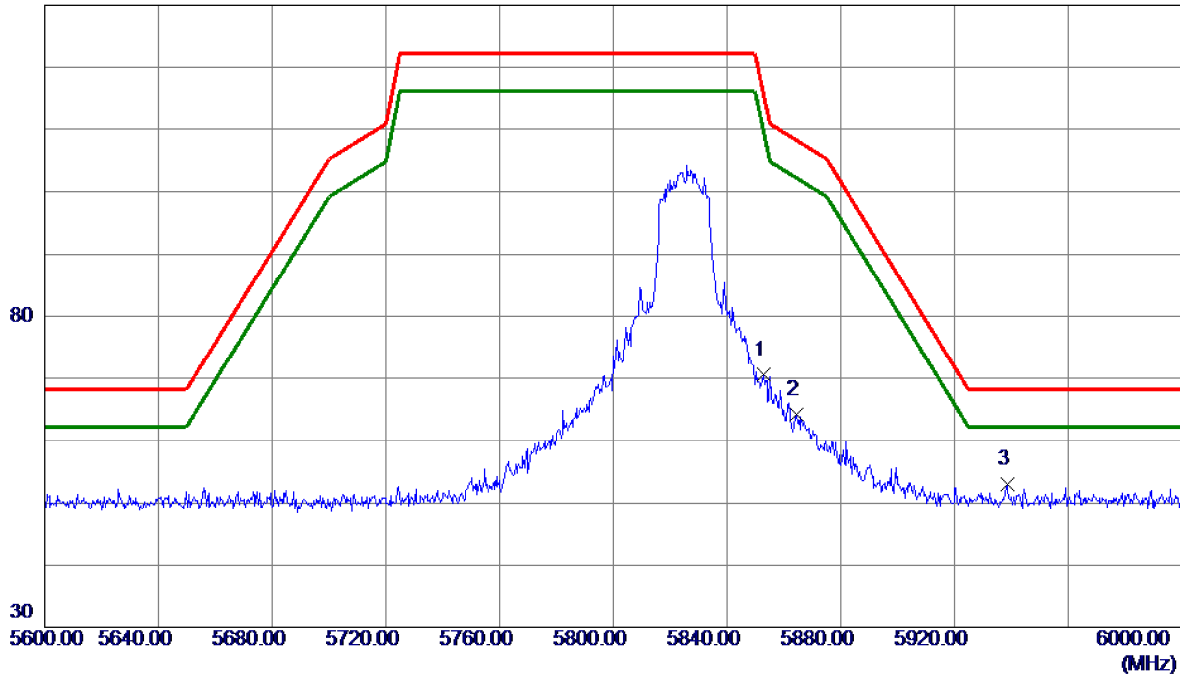

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5852.8000	61.06	9.55	70.61	115.82	-45.21	Peak	
2	5864.4000	54.72	9.57	64.29	108.17	-43.88	Peak	
3 *	5938.6000	43.29	9.69	52.98	68.20	-15.22	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

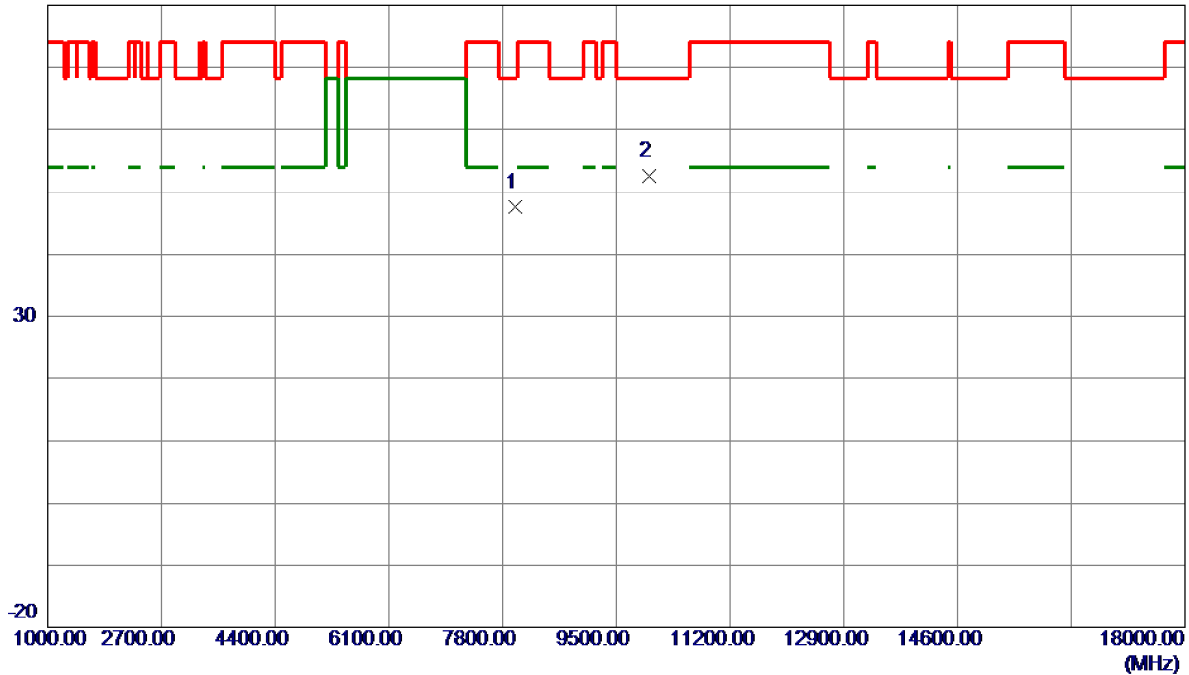

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7995.5000	42.82	4.73	47.55	68.20	-20.65	Peak	
2 *	9999.8000	48.01	4.68	52.69	68.20	-15.51	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

130 dBuV/m

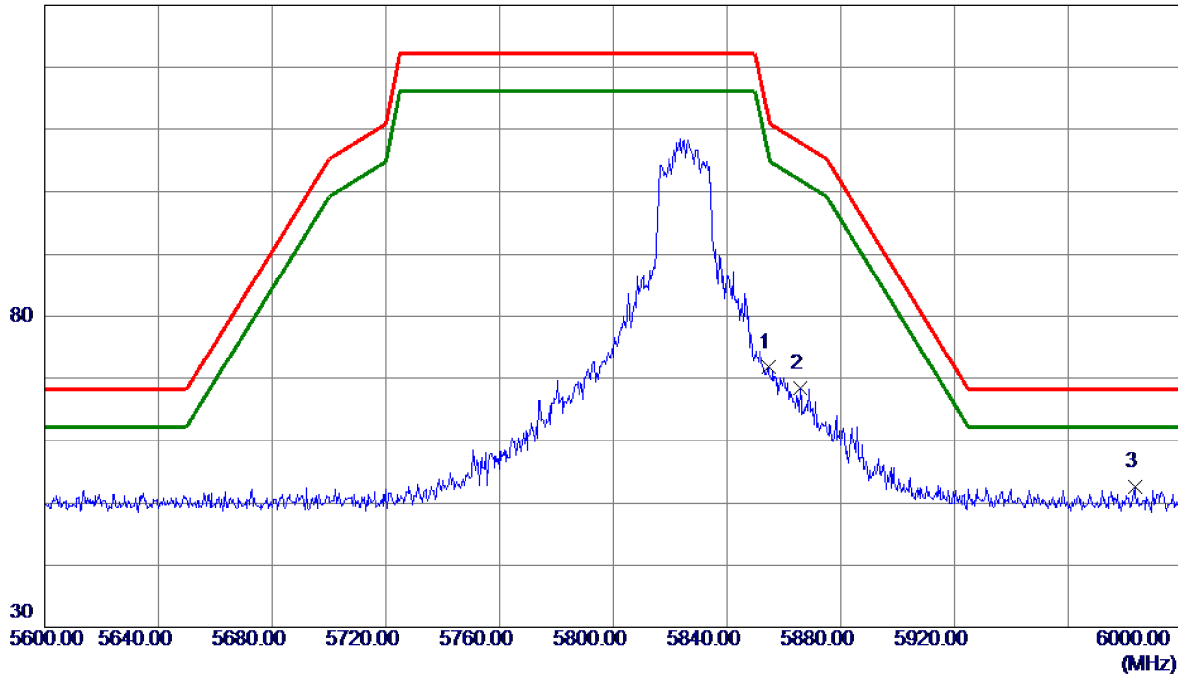

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5854.6000	62.33	9.55	71.88	111.71	-39.83	Peak	
2	5865.6000	58.82	9.57	68.39	107.83	-39.44	Peak	
3 *	5983.4000	42.87	9.76	52.63	68.20	-15.57	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

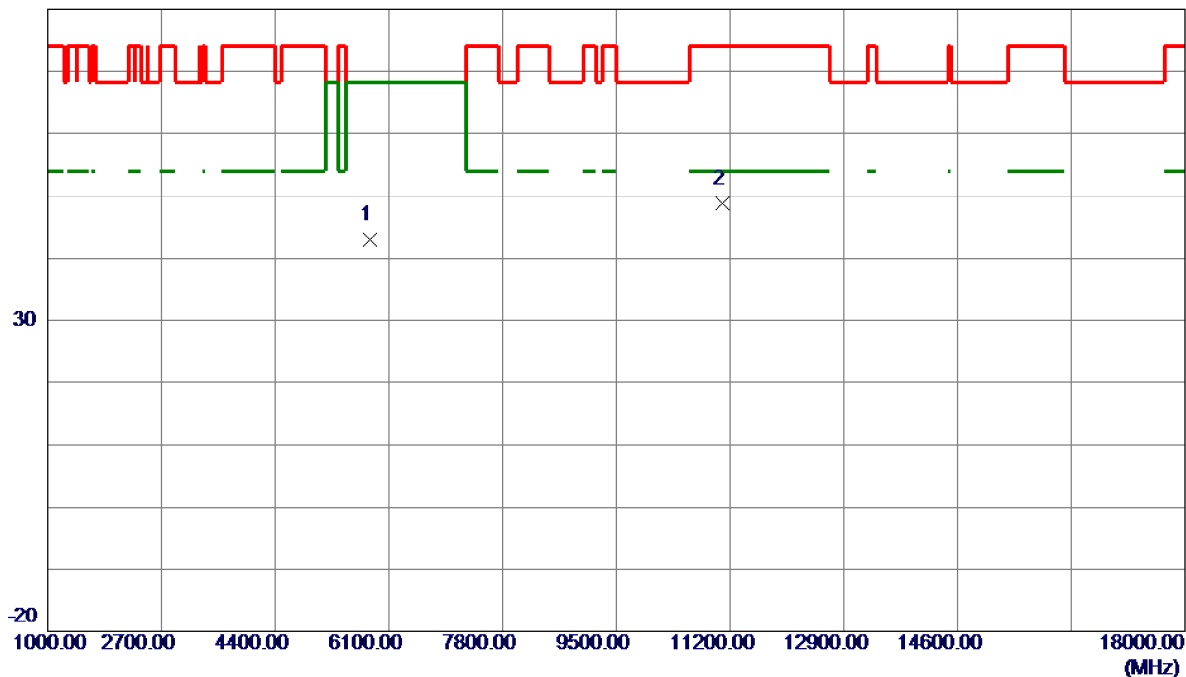


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.3500	43.56	-0.50	43.06	68.20	-25.14	Peak	
2	11090.3500	42.76	6.07	48.83	74.00	-25.17	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

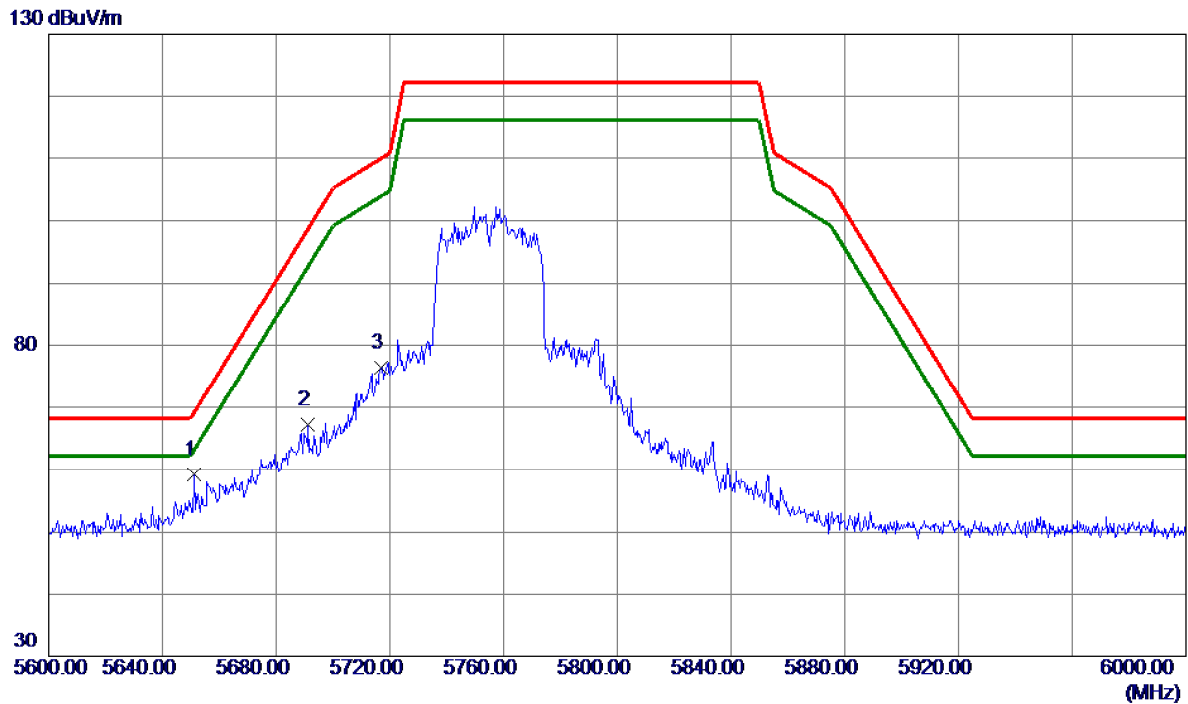

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5651.2000	49.92	9.22	59.14	69.09	-9.95	Peak	
2	5691.2000	57.99	9.28	67.27	98.69	-31.42	Peak	
3	5717.0000	67.06	9.33	76.39	109.96	-33.57	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

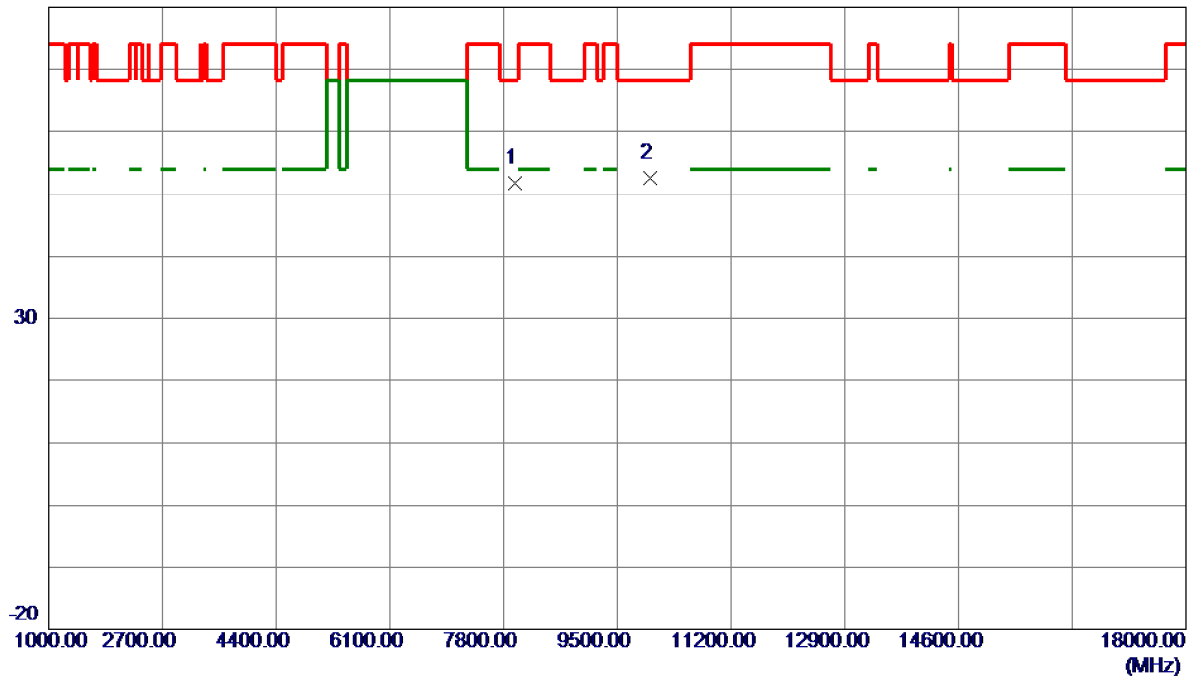


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7971.7000	47.11	4.68	51.79	68.20	-16.41	Peak	
2 *	9998.9500	48.00	4.68	52.68	68.20	-15.52	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

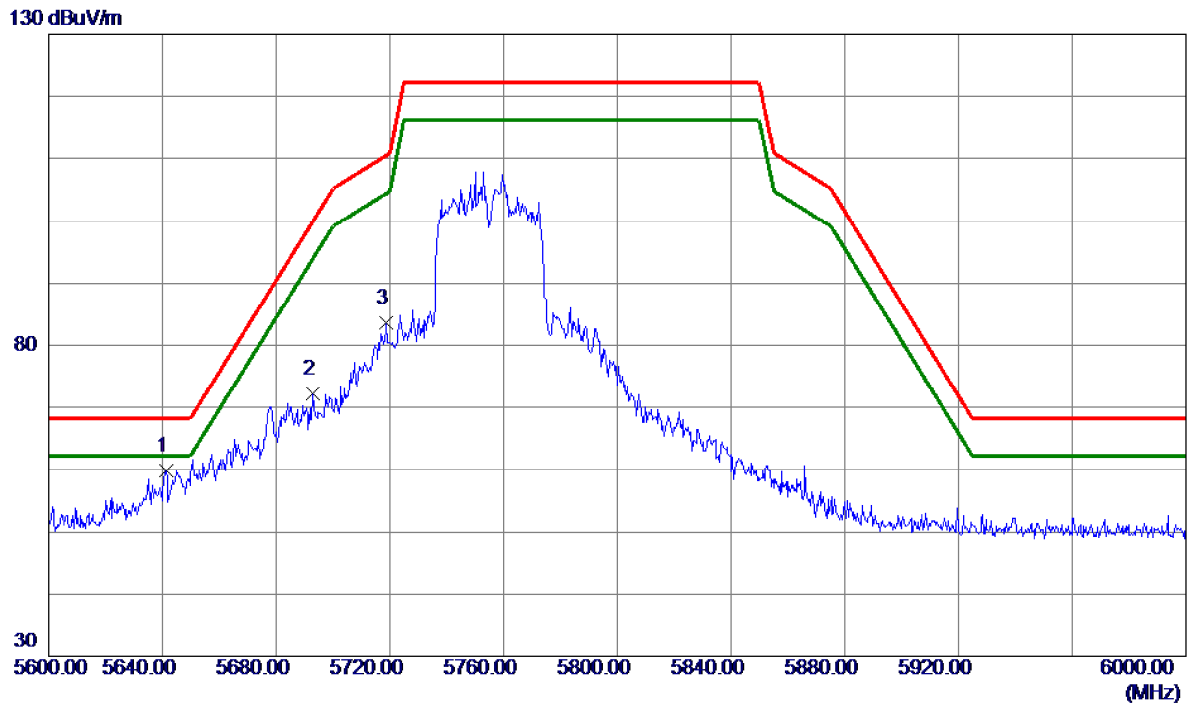

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5641.2000	50.67	9.20	59.87	68.20	-8.33	Peak	
2	5693.0000	62.90	9.29	72.19	100.02	-27.83	Peak	
3	5718.8000	74.31	9.33	83.64	110.46	-26.82	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

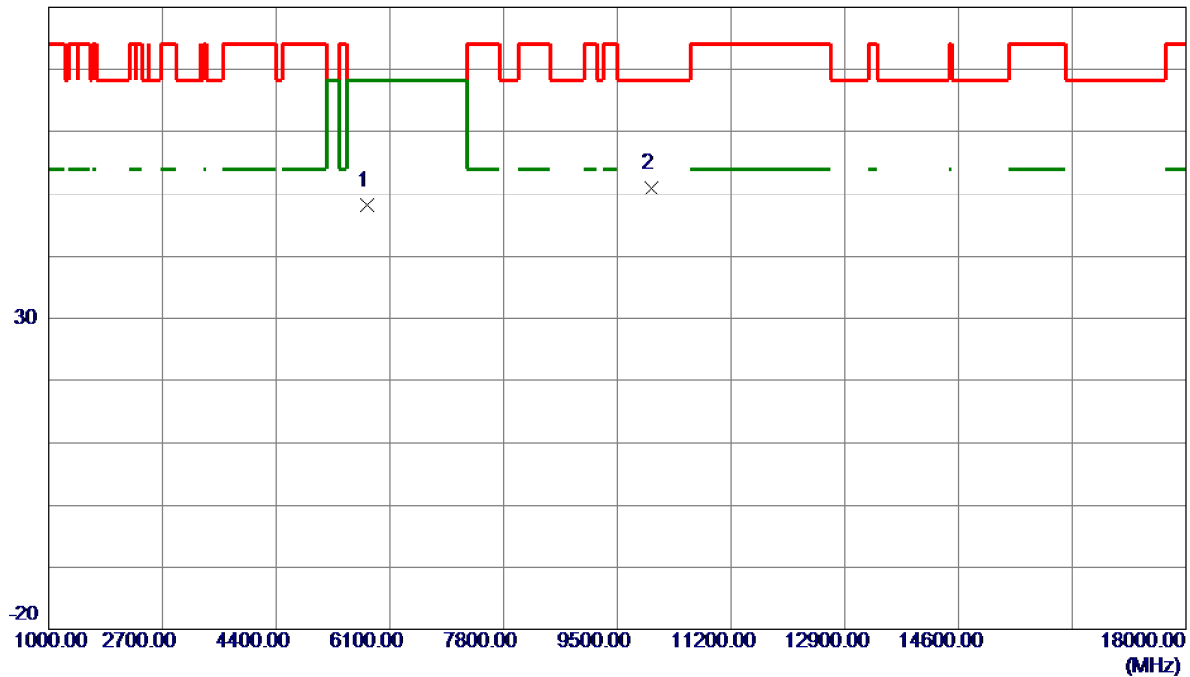


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5750.6500	48.78	-0.62	48.16	68.20	-20.04	Peak	
2 *	10001.5000	46.33	4.68	51.01	68.20	-17.19	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

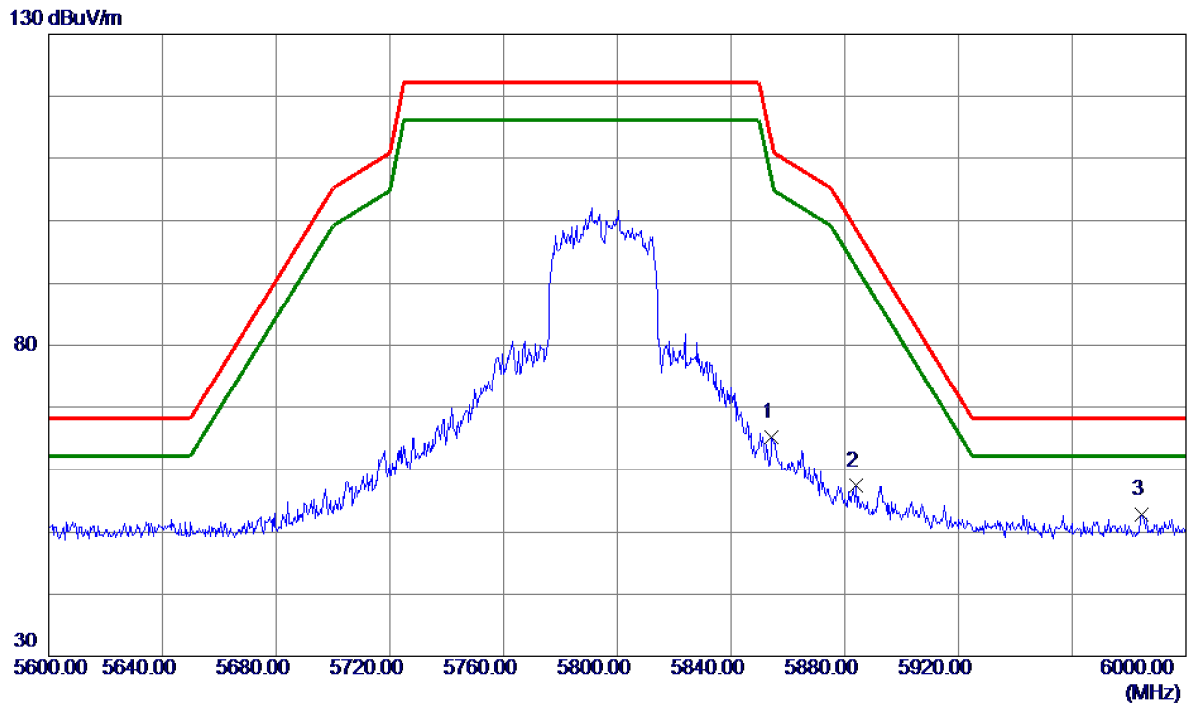

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5854.4000	55.74	9.55	65.29	112.17	-46.88	Peak	
2	5884.0000	47.88	9.60	57.48	98.54	-41.06	Peak	
3 *	5984.6000	42.96	9.76	52.72	68.20	-15.48	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

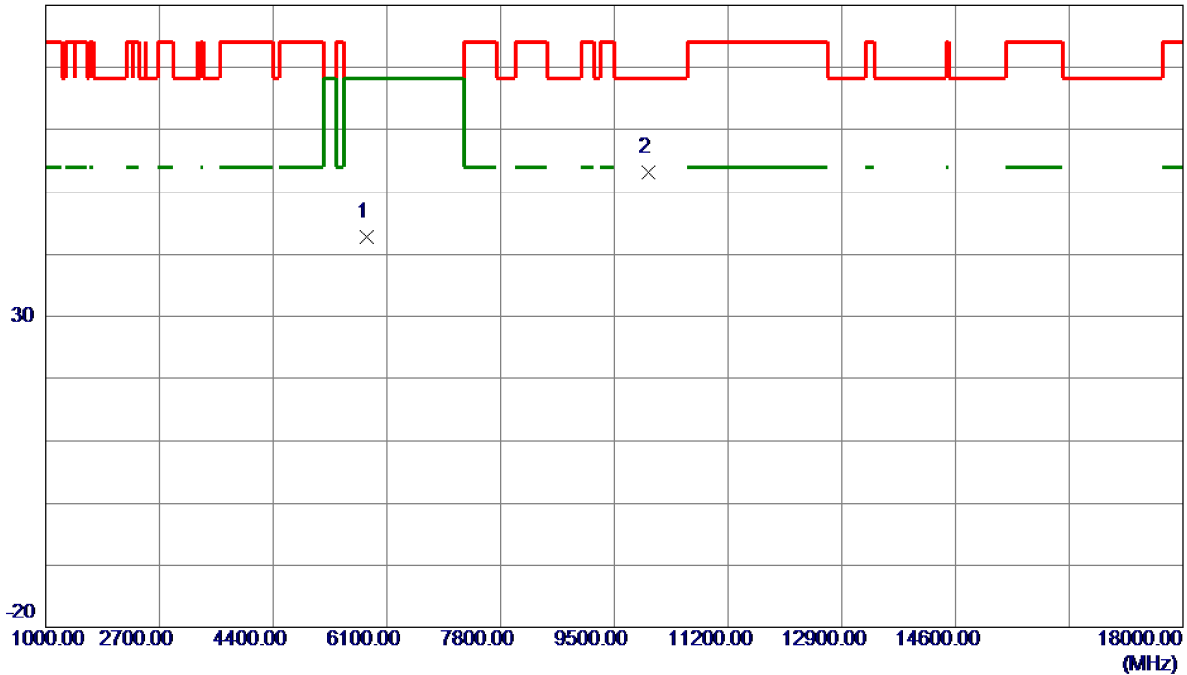


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5803.3500	43.25	-0.53	42.72	68.20	-25.48	Peak	
2 *	10000.6500	48.44	4.68	53.12	68.20	-15.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

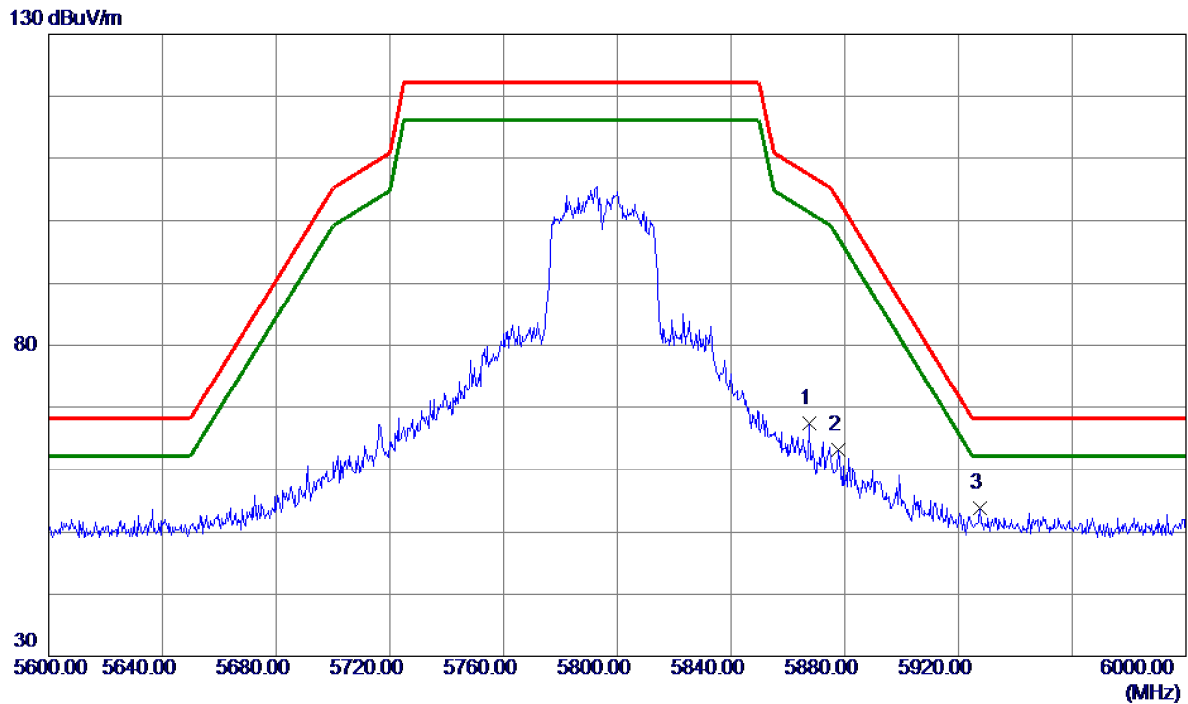

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5867.4000	57.77	9.57	67.34	107.33	-39.99	Peak	
2	5877.6000	53.59	9.59	63.18	103.28	-40.10	Peak	
3 *	5927.6000	44.15	9.67	53.82	68.20	-14.38	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

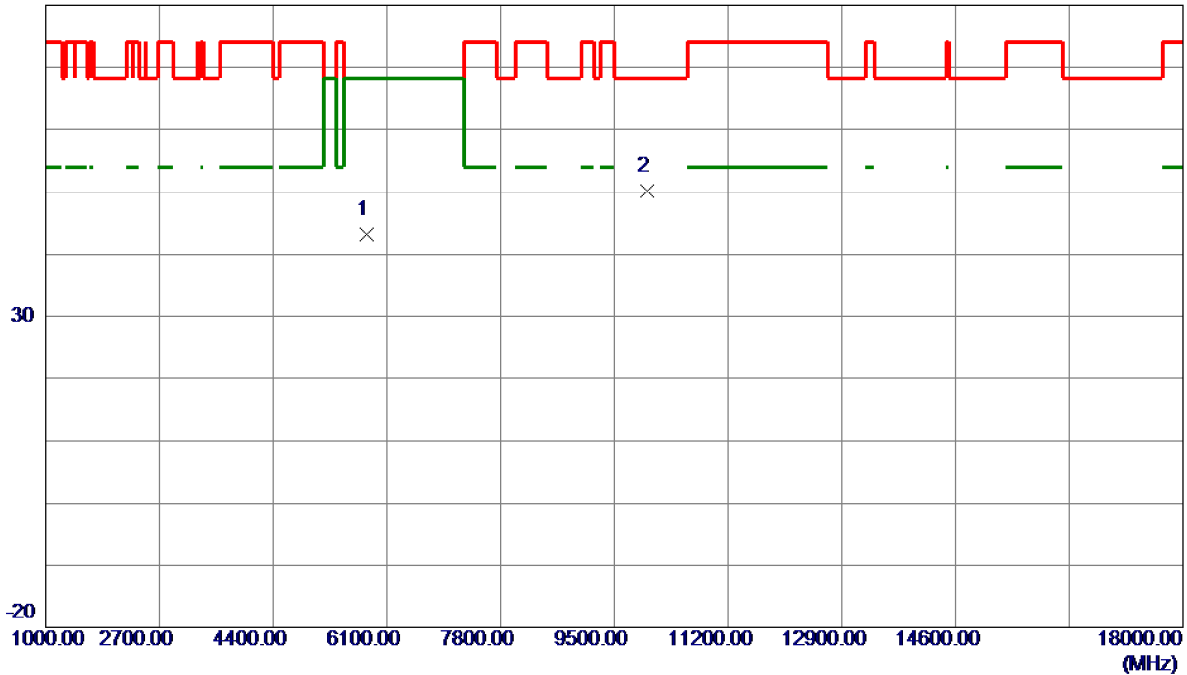


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5792.3000	43.79	-0.55	43.24	68.20	-24.96	Peak	
2 *	9999.8000	45.48	4.68	50.16	68.20	-18.04	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

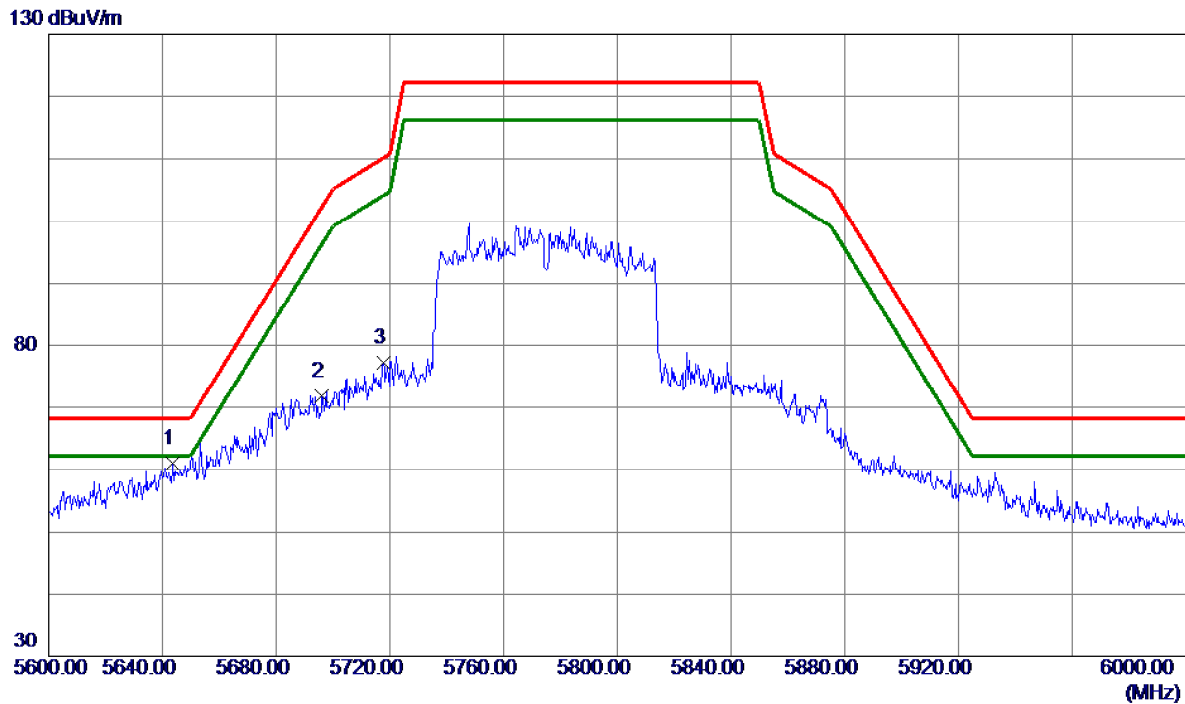

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5643.6000	51.76	9.21	60.97	68.20	-7.23	Peak	
2	5696.2000	62.53	9.29	71.82	102.39	-30.57	Peak	
3	5717.6000	67.85	9.33	77.18	110.13	-32.95	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

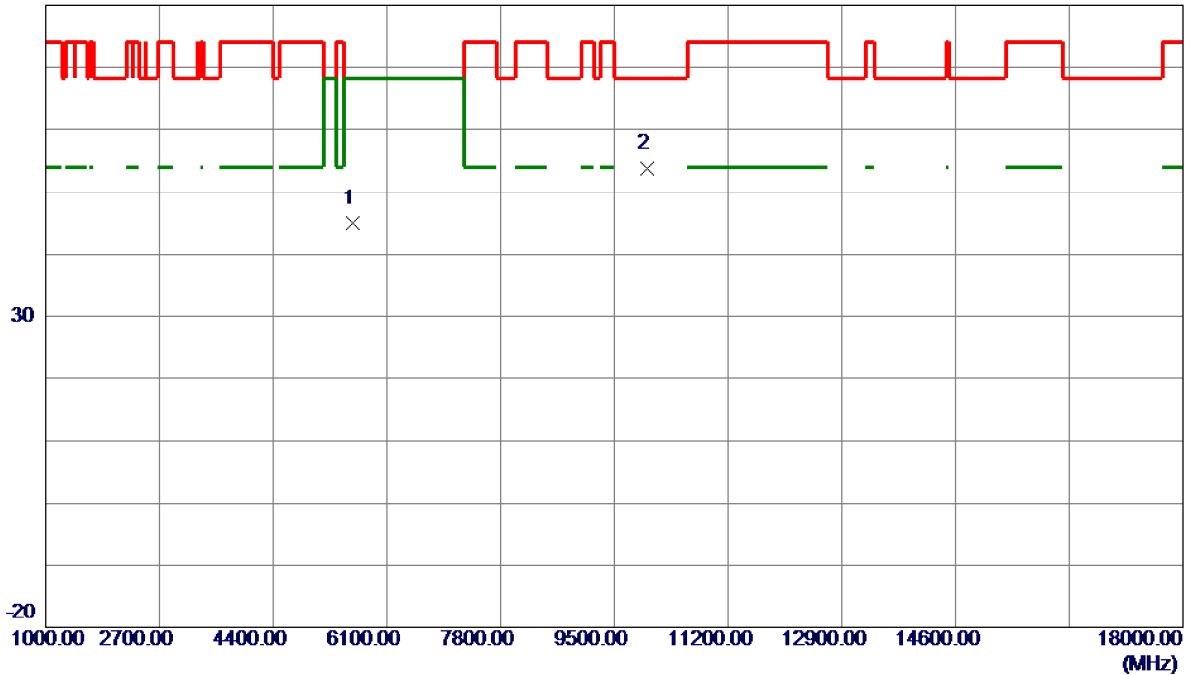


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5588.3000	45.96	-0.89	45.07	68.20	-23.13	Peak	
2 *	9998.9500	49.10	4.68	53.78	68.20	-14.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

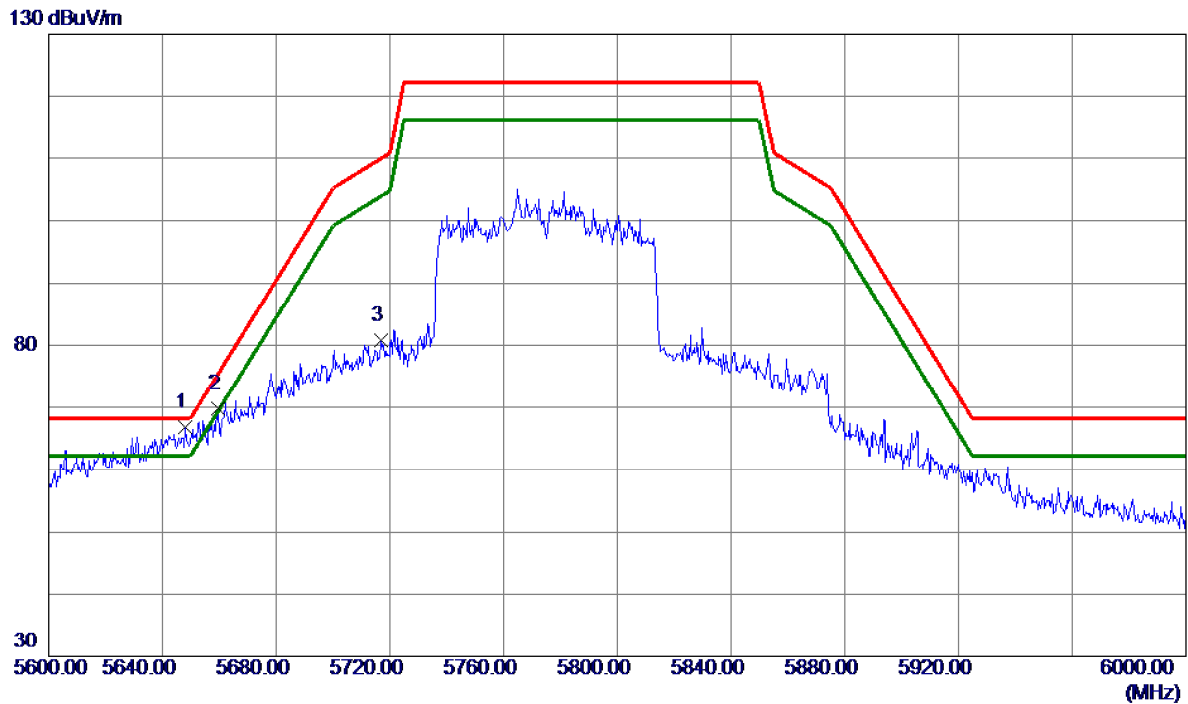

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.2000	57.51	9.21	66.72	68.20	-1.48	Peak	
2	5659.4000	60.60	9.23	69.83	75.16	-5.33	Peak	
3	5717.0000	71.40	9.33	80.73	109.96	-29.23	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

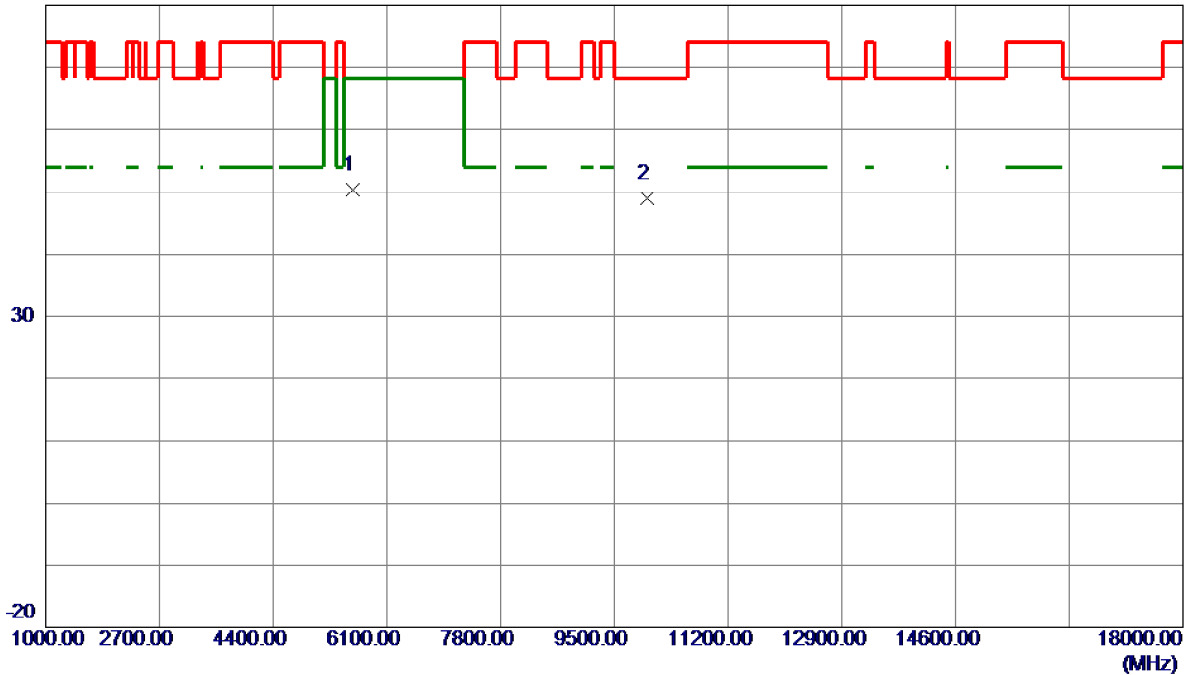


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5581.5000	51.36	-0.90	50.46	68.20	-17.74	Peak	
2	9998.9500	44.26	4.68	48.94	68.20	-19.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

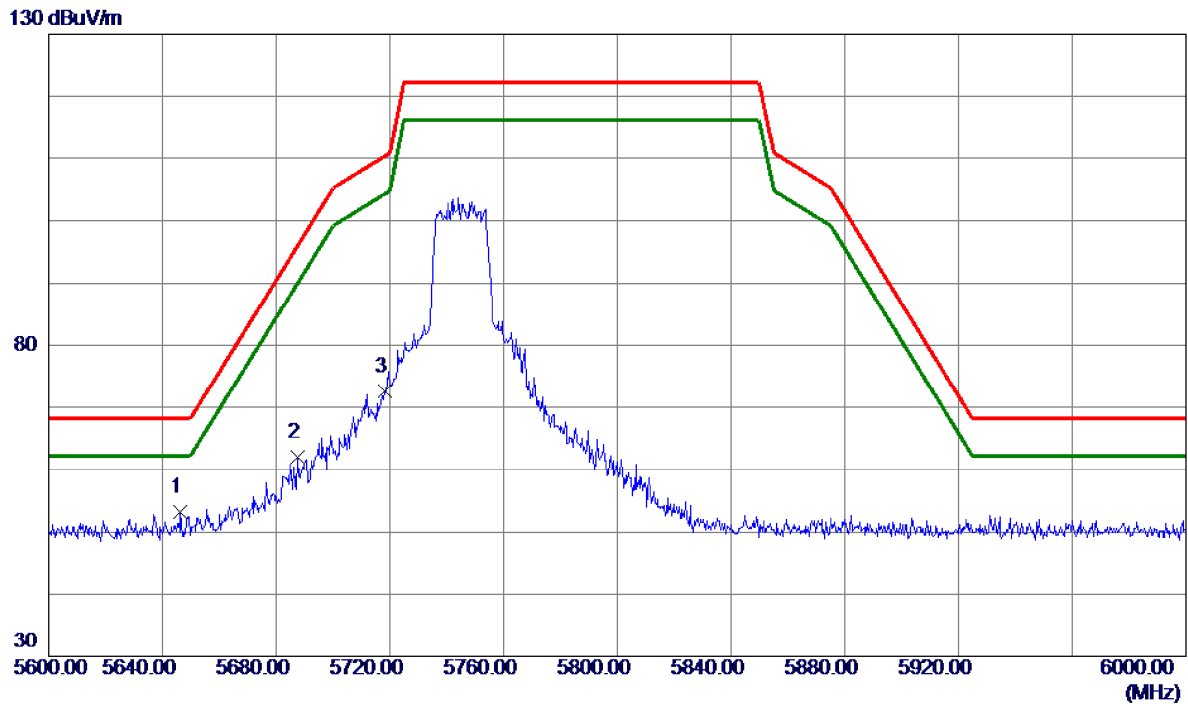

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.4000	43.96	9.21	53.17	68.20	-15.03	Peak	
2	5687.4000	52.72	9.28	62.00	95.88	-33.88	Peak	
3	5718.4000	63.34	9.33	72.67	110.35	-37.68	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

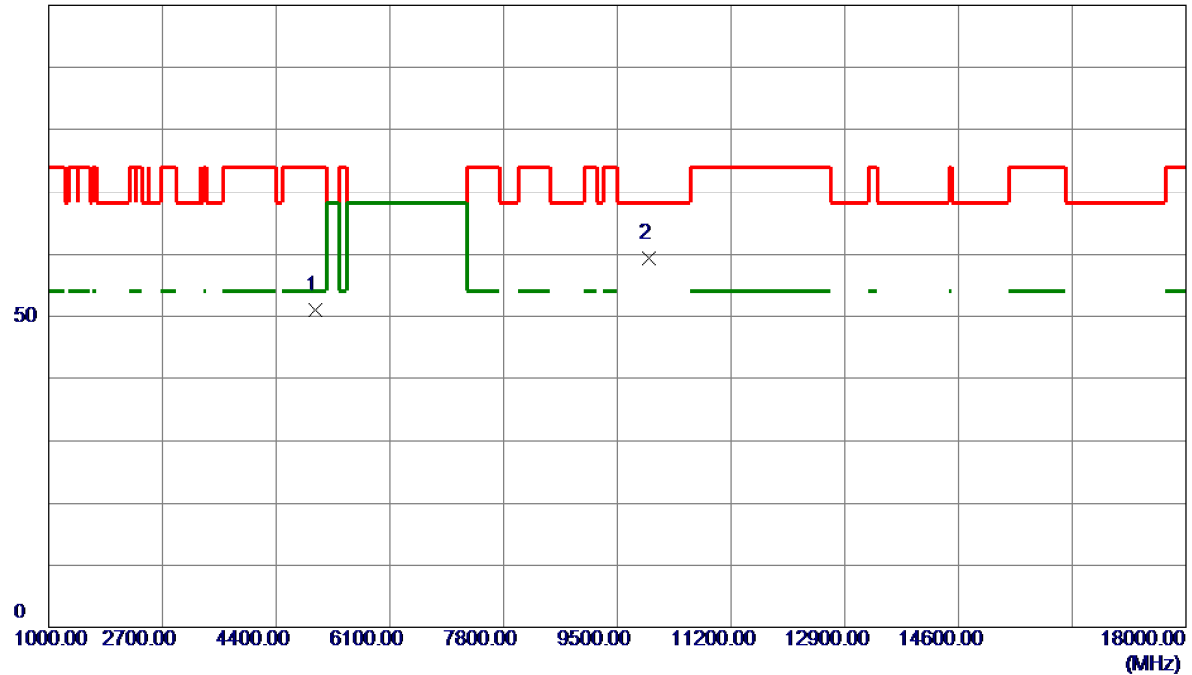


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4991.6000	52.25	-1.34	50.91	74.00	-23.09	Peak	
2 *	9970.9000	54.76	4.68	59.44	68.20	-8.76	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

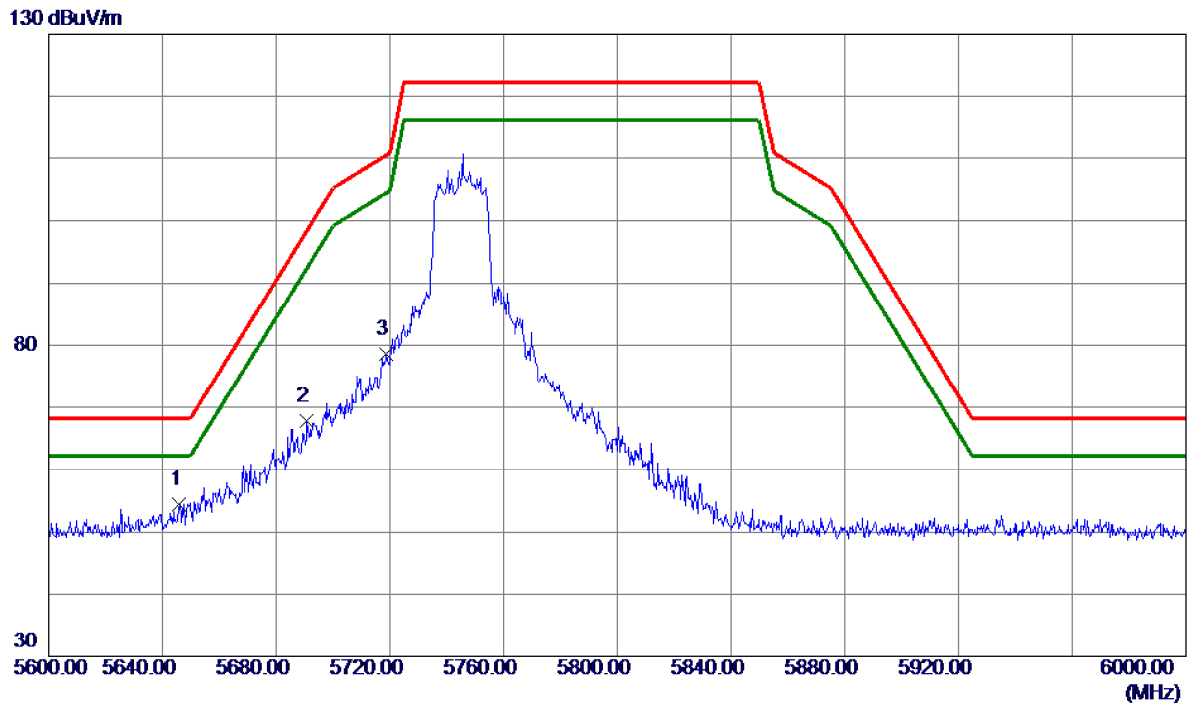

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.0000	45.27	9.21	54.48	68.20	-13.72	Peak	
2	5690.8000	58.61	9.28	67.89	98.39	-30.50	Peak	
3	5718.8000	69.27	9.33	78.60	110.46	-31.86	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

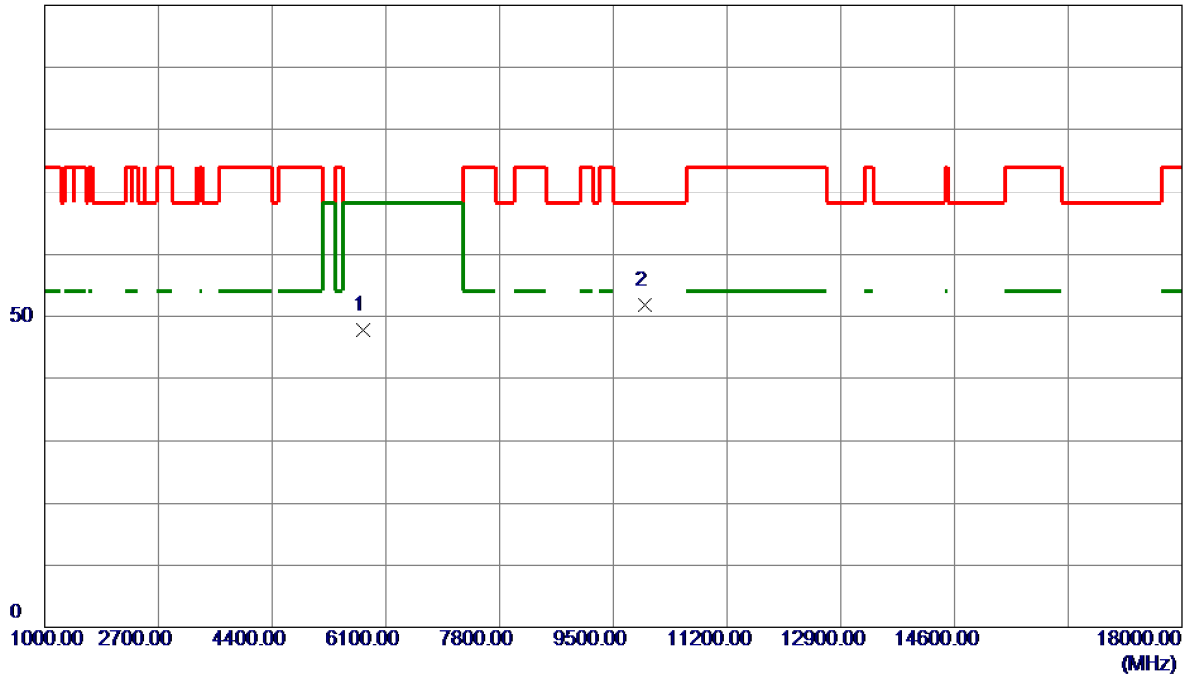

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5752.3500	48.49	-0.62	47.87	68.20	-20.33	Peak	
2 *	9976.8500	47.15	4.68	51.83	68.20	-16.37	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

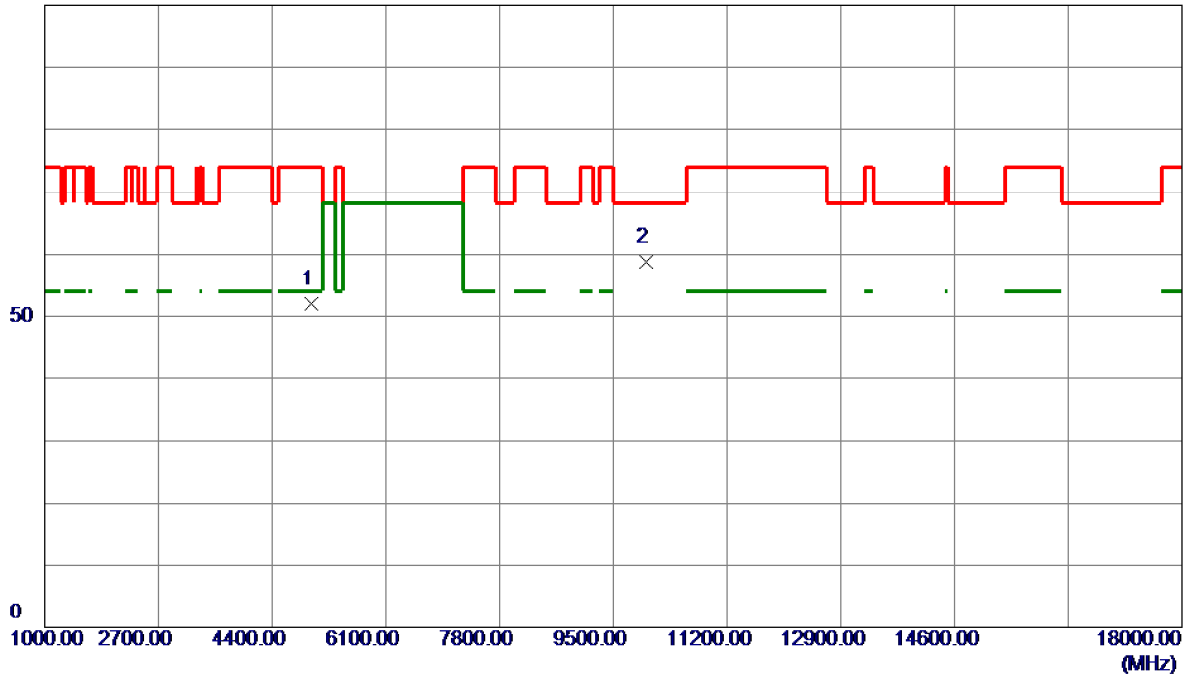


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4982.2500	53.42	-1.36	52.06	74.00	-21.94	Peak	
2 *	9981.9500	54.11	4.68	58.79	68.20	-9.41	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

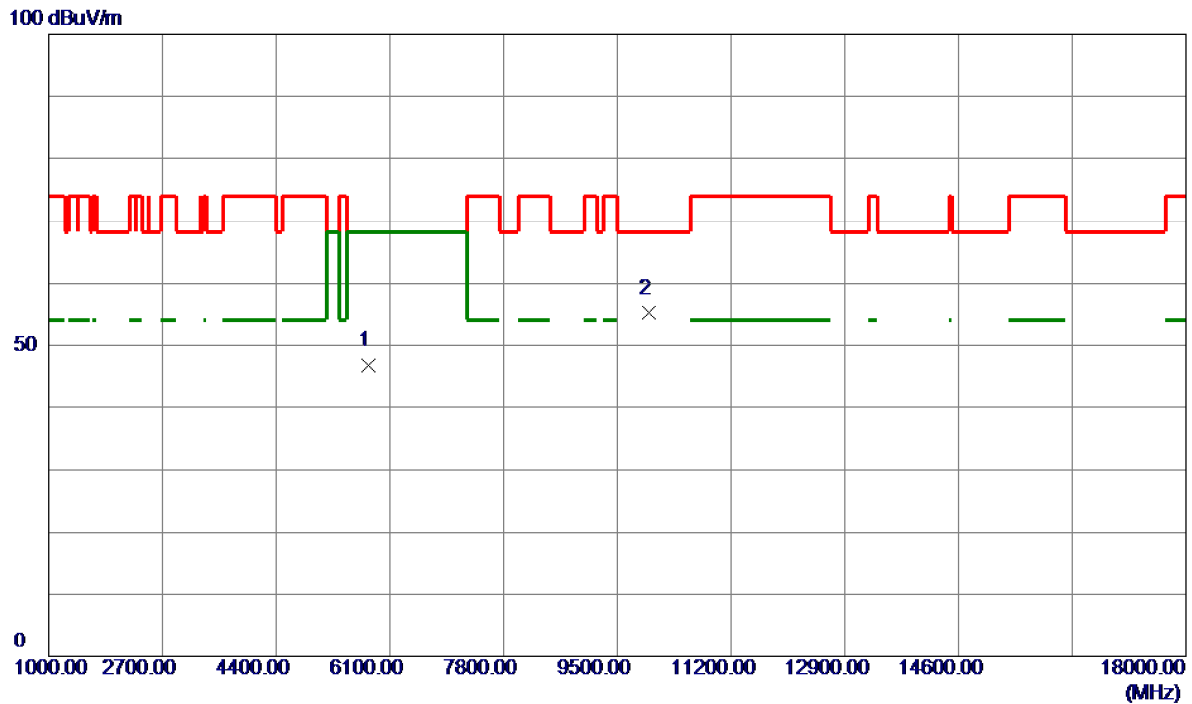


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5787.2000	47.43	-0.56	46.87	68.20	-21.33	Peak	
2 *	9966.6500	50.50	4.68	55.18	68.20	-13.02	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

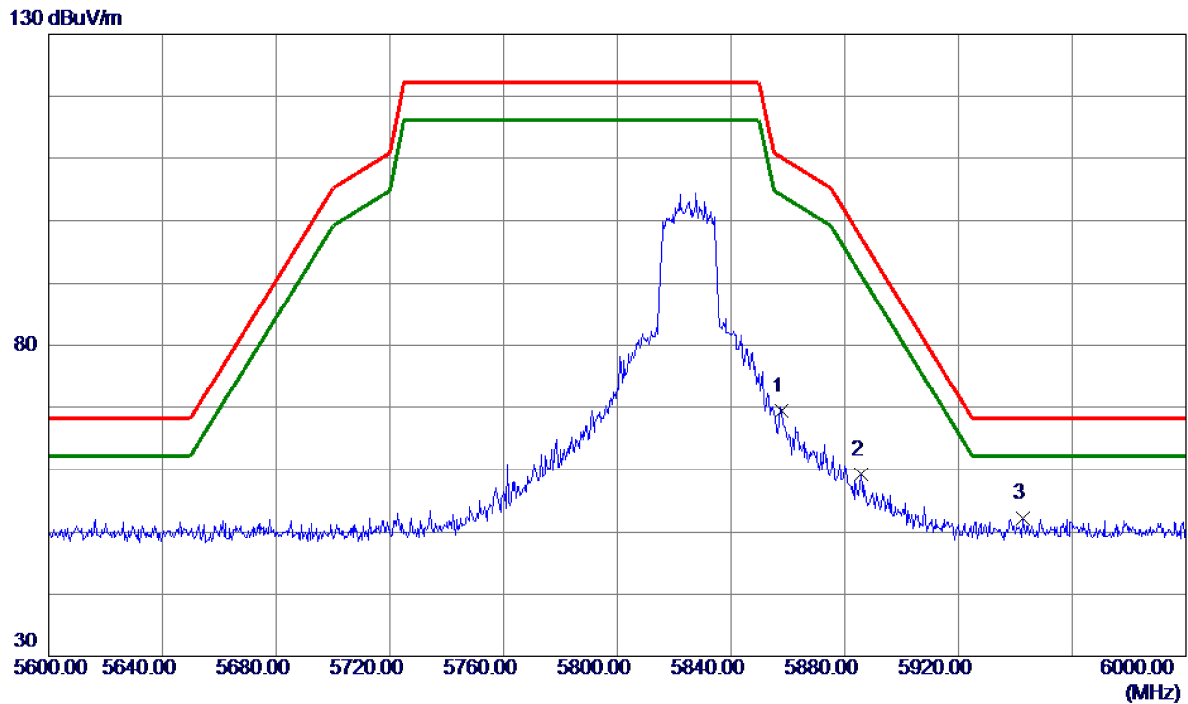

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5857.6000	59.89	9.56	69.45	110.07	-40.62	Peak	
2	5885.6000	49.54	9.60	59.14	97.36	-38.22	Peak	
3 *	5942.6000	42.48	9.70	52.18	68.20	-16.02	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

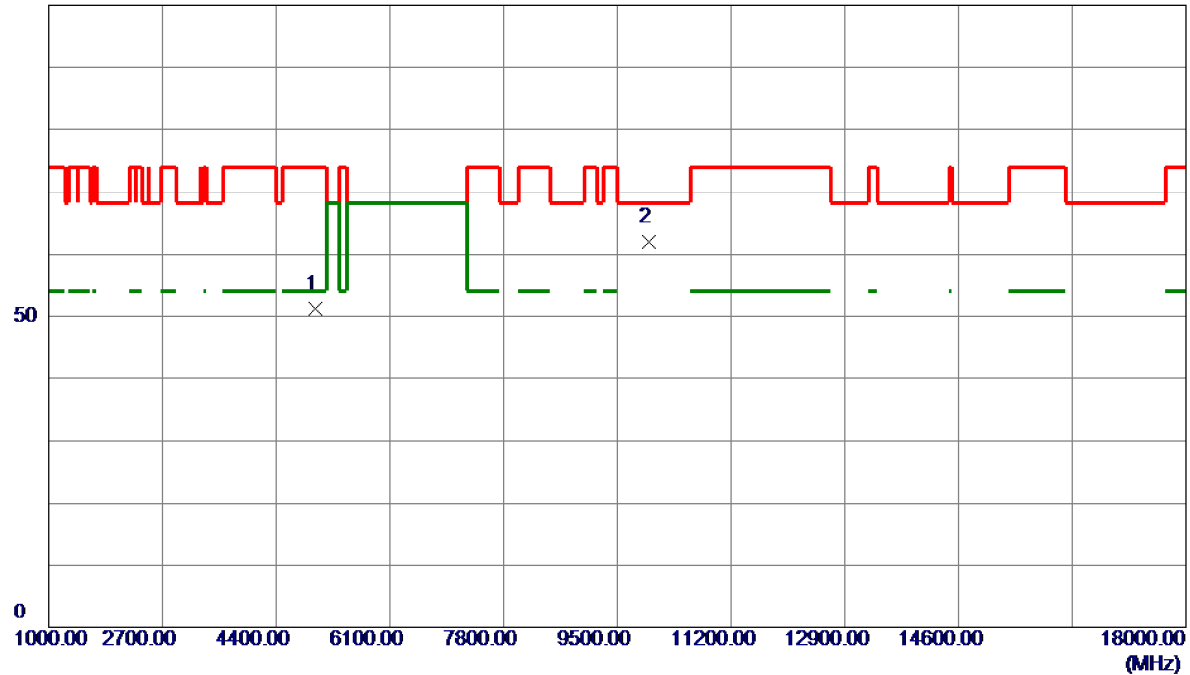

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4992.4500	52.53	-1.34	51.19	74.00	-22.81	Peak	
2 *	9977.7000	57.27	4.68	61.95	68.20	-6.25	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

130 dBuV/m

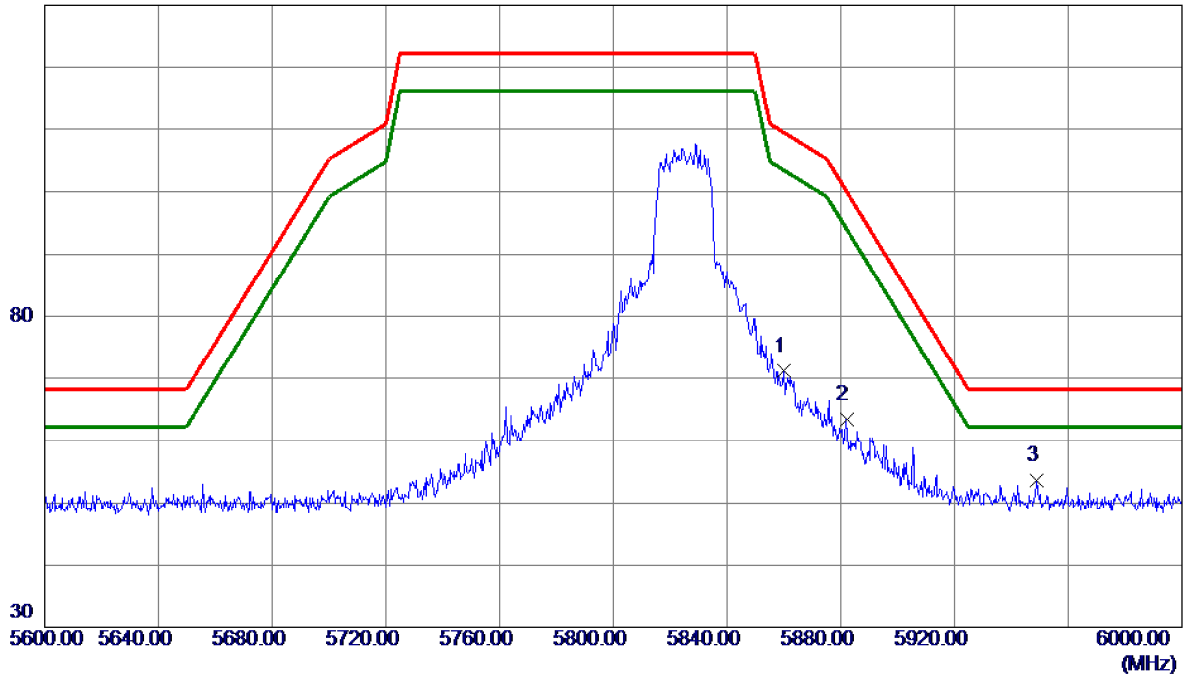


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5860.2000	61.73	9.56	71.29	109.34	-38.05	Peak	
2	5882.0000	53.81	9.60	63.41	100.02	-36.61	Peak	
3 *	5949.0000	43.86	9.71	53.57	68.20	-14.63	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

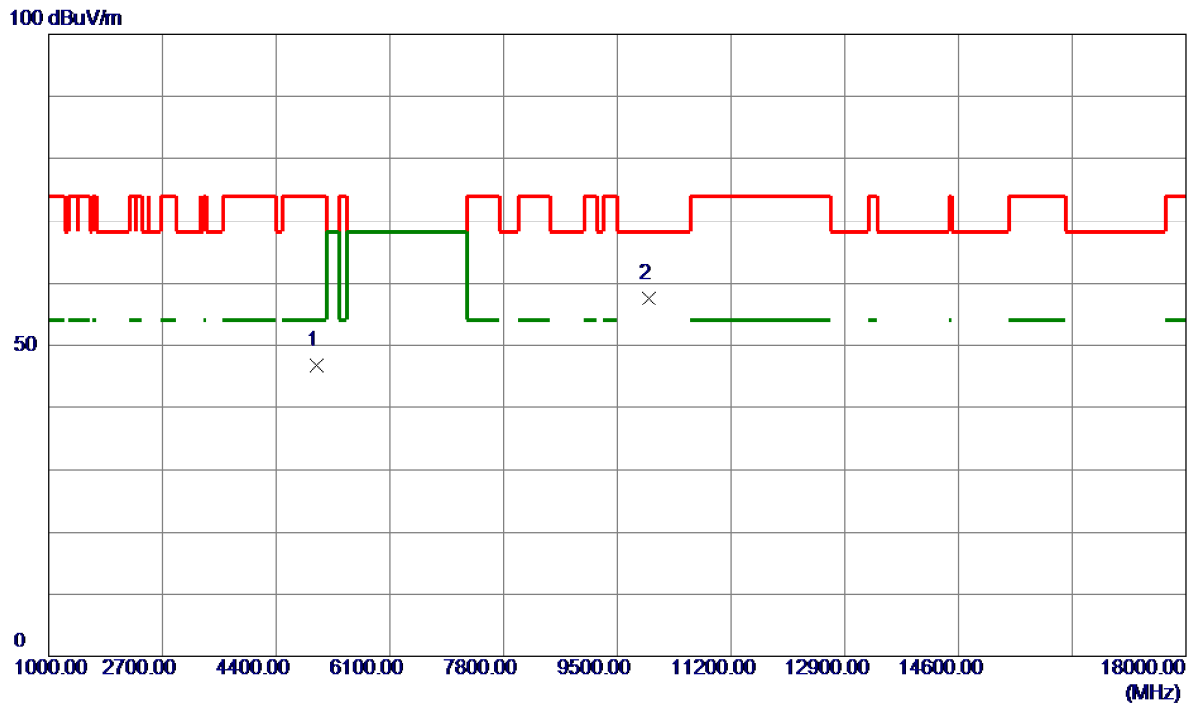


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5000.1000	48.08	-1.32	46.76	74.00	-27.24	Peak	
2 *	9966.6500	52.94	4.68	57.62	68.20	-10.58	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

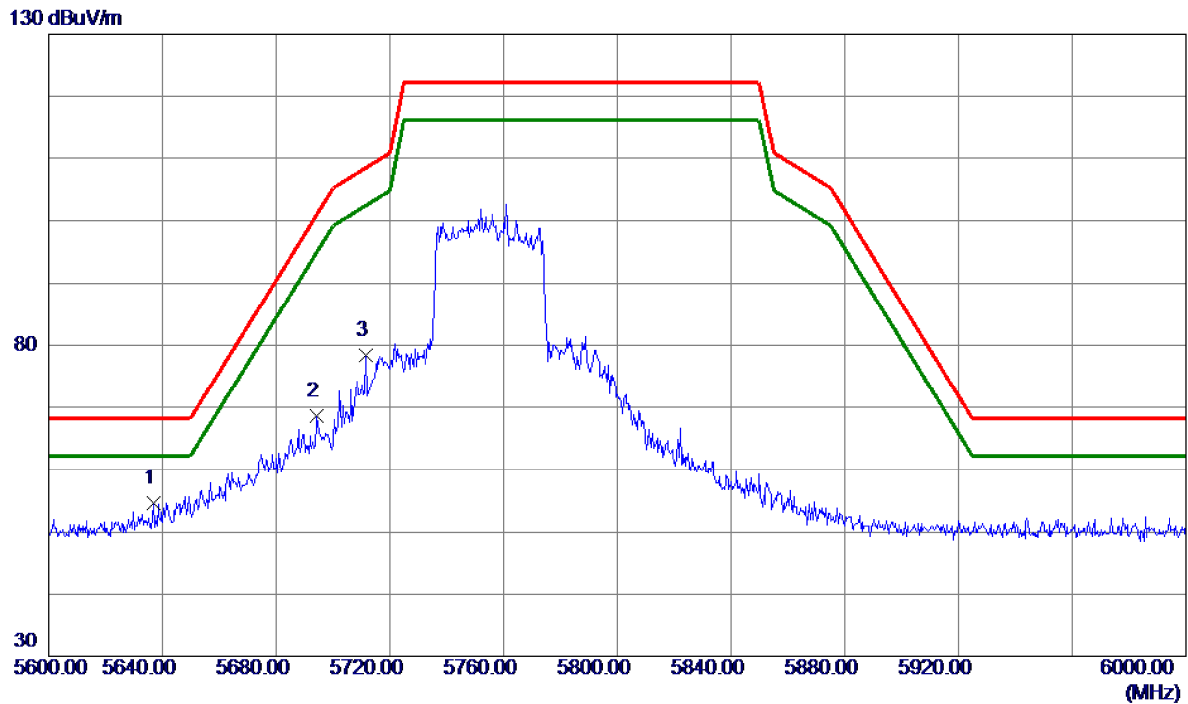


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5636.8000	45.44	9.19	54.63	68.20	-13.57	Peak	
2	5694.4000	59.22	9.29	68.51	101.06	-32.55	Peak	
3	5711.6000	69.03	9.32	78.35	108.45	-30.10	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

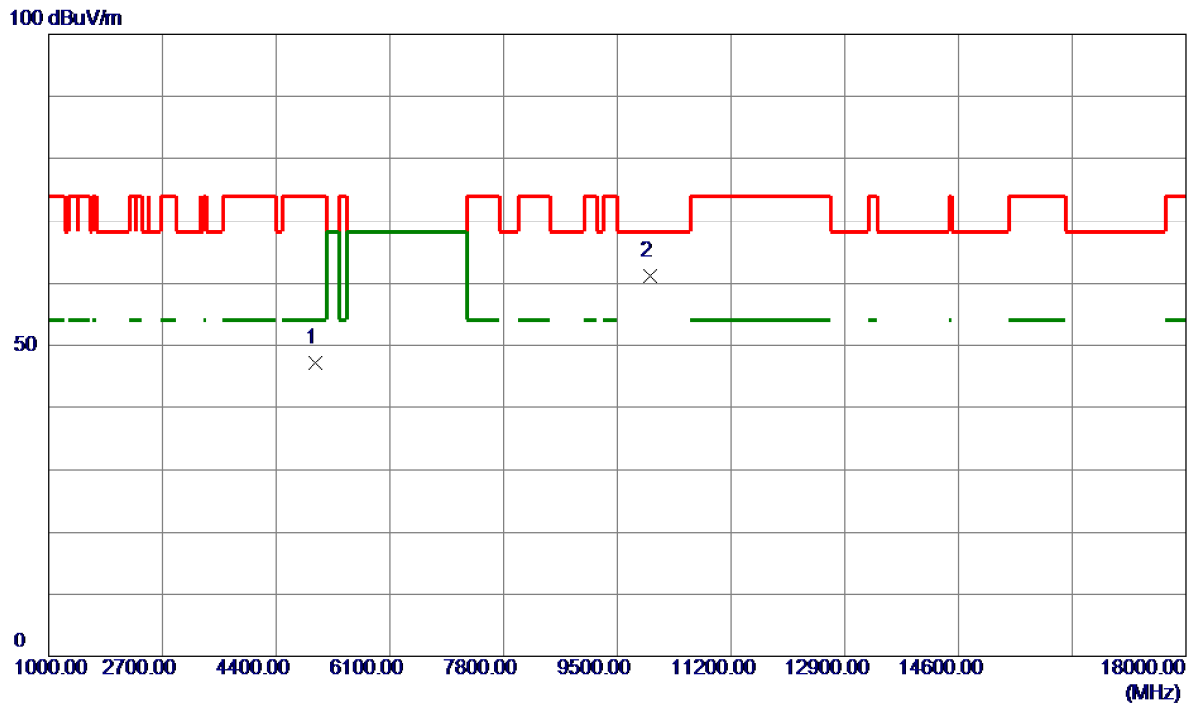


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4992.4500	48.49	-1.34	47.15	74.00	-26.85	Peak	
2 *	9988.7500	56.56	4.68	61.24	68.20	-6.96	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

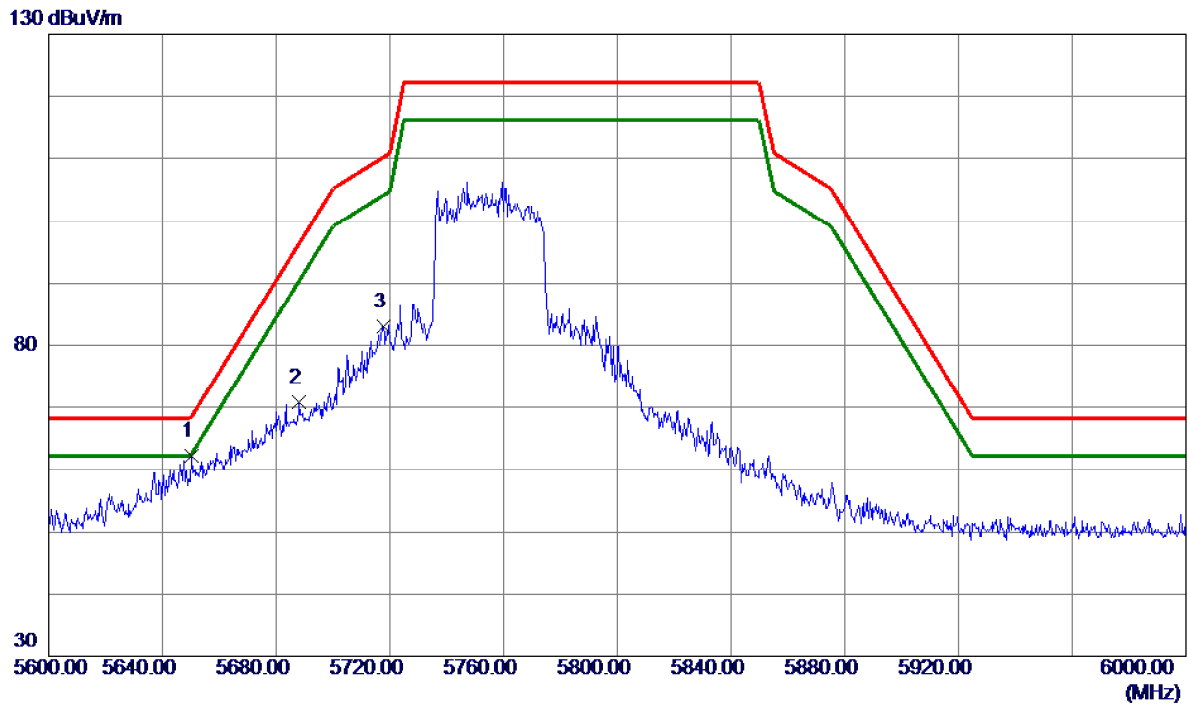

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.4000	52.97	9.22	62.19	68.50	-6.31	Peak	
2	5688.2000	61.56	9.28	70.84	96.47	-25.63	Peak	
3	5717.8000	73.76	9.33	83.09	110.18	-27.09	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

100 dBuV/m

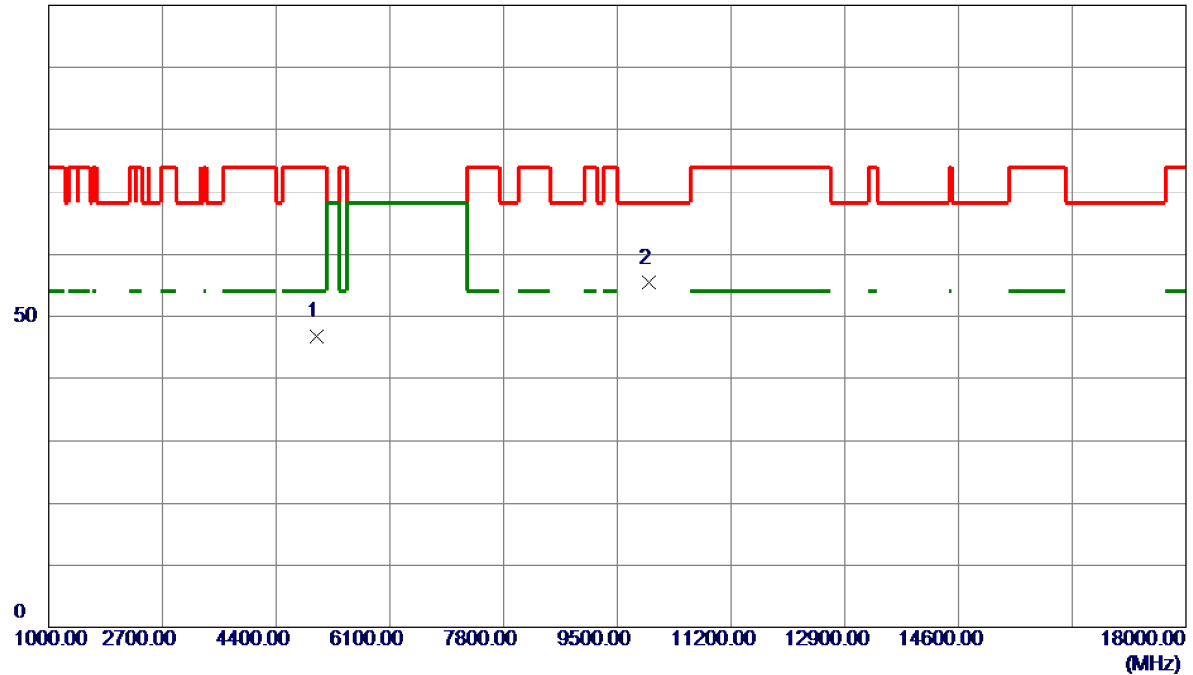

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4999.2500	48.16	-1.32	46.84	74.00	-27.16	Peak	
2 *	9969.2000	50.78	4.68	55.46	68.20	-12.74	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

130 dBuV/m

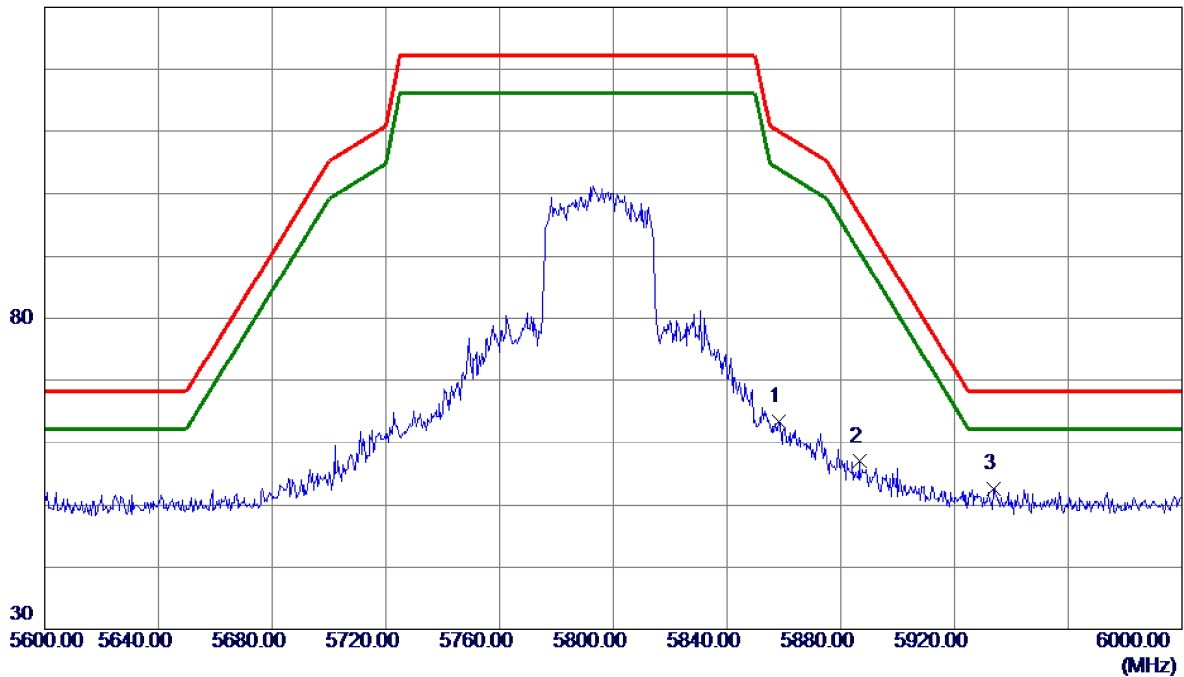

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5858.2000	53.86	9.56	63.42	109.90	-46.48	Peak	
2	5886.6000	47.46	9.60	57.06	96.62	-39.56	Peak	
3 *	5933.8000	42.93	9.68	52.61	68.20	-15.59	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

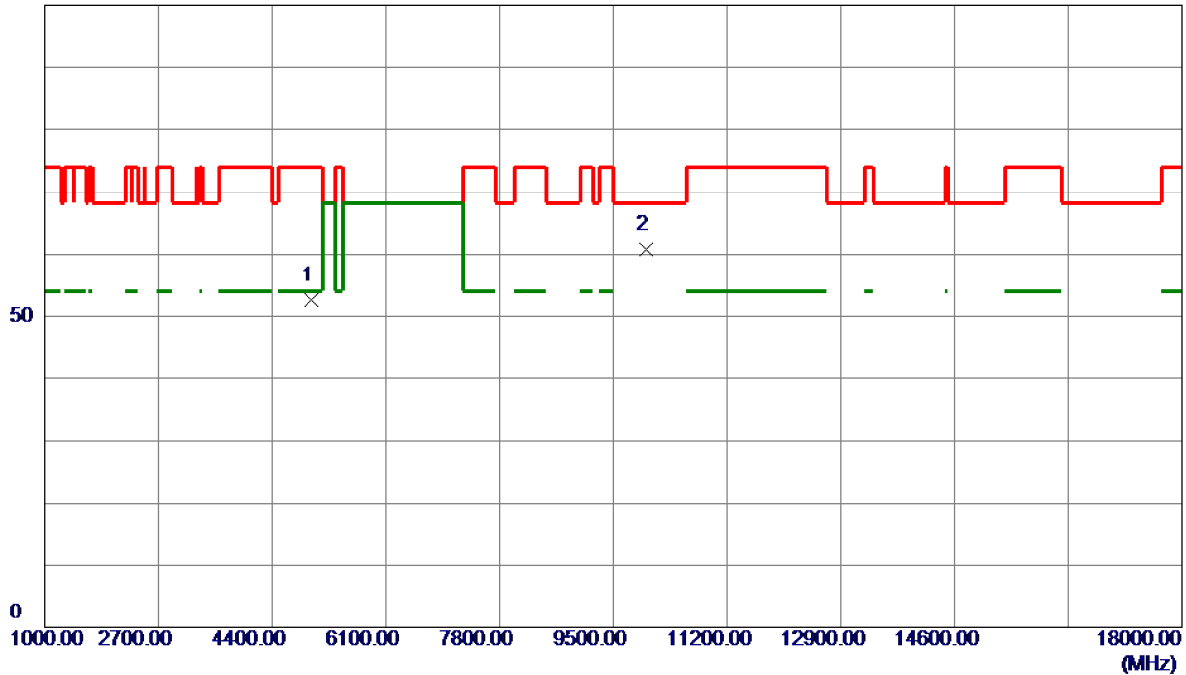


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4988.2000	53.97	-1.34	52.63	74.00	-21.37	Peak	
2 *	9993.0000	56.10	4.68	60.78	68.20	-7.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

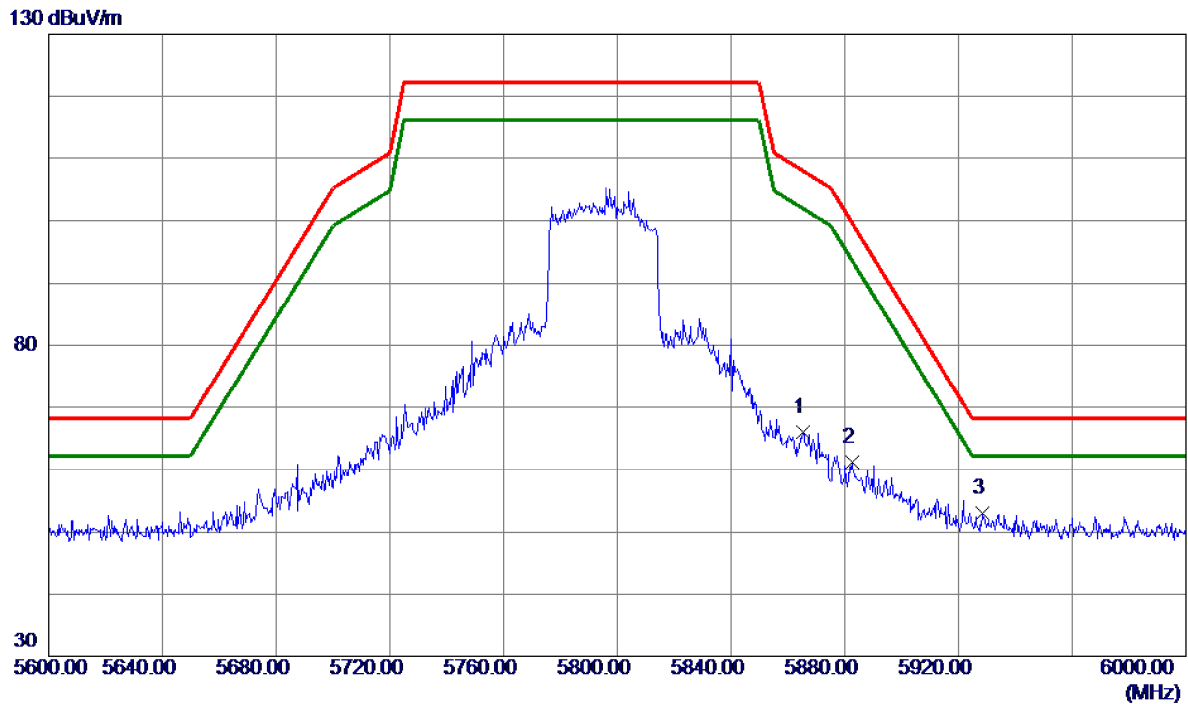


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5865.4000	56.46	9.57	66.03	107.89	-41.86	Peak	
2	5882.6000	51.67	9.60	61.27	99.58	-38.31	Peak	
3 *	5928.4000	43.28	9.67	52.95	68.20	-15.25	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

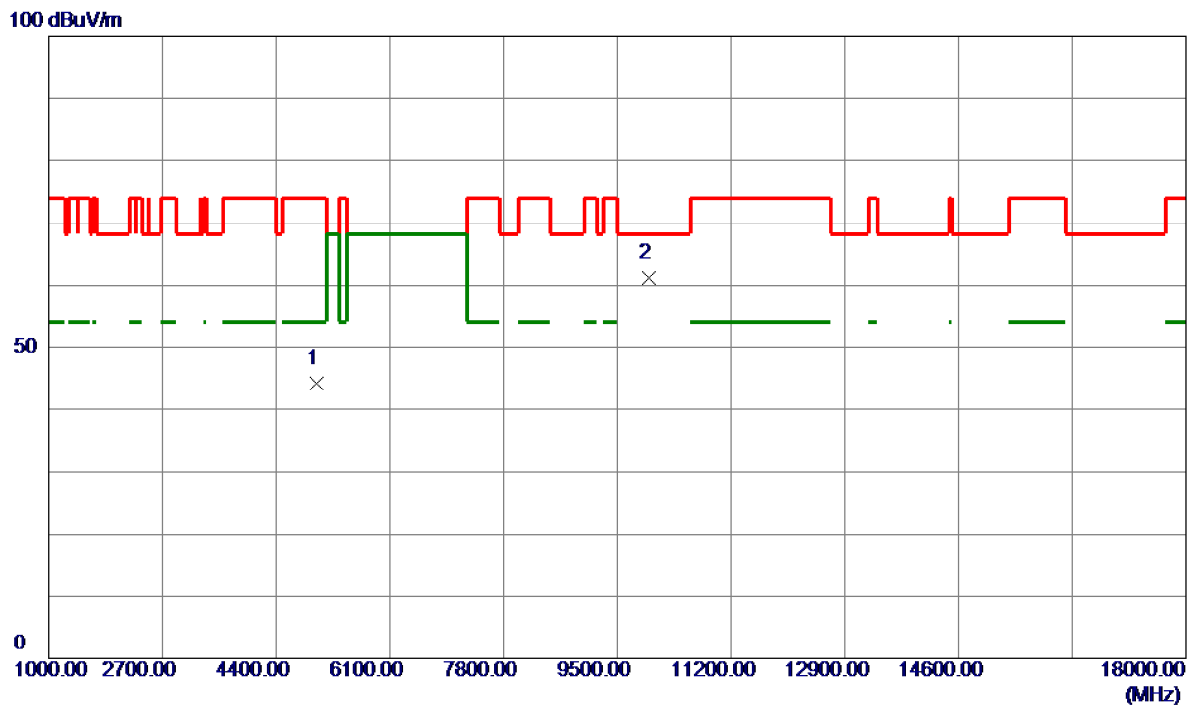


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5000.9500	45.59	-1.32	44.27	74.00	-29.73	Peak	
2 *	9979.4000	56.46	4.68	61.14	68.20	-7.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

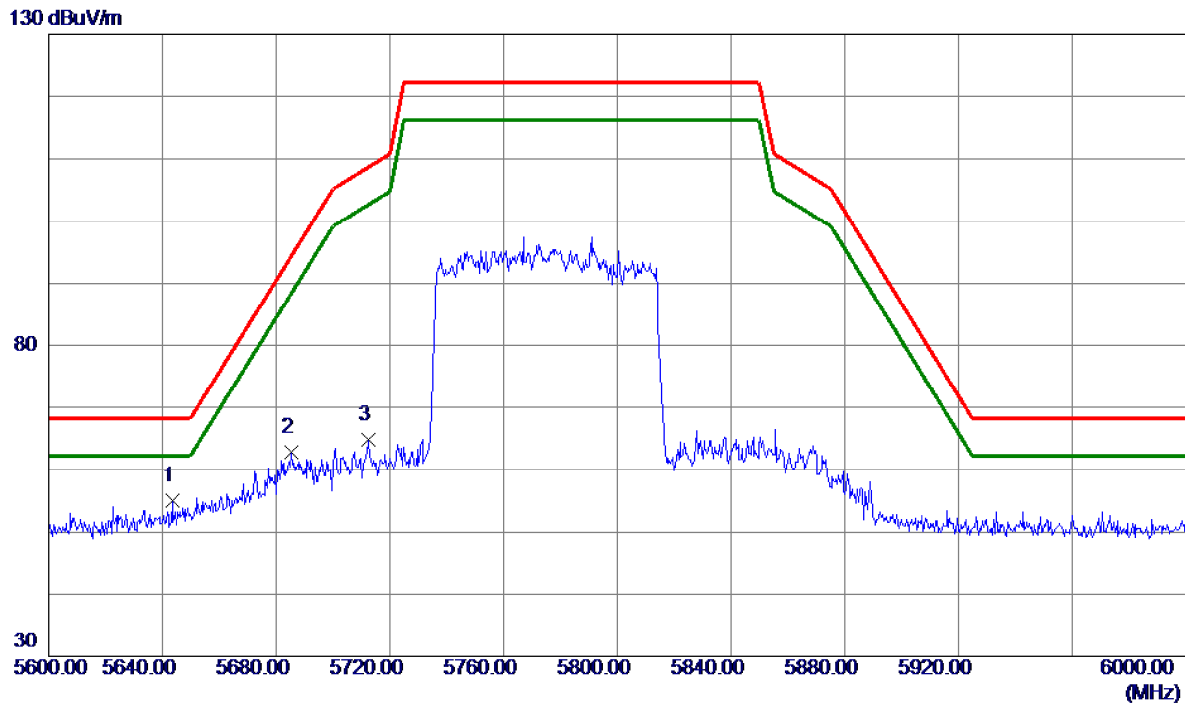


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5643.4000	45.84	9.21	55.05	68.20	-13.15	Peak	
2	5685.4000	53.60	9.27	62.87	94.40	-31.53	Peak	
3	5712.4000	55.41	9.32	64.73	108.67	-43.94	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

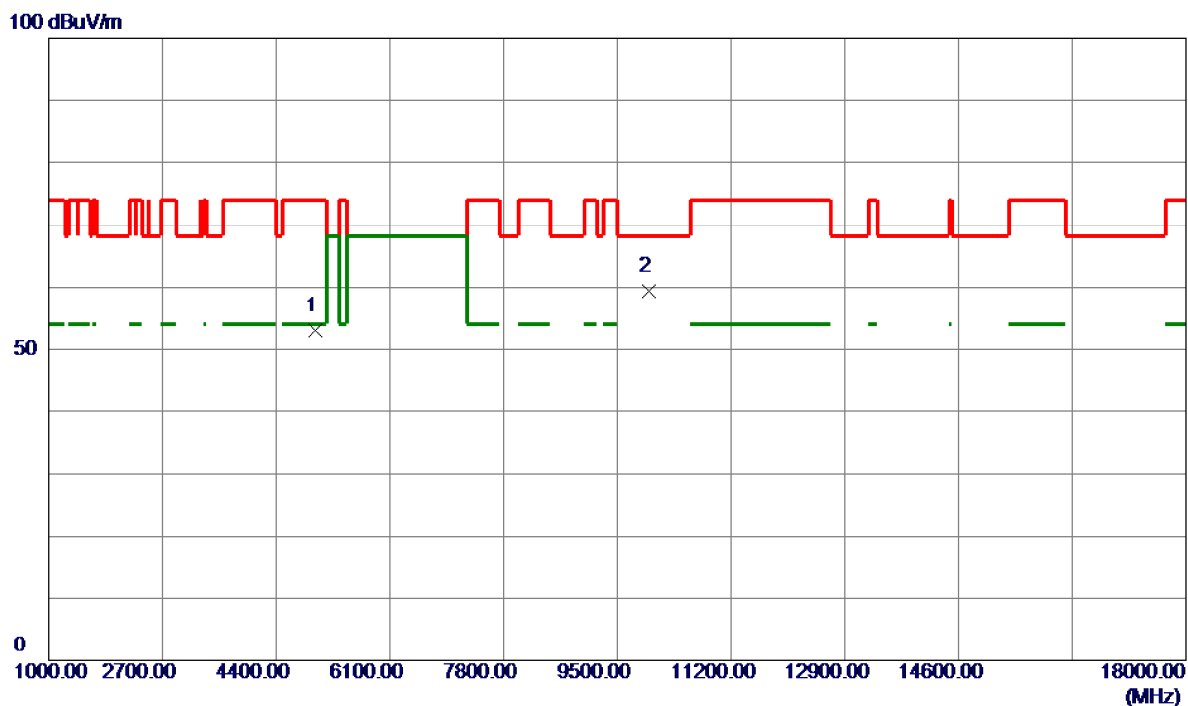


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4985.6500	54.29	-1.35	52.94	74.00	-21.06	Peak	
2 *	9970.9000	54.76	4.68	59.44	68.20	-8.76	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

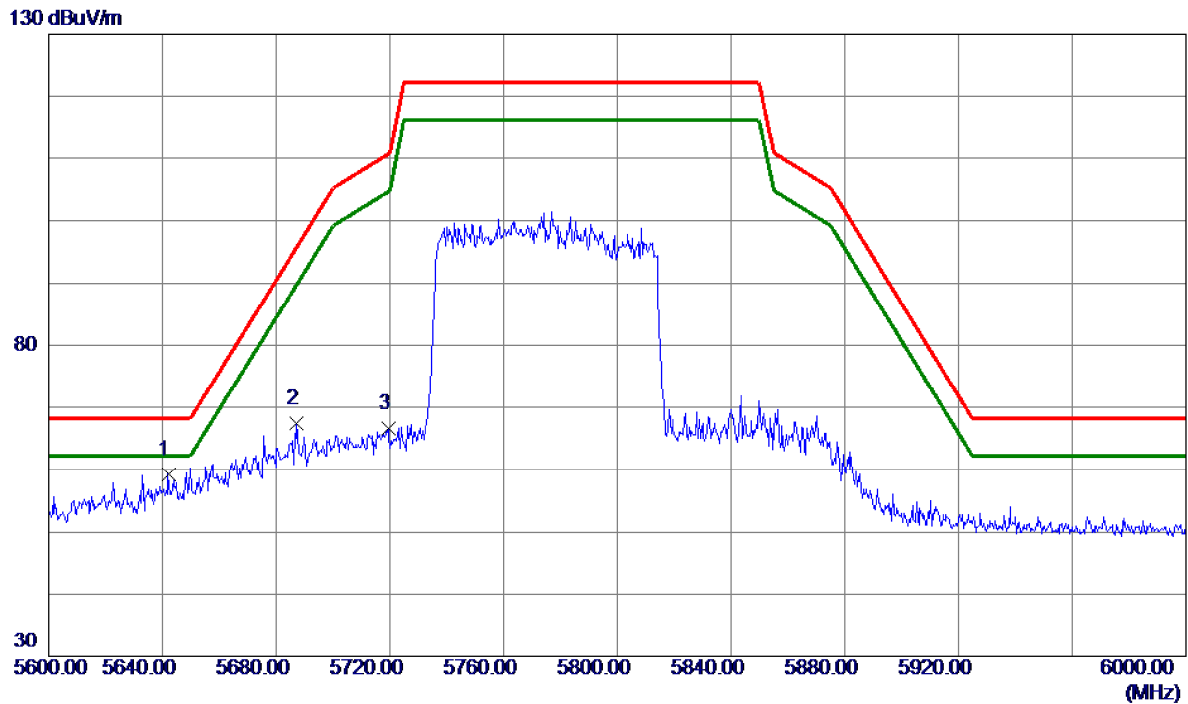


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5642.0000	49.99	9.20	59.19	68.20	-9.01	Peak	
2	5687.2000	58.10	9.28	67.38	95.73	-28.35	Peak	
3	5719.4000	57.20	9.33	66.53	110.63	-44.10	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

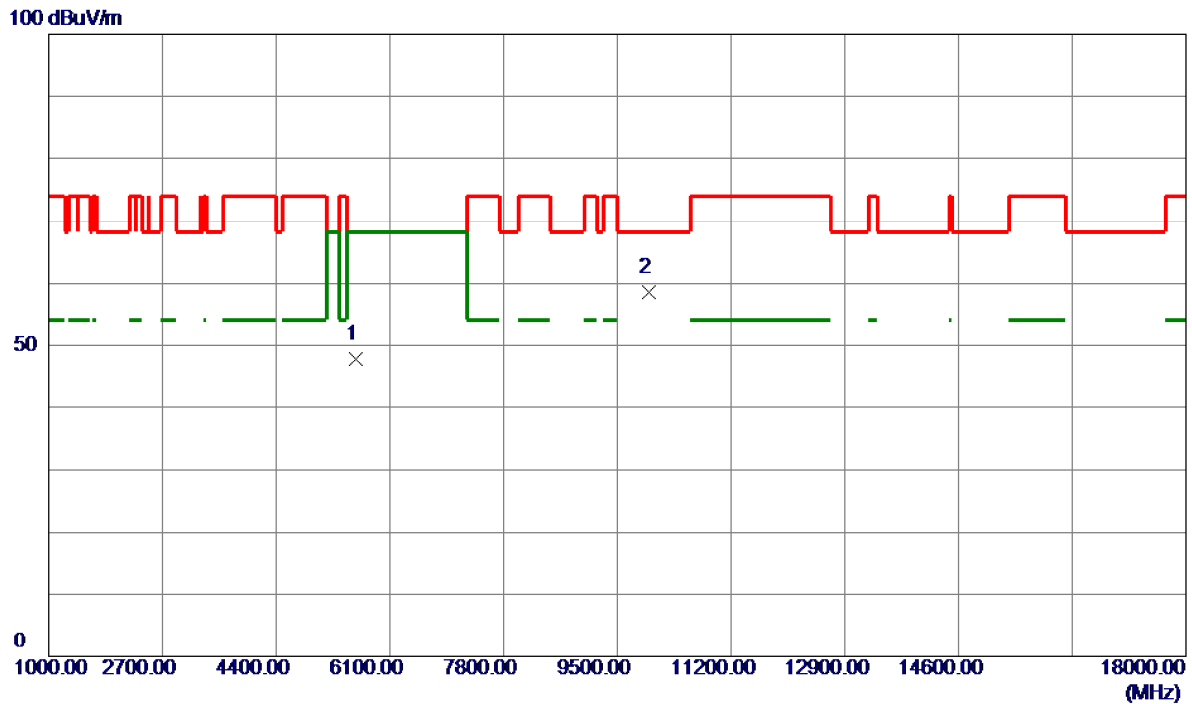

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5591.7000	48.64	-0.88	47.76	68.20	-20.44	Peak	
2 *	9968.3500	54.01	4.68	58.69	68.20	-9.51	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.40	16.983
40	5200	21.27	16.930
48	5240	21.24	16.955

CH36




CH40




26 dB Bandwidth

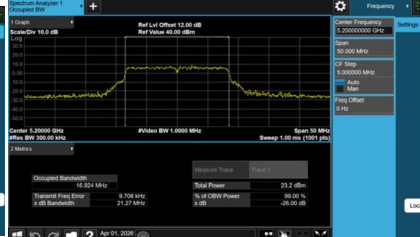

CH48

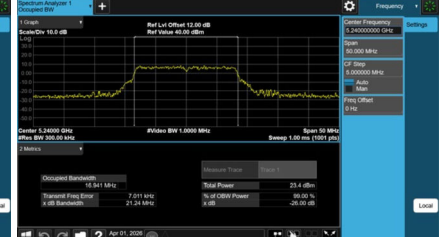


99 % Occupied Bandwidth

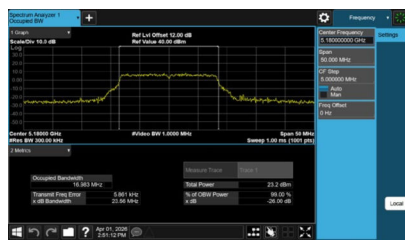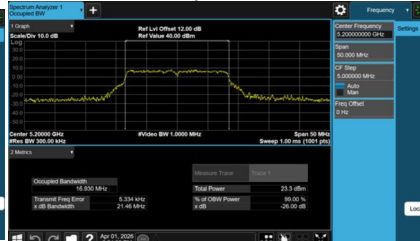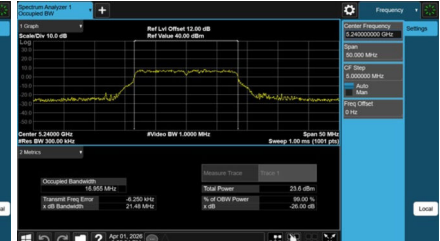

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	44.71	26.577
40	5200	45.21	26.250
48	5240	47.05	28.419

CH36

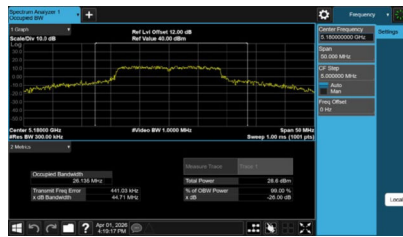


CH40




26 dB Bandwidth

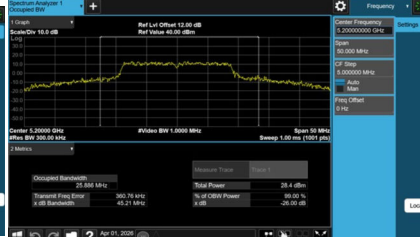

CH48

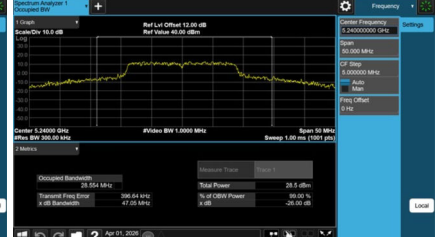


99 % Occupied Bandwidth

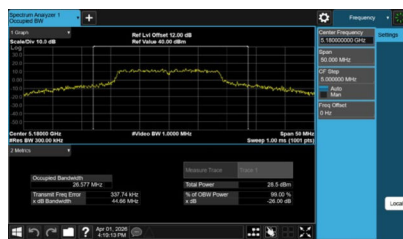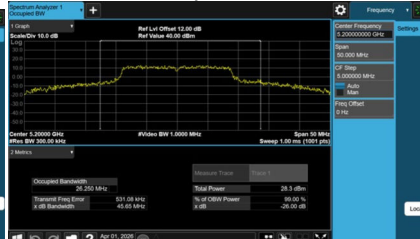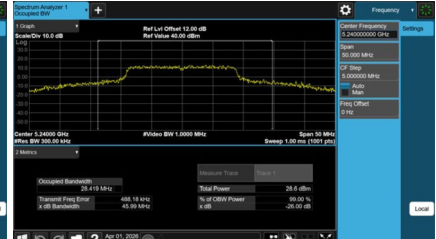

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.73	36.548
46	5230	40.31	36.496

CH38

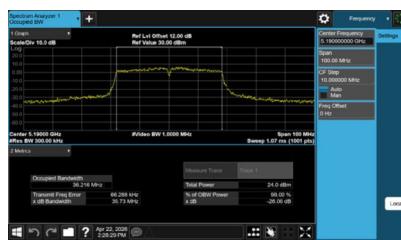


CH46

26 dB Bandwidth

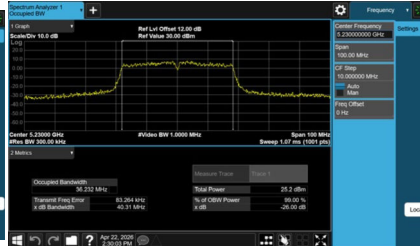


99 % Occupied Bandwidth

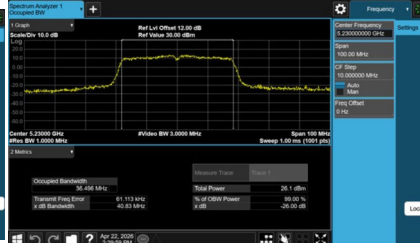

Test Mode	UNII-1_TX AC(VHT80) Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	145.40	77.286

CH42 26 dB Bandwidth

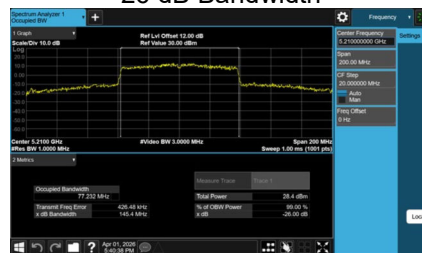

99 % Occupied Bandwidth



Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	46.21	24.449
40	5200	45.16	27.360
48	5240	42.74	25.603

CH36




CH40



26 dB Bandwidth

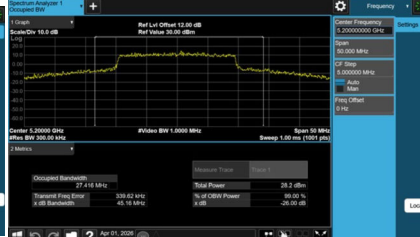

CH48

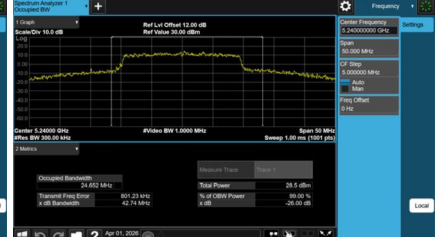


99 % Occupied Bandwidth

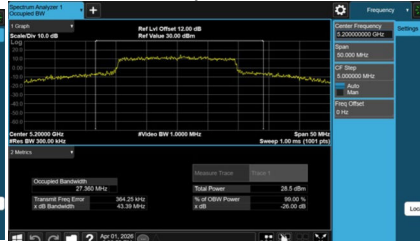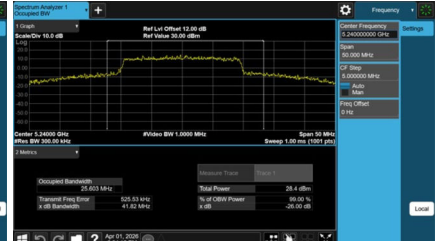

Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.43	37.827
46	5230	39.95	43.792

CH38

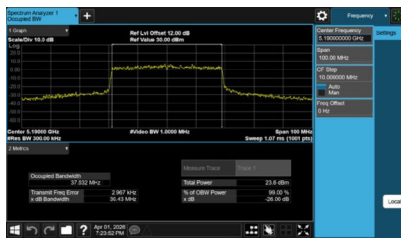


CH46

26 dB Bandwidth




99 % Occupied Bandwidth

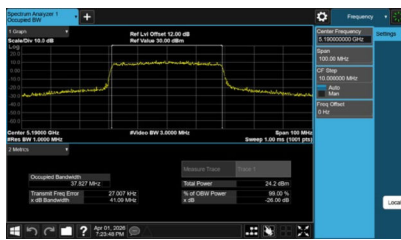


Test Mode	UNII-1_TX AX(HE80) Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	81.28	77.235

CH42 26 dB Bandwidth

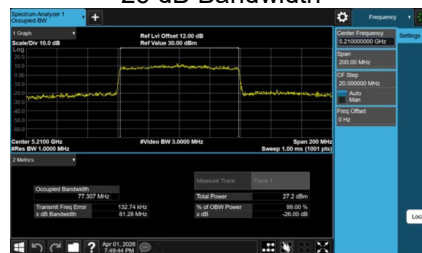

99 % Occupied Bandwidth

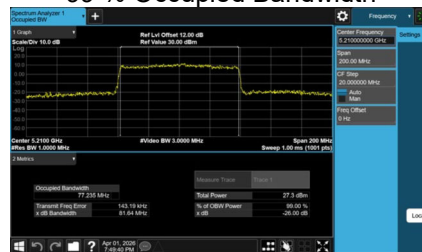

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	28.28	17.020
60	5300	20.95	16.925
64	5320	21.11	16.884

CH52




CH60




26 dB Bandwidth

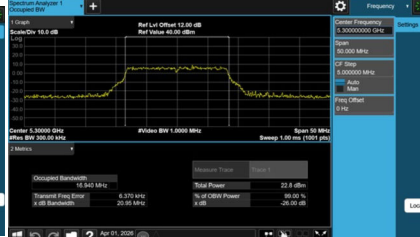

CH64

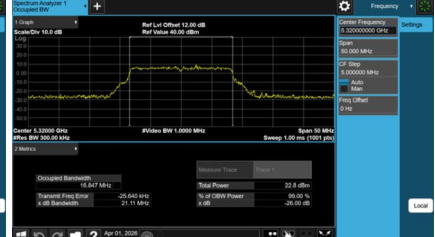

99 % Occupied Bandwidth

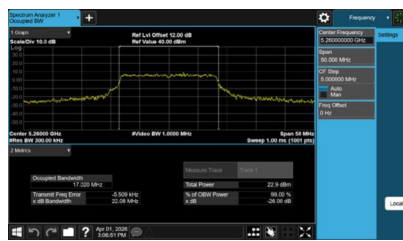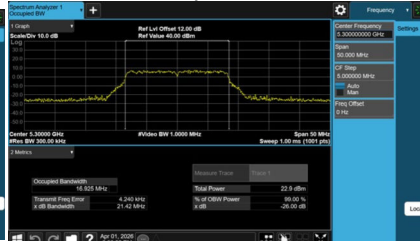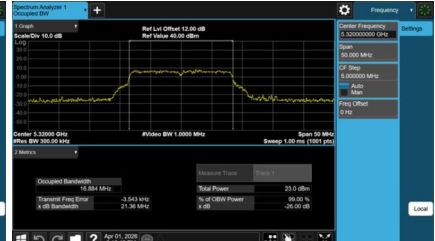

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	49.02	27.269
60	5300	25.07	18.021
64	5320	21.28	18.102

CH52




CH60



26 dB Bandwidth



CH64

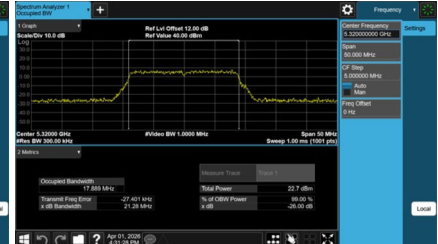

99 % Occupied Bandwidth

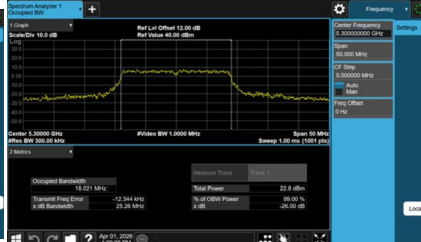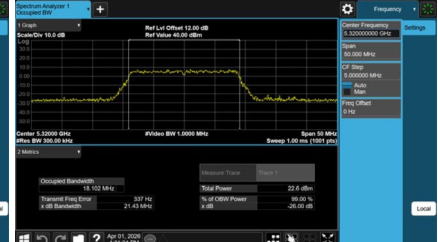


Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.96	36.572
62	5310	40.12	36.677


CH54

CH62

26 dB Bandwidth

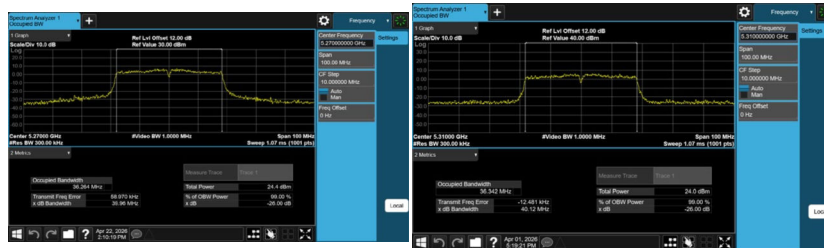


99 % Occupied Bandwidth

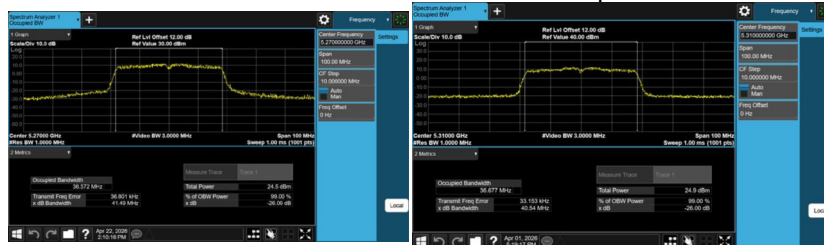


Test Mode	UNII-2A_TX AC(VHT80) Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	80.68	75.665

CH58 26 dB Bandwidth

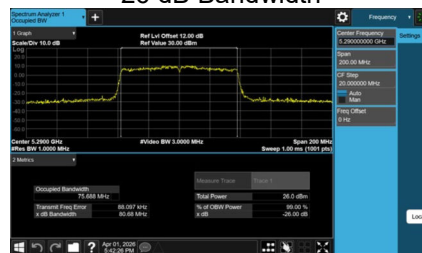

99 % Occupied Bandwidth

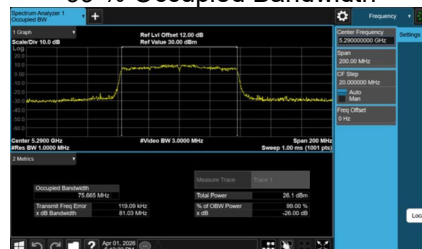

Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.50	19.058
60	5300	21.68	19.070
64	5320	21.40	19.100

CH52




CH60




26 dB Bandwidth

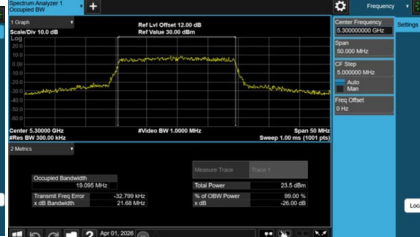

CH64

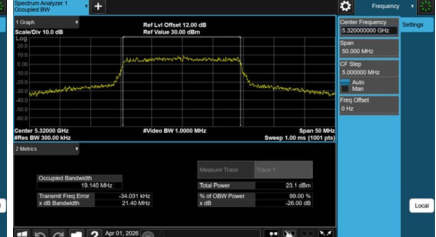


99 % Occupied Bandwidth

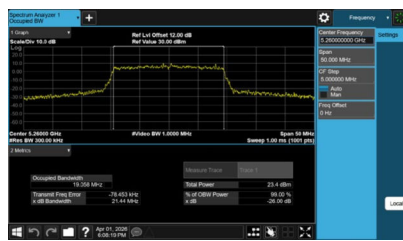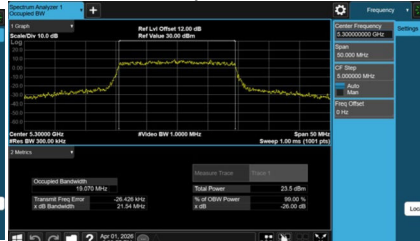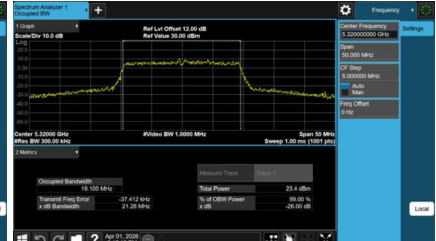

Test Mode	UNII-2A_TX AX(HE40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.55	37.890
62	5310	39.76	37.812

CH54

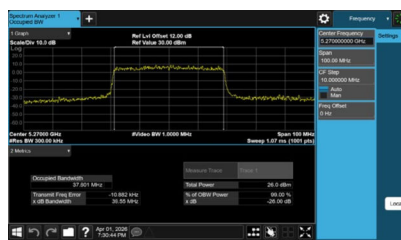


CH62

26 dB Bandwidth

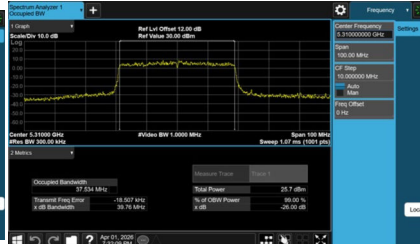


99 % Occupied Bandwidth

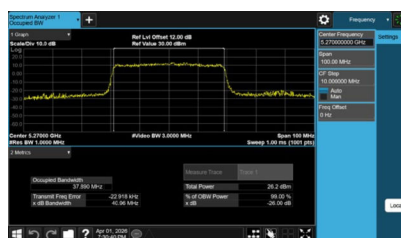


Test Mode	UNII-2A_TX AX(HE80) Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	81.131	77.193

CH58 26 dB Bandwidth

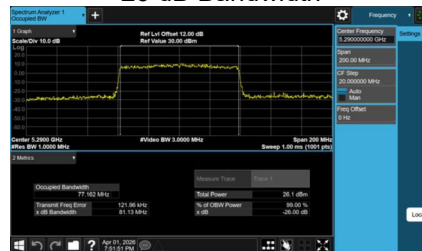

99 % Occupied Bandwidth

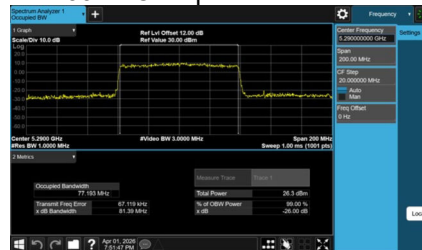


Test Mode	UNII-2C_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	31.72	17.505
116	5580	33.55	18.581
140	5700	27.92	17.349

CH100






CH116
26 dB Bandwidth

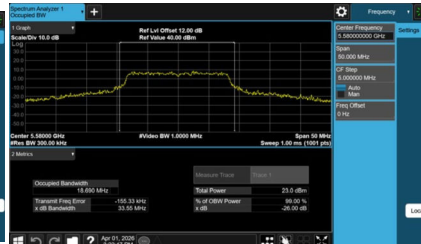

CH140



99 % Occupied Bandwidth

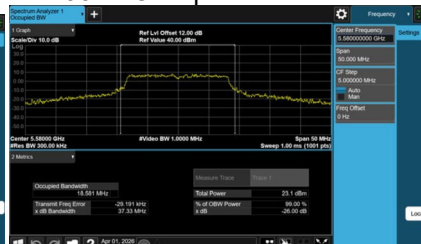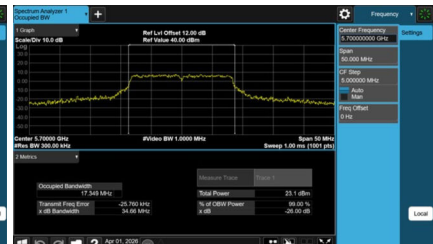

Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	21.53	17.948
116	5580	21.78	18.022
140	5700	21.34	18.106

CH100




CH116




26 dB Bandwidth

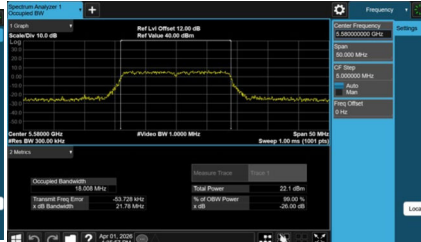

CH140

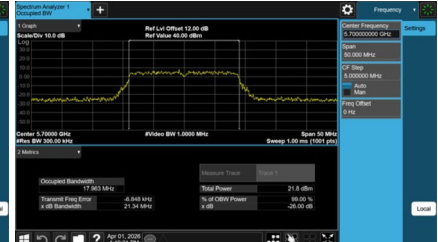

99 % Occupied Bandwidth

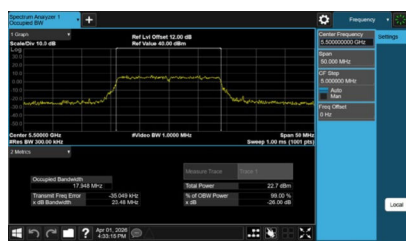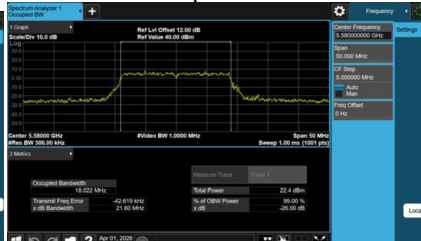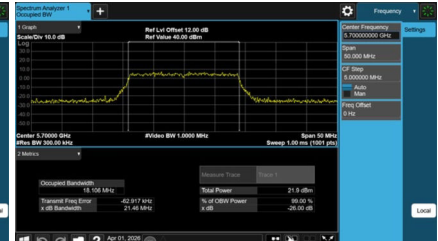

Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	57.48	36.752
110	5550	40.23	36.633
134	5670	39.95	38.709

CH102




CH110



26 dB Bandwidth

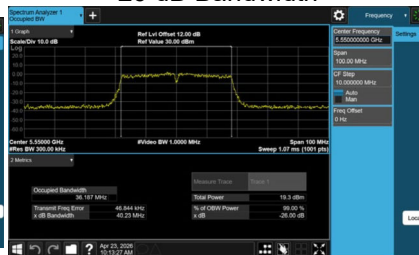

CH134

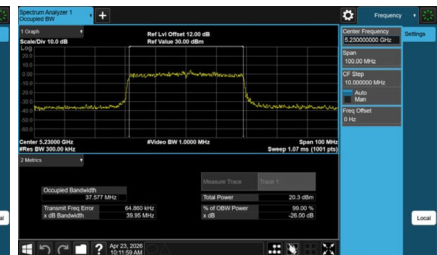


99 % Occupied Bandwidth

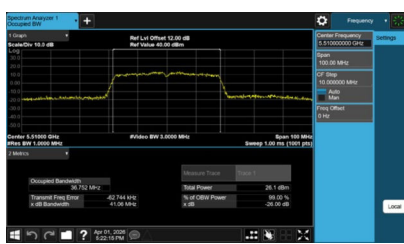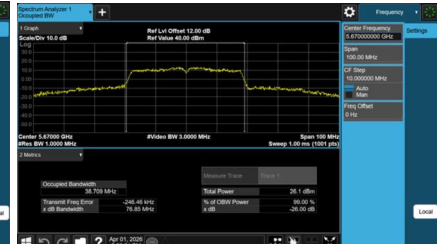

Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	81.48	75.572
122	5610	122.70	76.418

CH106

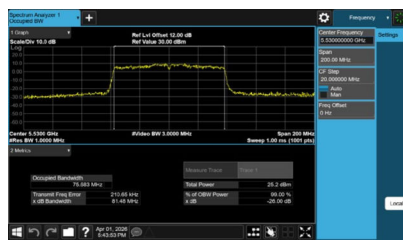

CH122

26 dB Bandwidth

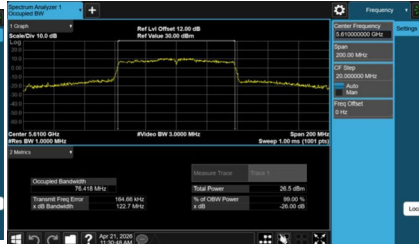

99 % Occupied Bandwidth

