



# FCC REPORT

**Applicant:** Dinsafer Innovation Co., Ltd.

**Address of Applicant:** Room 402/403, Floor 4, Area B, Unit B, West Silicon Valley,  
No. 5010, Baoan Avenue, Hangcheng Street, Baoan District,  
Shenzhen, 518128, China

**Manufacturer:** Dinsafer Innovation Co., Ltd.

**Address of  
Manufacturer:** Room 402/403, Floor 4, Area B, Unit B, West Silicon Valley,  
No. 5010, Baoan Avenue, Hangcheng Street, Baoan District,  
Shenzhen, 518128, China

**Equipment Under Test (EUT)**

Product Name: Wireless Garage Door Sensor

Model No.: DGDA4(DGD \*4,\*=A-Z)(DGD A\*,\*=1-9)

**FCC ID:** 2ASON-DGDA4

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.231

**Date of sample receipt:** March 01, 2019

**Date of Test:** March 01-11, 2019

**Date of report issued:** March 12, 2019

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

The image shows a handwritten signature in black ink over a circular blue stamp. The stamp contains the text 'GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD.' around the perimeter and 'GTS' in the center. There are also some smaller, less legible characters within the stamp.

Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

| Version No. | Date           | Description |
|-------------|----------------|-------------|
| 01          | March 12, 2019 | Original    |
|             |                |             |
|             |                |             |
|             |                |             |
|             |                |             |

Prepared By:

*Bill. Yuan*

Date:

March 12, 2019

Project Engineer

Check By:

*Robinson*

Date:

March 12, 2019

Reviewer

## 3 Contents

Page

|       |                                                  |    |
|-------|--------------------------------------------------|----|
| 1     | COVER PAGE .....                                 | 1  |
| 2     | VERSION .....                                    | 2  |
| 3     | CONTENTS .....                                   | 3  |
| 4     | TEST SUMMARY .....                               | 4  |
| 4.1   | MEASUREMENT UNCERTAINTY .....                    | 4  |
| 5     | GENERAL INFORMATION .....                        | 5  |
| 5.1   | GENERAL DESCRIPTION OF EUT .....                 | 5  |
| 5.2   | TEST MODE .....                                  | 6  |
| 5.3   | DESCRIPTION OF SUPPORT UNITS .....               | 6  |
| 5.4   | TEST FACILITY .....                              | 6  |
| 5.5   | TEST LOCATION .....                              | 6  |
| 5.6   | OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 6  |
| 6     | TEST INSTRUMENTS LIST .....                      | 7  |
| 7     | TEST RESULTS AND MEASUREMENT DATA .....          | 9  |
| 7.1   | ANTENNA REQUIREMENT .....                        | 9  |
| 7.2   | RADIATED EMISSION METHOD.....                    | 10 |
| 7.2.1 | Field Strength of The Fundamental Signal.....    | 12 |
| 7.2.2 | Spurious Emissions.....                          | 13 |
| 7.3   | 20dB OCCUPY BANDWIDTH .....                      | 16 |
| 7.4   | DWELL TIME .....                                 | 17 |
| 7.5   | DUTY CYCLE .....                                 | 19 |
| 8     | TEST SETUP PHOTO .....                           | 21 |
| 9     | EUT CONSTRUCTIONAL DETAILS.....                  | 22 |

## 4 Test Summary

| Test Item                                | Section in CFR 47 | Result |
|------------------------------------------|-------------------|--------|
| Antenna Requirement                      | 15.203            | Pass   |
| Conduction Emission                      | 15.207            | N/A    |
| Field strength of the Fundamental Signal | 15.231 (b)        | Pass   |
| Spurious Emissions                       | 15.231 (b)/15.209 | Pass   |
| 20dB Bandwidth                           | 15.231 (c)        | Pass   |
| Dwell Time                               | 15.231 (a)(2)     | Pass   |

Pass: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

| Test Item                                                                                             | Frequency Range | Measurement Uncertainty | Notes |
|-------------------------------------------------------------------------------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                                                                                     | 9kHz ~ 30MHz    | $\pm 4.54\text{dB}$     | (1)   |
| Radiated Emission                                                                                     | 30MHz ~ 1000MHz | $\pm 5.34\text{dB}$     | (1)   |
| Radiated Emission                                                                                     | 1GHz ~ 26.5GHz  | $\pm 5.34\text{dB}$     | (1)   |
| AC Power Line Conducted Emission                                                                      | 0.15MHz ~ 30MHz | $\pm 3.44\text{dB}$     | (1)   |
| Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%. |                 |                         |       |

## 5 General Information

### 5.1 General Description of EUT

|                                                                                                                                                                             |                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| Product Name:                                                                                                                                                               | Wireless Garage Door Sensor       |
| Model No.:                                                                                                                                                                  | DGDA4(DGD *4,*=A-Z)(DGD A*,*=1-9) |
| Test Model No:                                                                                                                                                              | DGDA4                             |
| <i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is model name for commercial purpose.</i> |                                   |
| Serial No.:                                                                                                                                                                 | 2019-DGDA4                        |
| Test sample(s) ID:                                                                                                                                                          | GTS201902000077-1                 |
| Sample(s) Status:                                                                                                                                                           | Engineer sample                   |
| Hardware Version:                                                                                                                                                           | C102-V1.7                         |
| Software Version:                                                                                                                                                           | C003-F4_V1.0.0.2019.02.18-RS      |
| Operation Frequency:                                                                                                                                                        | 433.92MHz                         |
| Modulation technology:                                                                                                                                                      | FSK                               |
| Antenna Type:                                                                                                                                                               | PCB Antenna                       |
| Antenna gain:                                                                                                                                                               | 3.0dBi(declare by applicant)      |
| Power supply:                                                                                                                                                               | DC 3V                             |

## 5.2 Test mode

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Transmitting mode | Keep the EUT in transmitting mode. (New battery is used during all test) |
|-------------------|--------------------------------------------------------------------------|

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which only the worst case was shown in this test report and defined as follows:

| 433.92MHz | Axis                   | X     | Y     | Z     |
|-----------|------------------------|-------|-------|-------|
|           | Field Strength(dBuV/m) | 80.31 | 82.48 | 81.29 |

## 5.3 Description of Support Units

None.

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,  
Xixiang Road, Baoan District, Shenzhen, Guangdong, China

Tel: 0755-27798480

Fax: 0755-27798960

## 5.6 Other Information Requested by the Customer

None.

## 6 Test Instruments list


| Radiated Emission: |                                     |                                |                             |               |                     |                         |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                      | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | July. 03 2015       | July. 02 2020           |
| 2                  | Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                   | Rohde & Schwarz                | ESU26                       | GTS203        | June. 27 2018       | June. 26 2019           |
| 4                  | BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | June. 27 2018       | June. 26 2019           |
| 5                  | Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D                 | GTS208        | June. 27 2018       | June. 26 2019           |
| 6                  | Horn Antenna                        | ETS-LINDGREN                   | 3160                        | GTS217        | June. 27 2018       | June. 26 2019           |
| 7                  | EMI Test Software                   | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 8                  | Coaxial Cable                       | GTS                            | N/A                         | GTS213        | June. 27 2018       | June. 26 2019           |
| 9                  | Coaxial Cable                       | GTS                            | N/A                         | GTS211        | June. 27 2018       | June. 26 2019           |
| 10                 | Coaxial cable                       | GTS                            | N/A                         | GTS210        | June. 27 2018       | June. 26 2019           |
| 11                 | Coaxial Cable                       | GTS                            | N/A                         | GTS212        | June. 27 2018       | June. 26 2019           |
| 12                 | Amplifier(100kHz-3GHz)              | HP                             | 8347A                       | GTS204        | June. 27 2018       | June. 26 2019           |
| 13                 | Amplifier(2GHz-20GHz)               | HP                             | 84722A                      | GTS206        | June. 27 2018       | June. 26 2019           |
| 14                 | Amplifier (18-26GHz)                | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June. 27 2018       | June. 26 2019           |
| 15                 | Band filter                         | Amindeon                       | 82346                       | GTS219        | June. 27 2018       | June. 26 2019           |
| 16                 | Power Meter                         | Anritsu                        | ML2495A                     | GTS540        | June. 27 2018       | June. 26 2019           |
| 17                 | Power Sensor                        | Anritsu                        | MA2411B                     | GTS541        | June. 27 2018       | June. 26 2019           |
| 18                 | Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                      | GTS575        | June. 27 2018       | June. 26 2019           |
| 19                 | Splitter                            | Agilent                        | 11636B                      | GTS237        | June. 27 2018       | June. 26 2019           |
| 20                 | Loop Antenna                        | ZHINAN                         | ZN30900A                    | GTS534        | June. 27 2018       | June. 26 2019           |
| 21                 | Breitband hornantenne               | SCHWARZBECK                    | BBHA 9170                   | GTS579        | Oct. 20 2018        | Oct. 19 2019            |
| 22                 | Amplifier                           | TDK                            | PA-02-02                    | GTS574        | Oct. 20 2018        | Oct. 19 2019            |
| 23                 | Amplifier                           | TDK                            | PA-02-03                    | GTS576        | Oct. 20 2018        | Oct. 19 2019            |
| 24                 | PSA Series Spectrum Analyzer        | Rohde & Schwarz                | FSP                         | GTS578        | June. 27 2018       | June. 26 2019           |

| RF Conducted: |                                                |              |                  |            |                        |                            |
|---------------|------------------------------------------------|--------------|------------------|------------|------------------------|----------------------------|
| Item          | Test Equipment                                 | Manufacturer | Model No.        | Serial No. | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1             | MXA Signal Analyzer                            | Agilent      | N9020A           | GTS566     | June. 27 2018          | June. 26 2019              |
| 2             | EMI Test Receiver                              | R&S          | ESCI 7           | GTS552     | June. 27 2018          | June. 26 2019              |
| 3             | Spectrum Analyzer                              | Agilent      | E4440A           | GTS533     | June. 27 2018          | June. 26 2019              |
| 4             | MXG vector Signal Generator                    | Agilent      | N5182A           | GTS567     | June. 27 2018          | June. 26 2019              |
| 5             | ESG Analog Signal Generator                    | Agilent      | E4428C           | GTS568     | June. 27 2018          | June. 26 2019              |
| 6             | USB RF Power Sensor                            | DARE         | RPR3006W         | GTS569     | June. 27 2018          | June. 26 2019              |
| 7             | RF Switch Box                                  | Shongyi      | RFSW3003328      | GTS571     | June. 27 2018          | June. 26 2019              |
| 8             | EMI Test Receiver                              | R&S          | ESCI 7           | GTS552     | June. 27 2018          | June. 26 2019              |
| 9             | Programmable Constant Temp & Humi Test Chamber | WEWON        | WHTH-150L-40-880 | GTS572     | June. 27 2018          | June. 26 2019              |


| General used equipment: |                                 |              |           |               |                        |                            |
|-------------------------|---------------------------------|--------------|-----------|---------------|------------------------|----------------------------|
| Item                    | Test Equipment                  | Manufacturer | Model No. | Inventory No. | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1                       | Humidity/ Temperature Indicator | KTJ          | TA328     | GTS243        | June. 27 2018          | June. 26 2019              |
| 2                       | Barometer                       | ChangChun    | DYM3      | GTS255        | June. 27 2018          | June. 26 2019              |



## 7 Test results and Measurement Data

### 7.1 Antenna Requirement
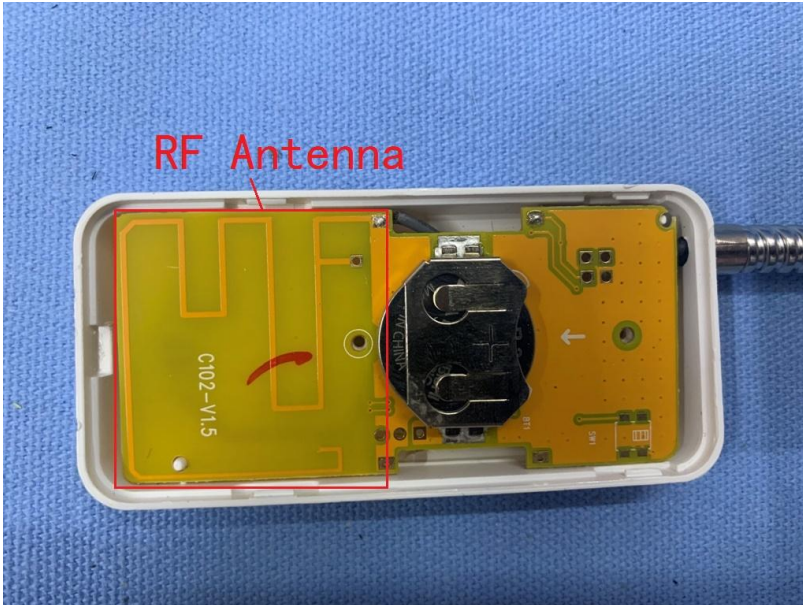
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 |
| <b>15.203 requirement:</b><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                             |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                             |
| <p><i>The antenna is PCB antenna, the best case gain of the antenna is 3.0dBi</i></p>                                                                                                                                                                                                                                                                                                         |                             |

## 7.2 Radiated Emission Method
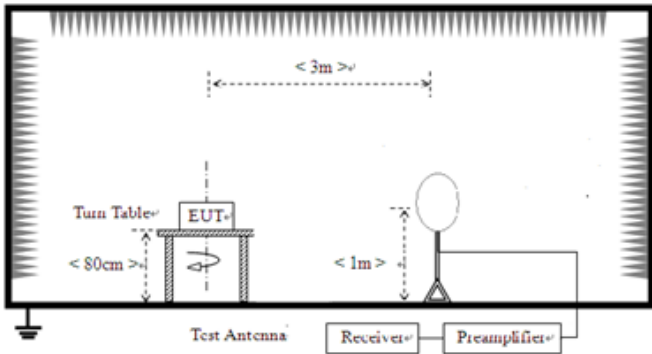
|                                                         |                                                                                                                                                          |                                                                                      |                                                        |               |                                                                  |  |
|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------|---------------|------------------------------------------------------------------|--|
| Test Requirement:                                       | FCC Part15 C Section 15.231 (b)& Section 15.209                                                                                                          |                                                                                      |                                                        |               |                                                                  |  |
| Test Method:                                            | ANSI C63.10:2013                                                                                                                                         |                                                                                      |                                                        |               |                                                                  |  |
| Test Frequency Range:                                   | 9kHz to 5000MHz                                                                                                                                          |                                                                                      |                                                        |               |                                                                  |  |
| Test site:                                              | Measurement Distance: 3m                                                                                                                                 |                                                                                      |                                                        |               |                                                                  |  |
| Receiver setup:                                         | Frequency                                                                                                                                                | Detector                                                                             | RBW                                                    | VBW           | Value                                                            |  |
|                                                         | 9KHz-150KHz                                                                                                                                              | PK,AV,QP                                                                             | 200Hz                                                  | 600Hz         | PK,AV,QP                                                         |  |
|                                                         | 150KHz-30MHz                                                                                                                                             | PK,AV,QP                                                                             | 9KHz                                                   | 30KHz         | PK,AV,QP                                                         |  |
|                                                         | 30MHz-1GHz                                                                                                                                               | Quasi-peak                                                                           | 120KHz                                                 | 300KHz        | Quasi-peak                                                       |  |
|                                                         | Above 1GHz                                                                                                                                               | Peak                                                                                 | 1MHz                                                   | 3MHz          | Peak                                                             |  |
|                                                         |                                                                                                                                                          | Peak                                                                                 | 1MHz                                                   | 10Hz          | Average                                                          |  |
| Limit:<br>(Field strength of the<br>fundamental signal) | Frequency                                                                                                                                                | Limit (dBuV/m @3m)                                                                   |                                                        | Remark        |                                                                  |  |
|                                                         | 433.92MHz                                                                                                                                                | 100.83                                                                               |                                                        | Peak Value    |                                                                  |  |
|                                                         |                                                                                                                                                          | 80.83                                                                                |                                                        | Average Value |                                                                  |  |
| Limit:<br>(Spurious Emissions)                          | Fundamental Frequency<br>(MHz)                                                                                                                           |                                                                                      | Field Strength of<br>fundamental<br>(microvolts/meter) |               | Field Strength of<br>Unwanted<br>Emissions<br>(microvolts/meter) |  |
|                                                         | 40.66-40.70                                                                                                                                              |                                                                                      | 1,000                                                  |               | 100                                                              |  |
|                                                         | 70-130                                                                                                                                                   |                                                                                      | 500                                                    |               | 50                                                               |  |
|                                                         | 130-174                                                                                                                                                  |                                                                                      | 500 to 1,500**                                         |               | 50 to 1,50**                                                     |  |
|                                                         | 174-260                                                                                                                                                  |                                                                                      | 1,500                                                  |               | 1,50                                                             |  |
|                                                         | 260-470                                                                                                                                                  |                                                                                      | 1,500 to 5,000**                                       |               | 1,50 to 5,00**                                                   |  |
|                                                         | Above 470                                                                                                                                                |                                                                                      | 5,000                                                  |               | 5,00                                                             |  |
|                                                         | Frequency<br>(MHz)                                                                                                                                       |                                                                                      | Class B(dBuV/m @3m)                                    |               |                                                                  |  |
|                                                         | Above 1000                                                                                                                                               |                                                                                      | Peak                                                   |               | Average                                                          |  |
|                                                         |                                                                                                                                                          |                                                                                      | 74                                                     |               | 54                                                               |  |
|                                                         | Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength. |                                                                                      |                                                        |               |                                                                  |  |
|                                                         | Test setup:                                                                                                                                              | Below 30MHz                                                                          |                                                        |               |                                                                  |  |
|                                                         |                                                                                                                                                          |  |                                                        |               |                                                                  |  |
|                                                         | Test setup:                                                                                                                                              | Below 1GHz                                                                           |                                                        |               |                                                                  |  |
|                                                         |                                                                                                                                                          |                                                                                      |                                                        |               |                                                                  |  |
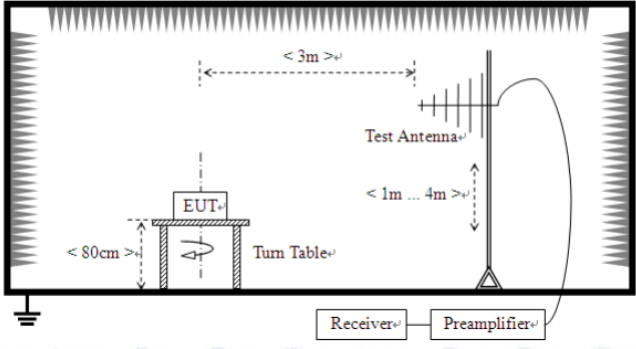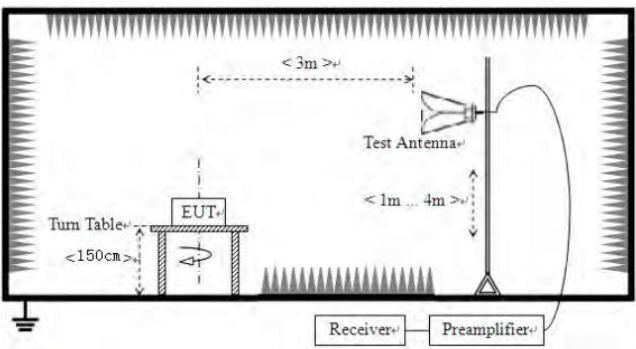
|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          |  <p>Above 1GHz</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <p>Test Procedure:</p>   | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <p>Test mode:</p>        | <p>Refer to section 5.2 for details</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <p>Test results:</p>     | <p>Pass</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**Measurement data:**

**7.2.1 Field Strength of The Fundamental Signal**

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 433.92          | 100.92            | 16.06                 | 3.02            | 37.52                    | 82.48          | 100.83              | -18.35          | Horizontal   |
| 433.92          | 94.02             | 16.06                 | 3.02            | 37.52                    | 75.58          | 100.83              | -25.25          | Vertical     |

**Average value:**

| Frequency (MHz) | Peak Value (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|---------------------|-------------------|------------------------|---------------------|-----------------|--------------|
| 433.92          | 82.48               | -5.51             | 76.97                  | 80.83               | -3.86           | Horizontal   |
| 433.92          | 75.58               | -5.51             | 70.07                  | 80.83               | -10.76          | Vertical     |

**Remarks:**

1. *Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *Average value=Peak value + Duty cycle factor*

## 7.2.2 Spurious Emissions


### Measurement data:

#### 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

#### Below 1GHz:

|                  |                   |               |            |
|------------------|-------------------|---------------|------------|
| Mode:            | Transmitting mode | Test by:      | Bill       |
| Temp./Hum.(%RH): | 26°C/56%RH        | Polarization: | Horizontal |

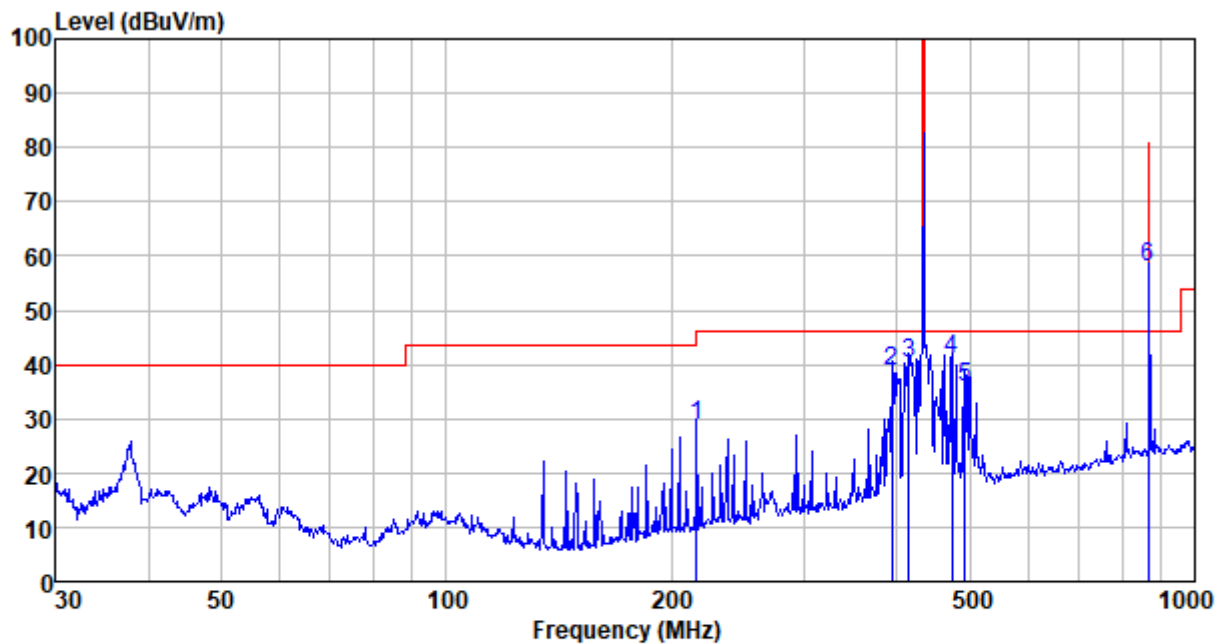


| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|---------------|--------------------------|---------------------|--------|
| 216.024     | 53.35                    | 10.99                     | 1.93                | 37.35                  | 28.92         | 46.00                    | -17.08              | QP     |
| 393.472     | 58.21                    | 15.29                     | 2.82                | 37.51                  | 38.81         | 46.00                    | -7.19               | QP     |
| 414.722     | 59.21                    | 15.69                     | 2.92                | 37.52                  | 40.30         | 46.00                    | -5.70               | QP     |
| 473.835     | 58.52                    | 16.77                     | 3.20                | 37.51                  | 40.98         | 46.00                    | -5.02               | QP     |
| 492.469     | 53.02                    | 17.08                     | 3.27                | 37.51                  | 35.86         | 46.00                    | -10.14              | QP     |
| 867.840     | 68.69                    | 22.12                     | 4.73                | 37.61                  | 57.93         | 80.83                    | -22.90              | Peak   |

#### Average value:

| Frequency<br>(MHz) | Peak Level<br>(dBuV/m) | Duty cycle<br>factor | Average<br>value<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Polarization |
|--------------------|------------------------|----------------------|------------------------------|------------------------|--------------------|--------------|
| 867.840            | 57.93                  | -5.51                | 52.42                        | 60.83                  | -8.41              | Horizontal   |

|                 |                   |               |          |
|-----------------|-------------------|---------------|----------|
| Mode:           | Transmitting mode | Test by:      | Bill     |
| Temp./Hum.(%H): | 26°C/56%RH        | Polarization: | Vertical |

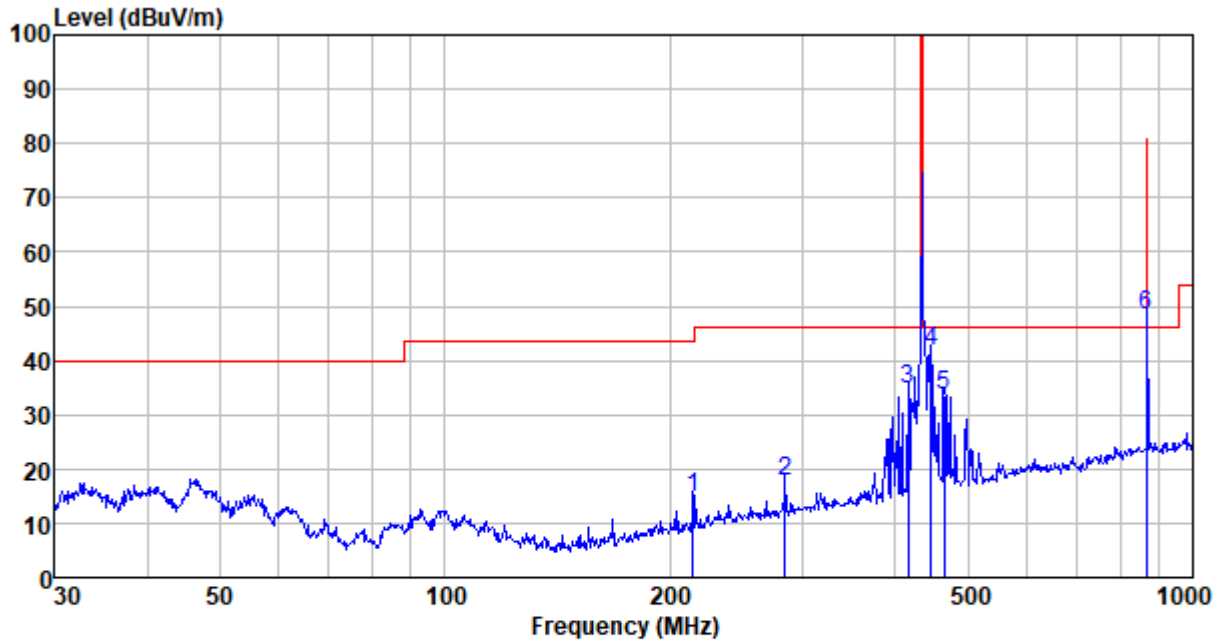

| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|---------------|--------------------------|---------------------|--------|
| 214.514     | 39.37                    | 10.94                     | 1.93                | 37.35                  | 14.89         | 43.50                    | -28.61              | QP     |
| 284.977     | 39.72                    | 13.11                     | 2.29                | 37.41                  | 17.71         | 46.00                    | -28.29              | QP     |
| 416.179     | 53.65                    | 15.72                     | 2.93                | 37.52                  | 34.78         | 46.00                    | -11.22              | QP     |
| 446.414     | 59.93                    | 16.29                     | 3.07                | 37.52                  | 41.77         | 46.00                    | -4.23               | QP     |
| 465.599     | 51.28                    | 16.62                     | 3.16                | 37.51                  | 33.55         | 46.00                    | -12.45              | QP     |
| 867.840     | 59.27                    | 22.12                     | 4.73                | 37.61                  | 48.51         | 80.83                    | -32.32              | Peak   |

Average value:

| Frequency<br>(MHz) | Peak Level<br>(dBuV/m) | Duty cycle<br>factor | Average<br>value<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Polarization |
|--------------------|------------------------|----------------------|------------------------------|------------------------|--------------------|--------------|
| 867.840            | 48.51                  | -5.51                | 43.00                        | 60.83                  | -17.83             | Vertical     |

## Above 1G:

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 1735.68         | 63.37             | 25.05                 | 4.82            | 34.00                    | 59.24          | 80.83               | -21.59          | Vertical     |
| 2169.60         | 60.25             | 27.74                 | 5.15            | 34.27                    | 58.87          | 80.83               | -21.96          | Vertical     |
| 2603.52         | 58.71             | 27.82                 | 5.58            | 33.78                    | 58.33          | 80.83               | -22.50          | Vertical     |
| 1735.68         | 66.19             | 25.05                 | 4.82            | 34.00                    | 62.06          | 80.83               | -18.77          | Horizontal   |
| 2169.60         | 61.45             | 27.74                 | 5.15            | 34.27                    | 60.07          | 80.83               | -20.76          | Horizontal   |
| 2603.52         | 60.89             | 27.82                 | 5.58            | 33.78                    | 60.51          | 80.83               | -20.32          | Horizontal   |


### Average value:

| Frequency (MHz) | Level (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|----------------|-------------------|------------------------|---------------------|-----------------|--------------|
| 1736.00         | 59.24          | -5.51             | 53.73                  | 60.83               | -7.10           | Vertical     |
| 2170.00         | 58.87          | -5.51             | 53.36                  | 60.83               | -7.47           | Vertical     |
| 2604.00         | 58.33          | -5.51             | 52.82                  | 60.83               | -8.01           | Vertical     |
| 1736.00         | 62.06          | -5.51             | 56.55                  | 60.83               | -4.28           | Horizontal   |
| 2170.00         | 60.07          | -5.51             | 54.56                  | 60.83               | -6.27           | Horizontal   |
| 2604.00         | 60.51          | -5.51             | 55.00                  | 60.83               | -5.83           | Horizontal   |

### Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. Average value = Peak value + Duty cycle factor

## 7.3 20dB Occupy Bandwidth
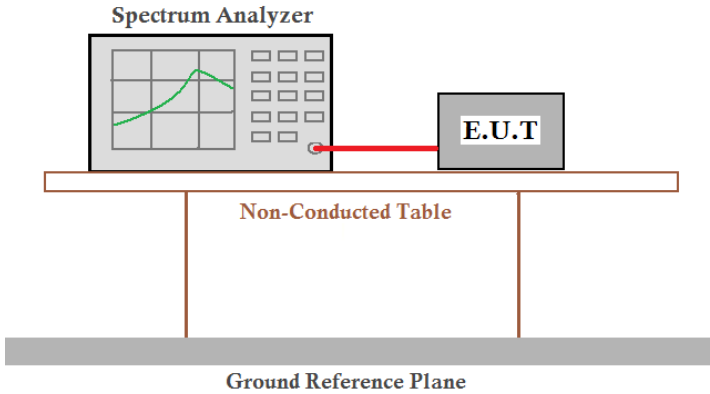
|                   |                                                                                                                                                                                                                                                                                                                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.231 (c)                                                                                                                                                                                                                                                                                             |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                            |
| Limit:            | The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an Equipment Under Test (E.U.T.). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>             |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                            |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                            |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                        |


### Measurement Data

| Test Frequency (MHz) | 20dB bandwidth (MHz) | Limit (MHz) | Result |
|----------------------|----------------------|-------------|--------|
| 433.92               | 0.095                | 1.085       | Pass   |


Note: Limit= Fundamental frequency×0.25%

$433.92 \times 0.25\% = 1.085\text{MHz}$

Test plot as follows:

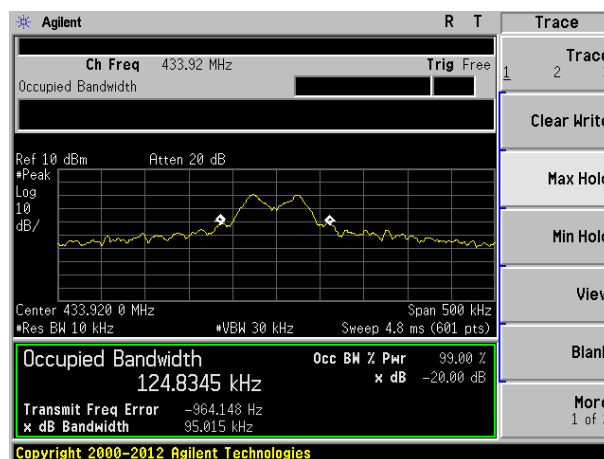



## 7.4 Dwell Time
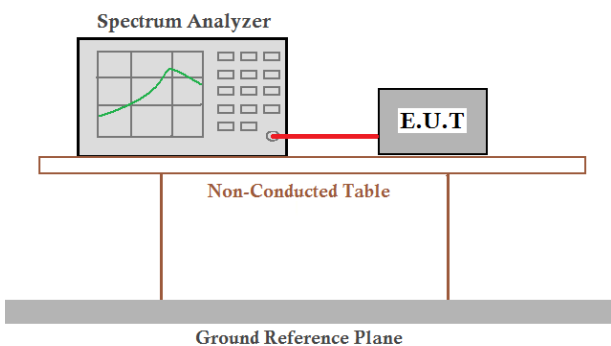
|                   |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.231 (a)(2)                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                           |
| Receiver setup:   | RBW=100KHz, VBW=100KHz, span=0Hz, detector: Peak                                                                                                                                                                                                                                                                                                           |
| Limit:            | Not more than 5 seconds                                                                                                                                                                                                                                                                                                                                    |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                       |


### Measurement data:

| Frequency (MHz) | Duration of each TX (second) | Limit (second) | Result |
|-----------------|------------------------------|----------------|--------|
| 433.92          | 0.053                        | <5.0           | Pass   |

Test plot as follows:

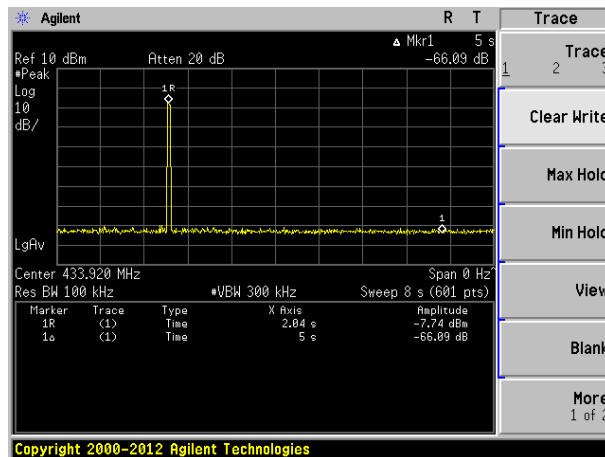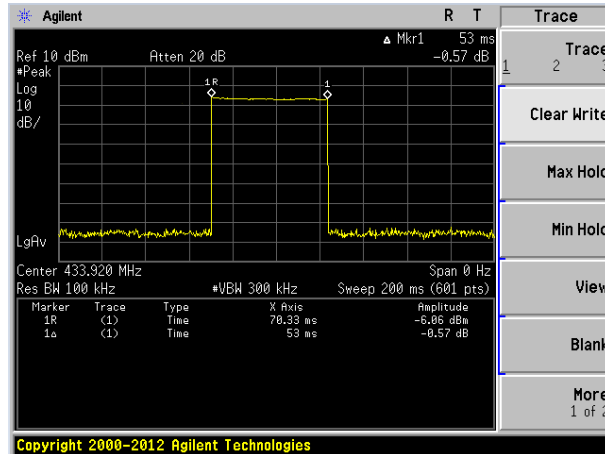

## 7.5 Duty Cycle

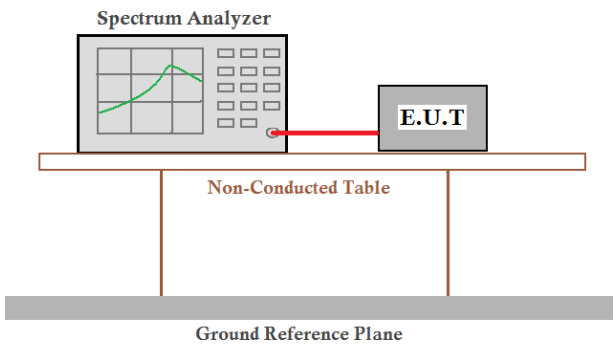
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.231                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Receiver setup:   | RBW=100KHz, VBW=100KHz, span=0Hz, detector: Peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Limit:            | No dedicated limit specified in the Rules.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. Place the EUT on the table and set it in transmitting mode.</li> <li>2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.</li> <li>3. Set centre frequency of spectrum analyzer=operating frequency.</li> <li>4. Set the spectrum analyzer as RBW=100kHz, VBW=100kHz, Span=0Hz, Adjust Sweep=100ms to obtain the “worst-case” pulse on time</li> <li>5. Repeat above procedures until all frequency measured was complete.</li> </ol> |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red RF cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>                                                                                                                                                                                     |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## Measurement data:

Calculate Formula: Duty cycle factor =  $20 \log(\text{Duty cycle})$   
 Duty cycle = on time / 0.1 seconds or period, whichever is less



Test data: T on time = 53(ms)  
 T period > 100(ms)  
 Duty cycle =  $53/100 = 53\%$   
 Duty cycle factor =  $20 \log(0.53) = -5.51$

Test plot as follows:


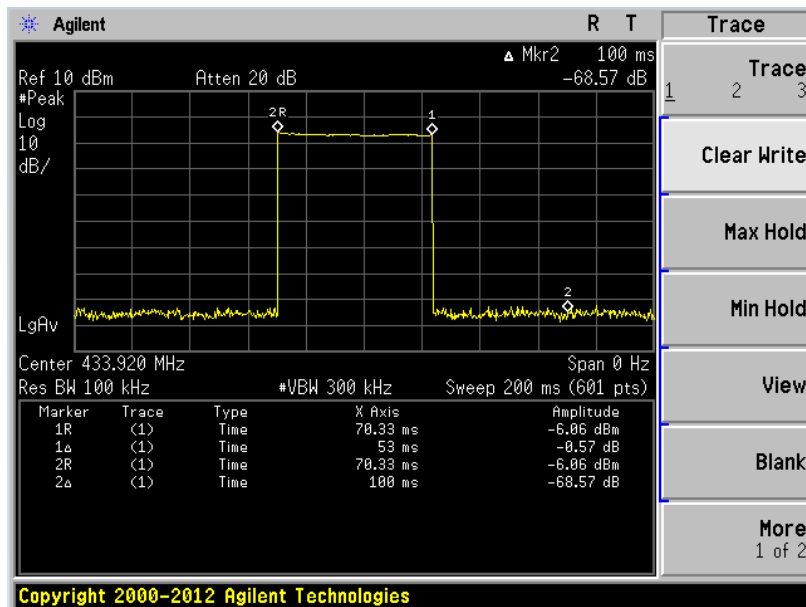



## 8 Test Setup Photo


Radiated Emission

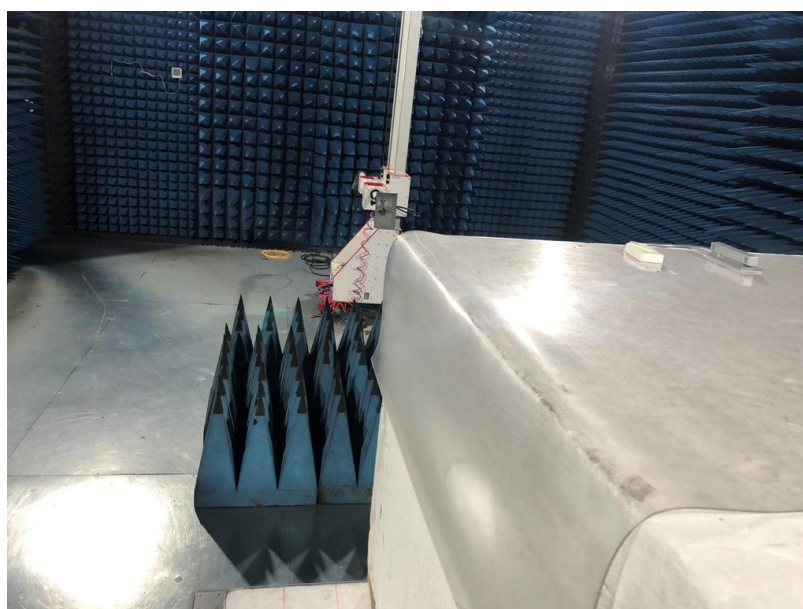
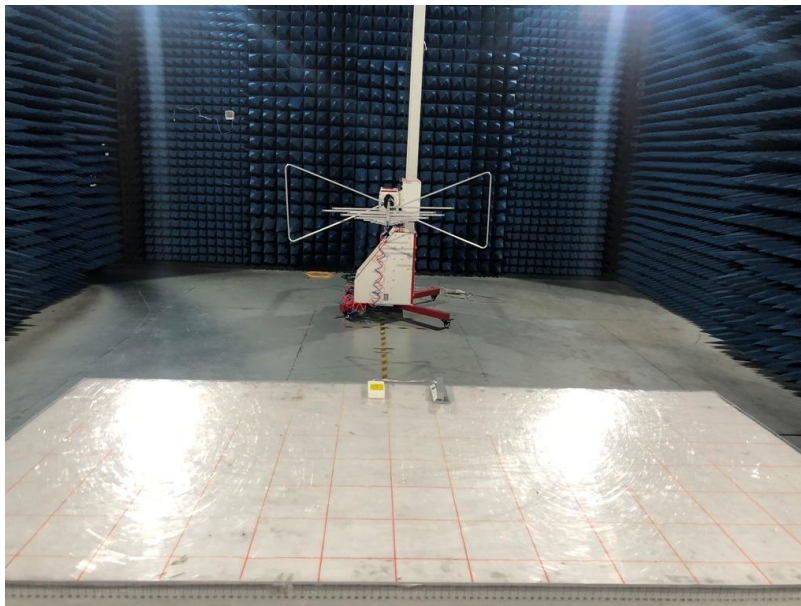




## 9 EUT Constructional Details

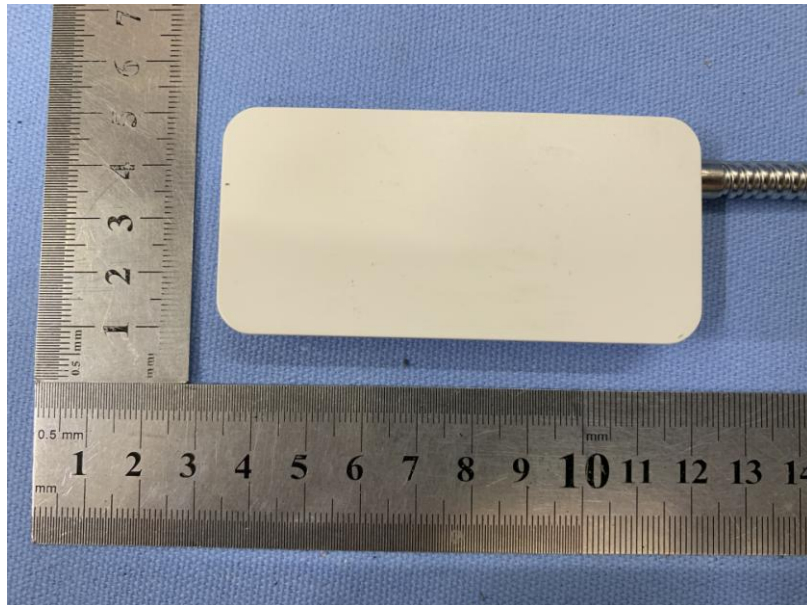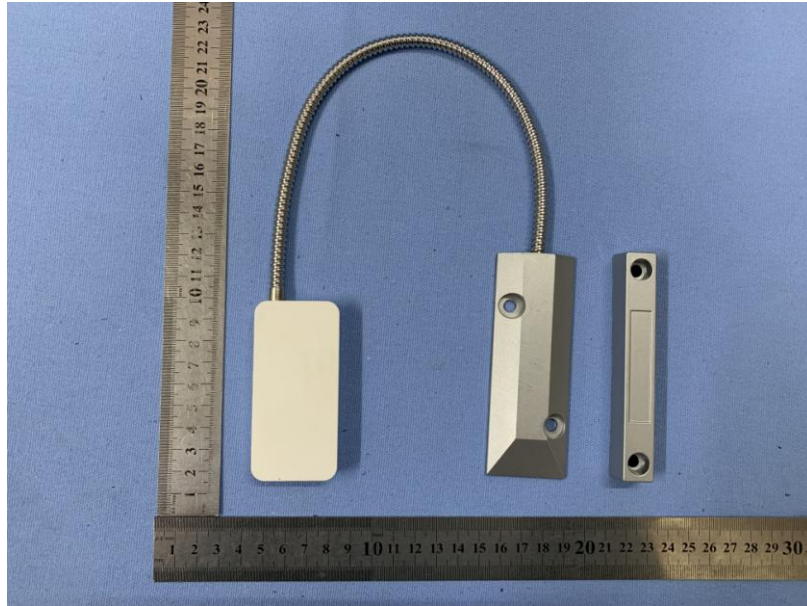


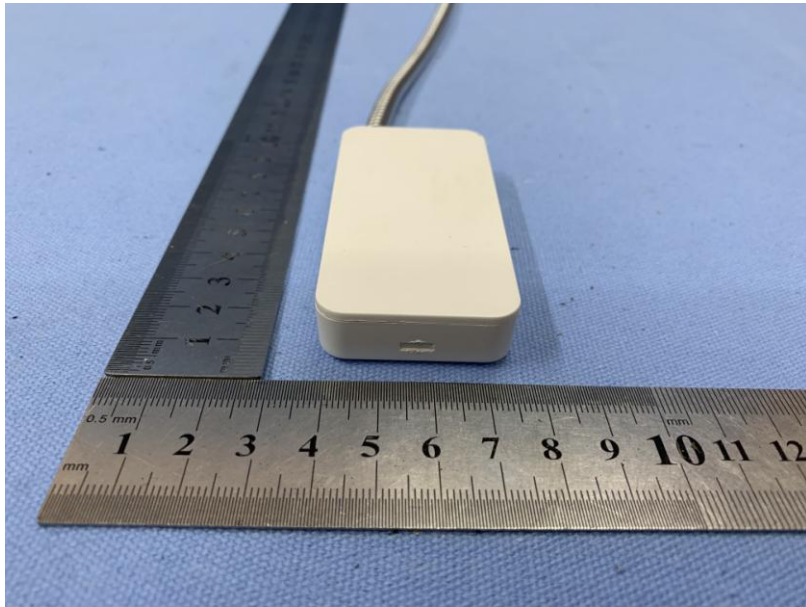

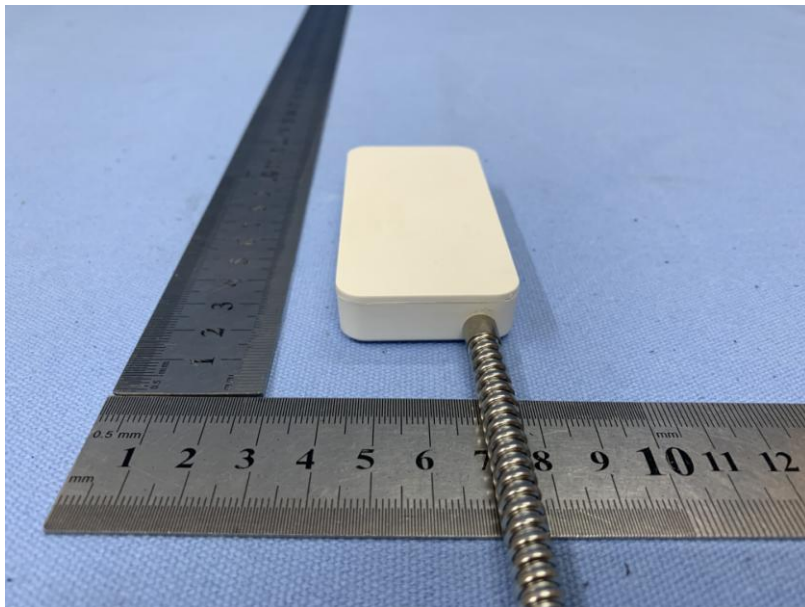

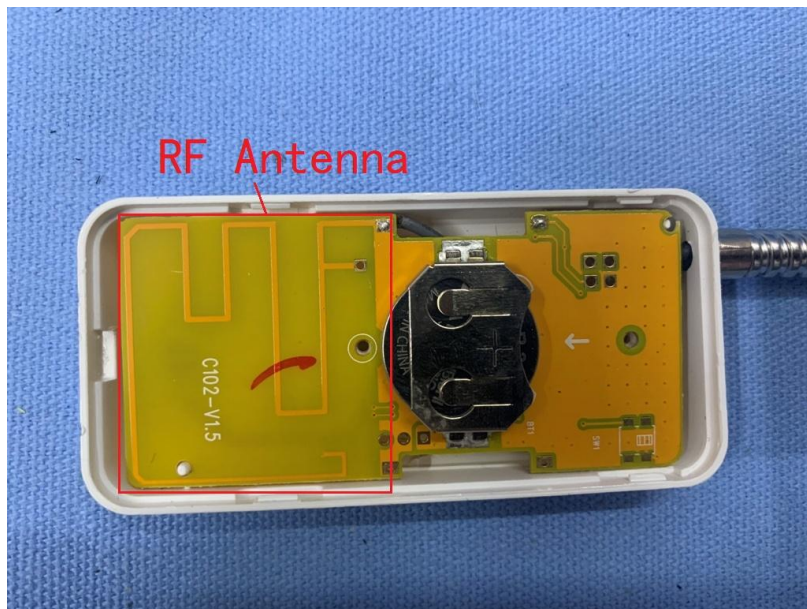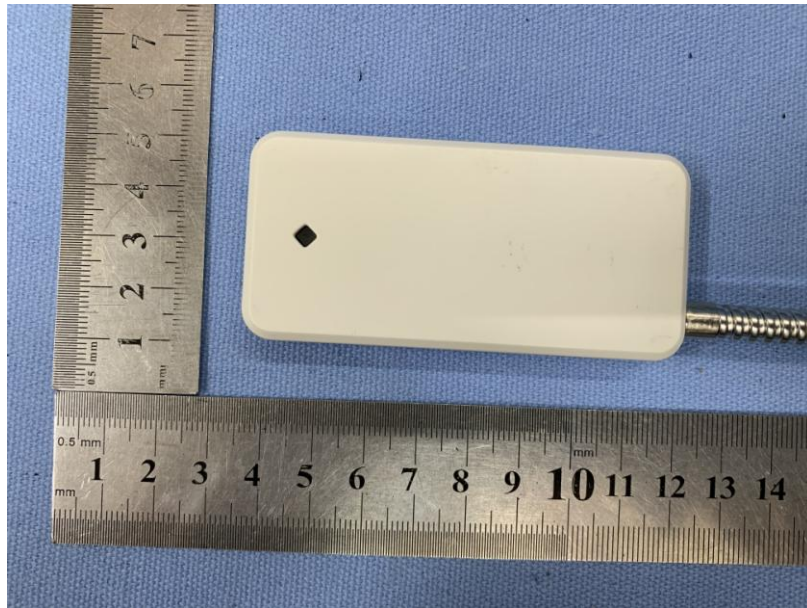

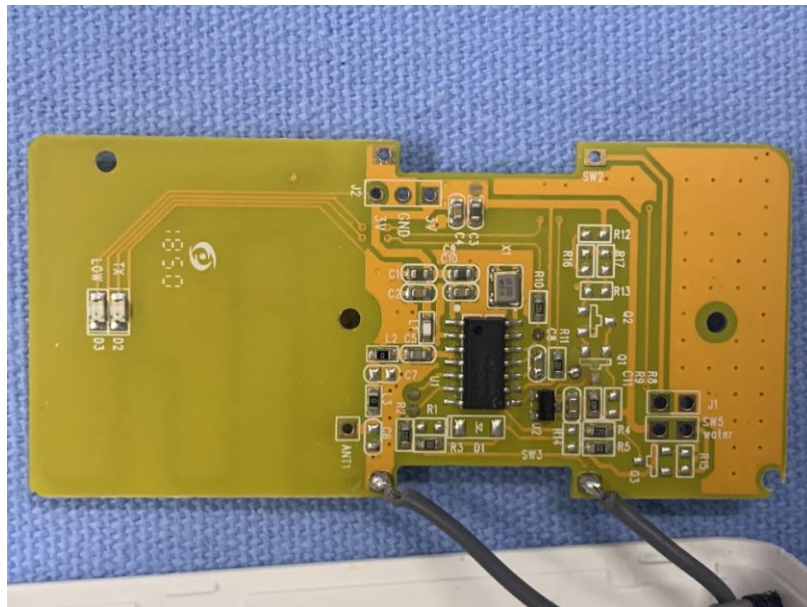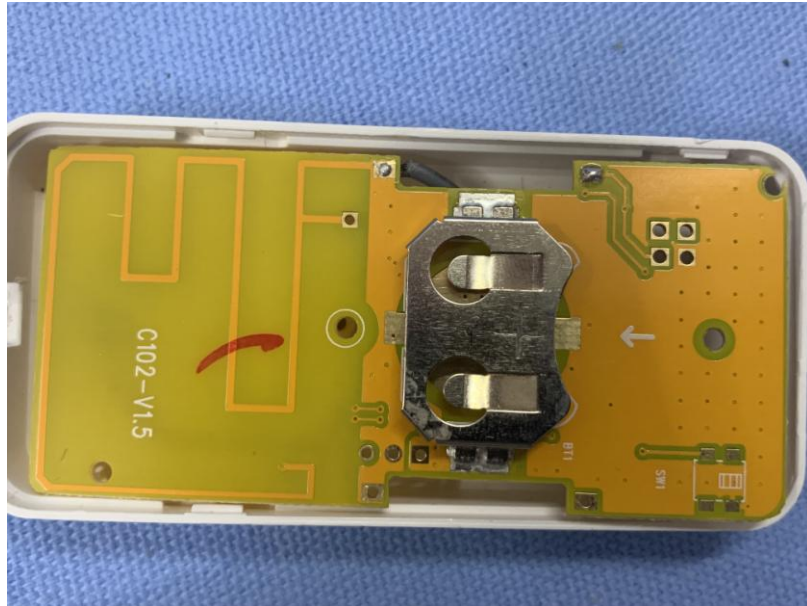

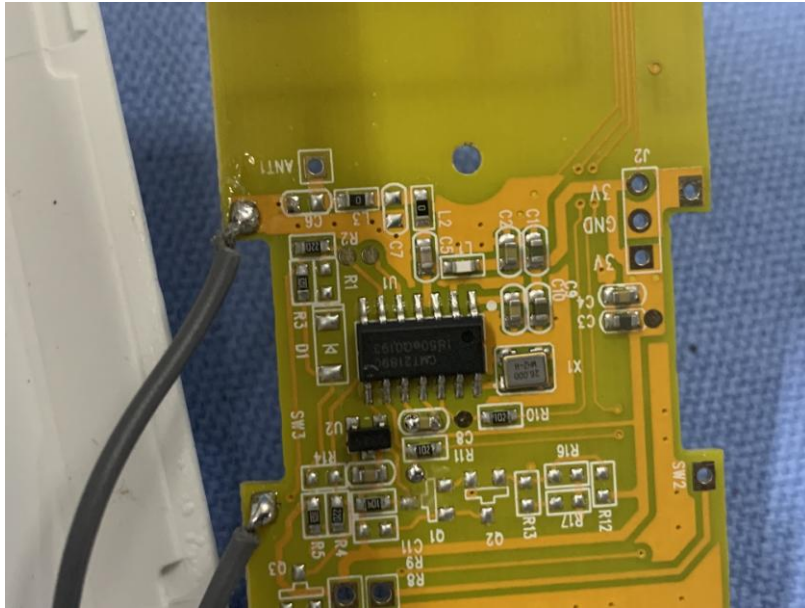

----- End -----