



# FCC Part 96.47 TEST REPORT

FCC ID : 2ASRY-MG401  
Equipment : LTE Module  
Brand Name : AQUILA  
Model Name : MG401  
Applicant : Suzhou Aquila Solutions Inc.  
Room 201, Building 3, 18 Dongchang Road,  
Suzhou Industry Park Suzhou, 215000 China  
Manufacturer : Suzhou Aquila Solutions Inc.  
Room 201, Building 3, 18 Dongchang Road,  
Suzhou Industry Park Suzhou, 215000 China  
Standard : FCC Part 96.47

The product was received on Mar. 30, 2020 and testing was started from Apr. 13, 2020 and completed on Apr. 13, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

---

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

---



## Table of Contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                   | <b>3</b>  |
| <b>Summary of Test Result.....</b>                        | <b>4</b>  |
| <b>1 General Description .....</b>                        | <b>5</b>  |
| 1.1 Product Feature of Equipment Under Test.....          | 5         |
| 1.2 Modification of EUT .....                             | 5         |
| 1.3 Testing Location .....                                | 5         |
| 1.4 Applicable Standards.....                             | 5         |
| <b>2 Test Configuration of Equipment Under Test .....</b> | <b>6</b>  |
| 2.1 Connection Diagram of Test System.....                | 6         |
| <b>3 End User Device additional requirement .....</b>     | <b>7</b>  |
| 3.1 Test Requirement .....                                | 7         |
| 3.2 Test Procedure .....                                  | 7         |
| 3.3 Test Result.....                                      | 8         |
| <b>4 List of Measuring Equipment.....</b>                 | <b>10</b> |
| <b>Appendix A Test Setup Photo</b>                        |           |



## History of this test report

| Report No. | Version | Description             | Issued Date   |
|------------|---------|-------------------------|---------------|
| FG030207A  | 01      | Initial issue of report | Apr. 15, 2020 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items                             | Result (PASS/FAIL) | Remark |
|---------------|-----------------|----------------------------------------|--------------------|--------|
| 3             | 96.47           | End User Device additional requirement | Pass               | -      |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: William Chen**

**Report Producer: Yimin Ho**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

LTE

| Product Specification subjective to this standard |                        |
|---------------------------------------------------|------------------------|
| Antenna Type                                      | Fixed External Antenna |

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

|                    |                                                                                                                    |
|--------------------|--------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory                                                |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| Test Site No.      | <b>Sporton Site No.</b><br>DFS02-HY                                                                                |
| Test Engineer      | Howard Lin                                                                                                         |
| Temperature        | 21 ~ 25 °C                                                                                                         |
| Relative Humidity  | 50 ~ 56 %                                                                                                          |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190


## 1.4 Applicable Standards

- ♦ FCC Part 96.47
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v02
- ♦ WINNF-TS-0122-V1.0.1 CBRS CBSD Test Specification

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Connection Diagram of Test System

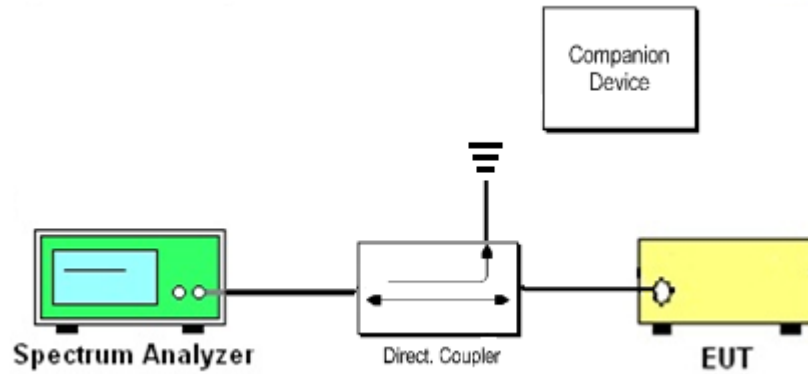

The companion device is certified CBRS (FCC ID: S9GQ710US02)



### **3 End User Device additional requirement**

#### **3.1 Test Requirement**

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

#### **3.2 Test Procedure**


Following procedure can be done by applying WINNF-TS-0122-V1.0.1 CBRS CBSD Test Specification, use the certified Ruckus CBSD (FCC ID: S9GQ710US02) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):

1. Setup with frequency 3600-3620MHz and power level 7dBm/MHz
2. Enable AP service from Ruckus Cloud management
3. Check EUD Tx Frequency and power
4. Disable AP service from Ruckus Cloud management
  - a. Check EUD stops transmission within 10seconds.
5. Setup with 3670-3690MHz & power level 17dBm/MHz
6. Enable AP service from Ruckus Cloud management
7. Check EUD Tx Frequency and power
8. Disable AP service from Ruckus Cloud management
  - a. Check EUD stops transmission within 10seconds.


### 3.3 Test Result

[Step 1] Setup with frequency 3600-3620MHz and power level 7dBm/MHz

[Step 3] Check EUD Tx Frequency and power

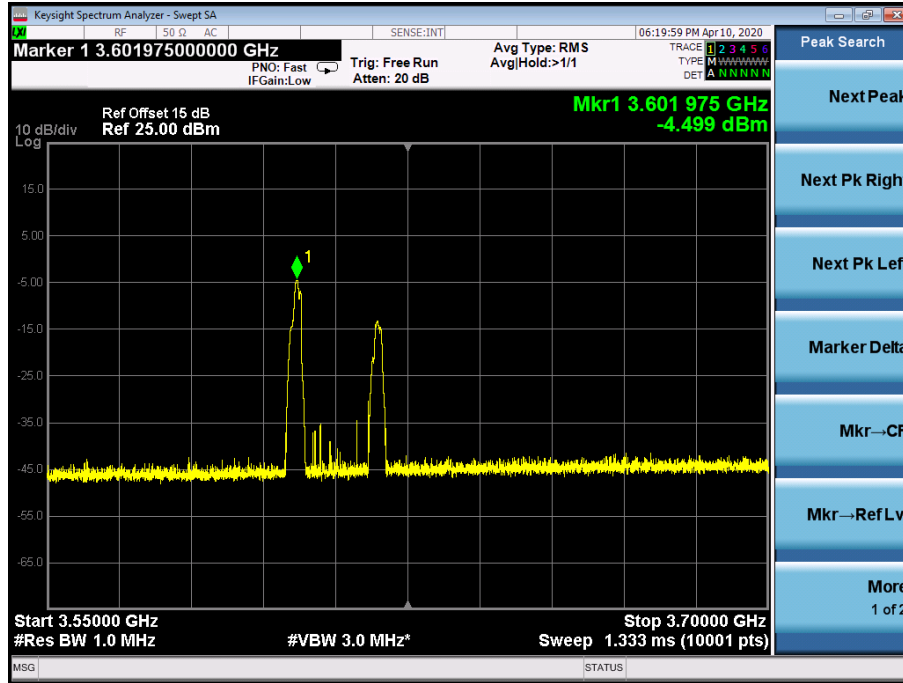


[Step 4.a.] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.

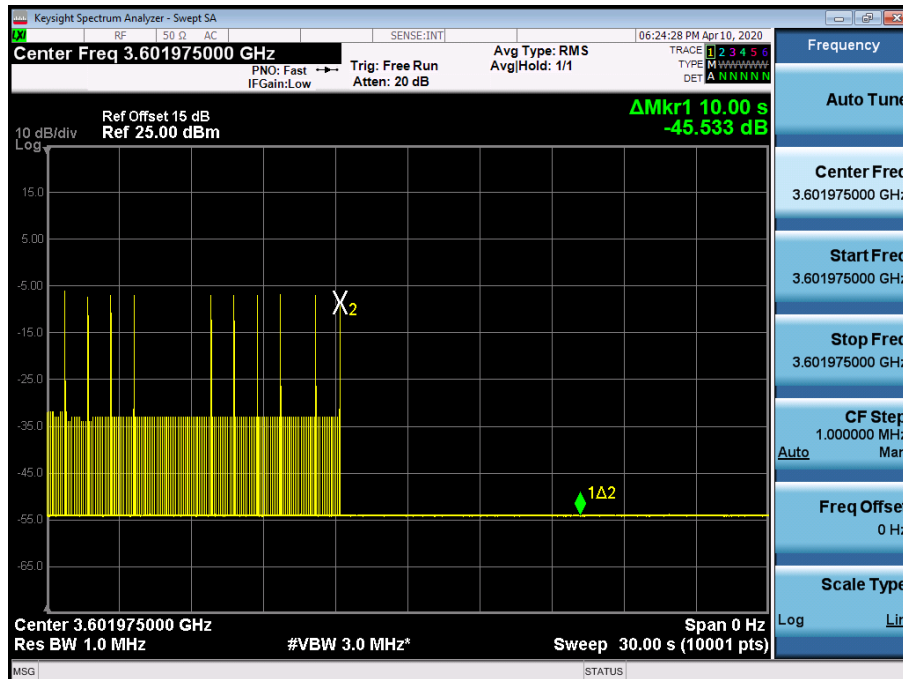


[Step 5] Setup with 3670-3690MHz & power level 17dBm/MHz

[Step 7] Check EUD Tx Frequency and power

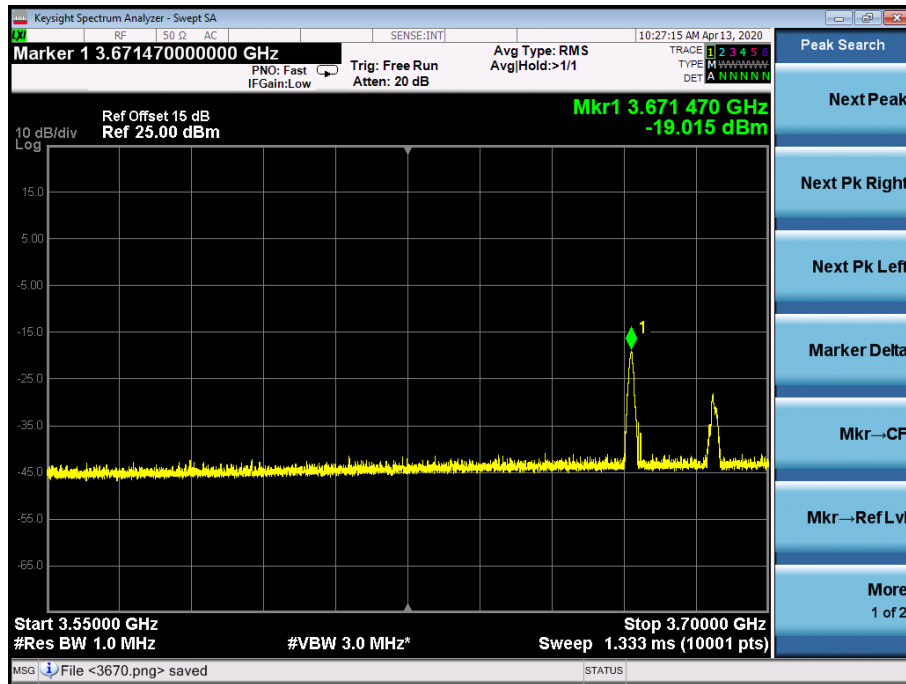

[Step 8.a.] After changing the frequency and power level,

The module (EUT) discontinues operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD. Test result is PASS.

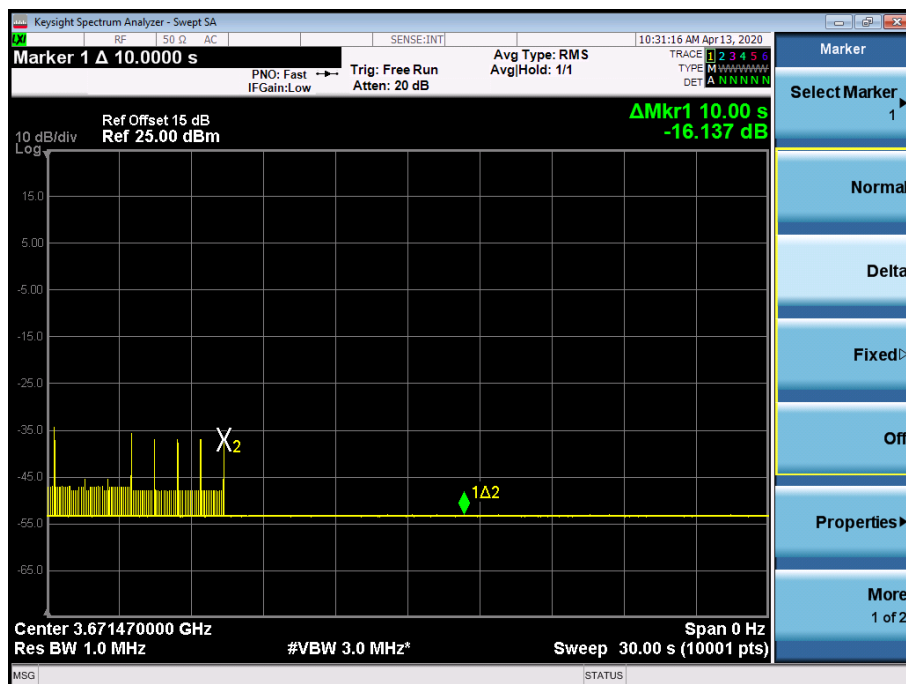



## 4 List of Measuring Equipment

| Instrument        | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date     | Due Date      | Remark   |
|-------------------|--------------|-----------|------------|-----------------|------------------|---------------|---------------|----------|
| Spectrum Analyzer | Keysight     | N9010A    | MY57120184 | 10Hz~7GHz       | Nov. 20, 2019    | Apr. 13, 2020 | Nov. 19, 2020 | DFS02-HY |