

Test Report

Report No. : CQASZ20190500020EX-01
Applicant: MAYFLASH LIMITED
Address of Applicant: 3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.
Manufacturer: MAYFLASH LIMITED
Address of Manufacturer: 3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.
Equipment Under Test (EUT):
Product: MAGIC-NS
Test Model No.: MAGIC-NS
Brand Name: N/A
FCC ID: 2ASVQ-MAGICNS
Standards: 47 CFR Part 15, Subpart C
Date of Test: May 10, 2019 to May 30, 2019
Date of Issue: May 30, 2019
Test Result : PASS*

Tested By:

Daisy Qin

Reviewed By:

(Daisy Qin)
Aaron Ma

Approved By:

(Aaron Ma)
Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190500020EX-01	Rev.01	Initial report	May 30, 2019

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

3 Contents

	Page
COVER PAGE	1
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.10 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 CONDUCTED PEAK OUTPUT POWER	16
5.4 20DB OCCUPY BANDWIDTH	21
5.5 FREQUENCIES SEPARATION	25
5.6 HOPPING CHANNEL NUMBER	27
5.7 DWELL TIME	29
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	33
5.9 SPURIOUS RF CONDUCTED EMISSIONS	39
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	50
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	52
5.11.1 Radiated Emission below 1GHz	55
5.11.2 Transmitter Emission above 1GHz	57
6 PHOTOGRAPHS - EUT TEST SETUP	60
6.1 RADIATED EMISSION	60
6.2 CONDUCTED EMISSION	61
7 PHOTOGRAPHS OF EUT	62

4 General Information

4.1 Client Information

Applicant:	MAYFLASH LIMITED
Address of Applicant:	3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.
Manufacturer:	MAYFLASH LIMITED
Address of Manufacturer:	3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.

4.2 General Description of EUT

Product Name:	MAGIC-NS
Test Model No.:	MAGIC-NS
Trade Mark:	N/A
Hardware Version:	V 2.0
Software Version:	V 1.26
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.2/ EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi
EUT Power Supply:	DC 5V from PC

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	Provide by lab	FCC ID
AC/DC Adapter	Lenovo	ADLX65NLC3A	Provide by lab	FCC SDOC

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.

4.10 Equipment List

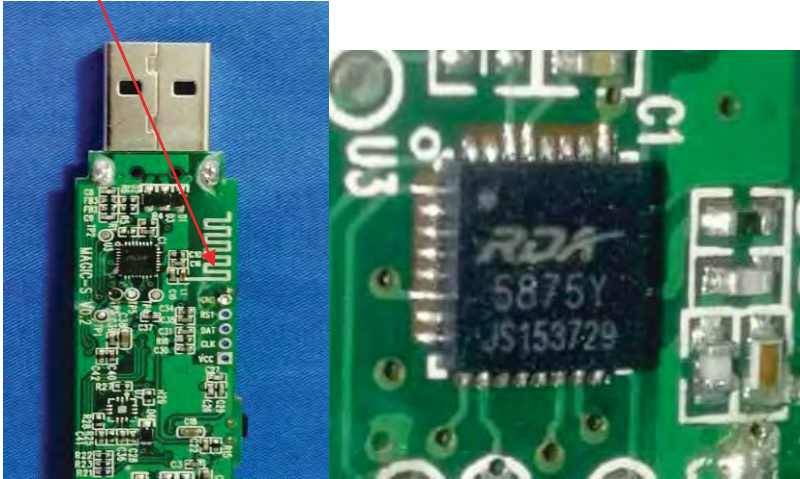
Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Spectrum analyzer	Agilent	E4440A	CQA-103	2018/10/28	2019/10/27
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

Note:

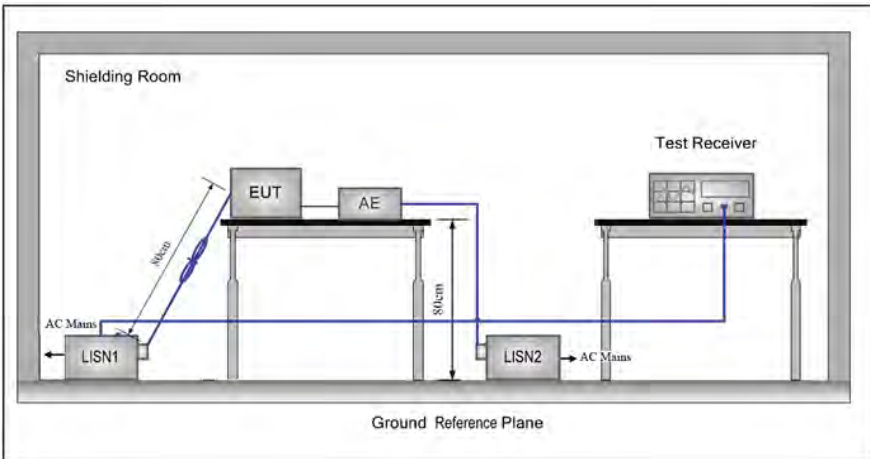
The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	PCB Antenna  The antenna is PCB Antenna. The best case gain of the antenna is 0 dBi.

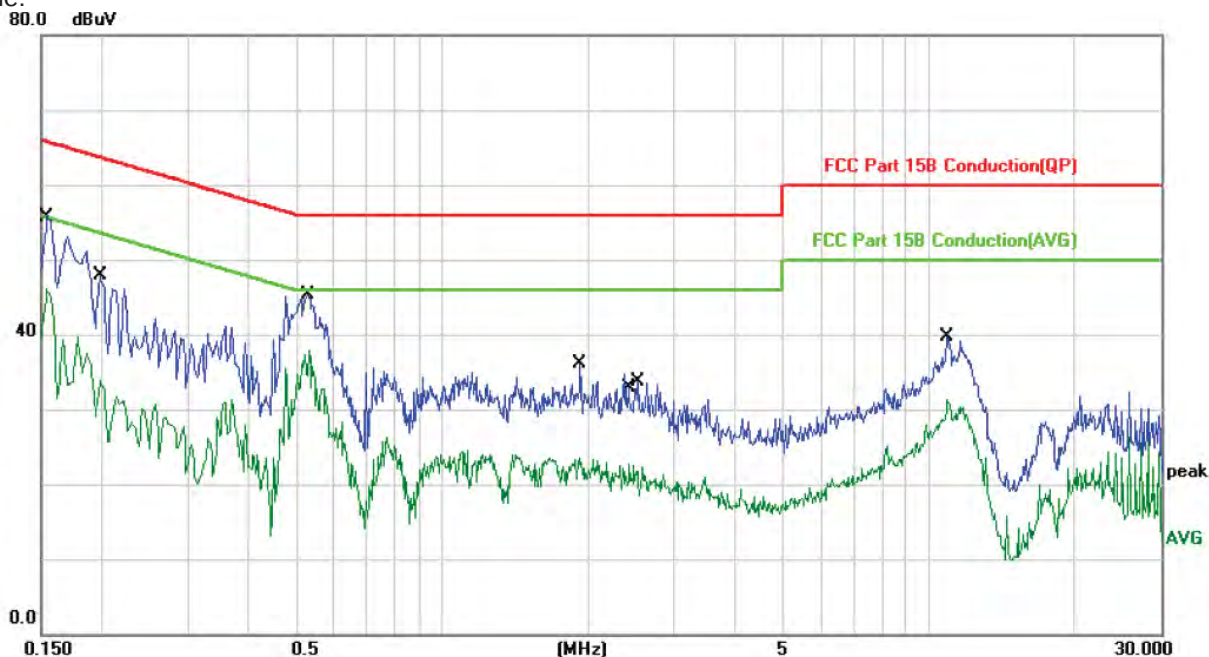
5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2013			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room.			
	2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.			
	3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,			
	4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.			
	5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.			
Test Setup:				

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the 3DH5 of data type and 8DPSK modulation at the highest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

L line:

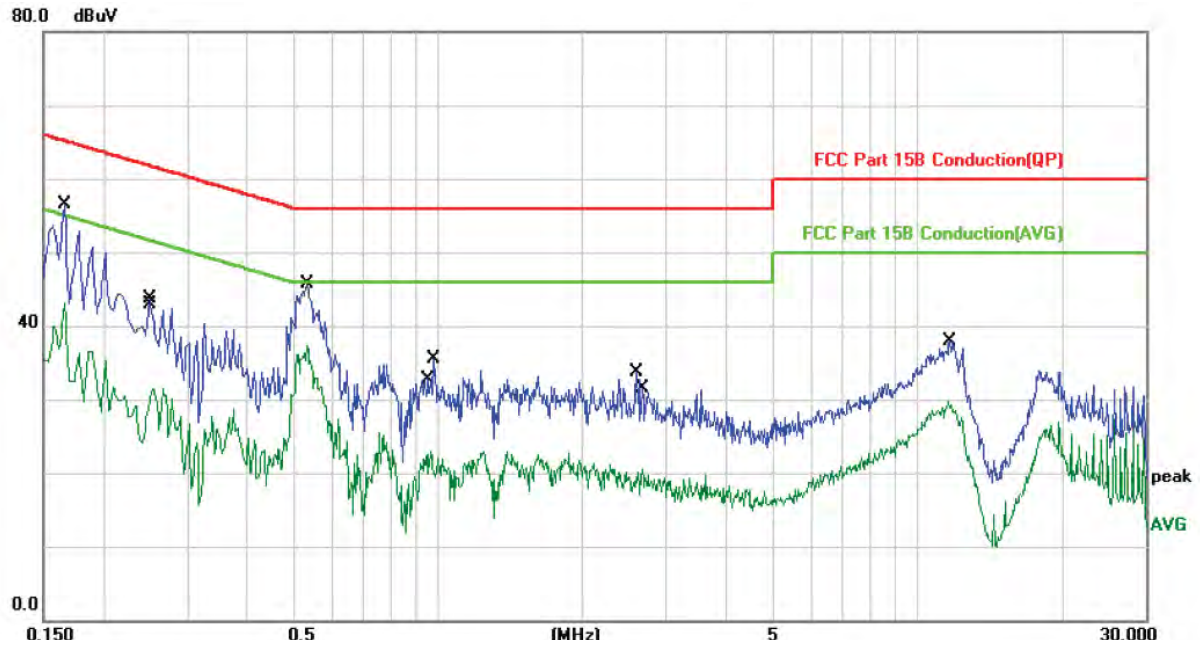


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1539	55.71	0.00	55.71	65.78	-10.07	QP	
2		0.1539	46.04	0.00	46.04	55.78	-9.74	AVG	
3		0.1980	47.96	0.00	47.96	63.69	-15.73	QP	
4		0.1980	33.88	0.00	33.88	53.69	-19.81	AVG	
5		0.5299	45.28	0.10	45.38	56.00	-10.62	QP	
6	*	0.5340	37.84	0.10	37.94	46.00	-8.06	AVG	
7		1.9260	35.94	0.10	36.04	56.00	-19.96	QP	
8		1.9260	23.46	0.10	23.56	46.00	-22.44	AVG	
9		2.4300	22.49	0.14	22.63	46.00	-23.37	AVG	
10		2.5380	33.44	0.20	33.64	56.00	-22.36	QP	
11		10.8819	39.35	0.42	39.77	60.00	-20.23	QP	
12		10.9299	30.89	0.42	31.31	50.00	-18.69	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

N line:

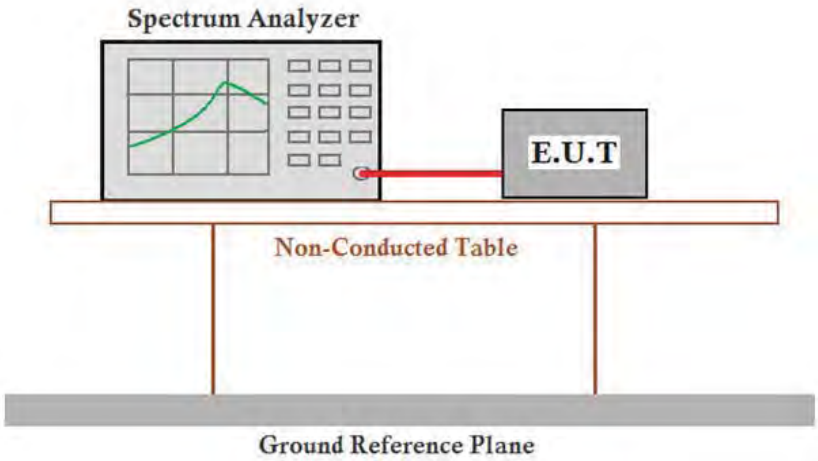


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1660	56.43	0.00	56.43	65.15	-8.72	QP	
2		0.1660	43.01	0.00	43.01	55.15	-12.14	AVG	
3		0.2500	43.72	0.00	43.72	61.75	-18.03	QP	
4		0.2540	31.45	0.00	31.45	51.62	-20.17	AVG	
5		0.5340	45.56	0.10	45.66	56.00	-10.34	QP	
6		0.5340	37.10	0.10	37.20	46.00	-8.80	AVG	
7		0.9660	22.74	0.10	22.84	46.00	-23.16	AVG	
8		0.9820	35.33	0.10	35.43	56.00	-20.57	QP	
9		2.5980	33.43	0.20	33.63	56.00	-22.37	QP	
10		2.6660	20.38	0.20	20.58	46.00	-25.42	AVG	
11		11.6618	29.20	0.45	29.65	50.00	-20.35	AVG	
12		11.6979	37.44	0.45	37.89	60.00	-22.11	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	30dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.761	30.00	Pass
Middle	2.744	30.00	Pass
Highest	4.118	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.871	30.00	Pass
Middle	2.766	30.00	Pass
Highest	4.147	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.947	30.00	Pass
Middle	2.808	30.00	Pass
Highest	4.163	30.00	Pass

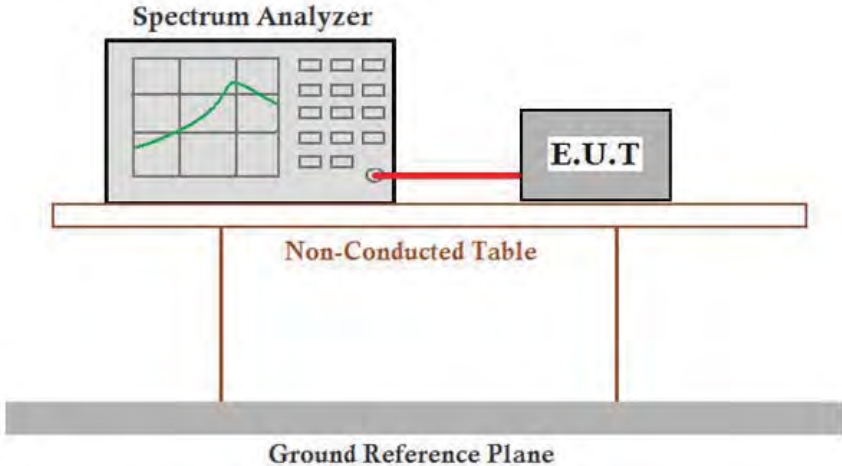
Test plot as follows:

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

$\pi/4$DQPSK/LCH		Frequency Auto Tune Center Freq 2.40200000 GHz Start Freq 2.392000000 GHz Stop Freq 2.412000000 GHz CF Step 2.000000 MHz Auto Freq Offset 0 Hz Scale Type Log Lin
$\pi/4$DQPSK/MCH		Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.431000000 GHz Stop Freq 2.451000000 GHz CF Step 2.000000 MHz Auto Freq Offset 0 Hz Scale Type Log Lin
$\pi/4$DQPSK/HCH		Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.490000000 GHz CF Step 2.000000 MHz Auto Freq Offset 0 Hz Scale Type Log Lin

8DPSK/LCH	 Key parameters from the screenshot: - Center Freq: 2.40200000 GHz - Mkr1: 2.40179 GHz, 3.947 dBm - Span: 20.00 MHz #Res BW: 4 MHz #VBW: 8.0 MHz - Sweep: 1.067 ms (2001 pts)	
8DPSK/MCH	 Key parameters from the screenshot: - Center Freq: 2.44100000 GHz - Mkr1: 2.44096 GHz, 2.808 dBm - Span: 20.00 MHz #Res BW: 4 MHz #VBW: 8.0 MHz - Sweep: 1.067 ms (2001 pts)	
8DPSK/HCH	 Key parameters from the screenshot: - Center Freq: 2.48000000 GHz - Mkr1: 2.47984 GHz, 4.163 dBm - Span: 20.00 MHz #Res BW: 4 MHz #VBW: 8.0 MHz - Sweep: 1.067 ms (2001 pts)	

5.4 20dB Occupy Bandwidth

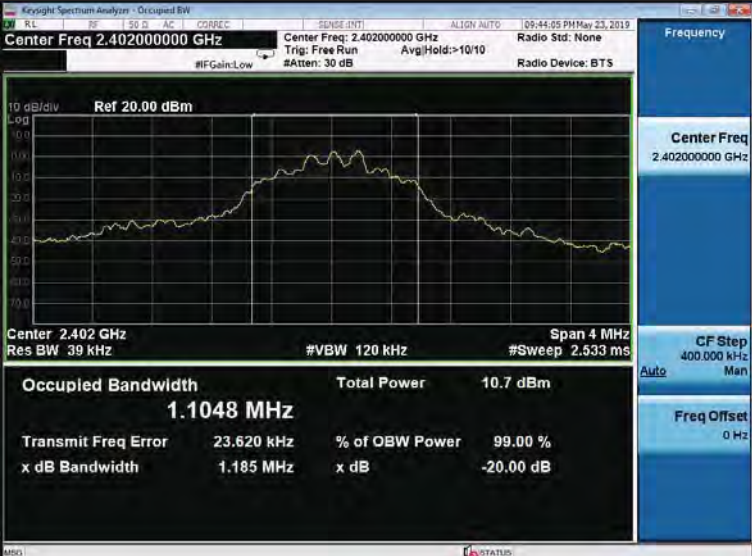
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

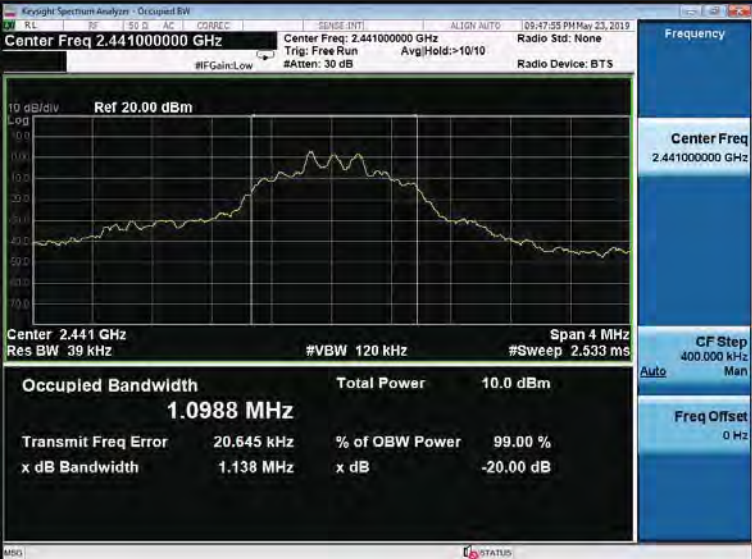
Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	0.8110	1.185	1.136
Middle	0.8025	1.189	1.138
Highest	0.8508	1.187	1.131

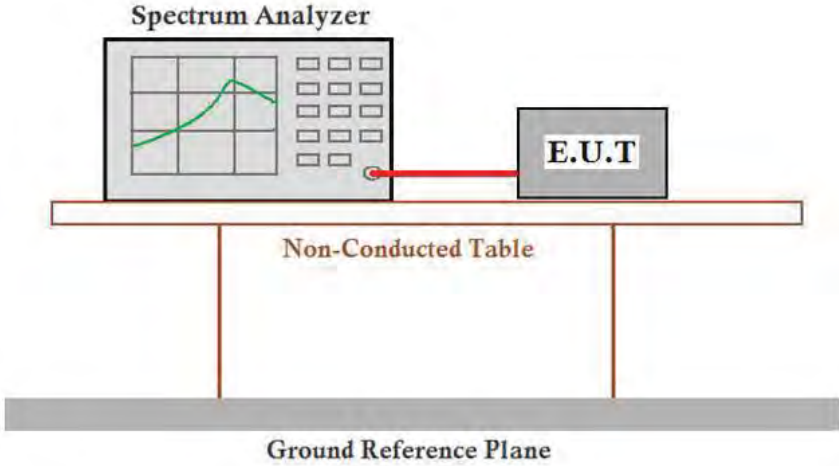
Test plot as follows:



$\pi/4$DQPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB Ref 20.00 dBm 10 dB/div Log Center 2.402 GHz Res BW 39 kHz #VBW 120 kHz Span 4 MHz #Sweep 2.533 ms Occupied Bandwidth 1.1048 MHz Total Power 10.7 dBm Transmit Freq Error 23.620 kHz % of OBW Power 99.00 % x dB Bandwidth 1.185 MHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz Auto STATUS
$\pi/4$DQPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB Ref 20.00 dBm 10 dB/div Log Center 2.441 GHz Res BW 39 kHz #VBW 120 kHz Span 4 MHz #Sweep 2.533 ms Occupied Bandwidth 1.1126 MHz Total Power 9.59 dBm Transmit Freq Error 19.162 kHz % of OBW Power 99.00 % x dB Bandwidth 1.189 MHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz Auto STATUS
$\pi/4$DQPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB Ref 20.00 dBm 10 dB/div Log Center 2.48 GHz Res BW 39 kHz #VBW 120 kHz Span 4 MHz #Sweep 2.533 ms Occupied Bandwidth 1.1357 MHz Total Power 10.9 dBm Transmit Freq Error 8.261 kHz % of OBW Power 99.00 % x dB Bandwidth 1.187 MHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz Auto STATUS

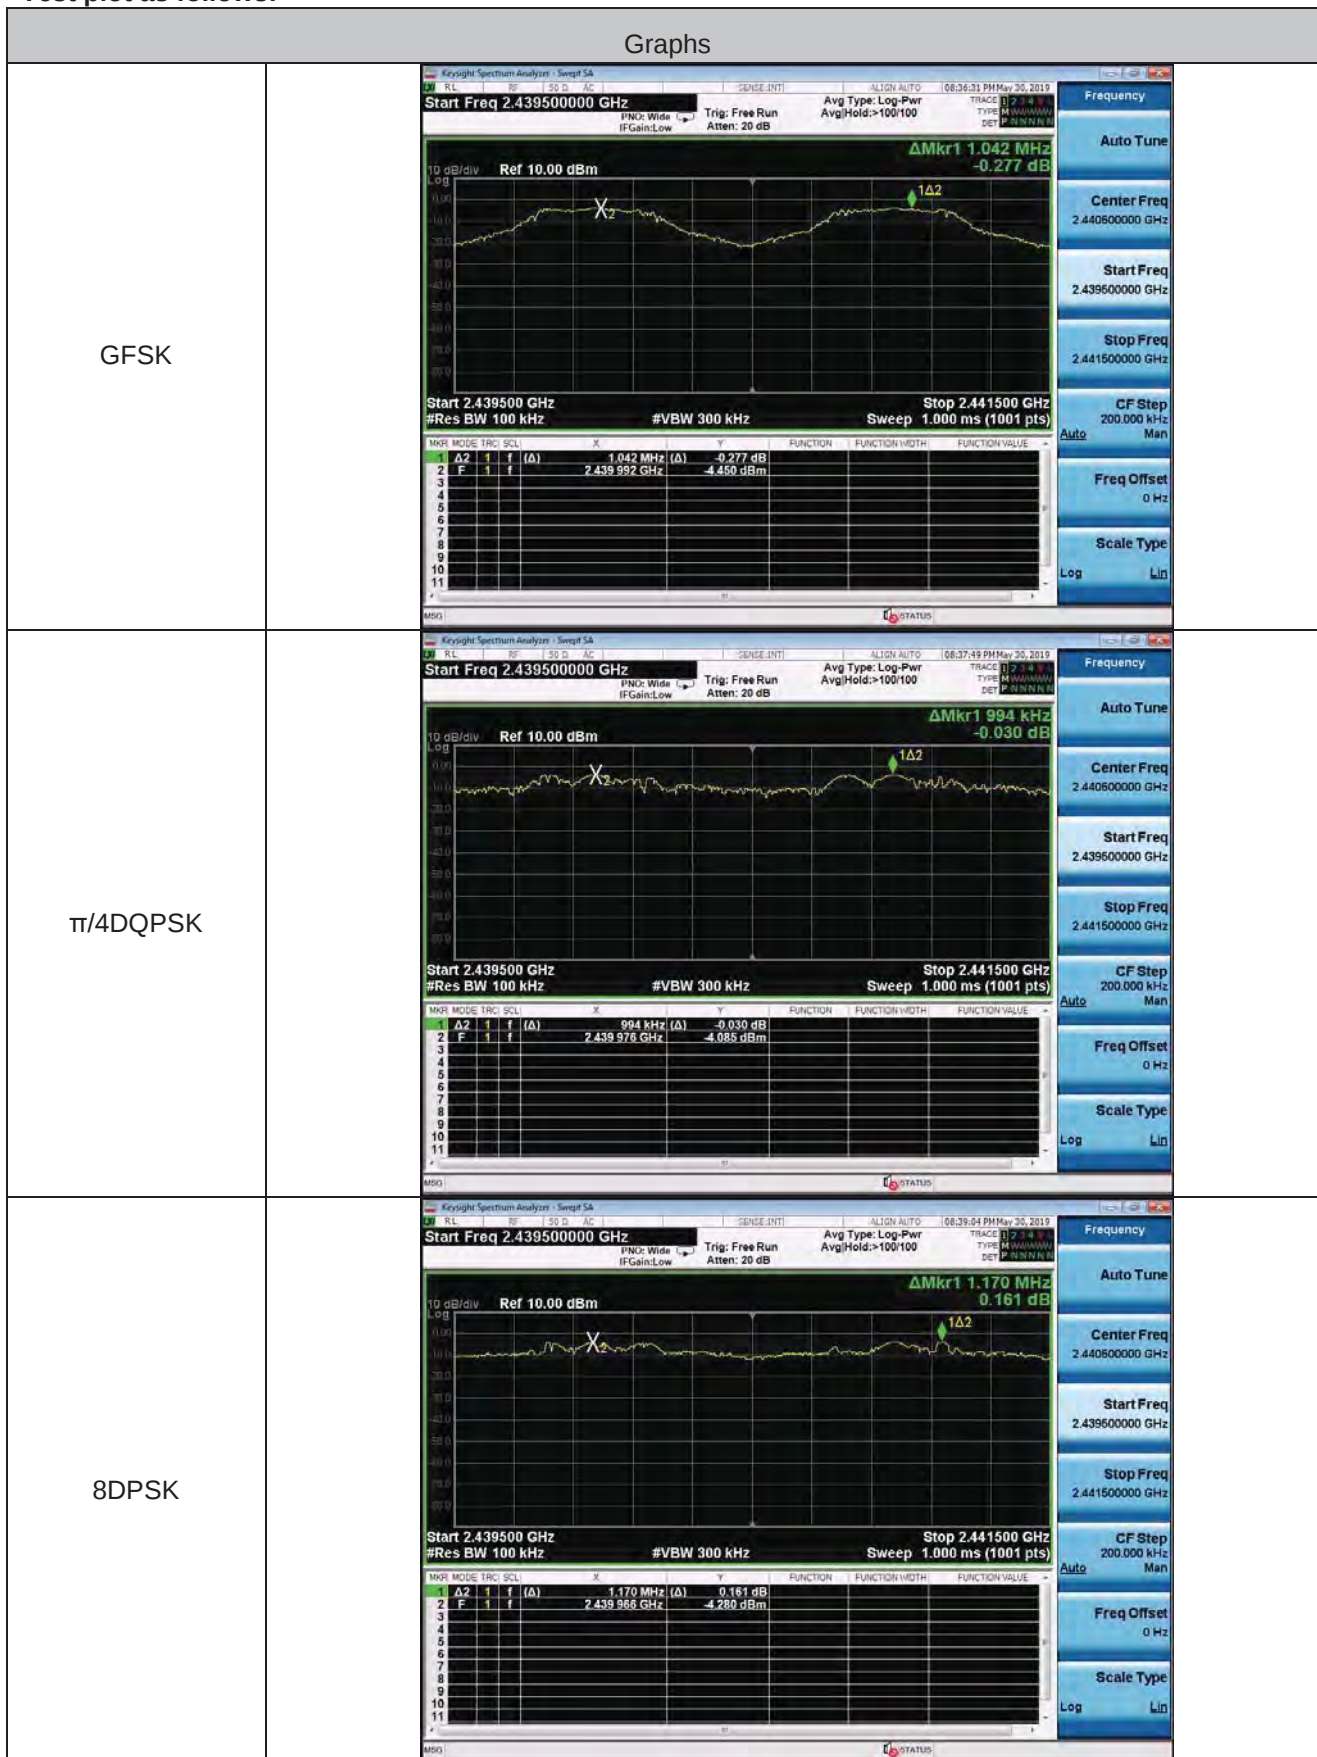
8DPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref 20.00 dBm Occupied Bandwidth: 1.0940 MHz Total Power: 11.2 dBm Transmit Freq Error: 23.432 kHz % of OBW Power: 99.00 % x dB Bandwidth: 1.136 MHz x dB: -20.00 dB
8DPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref 20.00 dBm Occupied Bandwidth: 1.0988 MHz Total Power: 10.0 dBm Transmit Freq Error: 20.645 kHz % of OBW Power: 99.00 % x dB Bandwidth: 1.138 MHz x dB: -20.00 dB
8DPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref 20.00 dBm Occupied Bandwidth: 1.1182 MHz Total Power: 11.4 dBm Transmit Freq Error: 10.800 kHz % of OBW Power: 99.00 % x dB Bandwidth: 1.131 MHz x dB: -20.00 dB

5.5 Frequencies Separation

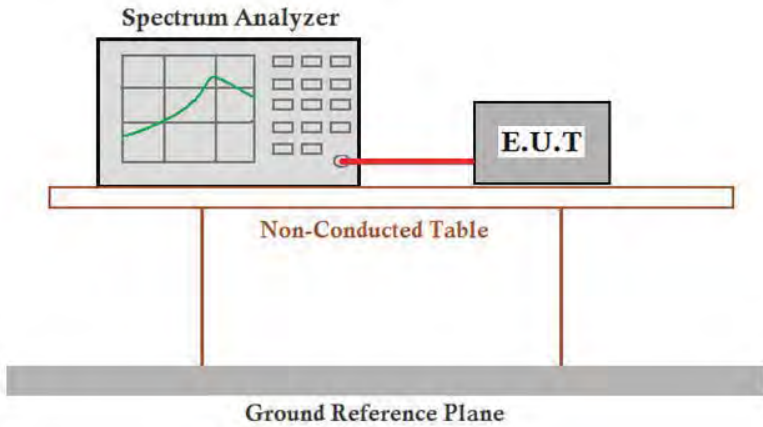
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.042	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	0.994	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	1.170	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			

Test plot as follows:



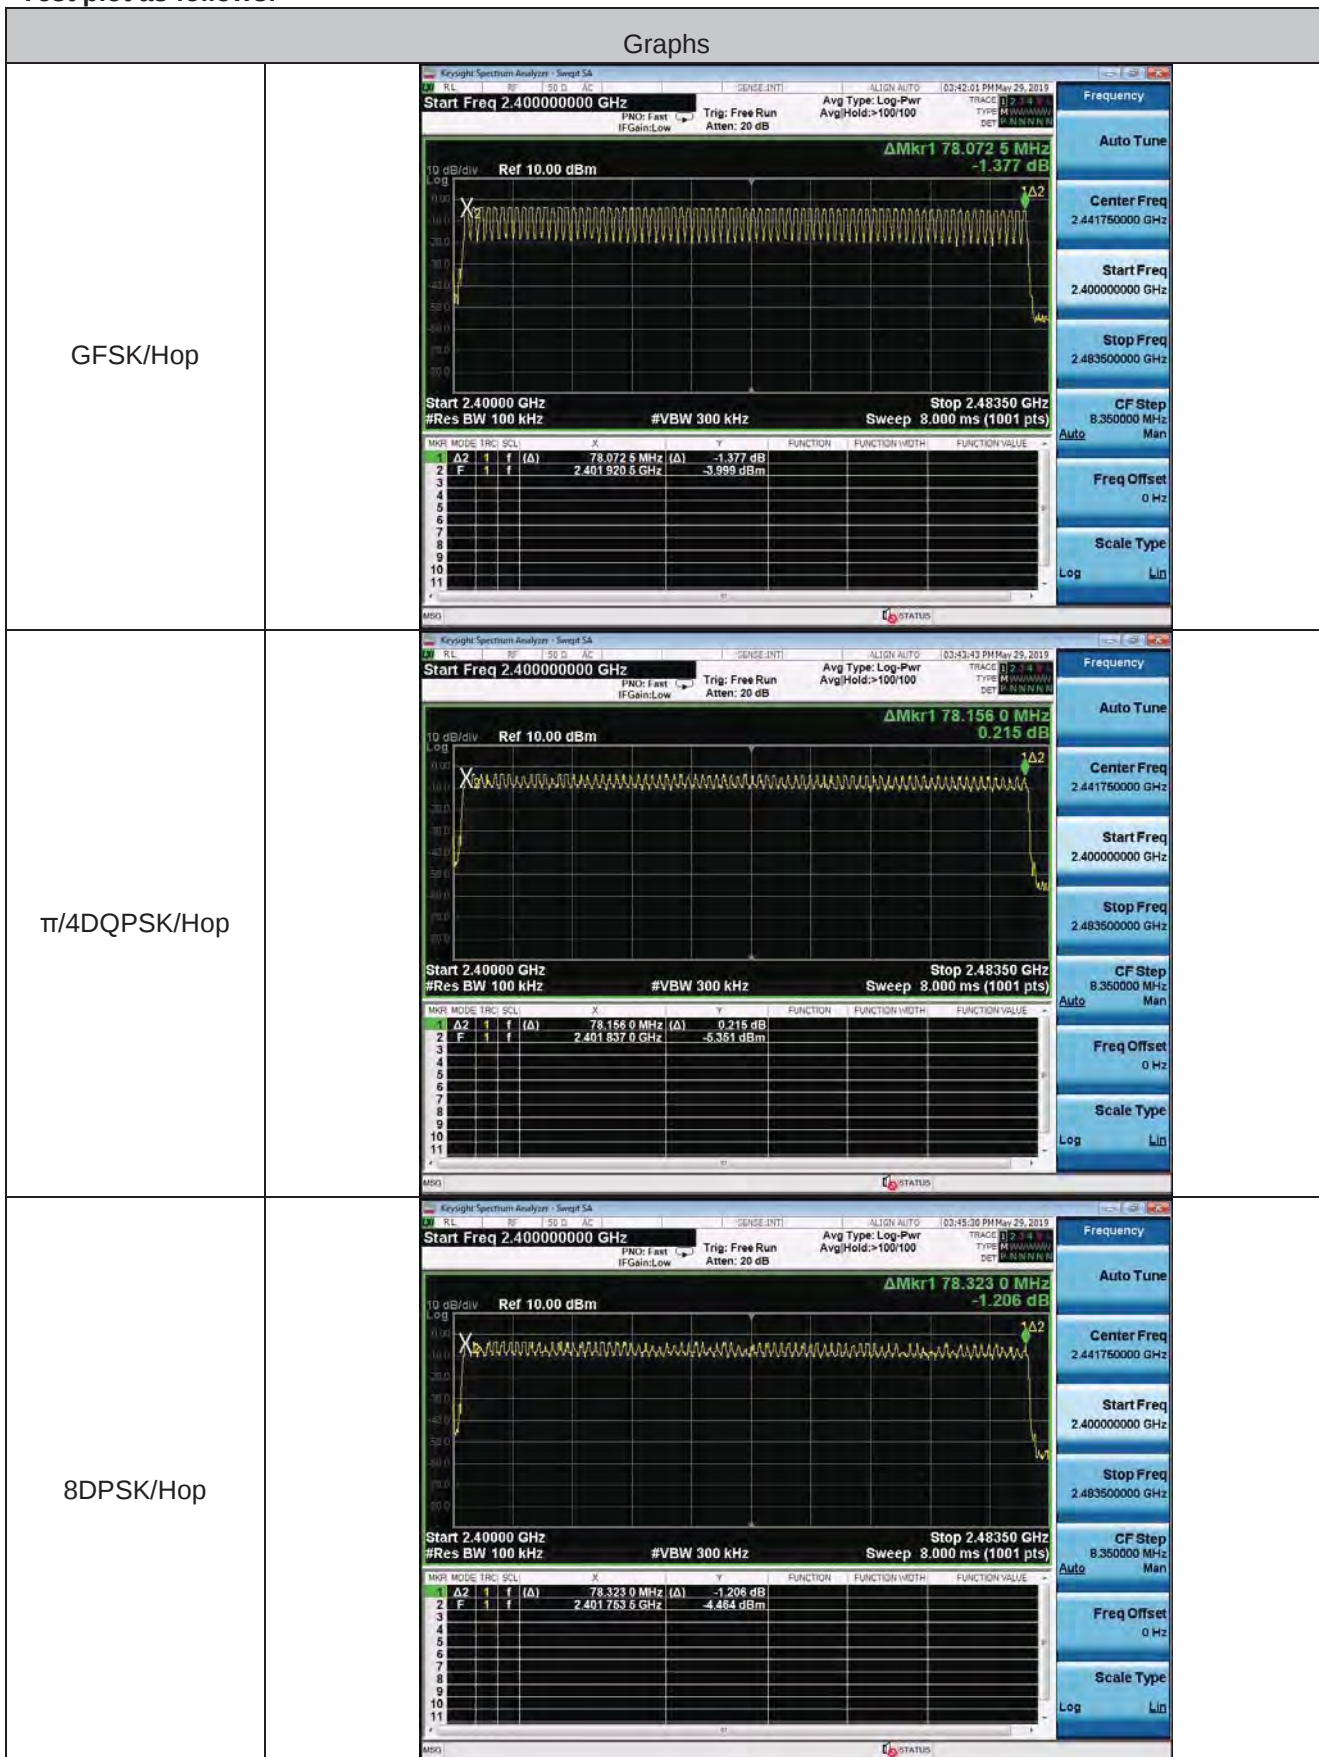
5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

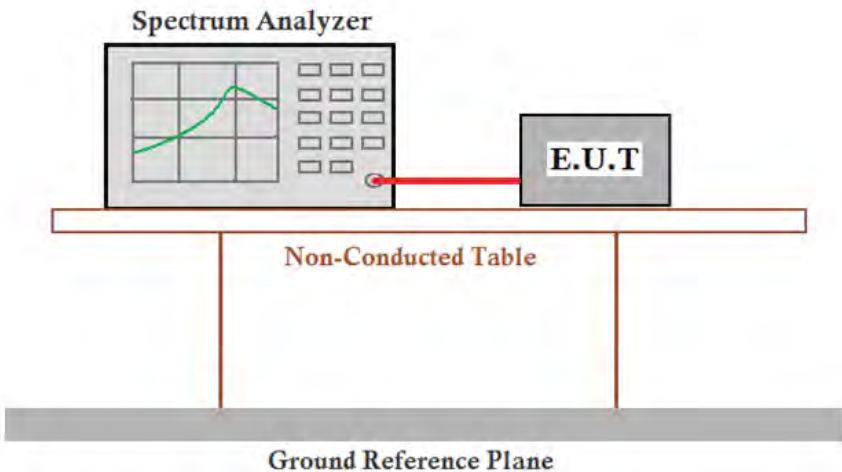
Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Test plot as follows:



5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[s]	Limit (second)
GFSK	DH1	MCH	0.407	0.130	≤0.4
GFSK	DH3	MCH	1.661	0.266	≤0.4
GFSK	DH5	MCH	2.904	0.310	≤0.4
π/4DQPSK	2DH1	MCH	0.417	0.133	≤0.4
π/4DQPSK	2DH3	MCH	1.667	0.267	≤0.4
π/4DQPSK	2DH5	MCH	2.916	0.311	≤0.4
8DPSK	3DH1	MCH	0.416	0.133	≤0.4
8DPSK	3DH3	MCH	1.664	0.266	≤0.4
8DPSK	3DH5	MCH	2.913	0.311	≤0.4

Remark:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

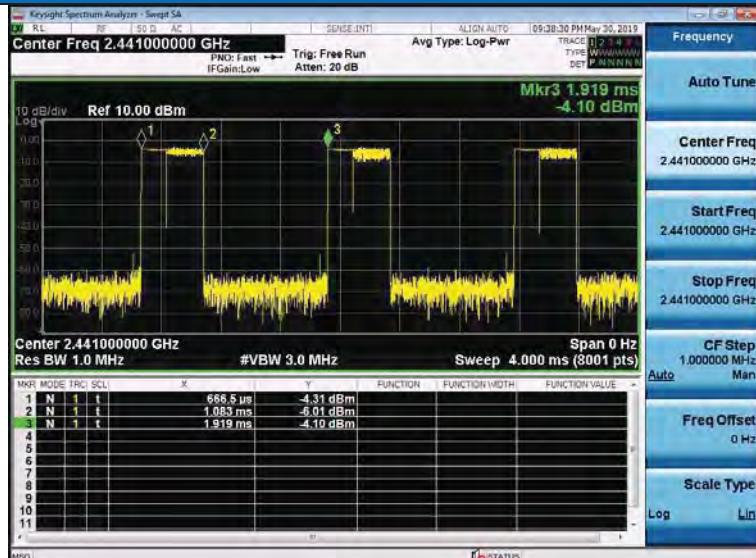
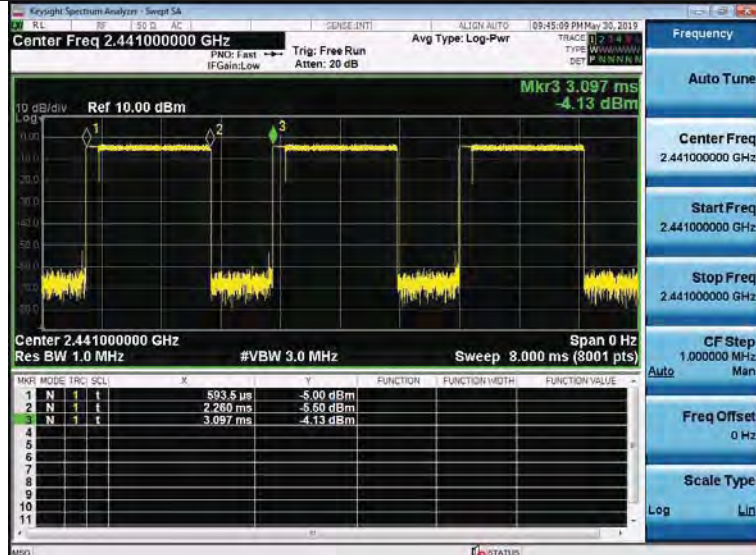
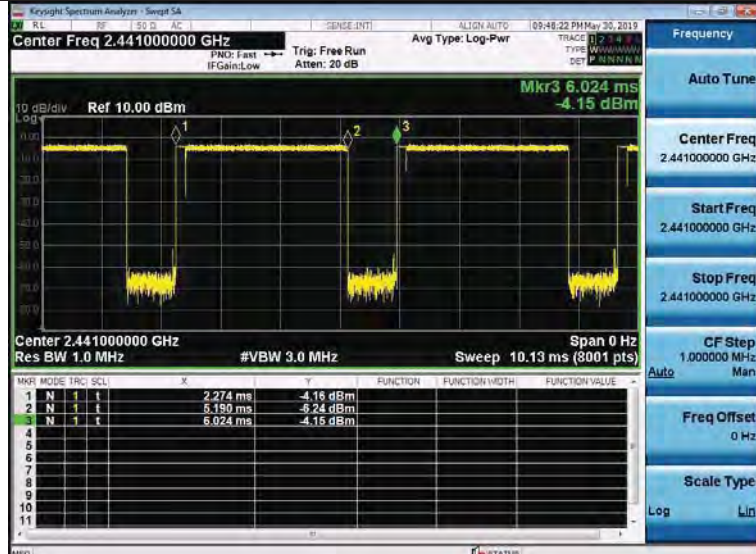
DH1/2DH1/3DH1 Dwell time = Burst Width(ms)*(1600/ (2*79))*31.6

DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/ (4*79))*31.6

DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/ (6*79))*31.6

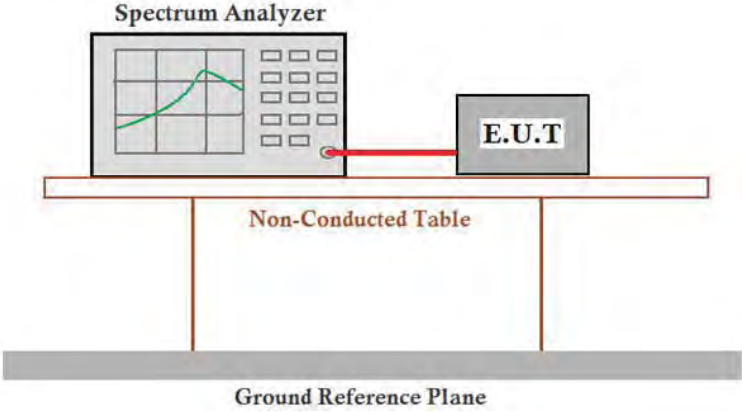
Test plot as follows:



$\pi/4$ DQPSK _2DH1/MCH	 <table><tr><th>Mkr</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>688.5 us</td><td>-4.31 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>1.083 ms</td><td>-5.01 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>1.919 ms</td><td>-4.10 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	688.5 us	-4.31 dBm				2	N	1	t	1.083 ms	-5.01 dBm				3	N	1	t	1.919 ms	-4.10 dBm			
Mkr	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	688.5 us	-4.31 dBm																																
2	N	1	t	1.083 ms	-5.01 dBm																																
3	N	1	t	1.919 ms	-4.10 dBm																																
$\pi/4$ DQPSK _2DH3/MCH	 <table><tr><th>Mkr</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>593.5 us</td><td>-5.00 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.260 ms</td><td>-5.60 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.097 ms</td><td>-4.13 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	593.5 us	-5.00 dBm				2	N	1	t	2.260 ms	-5.60 dBm				3	N	1	t	3.097 ms	-4.13 dBm			
Mkr	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	593.5 us	-5.00 dBm																																
2	N	1	t	2.260 ms	-5.60 dBm																																
3	N	1	t	3.097 ms	-4.13 dBm																																
$\pi/4$ DQPSK _2DH5/MCH	 <table><tr><th>Mkr</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.274 ms</td><td>-4.16 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>5.190 ms</td><td>-5.24 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>6.024 ms</td><td>-4.15 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	2.274 ms	-4.16 dBm				2	N	1	t	5.190 ms	-5.24 dBm				3	N	1	t	6.024 ms	-4.15 dBm			
Mkr	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	2.274 ms	-4.16 dBm																																
2	N	1	t	5.190 ms	-5.24 dBm																																
3	N	1	t	6.024 ms	-4.15 dBm																																

8DPSK_3DH1/MCH	Keysight Spectrum Analyzer - Swept SA RLRF50 dBACSENSE INTALIGN AUTO09:42:39 PM May 30, 2019 Center Freq 2.441000000 GHz PNC: FastIF Gain: LowTrig: Free RunAtten: 20 dB Avg Type: Log-Pwr TRACE 12 1 4 1TYPE WWWWMMWDET M N N N N N 10 dB/divRef 10.00 dBm Log Mkr3 2.140 ms-4.13 dBm Center 2.441000000 GHzRes BW 1.0 MHz#VBW 3.0 MHzSweep 4.000 ms (8001 pts)Span 0 Hz <table><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>891.5 μs</td><td>-4.07 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>1.302 ms</td><td>-5.84 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>2.140 ms</td><td>-4.13 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSGSTATUS Frequency Auto Tune Center Freq2.441000000 GHz Start Freq2.441000000 GHz Stop Freq2.441000000 GHz CF Step1.000000 MHzMan Freq Offset0 Hz Scale TypeLogLin	MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	891.5 μ s	-4.07 dBm				2	N	1	t	1.302 ms	-5.84 dBm				3	N	1	t	2.140 ms	-4.13 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	t	891.5 μ s	-4.07 dBm																																																																																																								
2	N	1	t	1.302 ms	-5.84 dBm																																																																																																								
3	N	1	t	2.140 ms	-4.13 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK_3DH3/MCH	Keysight Spectrum Analyzer - Swept SA RLRF50 dBACSENSE INTALIGN AUTO09:45:54 PM May 30, 2019 Center Freq 2.441000000 GHz PNC: FastIF Gain: LowTrig: Free RunAtten: 20 dB Avg Type: Log-Pwr TRACE 12 1 4 1TYPE WWWWMMWDET M N N N N N 10 dB/divRef 10.00 dBm Log Mkr3 3.076 ms-4.12 dBm Center 2.441000000 GHzRes BW 1.0 MHz#VBW 3.0 MHzSweep 8.000 ms (8001 pts)Span 0 Hz <table><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>571.5 μs</td><td>-4.13 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.235 ms</td><td>-7.15 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>3.076 ms</td><td>-4.12 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSGSTATUS Frequency Auto Tune Center Freq2.441000000 GHz Start Freq2.441000000 GHz Stop Freq2.441000000 GHz CF Step1.000000 MHzMan Freq Offset0 Hz Scale TypeLogLin	MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	571.5 μ s	-4.13 dBm				2	N	1	t	2.235 ms	-7.15 dBm				3	N	1	t	3.076 ms	-4.12 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	t	571.5 μ s	-4.13 dBm																																																																																																								
2	N	1	t	2.235 ms	-7.15 dBm																																																																																																								
3	N	1	t	3.076 ms	-4.12 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
8DPSK_3DH5/MCH	Keysight Spectrum Analyzer - Swept SA RLRF50 dBACSENSE INTALIGN AUTO09:49:04 PM May 30, 2019 Center Freq 2.441000000 GHz PNC: FastIF Gain: LowTrig: Free RunAtten: 20 dB Avg Type: Log-Pwr TRACE 12 1 4 1TYPE WWWWMMWDET M N N N N N 10 dB/divRef 10.00 dBm Log Mkr3 6.466 ms-4.17 dBm Center 2.441000000 GHzRes BW 1.0 MHz#VBW 3.0 MHzSweep 10.13 ms (8001 pts)Span 0 Hz <table><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.715 ms</td><td>-4.66 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>5.628 ms</td><td>-5.61 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>6.466 ms</td><td>-4.17 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSGSTATUS Frequency Auto Tune Center Freq2.441000000 GHz Start Freq2.441000000 GHz Stop Freq2.441000000 GHz CF Step1.000000 MHzMan Freq Offset0 Hz Scale TypeLogLin	MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	2.715 ms	-4.66 dBm				2	N	1	t	5.628 ms	-5.61 dBm				3	N	1	t	6.466 ms	-4.17 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	t	2.715 ms	-4.66 dBm																																																																																																								
2	N	1	t	5.628 ms	-5.61 dBm																																																																																																								
3	N	1	t	6.466 ms	-4.17 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

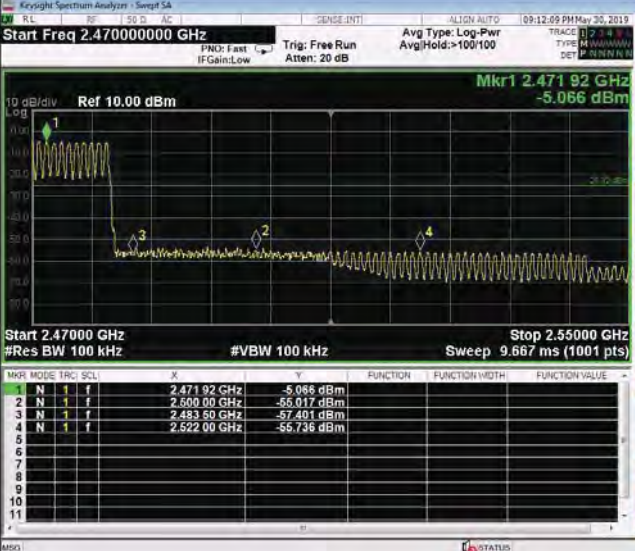
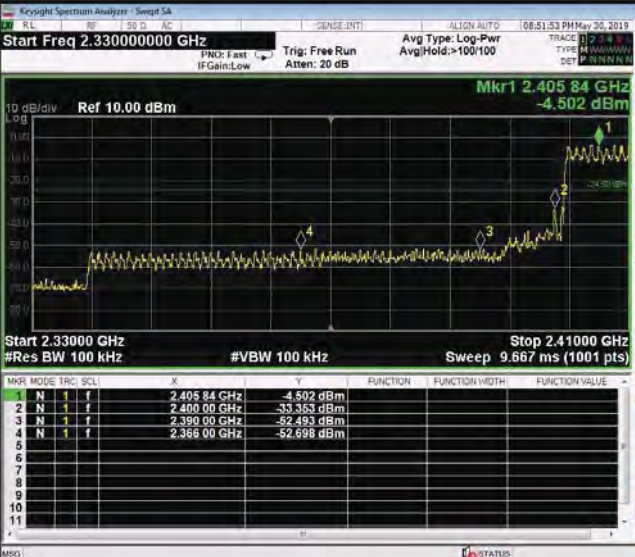
5.8 Band-edge for RF Conducted Emissions

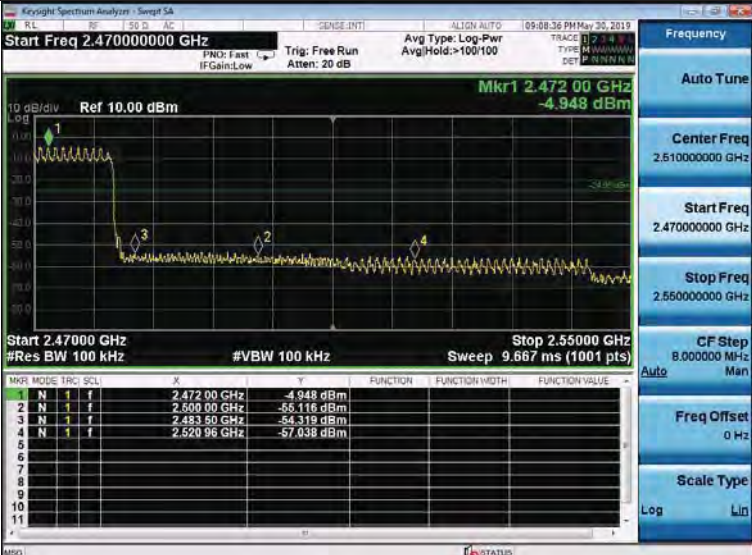
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

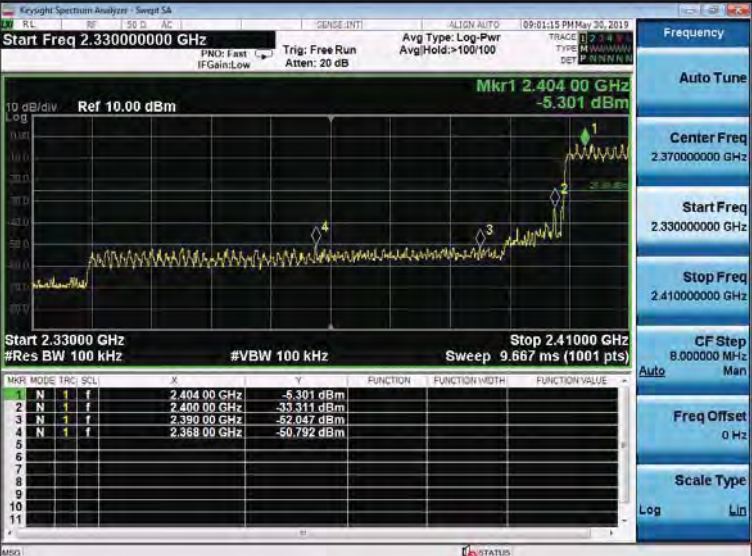
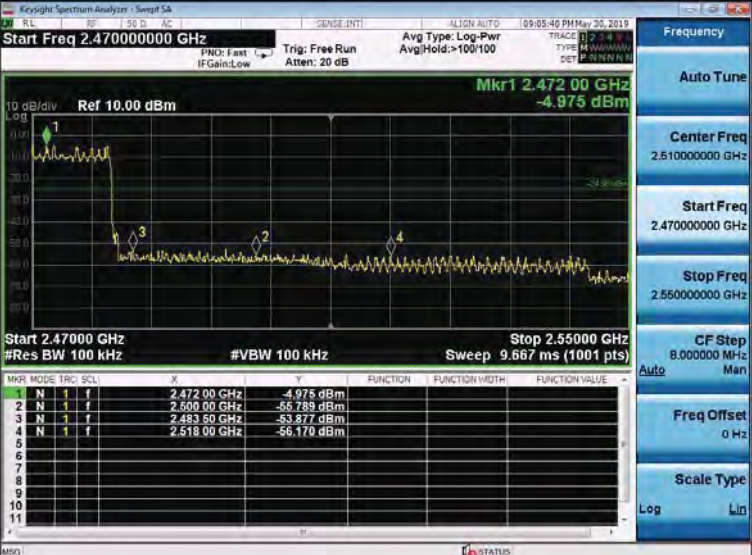
Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
GFSK	LCH	2400	Off	-32.246	-23.70	PASS
			On	-32.547	-24.12	PASS
GFSK	HCH	2483.5	Off	-60.467	-25.39	PASS
			On	-57.401	-25.32	PASS
$\pi/4$ DQPSK	LCH	2400	Off	-32.104	-23.72	PASS
			On	-33.353	-24.50	PASS
$\pi/4$ DQPSK	HCH	2483.5	Off	-60.776	-25.15	PASS
			On	-54.319	-24.95	PASS
8DPSK	LCH	2400	Off	-32.063	-23.74	PASS
			On	-33.311	-25.30	PASS
8DPSK	HCH	2483.5	Off	-60.432	-25.11	PASS
			On	-53.877	-24.98	PASS

Test plot as follows:

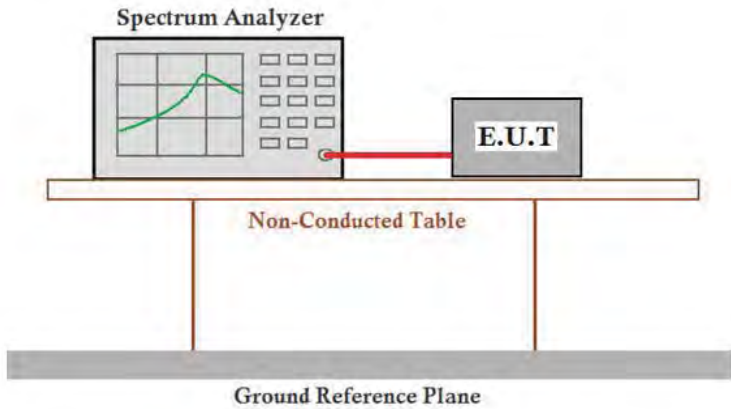
Graphs	
GFSK/LCH/No Hop	KeySight Spectrum Analyzer - Sweep SA Start Freq 2.330000000 GHz Ref 10.00 dBm 10 dB/div Log 10.0 30.0 50.0 70.0 90.0 110.0 130.0 150.0 170.0 190.0 210.0 230.0 250.0 270.0 290.0 310.0 330.0 350.0 370.0 390.0 410.0 430.0 450.0 470.0 490.0 510.0 530.0 550.0 570.0 590.0 610.0 630.0 650.0 670.0 690.0 710.0 730.0 750.0 770.0 790.0 810.0 830.0 850.0 870.0 890.0 910.0 930.0 950.0 970.0 990.0 1010.0 1030.0 1050.0 1070.0 1090.0 1110.0 1130.0 1150.0 1170.0 1190.0 1210.0 1230.0 1250.0 1270.0 1290.0 1310.0 1330.0 1350.0 1370.0 1390.0 1410.0 1430.0 1450.0 1470.0 1490.0 1510.0 1530.0 1550.0 1570.0 1590.0 1610.0 1630.0 1650.0 1670.0 1690.0 1710.0 1730.0 1750.0 1770.0 1790.0 1810.0 1830.0 1850.0 1870.0 1890.0 1910.0 1930.0 1950.0 1970.0 1990.0 2010.0 2030.0 2050.0 2070.0 2090.0 2110.0 2130.0 2150.0 2170.0 2190.0 2210.0 2230.0 2250.0 2270.0 2290.0 2310.0 2330.0 2350.0 2370.0 2390.0 2410.0 2430.0 2450.0 2470.0 2490.0 2510.0 2530.0 2550.0 2570.0 2590.0 2610.0 2630.0 2650.0 2670.0 2690.0 2710.0 2730.0 2750.0 2770.0 2790.0 2810.0 2830.0 2850.0 2870.0 2890.0 2910.0 2930.0 2950.0 2970.0 2990.0 3010.0 3030.0 3050.0 3070.0 3090.0 3110.0 3130.0 3150.0 3170.0 3190.0 3210.0 3230.0 3250.0 3270.0 3290.0 3310.0 3330.0 3350.0 3370.0 3390.0 3410.0 3430.0 3450.0 3470.0 3490.0 3510.0 3530.0 3550.0 3570.0 3590.0 3610.0 3630.0 3650.0 3670.0 3690.0 3710.0 3730.0 3750.0 3770.0 3790.0 3810.0 3830.0 3850.0 3870.0 3890.0 3910.0 3930.0 3950.0 3970.0 3990.0 4010.0 4030.0 4050.0 4070.0 4090.0 4110.0 4130.0 4150.0 4170.0 4190.0 4210.0 4230.0 4250.0 4270.0 4290.0 4310.0 4330.0 4350.0 4370.0 4390.0 4410.0 4430.0 4450.0 4470.0 4490.0 4510.0 4530.0 4550.0 4570.0 4590.0 4610.0 4630.0 4650.0 4670.0 4690.0 4710.0 4730.0 4750.0 4770.0 4790.0 4810.0 4830.0 4850.0 4870.0 4890.0 4910.0 4930.0 4950.0 4970.0 4990.0 5010.0 5030.0 5050.0 5070.0 5090.0 5110.0 5130.0 5150.0 5170.0 5190.0 5210.0 5230.0 5250.0 5270.0 5290.0 5310.0 5330.0 5350.0 5370.0 5390.0 5410.0 5430.0 5450.0 5470.0 5490.0 5510.0 5530.0 5550.0 5570.0 5590.0 5610.0 5630.0 5650.0 5670.0 5690.0 5710.0 5730.0 5750.0 5770.0 5790.0 5810.0 5830.0 5850.0 5870.0 5890.0 5910.0 5930.0 5950.0 5970.0 5990.0 6010.0 6030.0 6050.0 6070.0 6090.0 6110.0 6130.0 6150.0 6170.0 6190.0 6210.0 6230.0 6250.0 6270.0 6290.0 6310.0 6330.0 6350.0 6370.0 6390.0 6410.0 6430.0 6450.0 6470.0 6490.0 6510.0 6530.0 6550.0 6570.0 6590.0 6610.0 6630.0 6650.0 6670.0 6690.0 6710.0 6730.0 6750.0 6770.0 6790.0 6810.0 6830.0 6850.0 6870.0 6890.0 6910.0 6930.0 6950.0 6970.0 6990.0 7010.0 7030.0 7050.0 7070.0 7090.0 7110.0 7130.0 7150.0 7170.0 7190.0 7210.0 7230.0 7250.0 7270.0 7290.0 7310.0 7330.0 7350.0 7370.0 7390.0 7410.0 7430.0 7450.0 7470.0 7490.0 7510.0 7530.0 7550.0 7570.0 7590.0 7610.0 7630.0 7650.0 7670.0 7690.0 7710.0 7730.0 7750.0 7770.0 7790.0 7810.0 7830.0 7850.0 7870.0 7890.0 7910.0 7930.0 7950.0 7970.0 7990.0 8010.0 8030.0 8050.0 8070.0 8090.0 8110.0 8130.0 8150.0 8170.0 8190.0 8210.0 8230.0 8250.0 8270.0 8290.0 8310.0 8330.0 8350.0 8370.0 8390.0 8410.0 8430.0 8450.0 8470.0 8490.0 8510.0 8530.0 8550.0 8570.0 8590.0 8610.0 8630.0 8650.0 8670.0 8690.0 8710.0 8730.0 8750.0 8770.0 8790.0 8810.0 8830.0 8850.0 8870.0 8890.0 8910.0 8930.0 8950.0 8970.0 8990.0 9010.0 9030.0 9050.0 9070.0 9090.0 9110.0 9130.0 9150.0 9170.0 9190.0 9210.0 9230.0 9250.0 9270.0 9290.0 9310.0 9330.0 9350.0 9370.0 9390.0 9410.0 9430.0 9450.0 9470.0 9490.0 9510.0 9530.0 9550.0 9570.0 9590.0 9610.0 9630.0 9650.0 9670.0 9690.0 9710.0 9730.0 9750.0 9770.0 9790.0 9810.0 9830.0 9850.0 9870.0 9890.0 9910.0 9930.0 9950.0 9970.0 9990.0 10010.0 10030.0 10050.0 10070.0 10090.0 10110.0 10130.0 10150.0 10170.0 10190.0 10210.0 10230.0 10250.0 10270.0 10290.0 10310.0 10330.0 10350.0 10370.0 10390.0 10410.0 10430.0 10450.0 10470.0 10490.0 10510.0 10530.0 10550.0 10570.0 10590.0 10610.0 10630.0 10650.0 10670.0 10690.0 10710.0 10730.0 10750.0 10770.0 10790.0 10810.0 10830.0 10850.0 10870.0 10890.0 10910.0 10930.0 10950.0 10970.0 10990.0 11010.0 11030.0 11050.0 11070.0 11090.0 11110.0 11130.0 11150.0 11170.0 11190.0 11210.0 11230.0 11250.0 11270.0 11290.0 11310.0 11330.0 11350.0 11370.0 11390.0 11410.0 11430.0 11450.0 11470.0 11490.0 11510.0 11530.0 11550.0 11570.0 11590.0 11610.0 11630.0 11650.0 11670.0 11690.0 11710.0 11730.0 11750.0 11770.0 11790.0 11810.0 11830.0 11850.0 11870.0 11890.0 11910.0 11930.0 11950.0 11970.0 11990.0 12010.0 12030.0 12050.0 12070.0 12090.0 12110.0 12130.0 12150.0 12170.0 12190.0 12210.0 12230.0 12250.0 12270.0 12290.0 12310.0 12330.0 12350.0 12370.0 12390.0 12410.0 12430.0 12450.0 12470.0 12490.0 12510.0 12530.0 12550.0 12570.0 12590.0 12610.0 12630.0 12650.0 12670.0 12690.0 12710.0 12730.0 12750.0 12770.0 12790.0 12810.0 12830.0 12850.0 12870.0 12890.0 12910.0 12930.0 12950.0 12970.0 12990.0 13010.0 13030.0 13050.0 13070.0 13090.0 13110.0 13130.0 13150.0 13170.0 13190.0 13210.0 13230.0 13250.0 13270.0 13290.0 13310.0 13330.0 13350.0 13370.0 13390.0 13410.0 13430.0 13450.0 13470.0 13490.0 13510.0 13530.0 13550.0 13570.0 13590.0 13610.0 13630.0 13650.0 13670.0 13690.0 13710.0 13730.0 13750.0 13770.0 13790.0 13810.0 13830.0 13850.0 13870.0 13890.0 13910.0 13930.0 13950.0 13970.0 13990.0 14010.0 14030.0 14050.0 14070.0 14090.0 14110.0 14130.0 14150.0 14170.0 14190.0 14210.0 14230.0 14250.0 14270.0 14290.0 14310.0 14330.0 14350.0 14370.0 14390.0 14410.0 14430.0 14450.0 14470.0 14490.0 14510.0 14530.0 14550.0 14570.0 14590.0 14610.0 14630.0 14650.0 14670.0 14690.0 14710.0 14730.0 14750.0 14770.0 14790.0 14810.0 14830.0 14850.0 14870.0 14890.0 14910.0 14930.0 14950.0 14970.0 14990.0 15010.0 15030.0 15050.0 15070.0 15090.0 15110.0 15130.0 15150.0 15170.0 15190.0 15210.0 15230.0 15250.0 15270.0 15290.0 15310.0 15330.0 15350.0 15370.0 15390.0 15410.0 15430.0 15450.0 15470.0 15490.0 15510.0 15530.0 15550.0 15570.0 15590.0 15610.0 15630.0 15650.0 15670.0 15690.0 15710.0 15730.0 15750.0 15770.0 15790.0 15810.0 15830.0 15850.0 15870.0 15890.0 15910.0 15930.0 15950.0 15970.0 15990.0 16010.0 16030.0 16050.0 16070.0 16090.0 16110.0 16130.0 16150.0 16170.0 16190.0 16210.0 16230.0 16250.0 16270.0 16290.0 16310.0 16330.0 16350.0 16370.0 16390.0 16410.0 16430.0 16450.0 16470.0 16490.0 16510.0 16530.0 16550.0 16570.0 16590.0 16610.0 16630.0 16650.0 16670.0 16690.0 16710.0 16730.0 16750.0 16770.0 16790.0 16810.0 16830.0 16850.0 16870.0 16890.0 16910.0 16930.0 16950.0 16970.0 16990.0 17010.0 17030.0 17050.0 17070.0 17090.0 17110.0 17130.0 17150.0 17170.0 17190.0 17210.0 17230.0 17250.0 17270.0 17290.0 17310.0 17330.0 17350.0 17370.0 17390.0 17410.0 17430.0 17450.0 17470.0 17490.0 17510.0 17530.0 17550.0 17570.0 17590.0 17610.0 17630.0 17650.0 17670.0 17690.0 17710.0 17730.0 17750.0 17770.0 17790.0 17810.0 17830.0 17850.0 17870.0 17890.0 17910.0 17930.0 17950.0 17970.0 17990.0 18010.0 18030.0 18050.0 18070.0 18090.0 18110.0 18130.0 18150.0 18170.0 18190.0 18210.0 18230.0 18250.0 18270.0 18290.0 18310.0 18330.0 18350.0 18370.0 18390.0 18410.0 18430.0 18450.0 18470.0 18490.0 18510.0 18530.0 18550.0 18570.0 18590.0 18610.0 18630.0 18650.0 18670.0 18690.0 18710.0 18730.0 18750.0 18770.0 18790.0 18810.0 18830.0 18850.0 18870.0 18890.0 18910.0 18930.0 18950.0 18970.0 18990.0 19010.0 19030.0 19050.0 19070.0 19090.0 19110.0 19130.0 19150.0 19170.0 19190.0 19210.0 19230.0 19250.0 19270.0 19290.0 19310.0 19330.0 19350.0 19370.0 19390.0 19410.0 19430.0 19450.0 19470.0 19490.0 19510.0 19530.0 19550.0 19570.0 19590.0 19610.0 19630.0 19650.0 19670.0 19690.0 19710.0 19730.0 19750.0 19770.0 19790.0 19810.0 19830.0 19850.0 19870.0 19890.0 19910.0 19930.0 19950.0 19970.0 19990.0 20010.0 20030.0 20050.0 20070.0 20090.0 20110.0 20130.0 20150.0 20170.0 20190.0 20210.0 20230.0 20250.0 20270.0 20290.0 20310.0 20330.0 20350.0 20370.0 20390.0 20410.0 20430.0 20450.0 20470.0 20490.0 20510.0 20530.0 20550.0 20570.0 20590.0 20610.0 20630.0 20650.0 20670.0 20690.0 20710.0 20730.0 20750.0 20770.0 20790.0 20810.0 20830.0 20850.0 20870.0 20890.0 20910.0 20930.0 20950.0 20970.0 20990.0 21010.0 21030.0 21050.0 21070.0 21090.0 21110.0 21130.0 21150.0 21170.0 21190.0 21210.0 21230.0 21250.0 21270.0 21290.0 21310.0 21330.0 21350.0 21370.0 21390.

GFSK/HCH/Hop	 Start Freq 2.47000000 GHz Stop Freq 2.55000000 GHz Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz Scale Type Log Lin
$\pi/4$DQPSK/LCH/No Hop	 Start Freq 2.33000 GHz Stop Freq 2.41000 GHz Center Freq 2.370000000 GHz Start Freq 2.330000000 GHz Stop Freq 2.410000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz Scale Type Log Lin
$\pi/4$DQPSK/LCH/Hop	 Start Freq 2.33000 GHz Stop Freq 2.41000 GHz Center Freq 2.370000000 GHz Start Freq 2.330000000 GHz Stop Freq 2.410000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz Scale Type Log Lin

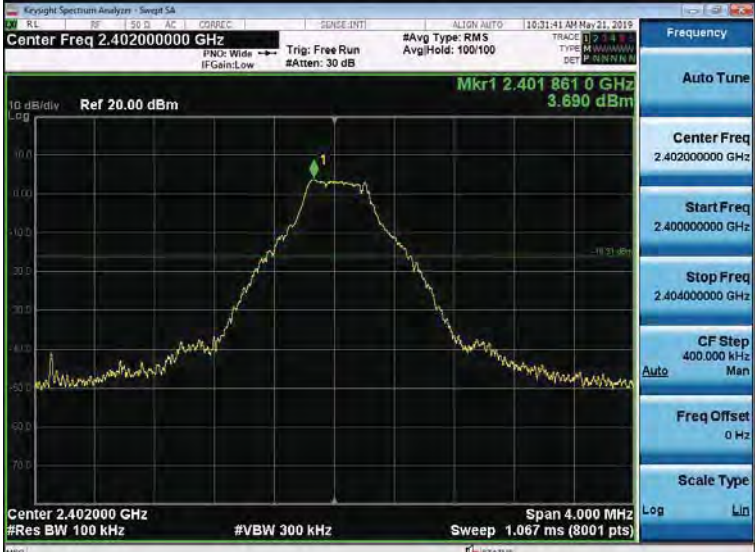
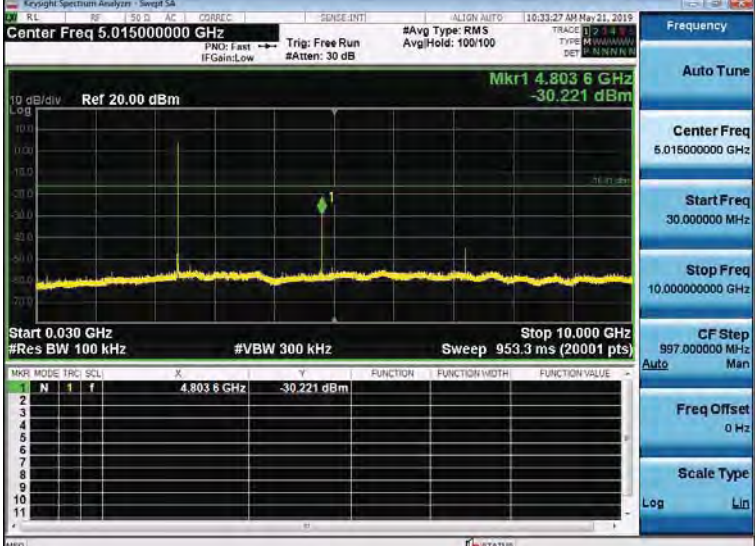
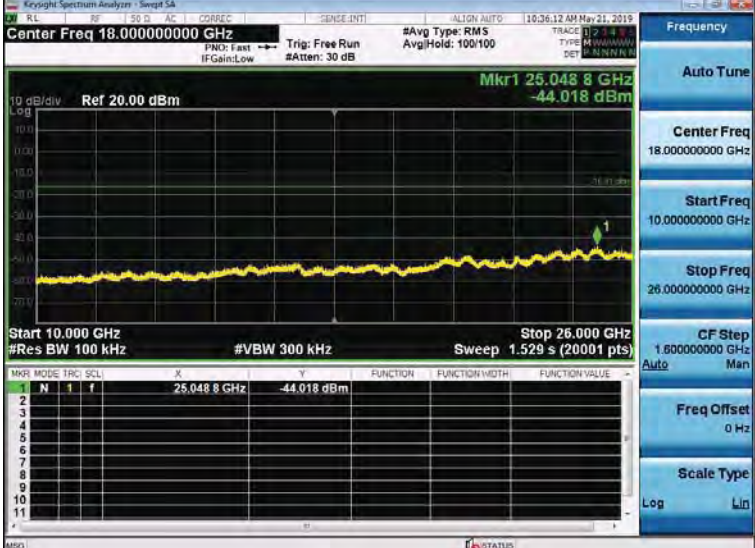
$\pi/4$ DQPSK/HCH/No Hop Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 00 GHz</td><td>-5.152 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.600 00 GHz</td><td>-53.235 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-50.776 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.544 00 GHz</td><td>-56.101 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 00 GHz	-5.152 dBm				2	N	1	f	2.600 00 GHz	-53.235 dBm				3	N	1	f	2.483 50 GHz	-50.776 dBm				4	N	1	f	2.544 00 GHz	-56.101 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 00 GHz	-5.152 dBm																																									
2	N	1	f	2.600 00 GHz	-53.235 dBm																																									
3	N	1	f	2.483 50 GHz	-50.776 dBm																																									
4	N	1	f	2.544 00 GHz	-56.101 dBm																																									
$\pi/4$ DQPSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 00 GHz</td><td>-4.948 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.600 00 GHz</td><td>-55.116 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-54.319 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.520 96 GHz</td><td>-57.038 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.472 00 GHz	-4.948 dBm				2	N	1	f	2.600 00 GHz	-55.116 dBm				3	N	1	f	2.483 50 GHz	-54.319 dBm				4	N	1	f	2.520 96 GHz	-57.038 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.472 00 GHz	-4.948 dBm																																									
2	N	1	f	2.600 00 GHz	-55.116 dBm																																									
3	N	1	f	2.483 50 GHz	-54.319 dBm																																									
4	N	1	f	2.520 96 GHz	-57.038 dBm																																									
8DPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 00 GHz</td><td>-3.743 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-32.063 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-51.486 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.338 16 GHz</td><td>-52.527 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 00 GHz	-3.743 dBm				2	N	1	f	2.400 00 GHz	-32.063 dBm				3	N	1	f	2.390 00 GHz	-51.486 dBm				4	N	1	f	2.338 16 GHz	-52.527 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 00 GHz	-3.743 dBm																																									
2	N	1	f	2.400 00 GHz	-32.063 dBm																																									
3	N	1	f	2.390 00 GHz	-51.486 dBm																																									
4	N	1	f	2.338 16 GHz	-52.527 dBm																																									

8DPSK/LCH/Hop	 Start Freq 2.330000000 GHz Stop Freq 2.410000000 GHz Center Freq 2.370000000 GHz Start Freq 2.330000000 GHz Stop Freq 2.410000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz Scale Type Log Lin
8DPSK/HCH/No Hop	 Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz Scale Type Log Lin
8DPSK/HCH/Hop	 Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz Scale Type Log Lin

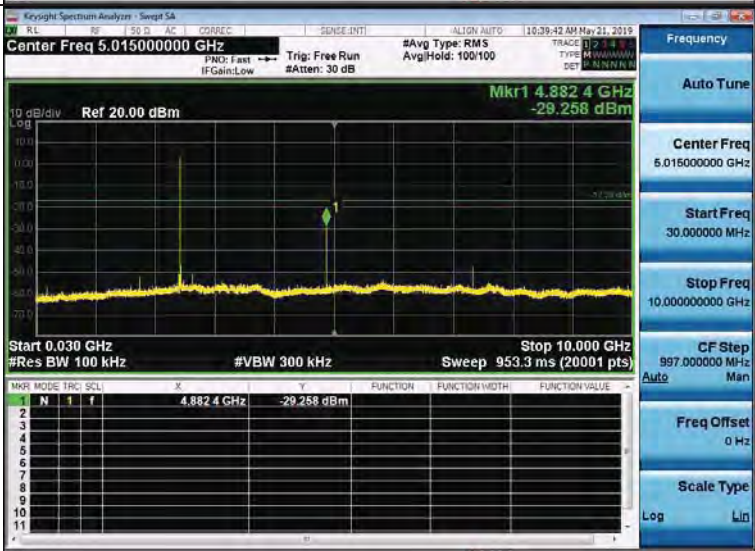
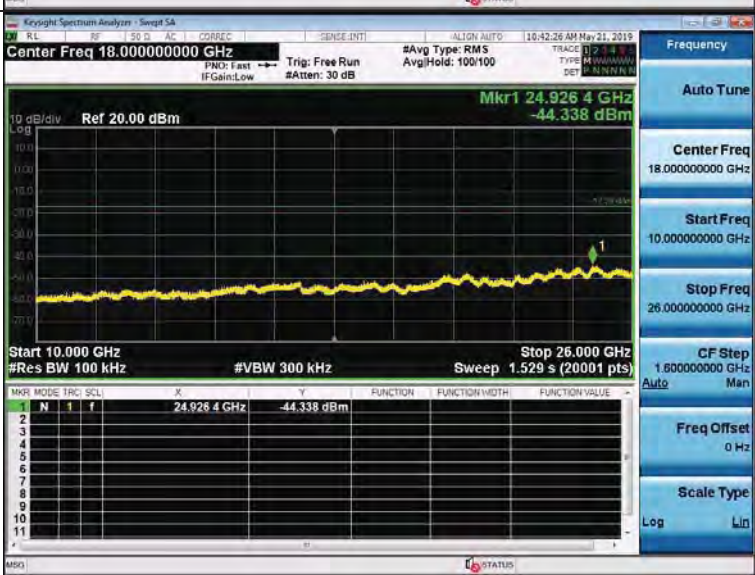
5.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass

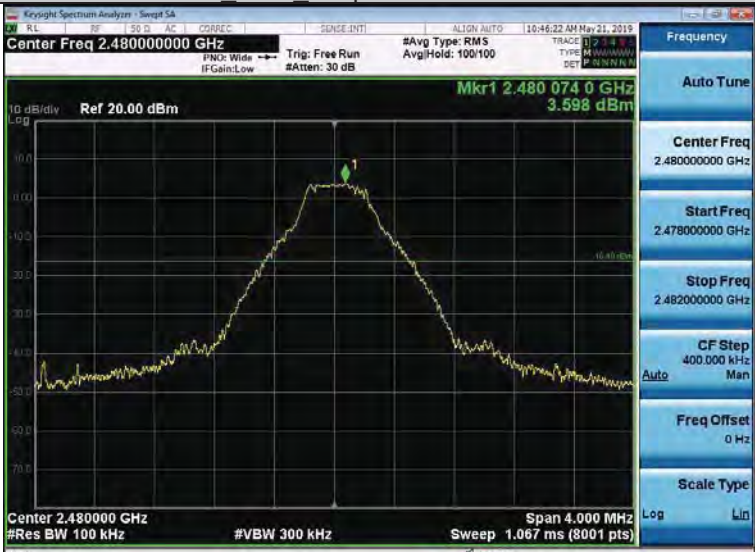
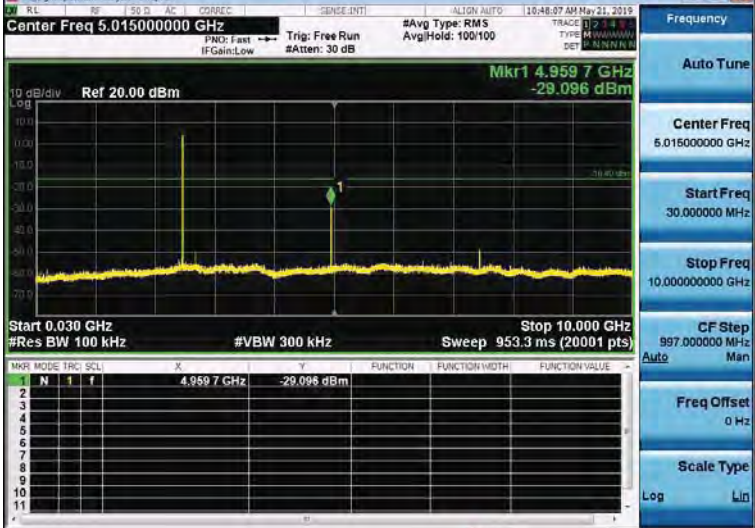
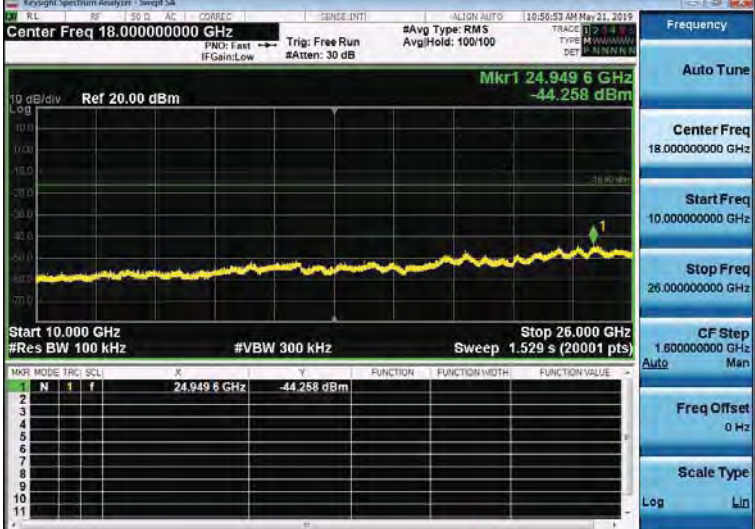
GFSK LCH Graphs

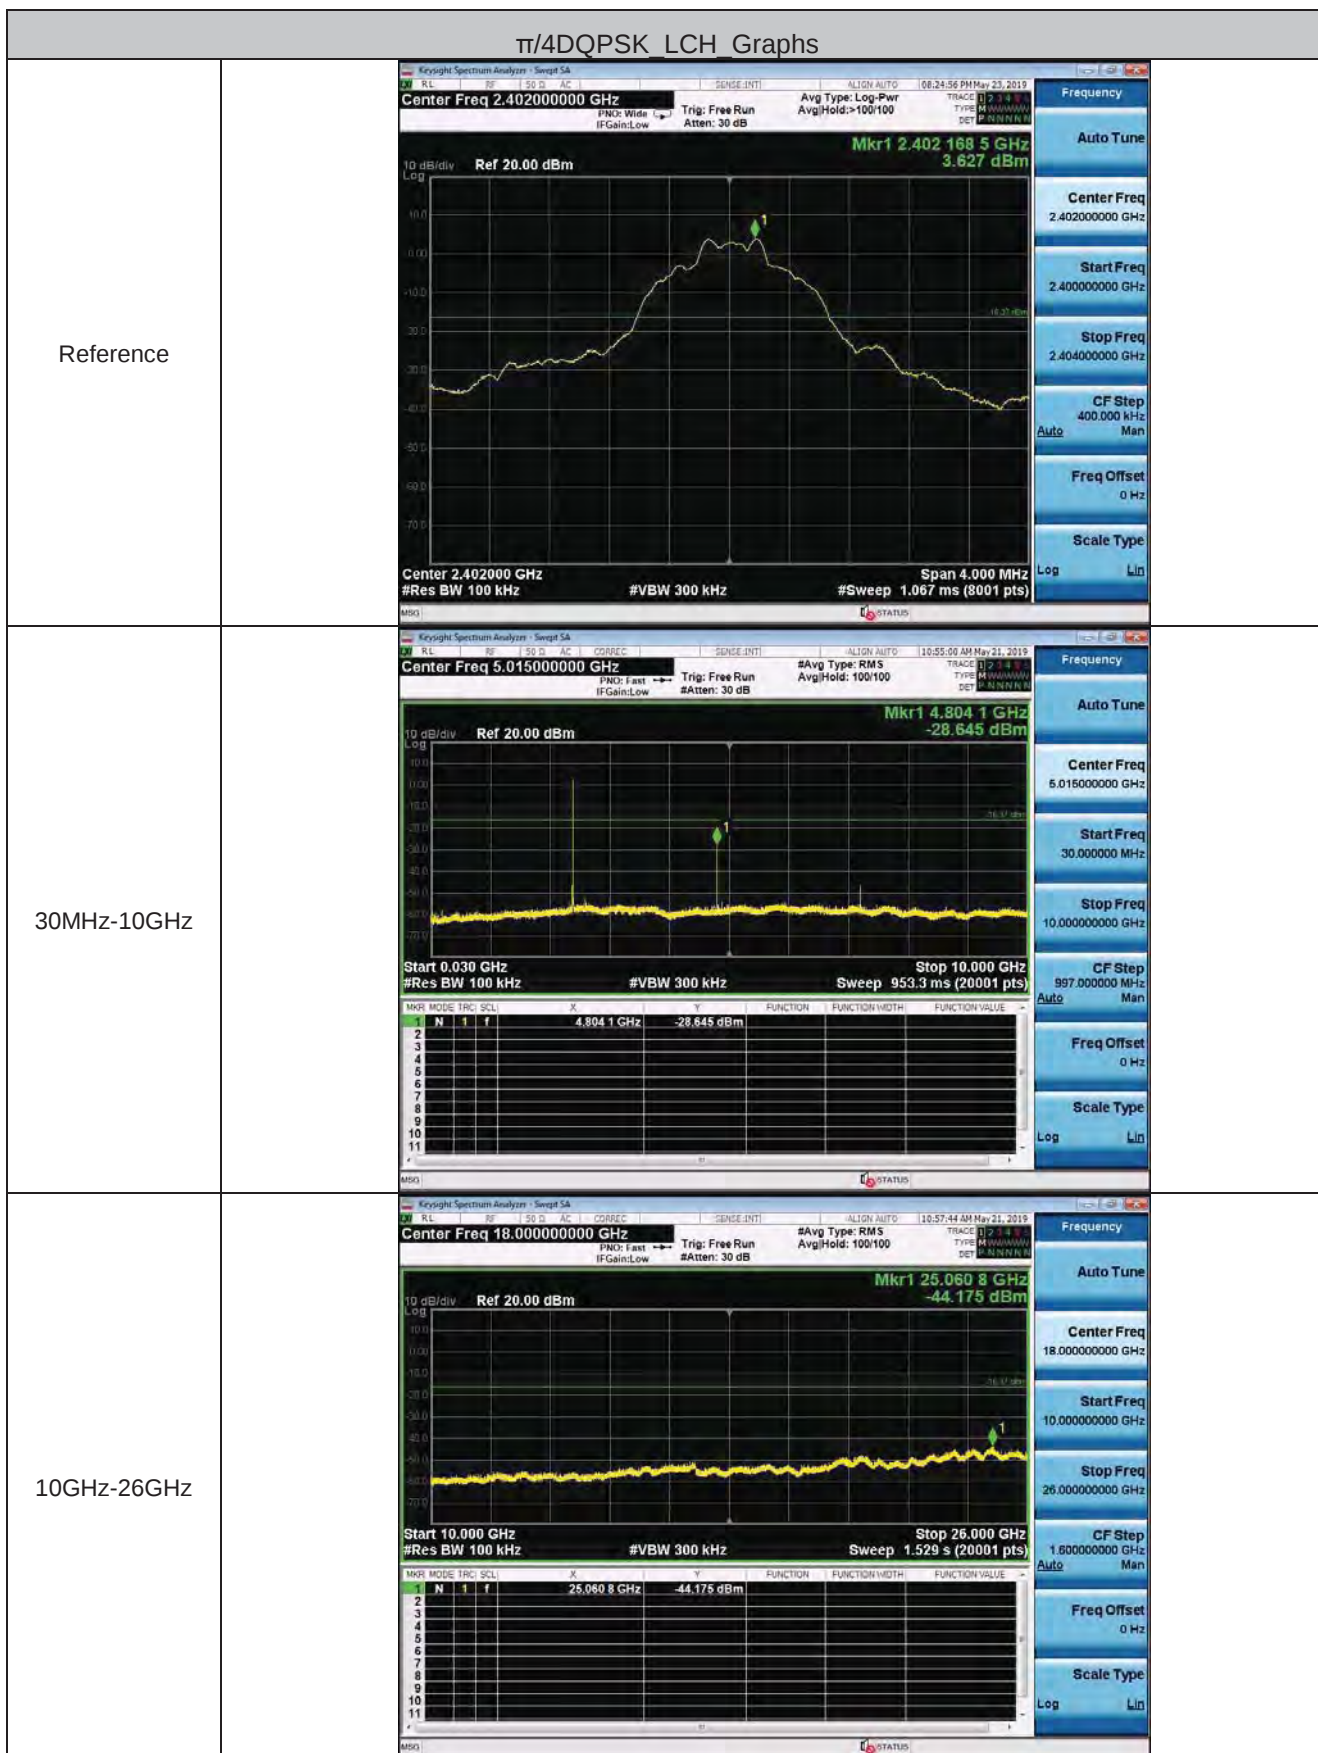
Reference	 Key parameters for Reference signal: - Center Freq: 2.40200000 GHz - Span: 4.000 MHz - Res BW: 100 kHz - VBW: 300 kHz - Mkr1: 2.4018610 GHz, -3.690 dBm
30MHz-10GHz	 Key parameters for 30MHz-10GHz range: - Center Freq: 5.01500000 GHz - Span: 10.000 GHz - Res BW: 100 kHz - VBW: 300 kHz - Mkr1: 4.8036 GHz, -30.221 dBm
10GHz-26GHz	 Key parameters for 10GHz-26GHz range: - Center Freq: 18.00000000 GHz - Span: 16.000 GHz - Res BW: 100 kHz - VBW: 300 kHz - Mkr1: 25.0488 GHz, -44.018 dBm

GFSK MCH Graphs

Reference	 Key parameters from the screenshot: - Center Freq: 2.441000000 GHz - Mkr1: 2.4408615 GHz, -2.720 dBm - Ref: 20.00 dBm - Span: 4.000 MHz #Res BW: 100 kHz #VBW: 300 kHz - Sweep: 1.067 ms (8001 pts)
30MHz-10GHz	 Key parameters from the screenshot: - Center Freq: 5.015000000 GHz - Mkr1: 4.8824 GHz, -29.258 dBm - Ref: 20.00 dBm - Span: 10.000 MHz #Res BW: 100 kHz #VBW: 300 kHz - Sweep: 953.3 ms (20001 pts)
10GHz-26GHz	 Key parameters from the screenshot: - Center Freq: 18.000000000 GHz - Mkr1: 24.9264 GHz, -44.338 dBm - Ref: 20.00 dBm - Span: 16.000 MHz #Res BW: 100 kHz #VBW: 300 kHz - Sweep: 1.529 s (20001 pts)

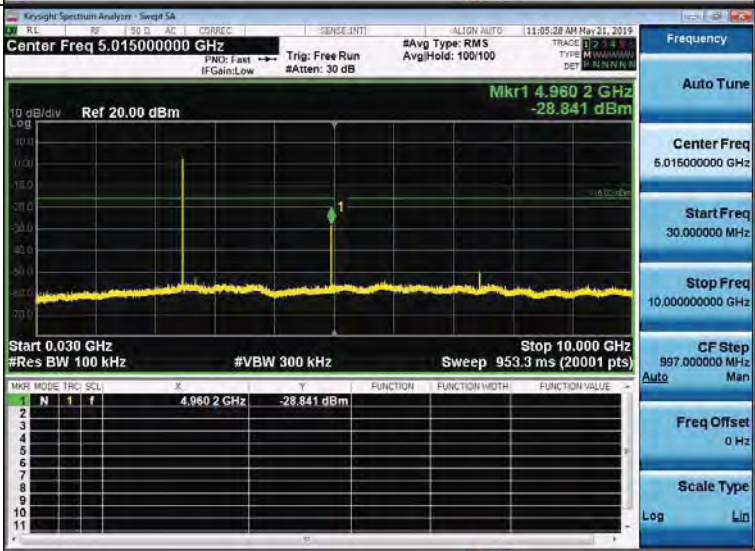
GFSK HCH Graphs

Reference	 Key parameters for Reference: - Center Freq: 2.480000000 GHz - Span: 4.000 MHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.067 ms (8001 pts) - Peak: Mkr1 2.480 074 0 GHz, 3.598 dBm
30MHz-10GHz	 Key parameters for 30MHz-10GHz: - Center Freq: 5.015000000 GHz - Span: 10.000 GHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 953.3 ms (20001 pts) - Peak: Mkr1 4.959 7 GHz, -29.096 dBm
10GHz-26GHz	 Key parameters for 10GHz-26GHz: - Center Freq: 18.000000000 GHz - Span: 16.000 GHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.529 s (20001 pts) - Peak: Mkr1 24.949 6 GHz, -44.258 dBm

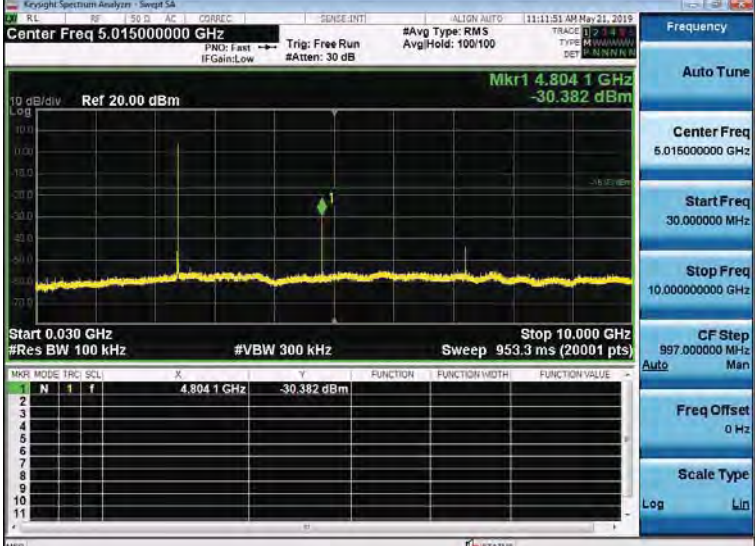
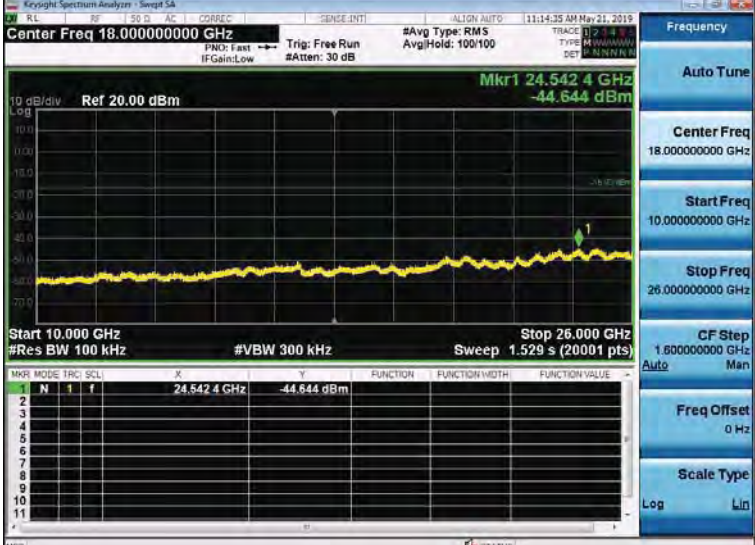


$\pi/4$ DQPSK MCH Graphs		
Reference		KeySight Spectrum Analyzer - Sweep SA RL FREQ SENSE INT ALIGN AUTO 10:28:07 PM May 23, 2019 Center Freq 2.441000000 GHz PMW: Fast IFGain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg Hold: 100/100 TYPE M W</

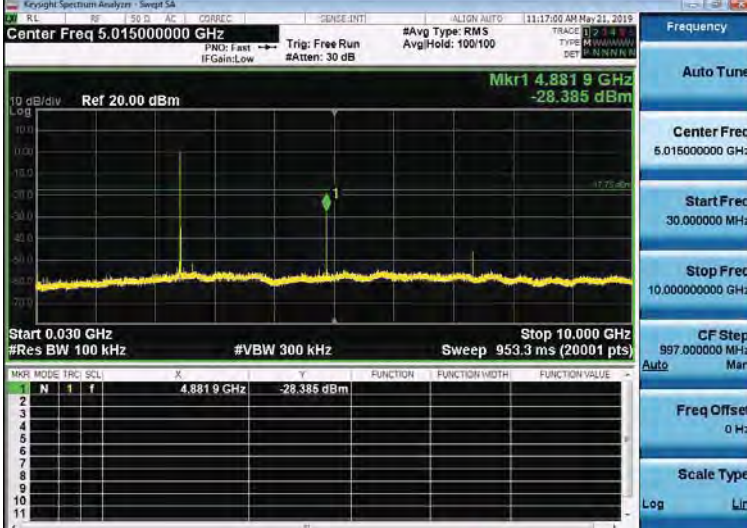
$\pi/4$ DQPSK HCH Graphs

Reference	 Key parameters for Reference graph: - Center Freq: 2.48000000 GHz - Marker 1: 2.4801835 GHz, -3.980 dBm - Resolution BW: 100 kHz - Span: 4.000 MHz - Sweep: 1.067 ms (8001 pts)
30MHz-10GHz	 Key parameters for 30MHz-10GHz graph: - Center Freq: 5.01500000 GHz - Marker 1: 4.9602 GHz, -28.841 dBm - Resolution BW: 100 kHz - Span: 9.970 GHz - Sweep: 953.3 ms (20001 pts)
10GHz-26GHz	 Key parameters for 10GHz-26GHz graph: - Center Freq: 18.00000000 GHz - Marker 1: 25.0224 GHz, -43.842 dBm - Resolution BW: 100 kHz - Span: 16.000 GHz - Sweep: 1.529 s (20001 pts)

8DPSK LCH Graphs

Reference	 KeySight Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref 20.00 dBm Mkr1 2.4018825 GHz -3.071 dBm Center 2.402000 GHz #Res BW 100 kHz #VBW 300 kHz Span 4.000 MHz Sweep 1.067 ms (8001 pts)
30MHz-10GHz	 KeySight Spectrum Analyzer - Sweep SA Center Freq 5.01500000 GHz Ref 20.00 dBm Mkr1 4.8041 GHz -30.382 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Stop 10.000 GHz Sweep 953.3 ms (20001 pts)
10GHz-26GHz	 KeySight Spectrum Analyzer - Sweep SA Center Freq 18.00000000 GHz Ref 20.00 dBm Mkr1 24.5424 GHz -44.644 dBm Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 26.000 GHz Sweep 1.529 s (20001 pts)

8DPSK MCH Graphs

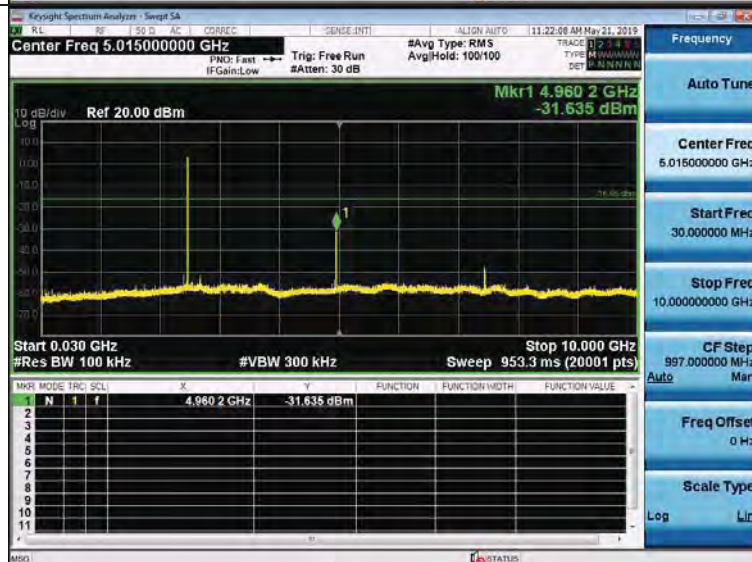
Reference	 Key parameters for Reference signal: - Center Freq: 2.441000000 GHz - Span: 4.000 MHz #Res BW: 100 kHz #VBW: 300 kHz - Sweep: 1.067 ms (8001 pts) - Peak Level: 2.246 dBm
30MHz-10GHz	 Key parameters for 30MHz-10GHz signal: - Center Freq: 5.015000000 GHz - Span: 10.000 GHz #Res BW: 100 kHz #VBW: 300 kHz - Sweep: 953.3 ms (20001 pts) - Peak Level: -28.385 dBm
10GHz-26GHz	 Key parameters for 10GHz-26GHz signal: - Center Freq: 18.000000000 GHz - Span: 16.000 GHz #Res BW: 100 kHz #VBW: 300 kHz - Sweep: 1.529 s (20001 pts) - Peak Level: -44.107 dBm

8DPSK HCH Graphs

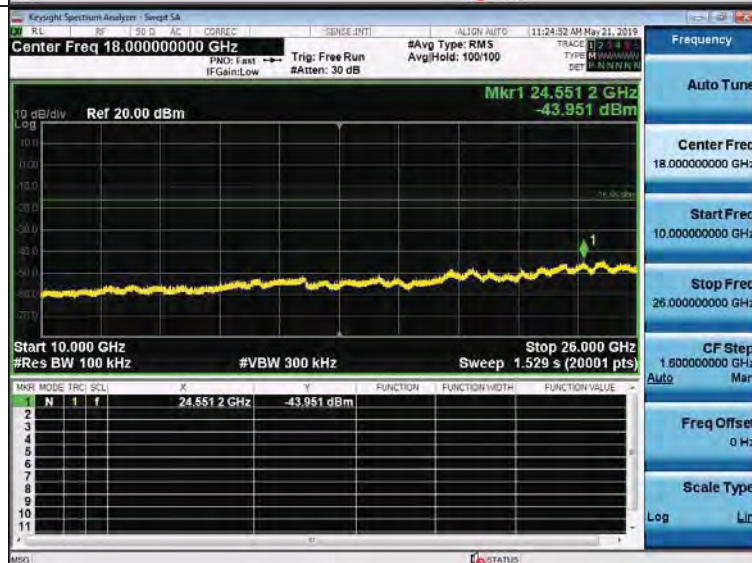
Reference



30MHz-10GHz



10GHz-26GHz



Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.	
Compliance for section 15.247(a)(1)	
According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.	
Compliance for section 15.247(g)	
According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.	

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

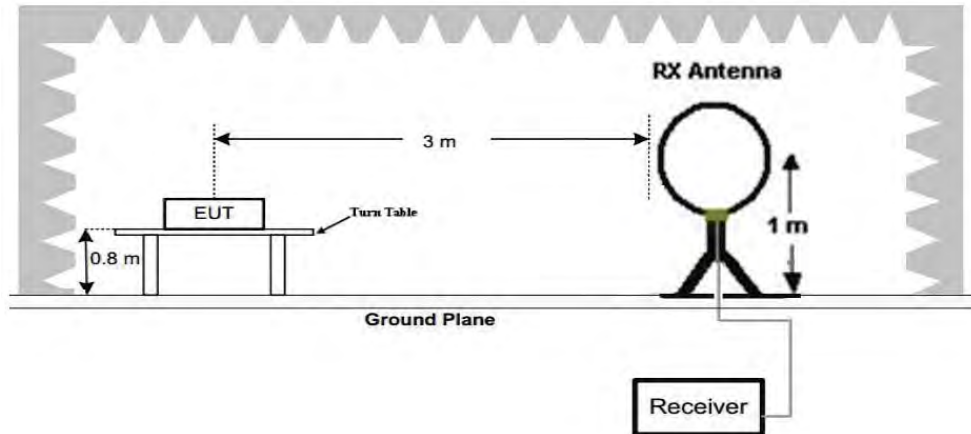


Figure 1. Below 30MHz

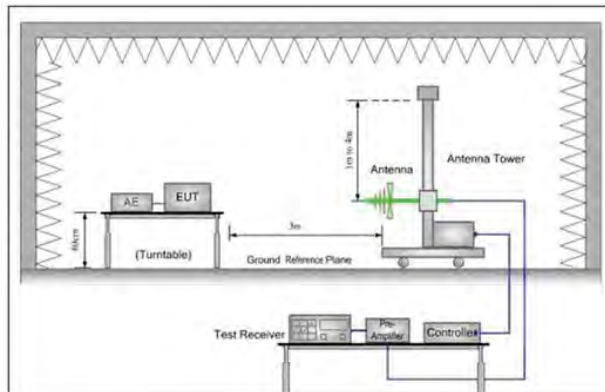


Figure 2. 30MHz to 1GHz

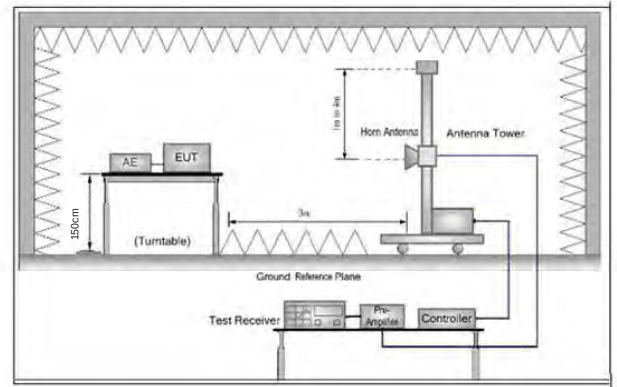


Figure 3. Above 1 GHz

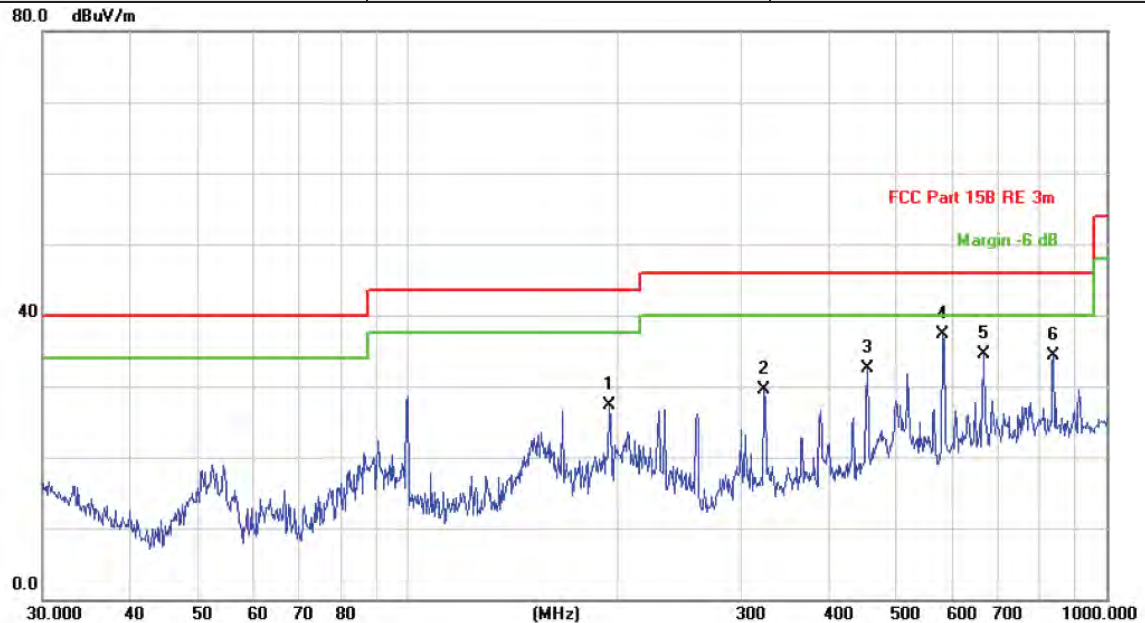
Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 3DH5 of data type and 8DPSK modulation is the worst case. For below 1GHz part, through pre-scan, the worst case is the highest channel. Only the worst case is recorded in the report.
Test Results:	Pass

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		194.4534	41.42	-14.08	27.34	43.50	-16.16	QP
2		323.3204	40.48	-10.94	29.54	46.00	-16.46	QP
3		454.3100	40.07	-7.54	32.53	46.00	-13.47	QP
4	*	582.7425	42.55	-5.27	37.28	46.00	-8.72	QP
5		668.1423	38.26	-3.74	34.52	46.00	-11.48	QP
6		839.1818	35.45	-1.10	34.35	46.00	-11.65	QP

Remark:

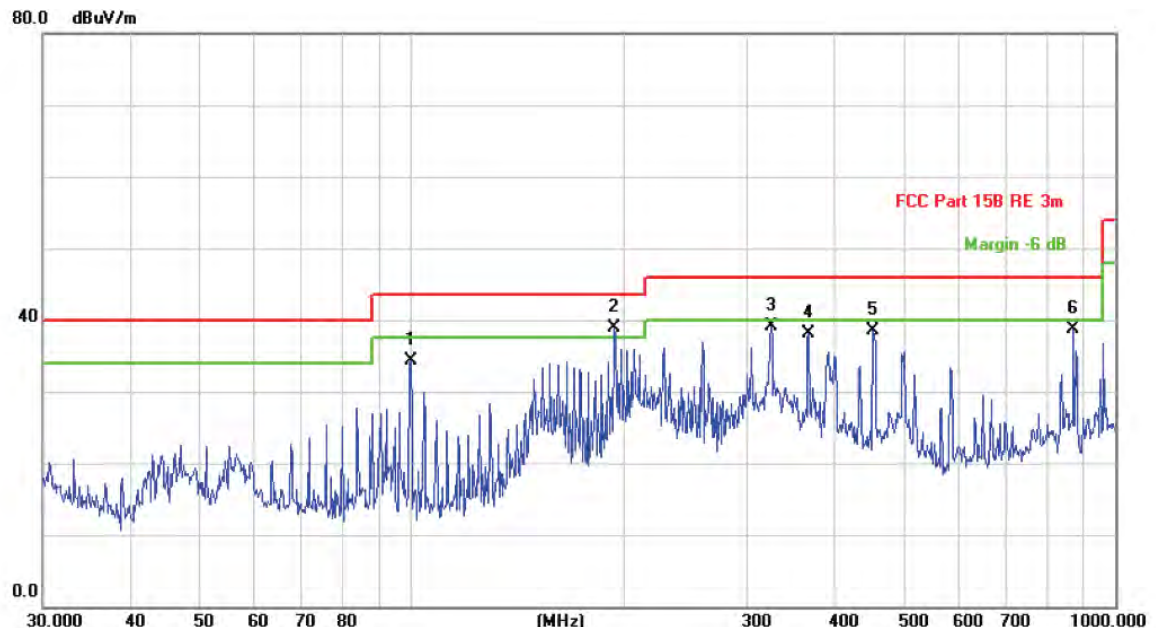
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		99.8777	49.97	-15.72	34.25	43.50	-9.25	QP
2	*	194.4533	52.36	-13.54	38.82	43.50	-4.68	QP
3		324.4560	49.65	-10.53	39.12	46.00	-6.88	QP
4		366.8231	47.52	-9.50	38.02	46.00	-7.98	QP
5		452.7196	45.71	-7.29	38.42	46.00	-7.58	QP
6		872.1832	38.83	-0.08	38.75	46.00	-7.25	QP

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.11.2 Transmitter Emission above 1GHz

mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.59	-9.2	44.39	74	-29.61	Peak	H
2400	55.88	-9.39	46.49	74	-27.51	Peak	H
4804	52.50	-4.33	48.17	74	-25.83	Peak	H
7206	50.08	1.01	51.09	74	-22.91	Peak	H
2390	55.99	-9.2	46.79	74	-27.21	Peak	V
2400	55.69	-9.39	46.30	74	-27.70	Peak	V
4804	55.02	-4.33	50.69	74	-23.31	Peak	V
7206	50.22	1.01	51.23	74	-22.77	Peak	V

mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	50.46	-4.11	46.35	74	-27.65	Peak	H
7323	50.52	1.51	52.03	74	-21.97	Peak	H
4882	53.84	-4.11	49.73	74	-24.27	Peak	V
7323	49.45	1.51	50.96	74	-23.04	Peak	V

mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	57.22	-9.29	47.93	74	-26.07	Peak	H
4960	50.27	-4.04	46.23	74	-27.77	Peak	H
7440	48.31	1.57	49.88	74	-24.12	Peak	H
2483.5	56.11	-9.29	46.82	74	-27.18	Peak	V
4960	50.14	-4.04	46.10	74	-27.90	Peak	V
7440	49.44	1.57	51.01	74	-22.99	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	54.20	-9.2	45.00	74	-29.00	Peak	H
2400	54.62	-9.39	45.23	74	-28.77	Peak	H
4804	52.48	-4.33	48.15	74	-25.85	Peak	H
7206	49.81	1.01	50.82	74	-23.18	Peak	H
2390	55.40	-9.2	46.20	74	-27.80	Peak	V
2400	56.92	-9.39	47.53	74	-26.47	Peak	V
4804	52.86	-4.33	48.53	74	-25.47	Peak	V
7206	48.75	1.01	49.76	74	-24.24	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	51.74	-4.11	47.63	74	-26.37	Peak	H
7323	50.25	1.51	51.76	74	-22.24	Peak	H
4882	52.25	-4.11	48.14	74	-25.86	Peak	V
7323	50.08	1.51	51.59	74	-22.41	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	55.97	-9.29	46.68	74	-27.32	Peak	H
4960	52.75	-4.04	48.71	74	-25.29	Peak	H
7440	49.52	1.57	51.09	74	-22.91	Peak	H
2483.5	54.41	-9.29	45.12	74	-28.88	Peak	V
4960	51.13	-4.04	47.09	74	-26.91	Peak	V
7440	49.37	1.57	50.94	74	-23.06	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	54.87	-9.2	45.67	74	-28.33	Peak	H
2400	56.85	-9.39	47.46	74	-26.54	Peak	H
4804	51.78	-4.33	47.45	74	-26.55	Peak	H
7206	50.89	1.01	51.90	74	-22.10	Peak	H
2390	55.07	-9.2	45.87	74	-28.13	Peak	V
2400	54.76	-9.39	45.37	74	-28.63	Peak	V
4804	55.14	-4.33	50.81	74	-23.19	Peak	V
7206	50.11	1.01	51.12	74	-22.88	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	50.92	-4.11	46.81	74	-27.19	Peak	H
7323	51.00	1.51	52.51	74	-21.49	Peak	H
4882	52.14	-4.11	48.03	74	-25.97	Peak	V
7323	49.59	1.51	51.10	74	-22.90	Peak	V

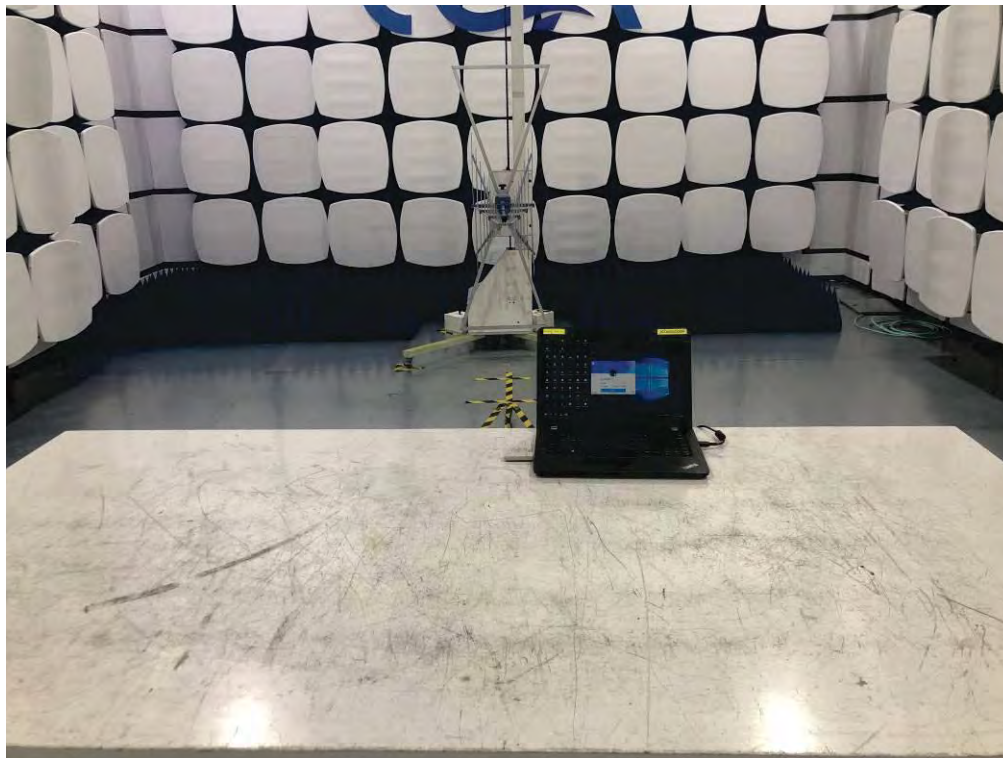
Worse case mode:		8DPSK(3DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	56.70	-9.29	47.41	74	-26.59	Peak	H
4960	53.09	-4.04	49.05	74	-24.95	Peak	H
7440	48.31	1.57	49.88	74	-24.12	Peak	H
2483.5	55.18	-9.29	45.89	74	-28.11	Peak	V
4960	49.68	-4.04	45.64	74	-28.36	Peak	V
7440	50.82	1.57	52.39	74	-21.61	Peak	V

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Photographs - EUT Test Setup

6.1 Radiated Emission



30MHz~1GHz



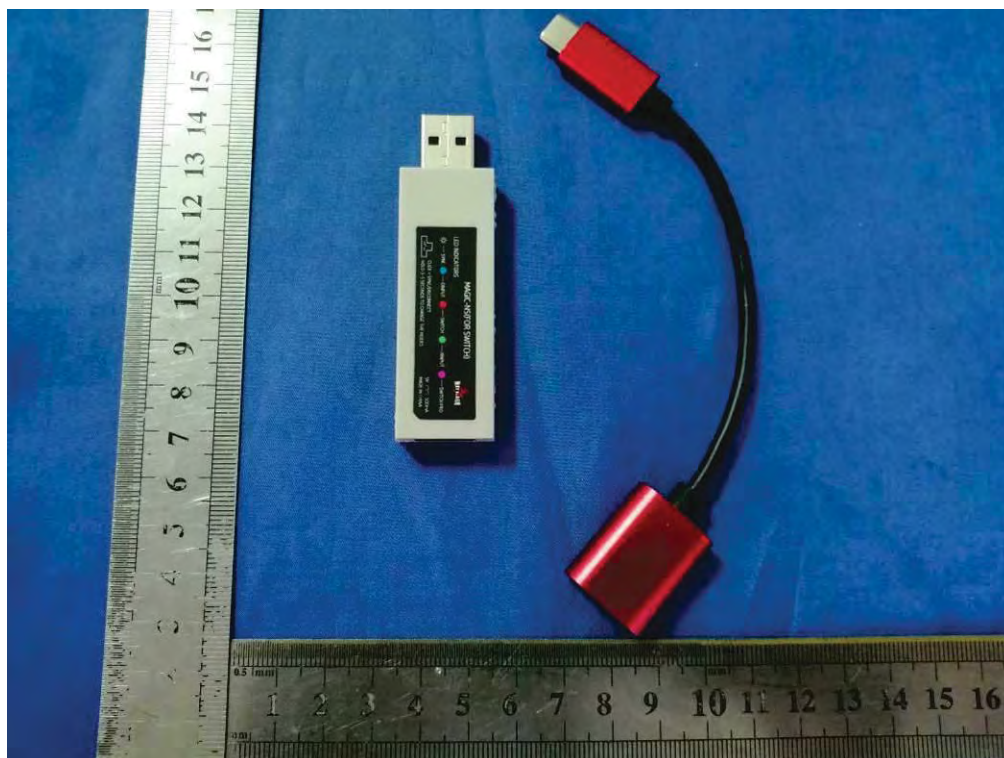
Above 1GHz

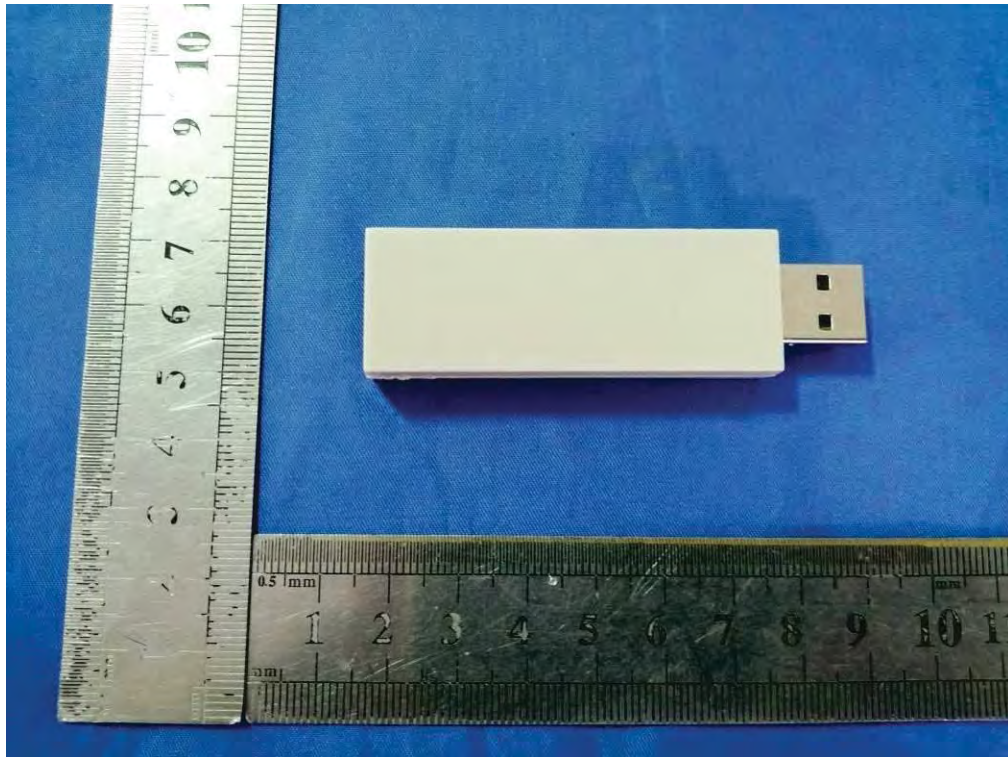
6.2 Conducted Emission

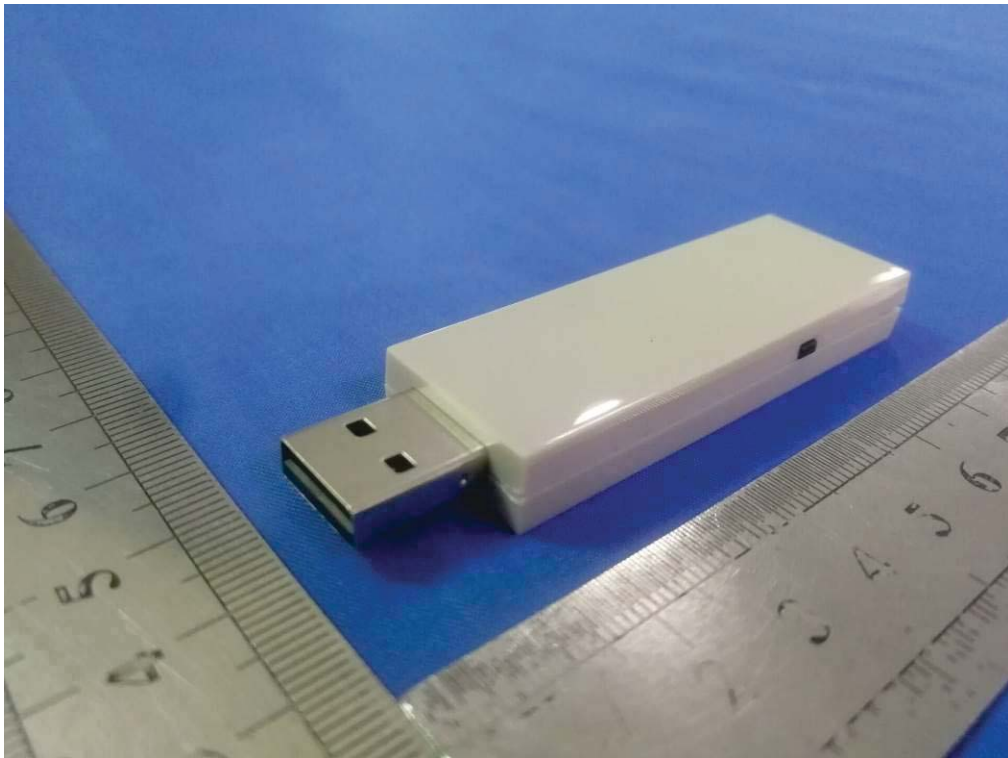
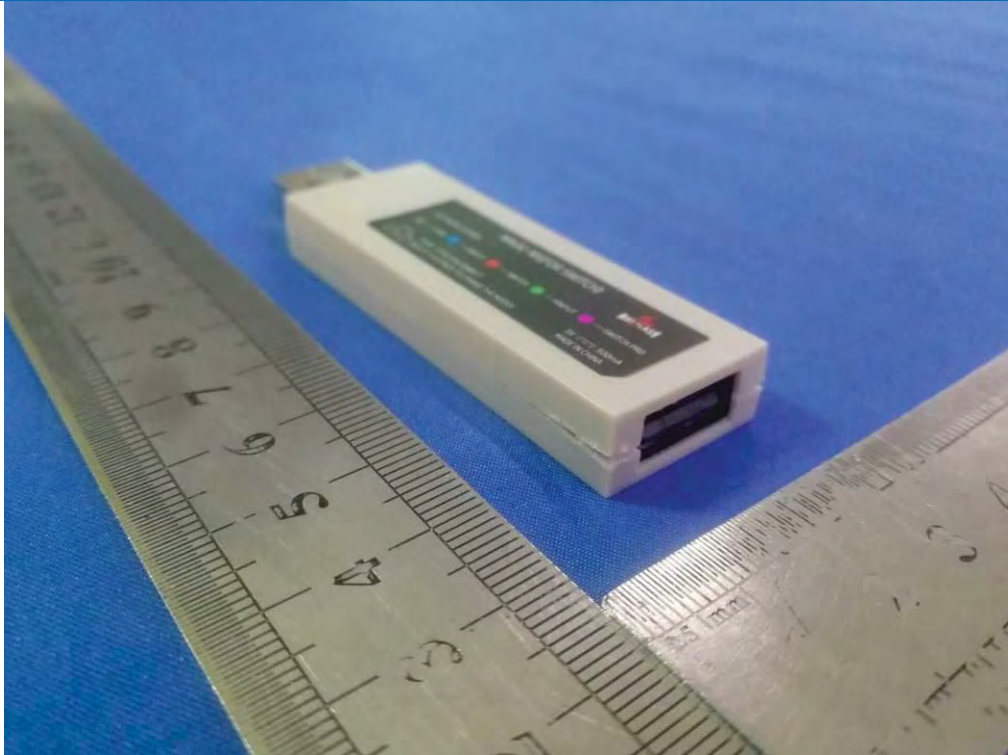


7 PHOTOGRAPHS OF EUT

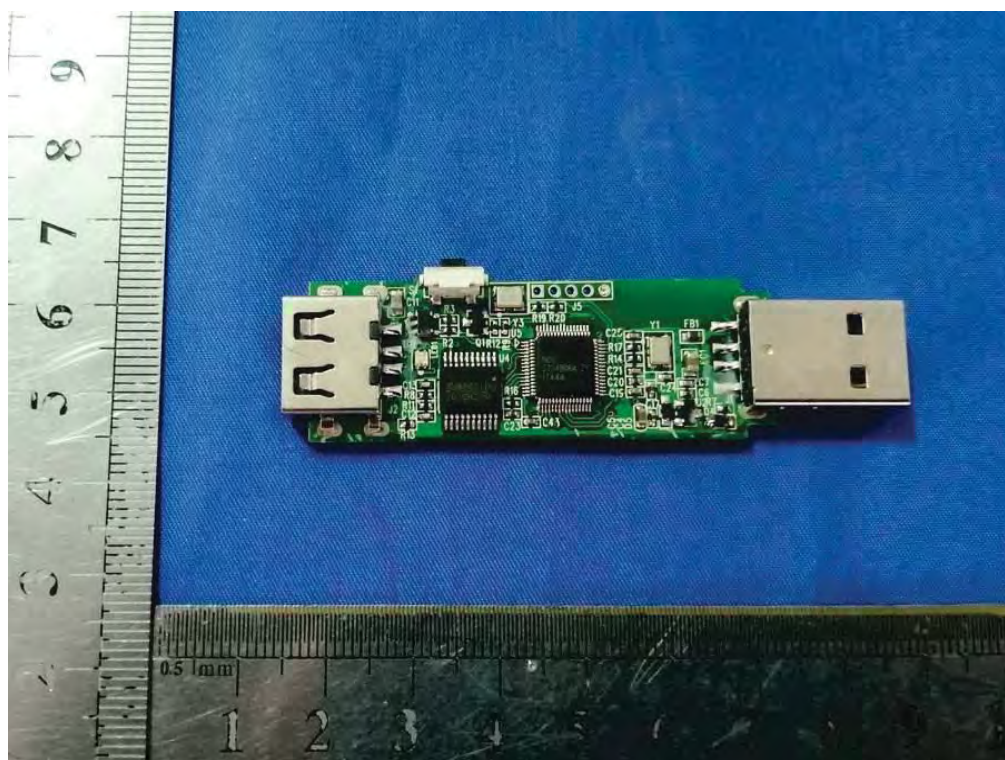
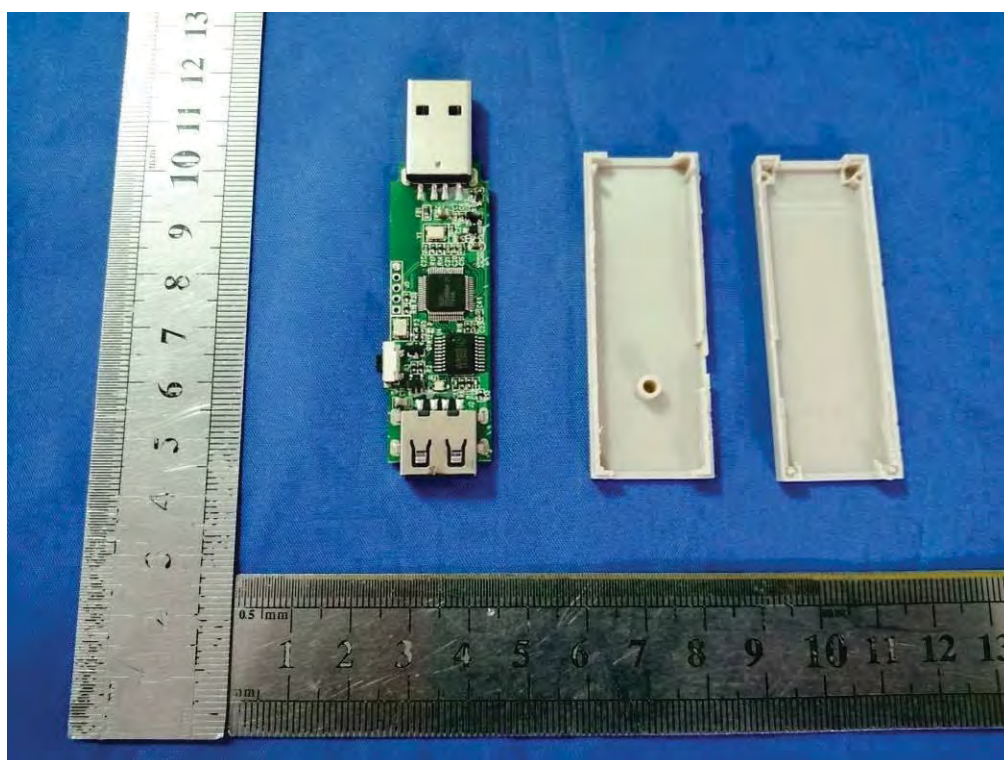
External Photos of EUT

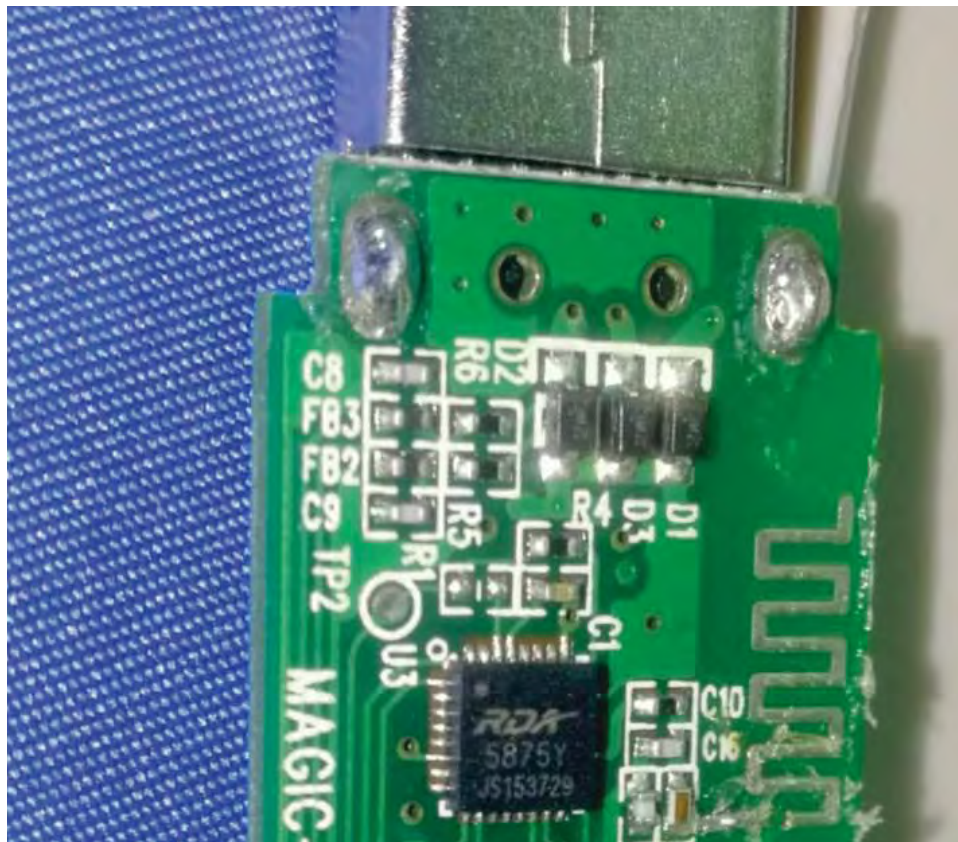
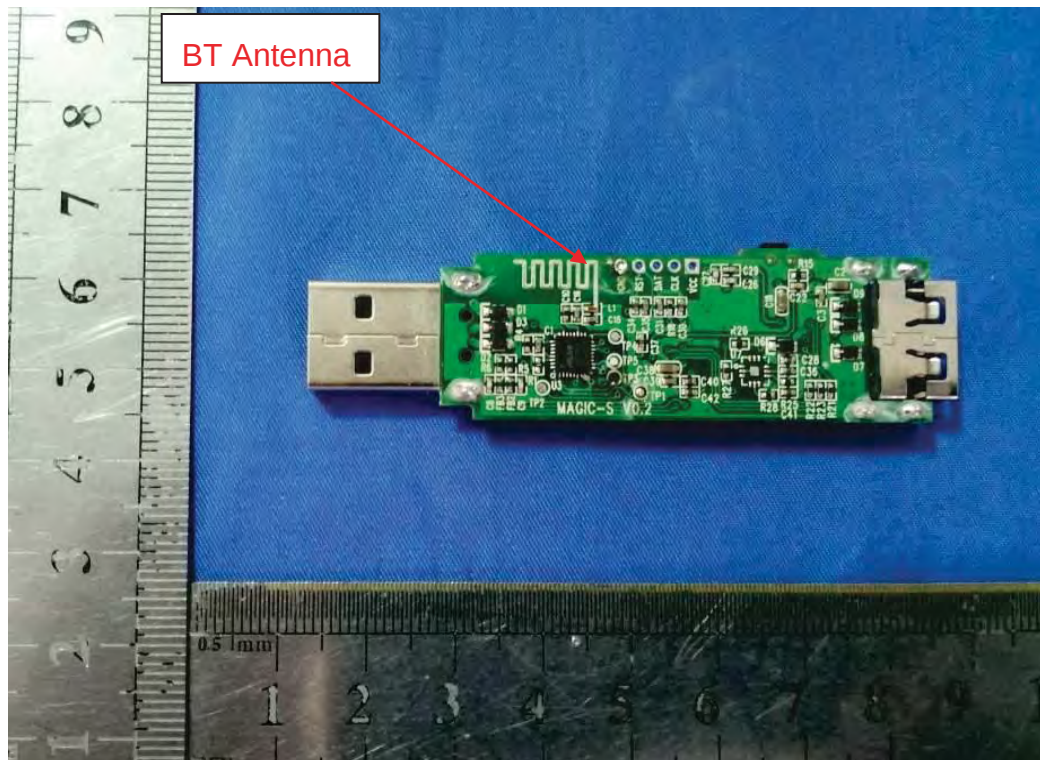






Internal Photos of EUT





*****THE END*****