
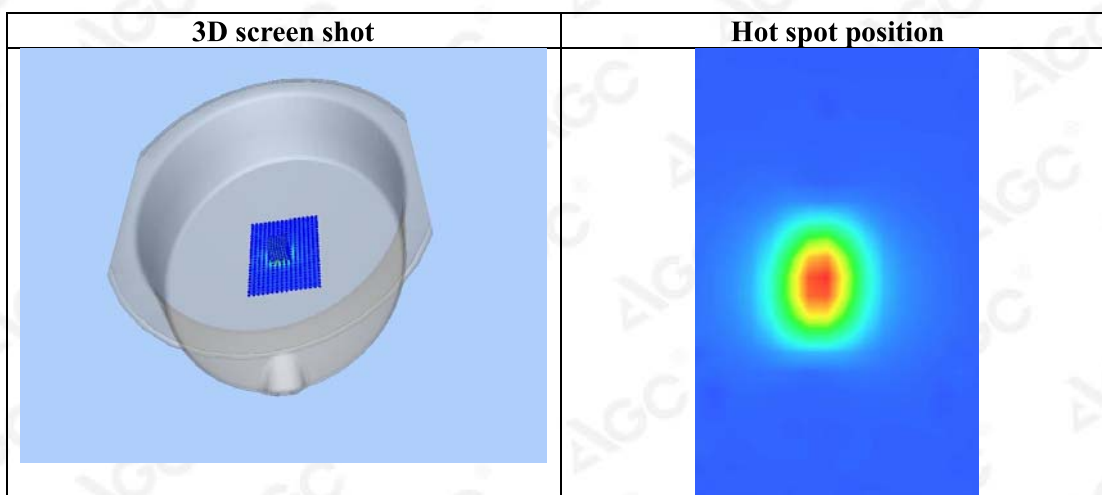


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	7.7636	3.7174	1.1525	0.3708	0.1217	0.0492	0.0138

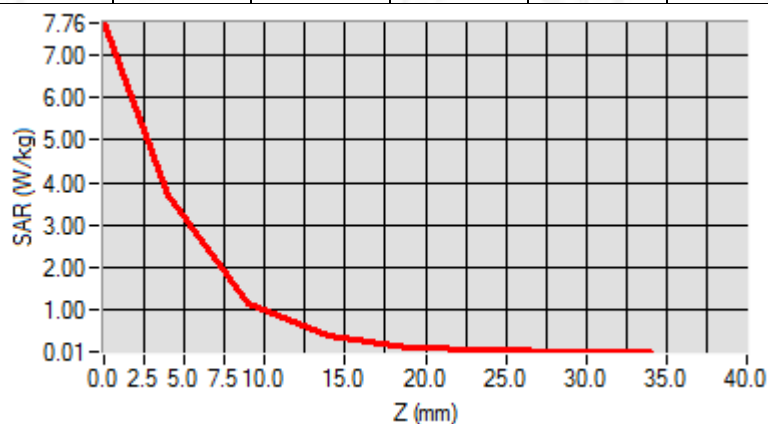

Test Laboratory: AGC Lab
System Check Head 5200 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: Apr. 18,2020


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1; Conv.F=1.86
Frequency: 5200 MHz; Medium parameters used: $f = 5200$ MHz; $\sigma = 4.57$ mho/m; $\epsilon_r = 36.84$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE2; Calibrated: Jun. 04,2019; Serial No.: SN 41/18 EPGO334
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 5200 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 5200 MHz Head/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


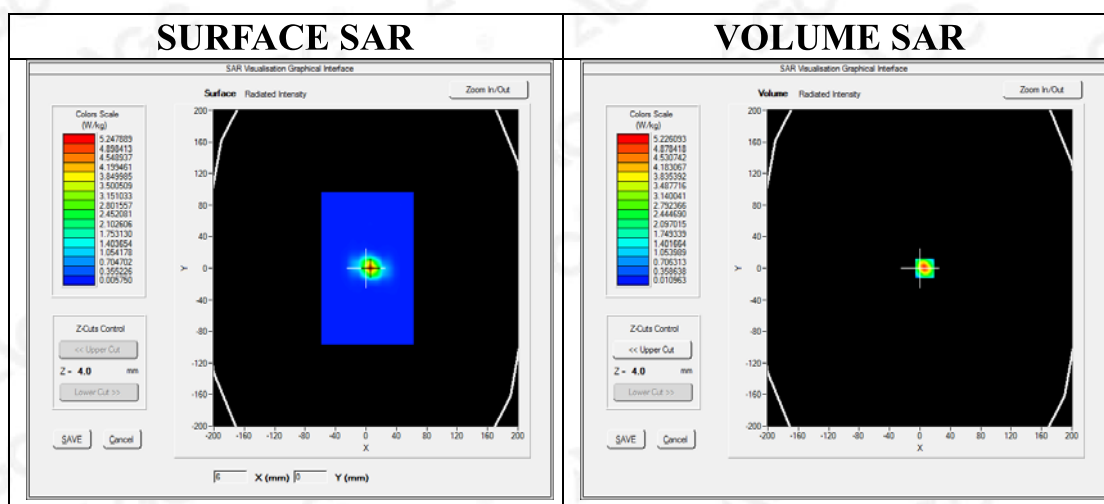


Maximum location: X=6.00, Y=0.00

SAR Peak: 12.84 W/kg

SAR 10g (W/Kg)	1.641827
SAR 1g (W/Kg)	4.881834

Z (mm)	0.00	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0
	0	0	0	0	0	0	0	0	0	0	0	0
SAR (W/K g)	13.06 42	5.2 268	2.9 471	1.6 453	0.91 74	0.51 08	0.29 12	0.16 67	0.09 41	0.06 32	0.03 45	0.02 95

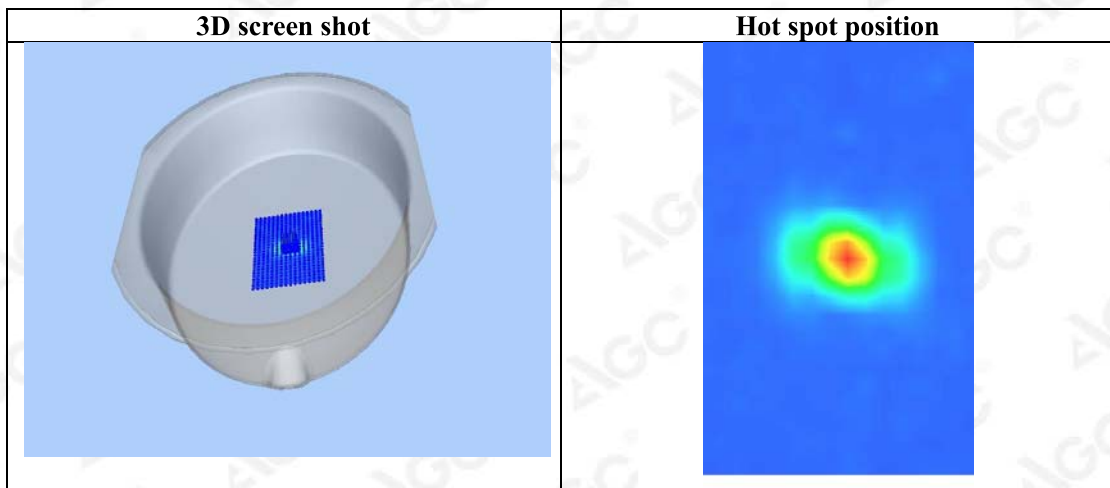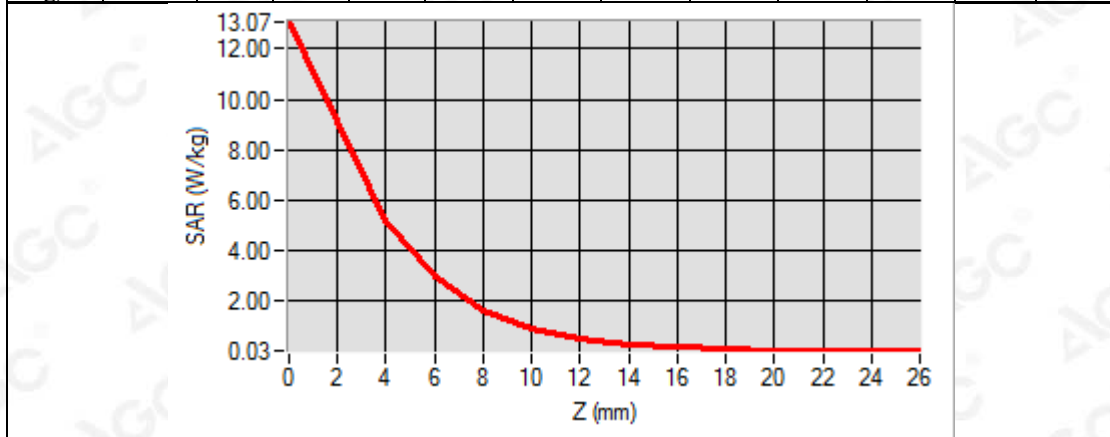

Test Laboratory: AGC Lab
System Check Head 5800 MHz
DUT: Dipole 5000MHz Type: SWG5500

Date: May 20,2020


Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1; Conv.F=2.09
Frequency: 5800 MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.19$ mho/m; $\epsilon_r = 34.20$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=15dBm
Ambient temperature (°C): 21.0, Liquid temperature (°C): 20.7

SATIMO Configuration:

- Probe: SSE2; Calibrated: Jun. 04,2019; Serial No.: SN 41/18 EPGO334
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 5800 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm



Configuration/System Check 5800 MHz Head/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

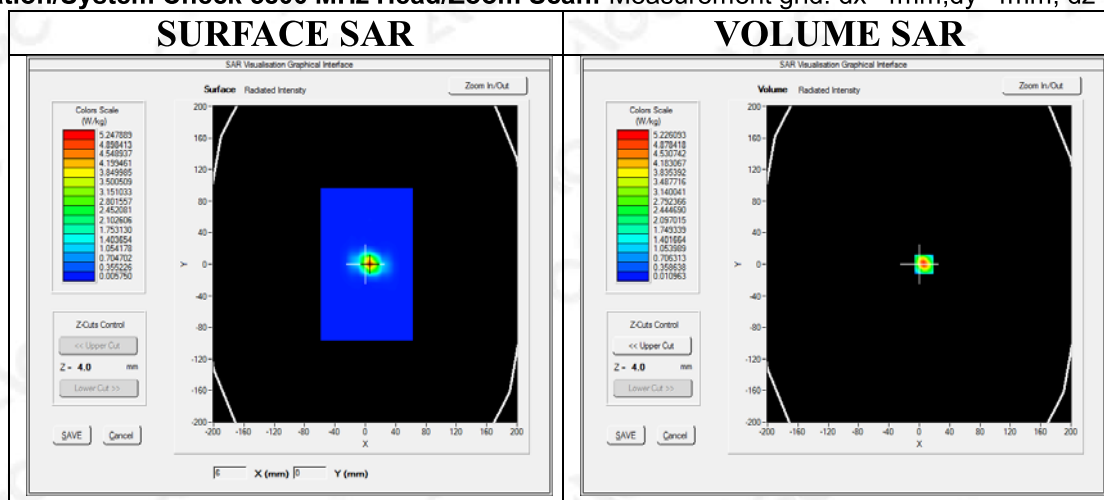

Maximum location: X=6.00, Y=0.00

SAR Peak: 12.84 W/kg

SAR 10g (W/Kg)	1.758753
SAR 1g (W/Kg)	5.356849

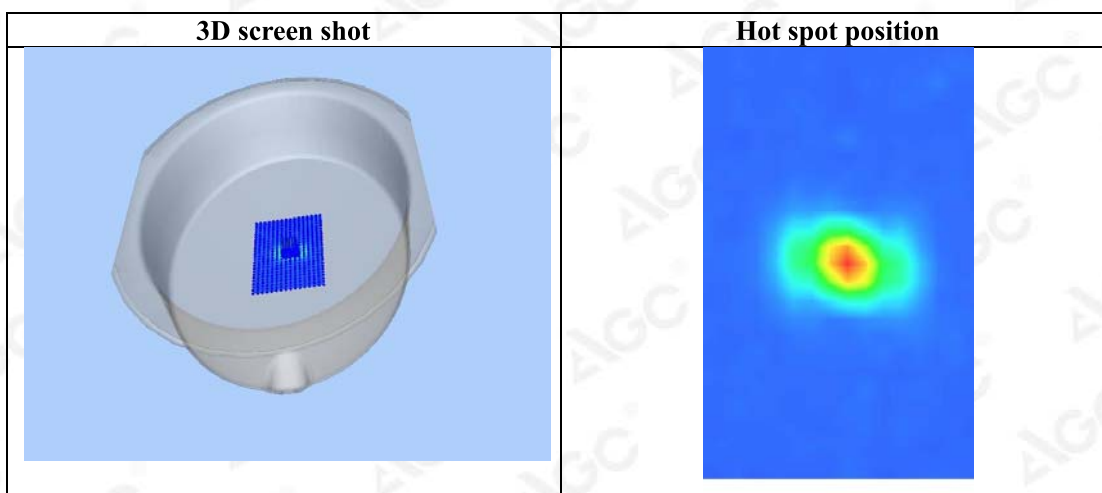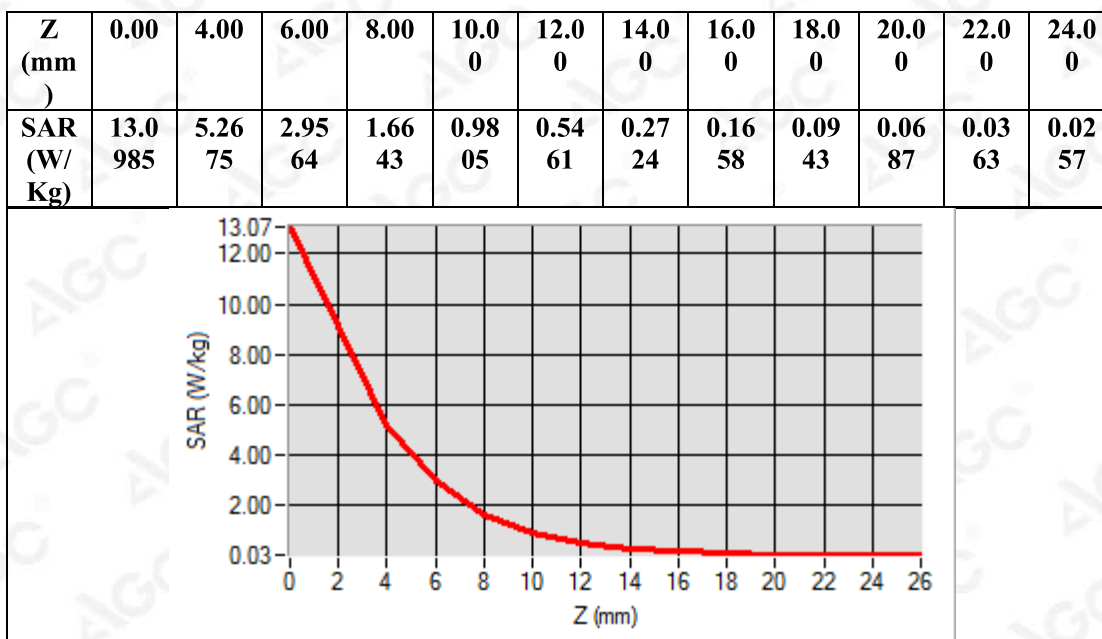

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab
GPRS 850 Mid-Body-Back (3up)

Date: Mar. 22,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: GPRS-3 Slot; Communication System Band: GSM 850; Duty Cycle: 1:2.7; Conv.F=5.05;
Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.23$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.0, Liquid temperature (°C): 20.7


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/GPRS 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	GSM 850
Channels	Middle
Signal	TDMA (Crest factor: 2.7)

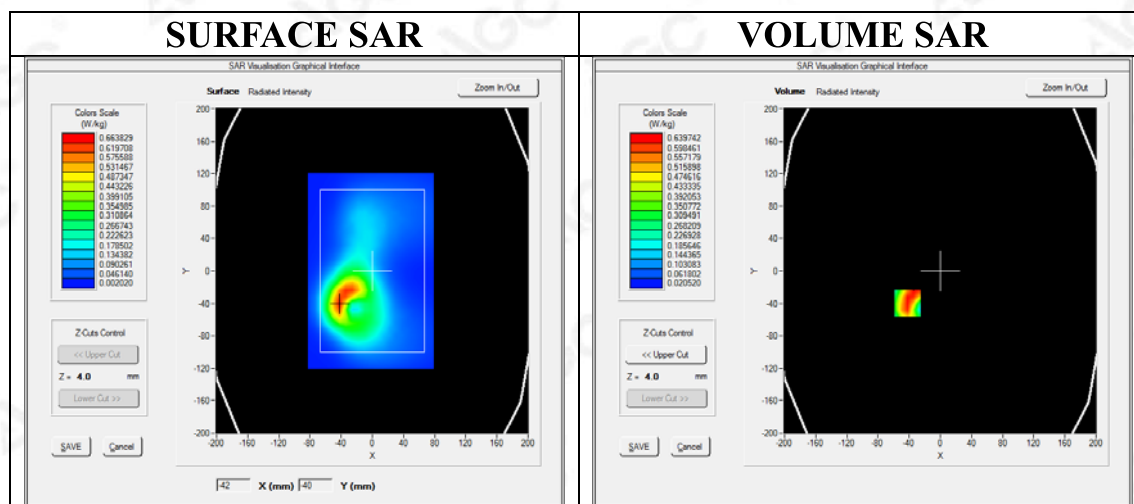

Maximum location: X=-42.00, Y=-40.00

SAR Peak: 0.93 W/kg

SAR 10g (W/Kg)	0.374977
SAR 1g (W/Kg)	0.610456

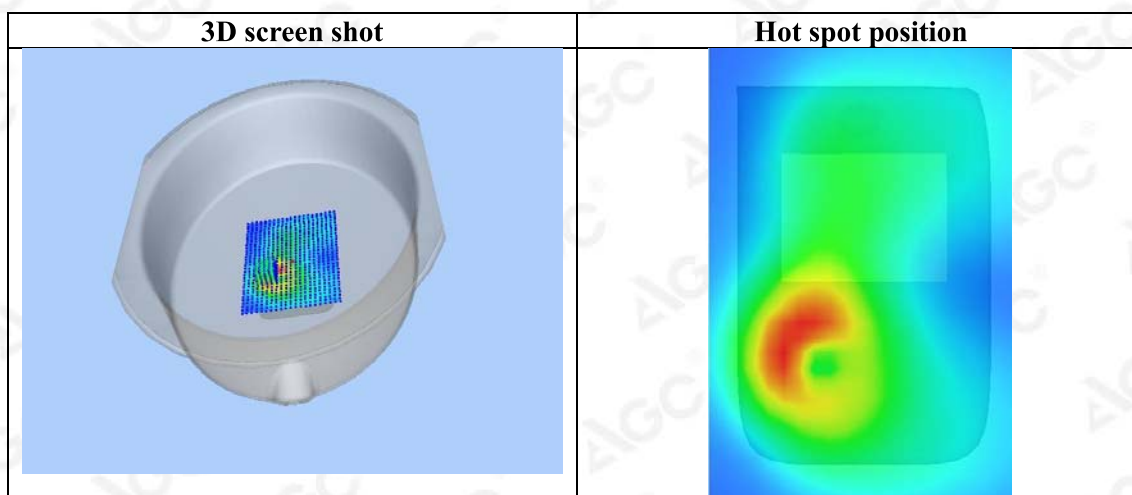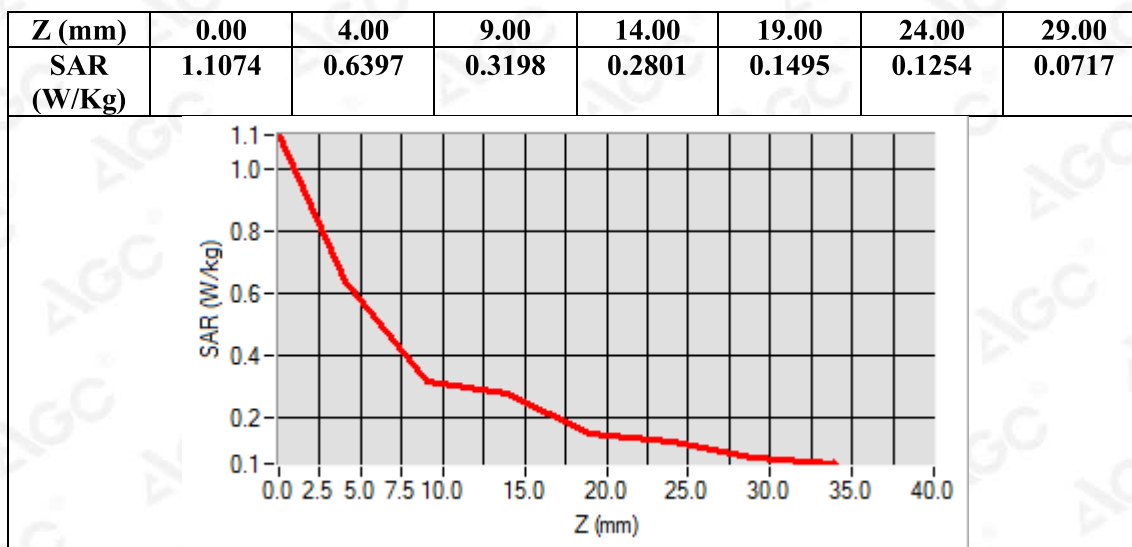

Test Laboratory: AGC Lab
GPRS 1900 Low-Body-Back (4up)

Date: Mar. 24,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC


Communication System: GPRS-4Slot; Communication System Band: PCS 1900; Duty Cycle: 1:2.1; Conv.F=4.48;
Frequency: 1850.2 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 41.56$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS1900 Low -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS1900 Low -Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	PCS 1900
Channels	Low
Signal	TDMA (Crest factor: 2.0)

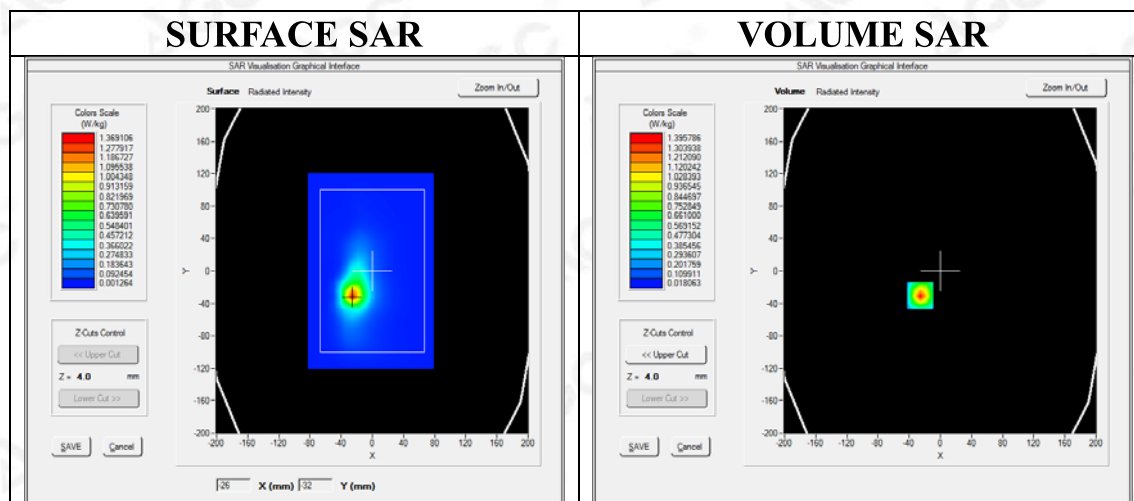

Maximum location: X=-26.00, Y=-31.00

SAR Peak: 2.21 W/kg

SAR 10g (W/Kg)	0.616197
SAR 1g (W/Kg)	1.180276

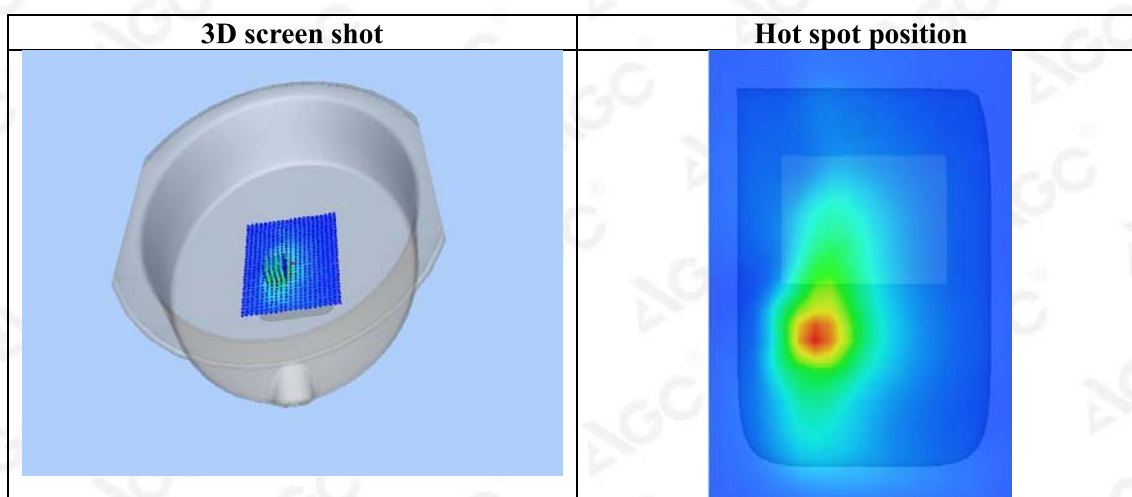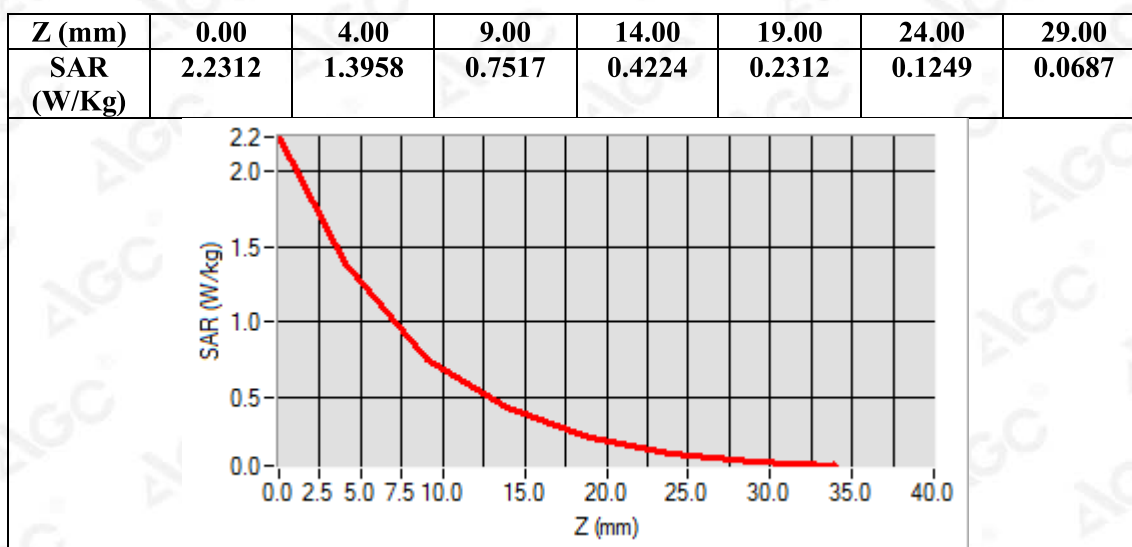

Test Laboratory: AGC Lab
WCDMA Band II Mid-Body-Towards Phantom (RMC 12.2kbps)
DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Date: Mar. 24,2020


Communication System: UMTS; Communication System Band: Band II UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.48;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 40.23$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA band II Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA band II Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Front
Band	WCDMA band II
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

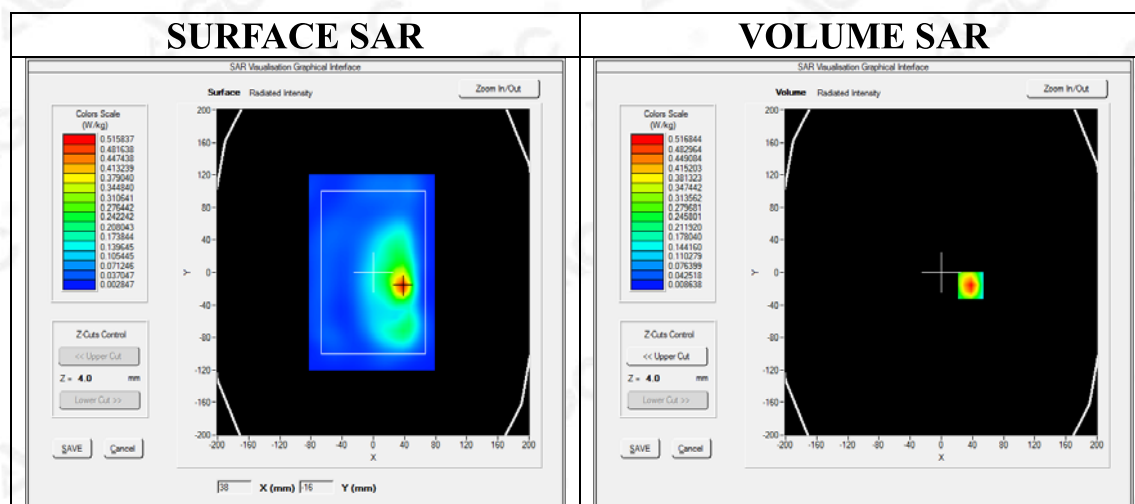

Maximum location: X=38.00, Y=-16.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.255957
SAR 1g (W/Kg)	0.484613

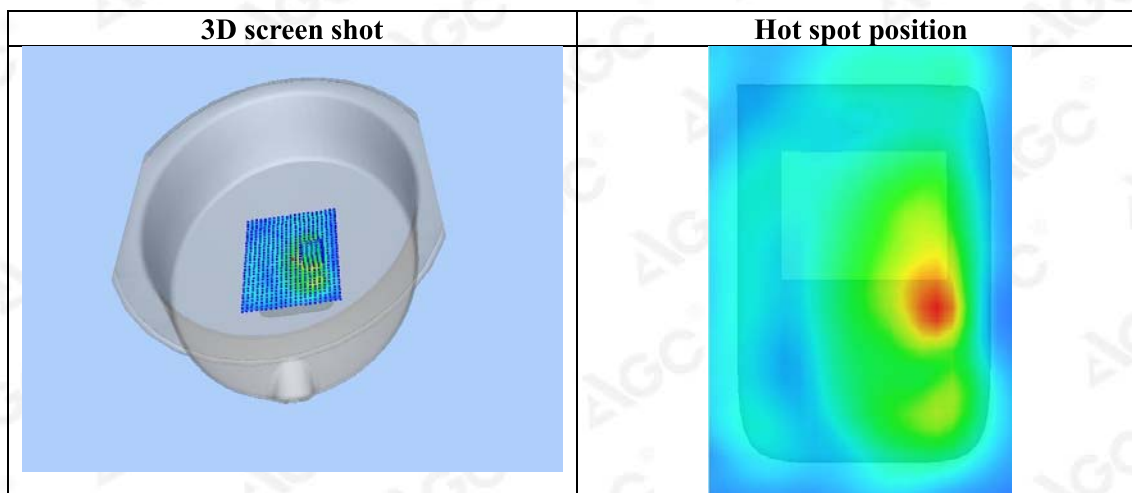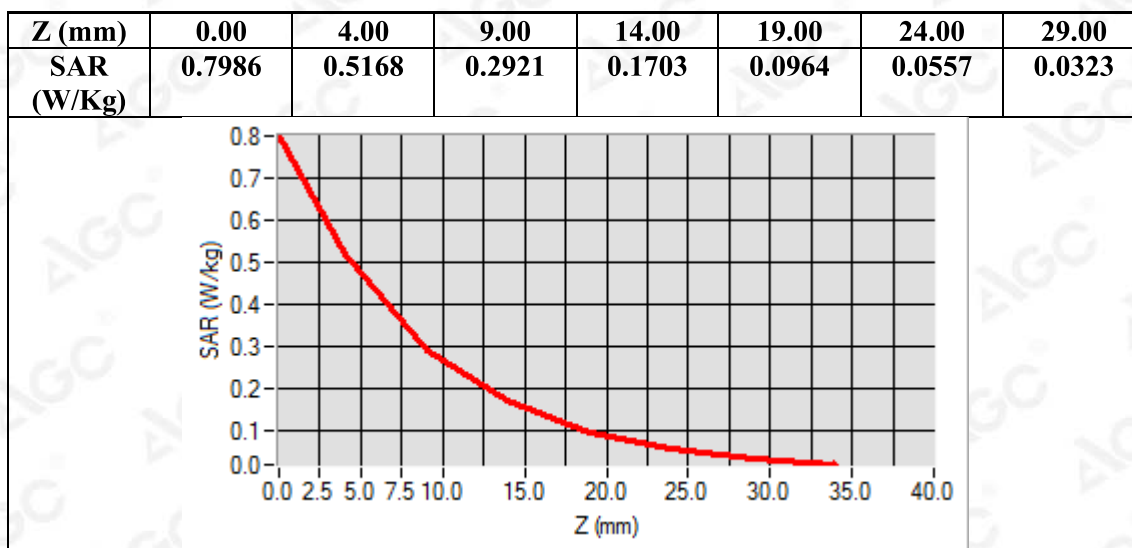

Test Laboratory: AGC Lab

Date: Mar. 22,2020

WCDMA Band V Mid-Body-Towards Phantom (RMC)

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: UMTS; Communication System Band: BAND V UTRA/FDD; Duty Cycle:1: 1; Conv.F=5.05;
Frequency: 836.6 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.89\text{ mho/m}$; $\epsilon_r = 40.23$; $\rho = 1000\text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.0, Liquid temperature ($^{\circ}\text{C}$): 20.7


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band V Mid-Body-Front/Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$



Configuration/ WCDMA Band V Mid-Body- Front /Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	$dx=8\text{mm}$ $dy=8\text{mm}$, $h= 5.00\text{ mm}$
ZoomScan	$5\times 5\times 7$, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$,Complete
Phantom	ELLI
Device Position	Body Front
Band	WCDMA Band V
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

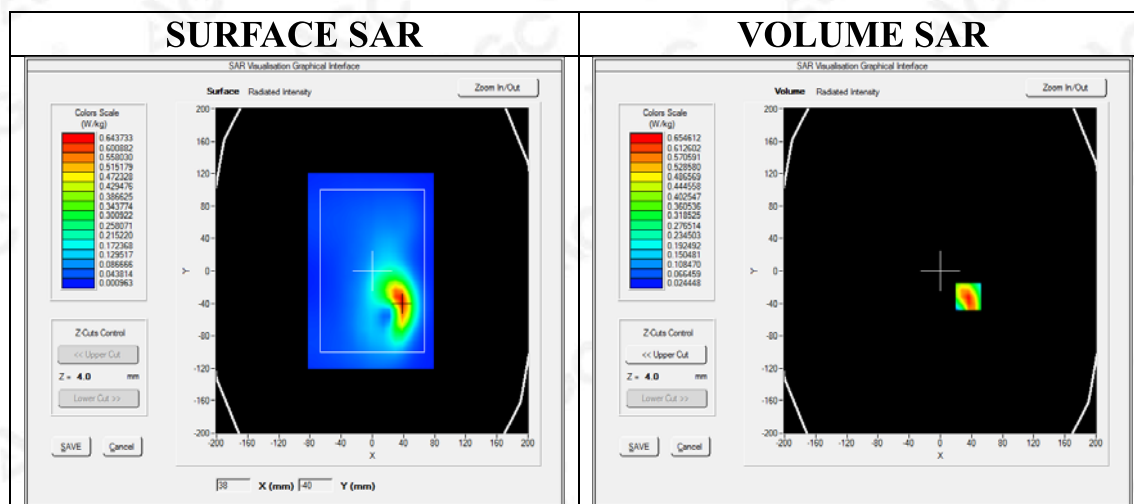
Maximum location: $X=36.00$, $Y=-32.00$

SAR Peak: 0.99 W/kg

SAR 10g (W/Kg)	0.358445
SAR 1g (W/Kg)	0.620435

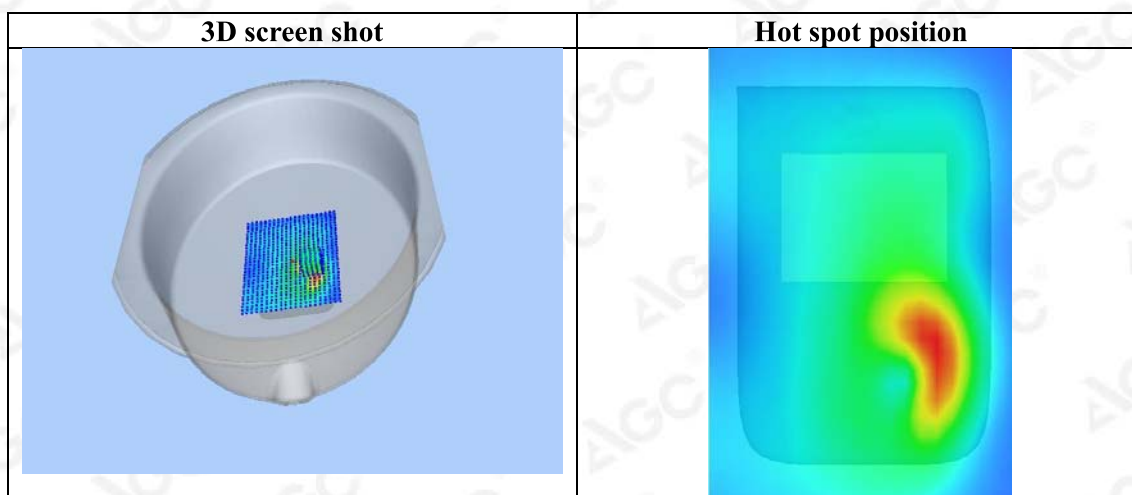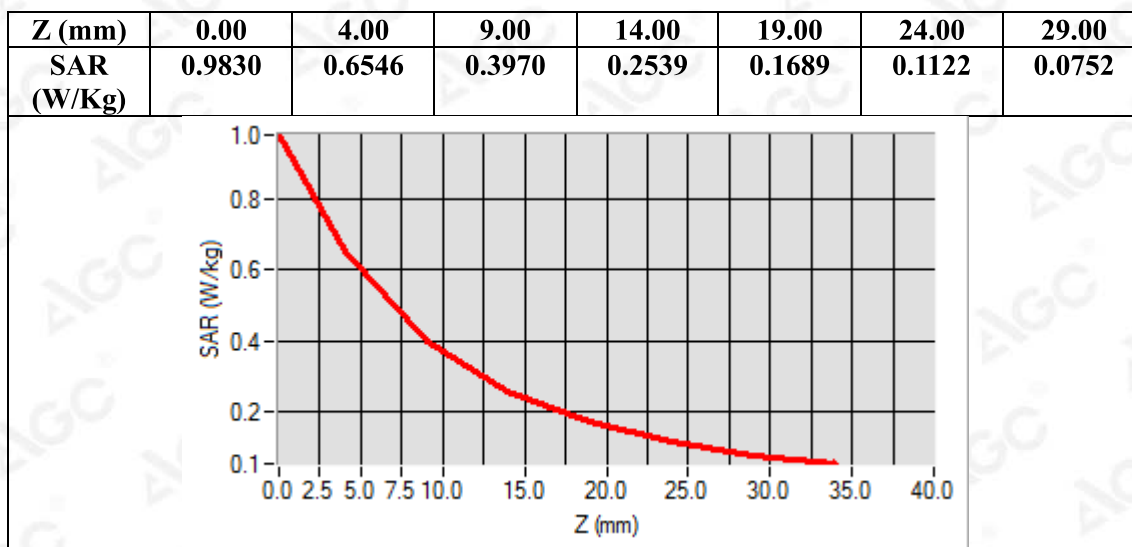

Test Laboratory: AGC Lab
LTE Band 2 Mid-Body-Front (1 RB#0)

Date: Mar. 17,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=4.48;
Frequency:1880MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 2 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

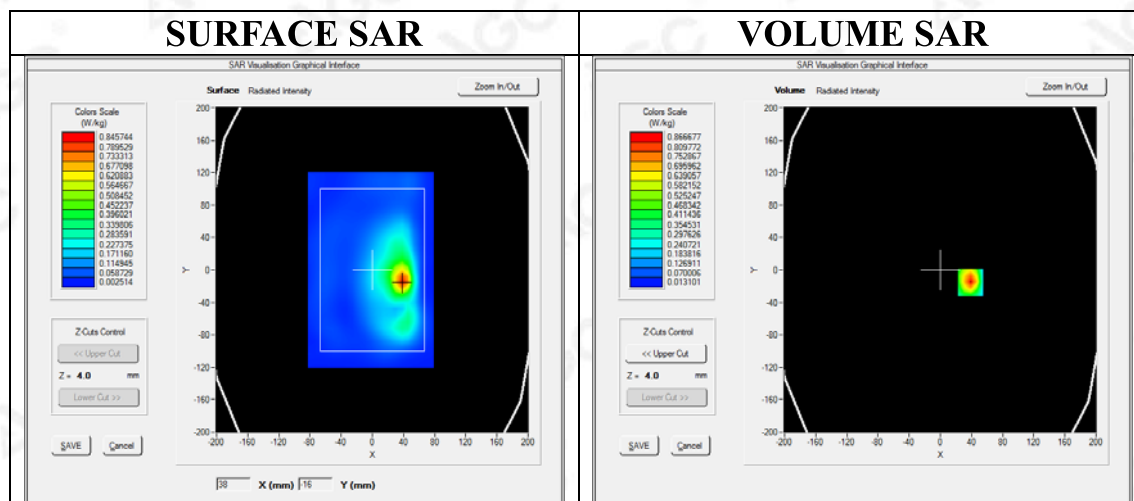

Maximum location: X=39.00, Y=-15.00

SAR Peak: 1.35 W/kg

SAR 10g (W/Kg)	0.422393
SAR 1g (W/Kg)	0.745240

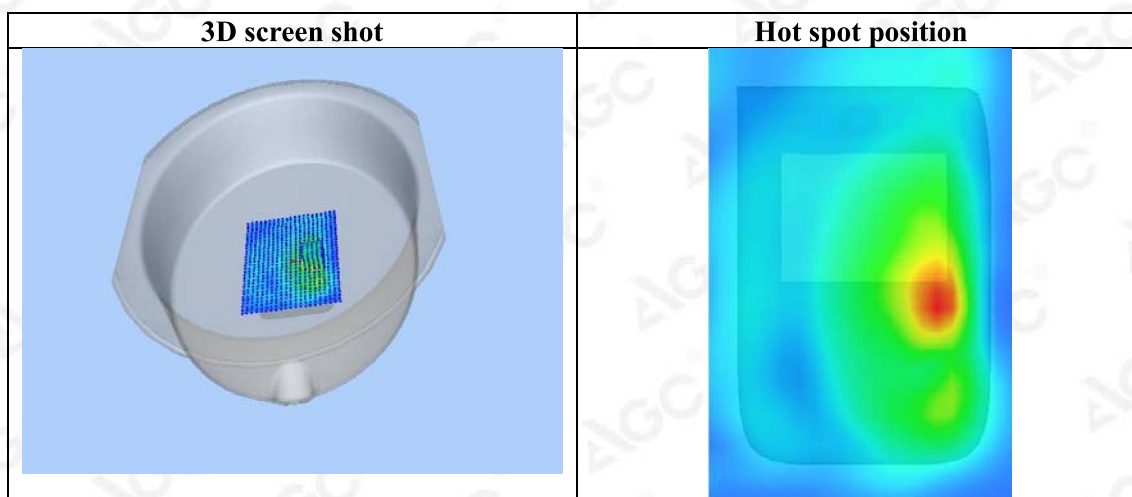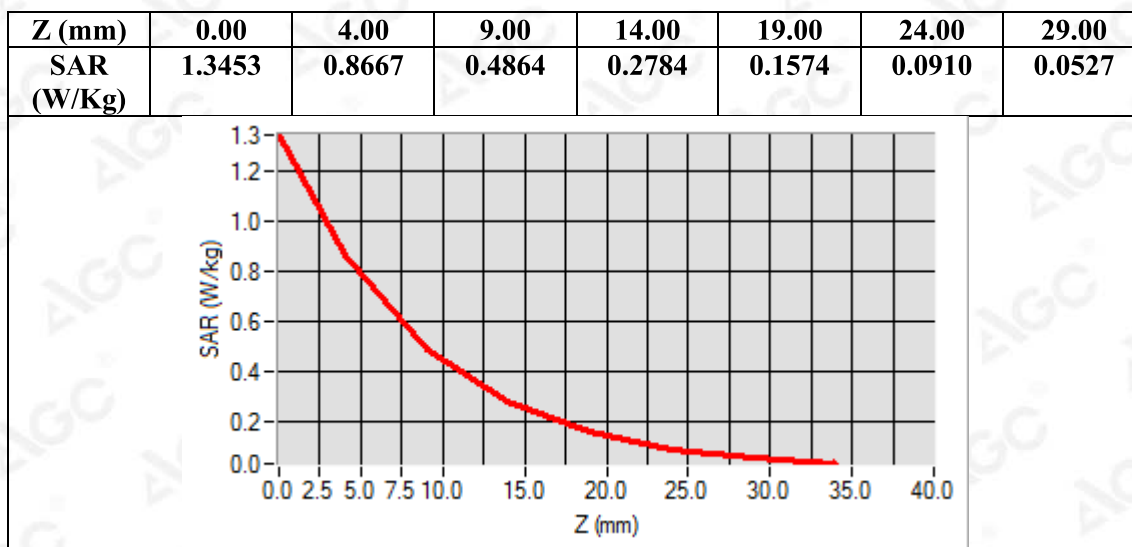

Test Laboratory: AGC Lab
LTE Band 2 Mid-Body-Front (50% RB#0)

Date: Mar. 17,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=4.48;
Frequency:1880MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 20.9, Liquid temperature (°C): 20.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 2 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

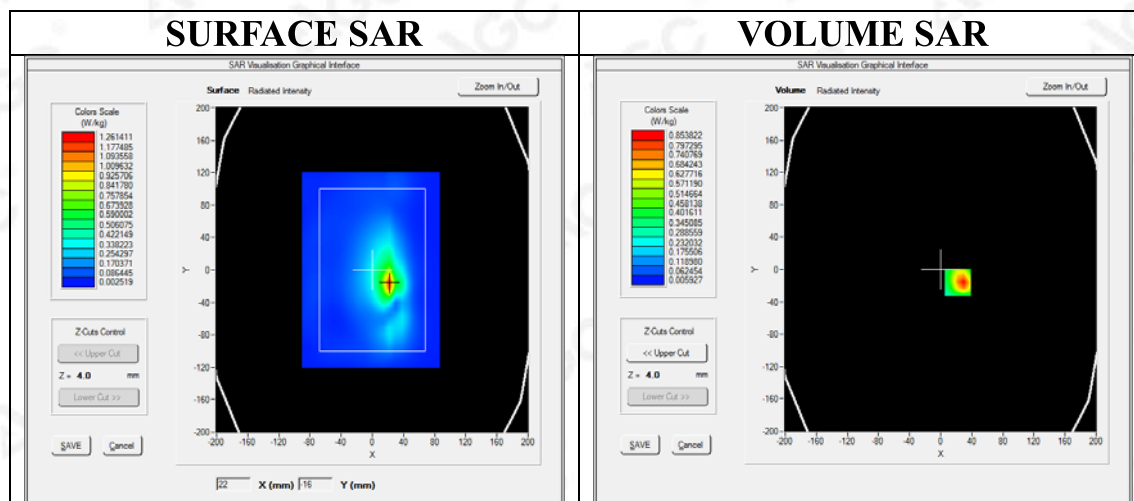

Maximum location: X=-26.00, Y=-16.00

SAR Peak: 1.36 W/kg

SAR 10g (W/Kg)	0.375123
SAR 1g (W/Kg)	0.587951

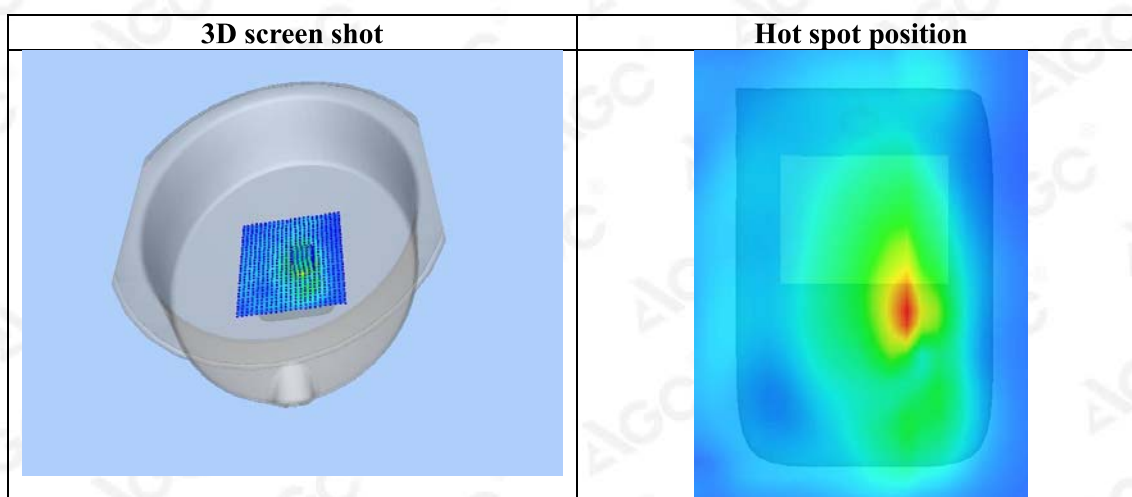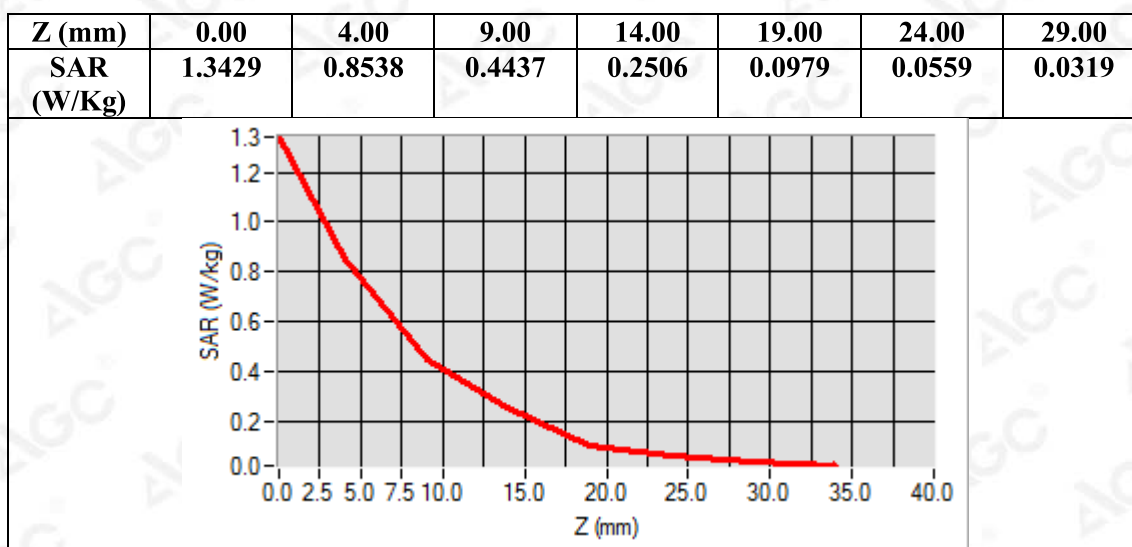

Test Laboratory: AGC Lab
LTE Band 4 Mid-Body-Front (1 RB#0)

Date: Mar. 19,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=4.05;
Frequency:1732.5 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 4 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

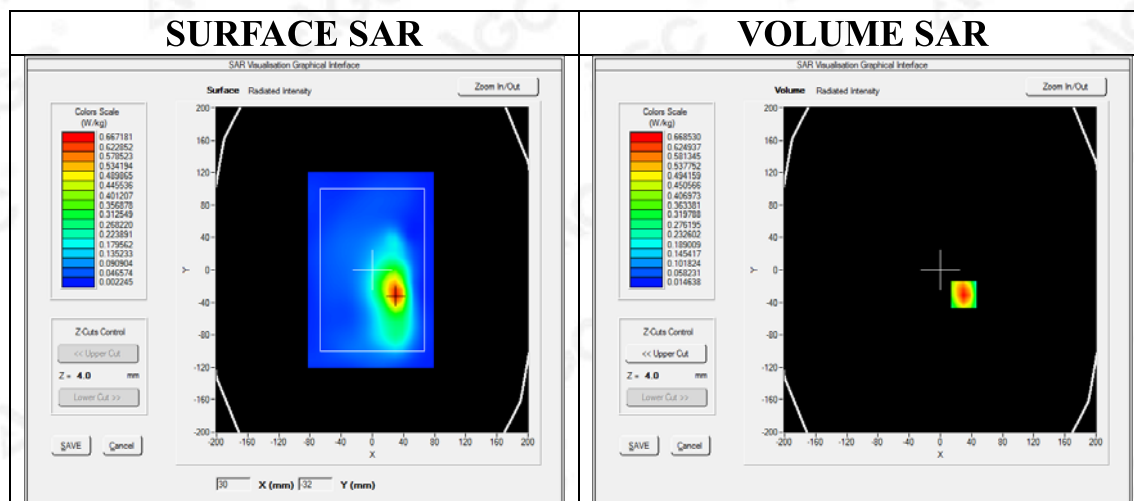

Maximum location: X=30.00, Y=-31.00

SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)	0.358558
SAR 1g (W/Kg)	0.631636

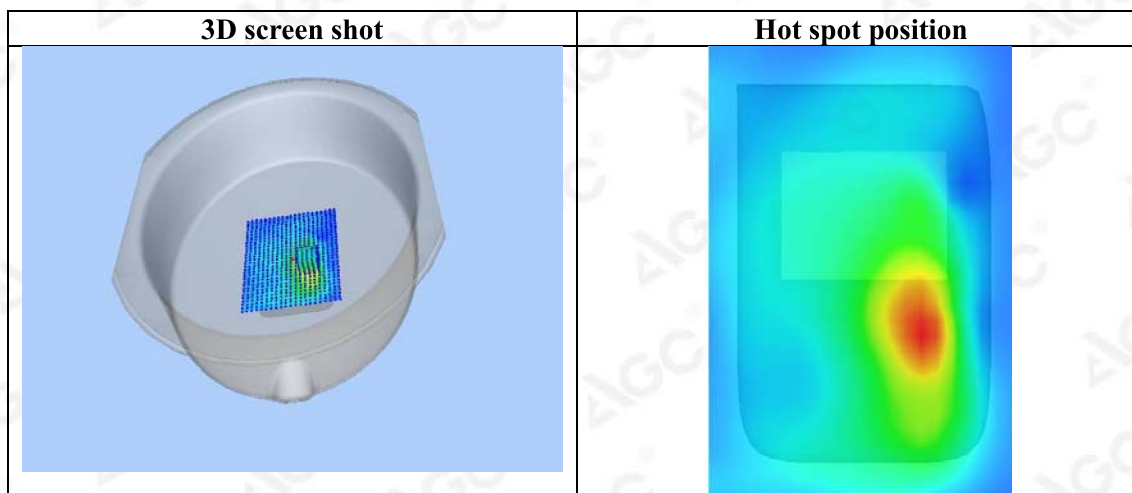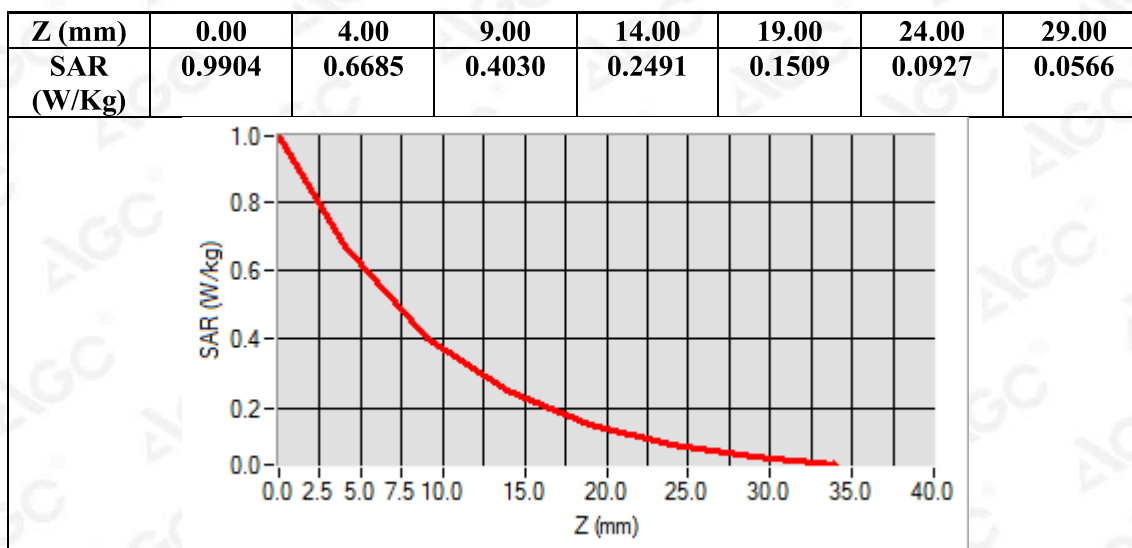

Test Laboratory: AGC Lab
LTE Band 4 Mid-Body-Front (50% RB#0)

Date: Mar. 19,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=4.05;
Frequency:1732.5 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section
Ambient temperature (°C): 21.2, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 4 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 4 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

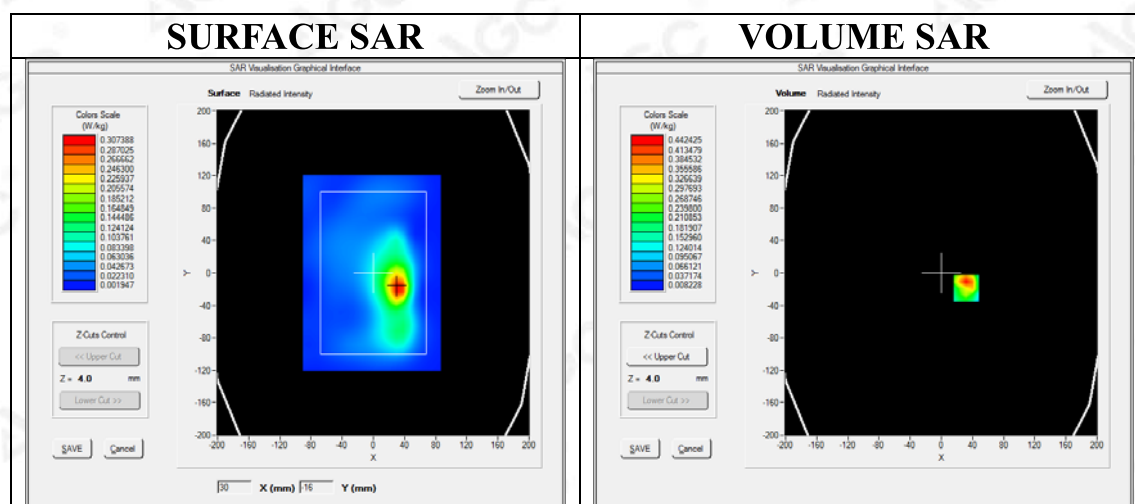

Maximum location: X=32.00, Y=-19.00

SAR Peak: 0.68 W/kg

SAR 10g (W/Kg)	0.228597
SAR 1g (W/Kg)	0.406051

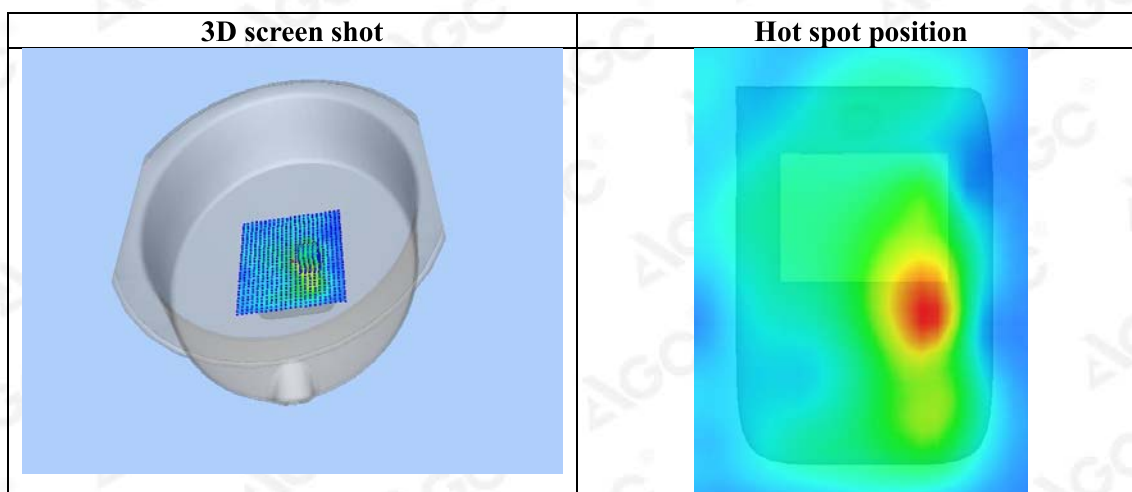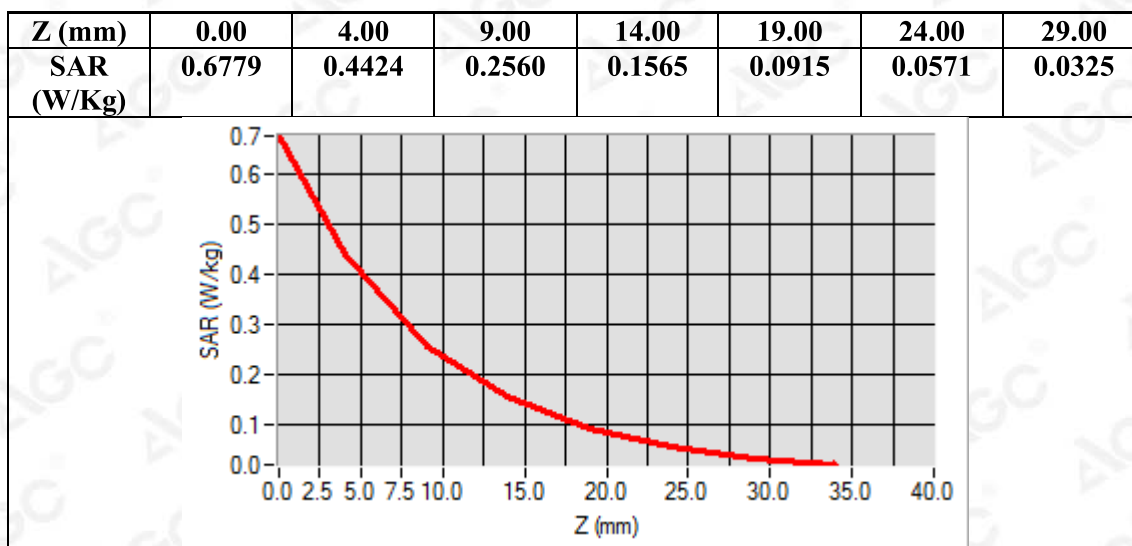

Test Laboratory: AGC Lab
LTE Band 12 Mid-Edge1(1 RB#0)

Date: Mar. 20,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=4.97;
Frequency: 707.5 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 43.68$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Edge1/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 12 Mid- Edge1/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Edge1
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

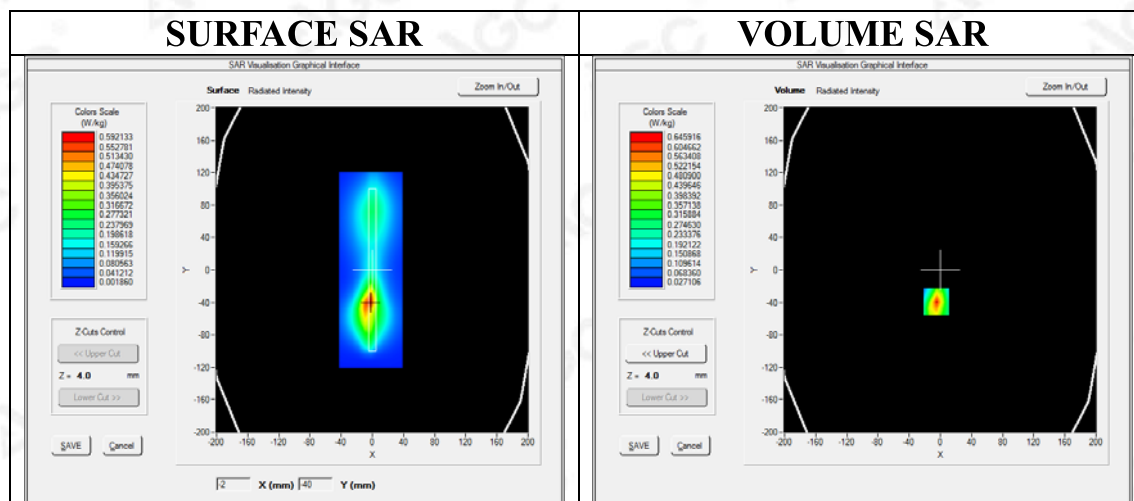




Maximum location: X=-5.00, Y=-39.00

SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)	0.333507
SAR 1g (W/Kg)	0.618054

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.0309	0.6459	0.3633	0.2300	0.1529	0.1058	0.0746

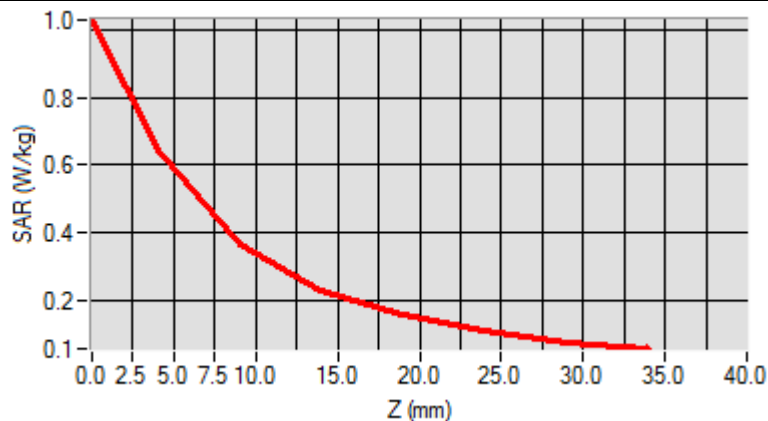

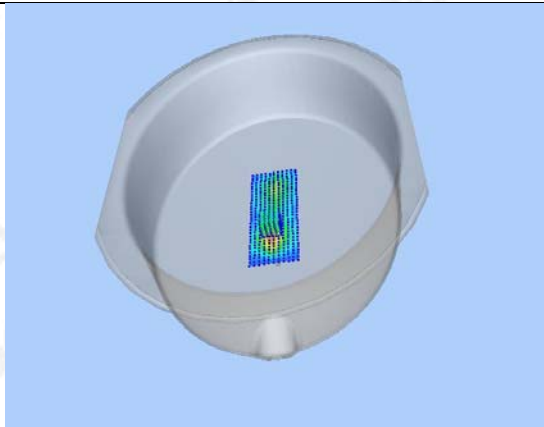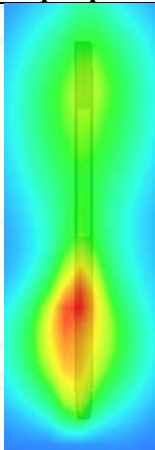3D screen shot	Hot spot position
	

Test Laboratory: AGC Lab
LTE Band 12 Mid-Edge1(50% RB#0)

Date: Mar. 20,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC


Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=4.97;
Frequency: 707.5 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 43.68$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Edge1/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 12 Mid- Edge1/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Edge1
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

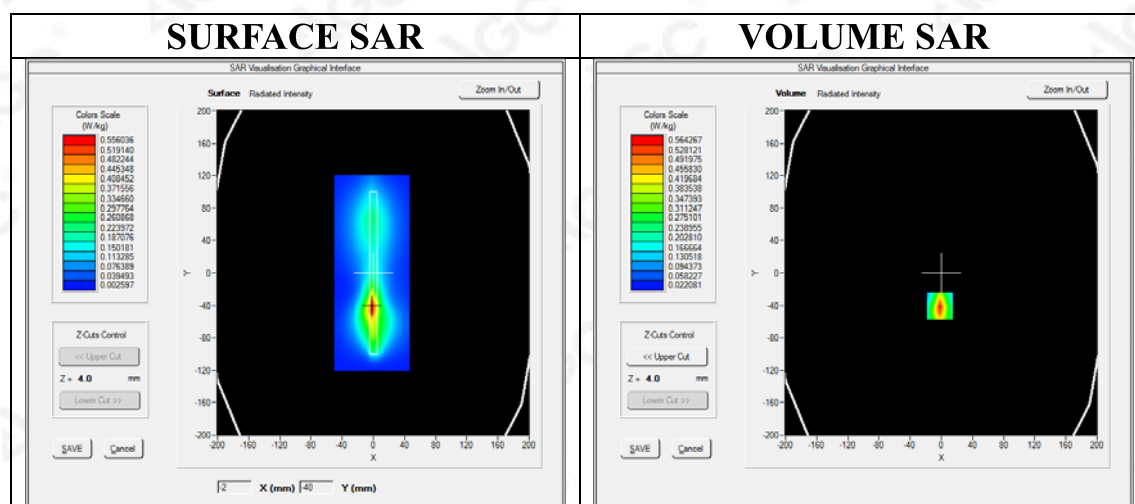

Maximum location: X=-2.00, Y=-41.00

SAR Peak: 0.91 W/kg

SAR 10g (W/Kg)	0.290118
SAR 1g (W/Kg)	0.548854

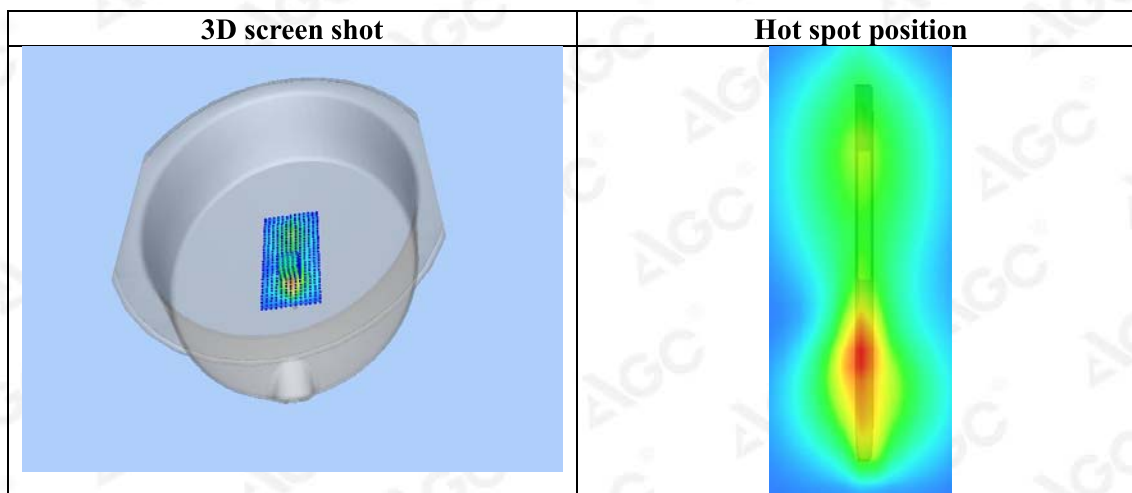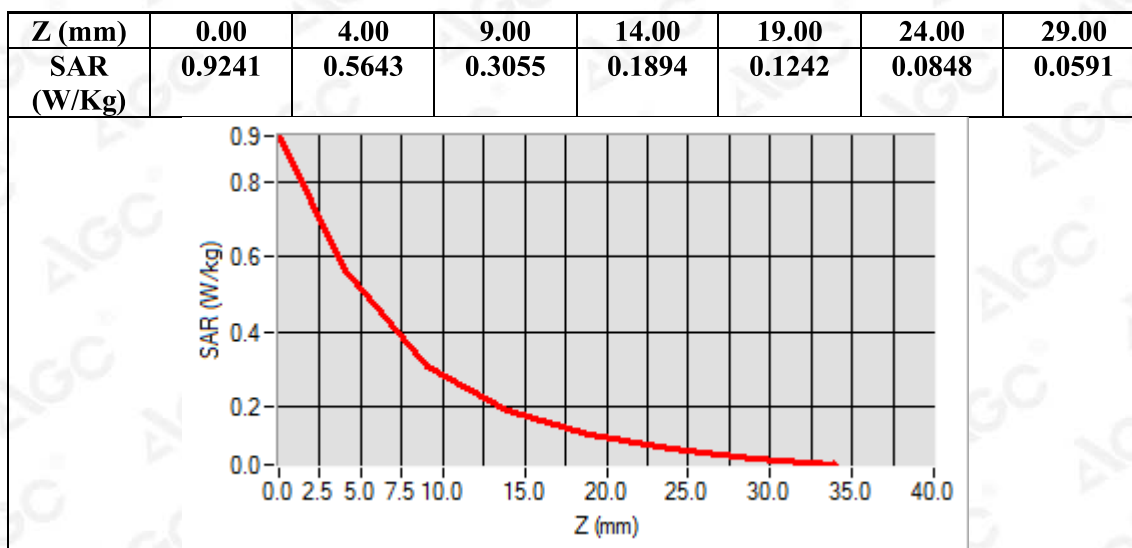

Test Laboratory: AGC Lab
LTE Band 17 Mid-Body-Front (1 RB#0)

Date: Mar. 20,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC


Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=4.97;
Frequency: 710 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 43.10$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 17 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 17 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

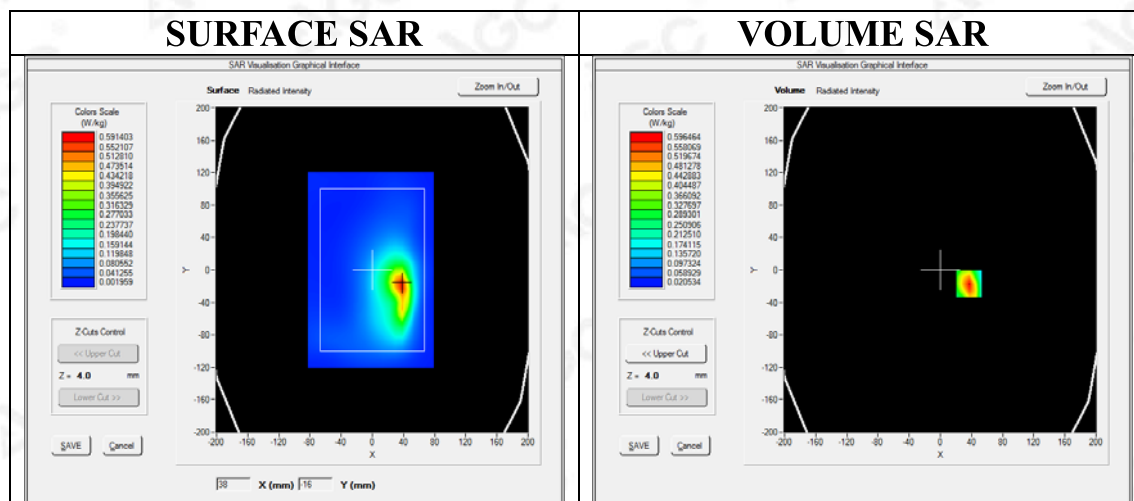

Maximum location: X=37.00, Y=-17.00

SAR Peak: 0.96 W/kg

SAR 10g (W/Kg)	0.328746
SAR 1g (W/Kg)	0.597400

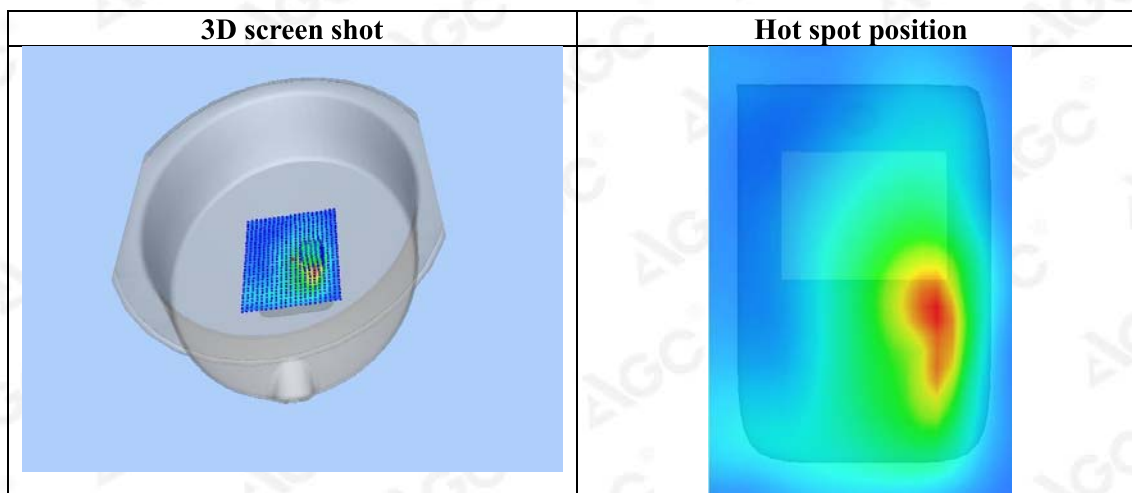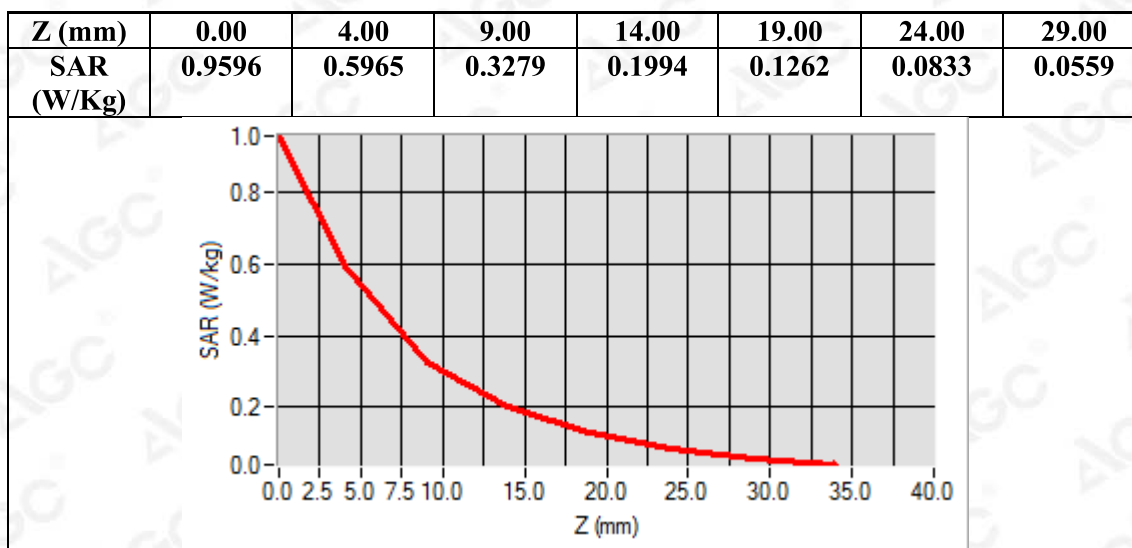

Test Laboratory: AGC Lab
LTE Band 17 Mid-Body-Front (50% RB#0)
DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Date: Mar. 20,2020


Communication System: LTE; Communication System Band: LTE Band 17; Duty Cycle:1:1; Conv.F=4.97;
Frequency: 710 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 43.10$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 17 Mid-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 17 Mid-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 17
Channels	Middle
Signal	OFDM (Crest factor: 1.0)


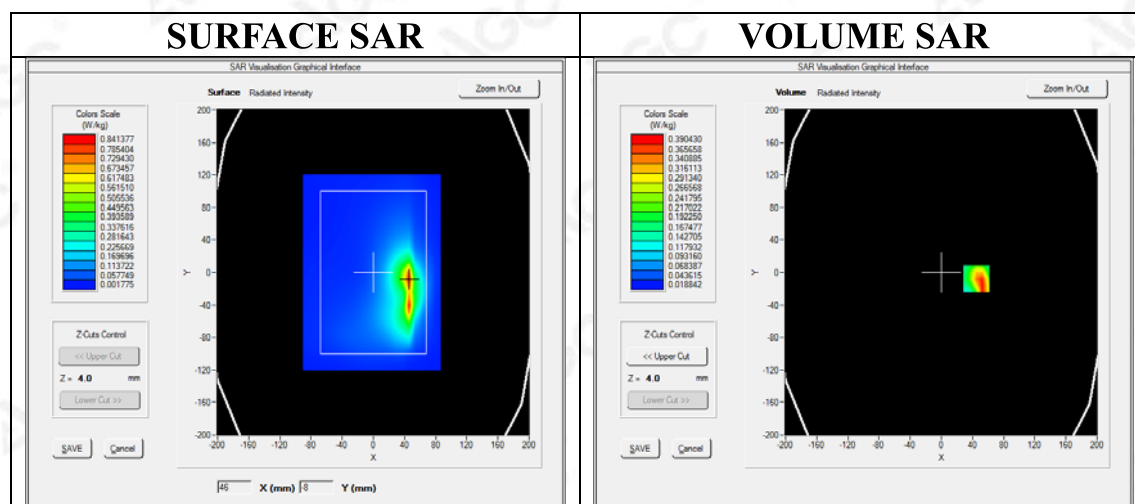


Maximum location: X=45.00, Y=-8.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.258543
SAR 1g (W/Kg)	0.467921

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.7481	0.3904	0.1636	0.1352	0.0824	0.0576	0.0422

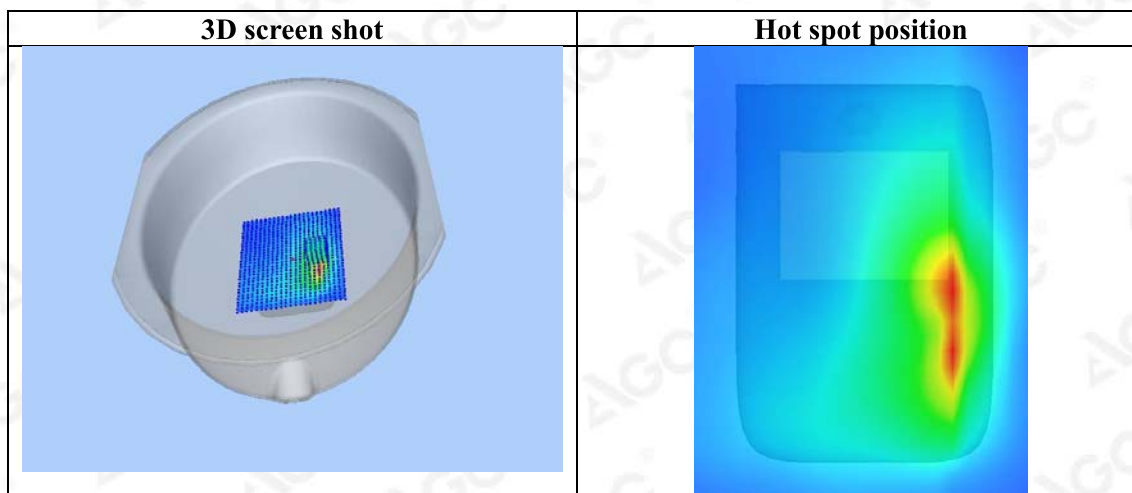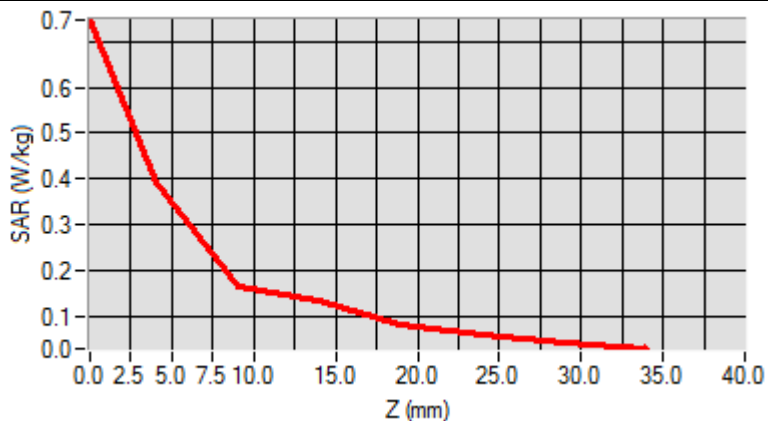

WIFI MODE

Test Laboratory: AGC Lab
802.11b Mid-Body-Worn- Front

Date: Mar. 31,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.12;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.10$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section
Ambient temperature (°C):20.9, Liquid temperature (°C): 20.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Body- Front /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0


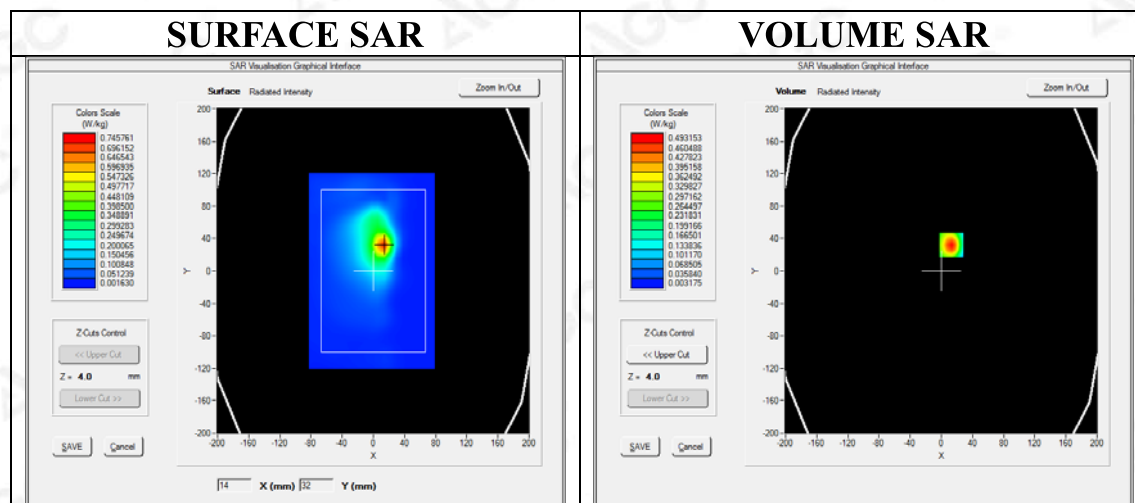


Maximum location: X=13.00, Y=32.00

SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.168788
SAR 1g (W/Kg)	0.287565

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.8493	0.4932	0.2339	0.1137	0.0554	0.0277	0.0143

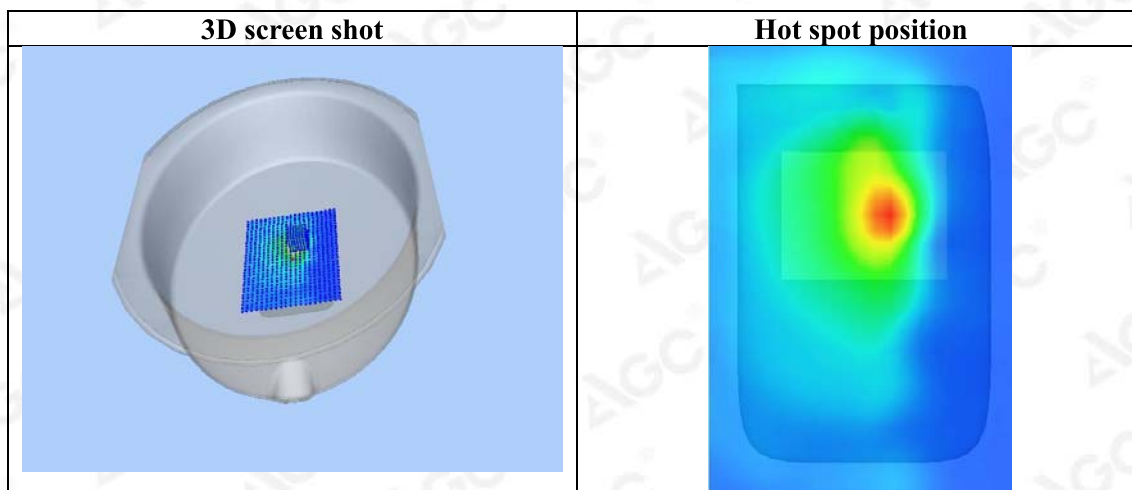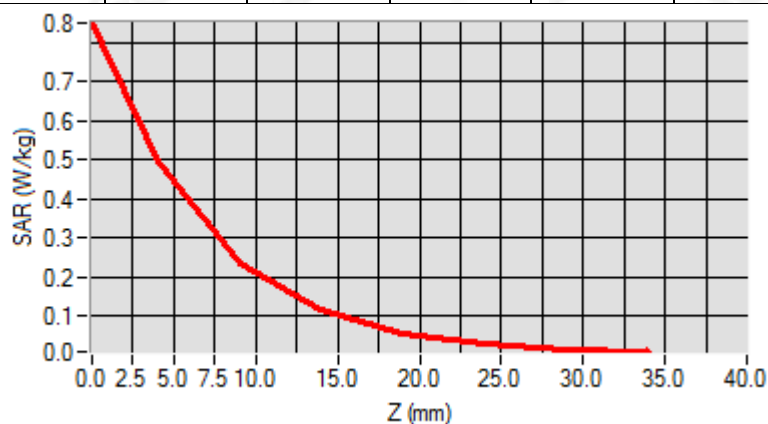

5.2GHz 802.11a20

Test Laboratory: AGC Lab

802.11a20 CH40- Body-Worn- Front

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC

Date: Apr. 18,2020

Communication System: Wi-Fi; Communication System Band: 802.11a20; Duty Cycle: 1:1; Conv.F=1.86;
Frequency: 5200MHz; Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.57 \text{ mho/m}$; $\epsilon_r = 36.84$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.6, Liquid temperature ($^{\circ}\text{C}$): 21.3


SATIMO Configuration:

- Probe: SSE2; Calibrated: Jun. 04,2019; Serial No.: SN 41/18 EPGO334
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11a20 CH40- Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11a20 CH40- Body- Front /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Body Front
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

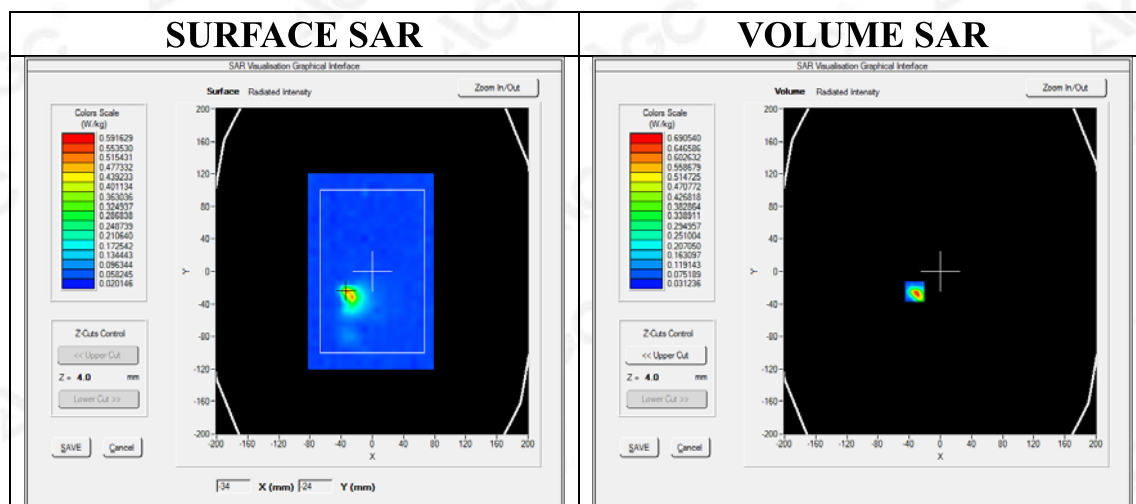

Maximum location: X=-33.00, Y=-25.00

SAR Peak: 1.79 W/kg

SAR 10g (W/Kg)	0.184103
SAR 1g (W/Kg)	0.593801

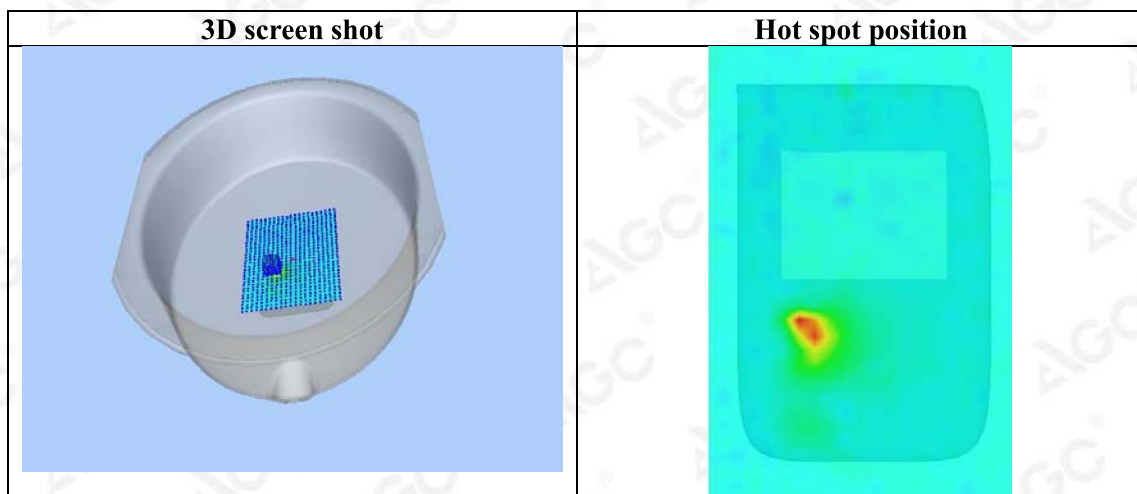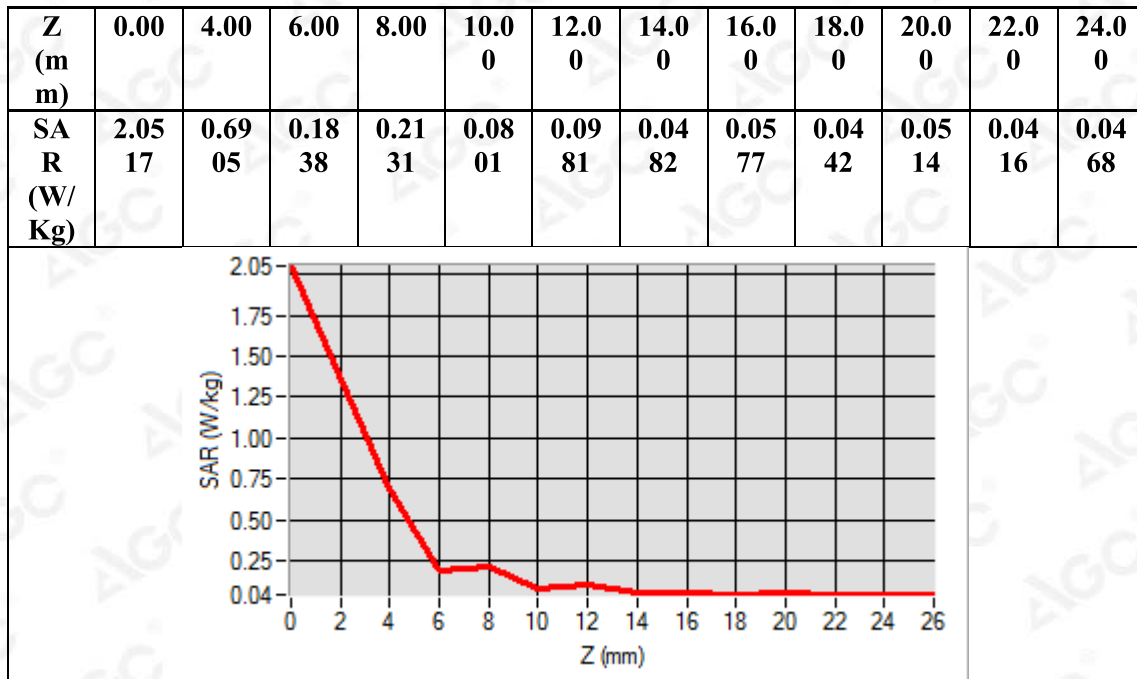

5.8GHz 802.11a20

Test Laboratory: AGC Lab
802.11a20 CH157-Body-Front
DUT: PPNN; Type: MMNN

Date: May 20,2020

Communication System: Wi-Fi; Communication System Band: 802.11a20; Duty Cycle: 1:1; Conv.F=2.09;
Frequency: 5785MHz; Medium parameters used: $f = 5800$ MHz; $\sigma = 5.16$ mho/m; $\epsilon_r = 35.62$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.0, Liquid temperature (°C): 20.7


SATIMO Configuration:

- Probe: SSE2; Calibrated: Jun. 04,2019; Serial No.: SN 41/18 EPGO334
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ 802.11a20 CH157-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ 802.11a20 CH157-Body-Front/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Body Front
Band	5800MHz
Channels	CH157
Signal	Crest factor: 1.0

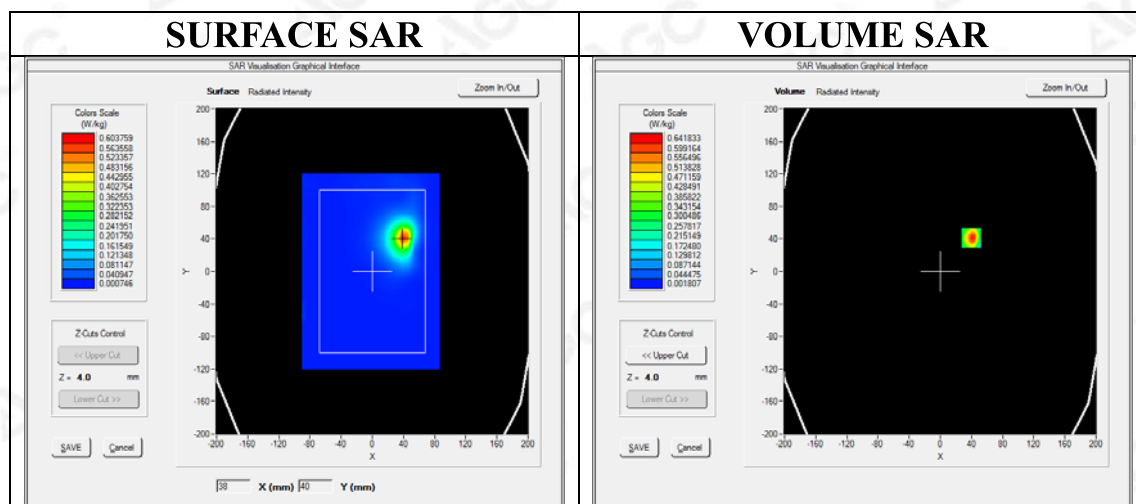

Maximum location: X=40.00, Y=41.00

SAR Peak: 1.48 W/kg

SAR 10g (W/Kg)	0.230122
SAR 1g (W/Kg)	0.607756

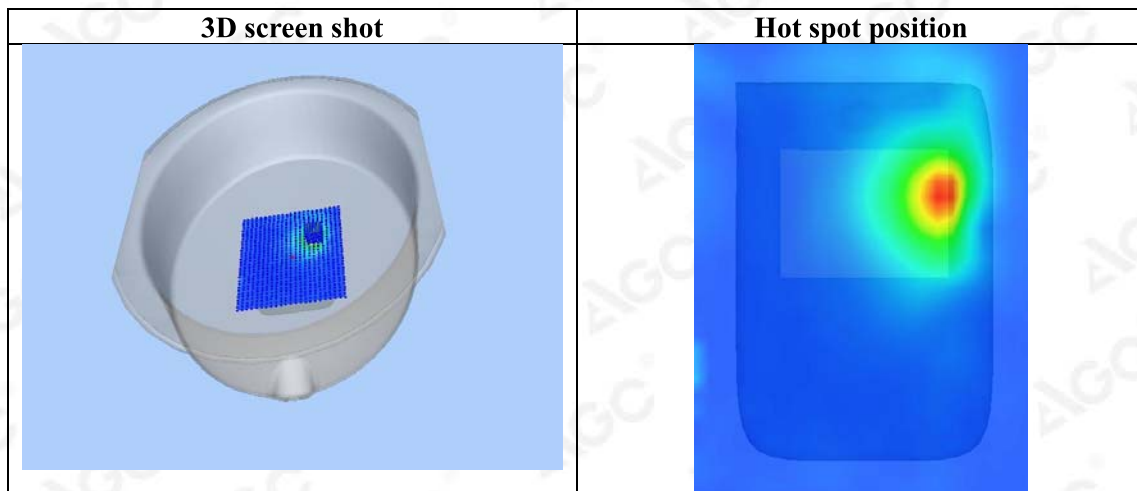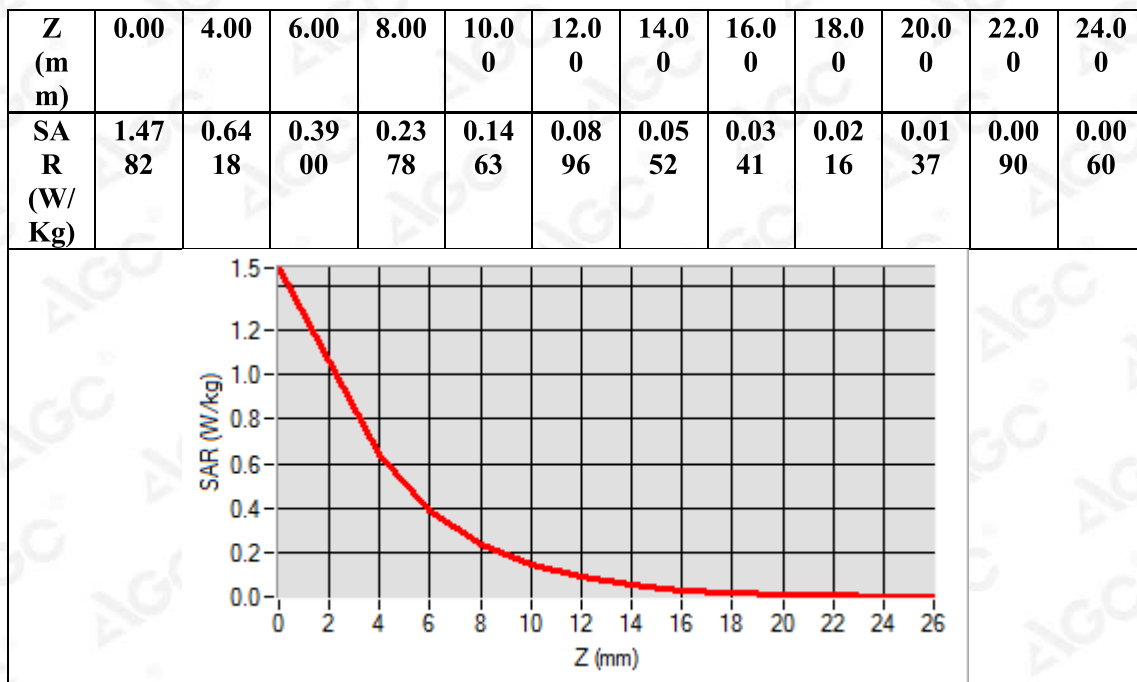

Repeated SAR

Test Laboratory: AGC Lab
GPRS 1900 Low-Body-Back (4up)

Date: Mar. 24,2020

DUT: BOHA!™ tablet; Type: 10 inch Tablet PC


Communication System: GPRS-4Slot; Communication System Band: PCS 1900; Duty Cycle: 1:2.1; Conv.F=4.48;
Frequency: 1850.2 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 41.56$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section
Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS1900 Low -Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS1900 Low -Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	ELLI
Device Position	Body Back
Band	PCS 1900
Channels	Low
Signal	TDMA (Crest factor: 2.0)

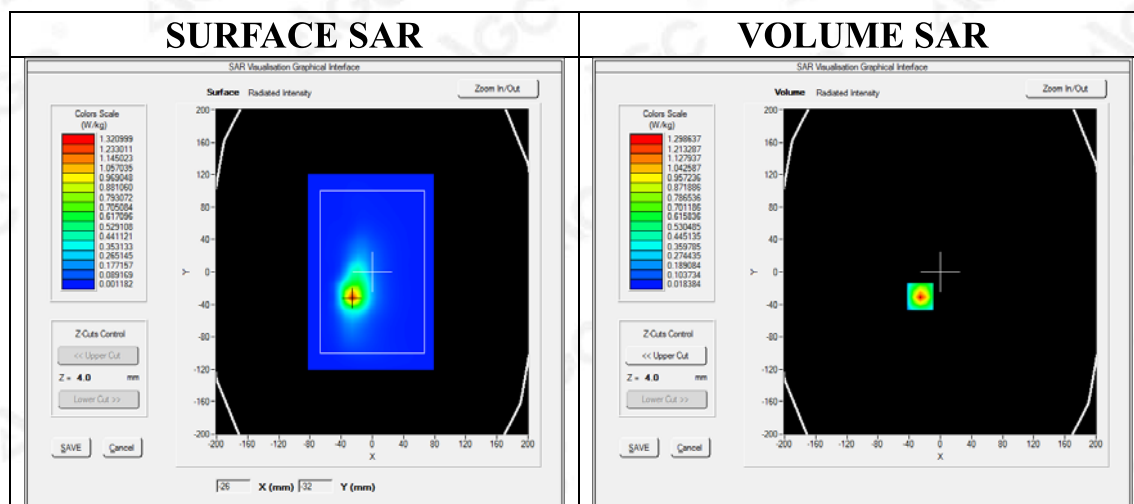

Maximum location: X=-26.00, Y=-31.00


SAR Peak: 2.07 W/kg

SAR 10g (W/Kg)	0.573037
SAR 1g (W/Kg)	1.177154

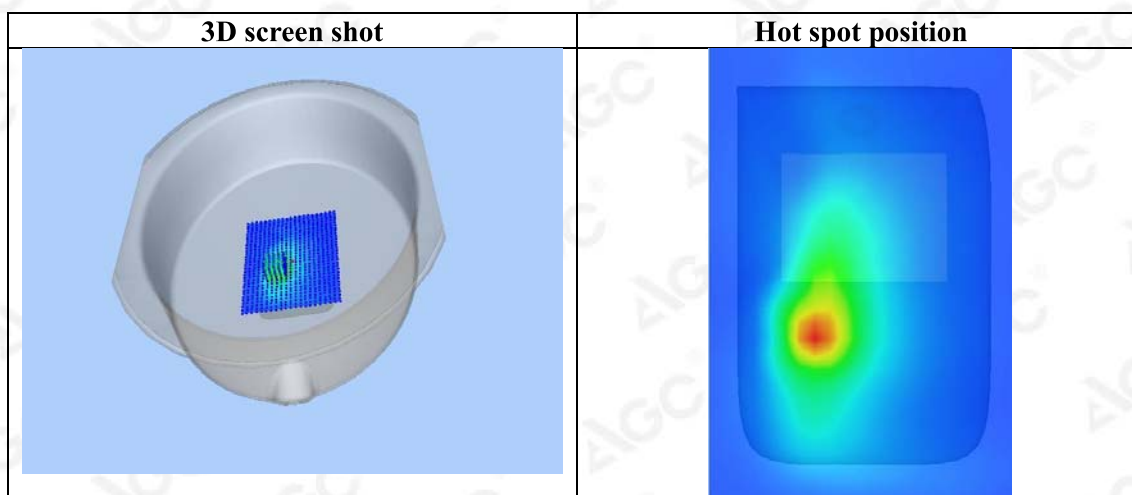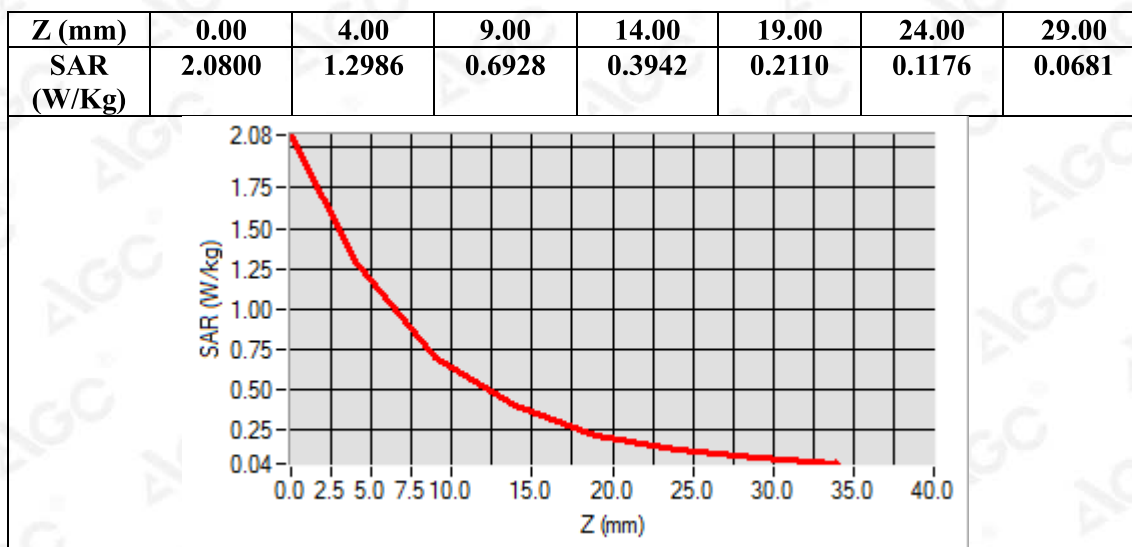


APPENDIX C. TEST SETUP PHOTOGRAPHS

Body Back 0mm

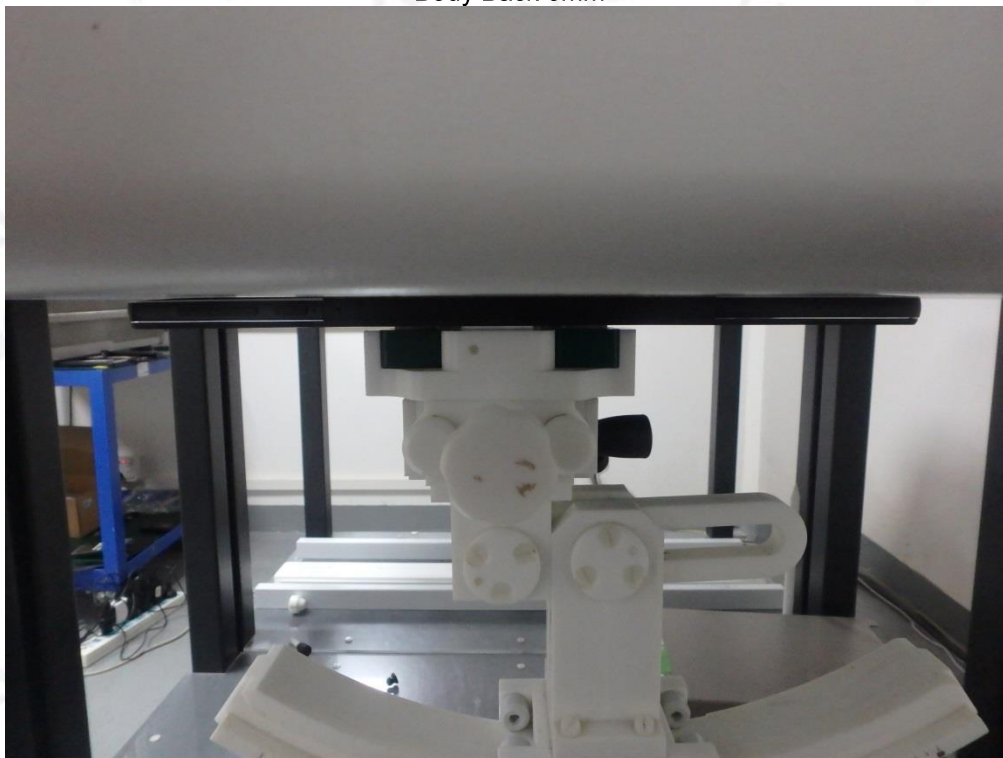


Body Front 0mm

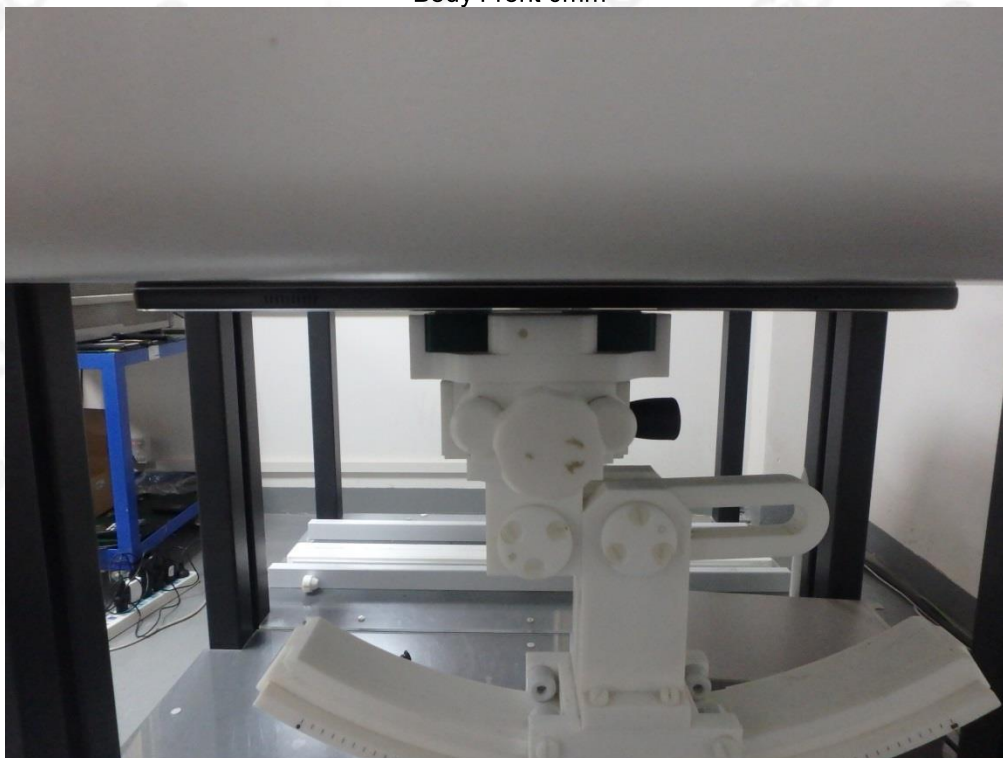

Edge 1(Top) 0mm-Hotspot Mode



Edge 2(Right) 0mm-Hotspot Mode

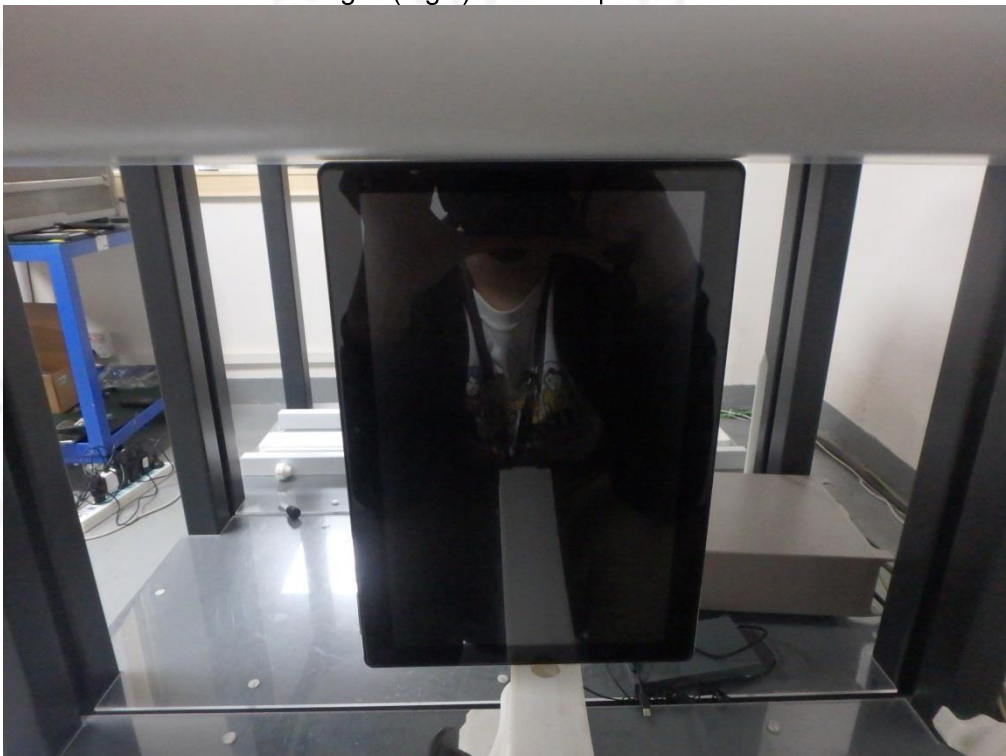

Edge 3(Bottom) 0mm-Hotspot Mode




Edge 4(Left) 0mm-Hotspot Mode



DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note : The position used in the measurement were according to IEEE 1528-2013

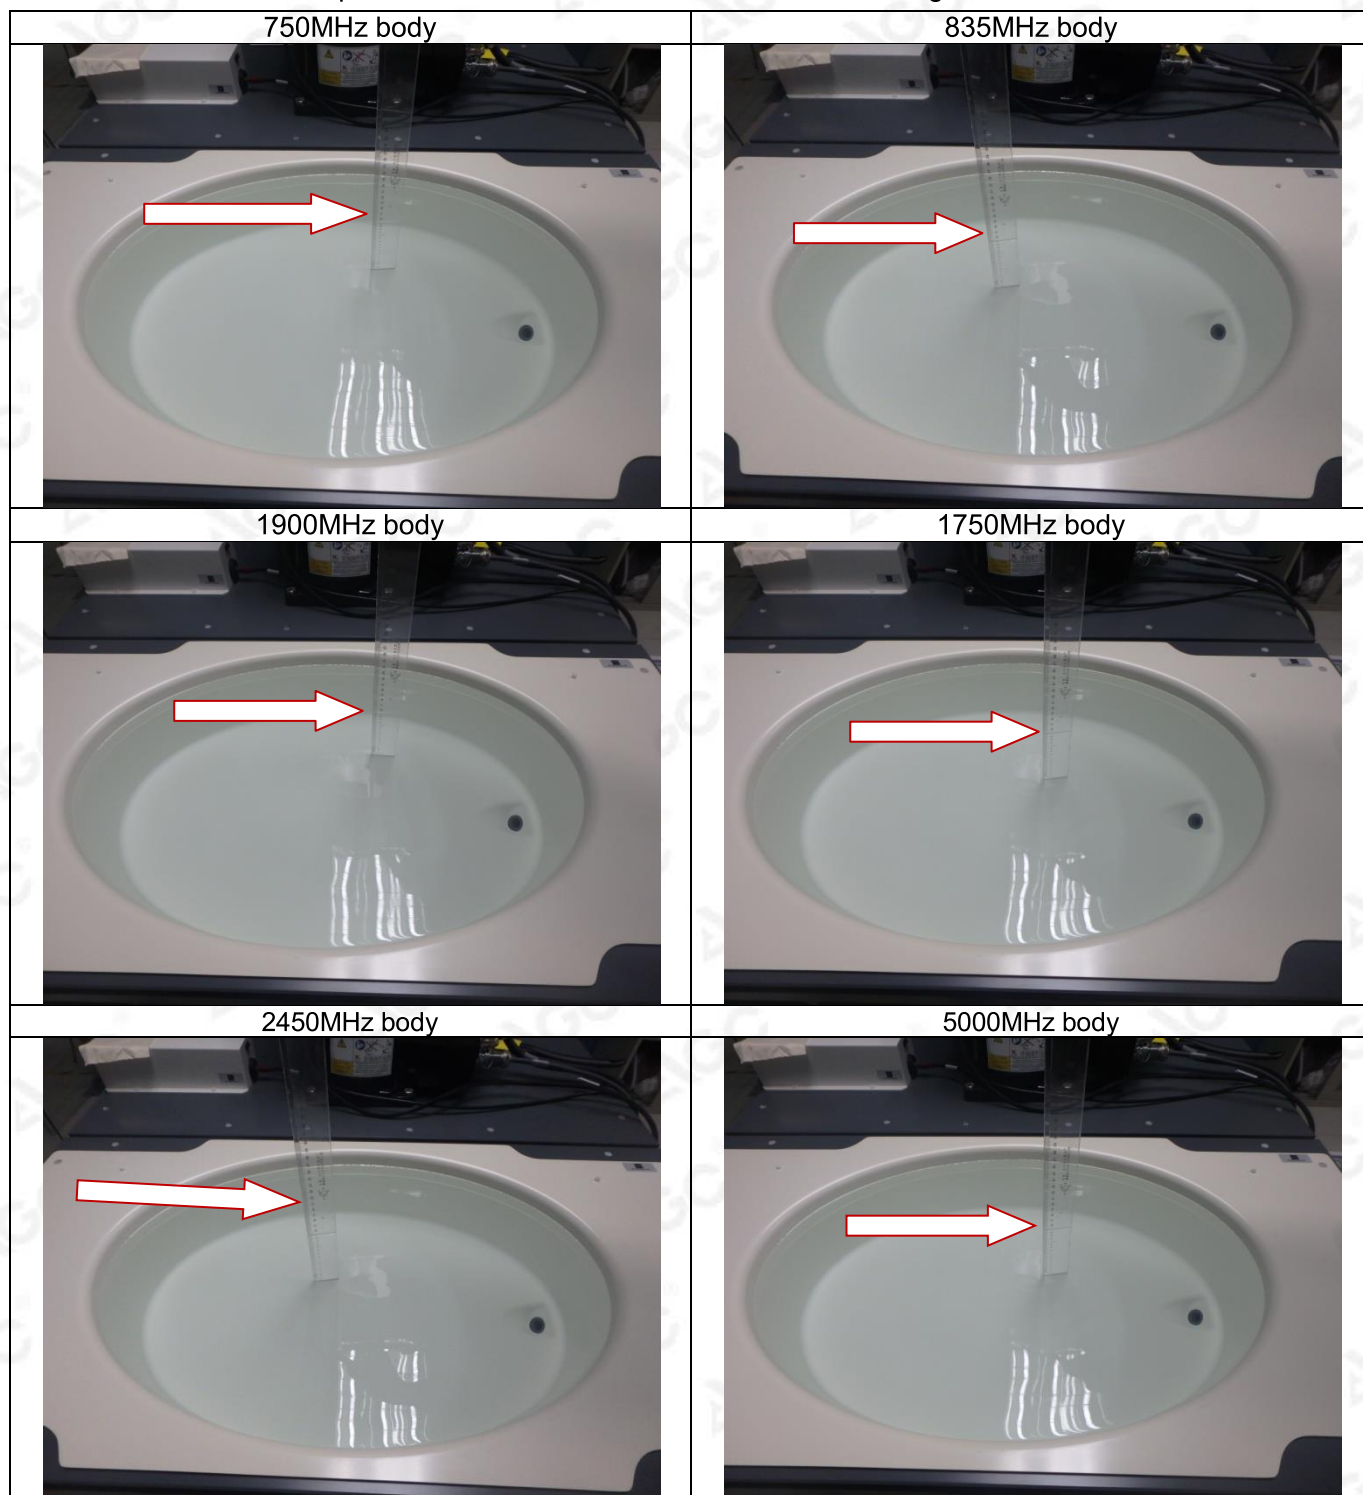

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

