



Appendix Test Data for SRD (Conducted Measurement)

Product Name: Gravastar Mercury Edge PRO Wireless Gaming Headset

Trade Mark: GravaStar

Test Model: GS MH1 PRO

FCC ID: 2ASXF-GS-MH1-PRO

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2402	0.712	2401.640	2402.352	0.5	PASS
SRD	Ant1	2440	0.716	2439.644	2440.360	0.5	PASS
SRD	Ant1	2480	0.672	2479.664	2480.336	0.5	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



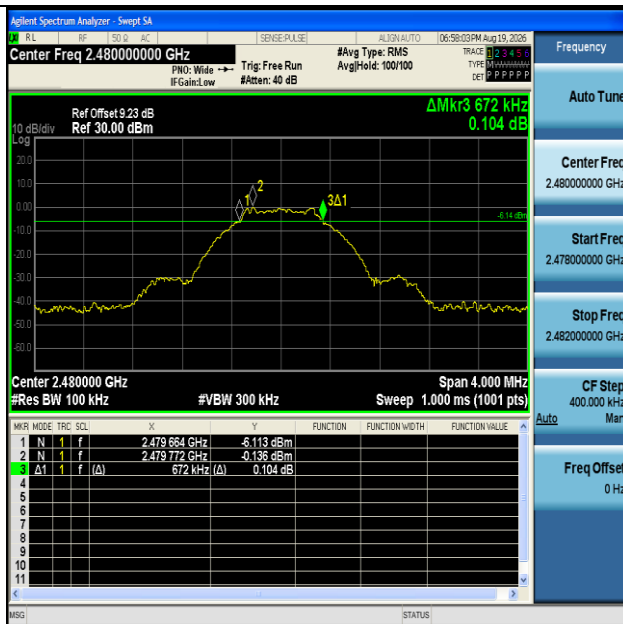

SRD-Ant1-2480-PASS





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
SRD	Ant1	2402	1.0513	2401.4797	2402.5310	---	---
SRD	Ant1	2440	1.0591	2439.4772	2440.5363	---	---
SRD	Ant1	2480	1.0444	2479.4814	2480.5258	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



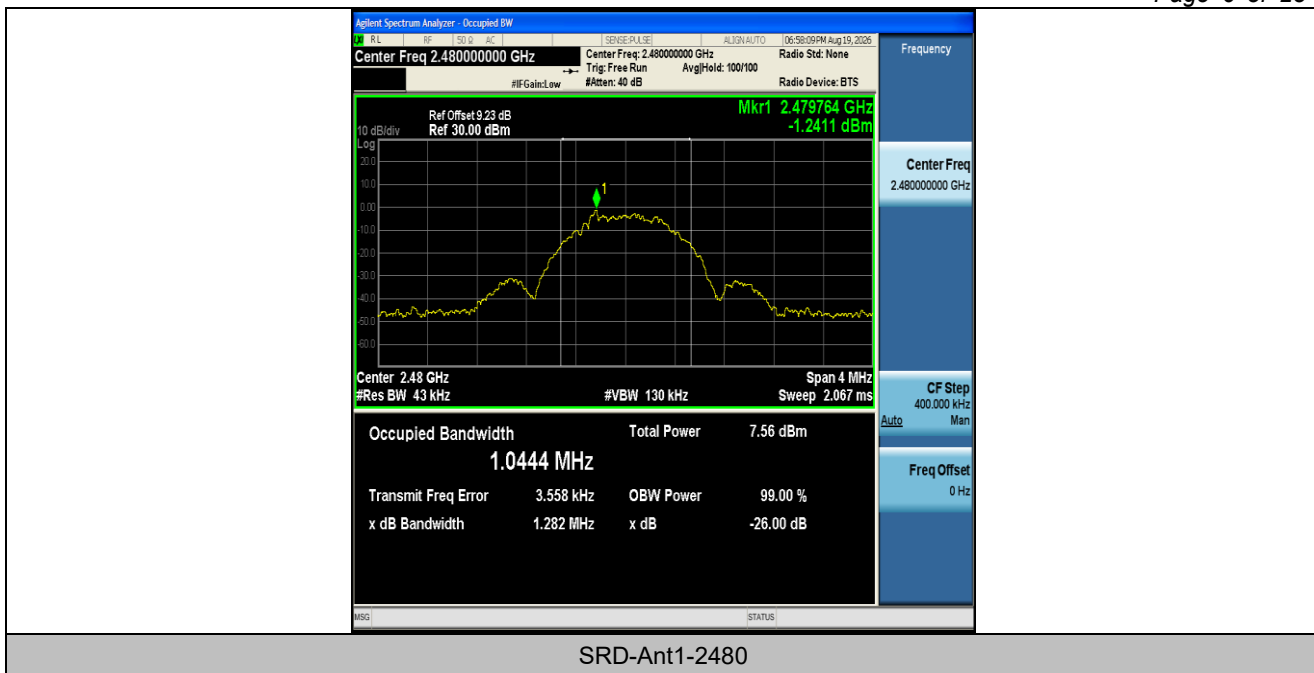



Appendix C: Maximum peak conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
SRD	Ant1	2402	1.88	≤30	PASS
SRD	Ant1	2440	1.20	≤30	PASS
SRD	Ant1	2480	0.96	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs Peak

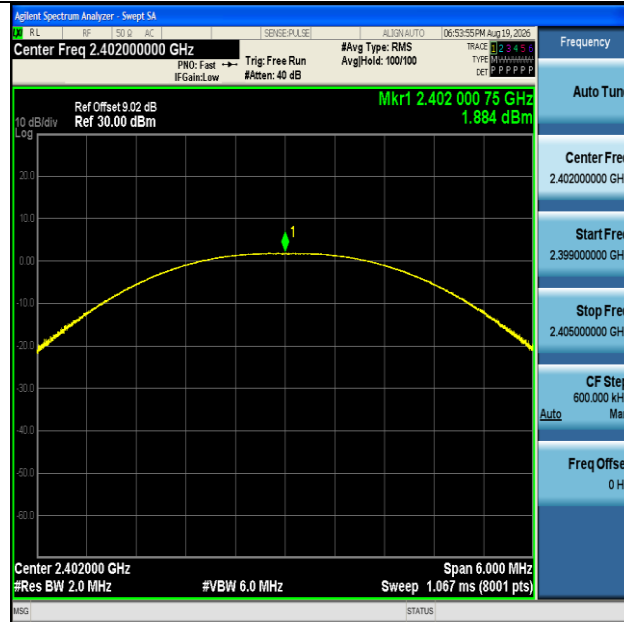


SRD-Ant1-2402-PASS

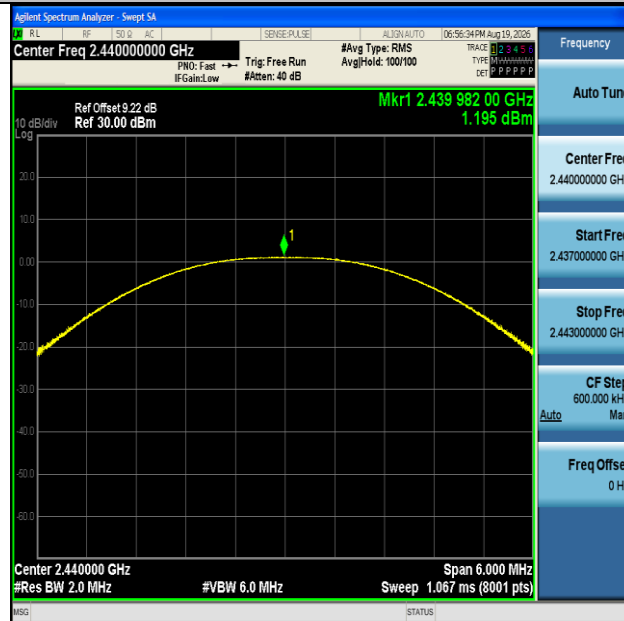

SRD-Ant1-2440-PASS



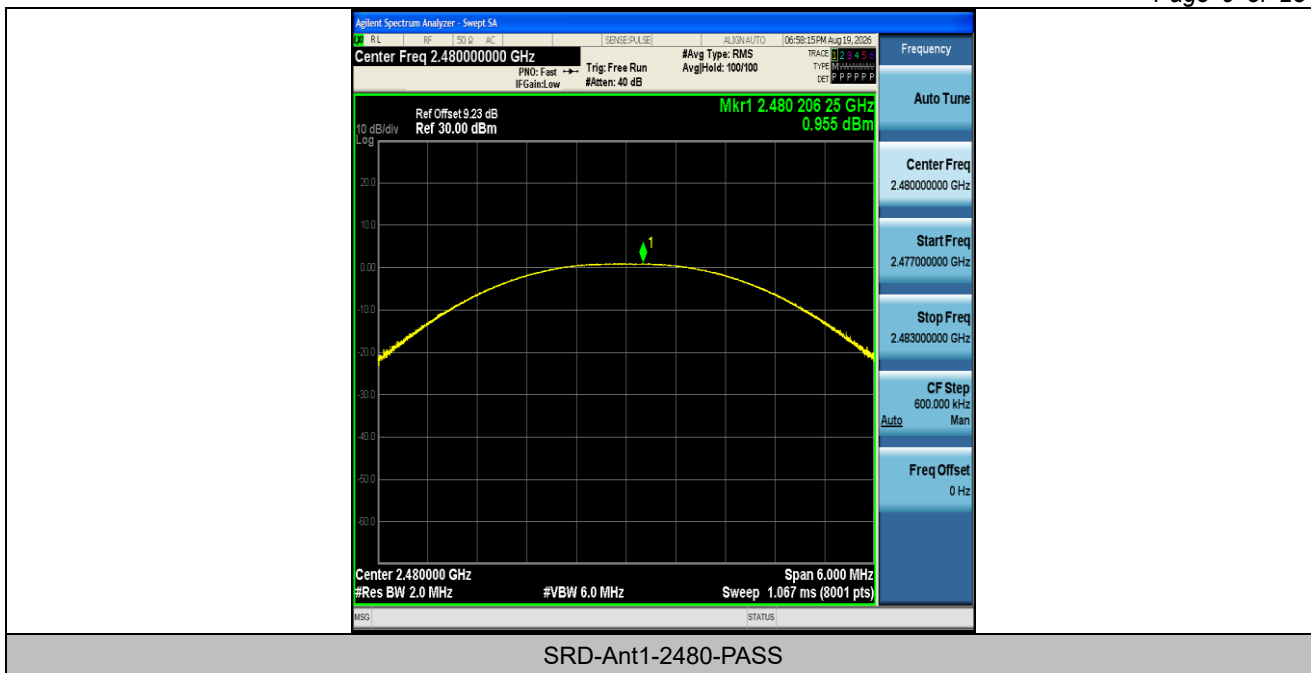



Appendix D: Maximum peak power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
SRD	Ant1	2402	-14.02	≤8.00	PASS
SRD	Ant1	2440	-14.52	≤8.00	PASS
SRD	Ant1	2480	-14.82	≤8.00	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

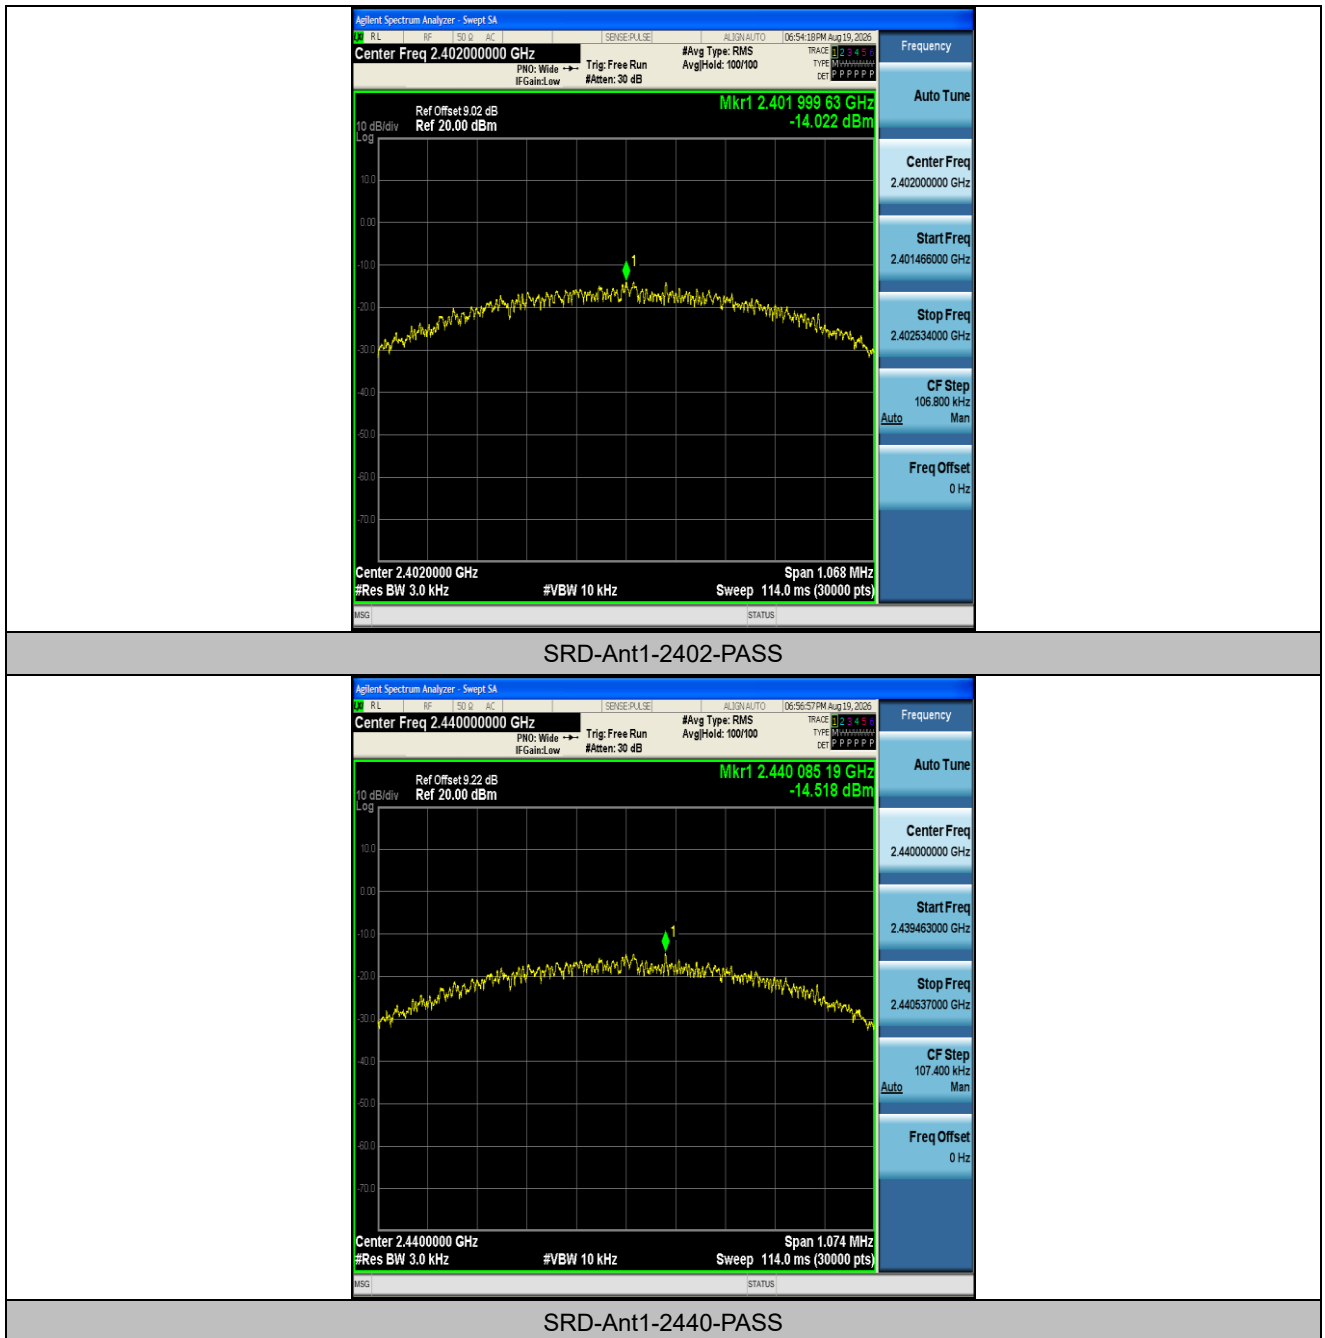

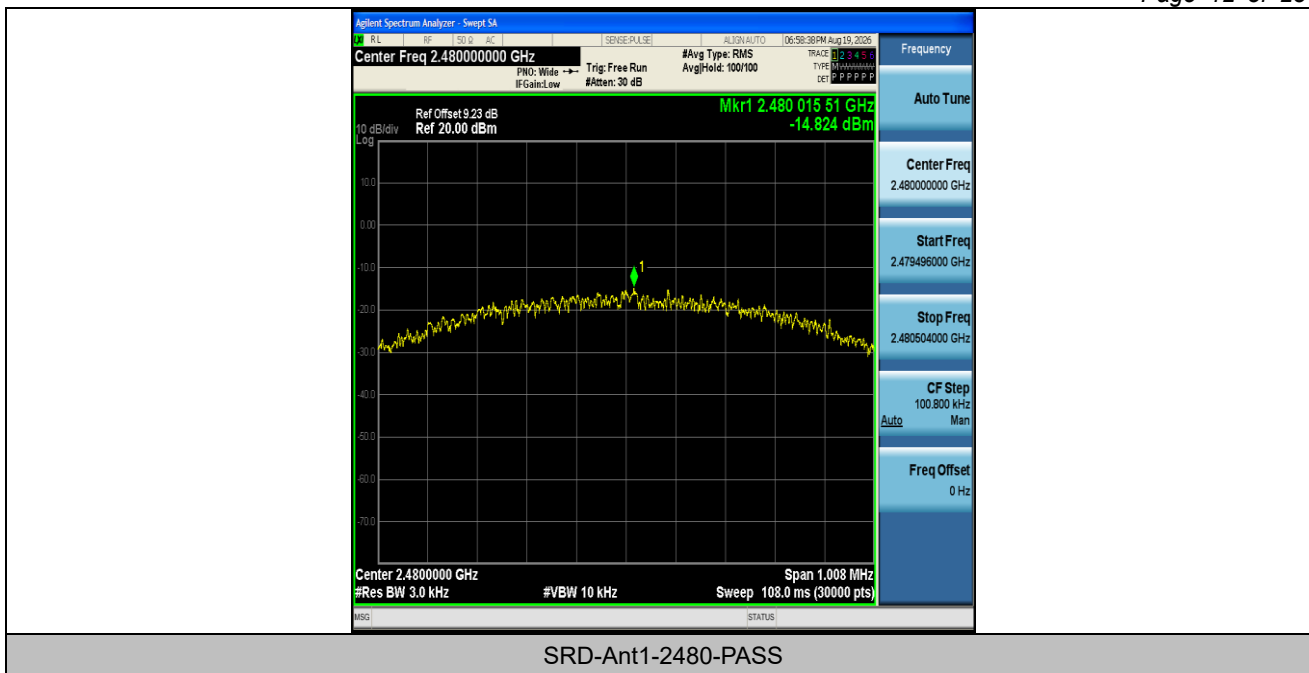



Appendix E: Band edge measurements

Test Result


Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	Low	2402	0.89	-49.52	≤ -19.11	PASS
SRD	Ant1	High	2480	-0.49	-48.38	≤ -20.49	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

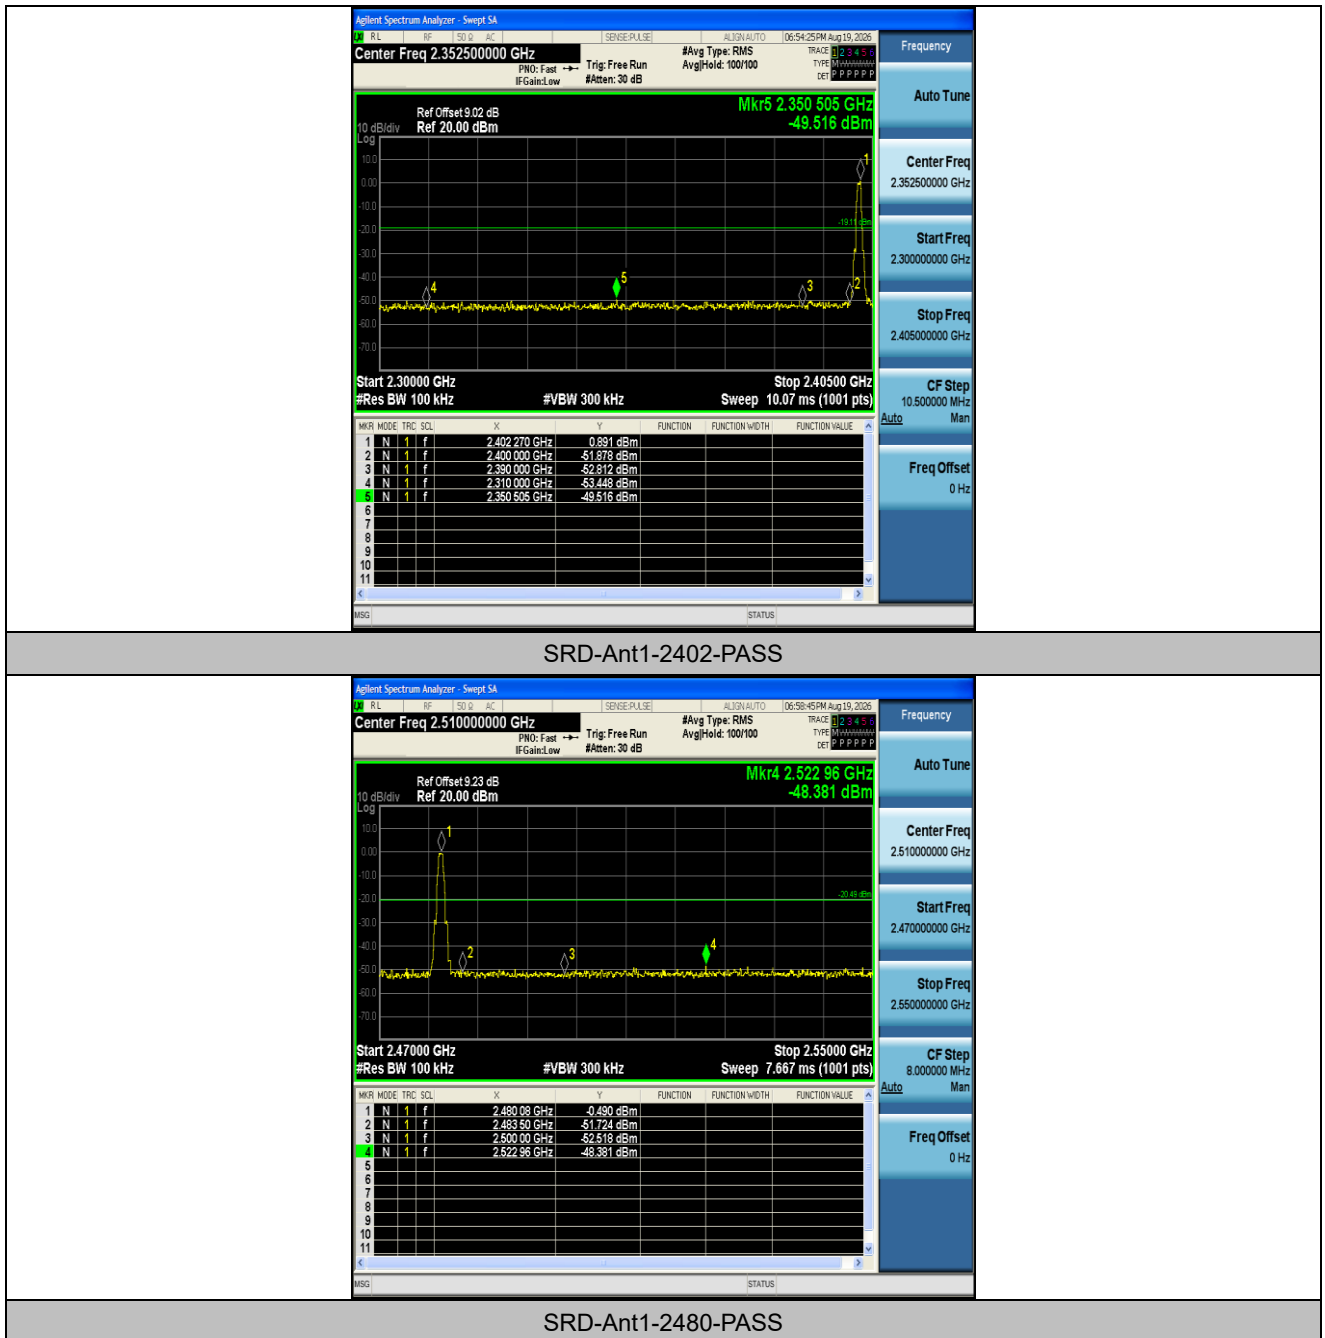



Appendix F: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
SRD	Ant1	2402	0~Reference	0.62	0.62	---	PASS
SRD	Ant1	2402	30~1000	0.62	-62.67	≤-19.38	PASS
SRD	Ant1	2402	1000~26500	0.62	-37.23	≤-19.38	PASS
SRD	Ant1	2440	0~Reference	0.57	0.57	---	PASS
SRD	Ant1	2440	30~1000	0.57	-63.04	≤-19.43	PASS
SRD	Ant1	2440	1000~26500	0.57	-38.01	≤-19.43	PASS
SRD	Ant1	2480	0~Reference	0.34	0.34	---	PASS
SRD	Ant1	2480	30~1000	0.34	-62.71	≤-19.66	PASS
SRD	Ant1	2480	1000~26500	0.34	-37.57	≤-19.66	PASS

Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.






Test Graphs

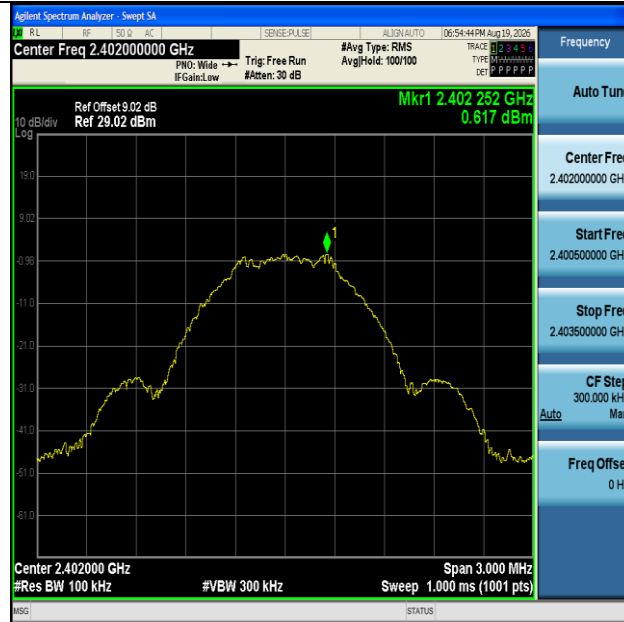


SRD-Ant1-2402-0~Reference-PASS

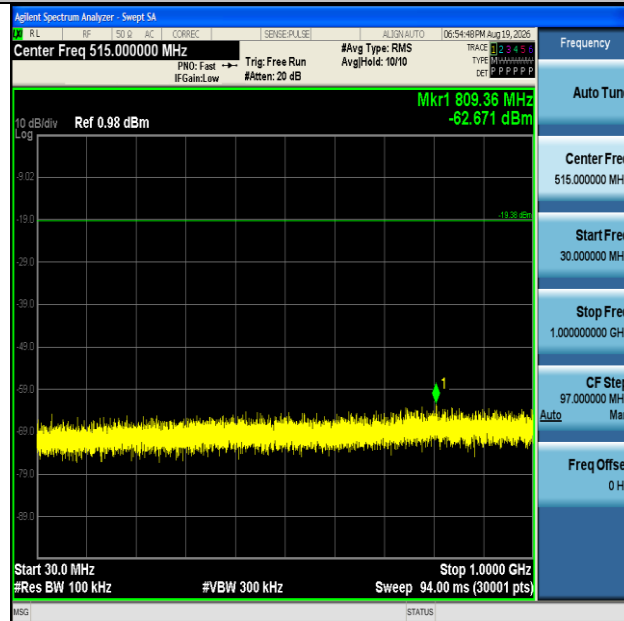

SRD-Ant1-2402-30~1000-PASS



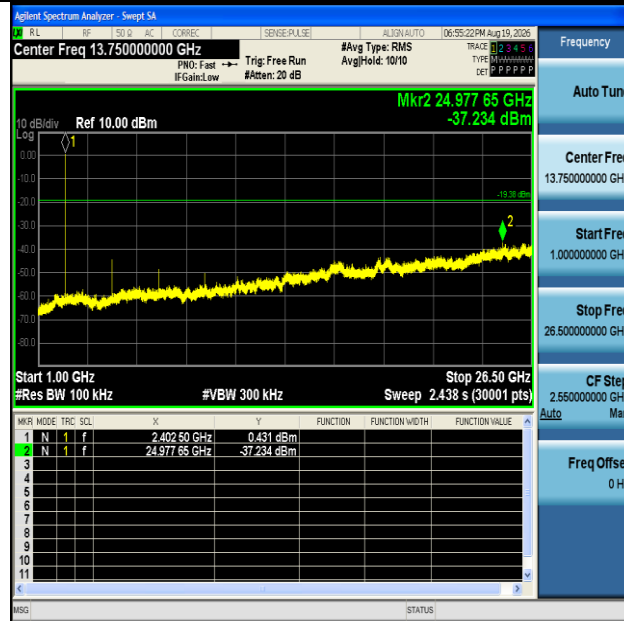


SRD-Ant1-2402-1000~26500-PASS



SRD-Ant1-2440-0~Reference-PASS



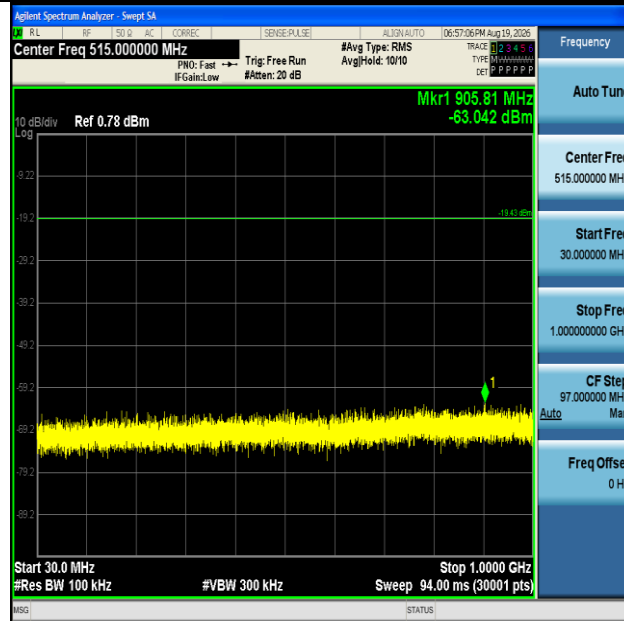

SRD-Ant1-2440-30~1000-PASS




SRD-Ant1-2440-1000~26500-PASS






SRD-Ant1-2480-0~Reference-PASS

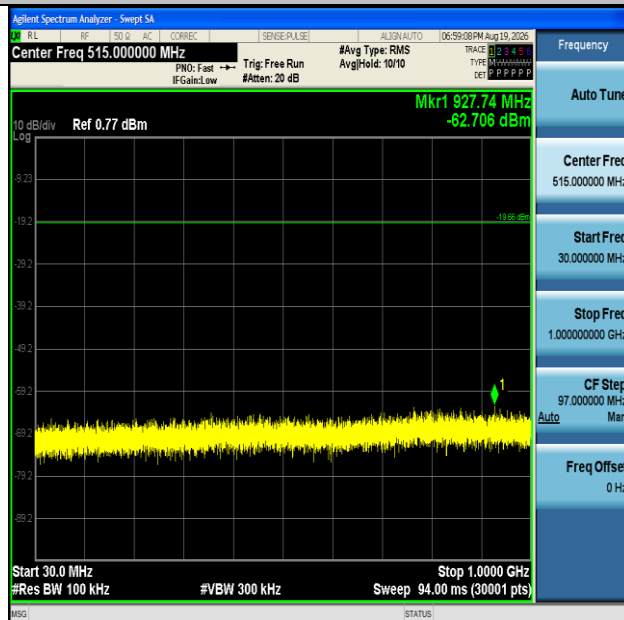

SRD-Ant1-2480-30~1000-PASS



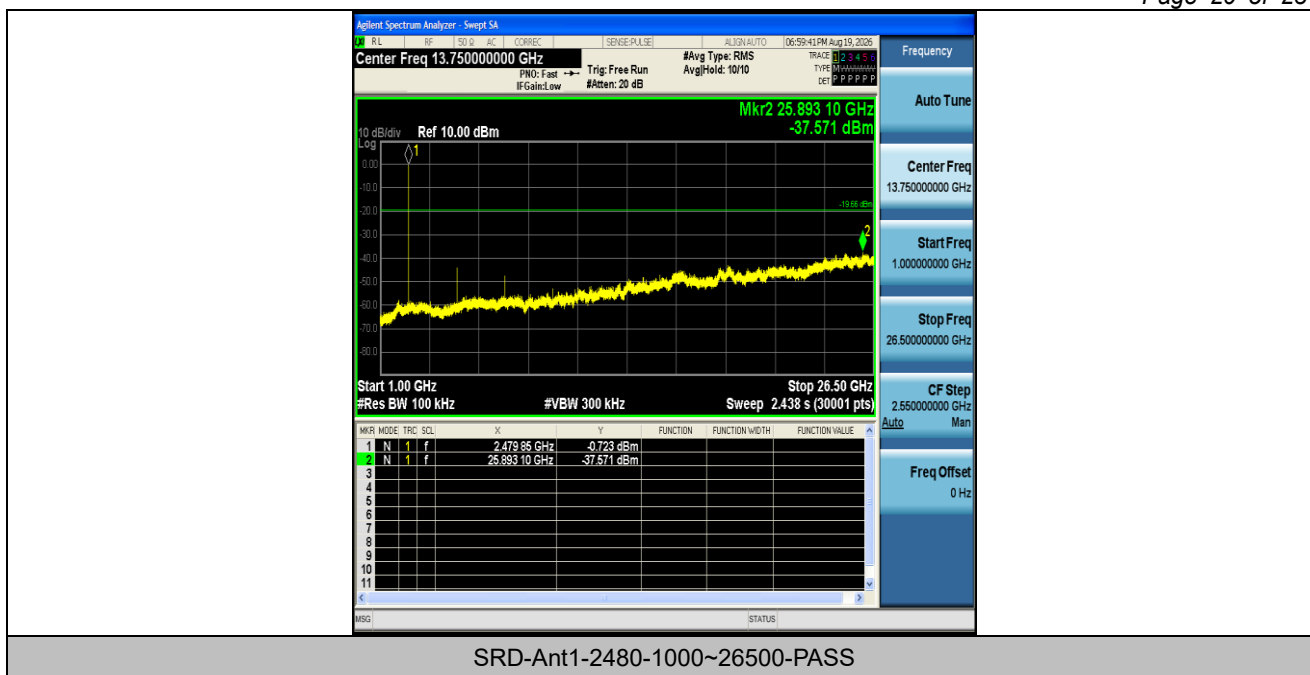



Appendix G: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
SRD	Ant1	2402	2.13	2.50	85.20	0.70
SRD	Ant1	2440	2.14	2.50	85.60	0.68
SRD	Ant1	2480	2.13	2.50	85.20	0.70


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



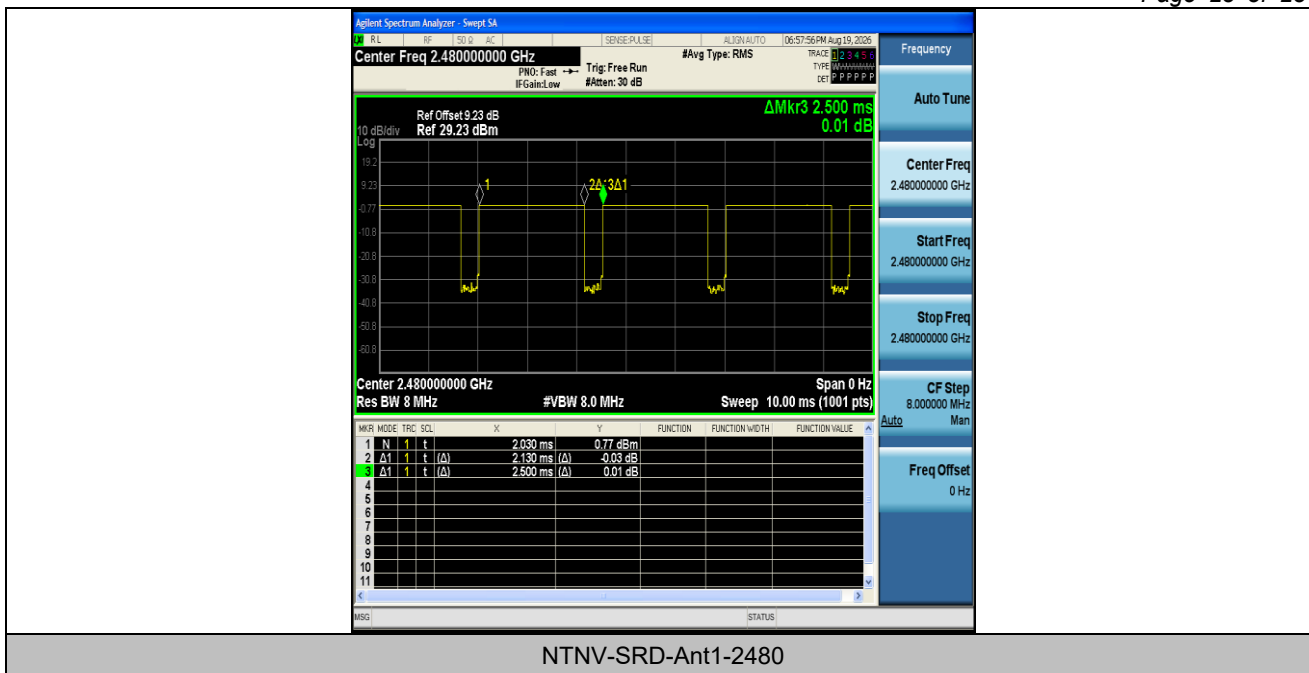

NTNV-SRD-Ant1-2480

