

# RADIO TEST REPORT

Project ID

**PRJ0024813**

Type of assessment:

Report ID

**REP009789**

## Original certification

Type of radio equipment:

**Bluetooth Device**

Equipment class:

**DTS**

Applicant:

**Smartwave Technologies**

Product marketing name (PMN):

**Bell IQ Total Solutions**

Model(s)/HVIN(s):

**Pulse Rat IQ Total**

Model/HVIN variant(s):

**Pulse Mouse IQ Total, 24/7 IQ Total**

FCC identifier:

**FCC ID: 2ASYW-B01004**

ISED certification number:

**IC: 24934-B01004**

Specifications:

- ◆ FCC 47 CFR Part 15 Subpart C, §15.247
- ◆ RSS-247, Issue 2, Feb 2017, Section 5
- ◆ AS/NZS 4268:2017

Date of issue: May 11, 2023

**Ketav Jani, EMC/RF Specialist**

Tested by



Signature

**Tarek Elkholy, EMC/RF Specialist**

Tested by



Signature

**Fahar Abdul Sukkoor, EMC/RF Specialist**

Reviewed by



Signature

Nemko Canada Inc., a testing laboratory, is accredited by ANSI National Accreditation Board (ANAB).

The tests included in this report are within the scope of this accreditation.

The ANAB symbol is an official symbol of the ANSI National Accreditation Board, used under licence

ANAB File Number: AT-3195 (Ottawa/Almonte); AT-3193 (Pointe-Claire); AT-3194 (Cambridge)

FCC 15.247 and RSS-247; Date: March 11, 2023

## Lab locations

|                      |                                                                                                                                   |                                                                                                                                                |                                                                                                                       |                                                                                                                             |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Company name         | Nemko Canada Inc.                                                                                                                 |                                                                                                                                                |                                                                                                                       |                                                                                                                             |
| Facilities           | <i>Ottawa site:</i><br>303 River Road<br>Ottawa, Ontario<br>Canada<br>K1V 1H2<br><br>Tel: +1 613 737 9680<br>Fax: +1 613 737 9691 | <i>Montréal site:</i><br>292 Labrosse Avenue<br>Pointe-Claire, Québec<br>Canada<br>H9R 5L8<br><br>Tel: +1 514 694 2684<br>Fax: +1 514 694 3528 | <i>Cambridge site:</i><br>1-130 Saltsman Drive<br>Cambridge, Ontario<br>Canada<br>N3E 0B2<br><br>Tel: +1 519 650 4811 | <i>Almonte site:</i><br>1500 Peter Robinson Road<br>West Carleton, Ontario<br>Canada<br>K0A 1L0<br><br>Tel: +1 613 256-9117 |
|                      |                                                                                                                                   |                                                                                                                                                |                                                                                                                       |                                                                                                                             |
|                      |                                                                                                                                   |                                                                                                                                                |                                                                                                                       |                                                                                                                             |
| Test site identifier | <b>Organization</b>                                                                                                               | <b>Ottawa/Almonte</b>                                                                                                                          | <b>Montreal</b>                                                                                                       | <b>Cambridge</b>                                                                                                            |
|                      | FCC:                                                                                                                              | CA2040                                                                                                                                         | CA2041                                                                                                                | CA0101                                                                                                                      |
|                      | ISED:                                                                                                                             | 2040A-4                                                                                                                                        | 2040G-5                                                                                                               | 24676                                                                                                                       |
| Website              | <a href="http://www.nemko.com">www.nemko.com</a>                                                                                  |                                                                                                                                                |                                                                                                                       |                                                                                                                             |

## Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

## Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.  
© Nemko Canada Inc.

## Table of Contents

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| <b>Table of Contents .....</b>                                                     | <b>3</b>  |
| <b>Section 1      Report summary .....</b>                                         | <b>4</b>  |
| 1.1    Test specifications .....                                                   | 4         |
| 1.2    Test methods .....                                                          | 4         |
| 1.3    Exclusions .....                                                            | 4         |
| 1.4    Statement of compliance .....                                               | 4         |
| 1.5    Test report revision history .....                                          | 4         |
| <b>Section 2      Engineering considerations .....</b>                             | <b>5</b>  |
| 2.1    Modifications incorporated in the EUT for compliance .....                  | 5         |
| 2.2    Technical judgment .....                                                    | 5         |
| 2.3    Model variant declaration .....                                             | 5         |
| 2.4    Deviations from laboratory tests procedures .....                           | 5         |
| <b>Section 3      Test conditions .....</b>                                        | <b>6</b>  |
| 3.1    Atmospheric conditions .....                                                | 6         |
| 3.2    Power supply range .....                                                    | 6         |
| <b>Section 4      Measurement uncertainty .....</b>                                | <b>7</b>  |
| 4.1    Uncertainty of measurement .....                                            | 7         |
| <b>Section 5      Information provided by the applicant .....</b>                  | <b>8</b>  |
| 5.1    Disclaimer .....                                                            | 8         |
| 5.2    Applicant / Manufacturer .....                                              | 8         |
| 5.3    EUT information .....                                                       | 8         |
| 5.4    Radio technical information .....                                           | 9         |
| 5.5    EUT setup details .....                                                     | 9         |
| <b>Section 6      Summary of test results .....</b>                                | <b>11</b> |
| 6.1    location .....                                                              | 11        |
| 6.2    Testing period .....                                                        | 11        |
| 6.3    Sample information .....                                                    | 11        |
| 6.4    FCC test results .....                                                      | 11        |
| 6.5    ISED test results .....                                                     | 12        |
| 6.6    AS/NZS 4268 Test results .....                                              | 12        |
| <b>Section 7      Test equipment .....</b>                                         | <b>13</b> |
| 7.1    Test equipment list .....                                                   | 13        |
| <b>Section 8      Testing data .....</b>                                           | <b>14</b> |
| 8.1    Variation of power source .....                                             | 14        |
| 8.2    Number of frequencies .....                                                 | 15        |
| 8.3    Antenna requirement .....                                                   | 17        |
| 8.4    Minimum 6 dB bandwidth for DTS systems .....                                | 18        |
| 8.5    Transmitter output power and e.i.r.p. requirements for DTS in 2.4 GHz ..... | 20        |
| 8.6    Spurious (out-of-band) unwanted emissions .....                             | 24        |
| 8.7    Power spectral density for digitally modulated devices .....                | 33        |

## Section 1 Report summary

### 1.1 Test specifications

|                                              |                                                                                                                              |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–585 MHz                                                              |
| RSS-247, Issue 2, Feb 2017, Section 5        | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
| AS/NZS 4268:2017                             | Radio equipment and systems—Short range devices—Limits and methods of measurement                                            |
| GURL SRD Notice 2019                         | Radiocommunications Regulations (General User Radio Licence for Short Range Devices) Notice 2019                             |

### 1.2 Test methods

|                                                        |                                                                                                                                                                                           |
|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 558074 D01 15.247 Meas Guidance v05r02 (April 2, 2019) | Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules. |
| RSS-Gen, Issue 5, April 2018                           | General Requirements for Compliance of Radio Apparatus                                                                                                                                    |
| ANSI C63.10 v2013                                      | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                                            |
| RSS-102, Issue 5, March 19, 2015                       | Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)                                                                                            |

### 1.3 Exclusions

None

### 1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.3 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

Determining compliance is based on the results of the compliance measurement, not taking into account measurement uncertainty, in accordance with section 1.3 of ANSI C63.10 v2013.

See “Summary of test results” for full details.

### 1.5 Test report revision history

**Table 1.5-1:** Test report revision history

| Revision # | Date of issue | Details of changes made to test report |
|------------|---------------|----------------------------------------|
| REP009789  | May 11, 2023  | Original report issued                 |

## Section 2 Engineering considerations

---

### 2.1 Modifications incorporated in the EUT for compliance

---

There were no modifications performed to the EUT during this assessment.

### 2.2 Technical judgment

---

None

### 2.3 Model variant declaration

---

As declared by the applicant, the EUT model Pulse Rat IQ Total has been chosen to be representative for all other models in the model family. The model family, and the description of the variations, are as follows: All models use the same PCBA (B01-004-01). The model variants are due to different plastic enclosure the PCBA is housed in. Pulse Mouse IQ Total and Pulse Rat IQ Total are essentially the same except Pulse Rat is a larger version of Pulse Mouse. Both the Pulse Mouse and the Pulse Rat can be installed as bait and/or snap trap. The 24/7 enclosure is a different type of bait station which contains the same B01-004-01 PCBA but the enclosure is constructed in a way that uses bait to attract rodents but once the rodent enters the trap they can not leave.

### 2.4 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 3 Test conditions

---

### 3.1 Atmospheric conditions

---

|                   |                                         |
|-------------------|-----------------------------------------|
| Temperature       | 15 °C – 35 °C                           |
| Relative humidity | 20 % – 75 %                             |
| Air pressure      | 86 kPa (860 mbar) – 106 kPa (1060 mbar) |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 3.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 4 Measurement uncertainty

---

### 4.1 Uncertainty of measurement

---

UKAS Lab 34, TIA-603 and ETSI TR 100 028-1/2 have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

**Table 4.1-1: Measurement uncertainty calculations**

| Measurement                                         | Measurement uncertainty, $\pm$ dB |
|-----------------------------------------------------|-----------------------------------|
| Radiated spurious emissions (30 MHz to 1 GHz)       | 5.7                               |
| Radiated spurious emissions (1 GHz to 6 GHz)        | 4.7                               |
| Radiated spurious emissions (6 GHz to 18 GHz)       | 5.0                               |
| Radiated spurious emissions (18 GHz to 26 GHz)      | 5.0                               |
| RF Output power measurement using Spectrum Analyzer | 0.85                              |
| RF Output power measurement using Power Meter       | 0.73                              |
| Conducted spurious emissions                        | 1.13                              |
| Other antenna port measurements                     | 0.94                              |

## Section 5 Information provided by the applicant

---

### 5.1 Disclaimer

---

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

### 5.2 Applicant / Manufacturer

---

|                      |                                              |
|----------------------|----------------------------------------------|
| Applicant name       | Smartwave Technologies                       |
| Applicant address    | 1 Marmac Drive, Toronto, ON, M9W 1E7, Canada |
| Manufacturer name    | Same as applicant                            |
| Manufacturer address | Same as applicant                            |

### 5.3 EUT information

---

|                                             |                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product description                         | Bell IQ Total Solutions                                                                                                                                                                                                                                                                            |
| Model / HVIN                                | Pulse Rat IQ Total                                                                                                                                                                                                                                                                                 |
| Model variant(s)                            | Pulse Mouse IQ Total, 24/7 IQ Total                                                                                                                                                                                                                                                                |
| Serial number                               | Prototype                                                                                                                                                                                                                                                                                          |
| Power supply requirements                   | Battery: 3.6 V(DC)                                                                                                                                                                                                                                                                                 |
| Product description and theory of operation | Product can be installed as bait and/or snap trap. The unit is powered on continuously and run production firmware. After manufacturing and final assembly, the unit enters a deep sleep state until installation. After installation the unit will continuously advertise trap activity over BLE. |
| Software Details                            | Firmware Version: 154.8                                                                                                                                                                                                                                                                            |
| Hardware Version                            | B01-004-01                                                                                                                                                                                                                                                                                         |

## 5.4 Radio technical information


|                                                  |                                                                                                                                                                                                 |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category of Wideband Data Transmission equipment | <input type="checkbox"/> Frequency Hopping Spread Spectrum (FHSS) equipment<br><input checked="" type="checkbox"/> Other types of Wideband Data Transmission equipment (e.g. DSSS, OFDM, etc.). |
| Frequency band                                   | 2400–2483.5 MHz                                                                                                                                                                                 |
| Frequency Min                                    | 2402 MHz (1 MHz bandwidth)                                                                                                                                                                      |
| Frequency Max                                    | 2480 MHz (1 MHz bandwidth)                                                                                                                                                                      |
| RF power Max (W), Conducted                      | 0.00047 W (-3.3 dBm)                                                                                                                                                                            |
| Measured BW (kHz), 99% OBW                       | 1.04 (1 MHz)                                                                                                                                                                                    |
| Type of modulation                               | BLE (GFSK)                                                                                                                                                                                      |
| Emission classification                          | F1D                                                                                                                                                                                             |
| Transmitter spurious, dBμV/m @ 3 m               | 61.7 (pk) @2440 MHz channel and 52.9 (avg) @ 2480 MHz channel 1 MHz BW                                                                                                                          |
| Antenna information                              | Type: Helical antenna with connector style PCB-mount base<br>Manufacturer: Linx Technologies<br>Model: ANT-915-VHETH<br>Peak gain: 1.8 dBi                                                      |

## 5.5 EUT setup details


### 5.5.1 Radio exercise details

|                      |                                                                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Operating conditions | The EUT was powered on and the product was preloaded with the appropriate test firmware to transmit continuously the specific BLE channel. |
| Transmitter state    | Transmit at 100% duty cycle & BLE duty cycle, Transmit at maximum power level -3 dBm                                                       |

## EUT setup configuration



**Figure 5.5-1:** Radiated testing block diagram

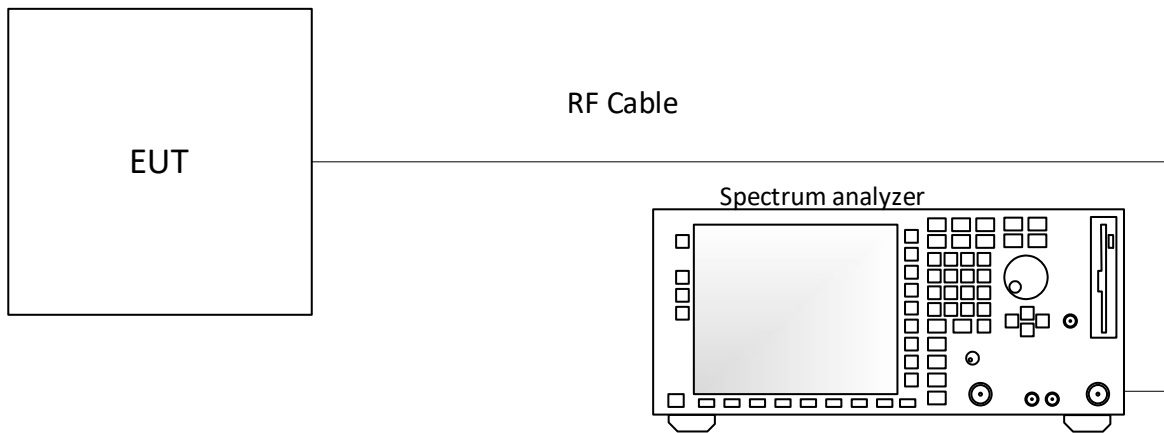

**Figure 5.5-2:** Antenna port testing block diagram

## Section 6 Summary of test results

### 6.1 location

|                   |           |
|-------------------|-----------|
| Test location (s) | Cambridge |
|-------------------|-----------|

### 6.2 Testing period

|                 |                   |               |                |
|-----------------|-------------------|---------------|----------------|
| Test start date | November 21, 2022 | Test end date | April 11, 2023 |
|-----------------|-------------------|---------------|----------------|

### 6.3 Sample information

|              |                   |                           |                                       |
|--------------|-------------------|---------------------------|---------------------------------------|
| Receipt date | November 16, 2022 | Nemko sample ID number(s) | 1,2,3 (Radiated)<br>4,5,6 (Conducted) |
|--------------|-------------------|---------------------------|---------------------------------------|

### 6.4 FCC test results

**Table 6.4-1: FCC requirements results**

| Part                             | Test description                                                                        | Verdict        |
|----------------------------------|-----------------------------------------------------------------------------------------|----------------|
| <b>Generic requirements</b>      |                                                                                         |                |
| \$15.207(a)                      | Conducted limits                                                                        | Not applicable |
| \$15.31(e)                       | Variation of power source                                                               | Pass           |
| \$15.31(m)                       | Number of tested frequencies                                                            | Pass           |
| \$15.203                         | Antenna requirement                                                                     | Pass           |
| \$15.247(c)(1)                   | Fixed point-to-point operation with directional antenna gains greater than 6 dBi        | Not applicable |
| \$15.247(c)(2)                   | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams | Not applicable |
| \$15.247(d)                      | Spurious emissions                                                                      | Pass           |
| \$15.247(f)                      | Time of occupancy for hybrid systems                                                    | Not applicable |
| <b>DTS specific requirements</b> |                                                                                         |                |
| \$15.247(a)(2)                   | Minimum 6 dB bandwidth                                                                  | Pass           |
| \$15.247(b)(3)                   | Maximum peak output power                                                               | Pass           |
| \$15.247(e)                      | Power spectral density                                                                  | Pass           |

Notes: EUT is a battery-operated device, the testing was performed using fresh batteries.

## 6.5 ISED test results

**Table 6.5-1: ISED requirements results**

| Part                             | Test description                                                                                       | Verdict        |
|----------------------------------|--------------------------------------------------------------------------------------------------------|----------------|
| <b>Generic requirements</b>      |                                                                                                        |                |
| RSS-Gen, 7.3                     | Receiver radiated emission limits                                                                      | Not applicable |
| RSS-Gen, 7.4                     | Receiver conducted emission limits                                                                     | Not applicable |
| RSS-Gen, 6.9                     | Operating bands and selection of test frequencies                                                      | Pass           |
| RSS-Gen, 8.8                     | AC powerline conducted emissions limits                                                                | Not applicable |
| RSS-247, 5.5                     | Unwanted emissions                                                                                     | Pass           |
| <b>DTS specific requirements</b> |                                                                                                        |                |
| RSS-247, 5.2 (a)                 | Minimum 6 dB bandwidth                                                                                 | Pass           |
| RSS-247, 5.2 (b)                 | Maximum power spectral density                                                                         | Pass           |
| RSS-247, 5.4 (d)                 | Transmitter output power and e.i.r.p. requirements for systems employing digital modulation techniques | Pass           |
| RSS-247, 5.4 (e)                 | Transmitter e.i.r.p. requirements for point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band | Not applicable |
| RSS-247, 5.4 (f)                 | Transmitter requirements for operation in the 2400–2483.5 MHz band with multiple directional beams     | Not applicable |

Notes: <sup>1</sup>According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.  
EUT is a battery-operated device, the testing was performed using fresh batteries.

## 6.6 AS/NZS 4268 Test results

### Transmitter parameters

Evidence of transmitter compliance to this standard may be demonstrated by testing to FCC generic standards listed in Clause 6.2.2. of AS/NZS 4268: 2017. Australian and New Zealand requirements, for example, frequency assignments or transmitter power levels, may be different to international requirements and compliance with any differences were addressed and documented.

### Transmitter requirements

Testing of the transmitter parameters specified in this Clause 6 were conducted using the appropriate generic product standard for FCC listed in Clause 6.2.2 of AS/NZS 4268: 2017 unless a specific product standard is listed in Table 1 AS/NZS 4268: 2017 for Australia, in which case that shall be used.

**Table 6.6-1: Test results for AS/NZS**

| FCC part                    | AS/NZS part | Test description                                                                        | Verdict        |
|-----------------------------|-------------|-----------------------------------------------------------------------------------------|----------------|
| <b>Generic requirements</b> |             |                                                                                         |                |
| §15.207(a)                  | 6.2         | Conducted limits                                                                        | Not applicable |
| §15.31(e)                   | 6.2         | Variation of power source                                                               | Pass           |
| §15.31(m)                   | 6.2         | Number of tested frequencies                                                            | Pass           |
| §15.203                     | 6.2         | Antenna requirement                                                                     | Pass           |
| §15.109                     | 7.2         | Receiver emissions                                                                      | Not applicable |
| <b>DTS requirements</b>     |             |                                                                                         |                |
| §15.247(a)(2)               | 6.5         | Minimum 6 dB bandwidth                                                                  | Pass           |
| §15.247(b)(3)               | 6.3         | Maximum peak output power in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands  | Pass           |
| §15.247(c)(1)               | 6.2         | Fixed point-to-point operation with directional antenna gains greater than 6 dBi        | Not applicable |
| §15.247(c)(2)               | 6.2         | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams | Not applicable |
| §15.247(d)                  | 6.4         | Spurious emissions                                                                      | Pass           |
| §15.247(e)                  | 6.2         | Power spectral density                                                                  | Pass           |
| §15.247(f)                  | 6.2         | Time of occupancy for hybrid systems                                                    | Not applicable |

Notes: EUT is a battery-operated device, the testing was performed using fresh batteries.

## Section 7 Test equipment

### 7.1 Test equipment list

**Table 7.1-1: Equipment list**

| Equipment                   | Manufacturer    | Model no. | Asset no. | Cal cycle | Next cal.         |
|-----------------------------|-----------------|-----------|-----------|-----------|-------------------|
| Receiver/spectrum analyzer  | Rohde & Schwarz | ESR26     | FA002969  | 1 year    | February 10, 2024 |
| Spectrum analyzer           | Rohde & Schwarz | FSW43     | FA002971  | 1 year    | December 31, 2023 |
| 3 m EMI test chamber        | TDK             | SAC-3     | FA003012  | 1 year    | January 30, 2024  |
| Flush mount turntable       | SUNAR           | FM2022    | FA003006  | —         | NCR               |
| Controller                  | SUNAR           | SC110V    | FA002976  | —         | NCR               |
| Antenna mast                | SUNAR           | TLT2      | FA003007  | —         | NCR               |
| Bilog antenna (30–2000 MHz) | SUNAR           | JB1       | FA003010  | 1 year    | June 21, 2023     |
| Horn antenna (1–18 GHz)     | ETS-Lindgren    | 3117      | FA002911  | 1 year    | May 11, 2023      |
| Preamp (1–18 GHz)           | ETS-Lindgren    | 124334    | FA002956  | 1 year    | March 27, 2024    |
| 50 Ω coax cable             | Huber + Suhner  | None      | FA003046  | 1 year    | January 18, 2024  |
| 50 Ω coax cable             | Huber + Suhner  | None      | FA003047  | 1 year    | January18, 2024   |
| 50 Ω coax cable             | Huber + Suhner  | None      | FA003402  | 1 year    | January18, 2024   |
| Vector signal Generator     | Rohde & Schwarz | SMW200A   | FA002970  | 1 year    | December 31 2023  |
| Preamp 18-40 GHz            | None            | None      | FA003323  | 1 year    | March 27, 2024    |
| Horn antenna (18–40 GHz)    | EMCO            | 3116B     | FA002948  | 1 year    | March 27, 2024    |

Notes: NCR - no calibration required

**Table 7.1-2: Automation software details**

| Test description   | Manufacturer of Software | Details                                                |
|--------------------|--------------------------|--------------------------------------------------------|
| Spurious Emissions | Rohde & Schwarz          | EMC32, Software for EMC Measurements, Version 10.60.00 |



## Section 8   Testing data

---

### 8.1   Variation of power source

---

#### 8.1.1   References, definitions, and limits

---

##### **FCC §15.31 (e):**

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 8.1.2   Test summary

---

|           |            |           |                   |
|-----------|------------|-----------|-------------------|
| Verdict   | Pass       |           |                   |
| Tested by | Ketav Jani | Test date | November 21, 2022 |

#### 8.1.3   Observations, settings, and special notes

---

The testing was performed as per ANSI C63.10 Section 5.13.

- a) Where the device is intended to be powered from an external power adapter, the voltage variations shall be applied to the input of the adapter provided with the device at the time of sale. If the device is not marketed or sold with a specific adapter, then a typical power adapter shall be used.
- b) For devices, where operating at a supply voltage deviating  $\pm 15\%$  from the nominal rated value may cause damages or loss of intended function, test to minimum and maximum allowable voltage per manufacturer's specification and document in the report.
- c) For devices with wide range of rated supply voltage, test at 15% below the lowest and 15% above the highest declared nominal rated supply voltage.
- d) For devices obtaining power from an input/output (I/O) port (USB, firewire, etc.), a test jig is necessary to apply voltage variation to the device from a support power supply, while maintaining the functionalities of the device.
- e) For battery-operated equipment, the equipment tests shall be performed using a variable power supply.

#### 8.1.4   Test data

---

##### EUT Power requirements:

|                                                                                                   |                                         |                             |                                             |
|---------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------|---------------------------------------------|
|                                                                                                   | <input type="checkbox"/> AC             | <input type="checkbox"/> DC | <input checked="" type="checkbox"/> Battery |
| If EUT is an AC or a DC powered, was the noticeable output power variation observed?              | <input type="checkbox"/> YES            | <input type="checkbox"/> NO | <input checked="" type="checkbox"/> N/A     |
| If EUT is battery operated, was the testing performed using fresh batteries?                      | <input checked="" type="checkbox"/> YES | <input type="checkbox"/> NO | <input type="checkbox"/> N/A                |
| If EUT is rechargeable battery operated, was the testing performed using fully charged batteries? | <input type="checkbox"/> YES            | <input type="checkbox"/> NO | <input checked="" type="checkbox"/> N/A     |

## 8.2 Number of frequencies

### 8.2.1 References, definitions, and limits

#### FCC §15.31:

- (m) Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

#### RSS-Gen, Clause 6.9:

Except where otherwise specified, measurements shall be performed for each frequency band of operation for which the radio apparatus is to be certified, with the device operating at the frequencies in each band of operation shown in table below. The frequencies selected for measurements shall be reported in the test report.

**Table 8.2-1: Frequency Range of Operation**

| Frequency range over which the device operates (in each band) | Number of test frequencies required | Location of measurement frequency inside the operating frequency range |
|---------------------------------------------------------------|-------------------------------------|------------------------------------------------------------------------|
| 1 MHz or less                                                 | 1                                   | Center (middle of the band)                                            |
| 1–10 MHz                                                      | 2                                   | 1 near high end, 1 near low end                                        |
| Greater than 10 MHz                                           | 3                                   | 1 near high end, 1 near center and 1 near low end                      |

Notes: “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

### 8.2.2 Test summary

|           |            |           |                   |
|-----------|------------|-----------|-------------------|
| Verdict   | Pass       |           |                   |
| Tested by | Ketav Jani | Test date | November 21, 2022 |

### 8.2.3 Observations, settings and special notes

#### ANSI C63.10, Clause 5.6.2.1:

The number of channels tested can be reduced by measuring the center channel bandwidth first and then applying the following relaxations as appropriate:

- For each operating mode, if the measured channel bandwidth on the middle channel is at least 150% of the minimum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.
- For multiple-input multiple-output (MIMO) systems, if the measured channel bandwidth on testing the middle channel exceeds the minimum permitted bandwidth by more than 50% on one transmit chain, then it is not necessary to repeat testing on the other chains.
- If the measured channel bandwidth on the middle channel is less than 50% of the maximum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.

#### ANSI C63.10, Clause 5.6.2.2:

For devices with multiple operating modes, measurements on the middle channel can be used to determine the worst-case mode(s). The worst-case modes are as follows:

- Band edge requirements—Measurements on the mode with the widest bandwidth can be used to cover the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- Spurious emissions—Measure the mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- In-band PSD—Measurements on the mode with the narrowest bandwidth can be used to cover all modes within the same modulation family of an equal or lower output power provided the result is less than 50% of the limit.

8.2.4      Test data

---

**Table 8.2-2:** *Test channels selection*

| Start of Frequency<br>range, MHz | End of Frequency<br>range, MHz | Frequency range<br>bandwidth, MHz | Low channel, MHz | Mid channel, MHz | High channel, MHz |
|----------------------------------|--------------------------------|-----------------------------------|------------------|------------------|-------------------|
| 2400                             | 2483.5                         | 83.5                              | 2402             | 2440             | 2480              |

## 8.3 Antenna requirement

### 8.3.1 References, definitions, and limits

#### FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### FCC §15.247:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### RSS-Gen, Clause 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report.

### 8.3.2 Test summary

|           |            |           |                   |
|-----------|------------|-----------|-------------------|
| Verdict   | Pass       |           |                   |
| Tested by | Ketav Jani | Test date | November 21, 2022 |

### 8.3.3 Observations, settings, and special notes

None

### 8.3.4 Test data

Must the EUT be professionally installed?      ☐ YES      ☒ NO  
Does the EUT have detachable antenna(s)?      ☐ YES      ☒ NO  
    If detachable, is the antenna connector(s) non-standard?      ☐ YES      ☐ NO      ☒ N/A

**Table 8.3-1: Antenna information**

| Antenna type | Manufacturer      | Model number  | Maximum gain | Connector type        |
|--------------|-------------------|---------------|--------------|-----------------------|
| Helical      | Linx technologies | ANT-915-VHETH | 1.8          | Direct PCB attachment |

## 8.4 Minimum 6 dB bandwidth for DTS systems

### 8.4.1 References, definitions, and limits

#### FCC §15.247:

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RSS-247, Clause 5.2:

DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:

- a. The minimum 6 dB bandwidth shall be 500 kHz.

#### RSS-Gen, Clause 6.7:

6 dB bandwidth is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

#### AS/NZS 4268, Clause 6.5:

The upper and lower frequency limits of the transmitter 99% emission power bandwidth shall at all times remain within the operating frequency limits.

Some transmitter categories require a specific limit for emission bandwidth. In such cases, the emission bandwidth shall be established by testing in accordance with the relevant specified Standard

### 8.4.2 Test summary

|           |            |           |                |
|-----------|------------|-----------|----------------|
| Verdict   | Pass       |           |                |
| Tested by | Ketav Jani | Test date | March 31, 2023 |

### 8.4.3 Observations, settings, and special notes

The test was performed as per KDB 558074, section 8.2 with reference to ANSI C63.10 subclause 11.8.

Spectrum analyser settings:

|                      |                                        |
|----------------------|----------------------------------------|
| Resolution bandwidth | 6 dB BW: 100 kHz; 99% OBW: 1–5% of OBW |
| Video bandwidth      | $\geq 3 \times \text{RBW}$             |
| Frequency span       | 3 MHz for 1 MHz channel                |
| Detector mode        | Peak                                   |
| Trace mode           | Max Hold                               |

#### 8.4.4 Test data

**Table 8.4-1: 99% occupied bandwidth results – 1 MHz**

| Frequency, MHz | 99% occupied bandwidth, MHz |
|----------------|-----------------------------|
| 2402           | 1.04                        |
| 2440           | 1.04                        |
| 2480           | 1.04                        |

Notes: There is no 99% occupied bandwidth limit in the standard's requirements, the measurement results provided for information purposes only.

**Table 8.4-2: 6 dB bandwidth results – 1 MHz**

| Frequency, MHz | 6 dB bandwidth, MHz | Minimum limit, MHz | Margin, MHz |
|----------------|---------------------|--------------------|-------------|
| 2402           | 0.65                | 0.50               | 0.15        |
| 2440           | 0.65                | 0.50               | 0.15        |
| 2480           | 0.64                | 0.50               | 0.14        |



**Figure 8.4-1: 6 dB bandwidth, sample plot Mid channel, 1 MHz BW**



**Figure 8.4-2: 99% bandwidth, sample plot Mid channel, 1 MHz BW**

## 8.5 Transmitter output power and e.i.r.p. requirements for DTS in 2.4 GHz

---

### 8.5.1 References, definitions, and limits

---

#### **FCC §15.247:**

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 2400–2483.5 MHz band: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (c) Operation with directional antenna gains greater than 6 dBi.
  - (1) Fixed point-to-point operation:
    - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
    - (iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.
  - (2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
    - (i) Different information must be transmitted to each receiver.
    - (ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:
      - (A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.
      - (B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.
  - (iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.
  - (iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

## References, definitions, and limits, continued

### RSS-247, Clause 5.4:

Devices shall comply with the following requirements, where applicable:

- d. For DTSs employing digital modulation techniques operating in the 2400–2483.5 MHz band,, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

- e. Fixed point-to-point systems in the 2400–2483.5 MHz band are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.
- f. Transmitters operating in the band 2400–2483.5 MHz, may employ antenna systems that emit multiple directional beams simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers, provided that the emissions comply with the following:
  - i. Different information must be transmitted to each receiver.
  - ii. If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit specified in sections 5.4(b) and 5.4(d). However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.
  - iii. If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the applicable power limit specified in sections 5.4(b) and 5.4(d). If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the applicable limit specified in sections 5.4(b) and 5.4(d). In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the applicable limit specified in sections 5.4(b) and 5.4(d) by more than 8 dB.
  - iv. Transmitters that transmit a single directional beam shall operate under the provisions of sections 5.4(b), 5.4(d) and 5.4(e).

### AS/NZS 4268, Clause 6.3:

#### 6.3.1 Australian limits

In Australia, refer to Table 1

Table 1 Australian requirements

Row 59 Digital modulation transmitters within 2400–2483.5 MHz

Maximum EIRP limit: 4 W (36 dBm)

#### 6.3.2 New Zealand limits

In New Zealand, refer to the General User Radio Licence (GURL) for SRD.

GURL Radiocommunications Regulations (General User Radio Licence for Short Range Devices) Notice 2019

#### 3. Spectrum

Maximum power within 2400–2483.5 MHz is 6 dBW EIRP (36 dBm)

## 8.5.2 Test summary

|           |            |           |                |
|-----------|------------|-----------|----------------|
| Verdict   | Pass       |           |                |
| Tested by | Ketav Jani | Test date | April 11, 2023 |

### 8.5.3 Observations, settings, and special notes

The test was performed as per KDB 558074, section 8.3 with reference to ANSI C63.10 subclause 11.9.1 (peak power) using method RBW≥DTS bandwidth (Maximum peak conducted output power)

Spectrum analyser settings:

|                      |                          |
|----------------------|--------------------------|
| Resolution bandwidth | 3 MHz                    |
| Video bandwidth      | ≥3 × RBW                 |
| Frequency span       | 10 MHz for 1 MHz channel |
| Detector mode        | Peak                     |
| Trace mode           | Max Hold                 |


### 8.5.4 Test data

**Table 8.5-1:** Output power and EIRP results (antenna port measurement)

| Frequency, MHz | Conducted output power, dBm | Output power limit, dBm | Output power margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|----------------|-----------------------------|-------------------------|-------------------------|-------------------|-----------|-----------------|-----------------|
| 2402           | -3.3                        | 30.0                    | 33.3                    | 1.8               | -1.5      | 36.0            | 37.5            |
| 2440           | -3.6                        | 30.0                    | 33.6                    | 1.8               | -1.8      | 36.0            | 37.8            |
| 2480           | -4.1                        | 30.0                    | 34.1                    | 1.8               | -2.3      | 36.0            | 38.3            |


Note: EIRP [dBm] = Conducted output power [dBm] + Antenna gain [dBi]

## Test data, continued

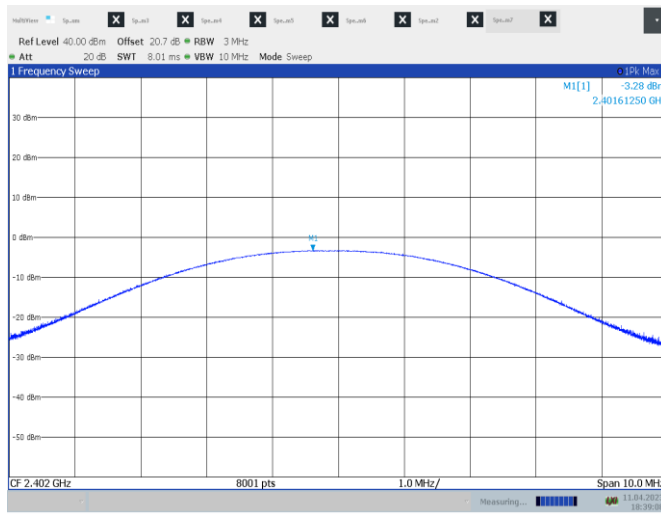


18:39:08 11.04.2023

Figure 8.5-1: Output power on low channel, 1 MHz BW

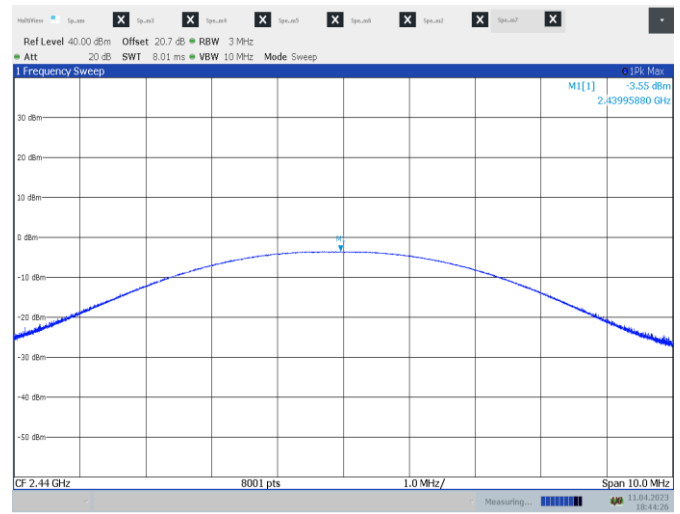

18:44:27 11.04.2023

Figure 8.5-2: Output power on mid channel, 1 MHz BW

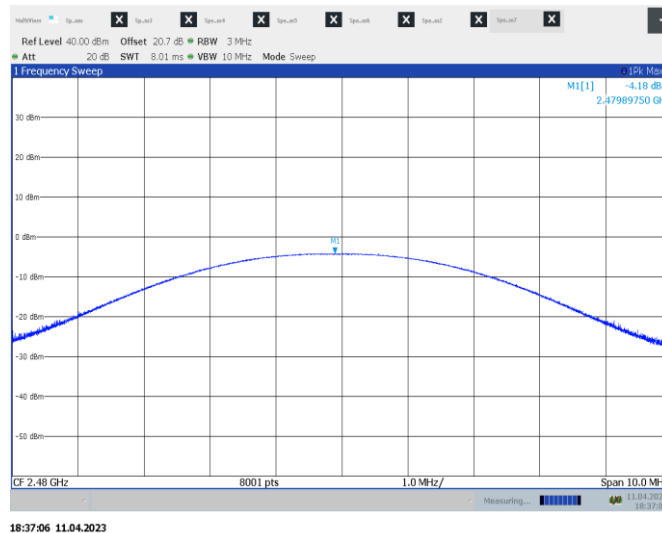

18:37:06 11.04.2023

Figure 8.5-3: Output power on high channel, 1 MHz BW

## 8.6 Spurious (out-of-band) unwanted emissions

---

### 8.6.1 References, definitions, and limits

---

#### **FCC §15.247:**

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **RSS-247, Clause 5.5:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### **RSS-Gen:**

- 8.9 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table below.
- 8.10 Restricted frequency bands are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. The following conditions related to the restricted frequency bands apply:
- a The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands.
  - b Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table below.
  - c Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in table below.

#### **AS/NZS 4268, Clause 6.4:**

##### 6.4.1 Australian limits

In Australia, refer to the limits in Standards referenced in Clause 6.2.2, Table 1

##### 6.2.2 Methods and limits are in 47 CFR Part 15.247

##### 6.4.2 New Zealand limits

In New Zealand, refer to the General User Radio Licence (GURL) for SRD.

#### **GURL Radiocommunications Regulations (General User Radio Licence for Short Range Devices) Notice 2019**

##### 23 Special condition:

Transmissions must not exceed the following unwanted emission limits: -79 dBW (-49 dBm or 46.23 dBµV/m) e.i.r.p. within 800–915 MHz and -63 dBW (-33 dBm or 62.23 dBµV/m) e.i.r.p. within 928–1000 GHz. The reference bandwidth for emissions is 100 kHz. Outside the band 0.8–1 GHz, the limits prescribed in applicable standards prescribed in the Radiocommunications (Radio Standards) Notice 2016 apply. In the absence of applicable standards, the limits prescribed in Table 2 of the notice apply.

References, definitions, and limits, continued

**Table 8.6-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

| Frequency, MHz | Field strength of emissions |                                 | Measurement distance, m |
|----------------|-----------------------------|---------------------------------|-------------------------|
|                | μV/m                        | dBμV/m                          |                         |
| 0.009–0.490    | 2400/F                      | $67.6 - 20 \times \log_{10}(F)$ | 300                     |
| 0.490–1.705    | 24000/F                     | $87.6 - 20 \times \log_{10}(F)$ | 30                      |
| 1.705–30.0     | 30                          | 29.5                            | 30                      |
| 30–88          | 100                         | 40.0                            | 3                       |
| 88–216         | 150                         | 43.5                            | 3                       |
| 216–960        | 200                         | 46.0                            | 3                       |
| above 960      | 500                         | 54.0                            | 3                       |

Notes: In the emission table above, the tighter limit applies at the band edges.  
For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

**Table 8.6-2: ISSED restricted frequency bands**

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110       | 12.57675–12.57725   | 399.9–410     | 7.25–7.75   |
| 0.495–0.505       | 13.36–13.41         | 608–614       | 8.025–8.5   |
| 2.1735–2.1905     | 16.42–16.423        | 960–1427      | 9.0–9.2     |
| 3.020–3.026       | 16.69475–16.69525   | 1435–1626.5   | 9.3–9.5     |
| 4.125–4.128       | 16.80425–16.80475   | 1645.5–1646.5 | 10.6–12.7   |
| 4.17725–4.17775   | 25.5–25.67          | 1660–1710     | 13.25–13.4  |
| 4.20725–4.20775   | 37.5–38.25          | 1718.8–1722.2 | 14.47–14.5  |
| 5.677–5.683       | 73–74.6             | 2200–2300     | 15.35–16.2  |
| 6.215–6.218       | 74.8–75.2           | 2310–2390     | 17.7–21.4   |
| 6.26775–6.26825   | 108–138             | 2483.5–2500   | 22.01–23.12 |
| 6.31175–6.31225   | 149.9–150.05        | 2655–2900     | 23.6–24.0   |
| 8.291–8.294       | 156.52475–156.52525 | 3260–3267     | 31.2–31.8   |
| 8.362–8.366       | 156.7–156.9         | 3332–3339     | 36.43–36.5  |
| 8.37625–8.38675   | 162.0125–167.17     | 3345.8–3358   |             |
| 8.41425–8.41475   | 167.72–173.2        | 3500–4400     |             |
| 12.29–12.293      | 240–285             | 4500–5150     | Above 38.6  |
| 12.51975–12.52025 | 322–335.4           | 5350–5460     |             |

Note: Certain frequency bands listed in Table 8.6-2 and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

References, definitions, and limits, continued

**Table 8.6-3: FCC restricted frequency bands**

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110       | 16.42–16.423        | 399.9–410     | 4.5–5.15    |
| 0.495–0.505       | 16.69475–16.69525   | 608–614       | 5.35–5.46   |
| 2.1735–2.1905     | 16.80425–16.80475   | 960–1240      | 7.25–7.75   |
| 4.125–4.128       | 25.5–25.67          | 1300–1427     | 8.025–8.5   |
| 4.17725–4.17775   | 37.5–38.25          | 1435–1626.5   | 9.0–9.2     |
| 4.20725–4.20775   | 73–74.6             | 1645.5–1646.5 | 9.3–9.5     |
| 6.215–6.218       | 74.8–75.2           | 1660–1710     | 10.6–12.7   |
| 6.26775–6.26825   | 108–121.94          | 1718.8–1722.2 | 13.25–13.4  |
| 6.31175–6.31225   | 123–138             | 2200–2300     | 14.47–14.5  |
| 8.291–8.294       | 149.9–150.05        | 2310–2390     | 15.35–16.2  |
| 8.362–8.366       | 156.52475–156.52525 | 2483.5–2500   | 17.7–21.4   |
| 8.37625–8.38675   | 156.7–156.9         | 2690–2900     | 22.01–23.12 |
| 8.41425–8.41475   | 162.0125–167.17     | 3260–3267     | 23.6–24.0   |
| 12.29–12.293      | 167.72–173.2        | 3332–3339     | 31.2–31.8   |
| 12.51975–12.52025 | 240–285             | 3345.8–3358   | 36.43–36.5  |
| 12.57675–12.57725 | 322–335.4           | 3600–4400     | Above 38.6  |
| 13.36–13.41       |                     |               |             |

8.6.2 Test summary

|           |               |           |               |
|-----------|---------------|-----------|---------------|
| Verdict   | Pass          |           |               |
| Tested by | Tarek Elkholy | Test date | April 3, 2023 |

### 8.6.3 Observations, settings, and special notes

- As part of the current assessment, the test range of 9 kHz to 10<sup>th</sup> harmonic has been fully considered and compared to the actual frequencies utilized within the EUT. Since the EUT contains a transmitter in the GHz range, the EUT has been deemed compliant without formal testing in the 9 kHz to 30 MHz test range, therefore formal test results (tabular data and/or plots) are not provided within this test report.
- EUT was set to transmit with 100 % duty cycle.
- Radiated measurements were performed at a distance of 3 m.
- DTS emissions in non-restricted frequency bands test was performed as per KDB 558074, section 8.5 with reference to ANSI C63.10 subclause 11.11.
- Since fundamental power was tested using the maximum peak conducted output power procedure to demonstrate compliance, the spurious emissions limit is -20 dBc/100 kHz.
- DTS emissions in restricted frequency bands test was performed as per KDB 558074, section 8.6 with reference to ANSI C63.10 subclause 11.12.
- DTS band-edge emission measurements test was performed as per KDB 558074, section 8.7 with reference to ANSI C63.10 subclause 11.13.

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz  |
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz    |
| Video bandwidth:      | 3 MHz    |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Spectrum analyser settings for conducted spurious emissions measurements:

|                       |          |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz  |
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |


### 8.6.4 Test data

**Table 8.6-4: Radiated field strength measurement results**


| Channel | Frequency, MHz | Peak Field strength, dBμV/m |       | Margin, dB | Average Field strength, dBμV/m |       | Margin, dB |
|---------|----------------|-----------------------------|-------|------------|--------------------------------|-------|------------|
|         |                | Measured                    | Limit |            | Measured                       | Limit |            |
| Low     | 2390.0         | 60.0                        | 74.0  | 14.0       | 42.4                           | 54.0  | 11.6       |
| High    | 2483.5         | 61.1                        | 74.0  | 12.9       | 42.6                           | 54.0  | 11.4       |
| Low     | 12008.9        | 57.7                        | 74.0  | 16.3       | 48.1                           | 54.0  | 5.9        |
| Mid     | 7320.4         | 61.7                        | 74.0  | 12.3       | 52.1                           | 54.0  | 1.9        |
| High    | 7440.0         | 60.1                        | 74.0  | 13.9       | 52.9                           | 54.0  | 1.1        |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.


Test data, continued

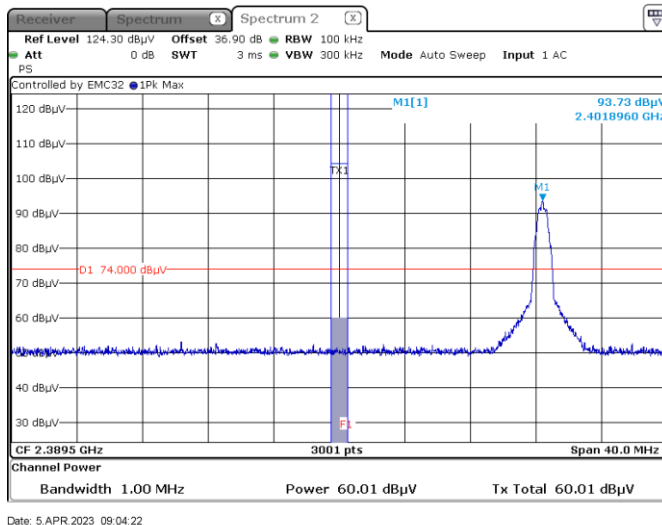


**Figure 8.6-1:** Band edge spurious emissions at 2390 MHz, Peak, 1MHz

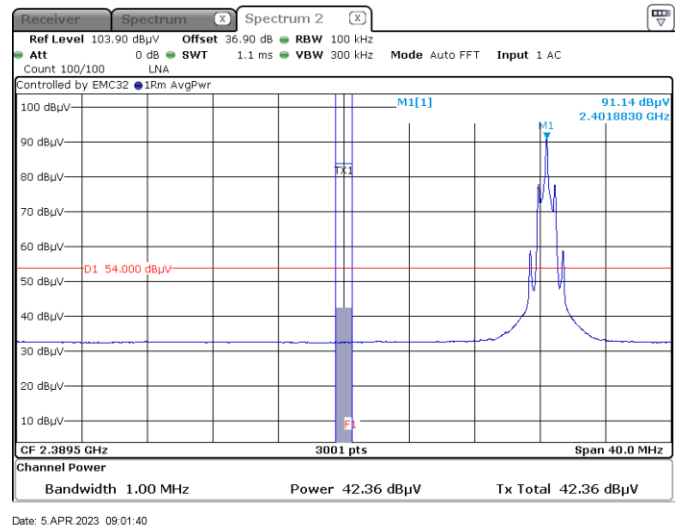

**Figure 8.6-2:** Band edge spurious emissions at 2390 MHz, Average, 1MHz

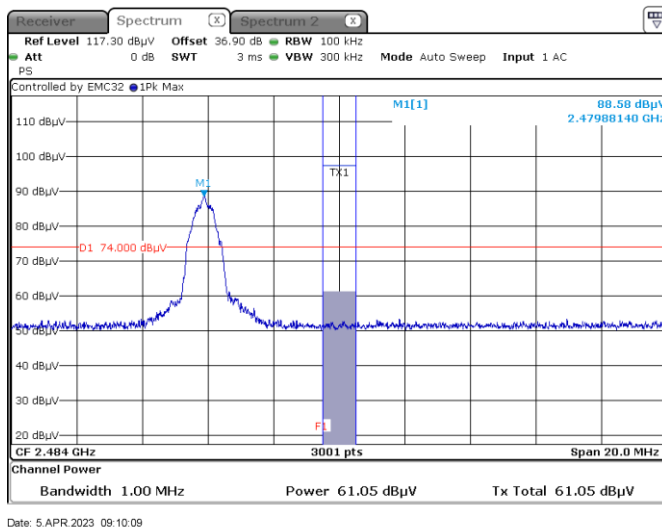

**Figure 8.6-3:** Band edge spurious emissions at 2483.5 MHz, Peak, 1MHz

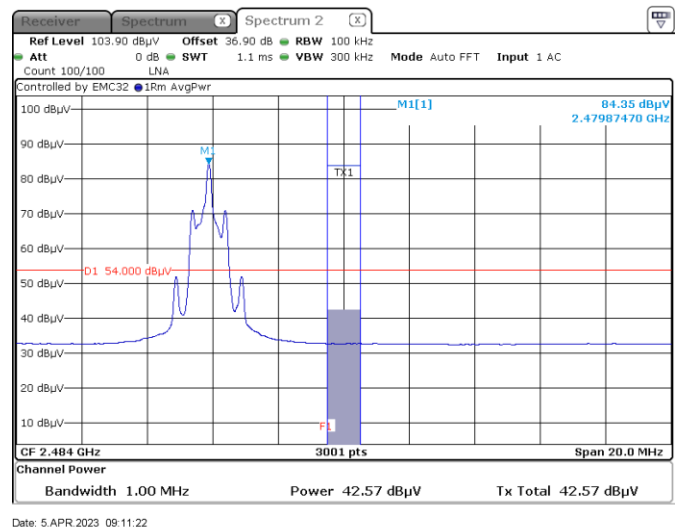

**Figure 8.6-4:** Band edge spurious emissions at 2483.5 MHz, Average, 1MHz

Test data, continued

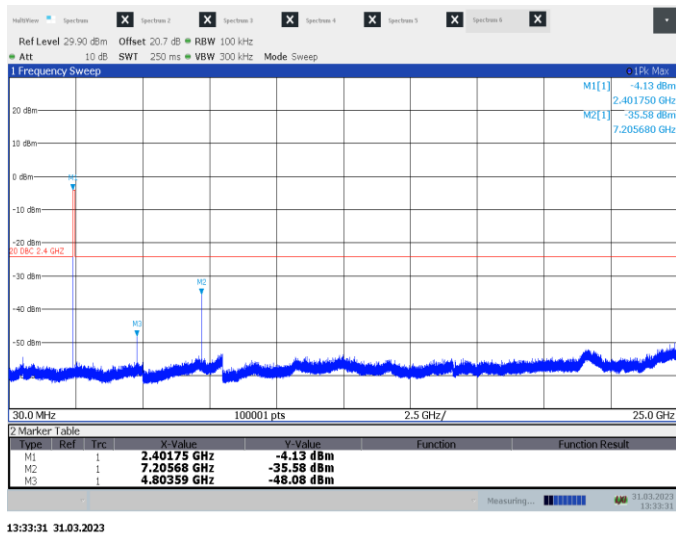


Figure 8.6-5: Conducted spurious emissions on low channel, 1 MHz BW

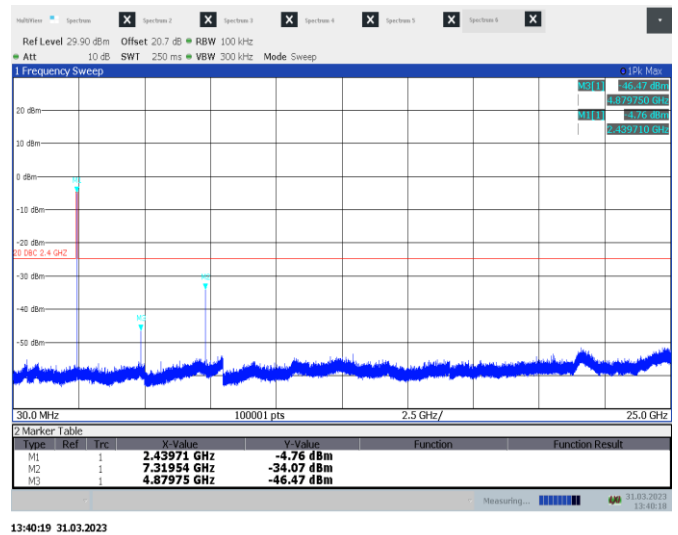


Figure 8.6-6: Conducted spurious emissions on mid channel, 1 MHz BW



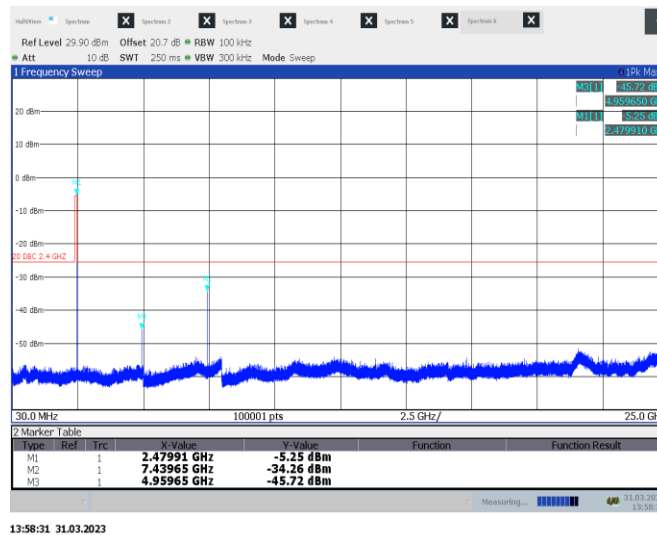


Figure 8.6-7: Conducted spurious emissions on high channel, 1 MHz BW


## Test data, continued

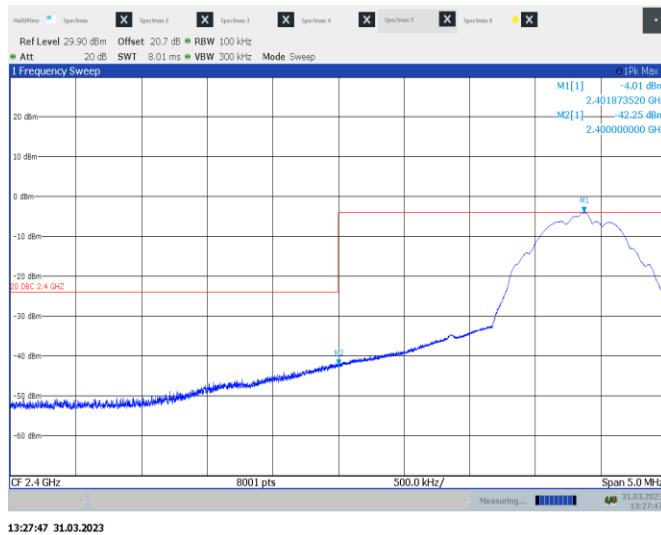


**Figure 8.6-8:** Conducted Band edge on low channel, 1 MHz BW

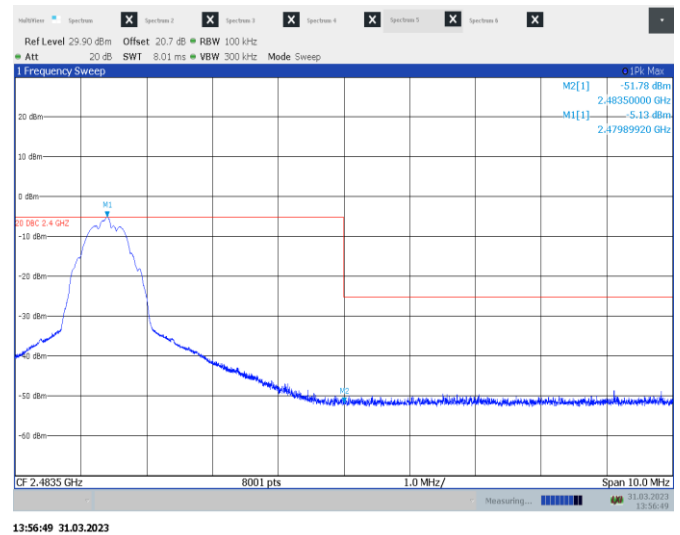

**Figure 8.6-9:** Conducted Band edge on high channel, 1 MHz BW

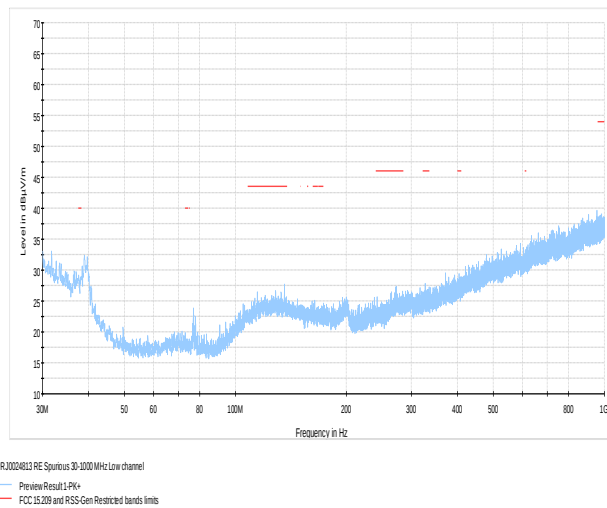


**Figure 8.6-10:** Radiated spurious emissions 30-1000 MHz on low channel – 1MHz

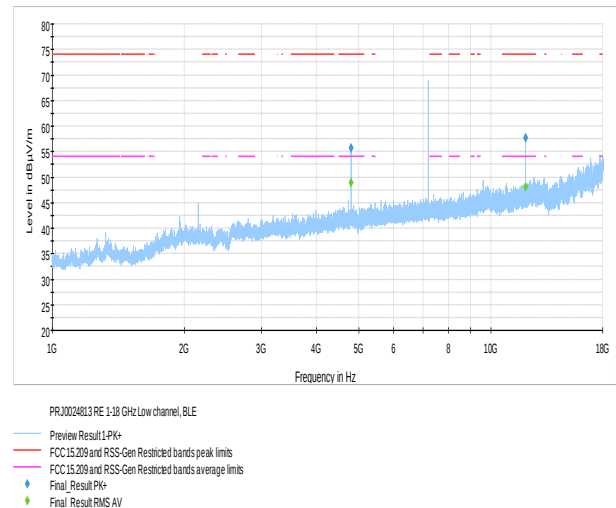


**Figure 8.6-11:** Radiated spurious emissions 1-18 GHz on low channel – 1MHz

Test data, continued

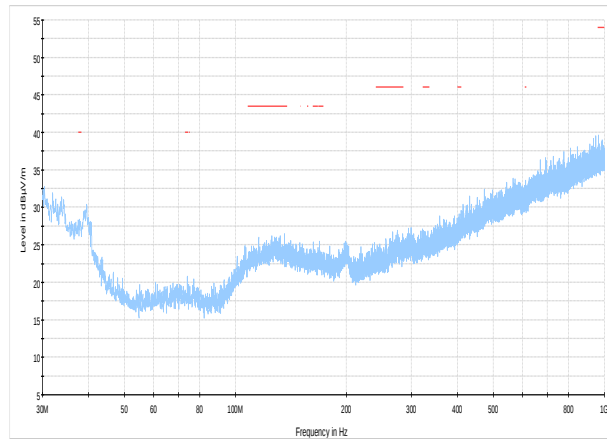


PRJ0024813 RE Spurious 30-1000 MHz Mid channel  
Preview Result 1-PK+  
FCC 15.209 and RSS-Gen Restricted bands limits

**Figure 8.6-12: Radiated spurious emissions 30-1000 MHz on mid channel – 1MHz**

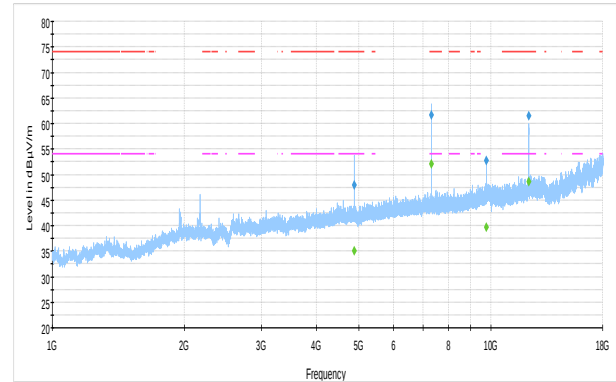


PRJ0024813 RE 1-18 GHz Mid channel, BLE  
Preview Result 1-PK+  
FCC 15.209 and RSS-Gen Restricted bands peak limits  
FCC 15.209 and RSS-Gen Restricted bands average limits  
Final Result PK+  
Final Result RMS AV

**Figure 8.6-13: Radiated spurious emissions 1-18 GHz on mid channel – 1MHz**

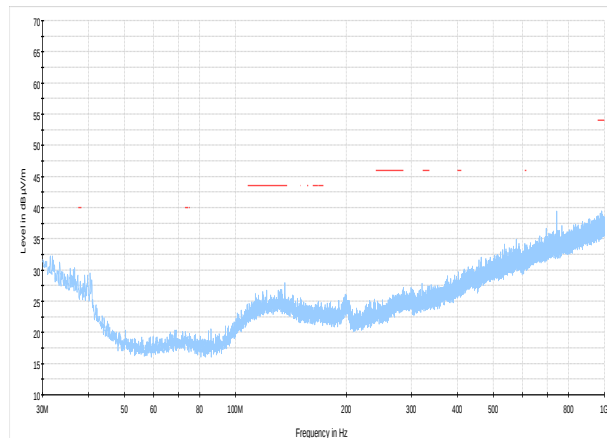

PRJ0024813 RE Spurious 30-1000 MHz High channel  
Preview Result 1-PK+  
FCC 15.209 and RSS-Gen Restricted bands limits


**Figure 8.6-14: Radiated spurious emissions 30-1000 MHz on high channel – 1MHz**

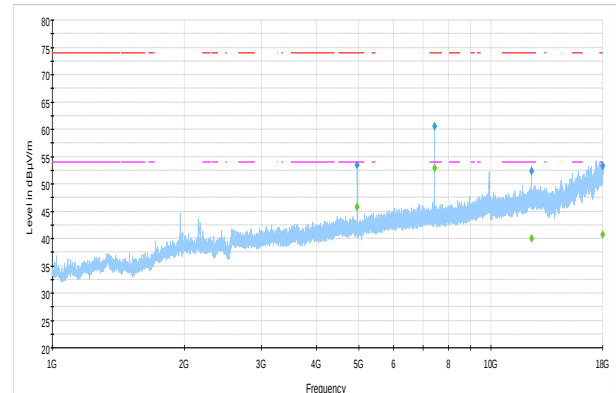

PRJ0024813 RE 1-18 GHz High channel, BLE  
Preview Result 1-PK+  
FCC 15.209 and RSS-Gen Restricted bands peak limits  
FCC 15.209 and RSS-Gen Restricted bands average limits  
Final Result PK+  
Final Result RMS AV


**Figure 8.6-15: Radiated spurious emissions 1-18 GHz on high channel – 1MHz**

## Test data, continued

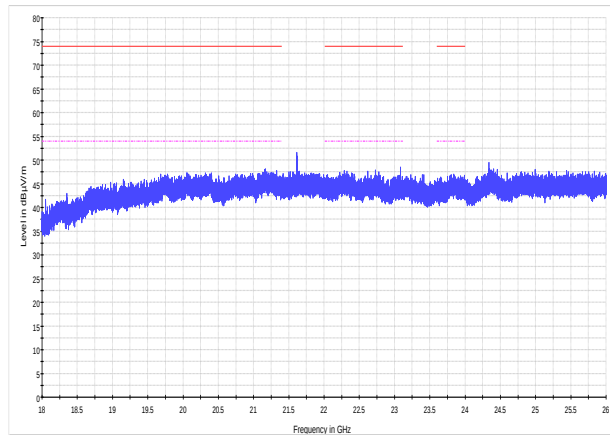


PRJ0024813 RE Spurious 18-26 GHz Low channel  
 PK+ MAOH  
 FCC 15.209 and RSS-Gen Restricted bands peak limits  
 FCC 15.209 and RSS-Gen Restricted bands average limits

**Figure 8.6-16:** Radiated spurious emissions 18-26 GHz on low channel – 1MHz

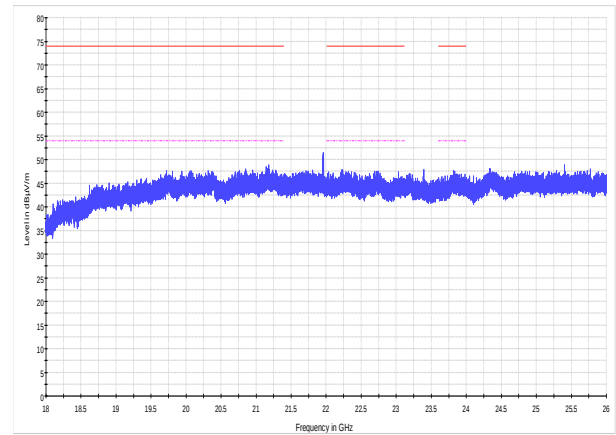

PRJ0024813 RE Spurious 18-26 GHz Mid channel  
 PK+ MAOH  
 FCC 15.209 and RSS-Gen Restricted bands peak limits  
 FCC 15.209 and RSS-Gen Restricted bands average limits

**Figure 8.6-17:** Radiated spurious emissions 18-26 GHz on mid channel – 1MHz

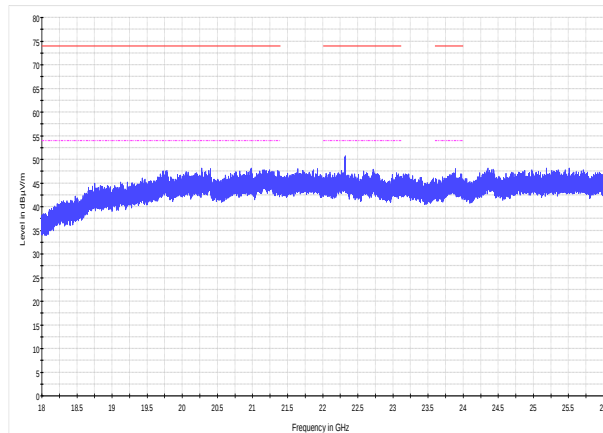

PRJ0024813 RE Spurious 18-26 GHz High channel  
 PK+ MAOH  
 FCC 15.209 and RSS-Gen Restricted bands peak limits  
 FCC 15.209 and RSS-Gen Restricted bands average limits

**Figure 8.6-18:** Radiated spurious emissions 18-26 GHz on high channel – 1MHz

## 8.7 Power spectral density for digitally modulated devices

### 8.7.1 References, definitions, and limits

#### FCC §15.247:

- (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- (f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned-off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### RSS-247, Clause 5.2:

DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:

- b. The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

#### RSS-247, Clause 5.3:

Hybrid systems employ a combination of both frequency hopping and digital transmission techniques and shall comply with the following:

- b. With the frequency hopping turned off, the digital transmission operation shall comply with the power spectral density requirements for digital modulation systems set out in of section 5.2(b) or section 6.2.4 for hybrid devices operating in the band 5725–5850 MHz.

#### AS/NZS 4268, Clause 6.3:

##### 6.3.1 Australian limits

In Australia, refer to Table 1

##### Table 1 Australian requirements

Note 2 The radiated peak power spectral density in any 3 kHz is limited to 25 mW (8 dBm) per 3 kHz.

##### 6.3.2 New Zealand limits

In New Zealand, refer to the General User Radio Licence (GURL) for SRD.

GURL Radiocommunications Regulations (General User Radio Licence for Short Range Devices) Notice 2019

No specific limits

### 8.7.2 Test summary

|           |            |           |                |
|-----------|------------|-----------|----------------|
| Verdict   | Pass       |           |                |
| Tested by | Ketav Jani | Test date | March 31, 2023 |

### 8.7.3 Observations, settings, and special notes

Power spectral density test was performed as per KDB 558074, section 8.4 with reference to ANSI C63.10 subclause 11.10.  
The test was performed using method PKPSD (peak PSD).  
Spectrum analyser settings:


|                       |                             |
|-----------------------|-----------------------------|
| Resolution bandwidth: | 3 kHz                       |
| Video bandwidth:      | $\geq 3 \times \text{RBW}$  |
| Frequency span:       | 1.5 times the DTS BW (Peak) |
| Detector mode:        | Peak                        |
| Trace mode:           | Max hold                    |

### 8.7.4 Test data

**Table 8.7-1:** PSD results (antenna port measurement)


| Frequency, MHz | PSD, dBm/3 kHz | PSD limit, dBm/3 kHz | Margin, dB |
|----------------|----------------|----------------------|------------|
| 2402           | -5.0           | 8.0                  | 13.0       |
| 2440           | -5.7           | 8.0                  | 13.7       |
| 2480           | -6.2           | 8.0                  | 14.2       |

## Test data, continued

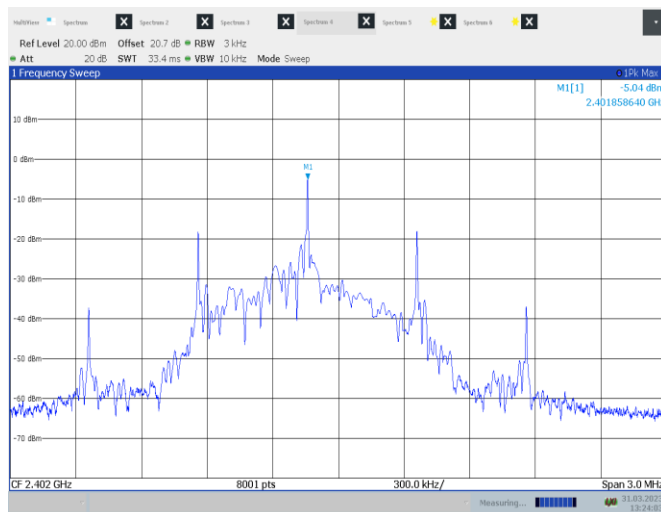

13:24:03 31.03.2023

**Figure 8.7-1: PSD on low channel**

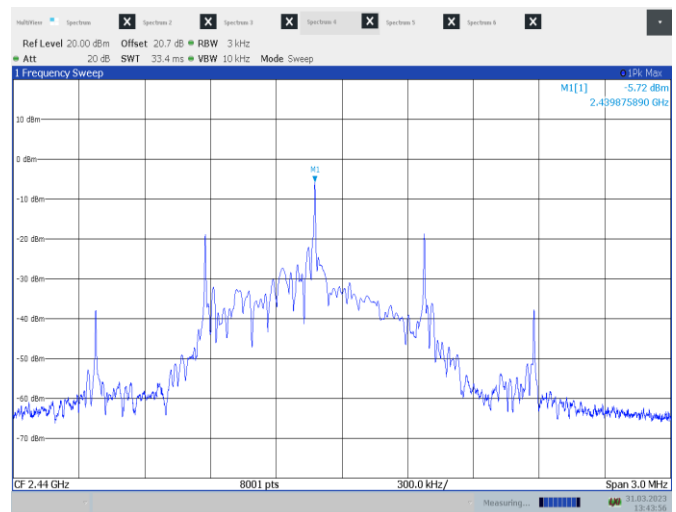

13:43:57 31.03.2023

**Figure 8.7-2: PSD on mid channel**



13:59:19 31.03.2023

**Figure 8.7-3: PSD on high channel**

**End of the test report**