

RF Exposure Evaluation

FCC ID: 2AT2E-KT-BW01

1. Client Information

Applicant	:	Dongguan Kington Electronic Technology Co., Ltd.
Address	:	3/F, Building B, Abao Industrial Park No.160 LuYuan Road TangXia Town, DongGuan China
Manufacturer	:	Dongguan Kington Electronic Technology Co., Ltd.
Address	:	3/F, Building B, Abao Industrial Park No.160 LuYuan Road TangXia Town, DongGuan China

2. General Description of EUT

EUT Name	:	Bamboo wireless charger	
Models No.	:	KT-BW01	
Sample ID	:	20210922-10-01	
Model Difference	:	----	
Product Description	:	Operation Frequency:	113KHz-205KHz
		Modulation Type:	ASK
		Antenna:	Coil Antenna
Power Supply	:	Input: DC 5V/2A, 9V/2A, 12/2A Output: 5W/7.5W/10W/15W	
Software Version	:	----	
Hardware Version	:	KT-C5-15W1_V1.2	
Connecting I/O Port(S)	:	Please refer to the User's Manual	

Note: More test information about the EUT please refer the RF Test Report.

RF Exposure Considerations

1. Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging App v03.

2. Requirements

According to the item 5.2 of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation:


- (1) Power transfer frequency is less than 1 MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3. Test Setup

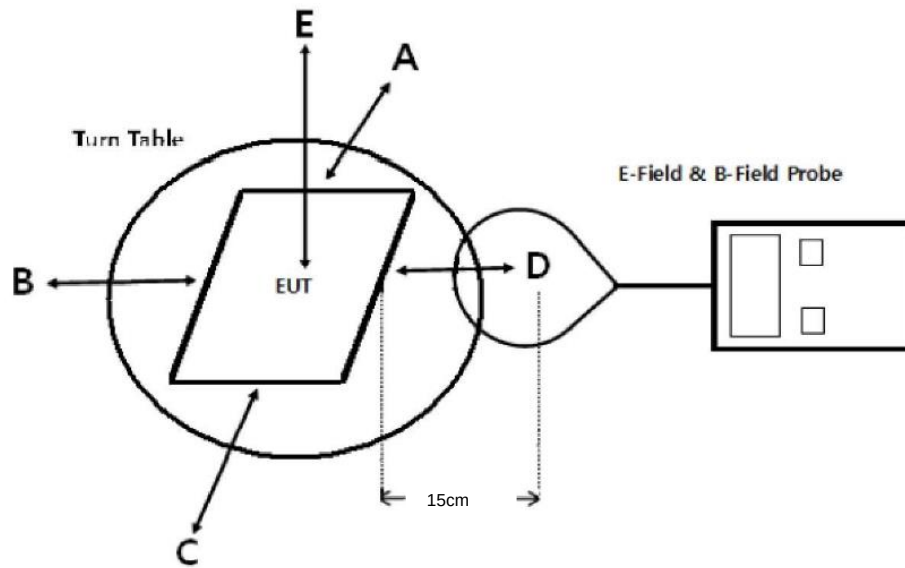

Note: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface.

4. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

Remark:

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

5. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Magnetic field meter	NARDA	ELT-400	EE030	Aug. 27, 2021	Aug. 26, 2022

6. Deviation From Test Standard

No deviation

7. Description of Support Units

Equipment Information				
Name	Model	FCC ID/SDOC	Manufacturer	Used "√"
HUAWEI Mate 30	TAS-AN00	----	HUAWEI	√

8. Mode of operation during the test / Test peripherals used

Test Modes:		
TM1	AC Power Supply + EUT(Output: 5W) + Mobile Phone (Battery Status: <1%)	Pre-tested
TM2	AC Power Supply + EUT(Output: 5W)+ Mobile Phone (Battery Status: <50%)	Pre-tested
TM3	AC Power Supply + EUT(Output: 5W) + Mobile Phone (Battery Status: <99%)	Pre-tested
TM4	AC Power Supply + EUT(Output: 7.5W) Mobile Phone (Battery Status: <1%)	Pre-tested
TM5	AC Power Supply + EUT(Output: 7.5W)Mobile Phone (Battery Status: <50%)	Pre-tested
TM6	AC Power Supply + EUT(Output: 7.5W)Mobile Phone (Battery Status: <99%)	Pre-tested
TM7	AC Power Supply + EUT(Output: 10W) Mobile Phone (Battery Status: <1%)	Pre-tested
TM8	AC Power Supply + EUT(Output: 10W)Mobile Phone (Battery Status: <50%)	Pre-tested
TM9	AC Power Supply + EUT(Output: 10W)Mobile Phone (Battery Status: <99%)	Pre-tested
TM10	AC Power Supply + EUT(Output: 15W) Mobile Phone (Battery Status: <1%)	Record
TM11	AC Power Supply + EUT(Output: 15W)Mobile Phone (Battery Status: <50%)	Record
TM12	AC Power Supply + EUT(Output: 15W)Mobile Phone (Battery Status: <99%)	Record
Note: All test modes were pre-tested, but we only recorded the worst case (TM10, TM11, TM12) in this report.		

9. Test Result

E-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Charging Battery Level	Frequency Range (MHz)	Measured E-Field Strength Values (V/m)					E-Field Strength 50% Limits (V/m)	E-Field Strength Limits (V/m)
		Test Position						
		A	B	C	D	E		
1%	0.115	64.844	64.467	63.713	43.732	47.125	307.0	614.0
50%	0.115	70.876	53.534	63.713	55.419	50.895	307.0	614.0
99%	0.115	61.828	59.566	41.093	44.109	53.534	307.0	614.0

Note: V/m= A/m *377

H-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Charging Battery Level	unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)					H-Field Strength 50% Limits (A/m)	H-Field Strength Limits (A/m)
			Test Position						
			A	B	C	D	E		
1%	uT	0.115	0.215	0.214	0.212	0.145	0.156	--	--
1%	A/m	0.115	0.172	0.171	0.169	0.116	0.125	0.815	1.63
50%	uT	0.115	0.235	0.178	0.135	0.184	0.169	--	--
50%	A/m	0.115	0.188	0.142	0.169	0.147	0.135	0.815	1.63
99%	uT	0.115	0.205	0.198	0.137	0.146	0.178	--	--
99%	A/m	0.115	0.164	0.158	0.109	0.117	0.142	0.815	1.63

H-Field Strength at 20cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.115	0.175	--	--
1%	A/m	0.115	0.140	0.815	1.63
50%	uT	0.115	0.123	--	--
50%	A/m	0.115	0.098	0.815	1.63
99%	uT	0.115	0.165	--	--
99%	A/m	0.115	0.132	0.815	1.63

Note: A/m=uT/1.25

10. Test Set-up Photo**Test Set-up Photo**

-----END OF REPORT-----