

DUT: Notebook; Type: P206; Serial: 19060300103

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 40.186$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.97, 6.97, 6.97) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Screen Back/WLAN 2.4G 802.11b Mid power level 13/Area Scan (101x101x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.795 W/kg

Body Screen Back/WLAN 2.4G 802.11b Mid power level 13/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.210 V/m; Power Drift = -0.51 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.225 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.725 W/kg

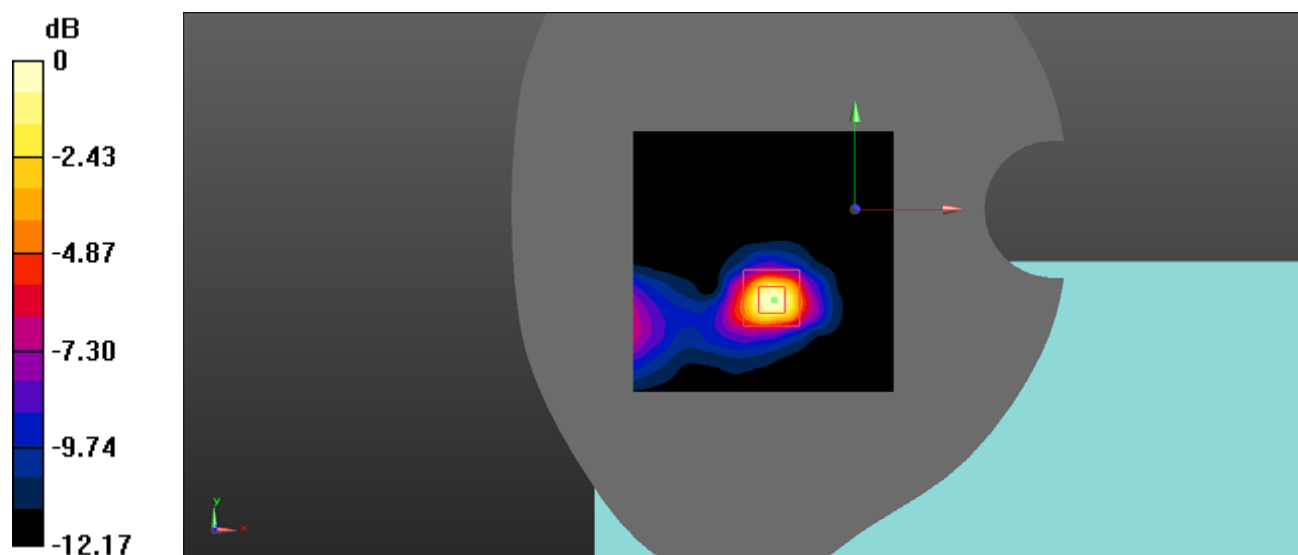

0 dB = 0.725 W/kg = -1.40 dBW/kg

DUT: Notebook; Type: P206; Serial: 19060300103

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 40.186$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.97, 6.97, 6.97) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Screen Top/WLAN 2.4G 802.11b Mid power level 13/Area Scan (101x101x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.168 W/kg

Body Screen Top/WLAN 2.4G 802.11b Mid power level 13/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.155 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.080 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.168 W/kg

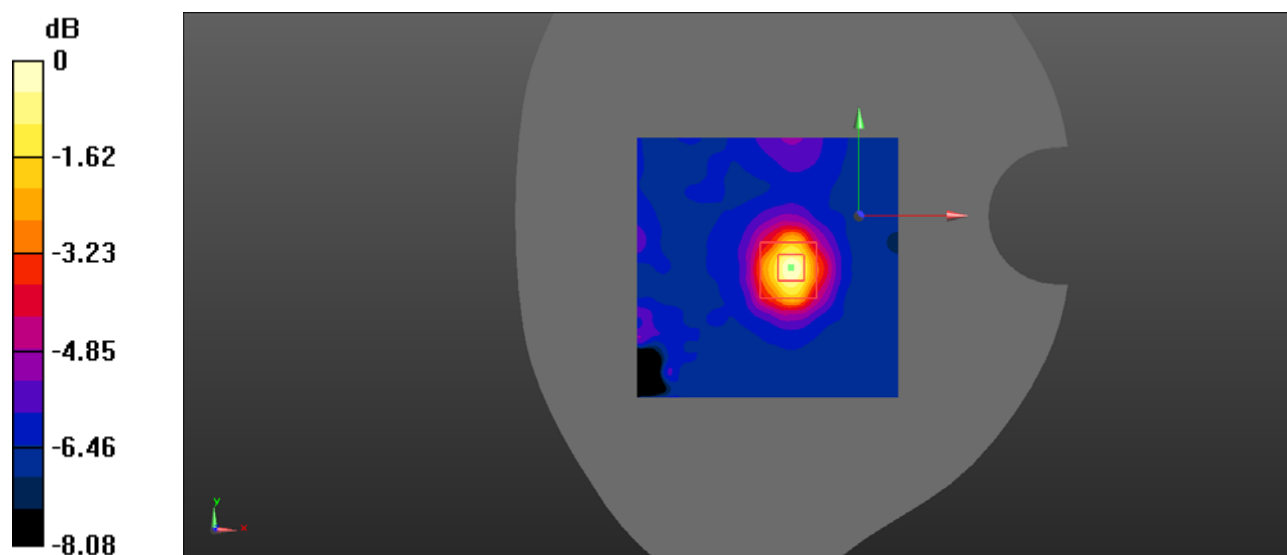

0 dB = 0.168 W/kg = -7.75 dBW/kg

DUT: Notebook; Type: P206; Serial: 19060300103

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.675 \text{ S/m}$; $\epsilon_r = 36.536$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.05, 5.05, 5.05) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Screen Back/WLAN 5.2G 802.11n20 Mid power level 13/Area Scan (101x101x1): Interpolated grid:

$dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.944 W/kg

Body Screen Back/WLAN 5.2G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube


0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.536 V/m; Power Drift = -0.25 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.217 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.875 W/kg

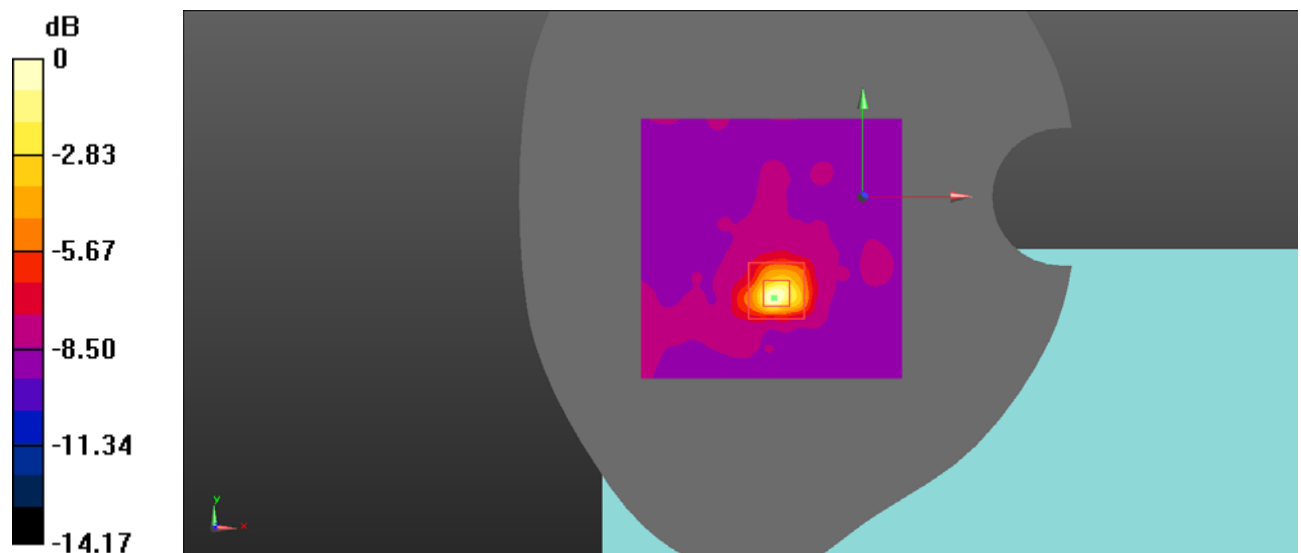

0 dB = 0.875 W/kg = -0.58 dBW/kg

DUT: Notebook; Type: P206; Serial: 19060300103

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.675$ S/m; $\epsilon_r = 36.536$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.05, 5.05, 5.05) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Screen Top/WLAN 5.2G 802.11n20 Mid power level 13/Area Scan (101x101x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.258 W/kg

Body Screen Top/WLAN 5.2G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube


0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.576 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.142 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.265 W/kg

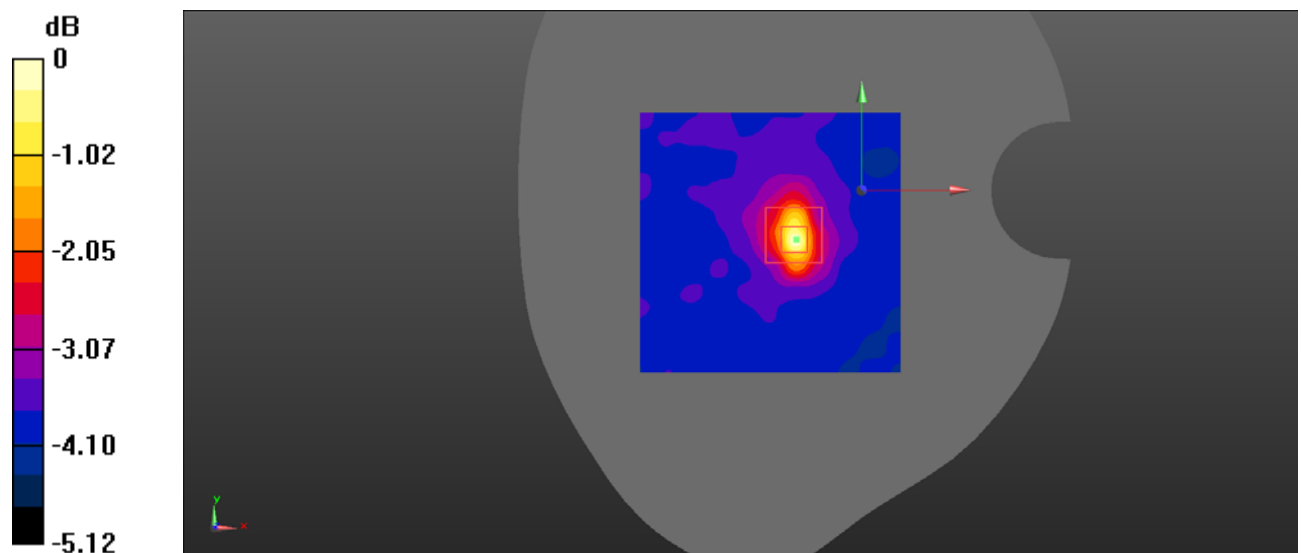

0 dB = 0.265 W/kg = -5.77 dBW/kg

DUT: Notebook; Type: P206; Serial: 19060300103

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.388$ S/m; $\epsilon_r = 35.534$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.76, 4.76, 4.76) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Screen Back/WLAN 5.8G 802.11n20 Mid power level 13/Area Scan (101x101x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.739 W/kg

Body Screen Back/WLAN 5.8G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube


0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.371 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.227 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.796 W/kg

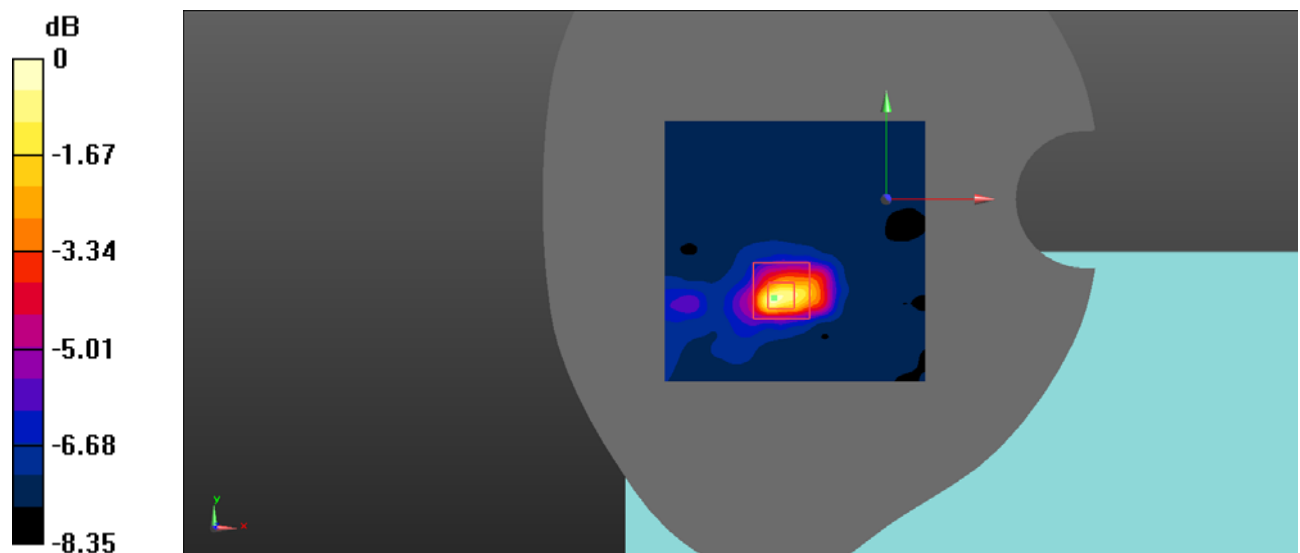

0 dB = 0.796 W/kg = -0.99 dBW/kg

DUT: Notebook; Type: P206; Serial: 19060300103

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.388$ S/m; $\epsilon_r = 35.534$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.76, 4.76, 4.76) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Screen Top/WLAN 5.8G 802.11n20 Mid power level 13/Area Scan (101x101x1): Interpolated grid:

$dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.425 W/kg

Body Screen Top/WLAN 5.8G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube


0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.033 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.187 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.401 W/kg

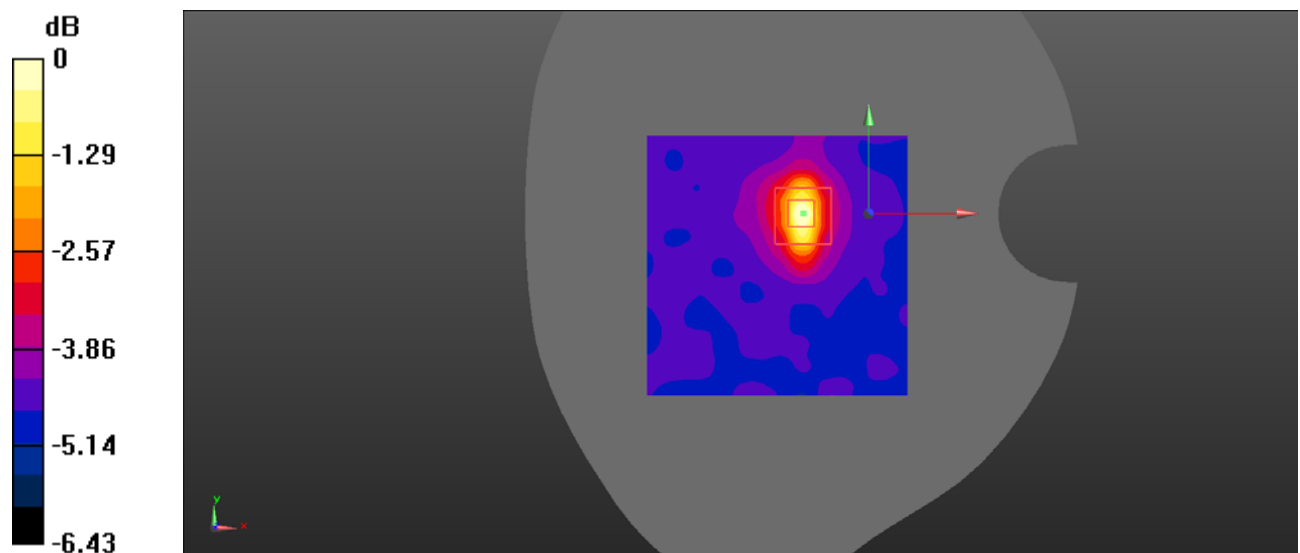

0 dB = 0.401 W/kg = -3.97 dBW/kg