

## EXHIBIT A. RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →  
 30M-1G  
 WIFI2.4G- Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_13.58.18

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

RefEmission Test case\_FCC\_Part15C\_FCC 15.247(2.4G) 30MHz-1GHz

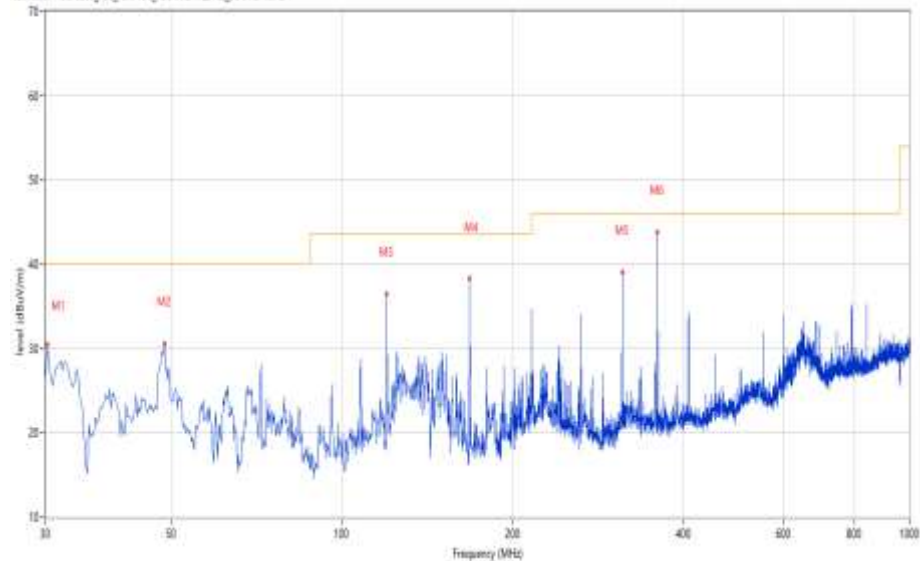

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 30.000          | 26.78            | -23.91      | 40.0           | -13.22          | Peak     | 360.00         | 300         | Horizontal | Pass    |
| 2   | 48.668          | 30.59            | -19.23      | 40.0           | -9.41           | Peak     | 0.00           | 200         | Horizontal | Pass    |
| 3   | 119.945         | 36.45            | -22.48      | 43.5           | -7.05           | Peak     | 124.00         | 200         | Horizontal | Pass    |
| 4   | 167.948         | 38.27            | -23.21      | 43.5           | -5.23           | Peak     | 96.70          | 200         | Horizontal | Pass    |
| 5   | 311.957         | 38.98            | -17.57      | 46.0           | -7.02           | Peak     | 67.80          | 100         | Horizontal | Pass    |
| 6   | 359.960         | 43.76            | -16.33      | 46.0           | -2.24           | Peak     | 64.10          | 100         | Horizontal | Pass    |

## WIFI2.4G-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2021-11-04\_13.51.35

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

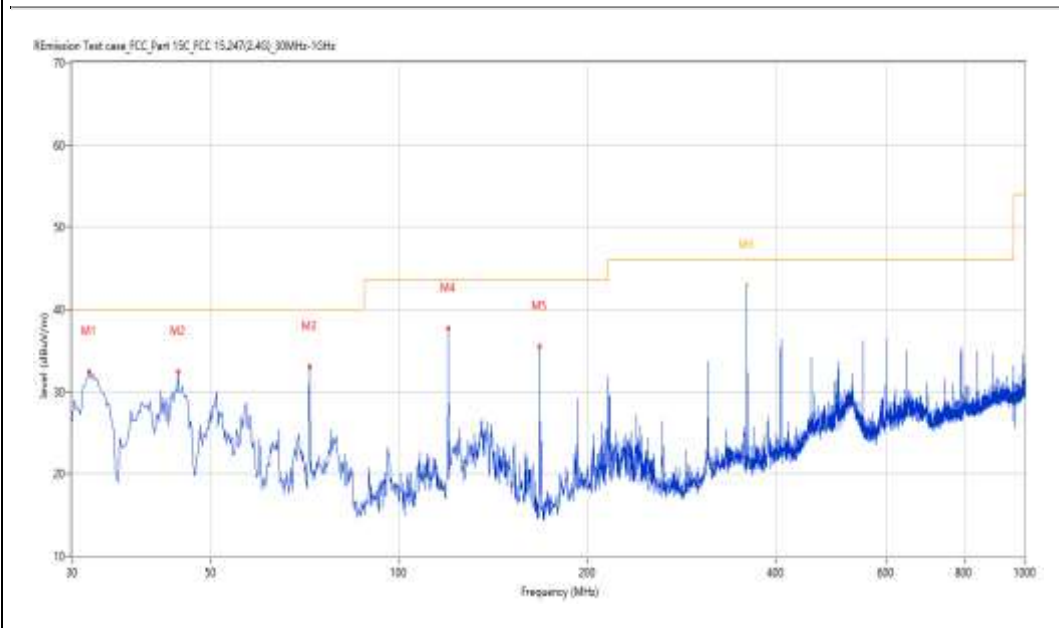

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 31.940          | 32.45            | -23.27      | 40.0           | -7.55           | Peak     | 315.20         | 100         | Vertical | Pass    |
| 2   | 44.304          | 32.41            | -19.50      | 40.0           | -7.59           | Peak     | 307.50         | 100         | Vertical | Pass    |
| 3   | 71.942          | 33.06            | -24.20      | 40.0           | -6.94           | Peak     | 81.30          | 100         | Vertical | Pass    |
| 4   | 119.945         | 37.72            | -22.48      | 43.5           | -5.78           | Peak     | 109.10         | 100         | Vertical | Pass    |
| 5   | 167.948         | 35.50            | -23.21      | 43.5           | -8.00           | Peak     | 163.20         | 100         | Vertical | Pass    |
| 6   | 360.000         | 43.62            | -16.33      | 46.0           | -2.38           | Peak     | 32.20          | 117         | Vertical | Pass    |
| 6*  | 360.000         | 42.92            | -16.33      | 46.0           | -3.08           | QP       | 32.20          | 117         | Vertical | Pass    |

1-18G

WIFI2.4G-B- Low channel-Horizontal-TX

## Test result

Project Number: Certification

Test Time: 2021-11-01\_18.04.05

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

Revision Test case\_FCC\_Part 15C\_FCC 15.24724G\_1GHz-7GHz

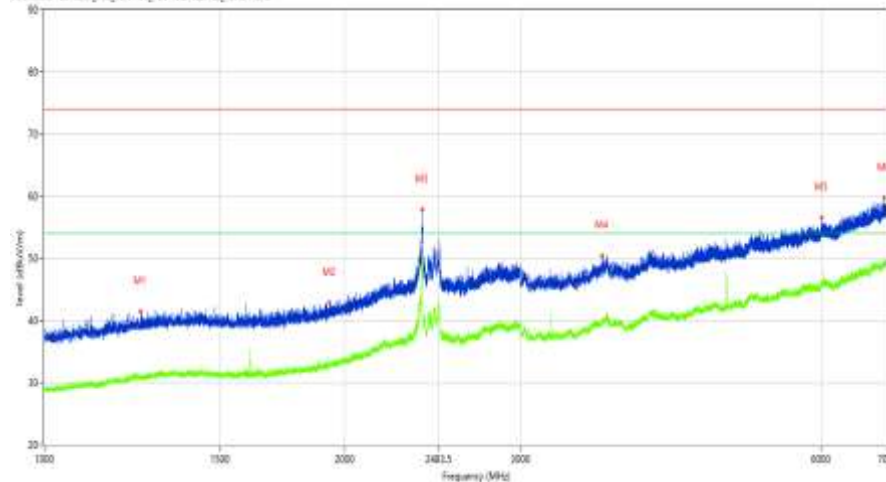

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1248.469        | 41.37            | -13.20      | 74.0           | -32.63          | Peak     | 159.40         | 100         | Vertical | Pass    |
| 1** | 1248.469        | 31.07            | -13.20      | 54.0           | -22.93          | AV       | 159.40         | 100         | Vertical | Pass    |
| 2   | 1930.134        | 42.90            | -11.53      | 74.0           | -31.10          | Peak     | 297.20         | 100         | Vertical | Pass    |
| 2** | 1930.134        | 32.88            | -11.53      | 54.0           | -21.12          | AV       | 297.20         | 100         | Vertical | Pass    |
| 3   | 2391.326        | 57.80            | -5.19       | 74.0           | -16.20          | Peak     | 195.30         | 100         | Vertical | Pass    |
| 3** | 2391.326        | 51.86            | -5.19       | 54.0           | -2.14           | AV       | 195.30         | 100         | Vertical | Pass    |
| 4   | 3618.423        | 50.46            | -1.75       | 74.0           | -23.54          | Peak     | 0.10           | 100         | Vertical | Pass    |
| 4** | 3618.423        | 39.76            | -1.75       | 54.0           | -14.24          | AV       | 0.10           | 100         | Vertical | Pass    |
| 5   | 6009.624        | 56.56            | 2.72        | 74.0           | -17.44          | Peak     | 162.60         | 100         | Vertical | Pass    |
| 5** | 6009.624        | 45.53            | 2.72        | 54.0           | -8.47           | AV       | 162.60         | 100         | Vertical | Pass    |
| 6   | 6942.507        | 59.72            | 5.15        | 74.0           | -14.28          | Peak     | 341.20         | 100         | Vertical | Pass    |
| 6** | 6942.507        | 49.40            | 5.15        | 54.0           | -4.60           | AV       | 341.20         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.17.18

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8055.736        | 30.45            | -0.61       | 74.0           | -43.55          | Peak     | 198.70         | 100         | Horizontal | Pass    |
| 1** | 8055.736        | 21.49            | -0.61       | 54.0           | -32.51          | AV       | 198.70         | 100         | Horizontal | Pass    |
| 2   | 8798.050        | 32.78            | 0.00        | 74.0           | -41.22          | Peak     | 73.00          | 100         | Horizontal | Pass    |
| 2** | 8798.050        | 24.05            | 0.00        | 54.0           | -29.95          | AV       | 73.00          | 100         | Horizontal | Pass    |
| 3   | 11244.939       | 39.75            | 6.83        | 74.0           | -34.25          | Peak     | 267.60         | 100         | Horizontal | Pass    |
| 3** | 11244.939       | 31.25            | 6.83        | 54.0           | -22.75          | AV       | 267.60         | 100         | Horizontal | Pass    |
| 4   | 14167.458       | 47.34            | 14.11       | 74.0           | -26.66          | Peak     | 182.60         | 100         | Horizontal | Pass    |
| 4** | 14167.458       | 39.00            | 14.11       | 54.0           | -15.00          | AV       | 182.60         | 100         | Horizontal | Pass    |
| 5   | 17527.118       | 49.66            | 15.56       | 74.0           | -24.34          | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 5** | 17527.118       | 41.04            | 15.56       | 54.0           | -12.96          | AV       | 360.00         | 100         | Horizontal | Pass    |
| 6   | 18000.000       | 56.34            | 22.92       | 74.0           | -17.66          | Peak     | 287.60         | 100         | Horizontal | Pass    |
| 6** | 18000.000       | 47.26            | 22.92       | 54.0           | -6.74           | AV       | 287.60         | 100         | Horizontal | Pass    |

## WIFI2.4G-B-Low channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.41.32

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

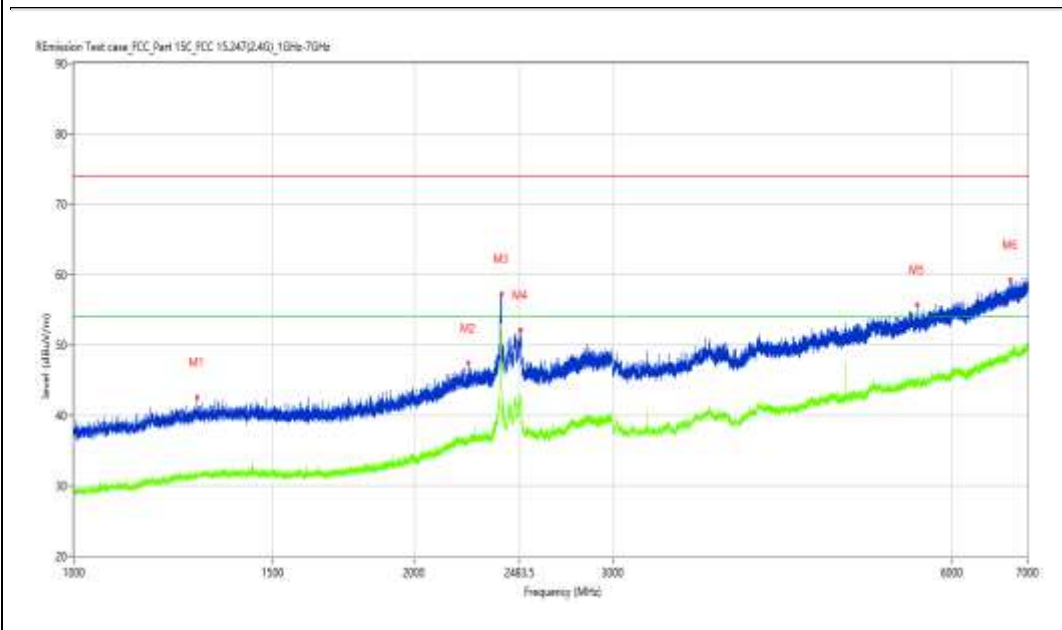

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1284.964        | 42.62            | -12.89      | 74.0           | -31.38          | Peak     | 115.50         | 100         | Vertical | Pass    |
| 1** | 1284.964        | 31.56            | -12.89      | 54.0           | -22.44          | AV       | 115.50         | 100         | Vertical | Pass    |
| 2   | 2237.095        | 47.42            | -8.11       | 74.0           | -26.58          | Peak     | 52.50          | 100         | Vertical | Pass    |
| 2** | 2237.095        | 36.46            | -8.11       | 54.0           | -17.54          | AV       | 52.50          | 100         | Vertical | Pass    |
| 3   | 2391.076        | 57.29            | -5.58       | 74.0           | -16.71          | Peak     | 333.60         | 100         | Vertical | Pass    |
| 3** | 2391.076        | 53.09            | -5.58       | 54.0           | -0.91           | AV       | 333.60         | 100         | Vertical | Pass    |
| 4   | 2486.814        | 52.13            | -1.90       | 74.0           | -21.87          | Peak     | 25.40          | 100         | Vertical | Pass    |
| 4** | 2486.814        | 42.45            | -1.90       | 54.0           | -11.55          | AV       | 25.40          | 100         | Vertical | Pass    |
| 5   | 5590.676        | 55.72            | 1.50        | 74.0           | -18.28          | Peak     | 23.40          | 100         | Vertical | Pass    |
| 5** | 5590.676        | 45.15            | 1.50        | 54.0           | -8.85           | AV       | 23.40          | 100         | Vertical | Pass    |
| 6   | 6755.031        | 59.33            | 4.90        | 74.0           | -14.67          | Peak     | 359.50         | 100         | Vertical | Pass    |
| 6** | 6755.031        | 48.58            | 4.90        | 54.0           | -5.42           | AV       | 359.50         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_11.33.31

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7943.014        | 30.71            | -1.69       | 74.0           | -43.29          | Peak     | 360.00         | 100         | Vertical | Pass    |
| 1** | 7943.014        | 22.64            | -1.69       | 54.0           | -31.36          | AV       | 360.00         | 100         | Vertical | Pass    |
| 2   | 9144.464        | 33.80            | 2.24        | 74.0           | -40.20          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 2** | 9144.464        | 25.34            | 2.24        | 54.0           | -28.66          | AV       | 0.00           | 100         | Vertical | Pass    |
| 3   | 10134.216       | 36.97            | 4.37        | 74.0           | -37.03          | Peak     | 336.20         | 100         | Vertical | Pass    |
| 3** | 10134.216       | 28.32            | 4.37        | 54.0           | -25.68          | AV       | 336.20         | 100         | Vertical | Pass    |
| 4   | 11310.922       | 40.24            | 7.19        | 74.0           | -33.76          | Peak     | 78.00          | 100         | Vertical | Pass    |
| 4** | 11310.922       | 30.41            | 7.19        | 54.0           | -23.59          | AV       | 78.00          | 100         | Vertical | Pass    |
| 5   | 14164.709       | 46.70            | 14.02       | 74.0           | -27.30          | Peak     | 348.20         | 100         | Vertical | Pass    |
| 5** | 14164.709       | 37.84            | 14.02       | 54.0           | -16.16          | AV       | 348.20         | 100         | Vertical | Pass    |
| 6   | 18000.000       | 56.07            | 22.92       | 74.0           | -17.93          | Peak     | 117.50         | 100         | Vertical | Pass    |
| 6** | 18000.000       | 47.24            | 22.92       | 54.0           | -6.76           | AV       | 117.50         | 100         | Vertical | Pass    |

## WIFI2.4G-B-Middle channel-Horizontal-TX

### Test result

Project Number: 1744444

Test Time: 2021-11-04\_10.05.32

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

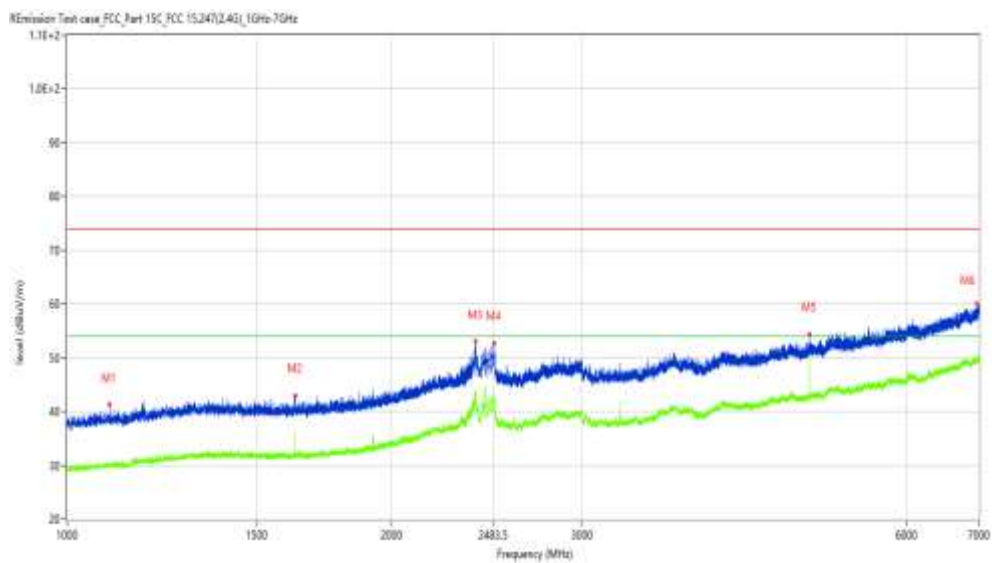

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1095.488        | 41.24            | -14.22      | 74.0           | -32.76          | Peak     | 116.20         | 100         | Horizontal | Pass    |
| 1** | 1095.488        | 30.11            | -14.22      | 54.0           | -23.89          | AV       | 116.20         | 100         | Horizontal | Pass    |
| 2   | 1627.922        | 43.01            | -12.99      | 74.0           | -30.99          | Peak     | 84.40          | 100         | Horizontal | Pass    |
| 2** | 1627.922        | 32.23            | -12.99      | 54.0           | -21.77          | AV       | 84.40          | 100         | Horizontal | Pass    |
| 3   | 2390.326        | 53.08            | -5.90       | 74.0           | -20.92          | Peak     | 29.40          | 100         | Horizontal | Pass    |
| 3** | 2390.326        | 43.65            | -5.90       | 54.0           | -10.35          | AV       | 29.40          | 100         | Horizontal | Pass    |
| 4   | 2487.314        | 52.77            | -1.89       | 74.0           | -21.23          | Peak     | 65.30          | 100         | Horizontal | Pass    |
| 4** | 2487.314        | 42.76            | -1.89       | 54.0           | -11.24          | AV       | 65.30          | 100         | Horizontal | Pass    |
| 5   | 4873.766        | 54.34            | 0.05        | 74.0           | -19.66          | Peak     | 287.80         | 100         | Horizontal | Pass    |
| 5** | 4873.766        | 49.78            | 0.05        | 54.0           | -4.22           | AV       | 287.80         | 100         | Horizontal | Pass    |
| 6   | 6970.004        | 60.03            | 5.33        | 74.0           | -13.97          | Peak     | 226.90         | 100         | Horizontal | Pass    |
| 6** | 6970.004        | 49.57            | 5.33        | 54.0           | -4.43           | AV       | 226.90         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10:18:49

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7981.505        | 30.41            | -1.33       | 74.0           | -43.59          | Peak     | 286.00         | 100         | Horizontal | Pass    |
| 1** | 7981.505        | 21.50            | -1.33       | 54.0           | -32.50          | AV       | 286.00         | 100         | Horizontal | Pass    |
| 2   | 8996.001        | 32.81            | 2.65        | 74.0           | -41.19          | Peak     | 185.70         | 100         | Horizontal | Pass    |
| 2** | 8996.001        | 23.99            | 2.65        | 54.0           | -30.01          | AV       | 185.70         | 100         | Horizontal | Pass    |
| 3   | 10125.969       | 36.78            | 4.44        | 74.0           | -37.22          | Peak     | 189.40         | 100         | Horizontal | Pass    |
| 3** | 10125.969       | 29.38            | 4.44        | 54.0           | -24.62          | AV       | 189.40         | 100         | Horizontal | Pass    |
| 4   | 11200.950       | 39.62            | 6.27        | 74.0           | -34.38          | Peak     | 350.90         | 100         | Horizontal | Pass    |
| 4** | 11200.950       | 30.34            | 6.27        | 54.0           | -23.66          | AV       | 350.90         | 100         | Horizontal | Pass    |
| 5   | 14197.701       | 47.25            | 14.55       | 74.0           | -26.75          | Peak     | 93.60          | 100         | Horizontal | Pass    |
| 5** | 14197.701       | 38.89            | 14.55       | 54.0           | -15.11          | AV       | 93.60          | 100         | Horizontal | Pass    |
| 6   | 17818.545       | 53.00            | 17.14       | 74.0           | -21.00          | Peak     | 93.60          | 100         | Horizontal | Pass    |
| 6** | 17818.545       | 44.14            | 17.14       | 54.0           | -9.86           | AV       | 93.60          | 100         | Horizontal | Pass    |

## WIFI2.4G-B-Middle channel-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2021-11-04\_10.44.16

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

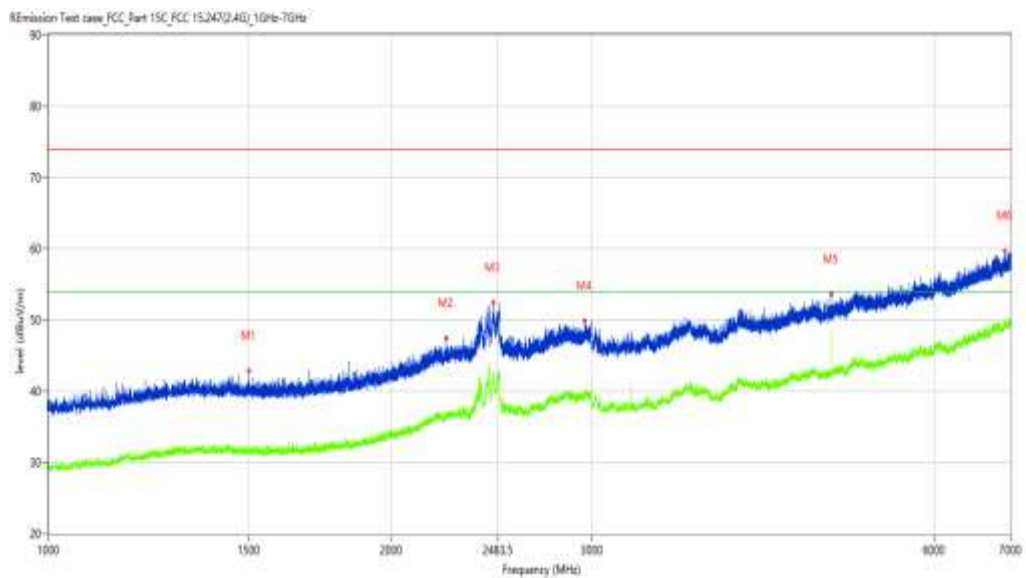

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1500.937        | 42.82            | -13.06      | 74.0           | -31.18          | Peak     | 140.30         | 100         | Vertical | Pass    |
| 1** | 1500.937        | 31.71            | -13.06      | 54.0           | -22.29          | AV       | 140.30         | 100         | Vertical | Pass    |
| 2   | 2235.096        | 47.49            | -8.11       | 74.0           | -26.51          | Peak     | 34.30          | 100         | Vertical | Pass    |
| 2** | 2235.096        | 36.64            | -8.11       | 54.0           | -17.36          | AV       | 34.30          | 100         | Vertical | Pass    |
| 3   | 2458.568        | 52.37            | -2.58       | 74.0           | -21.63          | Peak     | 65.80          | 100         | Vertical | Pass    |
| 3** | 2458.568        | 42.42            | -2.58       | 54.0           | -11.58          | AV       | 65.80          | 100         | Vertical | Pass    |
| 4   | 2961.255        | 49.90            | -3.41       | 74.0           | -24.10          | Peak     | 10.20          | 100         | Vertical | Pass    |
| 4** | 2961.255        | 39.84            | -3.41       | 54.0           | -14.16          | AV       | 10.20          | 100         | Vertical | Pass    |
| 5   | 4873.766        | 53.56            | 0.05        | 74.0           | -20.44          | Peak     | 347.70         | 100         | Vertical | Pass    |
| 5** | 4873.766        | 48.76            | 0.05        | 54.0           | -5.24           | AV       | 347.70         | 100         | Vertical | Pass    |
| 6   | 6917.510        | 59.70            | 5.07        | 74.0           | -14.30          | Peak     | 156.50         | 100         | Vertical | Pass    |
| 6** | 6917.510        | 49.61            | 5.07        | 54.0           | -4.39           | AV       | 156.50         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_11.35.07

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 8066.733        | 30.62            | -0.84       | 74.0           | -43.38          | Peak     | 333.30         | 100         | Vertical | Pass    |
| 1** | 8066.733        | 21.26            | -0.84       | 54.0           | -32.74          | AV       | 333.30         | 100         | Vertical | Pass    |
| 2   | 8740.315        | 33.00            | -0.32       | 74.0           | -41.00          | Peak     | 131.30         | 100         | Vertical | Pass    |
| 2** | 8740.315        | 22.74            | -0.32       | 54.0           | -31.26          | AV       | 131.30         | 100         | Vertical | Pass    |
| 3   | 10120.470       | 37.68            | 4.49        | 74.0           | -36.32          | Peak     | 30.30          | 100         | Vertical | Pass    |
| 3** | 10120.470       | 28.44            | 4.49        | 54.0           | -25.56          | AV       | 30.30          | 100         | Vertical | Pass    |
| 4   | 12383.154       | 40.69            | 7.15        | 74.0           | -33.31          | Peak     | 57.20          | 100         | Vertical | Pass    |
| 4** | 12383.154       | 31.98            | 7.15        | 54.0           | -22.02          | AV       | 57.20          | 100         | Vertical | Pass    |
| 5   | 14227.943       | 46.92            | 13.86       | 74.0           | -27.08          | Peak     | 299.00         | 100         | Vertical | Pass    |
| 5** | 14227.943       | 37.81            | 13.86       | 54.0           | -16.19          | AV       | 299.00         | 100         | Vertical | Pass    |
| 6   | 18000.000       | 55.43            | 22.92       | 74.0           | -18.57          | Peak     | 64.90          | 100         | Vertical | Pass    |
| 6** | 18000.000       | 46.94            | 22.92       | 54.0           | -7.06           | AV       | 64.90          | 100         | Vertical | Pass    |

## WIFI2.4G-B-High channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.03.09

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

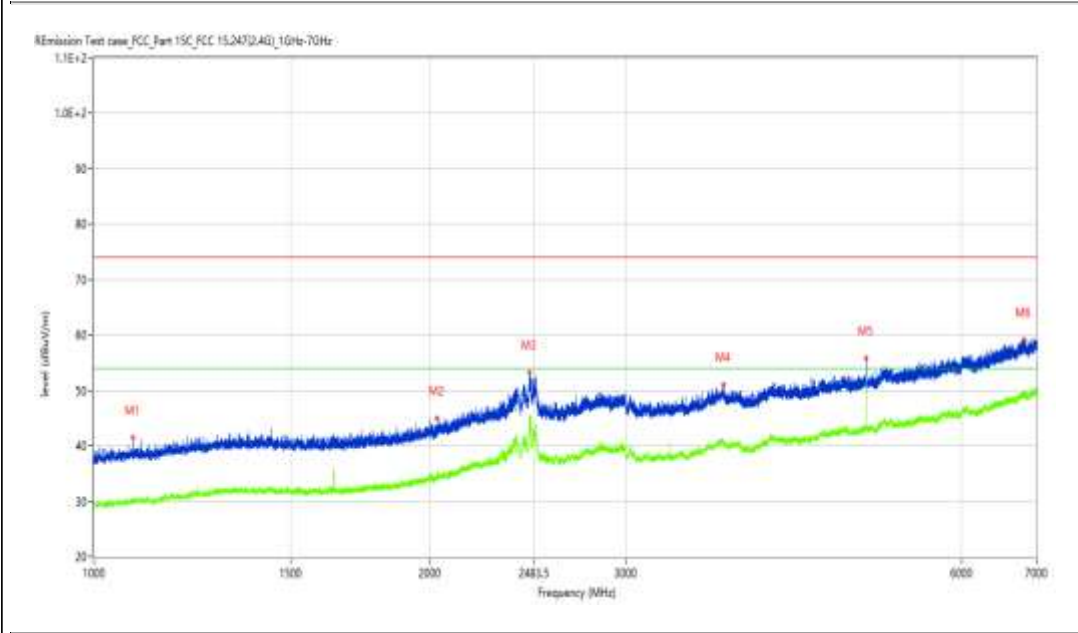

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1084.489        | 41.40            | -14.24      | 74.0           | -32.60          | Peak     | 0.60           | 100         | Horizontal | Pass    |
| 1** | 1084.489        | 30.22            | -14.24      | 54.0           | -23.78          | AV       | 0.60           | 100         | Horizontal | Pass    |
| 2   | 2032.121        | 44.99            | -10.65      | 74.0           | -29.01          | Peak     | 294.40         | 100         | Horizontal | Pass    |
| 2** | 2032.121        | 34.23            | -10.65      | 54.0           | -19.77          | AV       | 294.40         | 100         | Horizontal | Pass    |
| 3   | 2459.068        | 53.18            | -2.56       | 74.0           | -20.82          | Peak     | 32.50          | 100         | Horizontal | Pass    |
| 3** | 2459.068        | 45.24            | -2.56       | 54.0           | -8.76           | AV       | 32.50          | 100         | Horizontal | Pass    |
| 4   | 3670.416        | 51.04            | -1.80       | 74.0           | -22.96          | Peak     | 21.90          | 100         | Horizontal | Pass    |
| 4** | 3670.416        | 40.72            | -1.80       | 54.0           | -13.28          | AV       | 21.90          | 100         | Horizontal | Pass    |
| 5   | 4923.760        | 55.83            | 0.16        | 74.0           | -18.17          | Peak     | 276.70         | 100         | Horizontal | Pass    |
| 5** | 4923.760        | 52.26            | 0.16        | 54.0           | -1.74           | AV       | 276.70         | 100         | Horizontal | Pass    |
| 6   | 6817.023        | 59.16            | 5.12        | 74.0           | -14.84          | Peak     | 78.70          | 100         | Horizontal | Pass    |
| 6** | 6817.023        | 49.03            | 5.12        | 54.0           | -4.97           | AV       | 78.70          | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.20.24

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

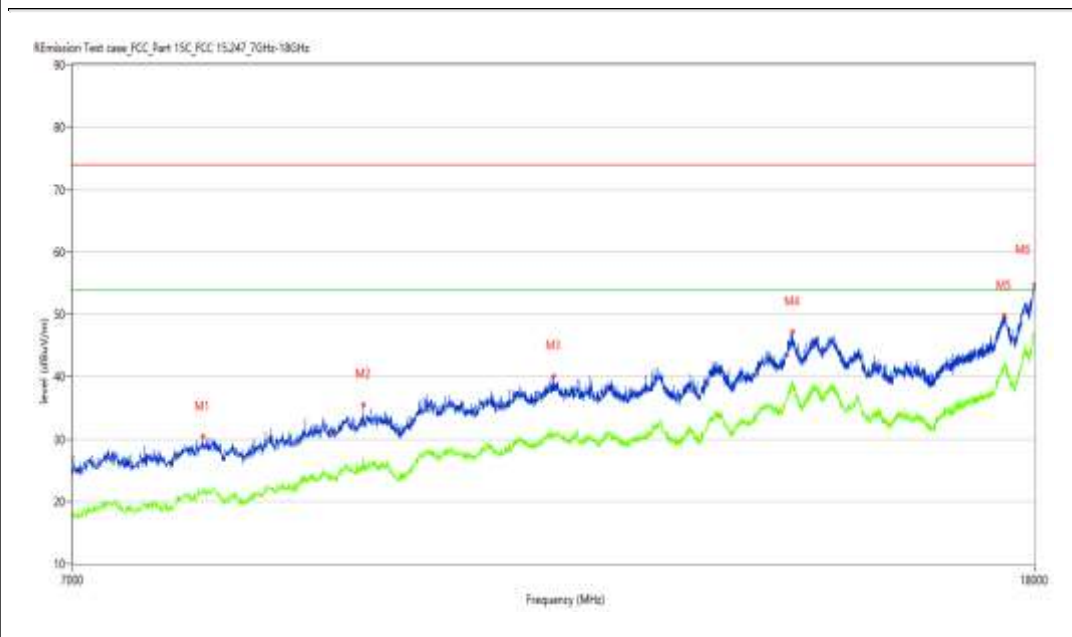

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7956.761        | 30.38            | -1.57       | 74.0           | -43.62          | Peak     | 83.20          | 100         | Horizontal | Pass    |
| 1** | 7956.761        | 21.75            | -1.57       | 54.0           | -32.25          | AV       | 83.20          | 100         | Horizontal | Pass    |
| 2   | 9314.921        | 35.46            | 2.03        | 74.0           | -38.54          | Peak     | 341.70         | 100         | Horizontal | Pass    |
| 2** | 9314.921        | 27.11            | 2.03        | 54.0           | -26.89          | AV       | 341.70         | 100         | Horizontal | Pass    |
| 3   | 11231.192       | 40.11            | 6.64        | 74.0           | -33.89          | Peak     | 357.00         | 100         | Horizontal | Pass    |
| 3** | 11231.192       | 30.73            | 6.64        | 54.0           | -23.27          | AV       | 357.00         | 100         | Horizontal | Pass    |
| 4   | 14197.701       | 47.18            | 14.55       | 74.0           | -26.82          | Peak     | 119.30         | 100         | Horizontal | Pass    |
| 4** | 14197.701       | 39.13            | 14.55       | 54.0           | -14.87          | AV       | 119.30         | 100         | Horizontal | Pass    |
| 5   | 17472.132       | 49.80            | 16.29       | 74.0           | -24.20          | Peak     | 167.50         | 100         | Horizontal | Pass    |
| 5** | 17472.132       | 41.80            | 16.29       | 54.0           | -12.20          | AV       | 167.50         | 100         | Horizontal | Pass    |
| 6   | 18000.000       | 54.80            | 22.92       | 74.0           | -19.20          | Peak     | 171.80         | 100         | Horizontal | Pass    |
| 6** | 18000.000       | 46.90            | 22.92       | 54.0           | -7.10           | AV       | 171.80         | 100         | Horizontal | Pass    |

## WIFI2.4G-B-High channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.46.49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

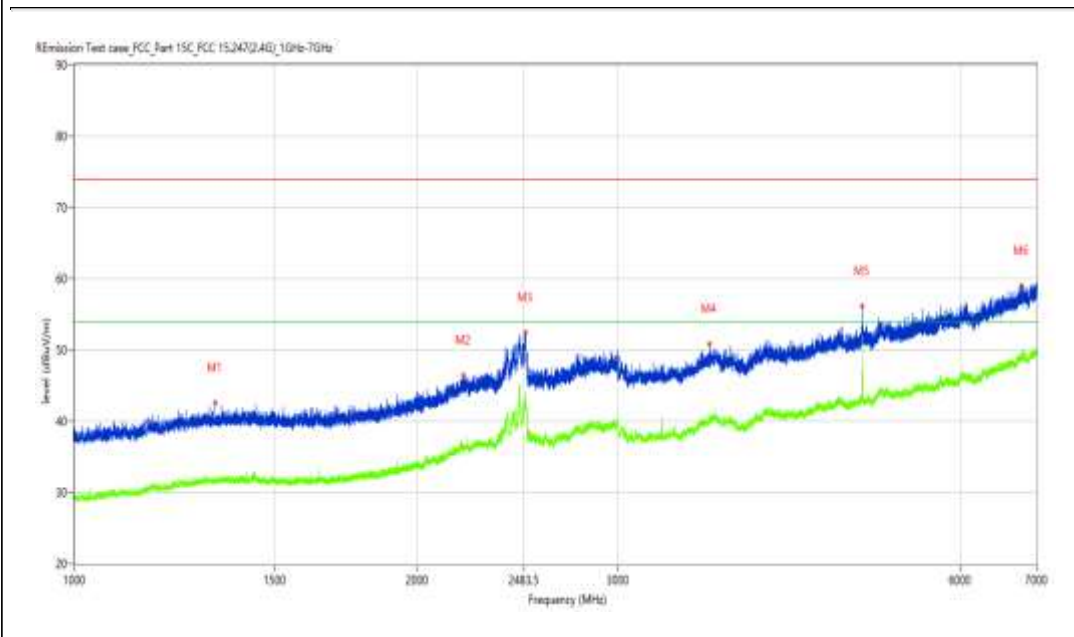

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1329.959        | 42.53            | -12.91      | 74.0           | -31.47          | Peak     | 93.00          | 100         | Vertical | Pass    |
| 1** | 1329.959        | 31.64            | -12.91      | 54.0           | -22.36          | AV       | 93.00          | 100         | Vertical | Pass    |
| 2   | 2196.100        | 46.40            | -7.88       | 74.0           | -27.60          | Peak     | 253.30         | 100         | Vertical | Pass    |
| 2** | 2196.100        | 36.44            | -7.88       | 54.0           | -17.56          | AV       | 253.30         | 100         | Vertical | Pass    |
| 3   | 2490.314        | 52.45            | -2.63       | 74.0           | -21.55          | Peak     | 333.90         | 100         | Vertical | Pass    |
| 3** | 2490.314        | 43.36            | -2.63       | 54.0           | -10.64          | AV       | 333.90         | 100         | Vertical | Pass    |
| 4   | 3614.423        | 50.79            | -1.86       | 74.0           | -23.21          | Peak     | 183.70         | 100         | Vertical | Pass    |
| 4** | 3614.423        | 40.57            | -1.86       | 54.0           | -13.43          | AV       | 183.70         | 100         | Vertical | Pass    |
| 5   | 4923.260        | 56.15            | 0.16        | 74.0           | -17.85          | Peak     | 310.40         | 100         | Vertical | Pass    |
| 5** | 4923.260        | 49.85            | 0.16        | 54.0           | -4.15           | AV       | 310.40         | 100         | Vertical | Pass    |
| 6   | 6794.526        | 59.02            | 5.18        | 74.0           | -14.98          | Peak     | 53.70          | 100         | Vertical | Pass    |
| 6** | 6794.526        | 48.77            | 5.18        | 54.0           | -5.23           | AV       | 53.70          | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_11.36.49

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 8052.987        | 30.46            | -0.56       | 74.0           | -43.54          | Peak     | 104.50         | 100         | Vertical | Pass    |
| 1** | 8052.987        | 22.16            | -0.56       | 54.0           | -31.84          | AV       | 104.50         | 100         | Vertical | Pass    |
| 2   | 9279.180        | 34.86            | 1.53        | 74.0           | -39.14          | Peak     | 297.90         | 100         | Vertical | Pass    |
| 2** | 9279.180        | 25.45            | 1.53        | 54.0           | -28.55          | AV       | 297.90         | 100         | Vertical | Pass    |
| 3   | 10821.545       | 39.02            | 5.78        | 74.0           | -34.98          | Peak     | 254.00         | 100         | Vertical | Pass    |
| 3** | 10821.545       | 30.35            | 5.78        | 54.0           | -23.65          | AV       | 254.00         | 100         | Vertical | Pass    |
| 4   | 14189.453       | 47.66            | 14.73       | 74.0           | -26.34          | Peak     | 213.90         | 100         | Vertical | Pass    |
| 4** | 14189.453       | 38.92            | 14.73       | 54.0           | -15.08          | AV       | 213.90         | 100         | Vertical | Pass    |
| 5   | 14761.310       | 47.45            | 13.84       | 74.0           | -26.55          | Peak     | 309.60         | 100         | Vertical | Pass    |
| 5** | 14761.310       | 38.52            | 13.84       | 54.0           | -15.48          | AV       | 309.60         | 100         | Vertical | Pass    |
| 6   | 17980.755       | 55.44            | 21.73       | 74.0           | -18.56          | Peak     | 351.90         | 100         | Vertical | Pass    |
| 6** | 17980.755       | 46.34            | 21.73       | 54.0           | -7.66           | AV       | 351.90         | 100         | Vertical | Pass    |

## WIFI2.4G-G-Low channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_09.39.14

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

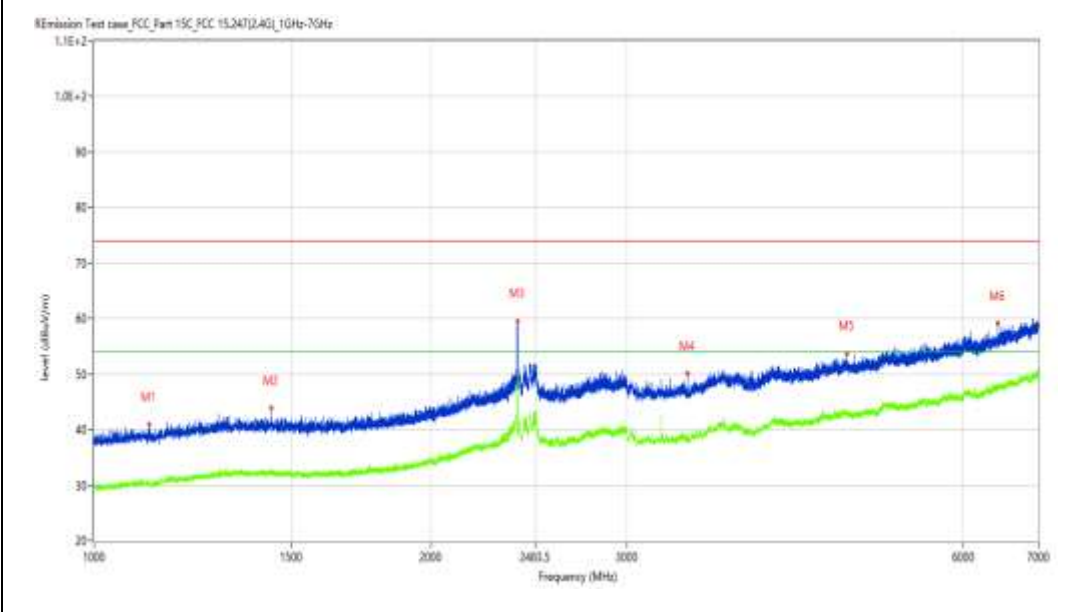

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1119.985        | 40.95            | -14.10      | 74.0           | -33.05          | Peak     | 0.70           | 100         | Horizontal | Pass    |
| 1** | 1119.985        | 30.32            | -14.10      | 54.0           | -23.68          | AV       | 0.70           | 100         | Horizontal | Pass    |
| 2   | 1440.445        | 43.85            | -12.73      | 74.0           | -30.15          | Peak     | 170.00         | 100         | Horizontal | Pass    |
| 2** | 1440.445        | 32.66            | -12.73      | 54.0           | -21.34          | AV       | 170.00         | 100         | Horizontal | Pass    |
| 3   | 2391.826        | 59.55            | -4.42       | 74.0           | -14.45          | Peak     | 31.30          | 100         | Horizontal | Pass    |
| 3** | 2391.826        | 49.37            | -4.42       | 54.0           | -4.63           | AV       | 31.30          | 100         | Horizontal | Pass    |
| 4   | 3395.951        | 50.10            | -4.56       | 74.0           | -23.90          | Peak     | 162.70         | 100         | Horizontal | Pass    |
| 4** | 3395.951        | 39.26            | -4.56       | 54.0           | -14.74          | AV       | 162.70         | 100         | Horizontal | Pass    |
| 5   | 4716.785        | 53.67            | -0.11       | 74.0           | -20.33          | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 5** | 4716.785        | 43.52            | -0.11       | 54.0           | -10.48          | AV       | 360.00         | 100         | Horizontal | Pass    |
| 6   | 6433.571        | 59.15            | 3.82        | 74.0           | -14.85          | Peak     | 312.80         | 100         | Horizontal | Pass    |
| 6** | 6433.571        | 48.24            | 3.82        | 54.0           | -5.76           | AV       | 312.80         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.24.18

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8228.943        | 30.73            | -1.41       | 74.0           | -43.27          | Peak     | 148.00         | 100         | Horizontal | Pass    |
| 1** | 8228.943        | 20.82            | -1.41       | 54.0           | -33.18          | AV       | 148.00         | 100         | Horizontal | Pass    |
| 2   | 9980.255        | 37.18            | 4.40        | 74.0           | -36.82          | Peak     | 28.50          | 100         | Horizontal | Pass    |
| 2** | 9980.255        | 27.78            | 4.40        | 54.0           | -26.22          | AV       | 28.50          | 100         | Horizontal | Pass    |
| 3   | 12457.386       | 41.39            | 7.53        | 74.0           | -32.61          | Peak     | 195.00         | 100         | Horizontal | Pass    |
| 3** | 12457.386       | 32.54            | 7.53        | 54.0           | -21.46          | AV       | 195.00         | 100         | Horizontal | Pass    |
| 4   | 14200.450       | 47.29            | 14.49       | 74.0           | -26.71          | Peak     | 202.70         | 100         | Horizontal | Pass    |
| 4** | 14200.450       | 38.12            | 14.49       | 54.0           | -15.88          | AV       | 202.70         | 100         | Horizontal | Pass    |
| 5   | 17466.633       | 49.74            | 16.19       | 74.0           | -24.26          | Peak     | 323.20         | 100         | Horizontal | Pass    |
| 5** | 17466.633       | 41.38            | 16.19       | 54.0           | -12.62          | AV       | 323.20         | 100         | Horizontal | Pass    |
| 6   | 17829.543       | 53.93            | 17.36       | 74.0           | -20.07          | Peak     | 139.70         | 100         | Horizontal | Pass    |
| 6** | 17829.543       | 43.78            | 17.36       | 54.0           | -10.22          | AV       | 139.70         | 100         | Horizontal | Pass    |

## WIFI2.4G-G-Low channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.49.29

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

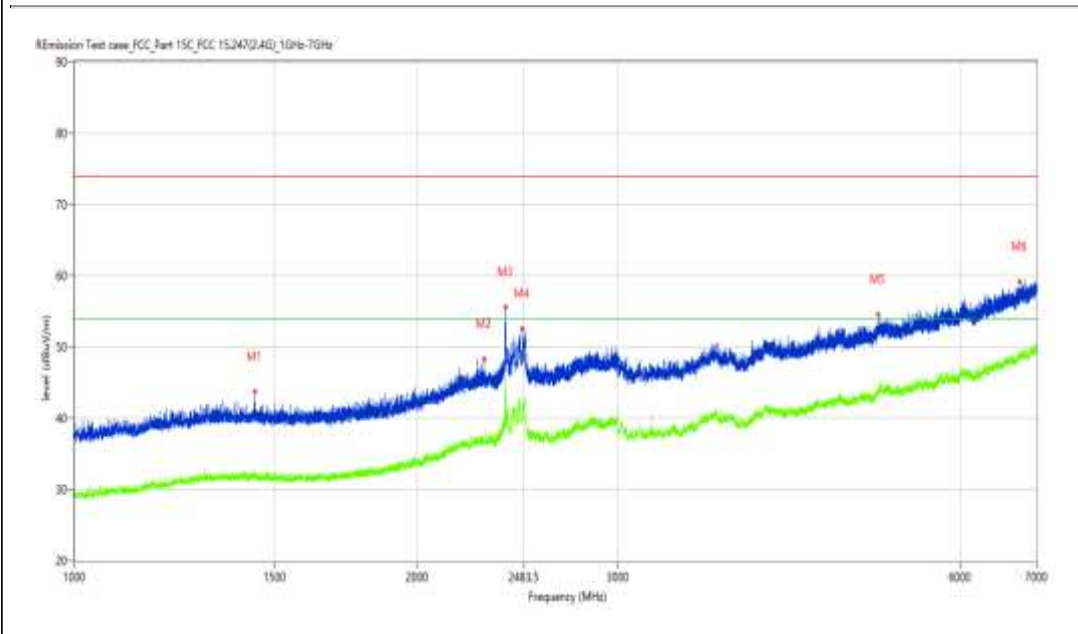

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1439.945        | 43.66            | -12.72      | 74.0           | -30.34          | Peak     | 0.80           | 100         | Vertical | Pass    |
| 1** | 1439.945        | 32.65            | -12.72      | 54.0           | -21.35          | AV       | 0.80           | 100         | Vertical | Pass    |
| 2   | 2291.839        | 48.27            | -7.42       | 74.0           | -25.73          | Peak     | 21.40          | 100         | Vertical | Pass    |
| 2** | 2291.839        | 36.62            | -7.42       | 54.0           | -17.38          | AV       | 21.40          | 100         | Vertical | Pass    |
| 3   | 2392.076        | 55.56            | -4.15       | 74.0           | -18.44          | Peak     | 329.90         | 100         | Vertical | Pass    |
| 3** | 2392.076        | 45.94            | -4.15       | 54.0           | -8.06           | AV       | 329.90         | 100         | Vertical | Pass    |
| 4   | 2473.316        | 52.60            | -2.19       | 74.0           | -21.40          | Peak     | 286.10         | 100         | Vertical | Pass    |
| 4** | 2473.316        | 41.40            | -2.19       | 54.0           | -12.60          | AV       | 286.10         | 100         | Vertical | Pass    |
| 5   | 5081.740        | 54.59            | 1.15        | 74.0           | -19.41          | Peak     | 155.00         | 100         | Vertical | Pass    |
| 5** | 5081.740        | 44.18            | 1.15        | 54.0           | -9.82           | AV       | 155.00         | 100         | Vertical | Pass    |
| 6   | 6767.029        | 59.12            | 5.03        | 74.0           | -14.88          | Peak     | 306.70         | 100         | Vertical | Pass    |
| 6** | 6767.029        | 49.01            | 5.03        | 54.0           | -4.99           | AV       | 306.70         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_13.06.34

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

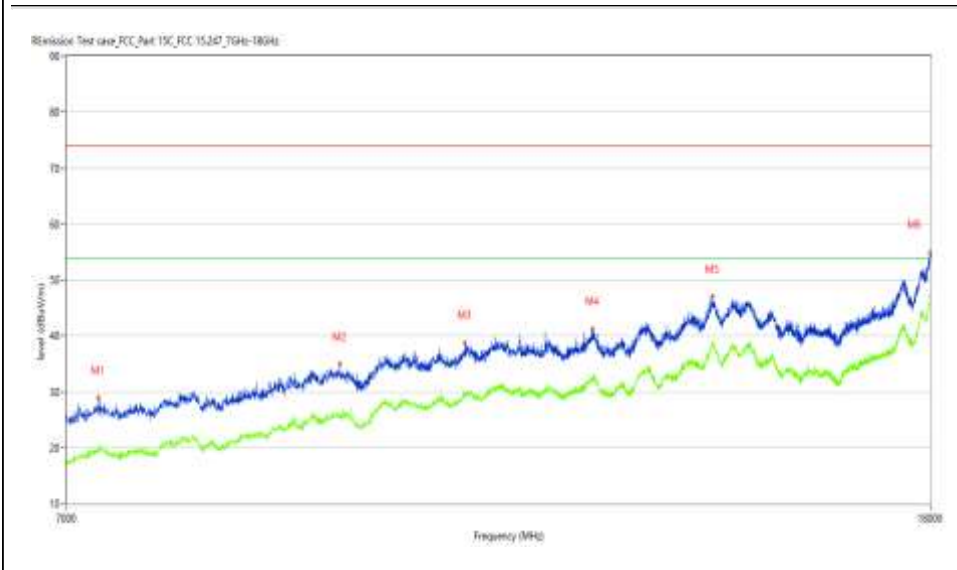

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7208.948        | 26.00            | -3.68       | 74.0           | -48.00          | Peak     | 333.60         | 100         | Vertical | Pass    |
| 1** | 7208.948        | 19.53            | -3.68       | 54.0           | -34.47          | AV       | 333.60         | 100         | Vertical | Pass    |
| 2   | 9441.390        | 34.94            | 2.63        | 74.0           | -39.06          | Peak     | 301.50         | 100         | Vertical | Pass    |
| 2** | 9441.390        | 26.32            | 2.63        | 54.0           | -27.68          | AV       | 301.50         | 100         | Vertical | Pass    |
| 3   | 10821.545       | 38.76            | 5.78        | 74.0           | -35.24          | Peak     | 204.50         | 100         | Vertical | Pass    |
| 3** | 10821.545       | 29.84            | 5.78        | 54.0           | -24.16          | AV       | 204.50         | 100         | Vertical | Pass    |
| 4   | 12443.639       | 41.19            | 7.47        | 74.0           | -32.81          | Peak     | 329.90         | 100         | Vertical | Pass    |
| 4** | 12443.639       | 33.17            | 7.47        | 54.0           | -20.83          | AV       | 329.90         | 100         | Vertical | Pass    |
| 5   | 14183.954       | 46.98            | 14.63       | 74.0           | -27.02          | Peak     | 333.60         | 100         | Vertical | Pass    |
| 5** | 14183.954       | 38.82            | 14.63       | 54.0           | -15.18          | AV       | 333.60         | 100         | Vertical | Pass    |
| 6   | 18000.000       | 54.83            | 22.92       | 74.0           | -19.17          | Peak     | 92.70          | 100         | Vertical | Pass    |
| 6** | 18000.000       | 47.55            | 22.92       | 54.0           | -6.45           | AV       | 92.70          | 100         | Vertical | Pass    |

## WIFI2.4G-G-Middle channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.09.16

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

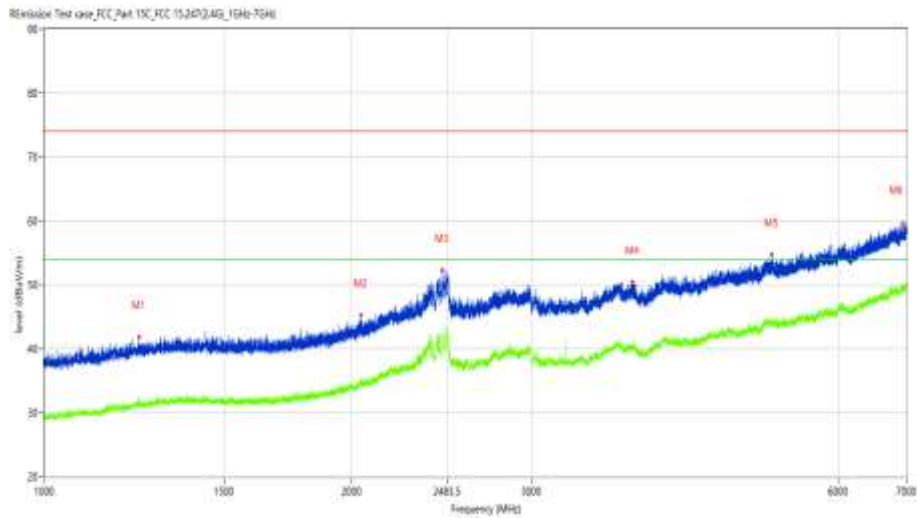

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1238.220        | 41.82            | -13.20      | 74.0           | -32.18          | Peak     | 308.30         | 100         | Horizontal | Pass    |
| 1** | 1238.220        | 31.33            | -13.20      | 54.0           | -22.67          | AV       | 308.30         | 100         | Horizontal | Pass    |
| 2   | 2043.370        | 45.23            | -10.43      | 74.0           | -28.77          | Peak     | 287.90         | 100         | Horizontal | Pass    |
| 2** | 2043.370        | 34.50            | -10.43      | 54.0           | -19.50          | AV       | 287.90         | 100         | Horizontal | Pass    |
| 3   | 2456.818        | 52.31            | -2.63       | 74.0           | -21.69          | Peak     | 276.80         | 100         | Horizontal | Pass    |
| 3** | 2456.818        | 42.03            | -2.63       | 54.0           | -11.97          | AV       | 276.80         | 100         | Horizontal | Pass    |
| 4   | 3772.403        | 50.46            | -1.81       | 74.0           | -23.54          | Peak     | 109.60         | 100         | Horizontal | Pass    |
| 4** | 3772.403        | 40.49            | -1.81       | 54.0           | -13.51          | AV       | 109.60         | 100         | Horizontal | Pass    |
| 5   | 5166.229        | 54.69            | 1.13        | 74.0           | -19.31          | Peak     | 21.30          | 100         | Horizontal | Pass    |
| 5** | 5166.229        | 44.34            | 1.13        | 54.0           | -9.66           | AV       | 21.30          | 100         | Horizontal | Pass    |
| 6   | 6942.507        | 59.64            | 5.15        | 74.0           | -14.36          | Peak     | 248.60         | 100         | Horizontal | Pass    |
| 6** | 6942.507        | 49.20            | 5.15        | 54.0           | -4.80           | AV       | 248.60         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.22.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8215.196        | 30.43            | -1.25       | 74.0           | -43.57          | Peak     | 145.20         | 100         | Horizontal | Pass    |
| 1** | 8215.196        | 21.50            | -1.25       | 54.0           | -32.50          | AV       | 145.20         | 100         | Horizontal | Pass    |
| 2   | 9972.007        | 37.30            | 4.49        | 74.0           | -36.70          | Peak     | 113.70         | 100         | Horizontal | Pass    |
| 2** | 9972.007        | 27.62            | 4.49        | 54.0           | -26.38          | AV       | 113.70         | 100         | Horizontal | Pass    |
| 3   | 11583.104       | 39.82            | 6.36        | 74.0           | -34.18          | Peak     | 173.30         | 100         | Horizontal | Pass    |
| 3** | 11583.104       | 30.51            | 6.36        | 54.0           | -23.49          | AV       | 173.30         | 100         | Horizontal | Pass    |
| 4   | 13103.474       | 43.11            | 8.77        | 74.0           | -30.89          | Peak     | 161.60         | 100         | Horizontal | Pass    |
| 4** | 13103.474       | 33.34            | 8.77        | 54.0           | -20.66          | AV       | 161.60         | 100         | Horizontal | Pass    |
| 5   | 14186.703       | 47.84            | 14.72       | 74.0           | -26.16          | Peak     | 272.50         | 100         | Horizontal | Pass    |
| 5** | 14186.703       | 38.31            | 14.72       | 54.0           | -15.69          | AV       | 272.50         | 100         | Horizontal | Pass    |
| 6   | 17477.631       | 50.43            | 16.40       | 74.0           | -23.57          | Peak     | 339.20         | 100         | Horizontal | Pass    |
| 6** | 17477.631       | 41.10            | 16.40       | 54.0           | -12.90          | AV       | 339.20         | 100         | Horizontal | Pass    |

## WIFI2.4G-G-Middle channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.52.15

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

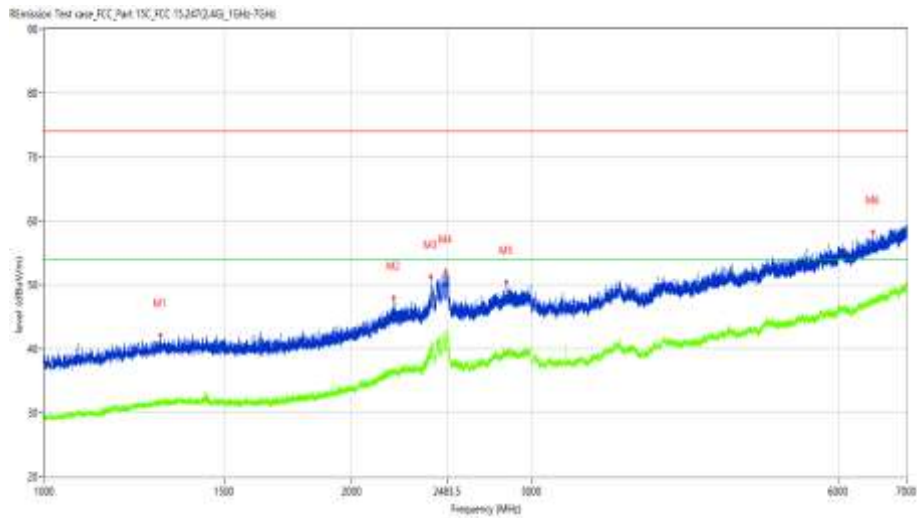

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1300.462        | 42.18            | -12.78      | 74.0           | -31.82          | Peak     | 260.10         | 100         | Vertical | Pass    |
| 1** | 1300.462        | 31.50            | -12.78      | 54.0           | -22.50          | AV       | 260.10         | 100         | Vertical | Pass    |
| 2   | 2198.850        | 48.00            | -7.92       | 74.0           | -26.00          | Peak     | 59.00          | 100         | Vertical | Pass    |
| 2** | 2198.850        | 36.30            | -7.92       | 54.0           | -17.70          | AV       | 59.00          | 100         | Vertical | Pass    |
| 3   | 2392.326        | 51.25            | -4.14       | 74.0           | -22.75          | Peak     | 323.10         | 100         | Vertical | Pass    |
| 3** | 2392.326        | 40.94            | -4.14       | 54.0           | -13.06          | AV       | 323.10         | 100         | Vertical | Pass    |
| 4   | 2475.566        | 52.20            | -2.12       | 74.0           | -21.80          | Peak     | 121.70         | 100         | Vertical | Pass    |
| 4** | 2475.566        | 42.95            | -2.12       | 54.0           | -11.05          | AV       | 121.70         | 100         | Vertical | Pass    |
| 5   | 2838.020        | 50.43            | -3.94       | 74.0           | -23.57          | Peak     | 109.70         | 100         | Vertical | Pass    |
| 5** | 2838.020        | 39.54            | -3.94       | 54.0           | -14.46          | AV       | 109.70         | 100         | Vertical | Pass    |
| 6   | 6494.063        | 58.29            | 3.87        | 74.0           | -15.71          | Peak     | 360.10         | 100         | Vertical | Pass    |
| 6** | 6494.063        | 47.28            | 3.87        | 54.0           | -6.72           | AV       | 360.10         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_13.08.22

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7948.513        | 30.03            | -1.65       | 74.0           | -43.97          | Peak     | 269.50         | 100         | Vertical | Pass    |
| 1** | 7948.513        | 21.68            | -1.65       | 54.0           | -32.32          | AV       | 269.50         | 100         | Vertical | Pass    |
| 2   | 9312.172        | 34.40            | 1.99        | 74.0           | -39.60          | Peak     | 261.50         | 100         | Vertical | Pass    |
| 2** | 9312.172        | 26.34            | 1.99        | 54.0           | -27.66          | AV       | 261.50         | 100         | Vertical | Pass    |
| 3   | 10785.804       | 37.94            | 5.28        | 74.0           | -36.06          | Peak     | 167.60         | 100         | Vertical | Pass    |
| 3** | 10785.804       | 28.55            | 5.28        | 54.0           | -25.45          | AV       | 167.60         | 100         | Vertical | Pass    |
| 4   | 11280.680       | 39.70            | 7.29        | 74.0           | -34.30          | Peak     | 100.80         | 100         | Vertical | Pass    |
| 4** | 11280.680       | 30.58            | 7.29        | 54.0           | -23.42          | AV       | 100.80         | 100         | Vertical | Pass    |
| 5   | 14194.951       | 47.50            | 14.61       | 74.0           | -26.50          | Peak     | 288.90         | 100         | Vertical | Pass    |
| 5** | 14194.951       | 38.46            | 14.61       | 54.0           | -15.54          | AV       | 288.90         | 100         | Vertical | Pass    |
| 6   | 17991.752       | 54.69            | 22.41       | 74.0           | -19.31          | Peak     | 50.50          | 100         | Vertical | Pass    |
| 6** | 17991.752       | 47.02            | 22.41       | 54.0           | -6.98           | AV       | 50.50          | 100         | Vertical | Pass    |

## WIFI2.4G-G-High channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.12.02

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

Revision: Test case FCC Part 15C FCC 15.247.2 AG 15.46-75dB

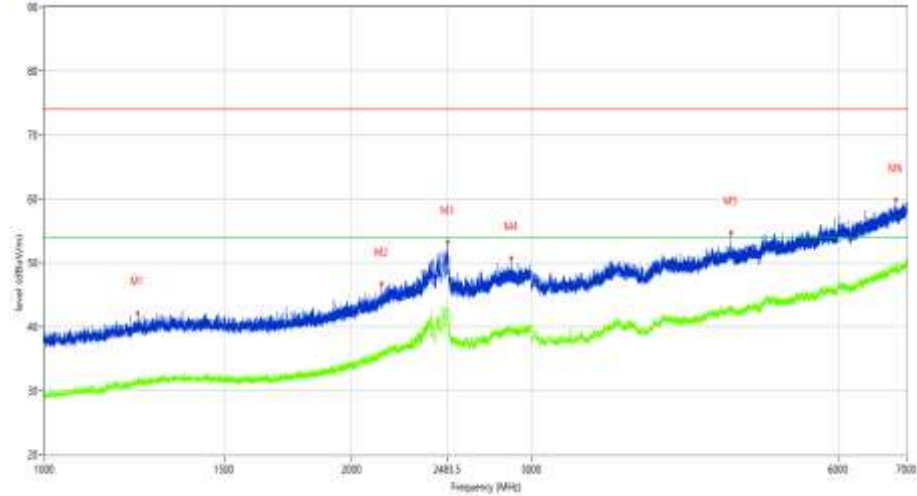

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1235.221        | 42.11            | -13.23      | 74.0           | -31.89          | Peak     | 316.00         | 100         | Horizontal | Pass    |
| 1** | 1235.221        | 31.17            | -13.23      | 54.0           | -22.83          | AV       | 316.00         | 100         | Horizontal | Pass    |
| 2   | 2139.608        | 46.65            | -9.03       | 74.0           | -27.35          | Peak     | 44.20          | 100         | Horizontal | Pass    |
| 2** | 2139.608        | 36.08            | -9.03       | 54.0           | -17.92          | AV       | 44.20          | 100         | Horizontal | Pass    |
| 3   | 2486.314        | 53.35            | -1.91       | 74.0           | -20.65          | Peak     | 292.20         | 100         | Horizontal | Pass    |
| 3** | 2486.314        | 43.03            | -1.91       | 54.0           | -10.97          | AV       | 292.20         | 100         | Horizontal | Pass    |
| 4   | 2872.016        | 50.68            | -3.80       | 74.0           | -23.32          | Peak     | 59.60          | 100         | Horizontal | Pass    |
| 4** | 2872.016        | 39.18            | -3.80       | 54.0           | -14.82          | AV       | 59.60          | 100         | Horizontal | Pass    |
| 5   | 4710.786        | 54.77            | -0.07       | 74.0           | -19.23          | Peak     | 299.90         | 100         | Horizontal | Pass    |
| 5** | 4710.786        | 43.26            | -0.07       | 54.0           | -10.74          | AV       | 299.90         | 100         | Horizontal | Pass    |
| 6   | 6838.020        | 59.82            | 5.07        | 74.0           | -14.18          | Peak     | 252.30         | 100         | Horizontal | Pass    |
| 6** | 6838.020        | 48.87            | 5.07        | 54.0           | -5.13           | AV       | 252.30         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.14.56

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7041.240        | 25.74            | -5.27       | 74.0           | -48.26          | Peak     | 141.20         | 100         | Horizontal | Pass    |
| 1** | 7041.240        | 17.97            | -5.27       | 54.0           | -36.03          | AV       | 141.20         | 100         | Horizontal | Pass    |
| 2   | 8481.880        | 31.58            | -1.21       | 74.0           | -42.42          | Peak     | 255.80         | 100         | Horizontal | Pass    |
| 2** | 8481.880        | 22.50            | -1.21       | 54.0           | -31.50          | AV       | 255.80         | 100         | Horizontal | Pass    |
| 3   | 11214.696       | 39.90            | 6.43        | 74.0           | -34.10          | Peak     | 259.80         | 100         | Horizontal | Pass    |
| 3** | 11214.696       | 31.48            | 6.43        | 54.0           | -22.52          | AV       | 259.80         | 100         | Horizontal | Pass    |
| 4   | 14194.951       | 46.82            | 14.61       | 74.0           | -27.18          | Peak     | 124.80         | 100         | Horizontal | Pass    |
| 4** | 14194.951       | 38.74            | 14.61       | 54.0           | -15.26          | AV       | 124.80         | 100         | Horizontal | Pass    |
| 5   | 14758.560       | 47.18            | 13.81       | 74.0           | -26.82          | Peak     | 279.90         | 100         | Horizontal | Pass    |
| 5** | 14758.560       | 39.04            | 13.81       | 54.0           | -14.96          | AV       | 279.90         | 100         | Horizontal | Pass    |
| 6   | 17994.501       | 55.43            | 22.58       | 74.0           | -18.57          | Peak     | 129.10         | 100         | Horizontal | Pass    |
| 6** | 17994.501       | 46.75            | 22.58       | 54.0           | -7.25           | AV       | 129.10         | 100         | Horizontal | Pass    |

## WIFI2.4G-G-High channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.54.50

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

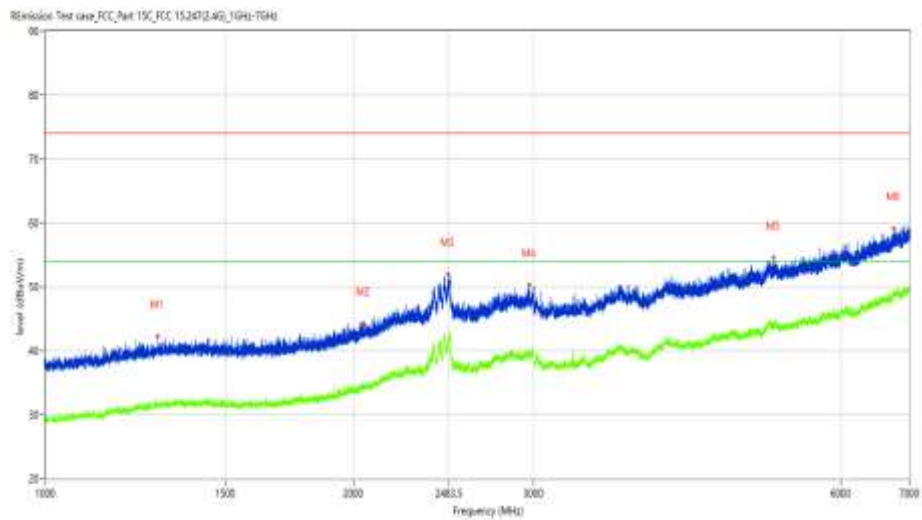

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1288.214        | 42.26            | -12.93      | 74.0           | -31.74          | Peak     | 262.90         | 100         | Vertical | Pass    |
| 1** | 1288.214        | 31.65            | -12.93      | 54.0           | -22.35          | AV       | 262.90         | 100         | Vertical | Pass    |
| 2   | 2048.119        | 44.25            | -10.31      | 74.0           | -29.75          | Peak     | 187.50         | 100         | Vertical | Pass    |
| 2** | 2048.119        | 34.68            | -10.31      | 54.0           | -19.32          | AV       | 187.50         | 100         | Vertical | Pass    |
| 3   | 2475.816        | 52.00            | -2.12       | 74.0           | -22.00          | Peak     | 22.60          | 100         | Vertical | Pass    |
| 3** | 2475.816        | 42.69            | -2.12       | 54.0           | -11.31          | AV       | 22.60          | 100         | Vertical | Pass    |
| 4   | 2973.753        | 50.23            | -3.26       | 74.0           | -23.77          | Peak     | 128.80         | 100         | Vertical | Pass    |
| 4** | 2973.753        | 39.31            | -3.26       | 54.0           | -14.69          | AV       | 128.80         | 100         | Vertical | Pass    |
| 5   | 5155.731        | 54.62            | 1.14        | 74.0           | -19.38          | Peak     | 139.90         | 100         | Vertical | Pass    |
| 5** | 5155.731        | 43.78            | 1.14        | 54.0           | -10.22          | AV       | 139.90         | 100         | Vertical | Pass    |
| 6   | 6756.030        | 59.09            | 4.91        | 74.0           | -14.91          | Peak     | 11.10          | 100         | Vertical | Pass    |
| 6** | 6756.030        | 48.47            | 4.91        | 54.0           | -5.53           | AV       | 11.10          | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_13.10.06

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

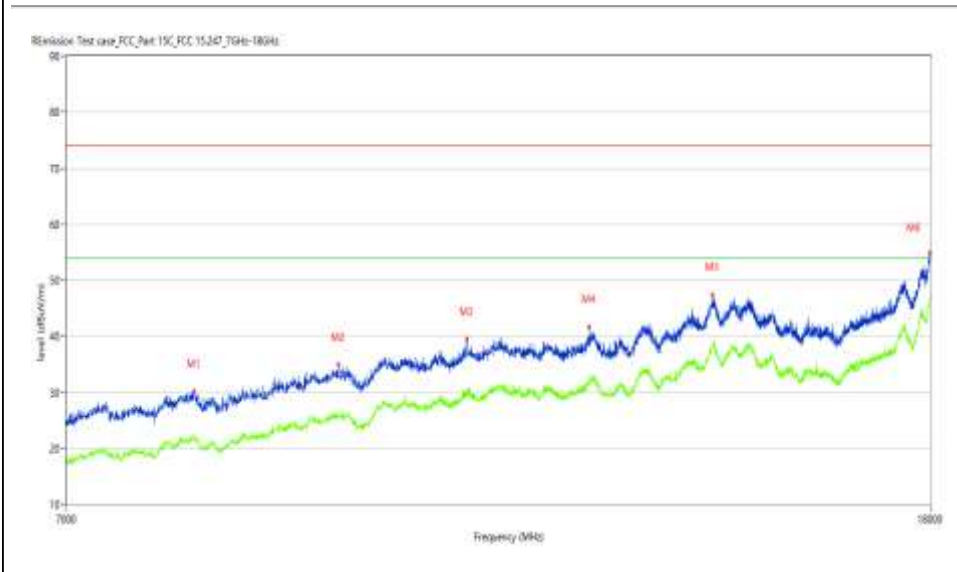

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 8050.237        | 30.22            | -0.50       | 74.0           | -43.78          | Peak     | 324.30         | 100         | Vertical | Pass    |
| 1** | 8050.237        | 22.15            | -0.50       | 54.0           | -31.85          | AV       | 324.30         | 100         | Vertical | Pass    |
| 2   | 9422.144        | 34.93            | 2.62        | 74.0           | -39.07          | Peak     | 238.80         | 100         | Vertical | Pass    |
| 2** | 9422.144        | 26.10            | 2.62        | 54.0           | -27.90          | AV       | 238.80         | 100         | Vertical | Pass    |
| 3   | 10843.539       | 39.51            | 6.09        | 74.0           | -34.49          | Peak     | 261.70         | 100         | Vertical | Pass    |
| 3** | 10843.539       | 30.51            | 6.09        | 54.0           | -23.49          | AV       | 261.70         | 100         | Vertical | Pass    |
| 4   | 12394.151       | 41.71            | 7.22        | 74.0           | -32.29          | Peak     | 195.20         | 100         | Vertical | Pass    |
| 4** | 12394.151       | 31.78            | 7.22        | 54.0           | -22.22          | AV       | 195.20         | 100         | Vertical | Pass    |
| 5   | 14186.703       | 47.42            | 14.72       | 74.0           | -26.58          | Peak     | 324.30         | 100         | Vertical | Pass    |
| 5** | 14186.703       | 38.56            | 14.72       | 54.0           | -15.44          | AV       | 324.30         | 100         | Vertical | Pass    |
| 6   | 17991.752       | 54.91            | 22.41       | 74.0           | -19.09          | Peak     | 76.30          | 100         | Vertical | Pass    |
| 6** | 17991.752       | 47.12            | 22.41       | 54.0           | -6.88           | AV       | 76.30          | 100         | Vertical | Pass    |

## WIFI2.4G-N-Low channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_09.42.58

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

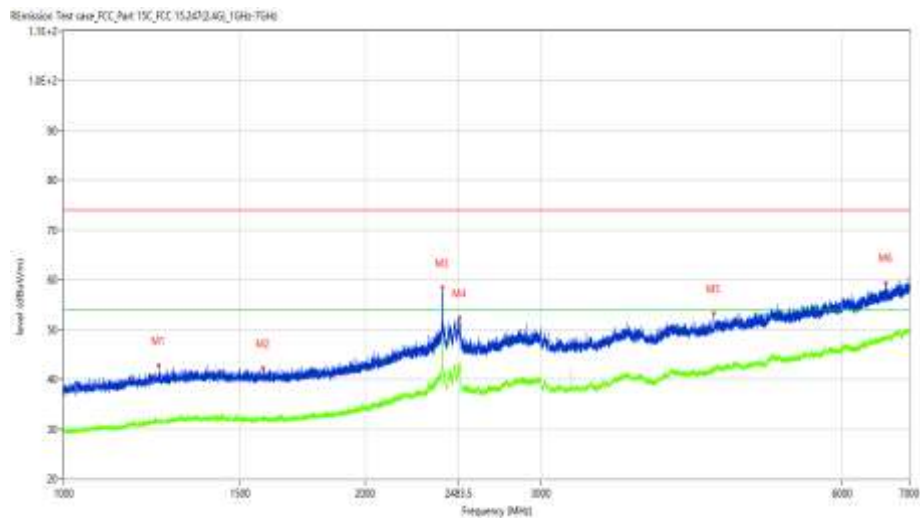

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1245.219        | 42.79            | -13.19      | 74.0           | -31.21          | Peak     | 83.60          | 100         | Horizontal | Pass    |
| 1** | 1245.219        | 31.43            | -13.19      | 54.0           | -22.57          | AV       | 83.60          | 100         | Horizontal | Pass    |
| 2   | 1580.927        | 42.14            | -13.06      | 74.0           | -31.86          | Peak     | 215.10         | 100         | Horizontal | Pass    |
| 2** | 1580.927        | 32.23            | -13.06      | 54.0           | -21.77          | AV       | 215.10         | 100         | Horizontal | Pass    |
| 3   | 2391.326        | 58.31            | -5.19       | 74.0           | -15.69          | Peak     | 36.10          | 100         | Horizontal | Pass    |
| 3** | 2391.326        | 47.85            | -5.19       | 54.0           | -6.15           | AV       | 36.10          | 100         | Horizontal | Pass    |
| 4   | 2487.064        | 52.25            | -1.89       | 74.0           | -21.75          | Peak     | 282.10         | 100         | Horizontal | Pass    |
| 4** | 2487.064        | 42.85            | -1.89       | 54.0           | -11.15          | AV       | 282.10         | 100         | Horizontal | Pass    |
| 5   | 4460.317        | 53.28            | -0.88       | 74.0           | -20.72          | Peak     | 121.30         | 100         | Horizontal | Pass    |
| 5** | 4460.317        | 42.00            | -0.88       | 54.0           | -12.00          | AV       | 121.30         | 100         | Horizontal | Pass    |
| 6   | 6627.047        | 59.22            | 4.44        | 74.0           | -14.78          | Peak     | 88.90          | 100         | Horizontal | Pass    |
| 6** | 6627.047        | 48.02            | 4.44        | 54.0           | -5.98           | AV       | 88.90          | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.27.14

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8052.987        | 31.33            | -0.56       | 74.0           | -42.67          | Peak     | 13.90          | 100         | Horizontal | Pass    |
| 1** | 8052.987        | 22.73            | -0.56       | 54.0           | -31.27          | AV       | 13.90          | 100         | Horizontal | Pass    |
| 2   | 9955.511        | 37.20            | 4.64        | 74.0           | -36.80          | Peak     | 345.10         | 100         | Horizontal | Pass    |
| 2** | 9955.511        | 29.23            | 4.64        | 54.0           | -24.77          | AV       | 345.10         | 100         | Horizontal | Pass    |
| 3   | 11253.187       | 40.13            | 6.94        | 74.0           | -33.87          | Peak     | 271.50         | 100         | Horizontal | Pass    |
| 3** | 11253.187       | 30.86            | 6.94        | 54.0           | -23.14          | AV       | 271.50         | 100         | Horizontal | Pass    |
| 4   | 14197.701       | 47.11            | 14.55       | 74.0           | -26.89          | Peak     | 194.90         | 100         | Horizontal | Pass    |
| 4** | 14197.701       | 38.43            | 14.55       | 54.0           | -15.57          | AV       | 194.90         | 100         | Horizontal | Pass    |
| 5   | 17463.884       | 50.28            | 16.14       | 74.0           | -23.72          | Peak     | 345.10         | 100         | Horizontal | Pass    |
| 5** | 17463.884       | 41.40            | 16.14       | 54.0           | -12.60          | AV       | 345.10         | 100         | Horizontal | Pass    |
| 6   | 18000.000       | 55.65            | 22.92       | 74.0           | -18.35          | Peak     | 308.60         | 100         | Horizontal | Pass    |
| 6** | 18000.000       | 47.37            | 22.92       | 54.0           | -6.63           | AV       | 308.60         | 100         | Horizontal | Pass    |

## WIFI2.4G-N-Low channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_10.57.25

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

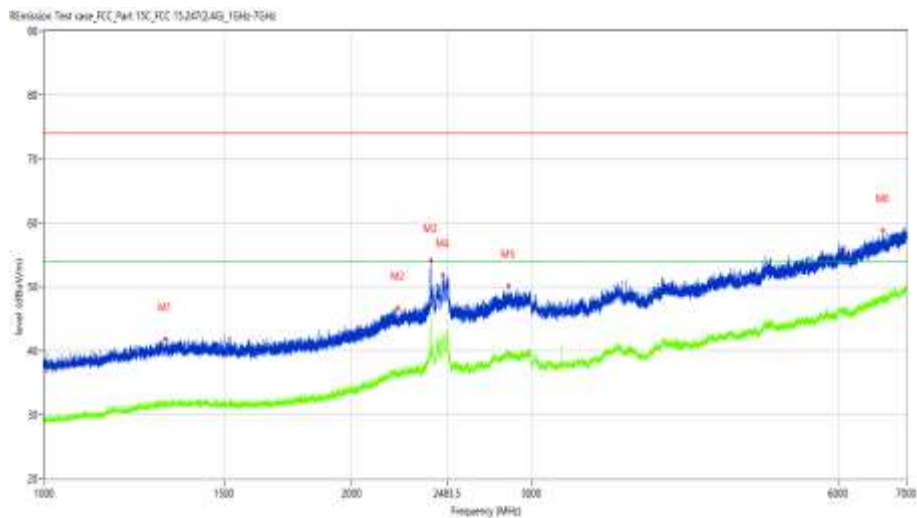

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1314.711        | 41.87            | -12.77      | 74.0           | -32.13          | Peak     | 345.60         | 100         | Vertical | Pass    |
| 1** | 1314.711        | 31.48            | -12.77      | 54.0           | -22.52          | AV       | 345.60         | 100         | Vertical | Pass    |
| 2   | 2223.347        | 46.71            | -8.13       | 74.0           | -27.29          | Peak     | 281.30         | 100         | Vertical | Pass    |
| 2** | 2223.347        | 35.94            | -8.13       | 54.0           | -18.06          | AV       | 281.30         | 100         | Vertical | Pass    |
| 3   | 2392.576        | 54.20            | -4.14       | 74.0           | -19.80          | Peak     | 332.90         | 100         | Vertical | Pass    |
| 3** | 2392.576        | 44.76            | -4.14       | 54.0           | -9.24           | AV       | 332.90         | 100         | Vertical | Pass    |
| 4   | 2458.318        | 51.80            | -2.59       | 74.0           | -22.20          | Peak     | 112.30         | 100         | Vertical | Pass    |
| 4** | 2458.318        | 42.46            | -2.59       | 54.0           | -11.54          | AV       | 112.30         | 100         | Vertical | Pass    |
| 5   | 2851.269        | 50.12            | -3.86       | 74.0           | -23.88          | Peak     | 0.80           | 100         | Vertical | Pass    |
| 5** | 2851.269        | 39.72            | -3.86       | 54.0           | -14.28          | AV       | 0.80           | 100         | Vertical | Pass    |
| 6   | 6641.545        | 58.81            | 4.51        | 74.0           | -15.19          | Peak     | 84.90          | 100         | Vertical | Pass    |
| 6** | 6641.545        | 48.01            | 4.51        | 54.0           | -5.99           | AV       | 84.90          | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_13.12.25

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7959.510        | 31.14            | -1.54       | 74.0           | -42.86          | Peak     | 90.00          | 100         | Vertical | Pass    |
| 1** | 7959.510        | 21.95            | -1.54       | 54.0           | -32.05          | AV       | 90.00          | 100         | Vertical | Pass    |
| 2   | 9155.461        | 34.47            | 2.42        | 74.0           | -39.53          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 2** | 9155.461        | 25.61            | 2.42        | 54.0           | -28.39          | AV       | 0.00           | 100         | Vertical | Pass    |
| 3   | 10821.545       | 38.59            | 5.78        | 74.0           | -35.41          | Peak     | 320.10         | 100         | Vertical | Pass    |
| 3** | 10821.545       | 30.46            | 5.78        | 54.0           | -23.54          | AV       | 320.10         | 100         | Vertical | Pass    |
| 4   | 11621.595       | 39.84            | 6.13        | 74.0           | -34.16          | Peak     | 51.10          | 100         | Vertical | Pass    |
| 4** | 11621.595       | 31.60            | 6.13        | 54.0           | -22.40          | AV       | 51.10          | 100         | Vertical | Pass    |
| 5   | 14186.703       | 48.15            | 14.72       | 74.0           | -25.85          | Peak     | 5.70           | 100         | Vertical | Pass    |
| 5** | 14186.703       | 38.88            | 14.72       | 54.0           | -15.12          | AV       | 5.70           | 100         | Vertical | Pass    |
| 6   | 17477.631       | 50.27            | 16.40       | 74.0           | -23.73          | Peak     | 264.80         | 100         | Vertical | Pass    |
| 6** | 17477.631       | 41.84            | 16.40       | 54.0           | -12.16          | AV       | 264.80         | 100         | Vertical | Pass    |

## WIFI2.4G-N-Middle channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_09.56.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

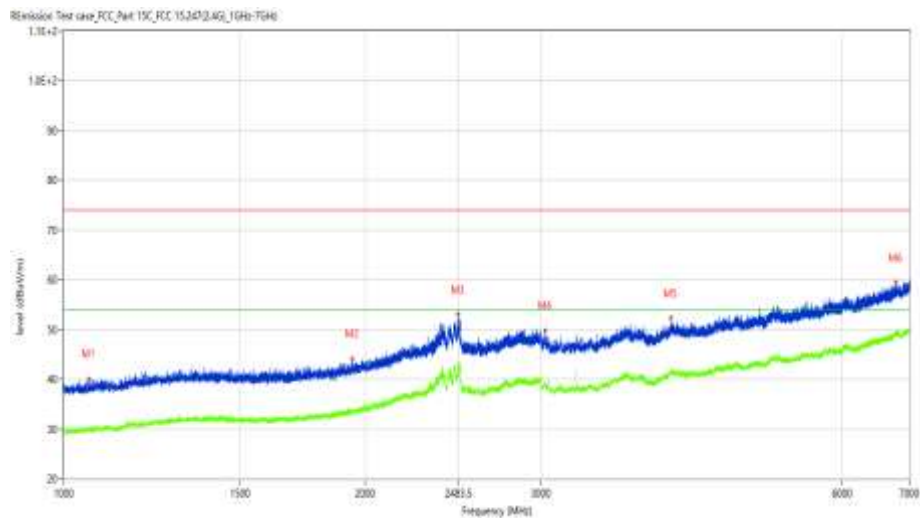

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1058.743        | 40.02            | -14.34      | 74.0           | -33.98          | Peak     | 142.20         | 100         | Horizontal | Pass    |
| 1** | 1058.743        | 30.29            | -14.34      | 54.0           | -23.71          | AV       | 142.20         | 100         | Horizontal | Pass    |
| 2   | 1943.382        | 44.14            | -11.31      | 74.0           | -29.86          | Peak     | 308.10         | 100         | Horizontal | Pass    |
| 2** | 1943.382        | 33.57            | -11.31      | 54.0           | -20.43          | AV       | 308.10         | 100         | Horizontal | Pass    |
| 3   | 2476.065        | 53.09            | -2.11       | 74.0           | -20.91          | Peak     | 229.00         | 100         | Horizontal | Pass    |
| 3** | 2476.065        | 42.45            | -2.11       | 54.0           | -11.55          | AV       | 229.00         | 100         | Horizontal | Pass    |
| 4   | 3029.496        | 49.82            | -4.36       | 74.0           | -24.18          | Peak     | 299.20         | 100         | Horizontal | Pass    |
| 4** | 3029.496        | 39.30            | -4.36       | 54.0           | -14.70          | AV       | 299.20         | 100         | Horizontal | Pass    |
| 5   | 4045.869        | 52.24            | -0.87       | 74.0           | -21.76          | Peak     | 295.20         | 100         | Horizontal | Pass    |
| 5** | 4045.869        | 41.50            | -0.87       | 54.0           | -12.50          | AV       | 295.20         | 100         | Horizontal | Pass    |
| 6   | 6783.527        | 59.40            | 5.20        | 74.0           | -14.60          | Peak     | 323.30         | 100         | Horizontal | Pass    |
| 6** | 6783.527        | 48.66            | 5.20        | 54.0           | -5.34           | AV       | 323.30         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.28.48

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8061.235        | 30.83            | -0.72       | 74.0           | -43.17          | Peak     | 107.60         | 100         | Horizontal | Pass    |
| 1** | 8061.235        | 21.49            | -0.72       | 54.0           | -32.51          | AV       | 107.60         | 100         | Horizontal | Pass    |
| 2   | 9504.624        | 35.06            | 2.94        | 74.0           | -38.94          | Peak     | 284.90         | 100         | Horizontal | Pass    |
| 2** | 9504.624        | 25.75            | 2.94        | 54.0           | -28.25          | AV       | 284.90         | 100         | Horizontal | Pass    |
| 3   | 10805.049       | 38.52            | 5.54        | 74.0           | -35.48          | Peak     | 143.10         | 100         | Horizontal | Pass    |
| 3** | 10805.049       | 29.20            | 5.54        | 54.0           | -24.80          | AV       | 143.10         | 100         | Horizontal | Pass    |
| 4   | 12413.397       | 40.92            | 7.32        | 74.0           | -33.08          | Peak     | 182.90         | 100         | Horizontal | Pass    |
| 4** | 12413.397       | 31.74            | 7.32        | 54.0           | -22.26          | AV       | 182.90         | 100         | Horizontal | Pass    |
| 5   | 14747.563       | 48.14            | 13.69       | 74.0           | -25.86          | Peak     | 83.20          | 100         | Horizontal | Pass    |
| 5** | 14747.563       | 38.10            | 13.69       | 54.0           | -15.90          | AV       | 83.20          | 100         | Horizontal | Pass    |
| 6   | 17821.295       | 52.18            | 17.19       | 74.0           | -21.82          | Peak     | 338.00         | 100         | Horizontal | Pass    |
| 6** | 17821.295       | 44.42            | 17.19       | 54.0           | -9.58           | AV       | 338.00         | 100         | Horizontal | Pass    |

## WIFI2.4G-N-Middle channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_11.02.43

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal


Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

Revision: Test case\_FCC\_Part15C\_FCC\_15.247.2AG\_15MHz-75MHz

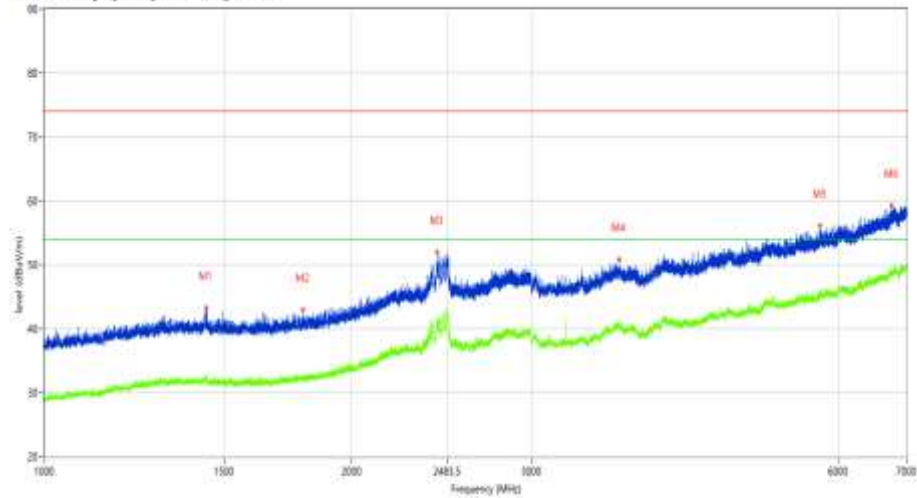

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1439.945        | 43.28            | -12.72      | 74.0           | -30.72          | Peak     | 329.00         | 100         | Vertical | Pass    |
| 1** | 1439.945        | 32.55            | -12.72      | 54.0           | -21.45          | AV       | 329.00         | 100         | Vertical | Pass    |
| 2   | 1793.401        | 42.98            | -12.45      | 74.0           | -31.02          | Peak     | 259.50         | 100         | Vertical | Pass    |
| 2** | 1793.401        | 32.07            | -12.45      | 54.0           | -21.93          | AV       | 259.50         | 100         | Vertical | Pass    |
| 3   | 2427.322        | 52.04            | -3.36       | 74.0           | -21.96          | Peak     | 159.10         | 100         | Vertical | Pass    |
| 3** | 2427.322        | 40.82            | -3.36       | 54.0           | -13.18          | AV       | 159.10         | 100         | Vertical | Pass    |
| 4   | 3659.418        | 50.82            | -1.62       | 74.0           | -23.18          | Peak     | 276.10         | 100         | Vertical | Pass    |
| 4** | 3659.418        | 40.57            | -1.62       | 54.0           | -13.43          | AV       | 276.10         | 100         | Vertical | Pass    |
| 5   | 5761.655        | 56.10            | 2.16        | 74.0           | -17.90          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 5** | 5761.655        | 45.45            | 2.16        | 54.0           | -8.55           | AV       | 0.00           | 100         | Vertical | Pass    |
| 6   | 6765.029        | 59.27            | 5.01        | 74.0           | -14.73          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 6** | 6765.029        | 49.17            | 5.01        | 54.0           | -4.83           | AV       | 0.00           | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_13.14.20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

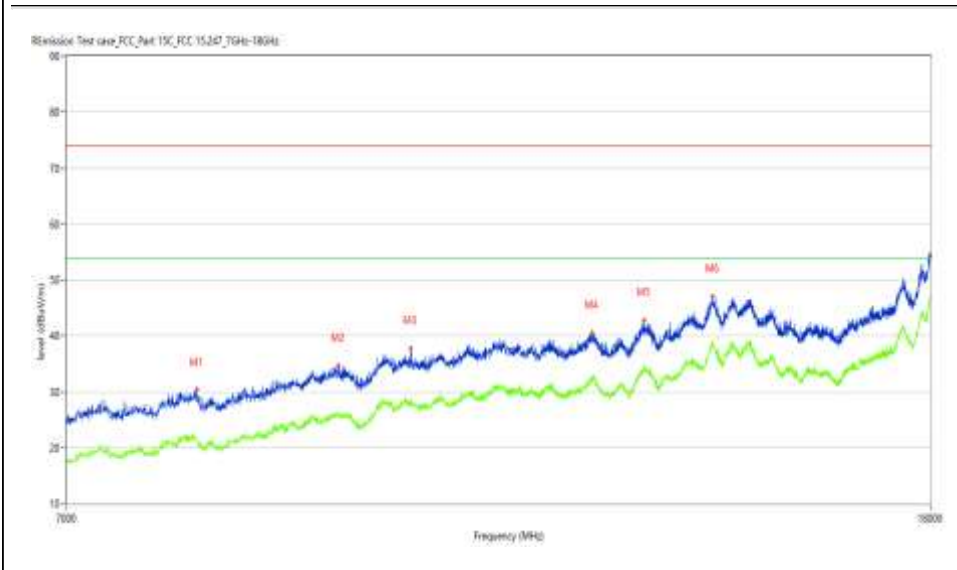

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 8074.981        | 30.34            | -1.01       | 74.0           | -43.66          | Peak     | 242.50         | 100         | Vertical | Pass    |
| 1** | 8074.981        | 21.19            | -1.01       | 54.0           | -32.81          | AV       | 242.50         | 100         | Vertical | Pass    |
| 2   | 9424.894        | 34.72            | 2.62        | 74.0           | -39.28          | Peak     | 278.00         | 100         | Vertical | Pass    |
| 2** | 9424.894        | 25.65            | 2.62        | 54.0           | -28.35          | AV       | 278.00         | 100         | Vertical | Pass    |
| 3   | 10194.701       | 37.74            | 4.16        | 74.0           | -36.26          | Peak     | 270.00         | 100         | Vertical | Pass    |
| 3** | 10194.701       | 28.47            | 4.16        | 54.0           | -25.53          | AV       | 270.00         | 100         | Vertical | Pass    |
| 4   | 12432.642       | 40.58            | 7.42        | 74.0           | -33.42          | Peak     | 162.50         | 100         | Vertical | Pass    |
| 4** | 12432.642       | 32.08            | 7.42        | 54.0           | -21.92          | AV       | 162.50         | 100         | Vertical | Pass    |
| 5   | 13166.708       | 42.81            | 9.01        | 74.0           | -31.19          | Peak     | 146.70         | 100         | Vertical | Pass    |
| 5** | 13166.708       | 34.29            | 9.01        | 54.0           | -19.71          | AV       | 146.70         | 100         | Vertical | Pass    |
| 6   | 14186.703       | 47.11            | 14.72       | 74.0           | -26.89          | Peak     | 18.60          | 100         | Vertical | Pass    |
| 6** | 14186.703       | 38.49            | 14.72       | 54.0           | -15.51          | AV       | 18.60          | 100         | Vertical | Pass    |

## WIFI2.4G-N-High channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_09:59:14

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

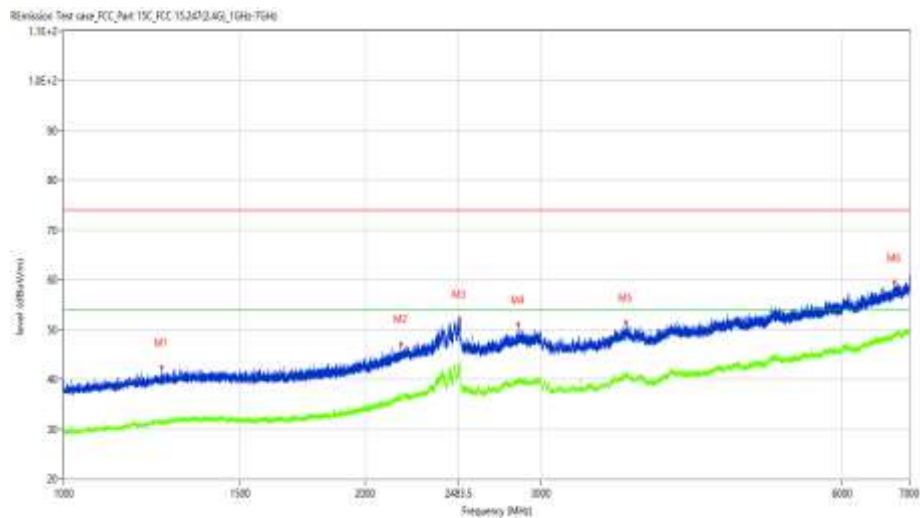

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1253.218        | 42.32            | -13.22      | 74.0           | -31.68          | Peak     | 190.10         | 100         | Horizontal | Pass    |
| 1** | 1253.218        | 31.99            | -13.22      | 54.0           | -22.01          | AV       | 190.10         | 100         | Horizontal | Pass    |
| 2   | 2172.853        | 47.08            | -8.40       | 74.0           | -26.92          | Peak     | 257.40         | 100         | Horizontal | Pass    |
| 2** | 2172.853        | 36.22            | -8.40       | 54.0           | -17.78          | AV       | 257.40         | 100         | Horizontal | Pass    |
| 3   | 2485.564        | 52.16            | -1.92       | 74.0           | -21.84          | Peak     | 94.70          | 100         | Horizontal | Pass    |
| 3** | 2485.564        | 42.35            | -1.92       | 54.0           | -11.65          | AV       | 94.70          | 100         | Horizontal | Pass    |
| 4   | 2842.770        | 50.98            | -3.86       | 74.0           | -23.02          | Peak     | 8.20           | 100         | Horizontal | Pass    |
| 4** | 2842.770        | 40.15            | -3.86       | 54.0           | -13.85          | AV       | 8.20           | 100         | Horizontal | Pass    |
| 5   | 3647.419        | 51.35            | -1.55       | 74.0           | -22.65          | Peak     | 136.70         | 100         | Horizontal | Pass    |
| 5** | 3647.419        | 40.25            | -1.55       | 54.0           | -13.75          | AV       | 136.70         | 100         | Horizontal | Pass    |
| 6   | 6761.030        | 59.40            | 4.96        | 74.0           | -14.60          | Peak     | 315.00         | 100         | Horizontal | Pass    |
| 6** | 6761.030        | 48.47            | 4.96        | 54.0           | -5.53           | AV       | 315.00         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.30.25

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8025.494        | 30.41            | -0.74       | 74.0           | -43.59          | Peak     | 52.80          | 100         | Horizontal | Pass    |
| 1** | 8025.494        | 22.31            | -0.74       | 54.0           | -31.69          | AV       | 52.80          | 100         | Horizontal | Pass    |
| 2   | 9504.624        | 35.15            | 2.94        | 74.0           | -38.85          | Peak     | 353.40         | 100         | Horizontal | Pass    |
| 2** | 9504.624        | 26.04            | 2.94        | 54.0           | -27.96          | AV       | 353.40         | 100         | Horizontal | Pass    |
| 3   | 10843.539       | 39.46            | 6.09        | 74.0           | -34.54          | Peak     | 2.90           | 100         | Horizontal | Pass    |
| 3** | 10843.539       | 29.73            | 6.09        | 54.0           | -24.27          | AV       | 2.90           | 100         | Horizontal | Pass    |
| 4   | 12443.639       | 41.13            | 7.47        | 74.0           | -32.87          | Peak     | 349.70         | 100         | Horizontal | Pass    |
| 4** | 12443.639       | 32.59            | 7.47        | 54.0           | -21.41          | AV       | 349.70         | 100         | Horizontal | Pass    |
| 5   | 14192.202       | 47.47            | 14.67       | 74.0           | -26.53          | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 5** | 14192.202       | 38.45            | 14.67       | 54.0           | -15.55          | AV       | 0.00           | 100         | Horizontal | Pass    |
| 6   | 18000.000       | 55.05            | 22.92       | 74.0           | -18.95          | Peak     | 330.30         | 100         | Horizontal | Pass    |
| 6** | 18000.000       | 47.25            | 22.92       | 54.0           | -6.75           | AV       | 330.30         | 100         | Horizontal | Pass    |

## WIFI2.4G-N-High channel-Vertical-TX

# Test result

Project Number: Certification

Test Time: 2021-11-05\_14.07.20

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

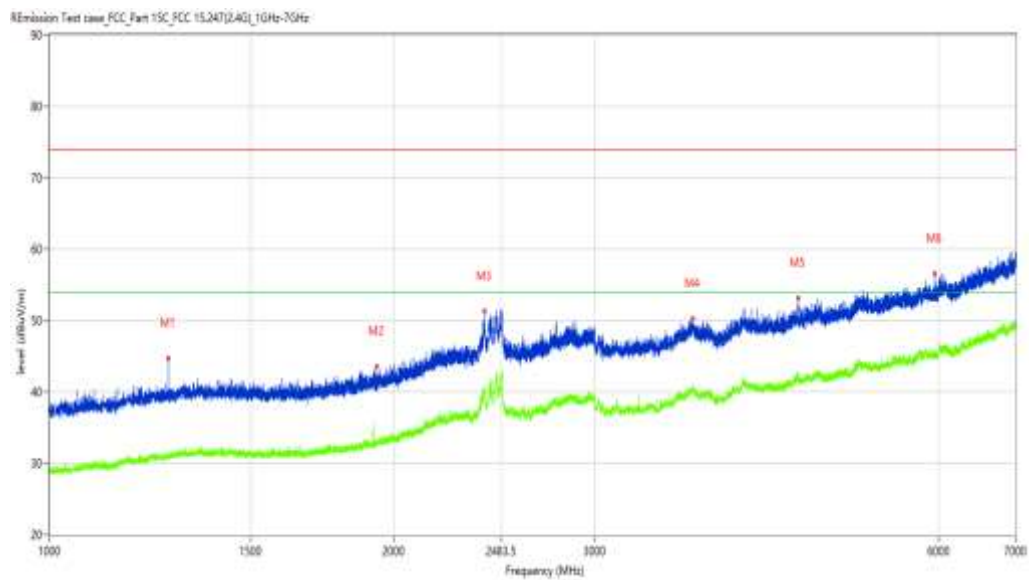

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1270.716        | 44.74            | -13.01      | 74.0           | -29.26          | Peak     | 180.50         | 100         | Vertical | Pass    |
| 1** | 1270.716        | 31.63            | -13.01      | 54.0           | -22.37          | AV       | 180.50         | 100         | Vertical | Pass    |
| 2   | 1933.133        | 43.51            | -11.48      | 74.0           | -30.49          | Peak     | 203.70         | 100         | Vertical | Pass    |
| 2** | 1933.133        | 32.61            | -11.48      | 54.0           | -21.39          | AV       | 203.70         | 100         | Vertical | Pass    |
| 3   | 2401.825        | 51.23            | -4.02       | 74.0           | -22.77          | Peak     | 0.70           | 100         | Vertical | Pass    |
| 3** | 2401.825        | 40.56            | -4.02       | 54.0           | -13.44          | AV       | 0.70           | 100         | Vertical | Pass    |
| 4   | 3652.918        | 50.23            | -1.58       | 74.0           | -23.77          | Peak     | 329.10         | 100         | Vertical | Pass    |
| 4** | 3652.918        | 39.86            | -1.58       | 54.0           | -14.14          | AV       | 329.10         | 100         | Vertical | Pass    |
| 5   | 4517.310        | 53.20            | -0.13       | 74.0           | -20.80          | Peak     | 118.50         | 100         | Vertical | Pass    |
| 5** | 4517.310        | 42.62            | -0.13       | 54.0           | -11.38          | AV       | 118.50         | 100         | Vertical | Pass    |
| 6   | 5955.131        | 56.56            | 1.99        | 74.0           | -17.44          | Peak     | 224.40         | 100         | Vertical | Pass    |
| 6** | 5955.131        | 45.14            | 1.99        | 54.0           | -8.86           | AV       | 224.40         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_13.15.59

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

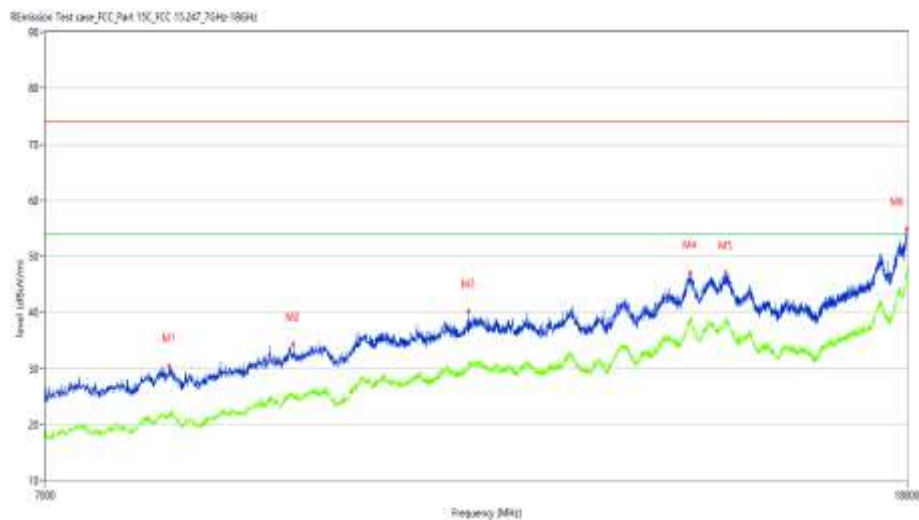

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 8019.995        | 30.45            | -0.83       | 74.0           | -43.55          | Peak     | 26.70          | 100         | Vertical | Pass    |
| 1** | 8019.995        | 22.11            | -0.83       | 54.0           | -31.89          | AV       | 26.70          | 100         | Vertical | Pass    |
| 2   | 9185.704        | 34.28            | 2.08        | 74.0           | -39.72          | Peak     | 322.30         | 100         | Vertical | Pass    |
| 2** | 9185.704        | 25.76            | 2.08        | 54.0           | -28.24          | AV       | 322.30         | 100         | Vertical | Pass    |
| 3   | 11126.718       | 40.12            | 5.63        | 74.0           | -33.88          | Peak     | 0.60           | 100         | Vertical | Pass    |
| 3** | 11126.718       | 31.12            | 5.63        | 54.0           | -22.88          | AV       | 0.60           | 100         | Vertical | Pass    |
| 4   | 14183.954       | 47.10            | 14.63       | 74.0           | -26.90          | Peak     | 167.80         | 100         | Vertical | Pass    |
| 4** | 14183.954       | 39.10            | 14.63       | 54.0           | -14.90          | AV       | 167.80         | 100         | Vertical | Pass    |
| 5   | 14750.312       | 46.98            | 13.72       | 74.0           | -27.02          | Peak     | 124.60         | 100         | Vertical | Pass    |
| 5** | 14750.312       | 38.15            | 13.72       | 54.0           | -15.85          | AV       | 124.60         | 100         | Vertical | Pass    |
| 6   | 17991.752       | 54.94            | 22.41       | 74.0           | -19.06          | Peak     | 81.00          | 100         | Vertical | Pass    |
| 6** | 17991.752       | 46.30            | 22.41       | 54.0           | -7.70           | AV       | 81.00          | 100         | Vertical | Pass    |

## WIFI2.4G-N40-Low channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_09:47:03

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

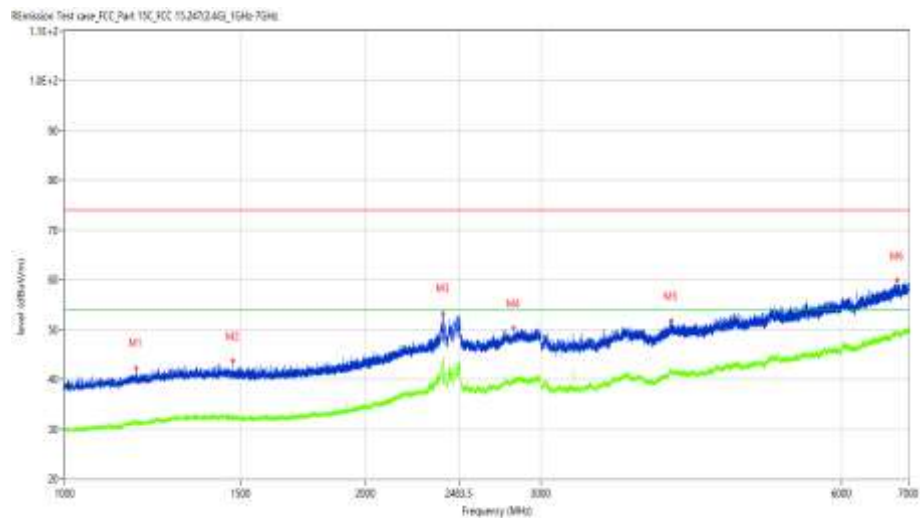

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1179.478        | 42.28            | -13.54      | 74.0           | -31.72          | Peak     | 262.90         | 100         | Horizontal | Pass    |
| 1** | 1179.478        | 31.08            | -13.54      | 54.0           | -22.92          | AV       | 262.90         | 100         | Horizontal | Pass    |
| 2   | 1473.691        | 43.69            | -12.89      | 74.0           | -30.31          | Peak     | 262.90         | 100         | Horizontal | Pass    |
| 2** | 1473.691        | 33.12            | -12.89      | 54.0           | -20.88          | AV       | 262.90         | 100         | Horizontal | Pass    |
| 3   | 2392.076        | 53.33            | -4.15       | 74.0           | -20.67          | Peak     | 27.10          | 100         | Horizontal | Pass    |
| 3** | 2392.076        | 44.24            | -4.15       | 54.0           | -9.76           | AV       | 27.10          | 100         | Horizontal | Pass    |
| 4   | 2817.523        | 50.31            | -4.37       | 74.0           | -23.69          | Peak     | 309.90         | 100         | Horizontal | Pass    |
| 4** | 2817.523        | 39.79            | -4.37       | 54.0           | -14.21          | AV       | 309.90         | 100         | Horizontal | Pass    |
| 5   | 4047.369        | 51.73            | -0.85       | 74.0           | -22.27          | Peak     | 0.40           | 100         | Horizontal | Pass    |
| 5** | 4047.369        | 41.54            | -0.85       | 54.0           | -12.46          | AV       | 0.40           | 100         | Horizontal | Pass    |
| 6   | 6819.523        | 59.91            | 5.11        | 74.0           | -14.09          | Peak     | 198.50         | 100         | Horizontal | Pass    |
| 6** | 6819.523        | 49.20            | 5.11        | 54.0           | -4.80           | AV       | 198.50         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.32.31

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

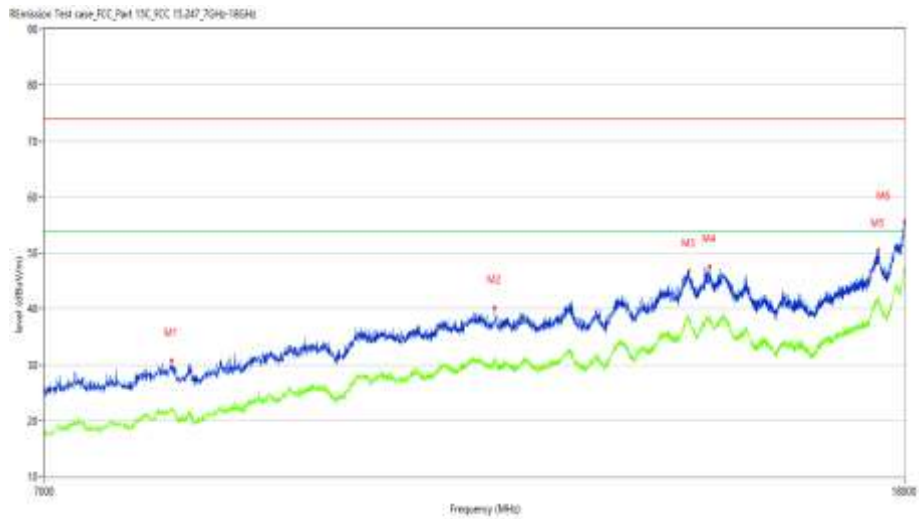

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8052.987        | 30.79            | -0.56       | 74.0           | -43.21          | Peak     | 305.80         | 100         | Horizontal | Pass    |
| 1** | 8052.987        | 22.28            | -0.56       | 54.0           | -31.72          | AV       | 305.80         | 100         | Horizontal | Pass    |
| 2   | 11478.630       | 40.26            | 6.83        | 74.0           | -33.74          | Peak     | 358.30         | 100         | Horizontal | Pass    |
| 2** | 11478.630       | 30.86            | 6.83        | 54.0           | -23.14          | AV       | 358.30         | 100         | Horizontal | Pass    |
| 3   | 14203.199       | 46.77            | 14.42       | 74.0           | -27.23          | Peak     | 278.40         | 100         | Horizontal | Pass    |
| 3** | 14203.199       | 38.19            | 14.42       | 54.0           | -15.81          | AV       | 278.40         | 100         | Horizontal | Pass    |
| 4   | 14527.618       | 47.60            | 12.50       | 74.0           | -26.40          | Peak     | 302.10         | 100         | Horizontal | Pass    |
| 4** | 14527.618       | 37.92            | 12.50       | 54.0           | -16.08          | AV       | 302.10         | 100         | Horizontal | Pass    |
| 5   | 17480.380       | 50.42            | 16.45       | 74.0           | -23.58          | Peak     | 359.20         | 100         | Horizontal | Pass    |
| 5** | 17480.380       | 41.98            | 16.45       | 54.0           | -12.02          | AV       | 359.20         | 100         | Horizontal | Pass    |
| 6   | 18000.000       | 55.48            | 22.92       | 74.0           | -18.52          | Peak     | 2.50           | 100         | Horizontal | Pass    |
| 6** | 18000.000       | 47.57            | 22.92       | 54.0           | -6.43           | AV       | 2.50           | 100         | Horizontal | Pass    |

## WIFI2.4G-N40-Low channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_11.17.31

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

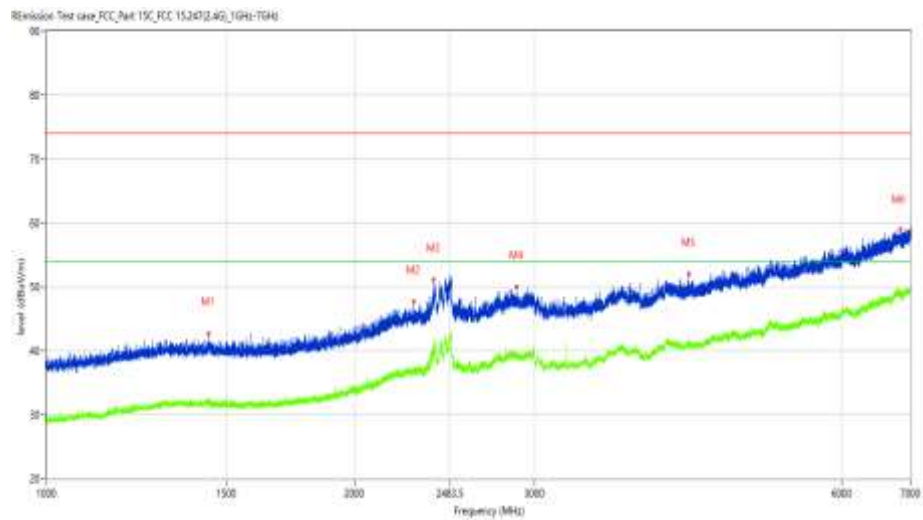

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1439.945        | 42.78            | -12.72      | 74.0           | -31.22          | Peak     | 137.20         | 100         | Vertical | Pass    |
| 1** | 1439.945        | 32.50            | -12.72      | 54.0           | -21.50          | AV       | 137.20         | 100         | Vertical | Pass    |
| 2   | 2288.339        | 47.70            | -7.51       | 74.0           | -26.30          | Peak     | 14.90          | 100         | Vertical | Pass    |
| 2** | 2288.339        | 37.31            | -7.51       | 54.0           | -16.69          | AV       | 14.90          | 100         | Vertical | Pass    |
| 3   | 2391.326        | 51.12            | -5.19       | 74.0           | -22.88          | Peak     | 331.10         | 100         | Vertical | Pass    |
| 3** | 2391.326        | 41.54            | -5.19       | 54.0           | -12.46          | AV       | 331.10         | 100         | Vertical | Pass    |
| 4   | 2883.265        | 50.01            | -3.85       | 74.0           | -23.99          | Peak     | 109.00         | 100         | Vertical | Pass    |
| 4** | 2883.265        | 39.09            | -3.85       | 54.0           | -14.91          | AV       | 109.00         | 100         | Vertical | Pass    |
| 5   | 4249.844        | 51.95            | -1.59       | 74.0           | -22.05          | Peak     | 88.30          | 100         | Vertical | Pass    |
| 5** | 4249.844        | 40.97            | -1.59       | 54.0           | -13.03          | AV       | 88.30          | 100         | Vertical | Pass    |
| 6   | 6839.520        | 58.98            | 5.06        | 74.0           | -15.02          | Peak     | 187.10         | 100         | Vertical | Pass    |
| 6** | 6839.520        | 49.02            | 5.06        | 54.0           | -4.98           | AV       | 187.10         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_11.29.42

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7310.672        | 26.90            | -3.28       | 74.0           | -47.10          | Peak     | 88.40          | 100         | Vertical | Pass    |
| 1** | 7310.672        | 19.75            | -3.28       | 54.0           | -34.25          | AV       | 88.40          | 100         | Vertical | Pass    |
| 2   | 9405.649        | 35.18            | 2.65        | 74.0           | -38.82          | Peak     | 76.00          | 100         | Vertical | Pass    |
| 2** | 9405.649        | 26.01            | 2.65        | 54.0           | -27.99          | AV       | 76.00          | 100         | Vertical | Pass    |
| 3   | 11203.699       | 39.41            | 6.30        | 74.0           | -34.59          | Peak     | 349.50         | 100         | Vertical | Pass    |
| 3** | 11203.699       | 30.99            | 6.30        | 54.0           | -23.01          | AV       | 349.50         | 100         | Vertical | Pass    |
| 4   | 13202.449       | 42.48            | 9.09        | 74.0           | -31.52          | Peak     | 139.40         | 100         | Vertical | Pass    |
| 4** | 13202.449       | 33.15            | 9.09        | 54.0           | -20.85          | AV       | 139.40         | 100         | Vertical | Pass    |
| 5   | 14208.698       | 46.40            | 14.30       | 74.0           | -27.60          | Peak     | 289.50         | 100         | Vertical | Pass    |
| 5** | 14208.698       | 38.10            | 14.30       | 54.0           | -15.90          | AV       | 289.50         | 100         | Vertical | Pass    |
| 6   | 18000.000       | 54.71            | 22.92       | 74.0           | -19.29          | Peak     | 358.10         | 100         | Vertical | Pass    |
| 6** | 18000.000       | 47.72            | 22.92       | 54.0           | -6.28           | AV       | 358.10         | 100         | Vertical | Pass    |

## WIFI2.4G-N40-Middle channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_11.14.46

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

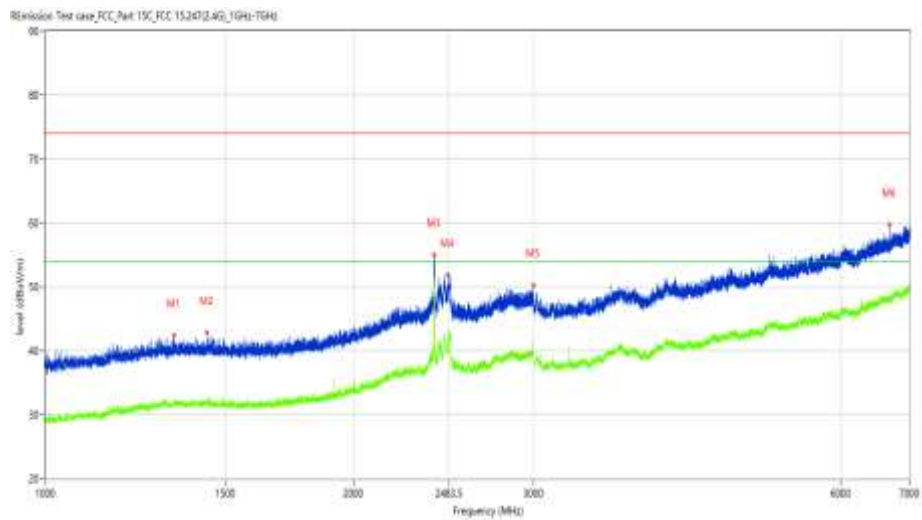

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1335.708        | 42.44            | -12.85      | 74.0           | -31.56          | Peak     | 78.80          | 100         | Vertical | Pass    |
| 1** | 1335.708        | 31.48            | -12.85      | 54.0           | -22.52          | AV       | 78.80          | 100         | Vertical | Pass    |
| 2   | 1439.695        | 42.80            | -12.72      | 74.0           | -31.20          | Peak     | 13.90          | 100         | Vertical | Pass    |
| 2** | 1439.695        | 32.58            | -12.72      | 54.0           | -21.42          | AV       | 13.90          | 100         | Vertical | Pass    |
| 3   | 2401.825        | 55.01            | -4.02       | 74.0           | -18.99          | Peak     | 246.20         | 100         | Vertical | Pass    |
| 3** | 2401.825        | 51.59            | -4.02       | 54.0           | -2.41           | AV       | 246.20         | 100         | Vertical | Pass    |
| 4   | 2474.566        | 51.79            | -2.15       | 74.0           | -22.21          | Peak     | 113.40         | 100         | Vertical | Pass    |
| 4** | 2474.566        | 42.65            | -2.15       | 54.0           | -11.35          | AV       | 113.40         | 100         | Vertical | Pass    |
| 5   | 3000.000        | 50.25            | -3.04       | 74.0           | -23.75          | Peak     | 276.80         | 100         | Vertical | Pass    |
| 5** | 3000.000        | 39.94            | -3.04       | 54.0           | -14.06          | AV       | 276.80         | 100         | Vertical | Pass    |
| 6   | 6688.039        | 59.70            | 4.49        | 74.0           | -14.30          | Peak     | 324.90         | 100         | Vertical | Pass    |
| 6** | 6688.039        | 47.99            | 4.49        | 54.0           | -6.01           | AV       | 324.90         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.34.25

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 8030.992        | 30.36            | -0.65       | 74.0           | -43.64          | Peak     | 1.90           | 100         | Horizontal | Pass    |
| 1** | 8030.992        | 21.76            | -0.65       | 54.0           | -32.24          | AV       | 1.90           | 100         | Horizontal | Pass    |
| 2   | 9342.414        | 35.67            | 2.45        | 74.0           | -38.33          | Peak     | 114.90         | 100         | Horizontal | Pass    |
| 2** | 9342.414        | 25.59            | 2.45        | 54.0           | -28.41          | AV       | 114.90         | 100         | Horizontal | Pass    |
| 3   | 11489.628       | 40.19            | 6.88        | 74.0           | -33.81          | Peak     | 90.20          | 100         | Horizontal | Pass    |
| 3** | 11489.628       | 31.13            | 6.88        | 54.0           | -22.87          | AV       | 90.20          | 100         | Horizontal | Pass    |
| 4   | 13216.196       | 43.04            | 9.14        | 74.0           | -30.96          | Peak     | 173.30         | 100         | Horizontal | Pass    |
| 4** | 13216.196       | 33.83            | 9.14        | 54.0           | -20.17          | AV       | 173.30         | 100         | Horizontal | Pass    |
| 5   | 14192.202       | 46.89            | 14.67       | 74.0           | -27.11          | Peak     | 200.50         | 100         | Horizontal | Pass    |
| 5** | 14192.202       | 39.11            | 14.67       | 54.0           | -14.89          | AV       | 200.50         | 100         | Horizontal | Pass    |
| 6   | 17857.036       | 53.49            | 17.50       | 74.0           | -20.51          | Peak     | 248.70         | 100         | Horizontal | Pass    |
| 6** | 17857.036       | 43.94            | 17.50       | 54.0           | -10.06          | AV       | 248.70         | 100         | Horizontal | Pass    |

## WIFI2.4G-N40-Middle channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_11.23.44

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

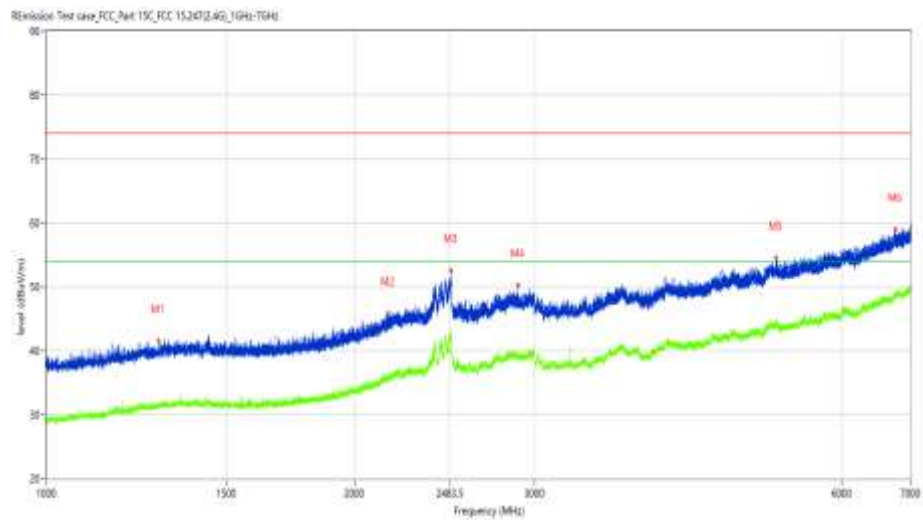

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1288.464        | 41.57            | -12.93      | 74.0           | -32.43          | Peak     | 164.70         | 100         | Vertical | Pass    |
| 1** | 1288.464        | 31.49            | -12.93      | 54.0           | -22.51          | AV       | 164.70         | 100         | Vertical | Pass    |
| 2   | 2159.105        | 45.80            | -8.67       | 74.0           | -28.20          | Peak     | 304.60         | 100         | Vertical | Pass    |
| 2** | 2159.105        | 35.77            | -8.67       | 54.0           | -18.23          | AV       | 304.60         | 100         | Vertical | Pass    |
| 3   | 2486.564        | 52.54            | -1.90       | 74.0           | -21.46          | Peak     | 316.70         | 100         | Vertical | Pass    |
| 3** | 2486.564        | 42.90            | -1.90       | 54.0           | -11.10          | AV       | 316.70         | 100         | Vertical | Pass    |
| 4   | 2890.764        | 50.27            | -3.86       | 74.0           | -23.73          | Peak     | 133.20         | 100         | Vertical | Pass    |
| 4** | 2890.764        | 39.35            | -3.86       | 54.0           | -14.65          | AV       | 133.20         | 100         | Vertical | Pass    |
| 5   | 5171.229        | 54.52            | 1.13        | 74.0           | -19.48          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 5** | 5171.229        | 44.00            | 1.13        | 54.0           | -10.00          | AV       | 0.00           | 100         | Vertical | Pass    |
| 6   | 6767.029        | 58.98            | 5.03        | 74.0           | -15.02          | Peak     | 210.60         | 100         | Vertical | Pass    |
| 6** | 6767.029        | 48.40            | 5.03        | 54.0           | -5.60           | AV       | 210.60         | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_11.27.39

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 7967.758        | 31.30            | -1.46       | 74.0           | -42.70          | Peak     | 208.80         | 100         | Vertical | Pass    |
| 1** | 7967.758        | 21.79            | -1.46       | 54.0           | -32.21          | AV       | 208.80         | 100         | Vertical | Pass    |
| 2   | 9801.550        | 35.50            | 3.26        | 74.0           | -38.50          | Peak     | 80.00          | 100         | Vertical | Pass    |
| 2** | 9801.550        | 26.32            | 3.26        | 54.0           | -27.68          | AV       | 80.00          | 100         | Vertical | Pass    |
| 3   | 11189.953       | 39.32            | 6.17        | 74.0           | -34.68          | Peak     | 0.00           | 100         | Vertical | Pass    |
| 3** | 11189.953       | 30.58            | 6.17        | 54.0           | -23.42          | AV       | 0.00           | 100         | Vertical | Pass    |
| 4   | 13128.218       | 42.35            | 8.88        | 74.0           | -31.65          | Peak     | 253.30         | 100         | Vertical | Pass    |
| 4** | 13128.218       | 33.06            | 8.88        | 54.0           | -20.94          | AV       | 253.30         | 100         | Vertical | Pass    |
| 5   | 14478.130       | 47.04            | 12.86       | 74.0           | -26.96          | Peak     | 281.40         | 100         | Vertical | Pass    |
| 5** | 14478.130       | 38.23            | 12.86       | 54.0           | -15.77          | AV       | 281.40         | 100         | Vertical | Pass    |
| 6   | 17994.501       | 55.35            | 22.58       | 74.0           | -18.65          | Peak     | 289.10         | 100         | Vertical | Pass    |
| 6** | 17994.501       | 47.41            | 22.58       | 54.0           | -6.59           | AV       | 289.10         | 100         | Vertical | Pass    |

## WIFI2.4G-N40-High channel-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_09.53.15

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

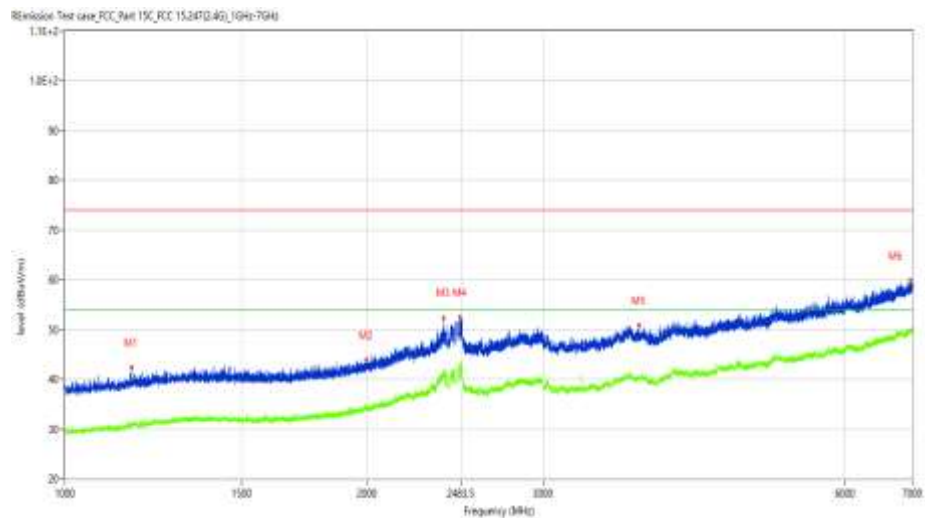

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 1164.229        | 42.36            | -13.59      | 74.0           | -31.64          | Peak     | 228.40         | 100         | Horizontal | Pass    |
| 1** | 1164.229        | 30.85            | -13.59      | 54.0           | -23.15          | AV       | 228.40         | 100         | Horizontal | Pass    |
| 2   | 1996.875        | 43.85            | -10.99      | 74.0           | -30.15          | Peak     | 109.50         | 100         | Horizontal | Pass    |
| 2** | 1996.875        | 34.26            | -10.99      | 54.0           | -19.74          | AV       | 109.50         | 100         | Horizontal | Pass    |
| 3   | 2386.827        | 52.40            | -6.87       | 74.0           | -21.60          | Peak     | 30.10          | 100         | Horizontal | Pass    |
| 3** | 2386.827        | 41.47            | -6.87       | 54.0           | -12.53          | AV       | 30.10          | 100         | Horizontal | Pass    |
| 4   | 2475.816        | 52.45            | -2.12       | 74.0           | -21.55          | Peak     | 85.10          | 100         | Horizontal | Pass    |
| 4** | 2475.816        | 42.82            | -2.12       | 54.0           | -11.18          | AV       | 85.10          | 100         | Horizontal | Pass    |
| 5   | 3736.908        | 50.85            | -1.94       | 74.0           | -23.15          | Peak     | 206.80         | 100         | Horizontal | Pass    |
| 5** | 3736.908        | 40.21            | -1.94       | 54.0           | -13.79          | AV       | 206.80         | 100         | Horizontal | Pass    |
| 6   | 6966.504        | 59.81            | 5.30        | 74.0           | -14.19          | Peak     | 101.20         | 100         | Horizontal | Pass    |
| 6** | 6966.504        | 49.38            | 5.30        | 54.0           | -4.62           | AV       | 101.20         | 100         | Horizontal | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_10.35.56

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

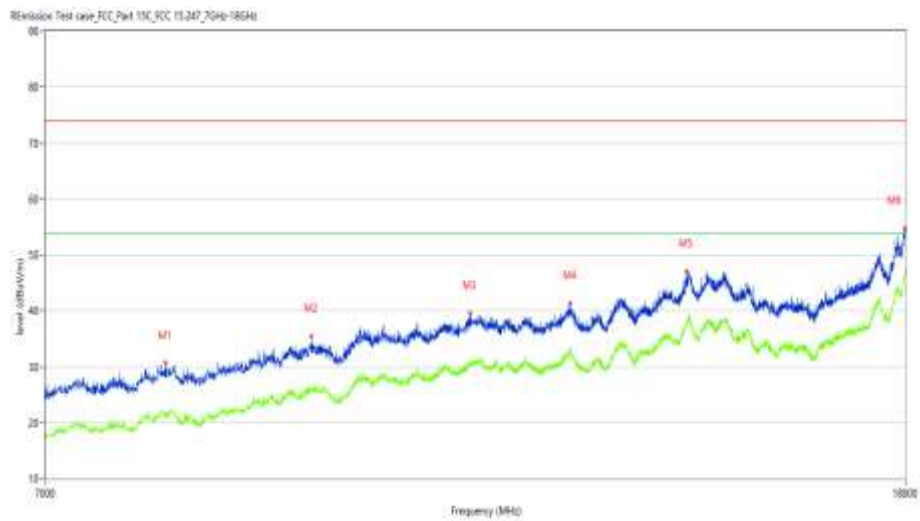

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|------------|---------|
| 1   | 7989.753        | 30.66            | -1.24       | 74.0           | -43.34          | Peak     | 275.90         | 100         | Horizontal | Pass    |
| 1** | 7989.753        | 21.07            | -1.24       | 54.0           | -32.93          | AV       | 275.90         | 100         | Horizontal | Pass    |
| 2   | 9375.406        | 35.47            | 2.63        | 74.0           | -38.53          | Peak     | 219.70         | 100         | Horizontal | Pass    |
| 2** | 9375.406        | 25.43            | 2.63        | 54.0           | -28.57          | AV       | 219.70         | 100         | Horizontal | Pass    |
| 3   | 11162.459       | 39.59            | 5.96        | 74.0           | -34.41          | Peak     | 87.50          | 100         | Horizontal | Pass    |
| 3** | 11162.459       | 30.73            | 5.96        | 54.0           | -23.27          | AV       | 87.50          | 100         | Horizontal | Pass    |
| 4   | 12457.386       | 41.36            | 7.53        | 74.0           | -32.64          | Peak     | 83.20          | 100         | Horizontal | Pass    |
| 4** | 12457.386       | 33.16            | 7.53        | 54.0           | -20.84          | AV       | 83.20          | 100         | Horizontal | Pass    |
| 5   | 14153.712       | 47.10            | 13.67       | 74.0           | -26.90          | Peak     | 18.60          | 100         | Horizontal | Pass    |
| 5** | 14153.712       | 38.45            | 13.67       | 54.0           | -15.55          | AV       | 18.60          | 100         | Horizontal | Pass    |
| 6   | 17991.752       | 54.66            | 22.41       | 74.0           | -19.34          | Peak     | 42.40          | 100         | Horizontal | Pass    |
| 6** | 17991.752       | 46.53            | 22.41       | 54.0           | -7.47           | AV       | 42.40          | 100         | Horizontal | Pass    |

## WIFI2.4G-N40-High channel-Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-04\_11.20.04

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

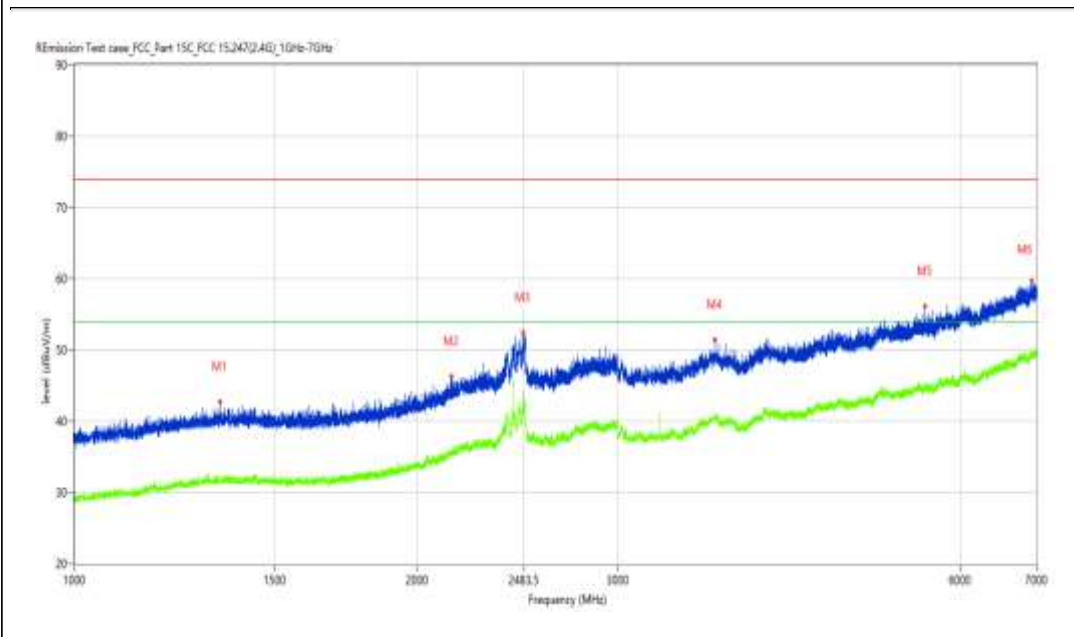

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 1343.207        | 42.74            | -12.79      | 74.0           | -31.26          | Peak     | 88.70          | 100         | Vertical | Pass    |
| 1** | 1343.207        | 31.72            | -12.79      | 54.0           | -22.28          | AV       | 88.70          | 100         | Vertical | Pass    |
| 2   | 2145.357        | 46.35            | -8.94       | 74.0           | -27.65          | Peak     | 1.90           | 100         | Vertical | Pass    |
| 2** | 2145.357        | 35.93            | -8.94       | 54.0           | -18.07          | AV       | 1.90           | 100         | Vertical | Pass    |
| 3   | 2477.065        | 52.49            | -2.08       | 74.0           | -21.51          | Peak     | 172.40         | 100         | Vertical | Pass    |
| 3** | 2477.065        | 41.77            | -2.08       | 54.0           | -12.23          | AV       | 172.40         | 100         | Vertical | Pass    |
| 4   | 3651.419        | 51.44            | -1.57       | 74.0           | -22.56          | Peak     | 106.20         | 100         | Vertical | Pass    |
| 4** | 3651.419        | 40.23            | -1.57       | 54.0           | -13.77          | AV       | 106.20         | 100         | Vertical | Pass    |
| 5   | 5592.176        | 56.13            | 1.52        | 74.0           | -17.87          | Peak     | 126.00         | 100         | Vertical | Pass    |
| 5** | 5592.176        | 45.49            | 1.52        | 54.0           | -8.51           | AV       | 126.00         | 100         | Vertical | Pass    |
| 6   | 6927.509        | 59.64            | 5.09        | 74.0           | -14.36          | Peak     | 62.00          | 100         | Vertical | Pass    |
| 6** | 6927.509        | 49.34            | 5.09        | 54.0           | -4.66           | AV       | 62.00          | 100         | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2021-11-04\_11.31.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A

Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01



| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|----------|---------|
| 1   | 8036.491        | 30.66            | -0.57       | 74.0           | -43.34          | Peak     | 259.60         | 100         | Vertical | Pass    |
| 1** | 8036.491        | 21.91            | -0.57       | 54.0           | -32.09          | AV       | 259.60         | 100         | Vertical | Pass    |
| 2   | 9383.654        | 35.48            | 2.66        | 74.0           | -38.52          | Peak     | 322.30         | 100         | Vertical | Pass    |
| 2** | 9383.654        | 26.61            | 2.66        | 54.0           | -27.39          | AV       | 322.30         | 100         | Vertical | Pass    |
| 3   | 11236.691       | 39.38            | 6.72        | 74.0           | -34.62          | Peak     | 19.20          | 100         | Vertical | Pass    |
| 3** | 11236.691       | 31.52            | 6.72        | 54.0           | -22.48          | AV       | 19.20          | 100         | Vertical | Pass    |
| 4   | 12454.636       | 41.42            | 7.52        | 74.0           | -32.58          | Peak     | 7.80           | 100         | Vertical | Pass    |
| 4** | 12454.636       | 33.08            | 7.52        | 54.0           | -20.92          | AV       | 7.80           | 100         | Vertical | Pass    |
| 5   | 14211.447       | 46.89            | 14.24       | 74.0           | -27.11          | Peak     | 212.00         | 100         | Vertical | Pass    |
| 5** | 14211.447       | 38.69            | 14.24       | 54.0           | -15.31          | AV       | 212.00         | 100         | Vertical | Pass    |
| 6   | 18000.000       | 55.25            | 22.92       | 74.0           | -18.75          | Peak     | 275.00         | 100         | Vertical | Pass    |
| 6** | 18000.000       | 47.28            | 22.92       | 54.0           | -6.72           | AV       | 275.00         | 100         | Vertical | Pass    |

## WIFI2.4G-Bandedge -B-Low channel- Horizontal -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17.53.00

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Addition:

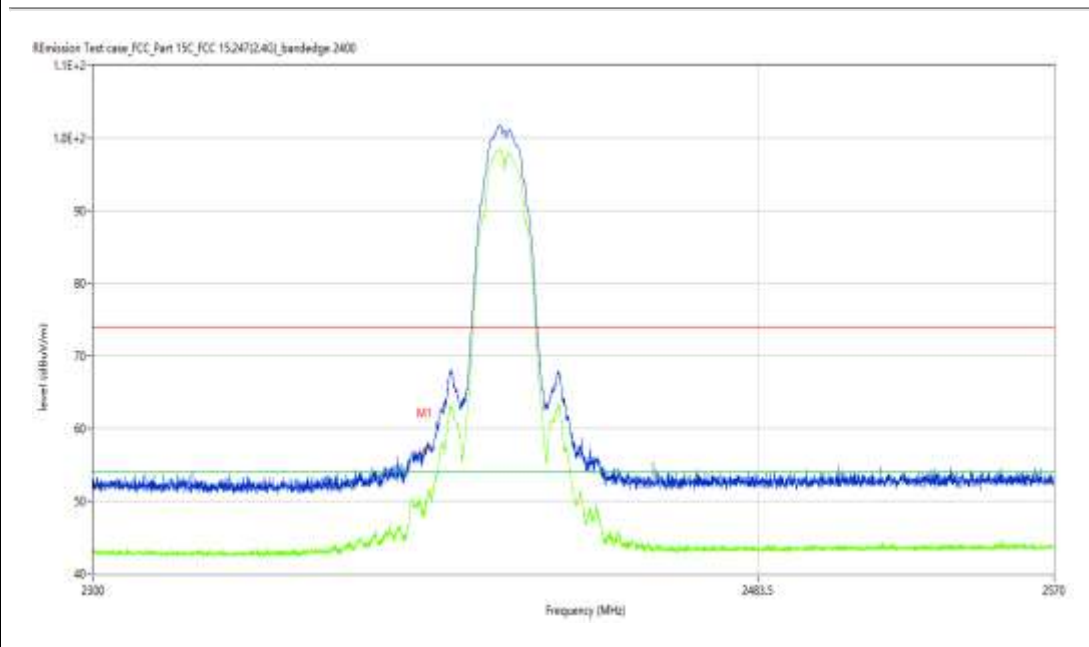

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 56.95            | -9.96       | 74.0           | -17.05          | Peak     | 199.81         | 100         | H       | Pass    |
| 1** | 2390.000        | 49.89            | -9.96       | 54.0           | -4.11           | AV       | 199.81         | 100         | H       | Pass    |

## WiFi2.4G-Bandedge -B-Low channel- Vertical -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_16.42.39

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

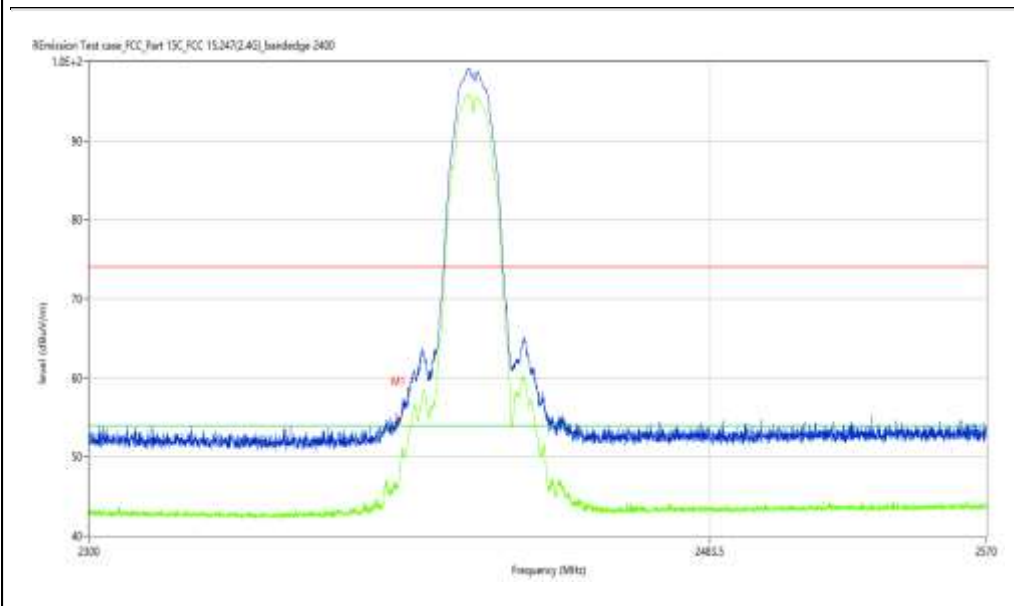

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 54.56            | -9.96       | 74.0           | -19.44          | Peak     | 58.61          | 100         | V       | Pass    |
| 1** | 2390.000        | 47.53            | -9.96       | 54.0           | -6.47           | AV       | 58.61          | 100         | V       | Pass    |

## WIFI2.4G-Bandedge -B-High channel- Horizontal -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_18.00.27

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

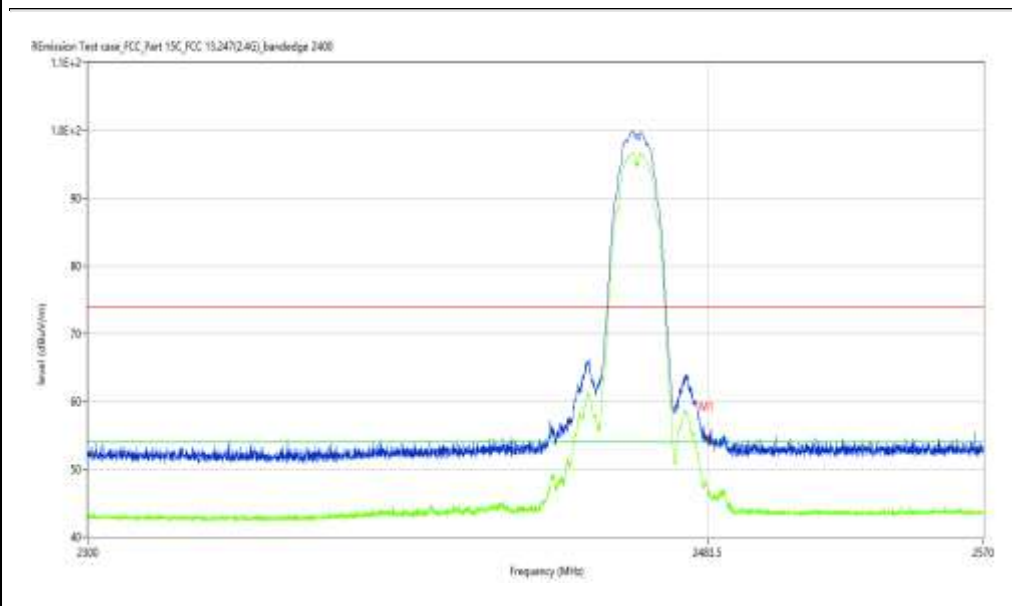

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 54.19            | -9.51       | 74.0           | -19.81          | Peak     | 204.02         | 100         | H       | Pass    |
| 1** | 2483.500        | 47.69            | -9.51       | 54.0           | -6.31           | AV       | 204.02         | 100         | H       | Pass    |

## WIFI2.4G-Bandedge -B-High channel- Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_16:51:20

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

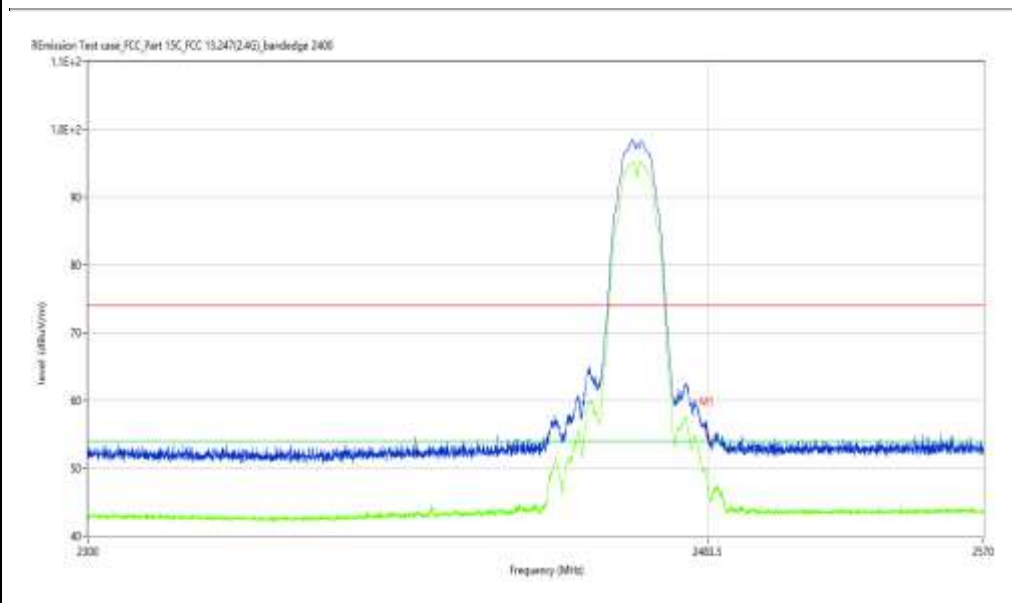

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 54.80            | -9.51       | 74.0           | -19.20          | Peak     | 57.54          | 100         | V       | Pass    |
| 1** | 2483.500        | 48.34            | -9.51       | 54.0           | -5.66           | AV       | 57.54          | 100         | V       | Pass    |

## WIFI2.4G-Bandedge -G-Low channel- Horizontal –TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17.54.40

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:

Test Standard: RSE


Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

RF Emission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_bandedge 2400

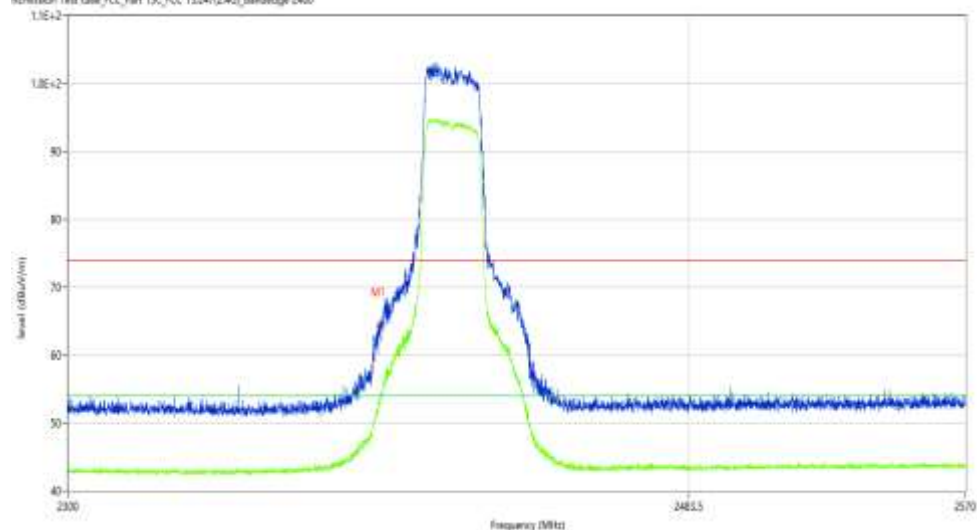

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 63.97            | -9.96       | 74.0           | -10.03          | Peak     | 202.26         | 100         | H       | Pass    |
| 1** | 2390.000        | 52.52            | -9.96       | 54.0           | -1.48           | AV       | 202.26         | 100         | H       | Pass    |

## WIFI2.4G-Bandedge -G-Low channel- Vertical -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_16.44.52

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54


Test Engineer: XCJ

Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

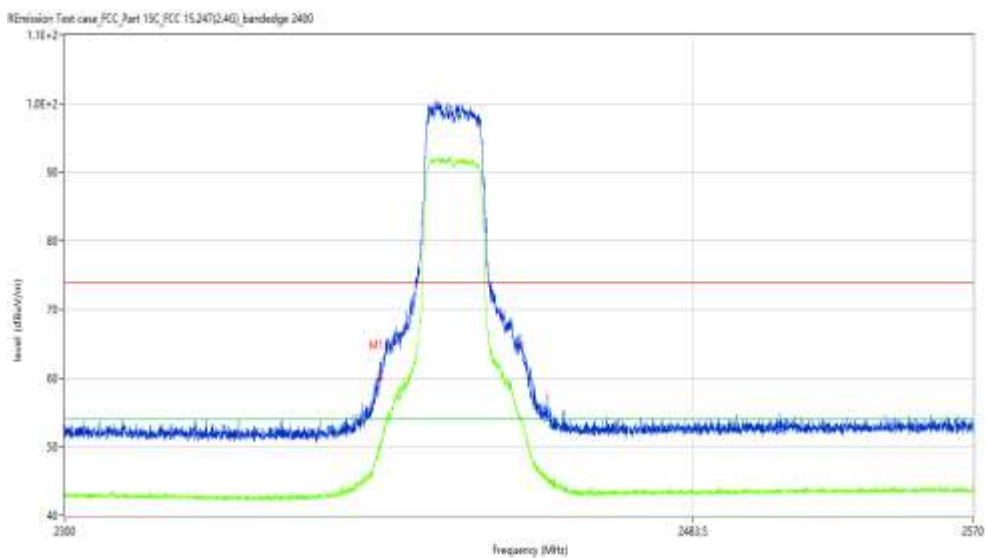

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 59.81            | -9.96       | 74.0           | -14.19          | Peak     | 35.63          | 100         | V       | Pass    |
| 1** | 2390.000        | 50.26            | -9.96       | 54.0           | -3.74           | AV       | 35.63          | 100         | V       | Pass    |

## WIFI2.4G-Bandedge -G-High channel- Horizontal -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17:58:55

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

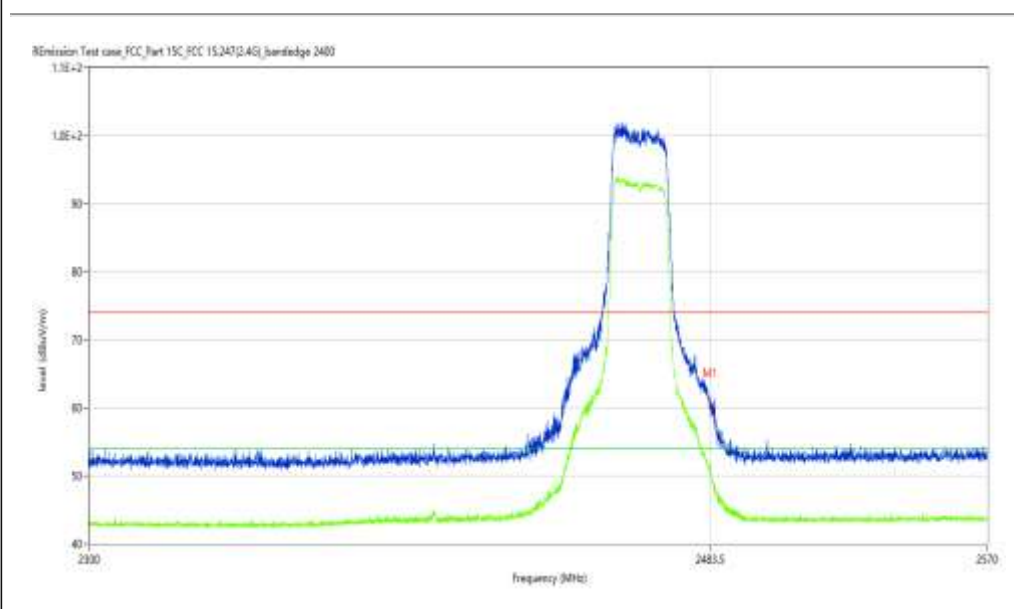

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 60.06            | -9.51       | 74.0           | -13.94          | Peak     | 208.33         | 100         | H       | Pass    |
| 1** | 2483.500        | 50.67            | -9.51       | 54.0           | -3.33           | AV       | 208.33         | 100         | H       | Pass    |

## WIFI2.4G-Bandedge -G-High channel- Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_16.49.41

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

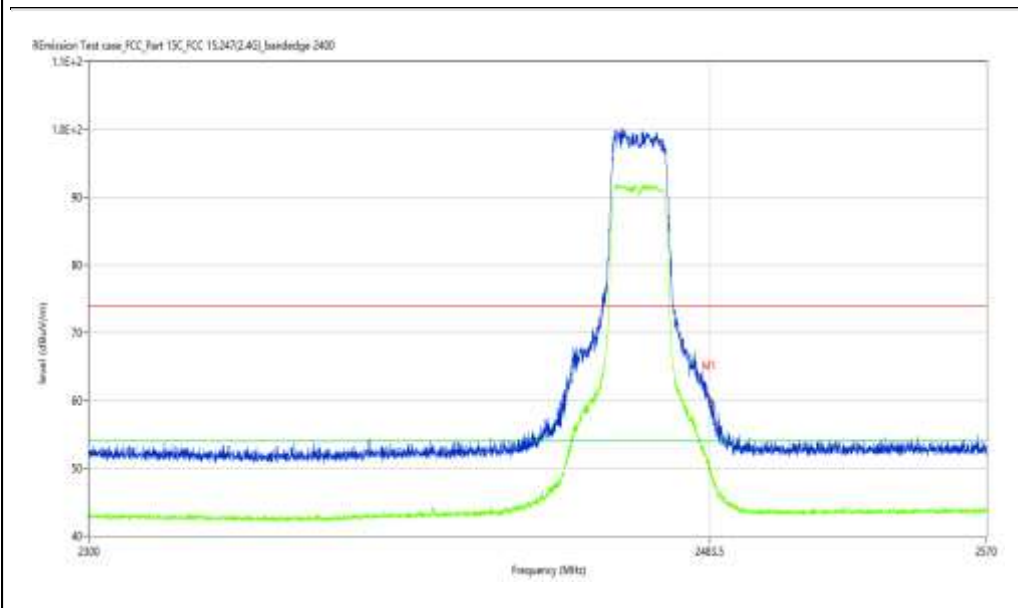

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 60.12            | -9.51       | 74.0           | -13.88          | Peak     | 55.40          | 100         | V       | Pass    |
| 1** | 2483.500        | 49.92            | -9.51       | 54.0           | -4.08           | AV       | 55.40          | 100         | V       | Pass    |

## WIFI2.4G-Bandedge -N-Low channel- Horizontal –TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17.56.04

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

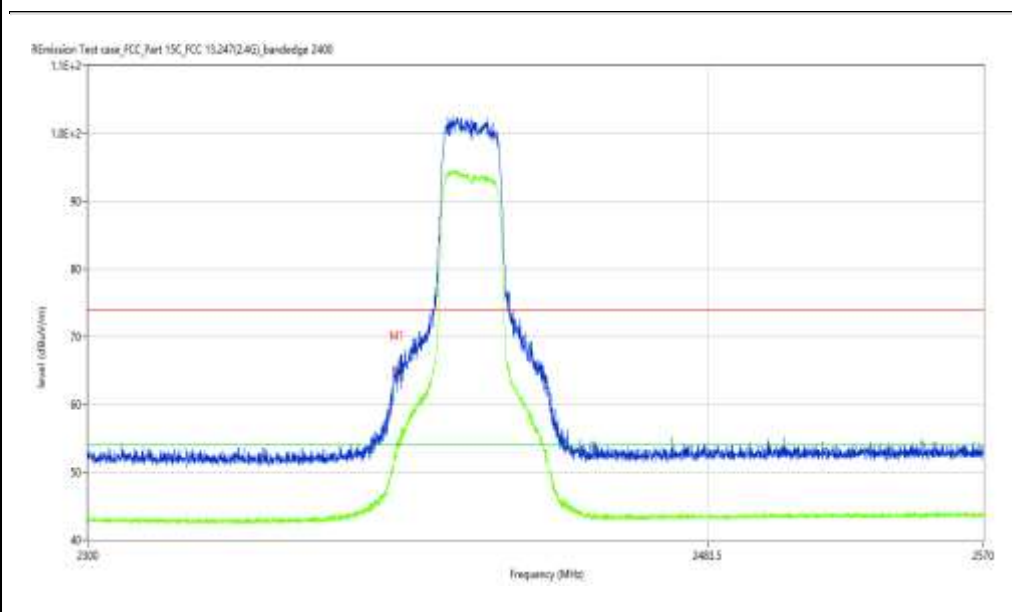

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 65.26            | -9.96       | 74.0           | -8.74           | Peak     | 203.40         | 100         | H       | Pass    |
| 1** | 2390.000        | 53.79            | -9.96       | 54.0           | -0.21           | AV       | 203.40         | 100         | H       | Pass    |

## WIFI2.4G-Bandedge -N-Low channel- Vertical -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_16.46.28

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

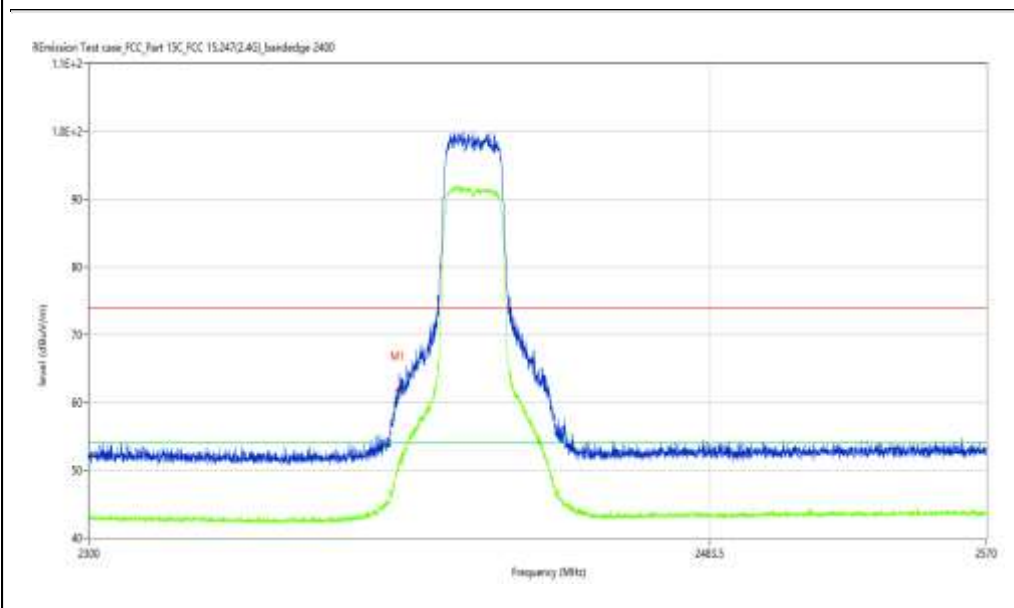

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 61.83            | -9.96       | 74.0           | -12.17          | Peak     | 59.69          | 100         | V       | Pass    |
| 1** | 2390.000        | 51.38            | -9.96       | 54.0           | -2.62           | AV       | 59.69          | 100         | V       | Pass    |

## WIFI2.4G-Bandedge -N-High channel- Horizontal -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17:57:31

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:

Test Standard: RSE


Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

RF Emission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_bandedge 2400

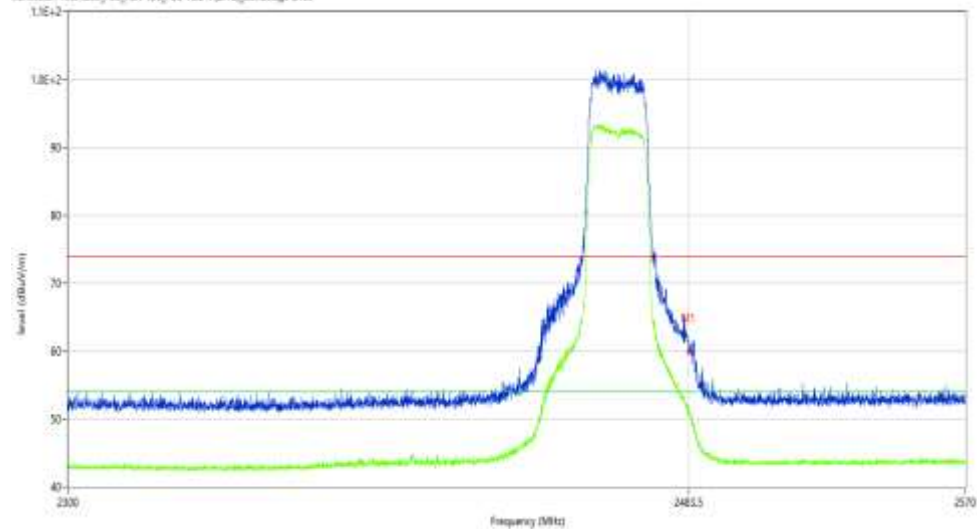

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 59.91            | -9.51       | 74.0           | -14.09          | Peak     | 210.76         | 100         | H       | Pass    |
| 1** | 2483.500        | 51.15            | -9.51       | 54.0           | -2.85           | AV       | 210.76         | 100         | H       | Pass    |

## WIFI2.4G-Bandedge -N-High channel- Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_16.48.07

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 20.1

Hum.: 54

Test Engineer: XCJ


Test Standard: RSE

Work Addition: normal

Load: full load

Remark: DR-RSE01-E21100025-01#01

REmission Test case\_FCC\_Part15C\_FCC 15.247(2.4G)\_bandedge 2483

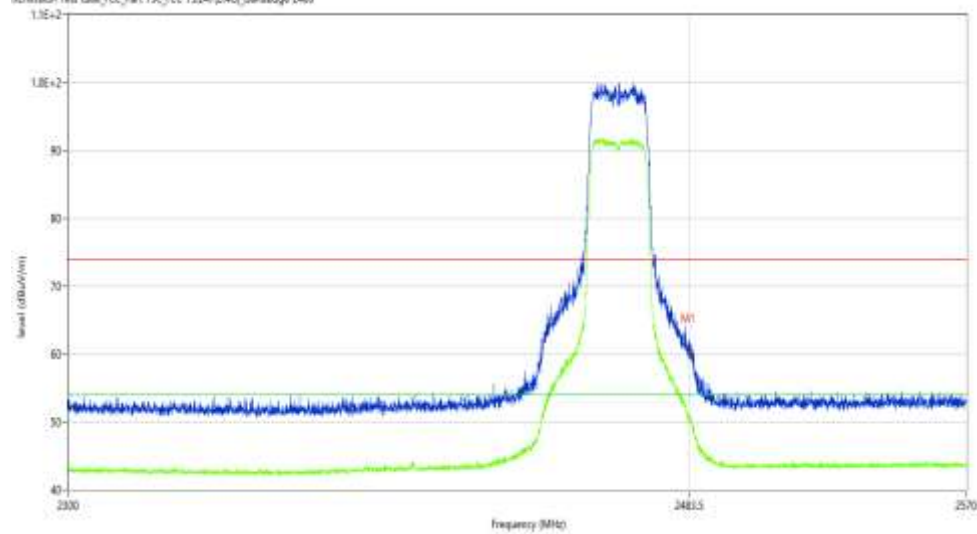

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 60.27            | -9.51       | 74.0           | -13.73          | Peak     | 60.37          | 100         | V       | Pass    |
| 1** | 2483.500        | 50.12            | -9.51       | 54.0           | -3.88           | AV       | 60.37          | 100         | V       | Pass    |

## WIFI2.4G-Bandedge –N40-Low channel- Horizontal –TX

### Test result

Project Number: Certification

Test Time: 2021-11-05\_14.10.39

EUT Name: N.A

Test Engineer: XCJ

Manufacturer: N.A

Test Standard: RSE

Model: N.A


Work Addition: normal

Temp.(oC): 20.1

Load: full load

Hum.: 54

Remark: DR-RSE01-E21100025-01#01

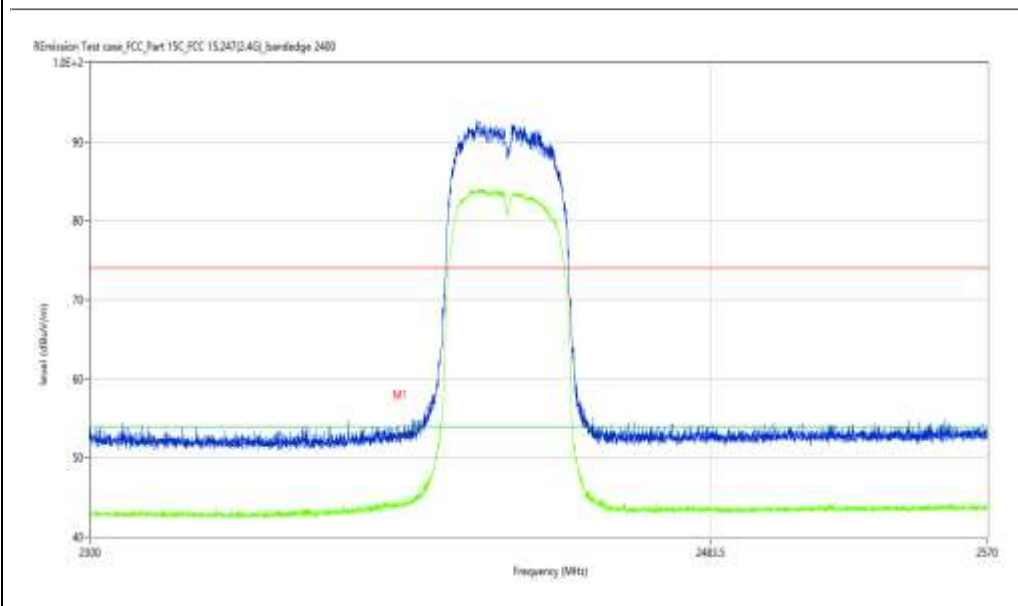

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 52.95            | -9.96       | 74.0           | -21.05          | Peak     | 223.77         | 100         | H       | Pass    |
| 1** | 2390.000        | 44.01            | -9.96       | 54.0           | -9.99           | AV       | 223.77         | 100         | H       | Pass    |

## WIFI2.4G-Bandedge –N40-Low channel- Vertical –TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17.44.51

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

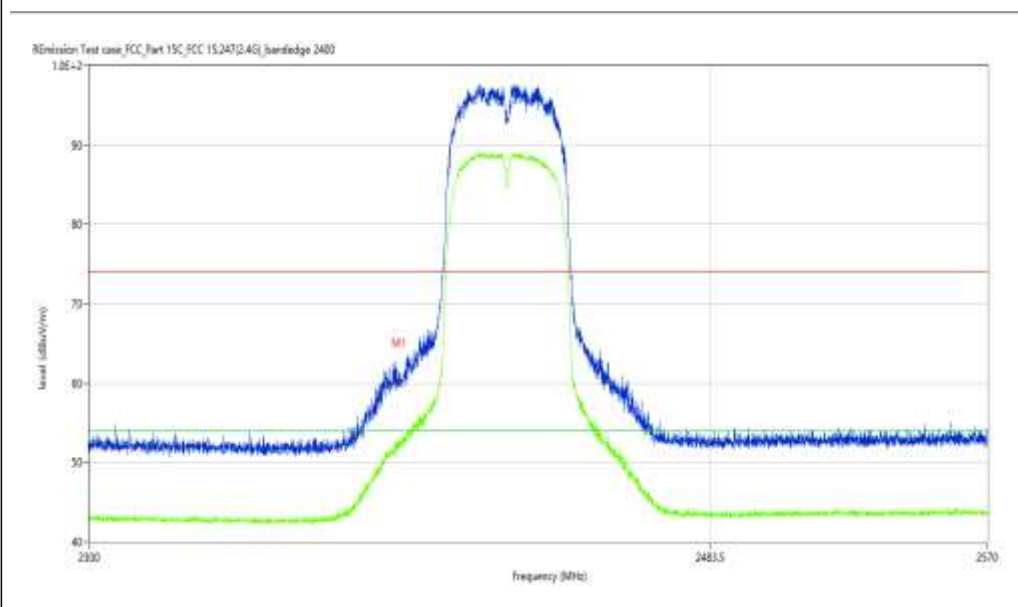

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 60.15            | -9.96       | 74.0           | -13.85          | Peak     | 147.50         | 100         | V       | Pass    |
| 1** | 2390.000        | 52.17            | -9.96       | 54.0           | -1.83           | AV       | 147.50         | 100         | V       | Pass    |

## WIFI2.4G-Bandedge –N40-High channel- Horizontal -TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17.49.56

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

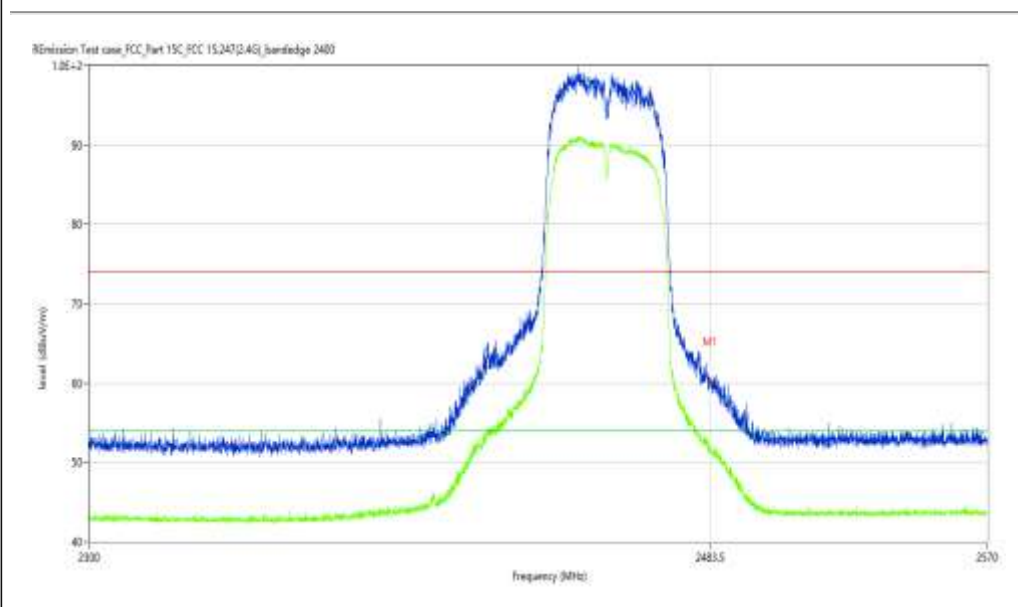

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 60.19            | -9.51       | 74.0           | -13.81          | Peak     | 208.39         | 100         | V       | Pass    |
| 1** | 2483.500        | 52.01            | -9.51       | 54.0           | -1.99           | AV       | 208.39         | 100         | V       | Pass    |

## WiFi2.4G-Bandedge –N40-High channel- Vertical-TX

### Test result

Project Number: Certification

Test Time: 2021-11-01\_17.47.10

EUT Name: N.A

Load: full load

Manufacturer: N.A

Remark: DR-RSE01-E21100025-01#01

Model: N.A

Name:

Temp.(oC): 20.1

Project Template:

Hum.: 54

Manufacture:

Test Engineer: XCJ

Model Name:


Test Standard: RSE

Templ.(oC):

Work Addition: normal

Hum:

Work Additon:

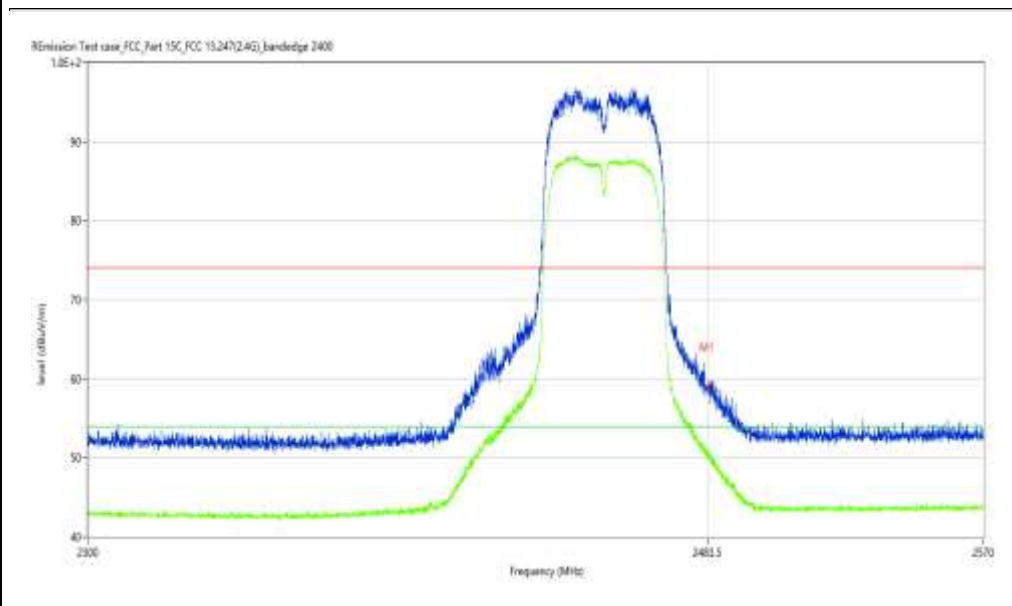

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Over Limit (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|-------------|----------------|-----------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 59.02            | -9.51       | 74.0           | -14.98          | Peak     | 145.57         | 100         | V       | Pass    |
| 1** | 2483.500        | 50.51            | -9.51       | 54.0           | -3.49           | AV       | 145.57         | 100         | V       | Pass    |