



RF TEST REPORT

Applicant ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD
FCC ID 2AC7Z-ESP32WROOM32U
Product Wi-Fi & Bluetooth Internet of Things Module
Brand WROOM
Model ESP32-WROOM-32U
Report No. RXA1710-0354RF02R1
Issue Date January 15, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. Average Power Output –Conducted	9
5.2. 6dB Bandwidth	11
5.3. Band Edge	16
5.4. Power Spectral Density	19
5.5. Spurious RF Conducted Emissions	24
5.6. Radiated Emissions in the Restricted Band	31
5.7. Radiates Emission	36
5.8. Conducted Emission	70
6. Main Test Instruments	72
ANNEX A: EUT Appearance and Test Setup	73
A.1 EUT Appearance	73
A.2 Test Setup	74

Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: November 9, 2017~ January 2, 2018			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD
Applicant address	Room204, Building2, 690Bibo Road, Zhangjiang Hi-Teck Park, Shanghai, China
Manufacturer	ESPRESSIF SYSTEMS (SHANGHAI) PTE LTD
Manufacturer address	Room204, Building2, 690Bibo Road, Zhangjiang Hi-Teck Park, Shanghai, China

General information

EUT Description	
Model	ESP32-WROOM-32U
Hardware Version	V2.1
Software Version	V1.0
Power Supply	External Power Supply
Antenna Type	External Antenna The EUT don't have standard Antenna. The Antenna used for testing in this report is the after-market accessory.
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	2.33dBi
additional beamforming gain	0 dB
Test Mode	Bluetooth V4.2 LE 802.11b 802.11g, 802.11n(HT20/HT40);
Modulation Type	LE :GFSK 802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G :15.90dBm LE: 1.08dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz LE: 2402 ~2480 MHz
Note: The information of the EUT is declared by the manufacturer.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

The test software is used IPOP4.1 fcc_mode_sel 0

Worst-case data rates are shown as following table.

Band	Data Rate
LE	1Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

5. Test Case Results

5.1. Average Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method AVGSA-2 in KDB 558074 D01 for this test.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	0.59	0.67	0.88	0.55
802.11g	0.58	0.67	0.87	0.58
802.11n HT20	0.56	0.64	0.88	0.58
802.11n HT40	0.58	0.66	0.87	0.59
LE	2.10	3.13	0.67	1.74
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

Network Standards	Carrier frequency (MHz)	Read Value (dBm)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	15.17	15.72	30	PASS
	2437	15.04	15.59	30	PASS
	2462	15.13	15.68	30	PASS
802.11g	2412	15.32	15.90	30	PASS
	2437	15.23	15.81	30	PASS
	2462	15.13	15.71	30	PASS
802.11n HT20	2412	15.23	15.81	30	PASS
	2437	14.90	15.48	30	PASS
	2462	15.08	15.66	30	PASS
802.11n HT40	2422	15.31	15.90	30	PASS
	2437	15.02	15.61	30	PASS
	2452	15.12	15.71	30	PASS
Bluetooth (Low Energy)	2402	-3.12	-1.38	30	PASS
	2440	-2.52	-0.78	30	PASS
	2480	-0.66	1.08	30	PASS
Note: Output Power= Read Value +Duty cycle correction factor					

5.2. 6dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	11.341	8.752	500	PASS
	2437	11.300	7.449	500	PASS
	2462	11.313	7.452	500	PASS
802.11g	2412	16.626	16.300	500	PASS
	2437	16.631	16.050	500	PASS
	2462	16.623	16.050	500	PASS
802.11n HT20	2412	17.625	17.200	500	PASS
	2437	17.622	17.190	500	PASS
	2462	17.616	17.180	500	PASS
802.11n HT40	2422	36.423	35.750	500	PASS
	2437	36.391	35.740	500	PASS
	2452	36.398	35.730	500	PASS
Bluetooth (Low Energy)	2402	1.024	0.644	500	PASS
	2440	1.026	0.642	500	PASS
	2480	1.026	0.643	500	PASS

802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437




802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462



802.11n(HT20), Carrier frequency (MHz): 2412

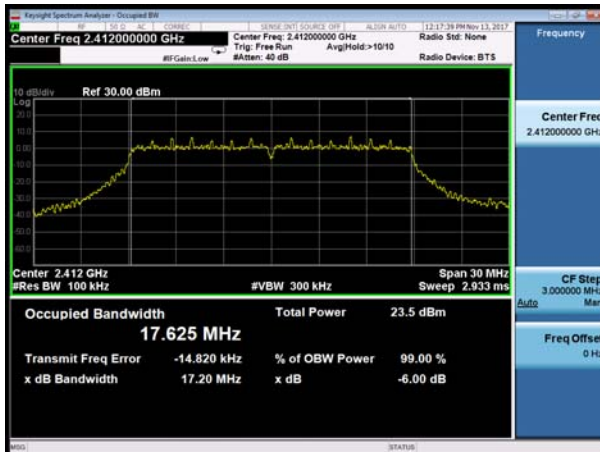


802.11n(HT40), Carrier frequency (MHz): 2422

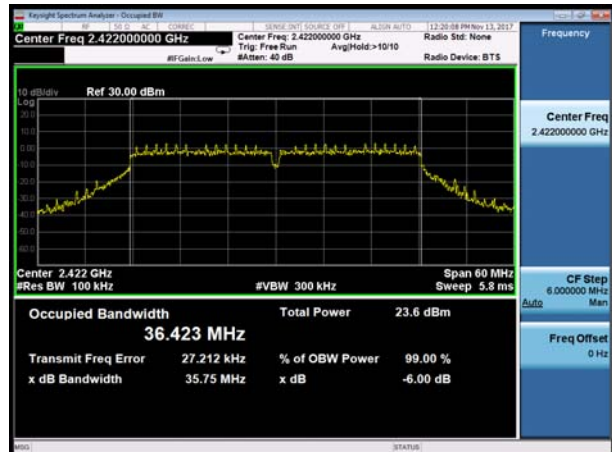

802.11n(HT20), Carrier frequency (MHz): 2437




802.11n(HT40), Carrier frequency (MHz): 2437

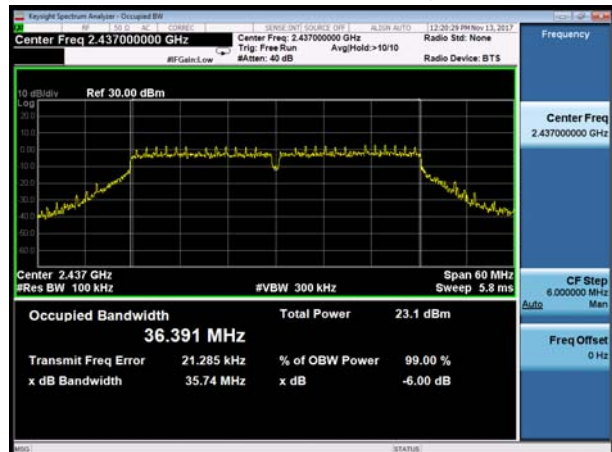

802.11n(HT20), Carrier frequency (MHz): 2462



802.11n(HT40), Carrier frequency (MHz): 2452

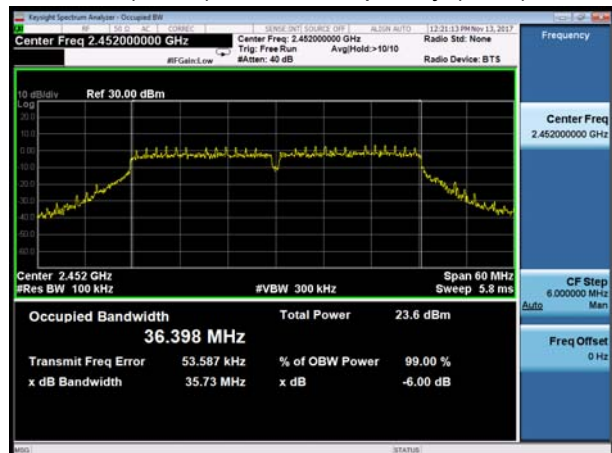

LE Carrier frequency (MHz): 2402



LE Carrier frequency (MHz): 2440



LE Carrier frequency (MHz): 2480



5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results: PASS


802.11b, Channel No.: 1

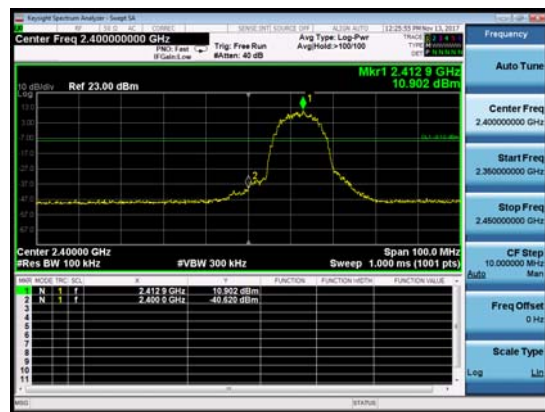


802.11b, Channel No.: 11

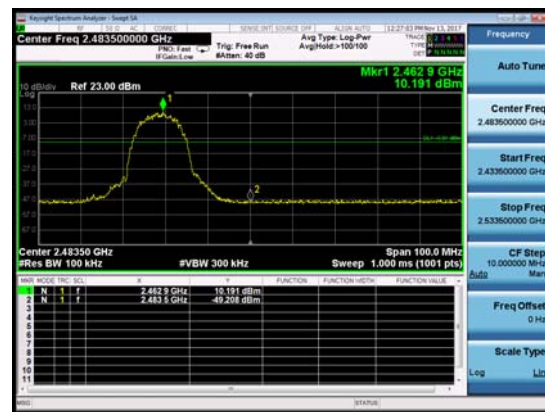


802.11g, Channel No.: 1

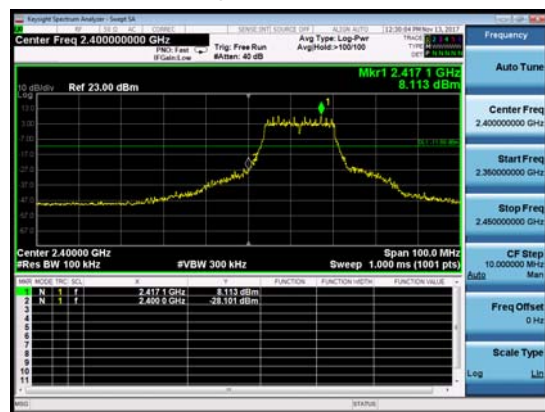


802.11g, Channel No.: 11

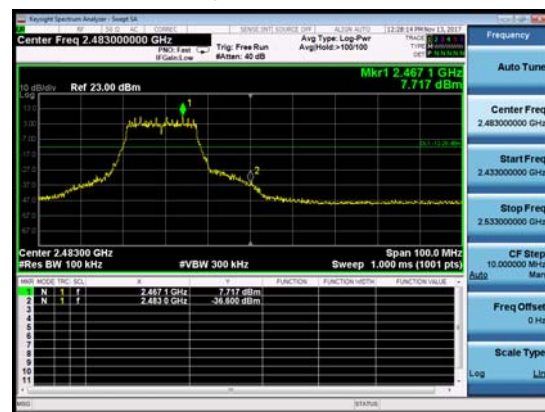


802.11n(HT20), Channel No.: 1

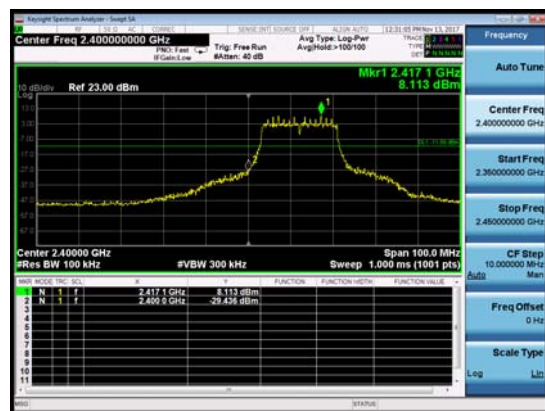

802.11n(HT20), Channel No.: 11

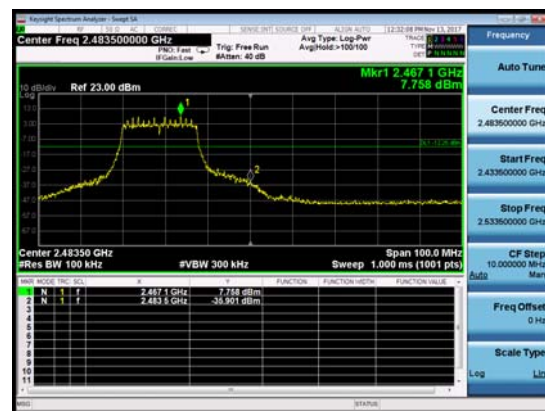


802.11n(HT40), Channel No.: 3

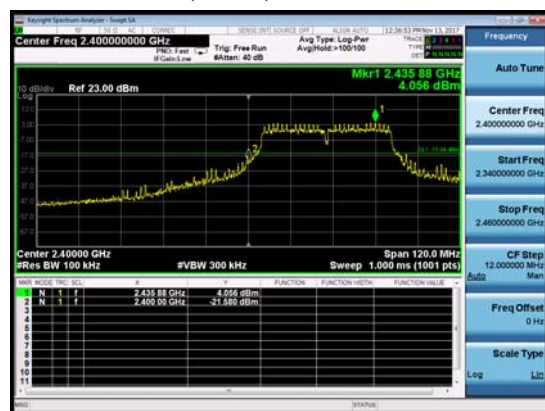

802.11n(HT40), Channel No.: 9



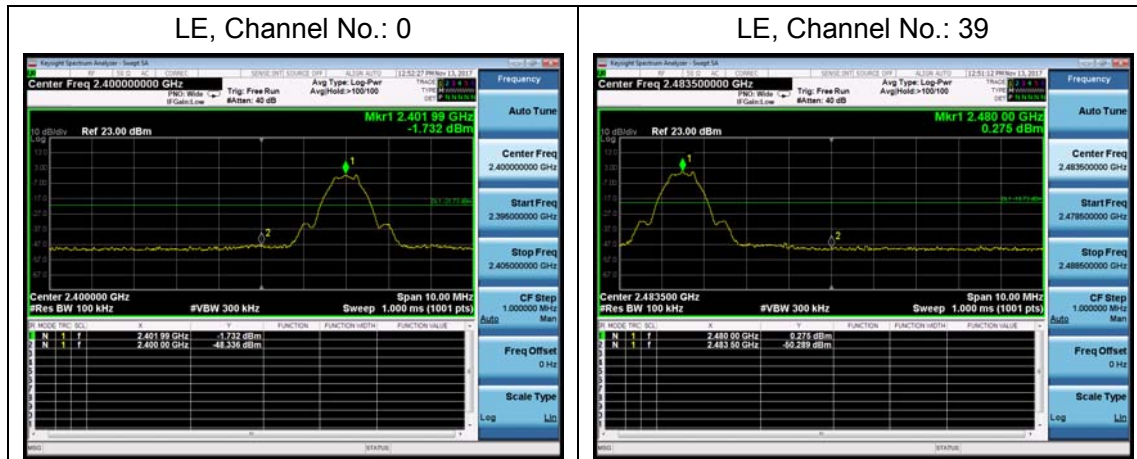

5.4. Power Spectral Density


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Method AVGPSD-2 in KDB 558074 D01 for this test.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.


Test Results:

Network Standards	Channel Number	Read Value (dBm)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-15.889	-15.339	8	PASS
	6	-16.513	-15.963	8	PASS
	11	-16.420	-15.870	8	PASS
802.11g	1	-18.511	-17.927	8	PASS
	6	-19.037	-18.453	8	PASS
	11	-18.985	-18.401	8	PASS
802.11n HT20	1	-17.967	-17.391	8	PASS
	6	-18.458	-17.882	8	PASS
	11	-18.395	-17.819	8	PASS
802.11n HT40	3	-22.082	-21.495	8	PASS
	6	-22.414	-21.827	8	PASS
	9	-22.211	-21.624	8	PASS
Bluetooth (Low Energy)	0	-22.809	-21.073	8	PASS
	19	-23.044	-21.308	8	PASS
	39	-20.738	-19.002	8	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					


802.11b, Channel No.: 1

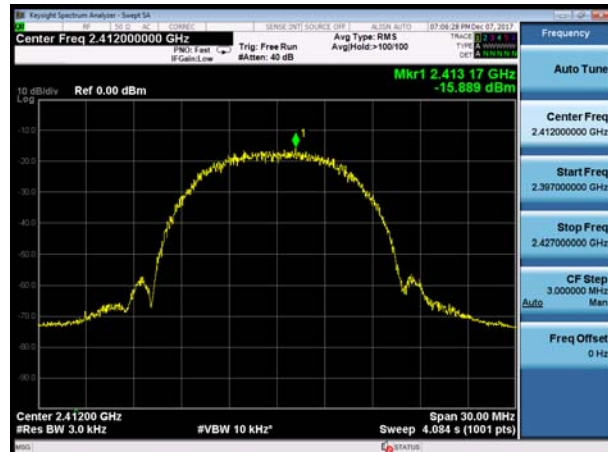


802.11g, Channel No.: 1

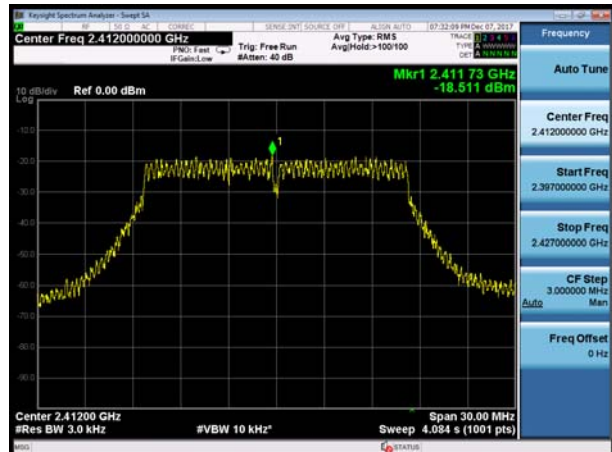


802.11b, Channel No.: 6

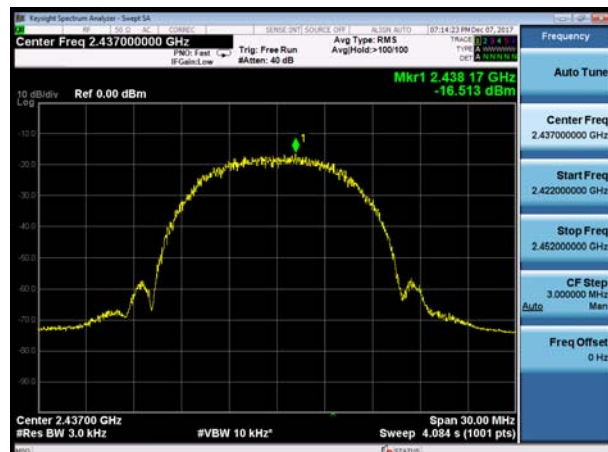


802.11g, Channel No.: 6

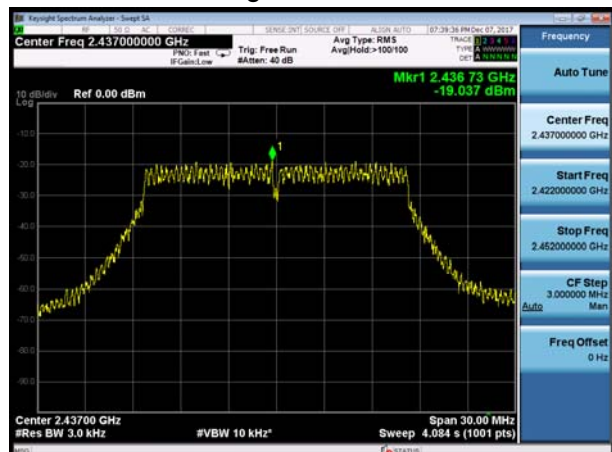


802.11b, Channel No.: 11

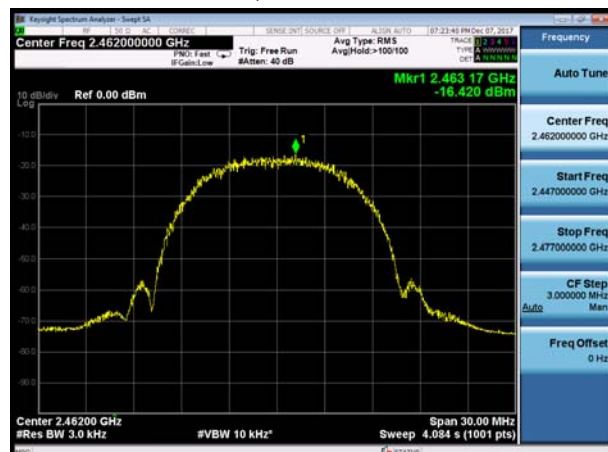


802.11g, Channel No.: 11

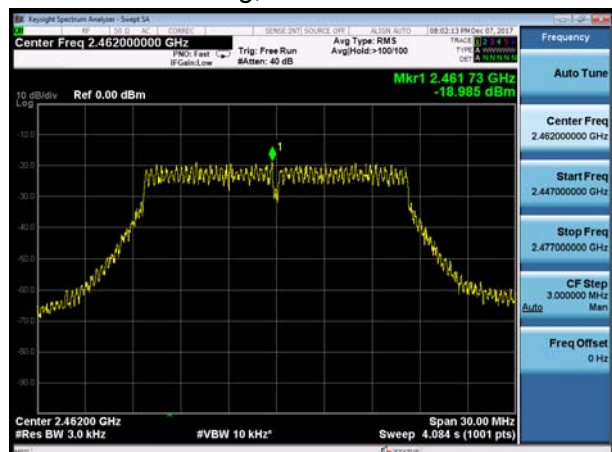


802.11n(HT20), Channel No. 1

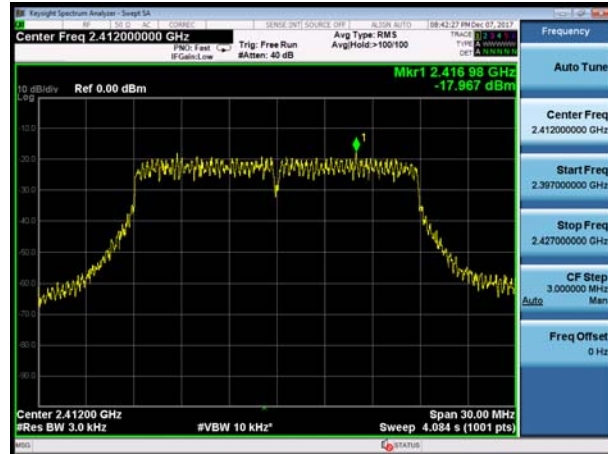


802.11n(HT40), Channel No. 3

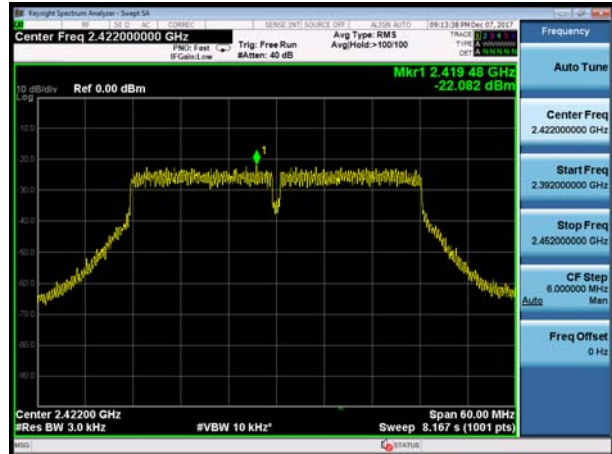


802.11n(HT20), Channel No. 6

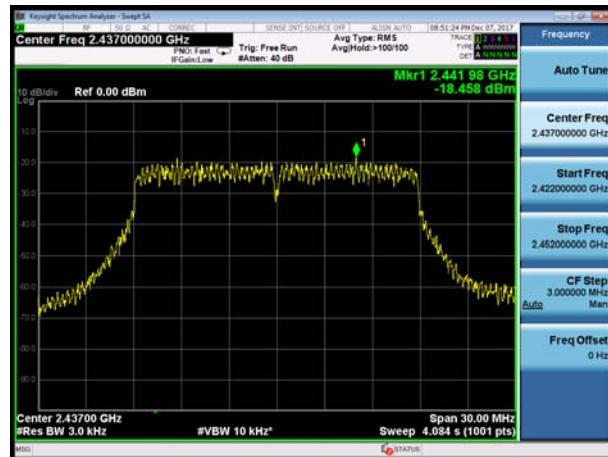


802.11n(HT40), Channel No. 6

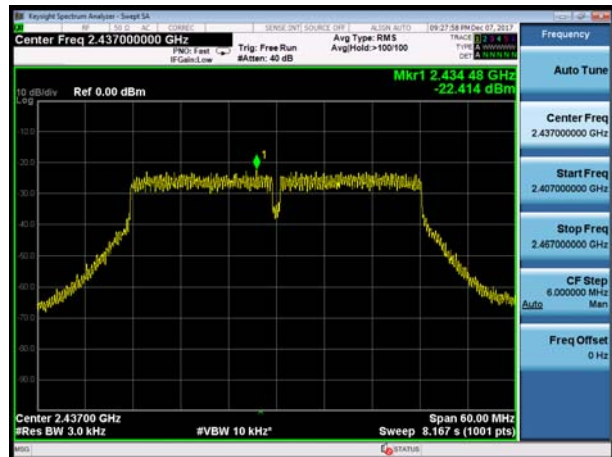

802.11n(HT20), Channel No. 11

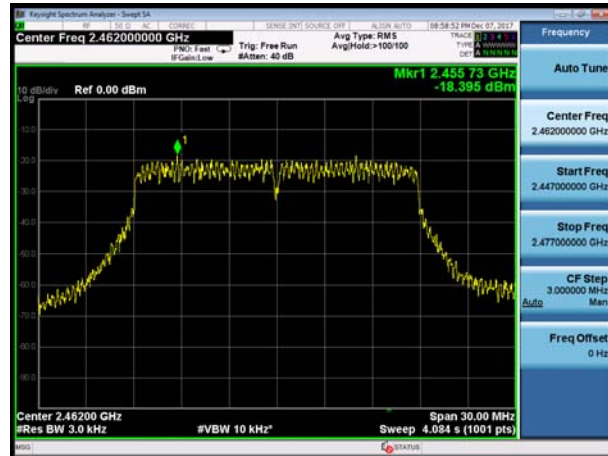

802.11n(HT40), Channel No. 9

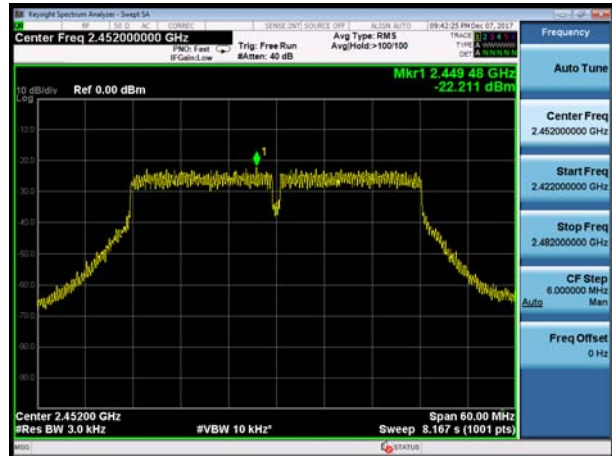



LE, Channel No.: 0



LE, Channel No.: 19



LE, Channel No.: 39



5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits


Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	16.641	-3.359
	2437	16.615	-3.385
	2462	16.192	-3.808
802.11g	2412	14.284	-5.716
	2437	14.160	-5.840
	2462	13.981	-6.019
802.11n HT20	2412	13.976	-6.024
	2437	13.824	-6.176
	2462	13.664	-6.336
802.11n HT40	2422	11.157	-8.843
	2437	10.804	-9.196
	2452	10.695	-9.305
Bluetooth (Low Energy)	2402	-1.288	-21.288
	2440	0.048	-19.952
	2480	0.228	-19.772


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

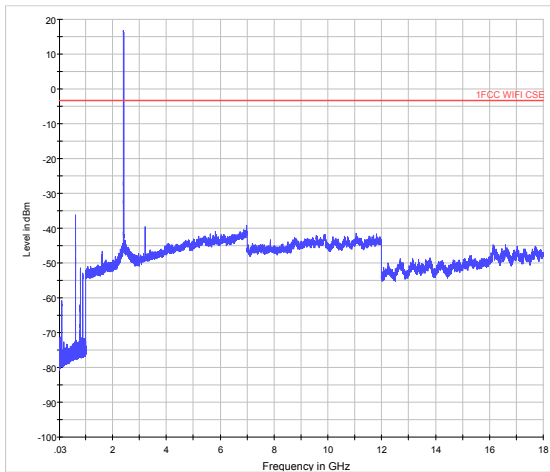**Test Results:**


802.11b CH1 30MHz to 18GHz

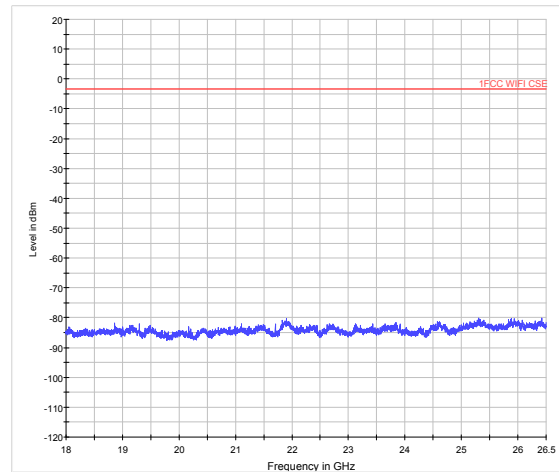


802.11b CH1 18GHz to 26.5GHz

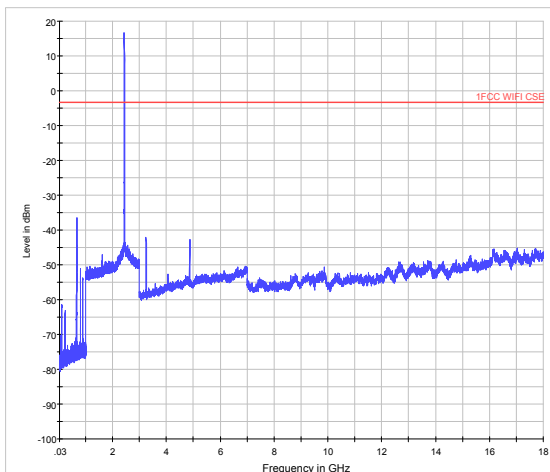


802.11b CH6 30MHz to 18GHz

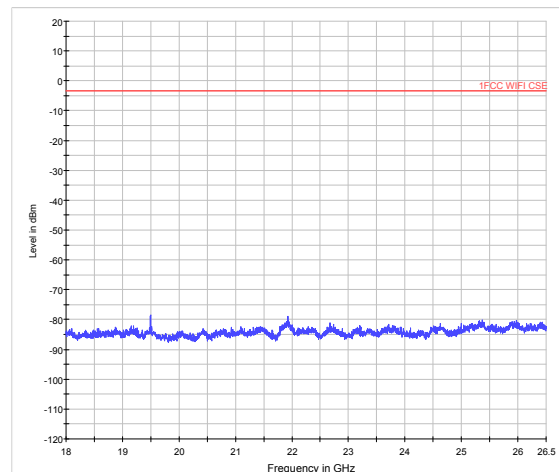


802.11b CH6 18GHz to 26.5GHz

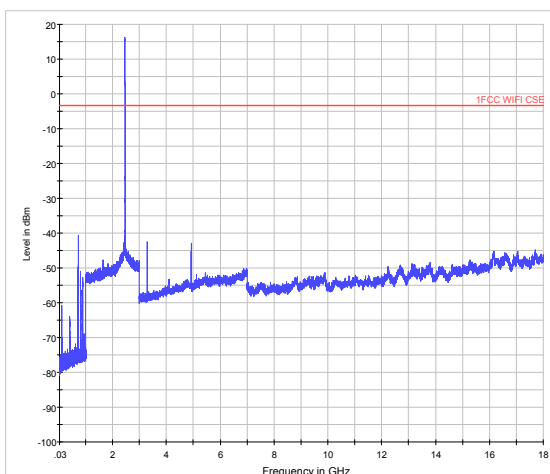


802.11b CH11 30MHz to 18GHz

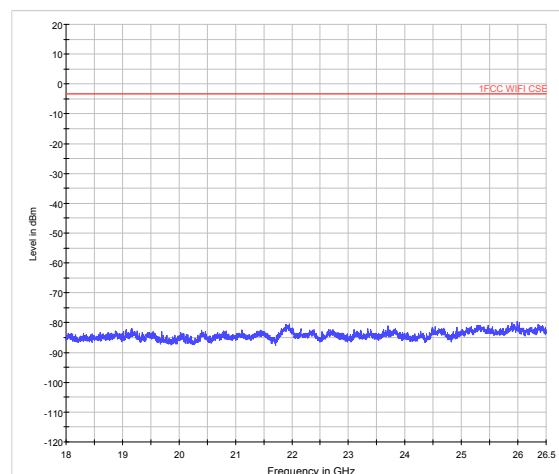


802.11b CH11 18GHz to 26.5GHz

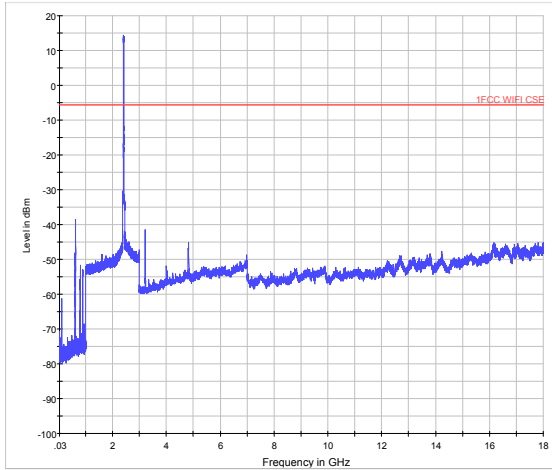


802.11g CH1 30MHz to 18GHz

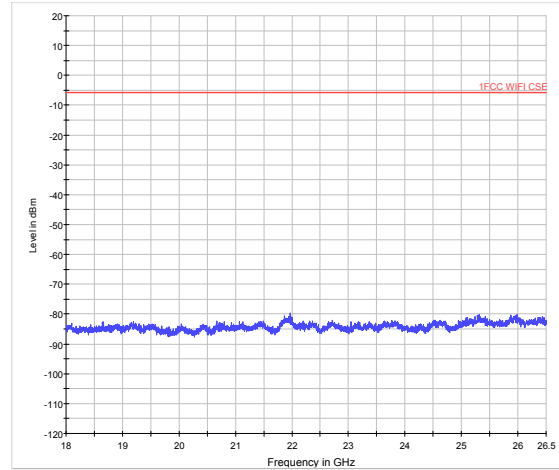


802.11g CH1 18GHz to 26.5GHz

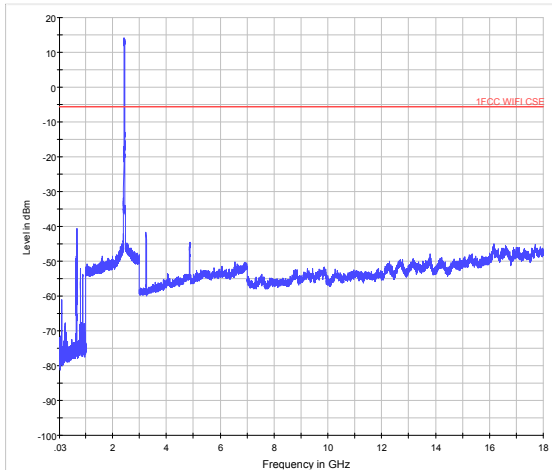


802.11g CH6 30MHz to 18GHz

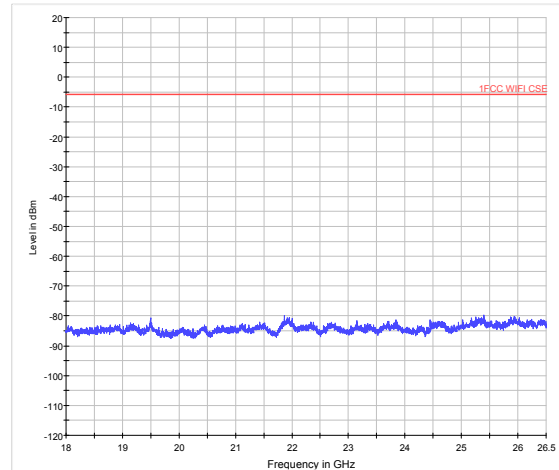


802.11g CH6 18GHz to 26.5GHz

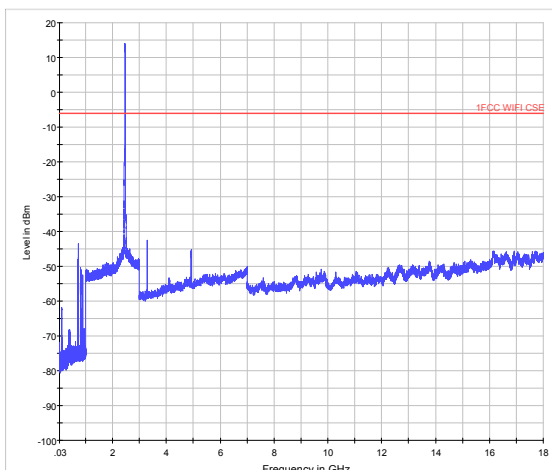


802.11g CH11 30MHz to 18GHz

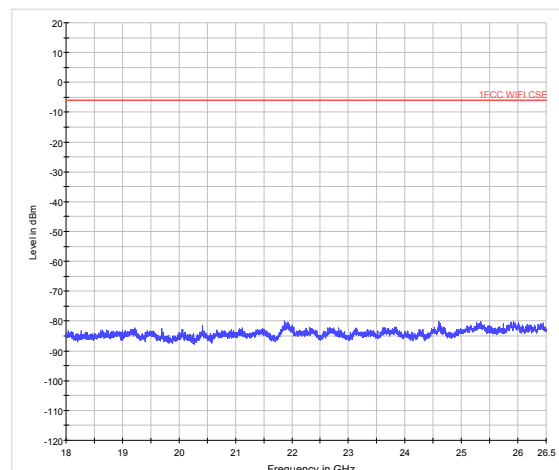


802.11g CH11 18GHz to 26.5GHz

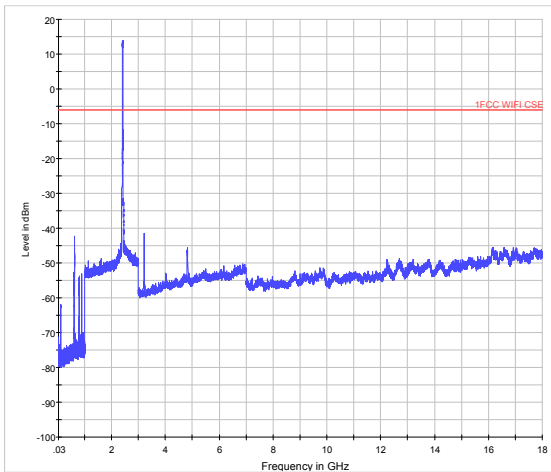


802.11n (HT20) CH1 30MHz to 18GHz

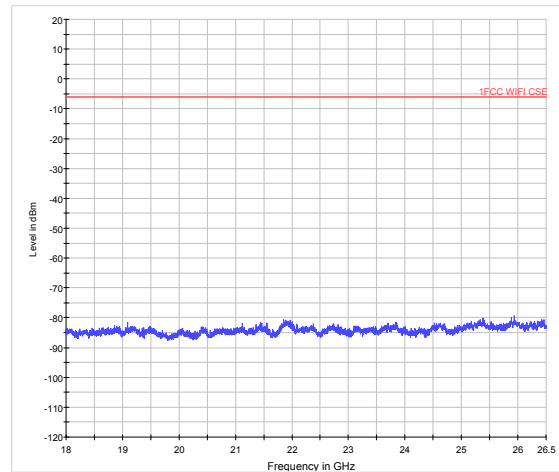


802.11n (HT20) CH1 18GHz to 26.5GHz

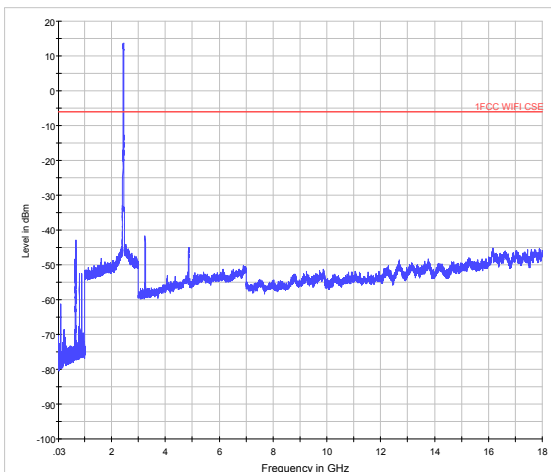


802.11n (HT20) CH6 30MHz to 18GHz

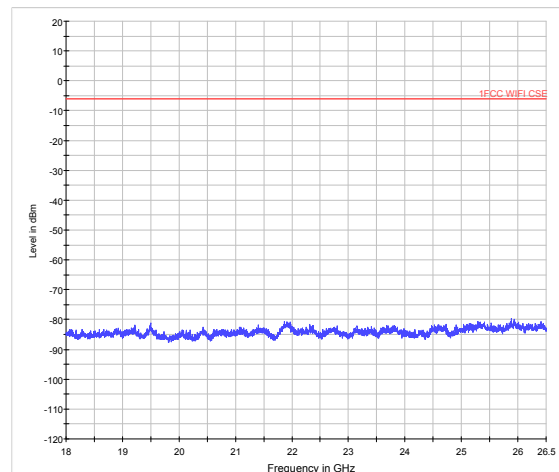


802.11n (HT20) CH6 18GHz to 26.5GHz

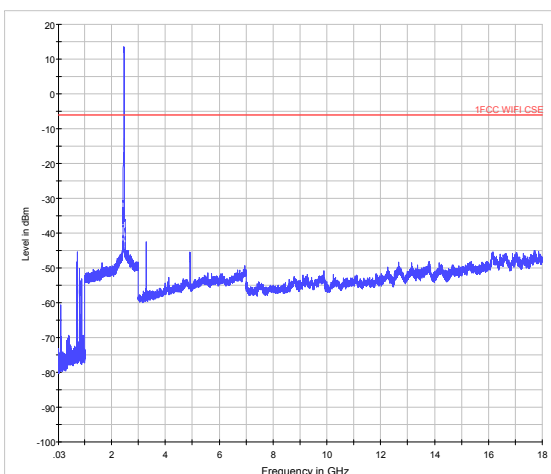


802.11n (HT20) CH11 30MHz to 18GHz

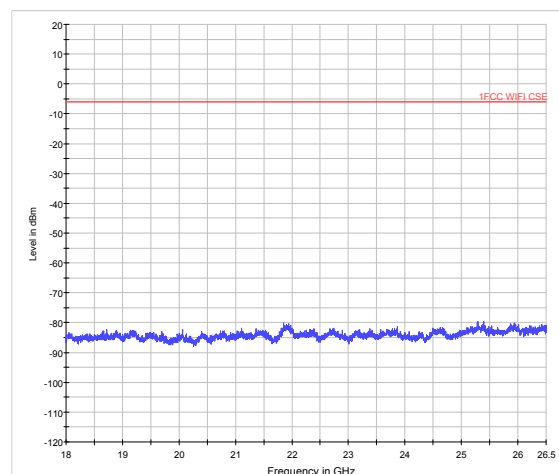


802.11n (HT20) CH11 18GHz to 26.5GHz

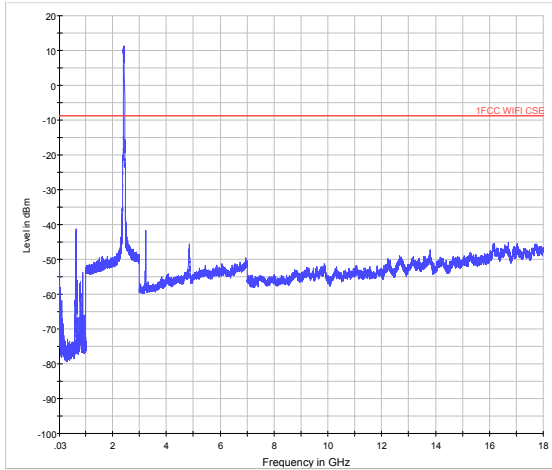


802.11n (HT40) CH3 30MHz to 18GHz

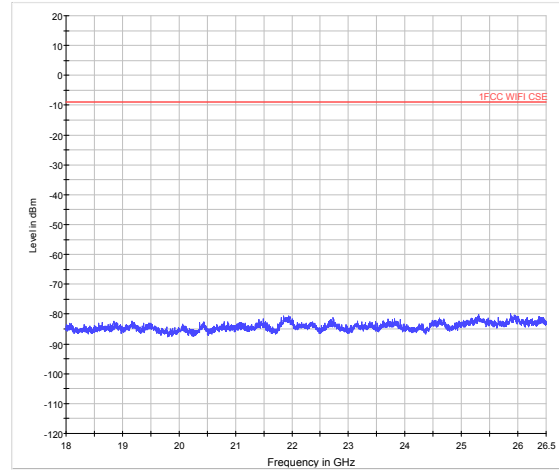


802.11n (HT40) CH3 18GHz to 26.5GHz

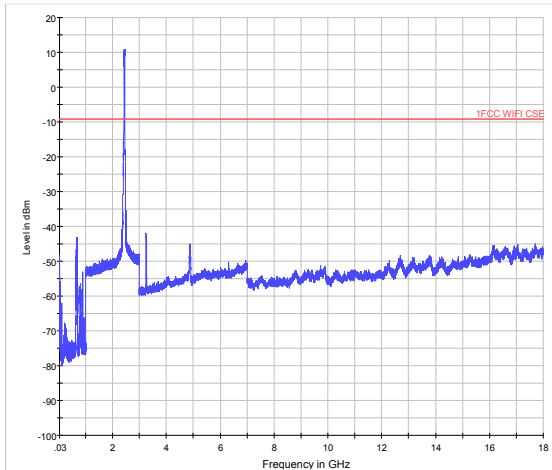


802.11n (HT40) CH6 30MHz to 18GHz

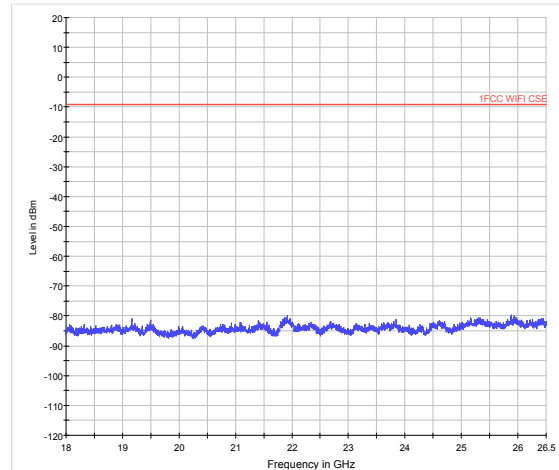


802.11n (HT40) CH6 18GHz to 26.5GHz

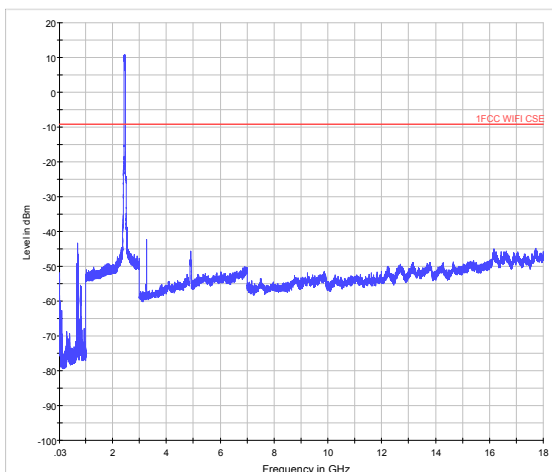


802.11n (HT40) CH9 30MHz to 18GHz

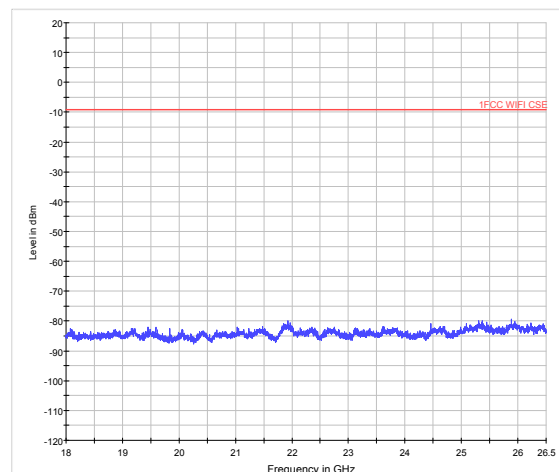


802.11n (HT40) CH9 18GHz to 26.5GHz

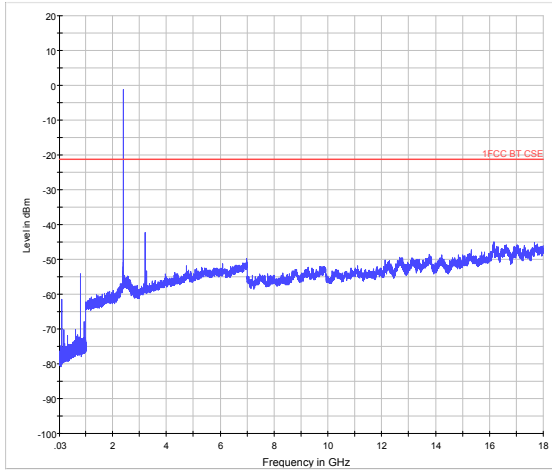


LE CH0 30MHz to 18GHz

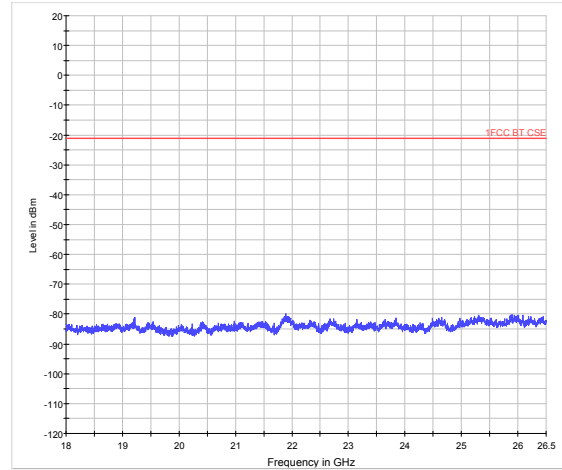


LE CH0 18GHz to 26.5GHz

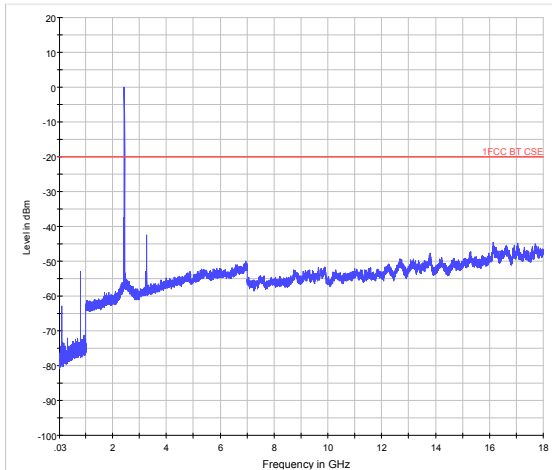


LE CH19 30MHz to 18GHz

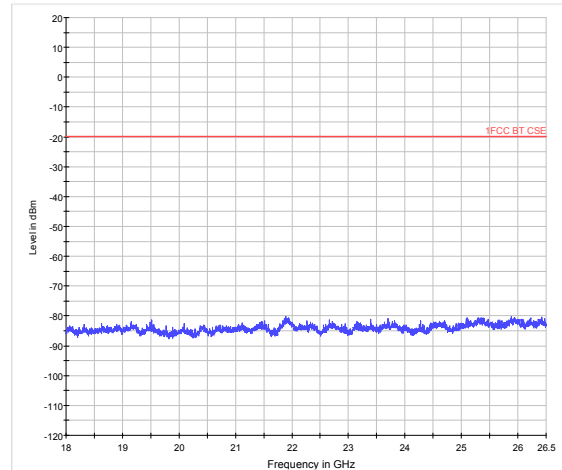

LE CH19 18GHz to 26.5GHz

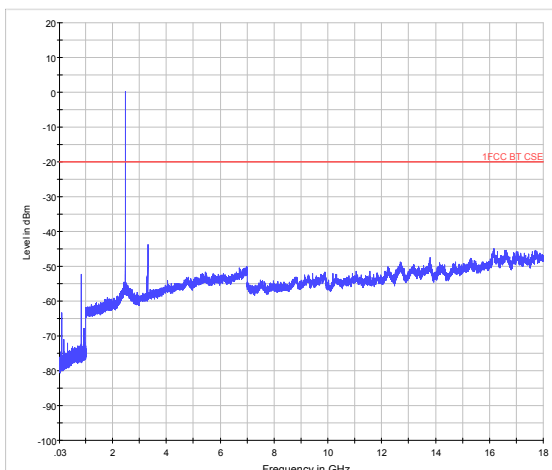

LE CH39 30MHz to 18GHz

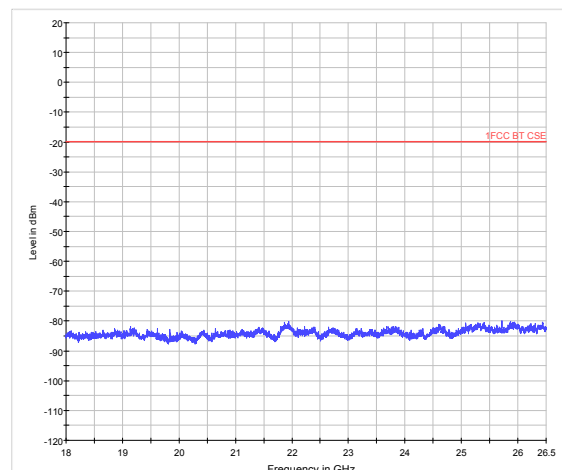

LE CH39 18GHz to 26.5GHz

5.6. Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

This method refer to KDB 558074.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times \text{RBW}]$
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)


g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

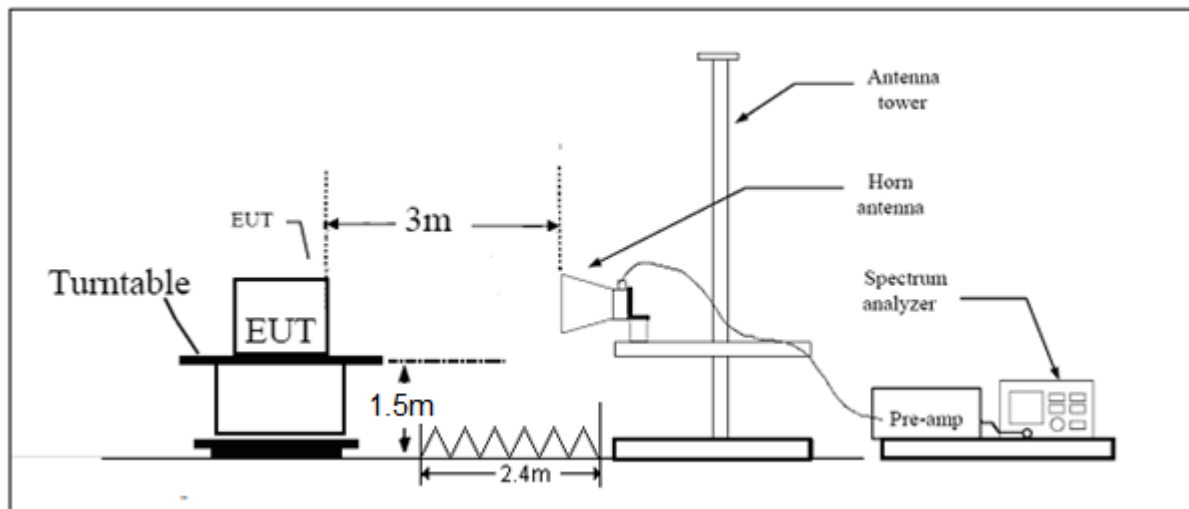

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Results: PASS

The signal beyond the limit is carrier.

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	0.59	0.67	0.88	0.55
802.11g	0.58	0.67	0.87	0.58
802.11n HT20	0.56	0.64	0.88	0.58
802.11n HT40	0.58	0.66	0.87	0.59
LE	2.10	3.13	0.67	1.74
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

802.11b-Channel 1

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	51.840	--	200.0	V	135	0.55	52.39	21.61	74
2390	--	40.254	200.0	V	135	0.55	40.804	13.196	54

802.11b-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	51.351	--	200.0	V	135	0.55	51.901	22.099	74
2483.5	--	40.521	200.0	V	135	0.55	41.071	12.929	54

802.11g-Channel 1

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	56.622	--	150	V	65	0.58	57.202	16.798	74
2390	--	44.121	150	V	65	0.58	44.701	9.299	54

802.11g-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	59.459	--	150	V	78	0.58	60.039	13.961	74
2483.5	--	46.802	150	V	78	0.58	47.382	6.618	54

**802.11n HT20 -Channel 1**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	61.973	--	200	V	90	0.58	62.553	11.447	74
2390	--	49.437	200	V	90	0.58	50.017	3.983	54

802.11n HT20-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	63.046	--	200	V	90	0.58	63.626	10.374	74
2483.5	--	49.949	200	V	90	0.58	50.529	3.471	54

802.11n HT40 -Channel 3

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	55.605	--	150	V	46	0.59	56.195	17.805	74
2390	--	47.051	150	V	46	0.59	47.641	6.359	54

802.11n HT40-Channel 9

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	57.207	--	150	V	46	0.59	57.797	16.203	74
2483.5	--	48.039	150	V	46	0.59	48.629	5.371	54

LE Channel 0

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	51.064	--	200.0	V	135	1.74	52.804	21.196	74
2390	--	38.716	200.0	V	135	1.74	40.456	13.544	54

LE Channel 39

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	50.367	--	200.0	V	135	1.74	52.107	21.893	74
2483.5	--	39.294	200.0	V	135	1.74	41.034	12.966	54

5.7. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

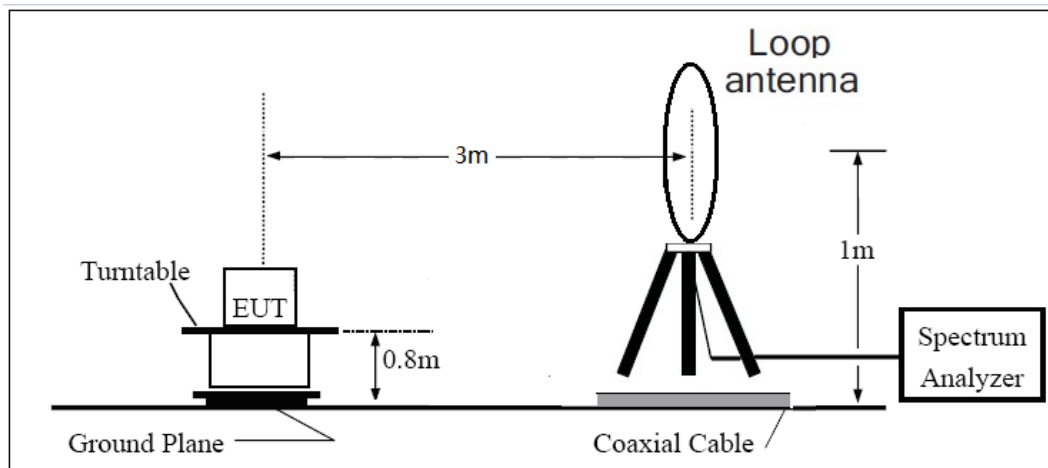

30MHz ~ 1GHz

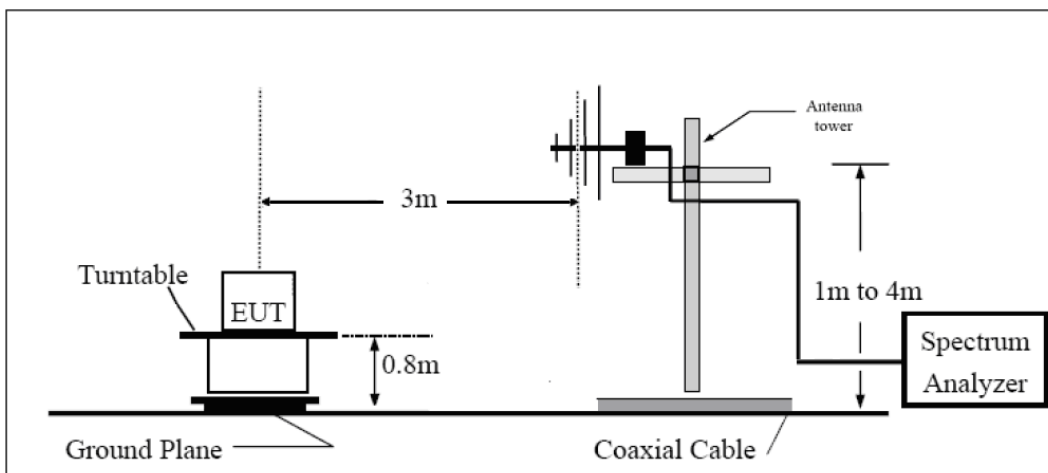

Above 1GHz

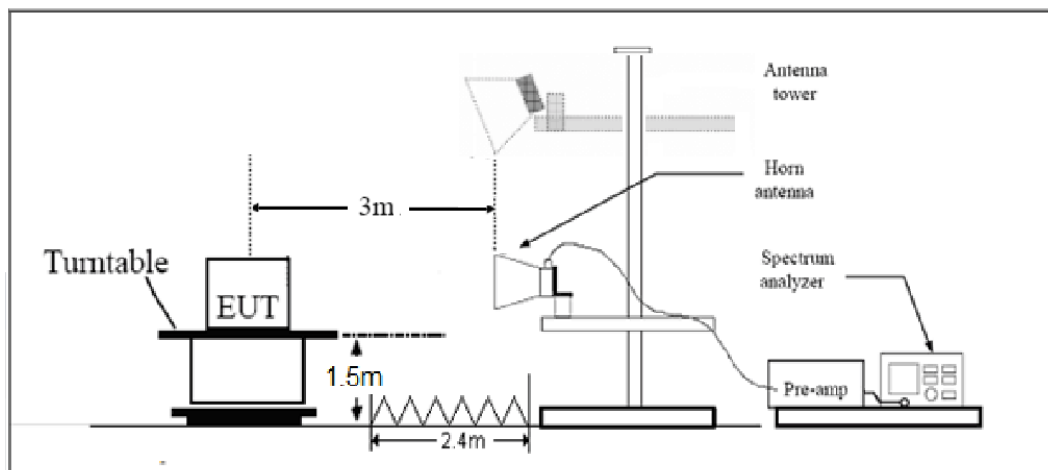

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

FCC RE 0.03-1GHz QP Class B

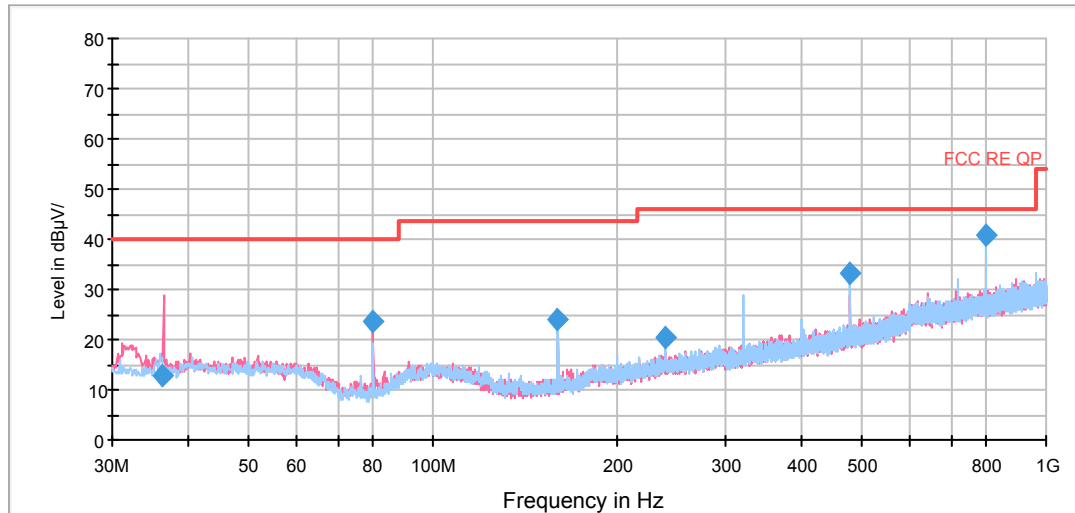

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
36.162000	12.7	0.5	100.0	V	327.0	12.2	27.3	40.0
79.995000	23.7	15.0	125.0	V	108.0	8.7	16.3	40.0
159.980000	24.0	14.2	125.0	H	188.0	9.8	19.5	43.5
239.988000	20.4	6.4	113.0	H	144.0	14.0	25.6	46.0
479.983000	33.2	13.1	100.0	H	155.0	20.1	12.8	46.0
799.986000	40.7	15.4	100.0	H	84.0	25.3	5.3	46.0


Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak


802.11b CH1

FCC RE 1G-3GHz PK+AV Class B

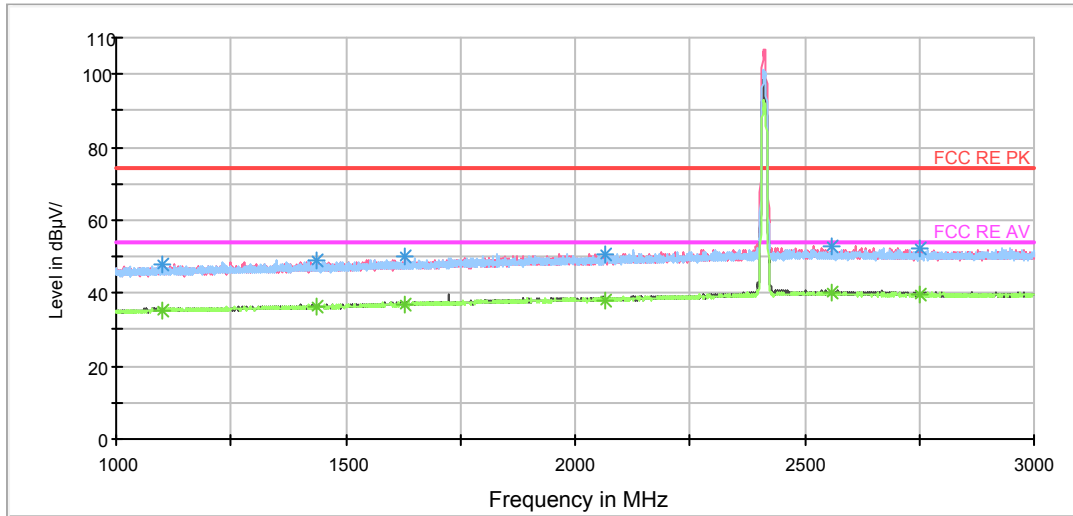


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

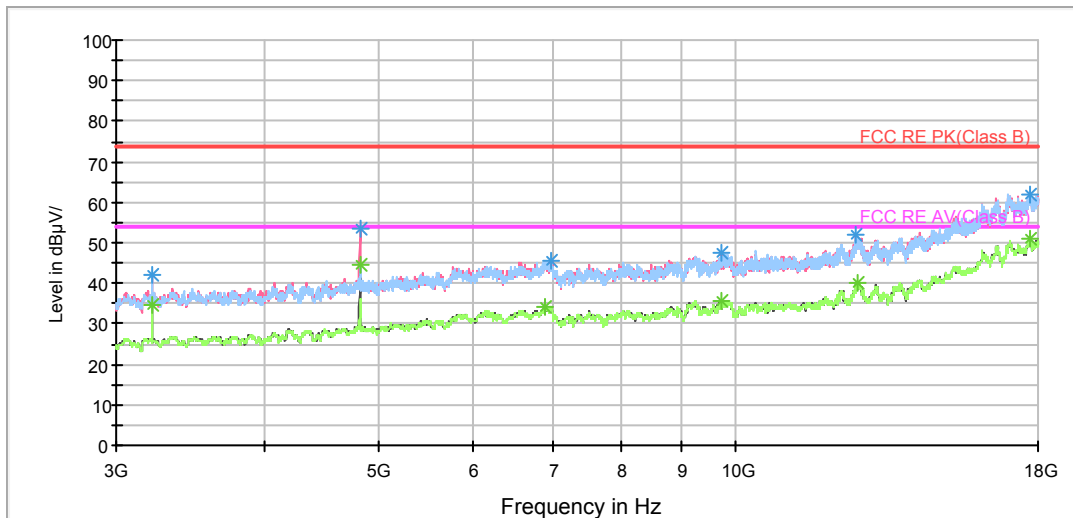

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

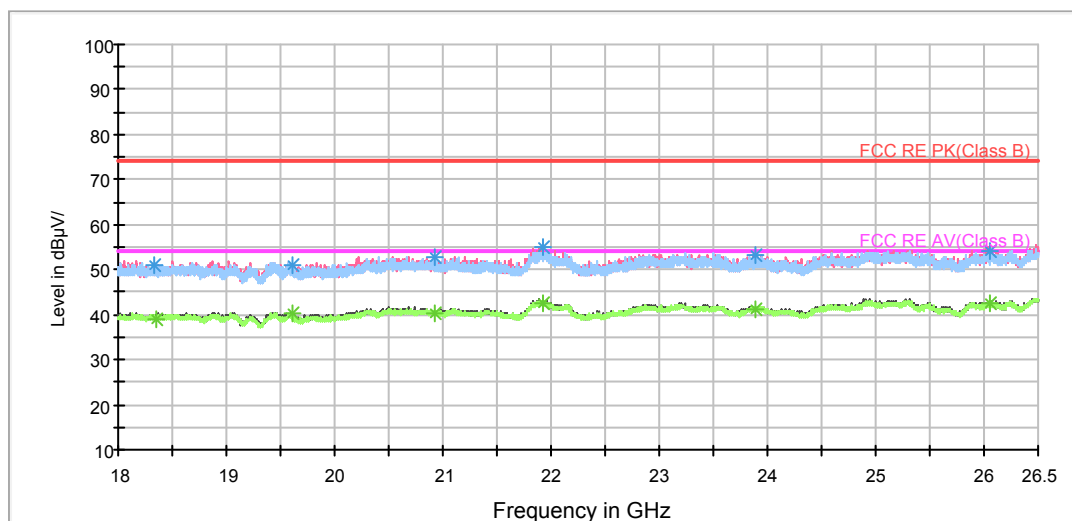

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1100.400000	47.8	100.0	V	344.0	45.7	2.1	26.2	74
1438.800000	48.9	100.0	H	2.0	45.7	3.2	25.1	74
1630.800000	49.8	100.0	V	347.0	45.9	3.9	24.2	74
2064.400000	50.8	100.0	H	0.0	45.3	5.5	23.2	74
2560.800000	53.0	100.0	V	173.0	45.8	7.2	21.0	74
2753.200000	52.3	100.0	V	338.0	44.9	7.4	21.7	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1100.400000	35.4	100.0	V	344.0	33.3	2.1	18.6	54
1438.800000	36.5	100.0	H	2.0	33.3	3.2	17.5	54
1630.800000	37.1	100.0	V	347.0	33.2	3.9	16.9	54
2064.400000	38.2	100.0	H	0.0	32.7	5.5	15.8	54
2560.800000	39.9	100.0	V	173.0	32.7	7.2	14.1	54
2753.200000	39.5	100.0	V	338.0	32.1	7.4	14.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH6

FCC RE 1G-3GHz PK+AV Class B

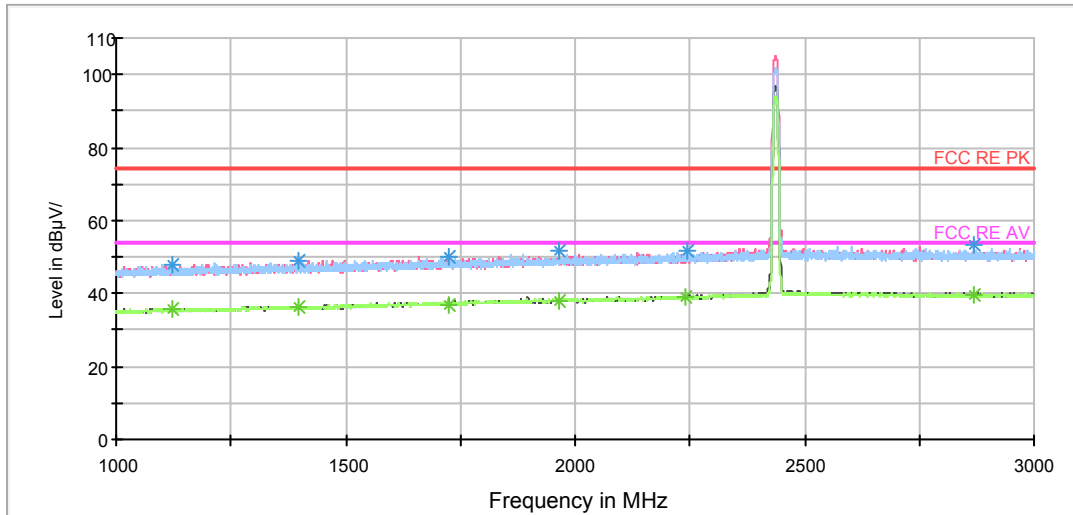


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

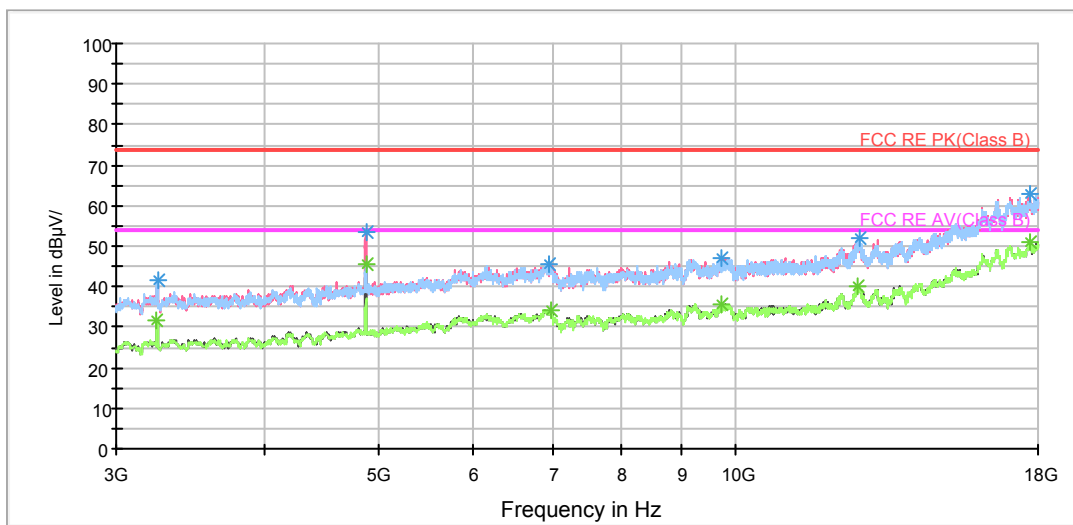

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

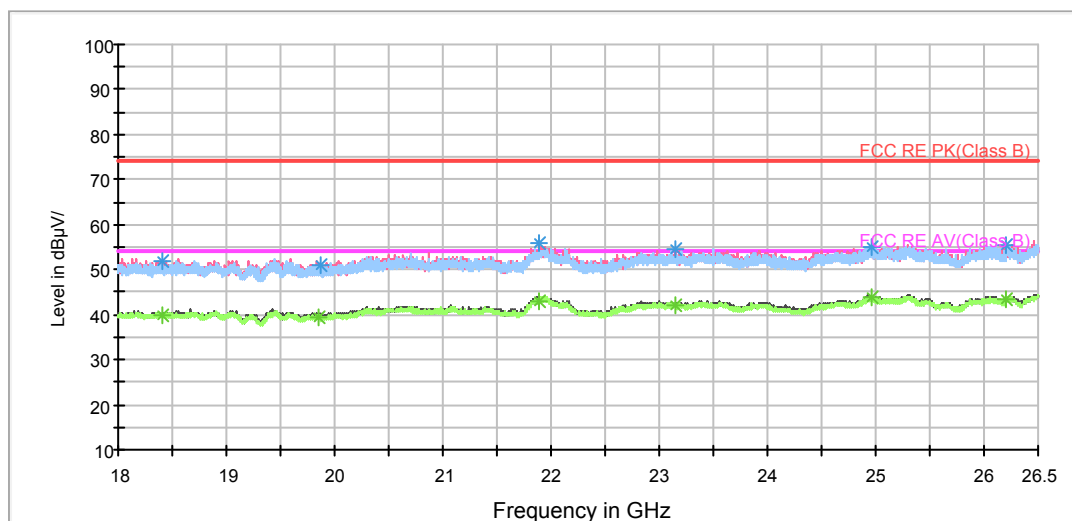

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1120.800000	47.8	100.0	V	346.0	45.6	2.2	26.2	74
1395.200000	48.7	100.0	V	342.0	45.7	3.0	25.3	74
1723.200000	50.3	100.0	V	0.0	46.1	4.2	23.7	74
1964.800000	51.5	100.0	H	108.0	46.4	5.1	22.5	74
2242.400000	51.5	100.0	V	310.0	45.3	6.2	22.5	74
2870.400000	53.3	100.0	H	22.0	45.8	7.5	20.7	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1120.800000	35.6	100.0	V	346.0	33.4	2.2	18.4	54
1395.200000	36.1	100.0	V	342.0	33.1	3.0	17.9	54
1723.200000	37.0	100.0	V	0.0	32.8	4.2	17.0	54
1964.800000	38.1	100.0	H	108.0	33.0	5.1	15.9	54
2239.200000	38.9	100.0	H	2.0	32.7	6.2	15.1	54
2870.400000	39.7	100.0	H	22.0	32.2	7.5	14.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH11

FCC RE 1G-3GHz PK+AV Class B

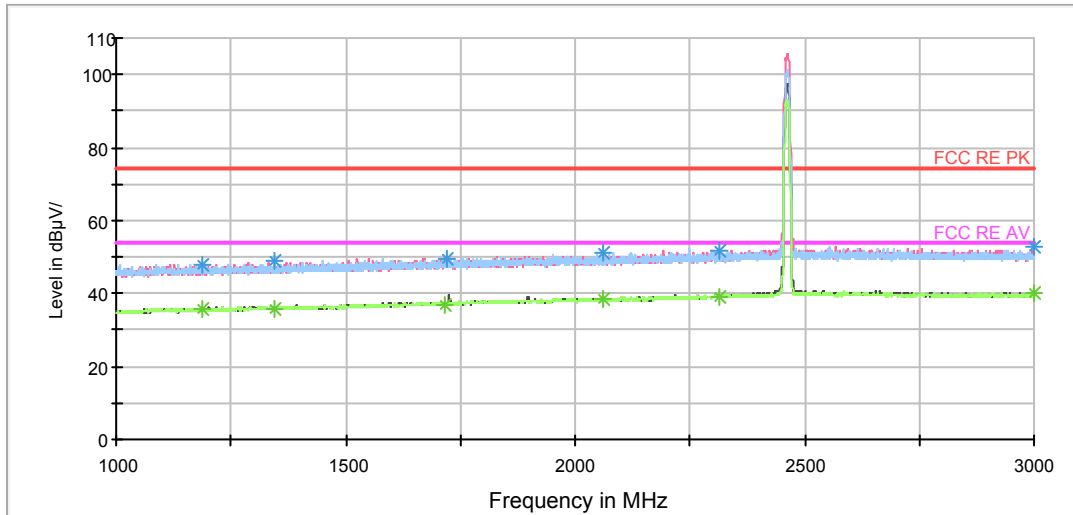


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

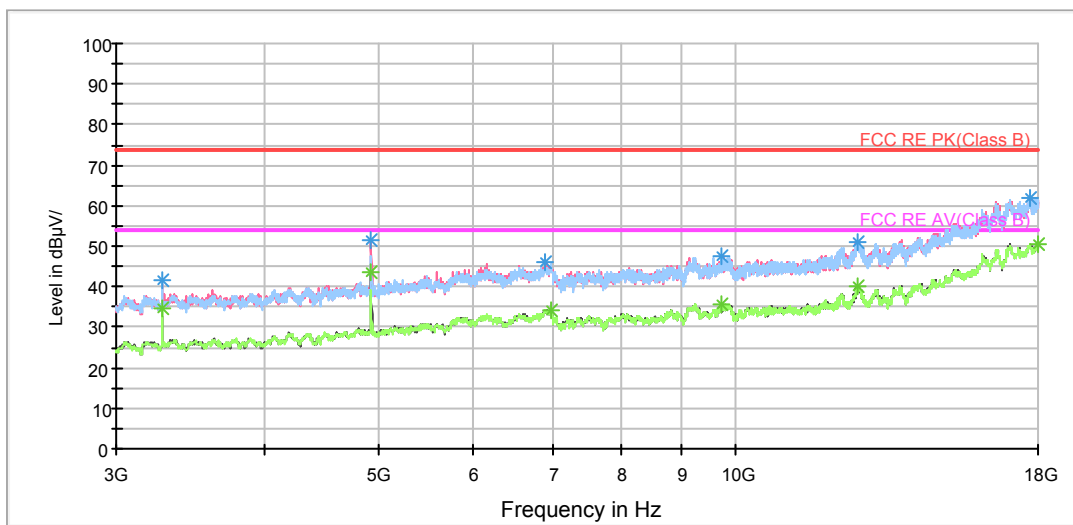

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

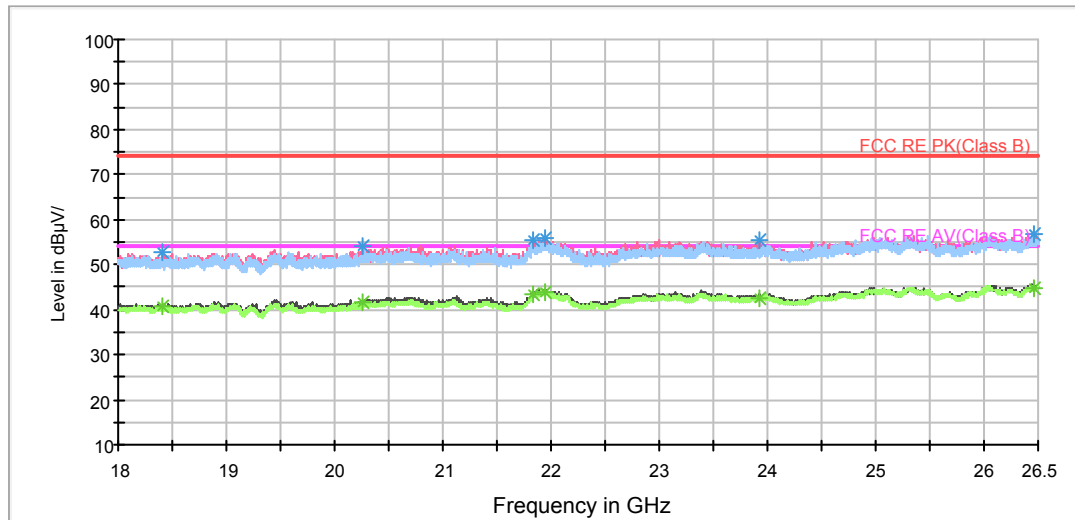

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.400000	48.1	100.0	V	355.0	45.7	2.4	25.9	74
1346.400000	48.8	100.0	V	343.0	45.9	2.9	25.2	74
1718.400000	49.8	100.0	H	220.0	45.6	4.2	24.2	74
2062.000000	51.0	100.0	V	305.0	45.5	5.5	23.0	74
2315.200000	51.8	100.0	V	355.0	45.3	6.5	22.2	74
2999.600000	52.9	100.0	V	283.0	45.3	7.6	21.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.400000	35.7	100.0	V	355.0	33.3	2.4	18.3	54
1346.400000	35.8	100.0	V	343.0	32.9	2.9	18.2	54
1715.600000	36.9	100.0	V	353.0	32.7	4.2	17.1	54
2062.000000	38.2	100.0	V	305.0	32.7	5.5	15.8	54
2315.200000	39.3	100.0	V	355.0	32.8	6.5	14.7	54
2999.600000	39.9	100.0	H	87.0	32.3	7.6	14.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH1

FCC RE 1G-3GHz PK+AV Class B

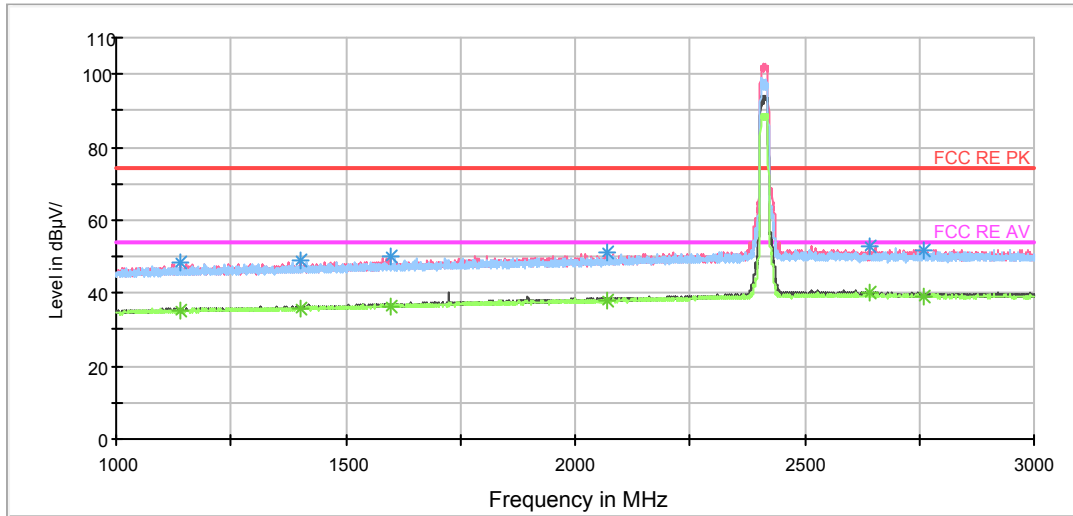


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

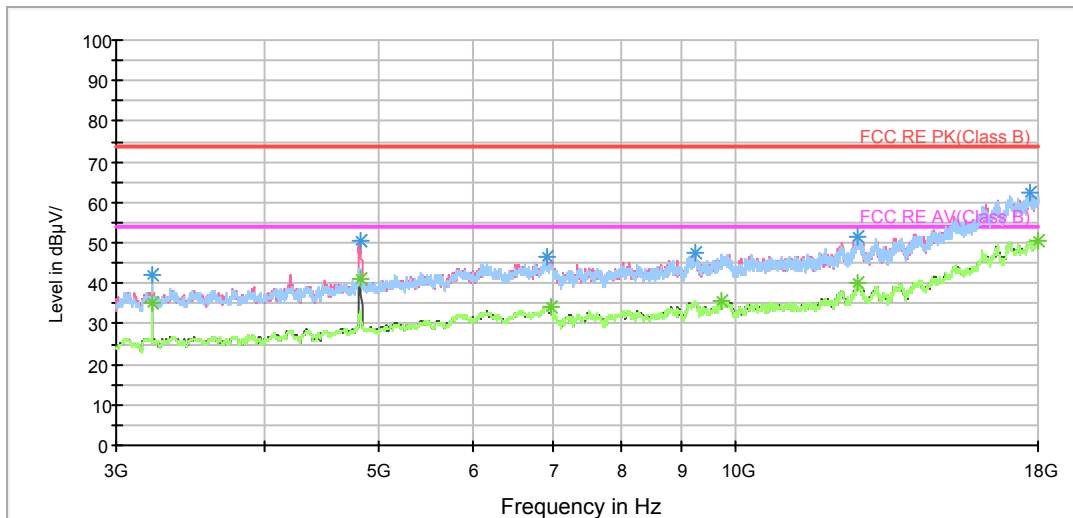

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

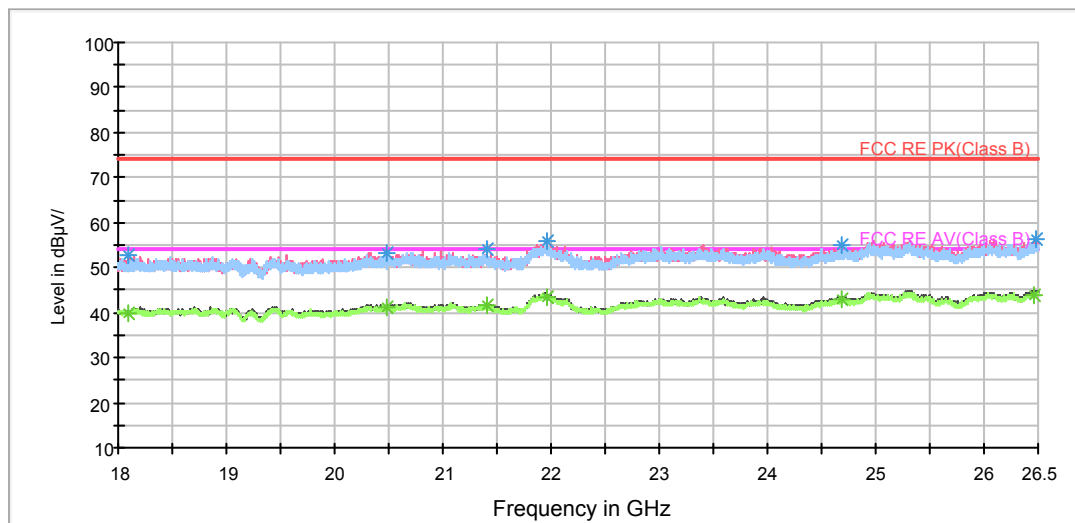

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1141.200000	48.2	100.0	V	304.0	45.9	2.3	25.8	74
1402.000000	49.1	100.0	V	356.0	46.0	3.1	24.9	74
1598.000000	50.0	100.0	V	202.0	46.3	3.7	24.0	74
2072.000000	51.4	100.0	H	127.0	45.9	5.5	22.6	74
2642.000000	52.8	100.0	V	179.0	45.5	7.3	21.2	74
2758.000000	51.7	100.0	V	337.0	44.3	7.4	22.3	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1141.200000	35.2	100.0	V	304.0	32.9	2.3	18.8	54
1402.000000	35.9	100.0	V	356.0	32.8	3.1	18.1	54
1598.000000	36.6	100.0	V	202.0	32.9	3.7	17.4	54
2072.000000	37.9	100.0	H	127.0	32.4	5.5	16.1	54
2642.000000	39.9	100.0	V	179.0	32.6	7.3	14.1	54
2758.000000	39.3	100.0	V	337.0	31.9	7.4	14.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH6

FCC RE 1G-3GHz PK+AV Class B

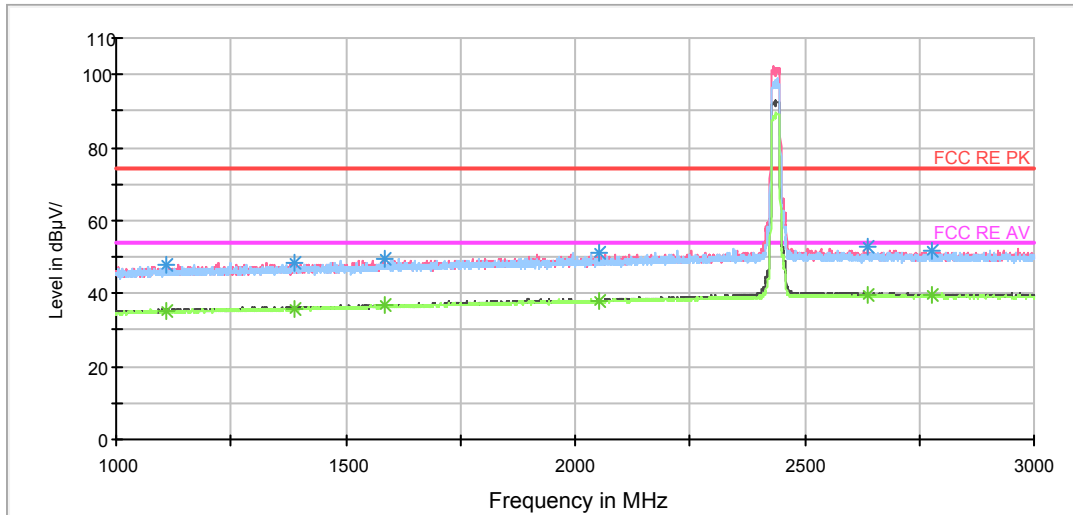


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

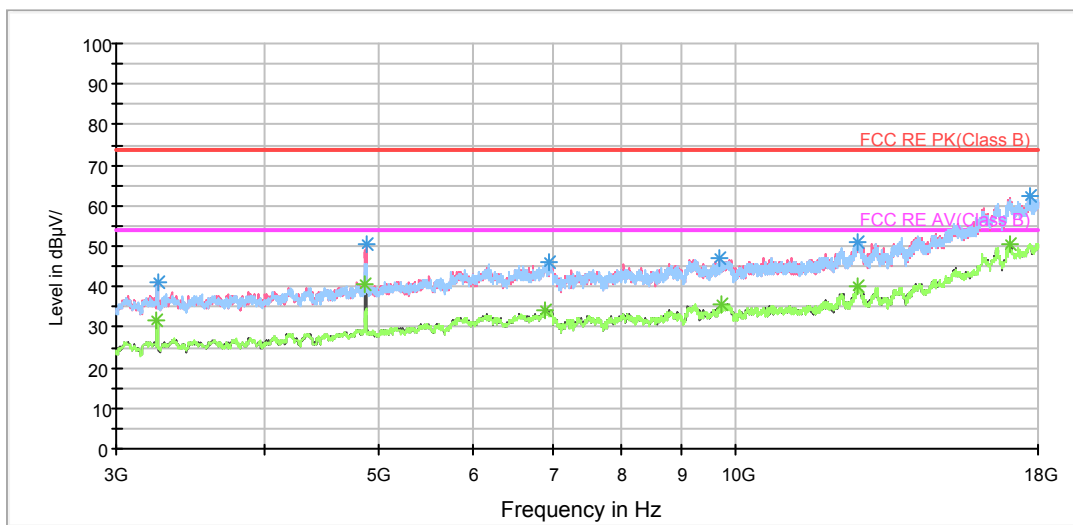

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

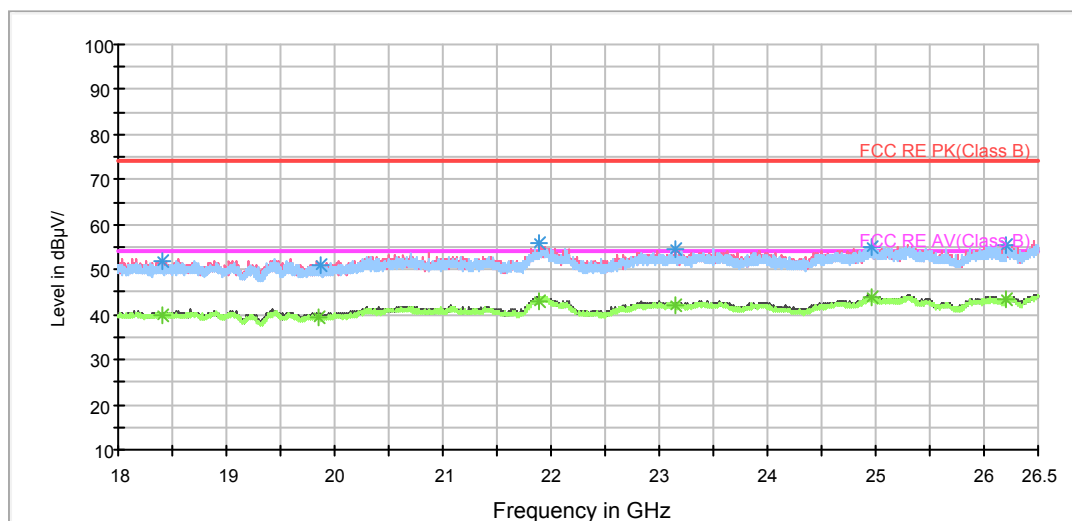

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1108.800000	47.7	100.0	H	0.0	45.5	2.2	26.3	74
1388.000000	48.6	100.0	V	0.0	45.6	3.0	25.4	74
1585.200000	49.3	100.0	V	358.0	45.6	3.7	24.7	74
2054.000000	51.3	100.0	H	259.0	45.9	5.4	22.7	74
2636.000000	53.1	100.0	V	356.0	45.8	7.3	20.9	74
2775.600000	51.7	100.0	H	7.0	44.3	7.4	22.3	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1108.800000	35.0	100.0	H	0.0	32.8	2.2	19.0	54
1388.000000	35.9	100.0	V	0.0	32.9	3.0	18.1	54
1585.200000	36.6	100.0	V	358.0	32.9	3.7	17.4	54
2054.000000	37.7	100.0	H	259.0	32.3	5.4	16.3	54
2636.000000	39.8	100.0	V	356.0	32.5	7.3	14.2	54
2777.600000	39.4	100.0	V	172.0	32.0	7.4	14.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH11

FCC RE 1G-3GHz PK+AV Class B

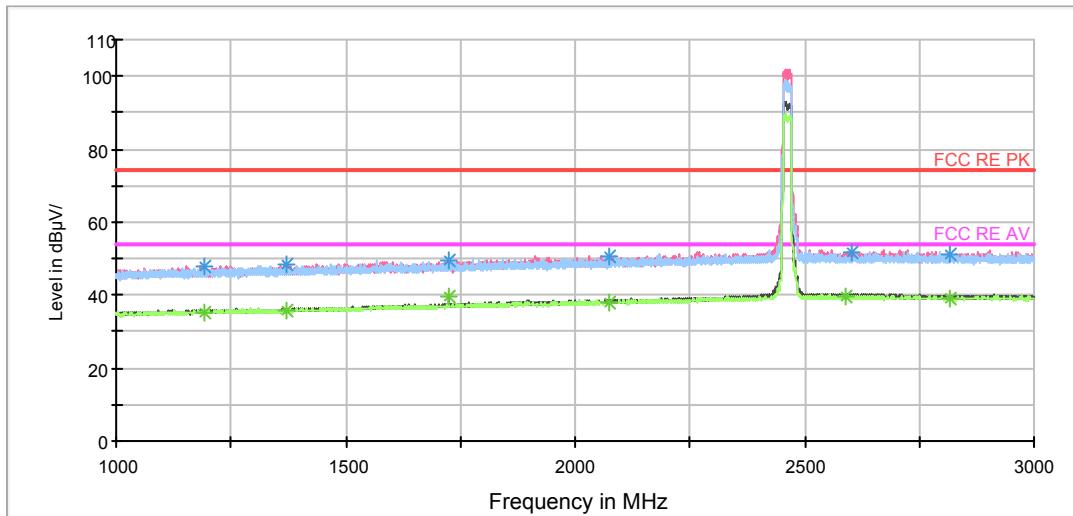


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

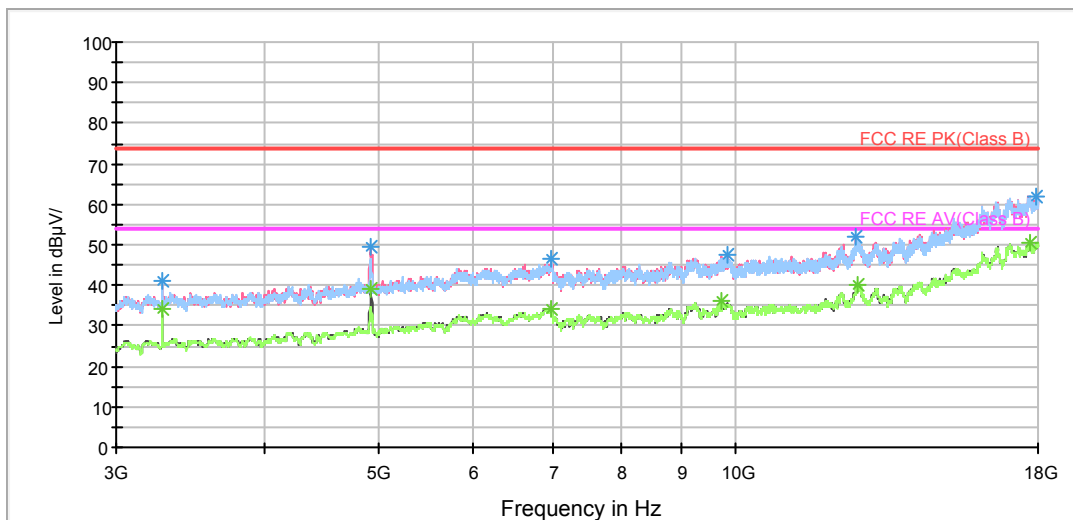

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

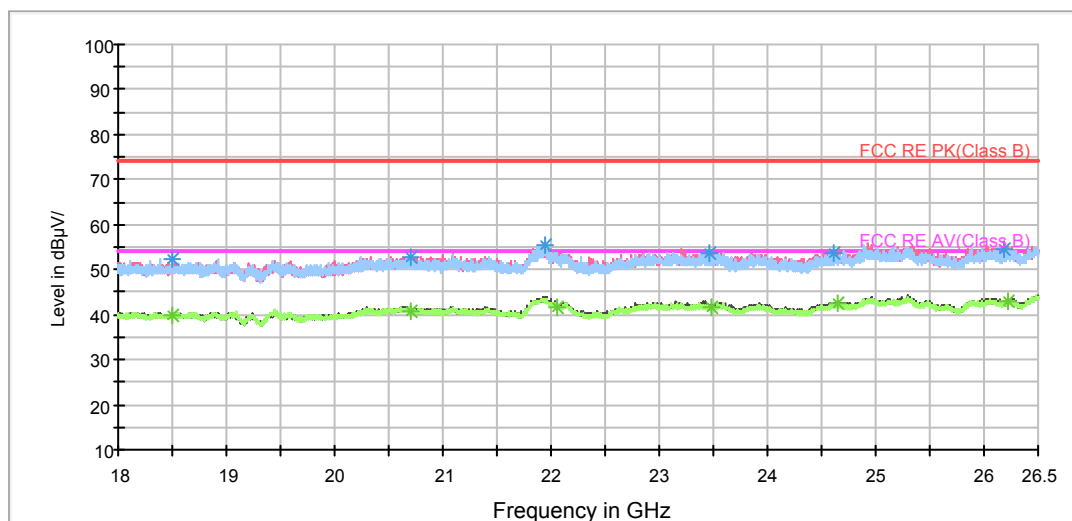

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.400000	48.1	100.0	V	0.0	45.7	2.4	25.9	74
1372.000000	48.5	100.0	V	0.0	45.5	3.0	25.5	74
1725.200000	49.6	100.0	V	231.0	45.4	4.2	24.4	74
2072.800000	50.7	100.0	V	290.0	45.2	5.5	23.3	74
2602.000000	51.7	100.0	V	326.0	44.5	7.2	22.3	74
2815.200000	51.3	100.0	V	216.0	43.9	7.4	22.7	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.400000	35.4	100.0	V	0.0	33.0	2.4	18.6	54
1372.000000	35.9	100.0	V	0.0	32.9	3.0	18.1	54
1724.800000	39.8	100.0	V	268.0	35.6	4.2	14.2	54
2072.800000	37.8	100.0	V	290.0	32.3	5.5	16.2	54
2590.400000	39.8	100.0	V	350.0	32.6	7.2	14.2	54
2815.200000	39.2	100.0	V	216.0	31.8	7.4	14.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH1

FCC RE 1G-3GHz PK+AV Class B

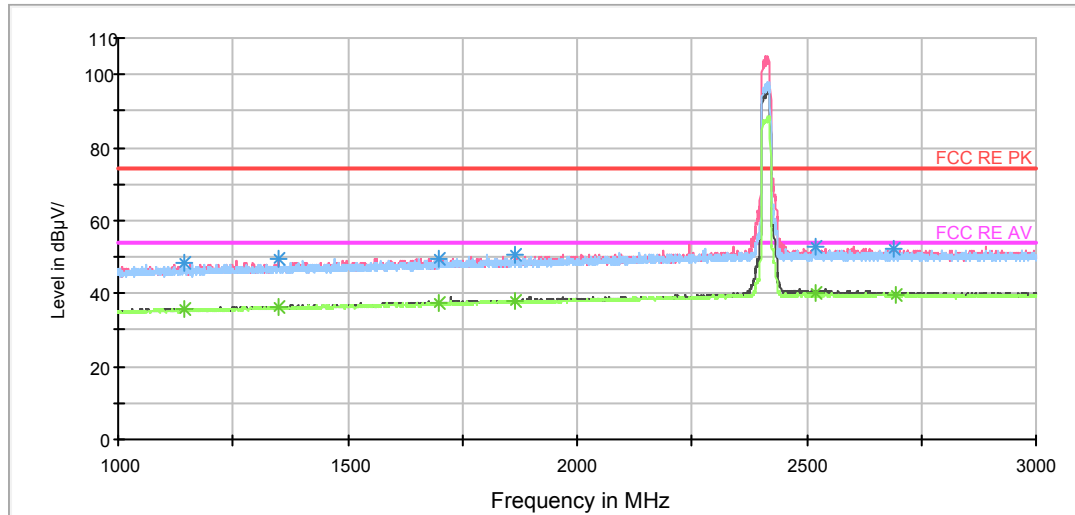


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

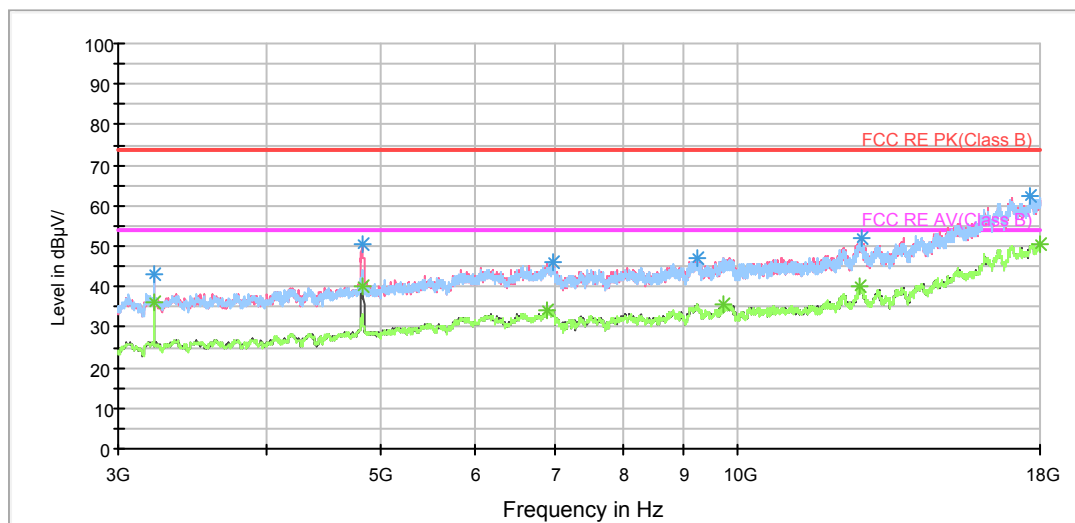

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

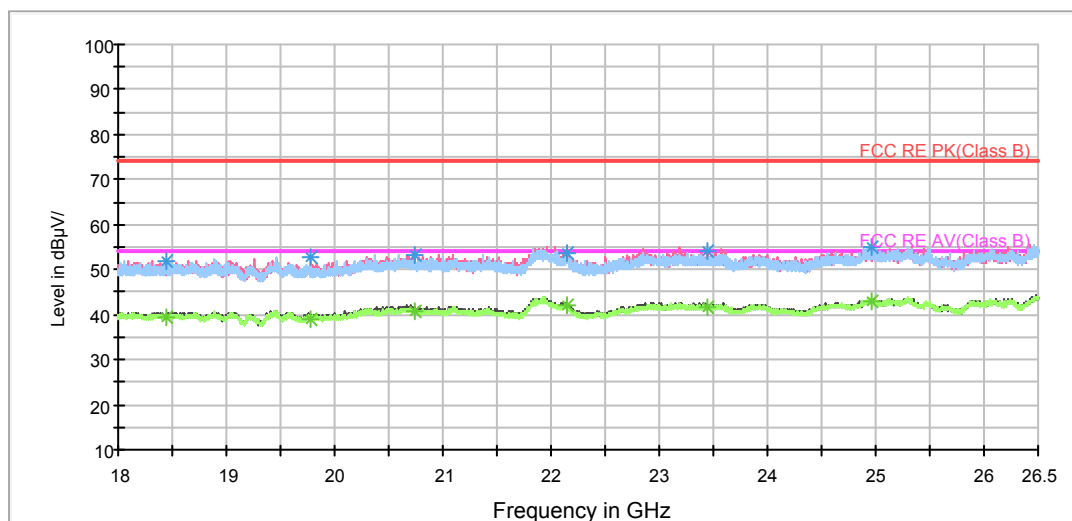

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1143.200000	48.4	100.0	H	0.0	46.1	2.3	25.6	74
1348.400000	49.5	100.0	V	0.0	46.6	2.9	24.5	74
1698.000000	49.7	100.0	V	216.0	45.6	4.1	24.3	74
1863.200000	50.9	100.0	H	103.0	46.2	4.7	23.1	74
2518.800000	52.8	100.0	H	52.0	45.6	7.2	21.2	74
2689.200000	52.1	100.0	V	208.0	44.8	7.3	21.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1143.200000	35.5	100.0	H	0.0	33.2	2.3	18.5	54
1348.400000	36.2	100.0	V	0.0	33.3	2.9	17.8	54
1698.000000	37.2	100.0	V	216.0	33.1	4.1	16.8	54
1863.200000	37.9	100.0	H	103.0	33.2	4.7	16.1	54
2520.000000	40.4	100.0	V	357.0	33.2	7.2	13.6	54
2694.400000	39.8	100.0	V	216.0	32.5	7.3	14.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH6

FCC RE 1G-3GHz PK+AV Class B

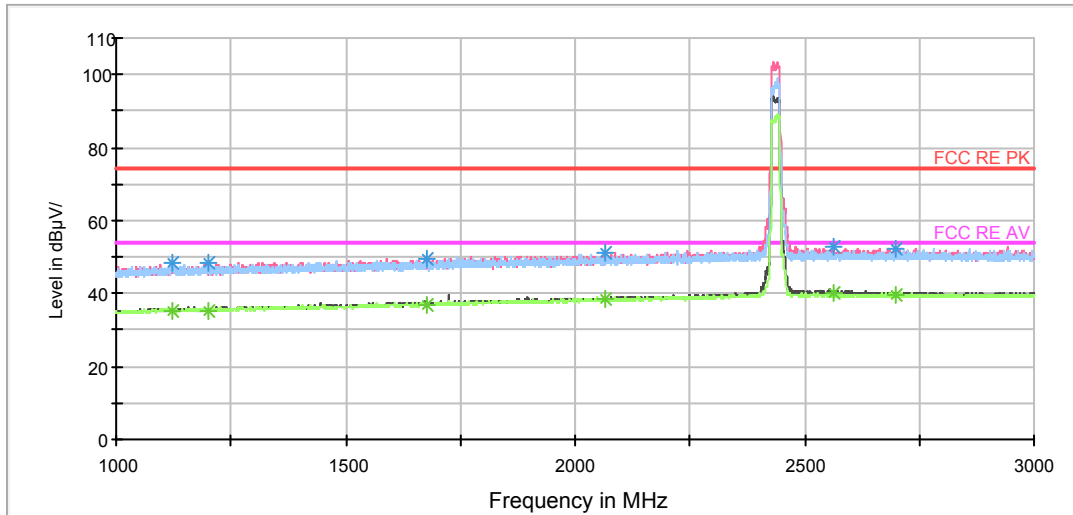


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

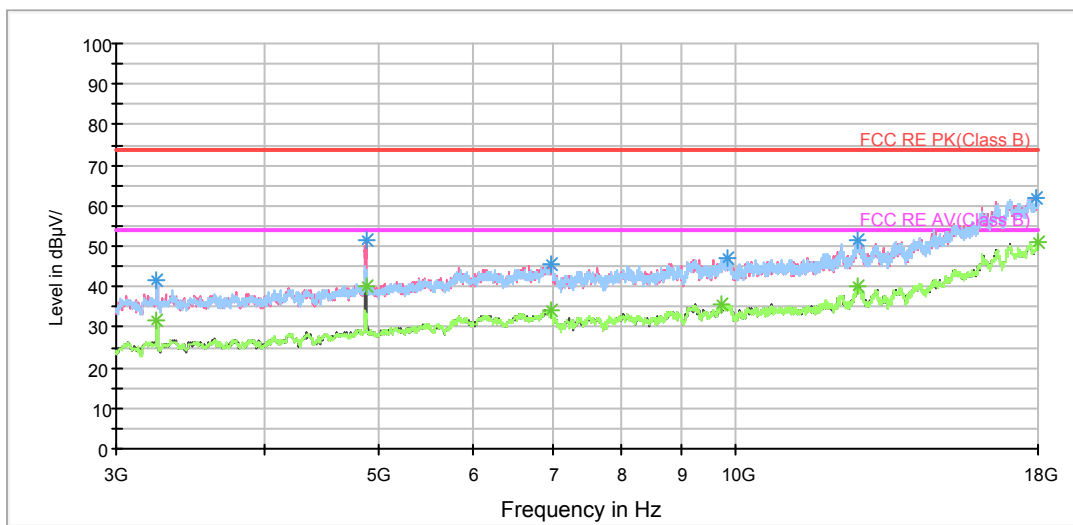

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

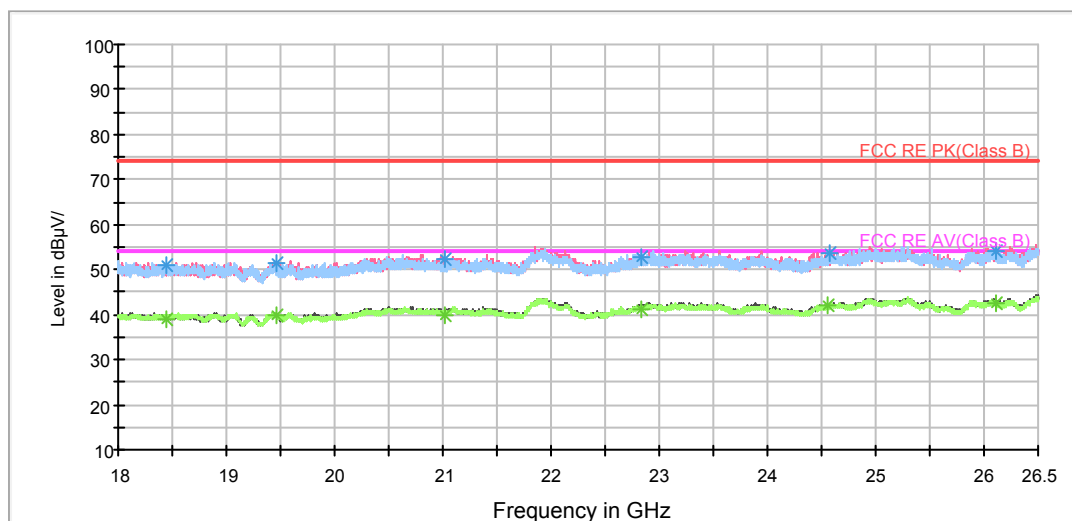

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1120.400000	48.2	100.0	H	2.0	46.0	2.2	25.8	74
1201.600000	48.6	100.0	H	23.0	46.2	2.4	25.4	74
1674.800000	49.7	100.0	V	109.0	45.7	4.0	24.3	74
2067.600000	51.2	100.0	H	0.0	45.7	5.5	22.8	74
2562.400000	52.9	100.0	V	358.0	45.7	7.2	21.1	74
2700.400000	52.0	100.0	V	0.0	44.7	7.3	22.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1120.400000	35.2	100.0	H	2.0	33.0	2.2	18.8	54
1201.600000	35.3	100.0	H	23.0	32.9	2.4	18.7	54
1674.800000	36.9	100.0	V	109.0	32.9	4.0	17.1	54
2067.600000	38.4	100.0	H	0.0	32.9	5.5	15.6	54
2562.400000	40.0	100.0	V	358.0	32.8	7.2	14.0	54
2700.400000	39.9	100.0	V	0.0	32.6	7.3	14.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH11

FCC RE 1G-3GHz PK+AV Class B

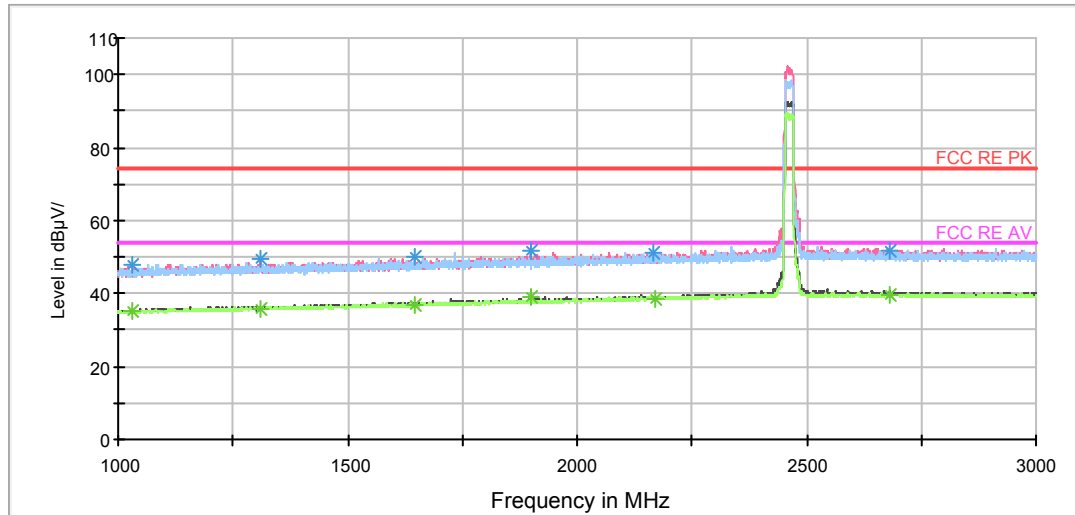


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

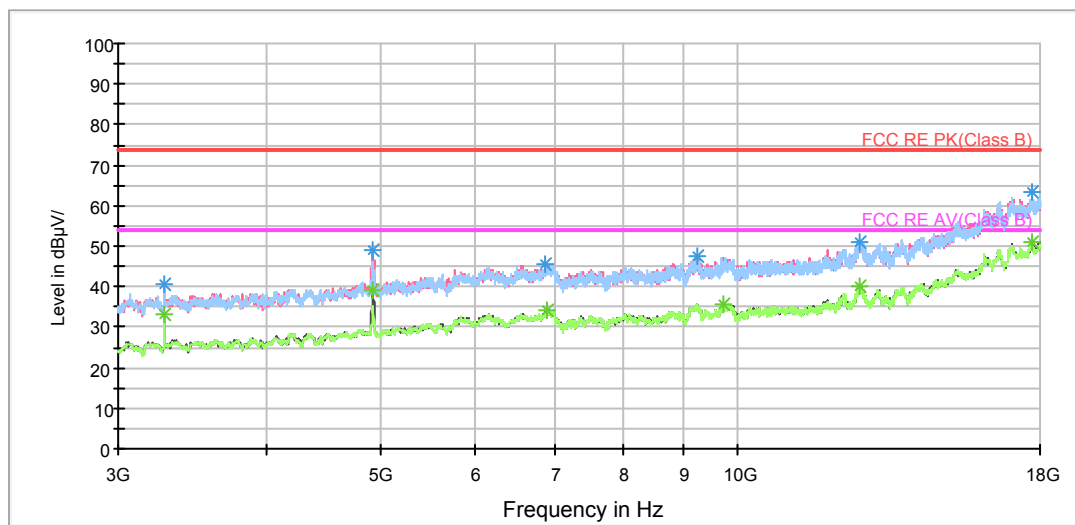

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

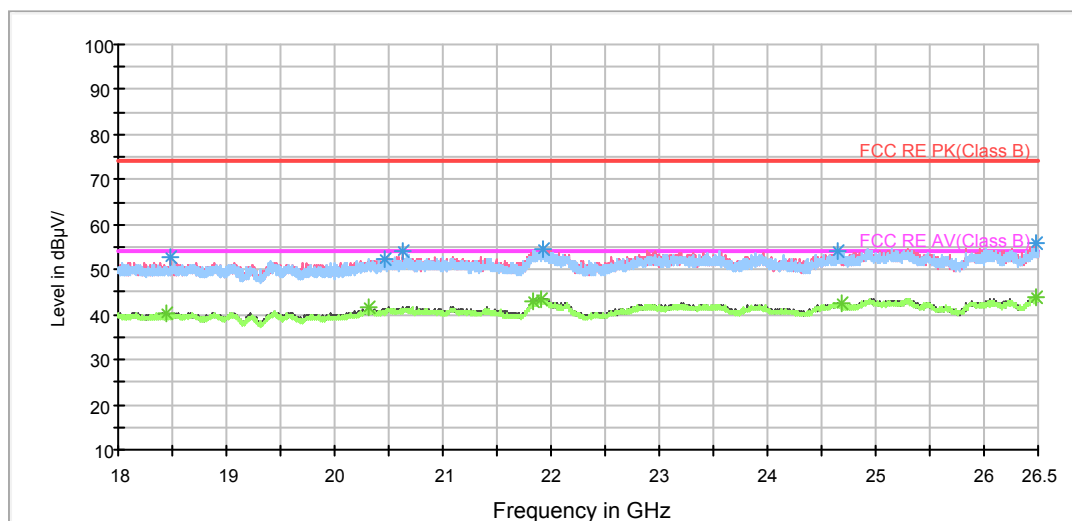

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1030.800000	47.9	100.0	V	338.0	46.0	1.9	26.1	74
1308.800000	49.3	100.0	V	353.0	46.5	2.8	24.7	74
1648.000000	50.1	100.0	V	359.0	46.2	3.9	23.9	74
1897.600000	51.6	100.0	V	338.0	46.8	4.8	22.4	74
2168.000000	50.9	100.0	V	359.0	45.0	5.9	23.1	74
2682.000000	51.9	100.0	H	70.0	44.6	7.3	22.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1030.800000	35.2	100.0	V	338.0	33.3	1.9	18.8	54
1308.800000	36.0	100.0	V	353.0	33.2	2.8	18.0	54
1648.000000	37.0	100.0	V	359.0	33.1	3.9	17.0	54
1897.600000	38.9	100.0	V	338.0	34.1	4.8	15.1	54
2170.800000	38.3	100.0	H	6.0	32.4	5.9	15.7	54
2682.000000	39.4	100.0	H	70.0	32.1	7.3	14.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH3

FCC RE 1G-3GHz PK+AV Class B

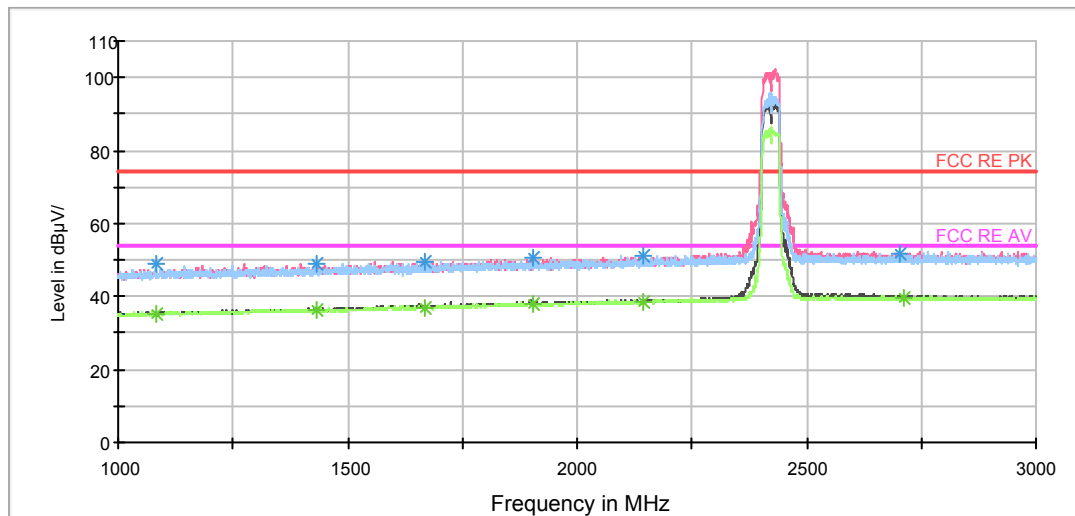


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

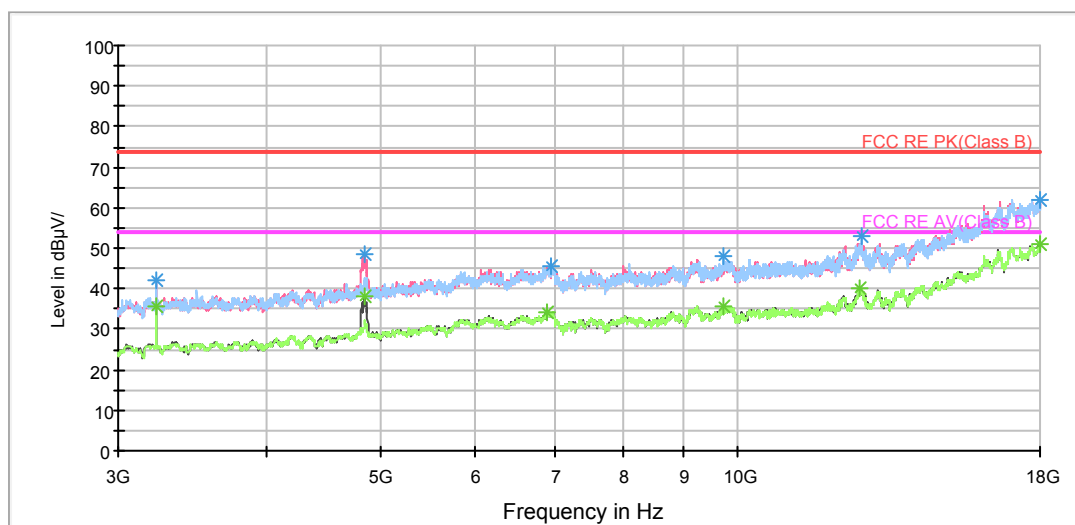

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

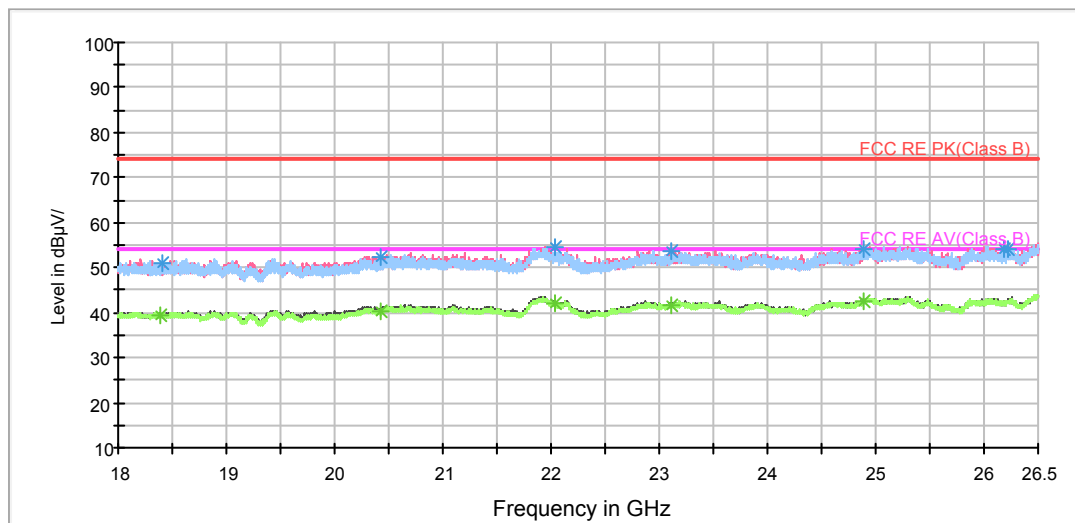

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1080.800000	48.8	100.0	H	280.0	46.7	2.1	25.2	74
1432.000000	48.9	100.0	V	357.0	45.7	3.2	25.1	74
1666.400000	49.7	100.0	V	124.0	45.7	4.0	24.3	74
1903.200000	50.5	100.0	V	223.0	45.7	4.8	23.5	74
2144.400000	51.0	100.0	H	189.0	45.2	5.8	23.0	74
2704.800000	51.8	100.0	V	350.0	44.5	7.3	22.2	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1080.800000	35.1	100.0	H	280.0	33.0	2.1	18.9	54
1432.000000	36.4	100.0	V	357.0	33.2	3.2	17.6	54
1666.400000	37.1	100.0	V	124.0	33.1	4.0	16.9	54
1903.200000	38.0	100.0	V	223.0	33.2	4.8	16.0	54
2144.400000	38.4	100.0	H	189.0	32.6	5.8	15.6	54
2711.200000	39.4	100.0	H	94.0	32.1	7.3	14.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH6

FCC RE 1G-3GHz PK+AV Class B

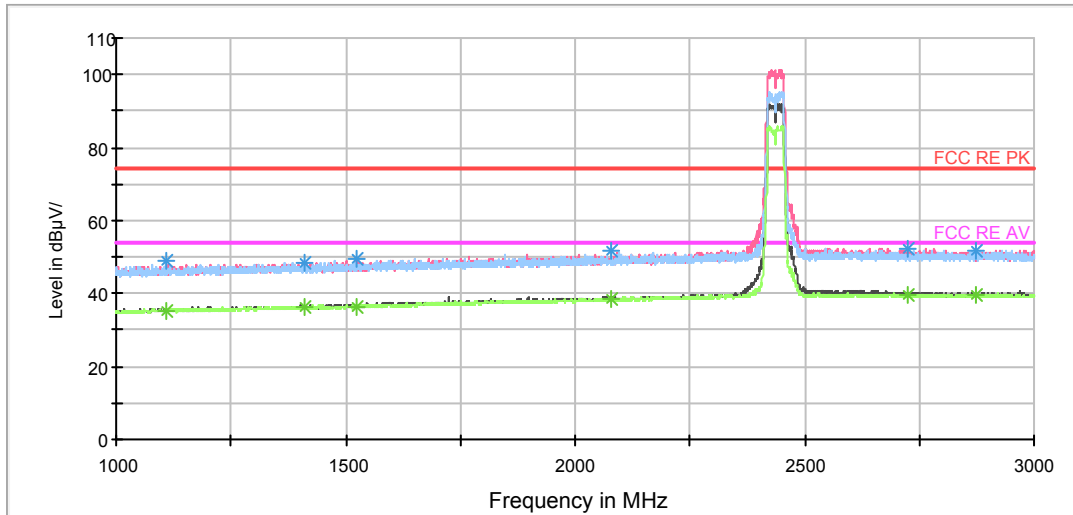


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

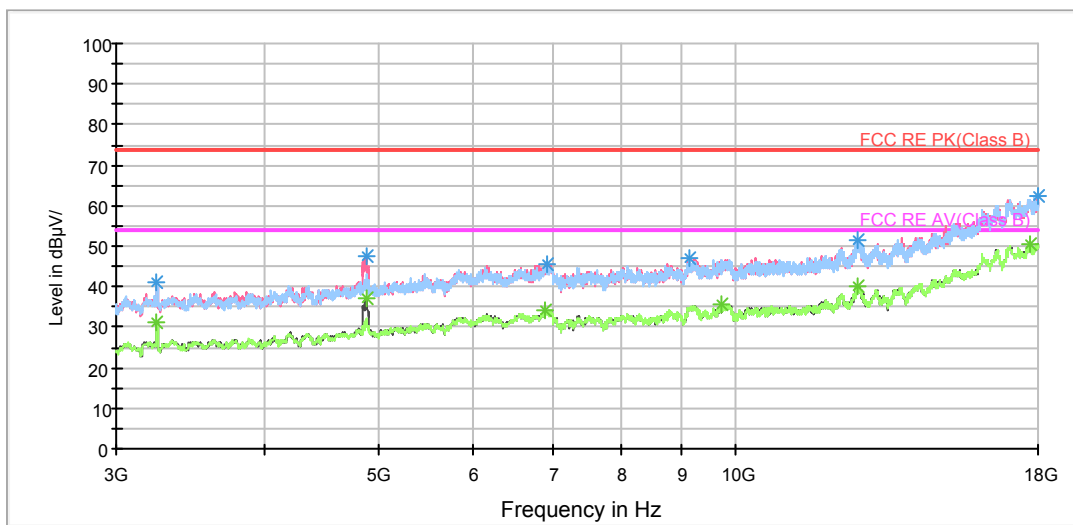

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

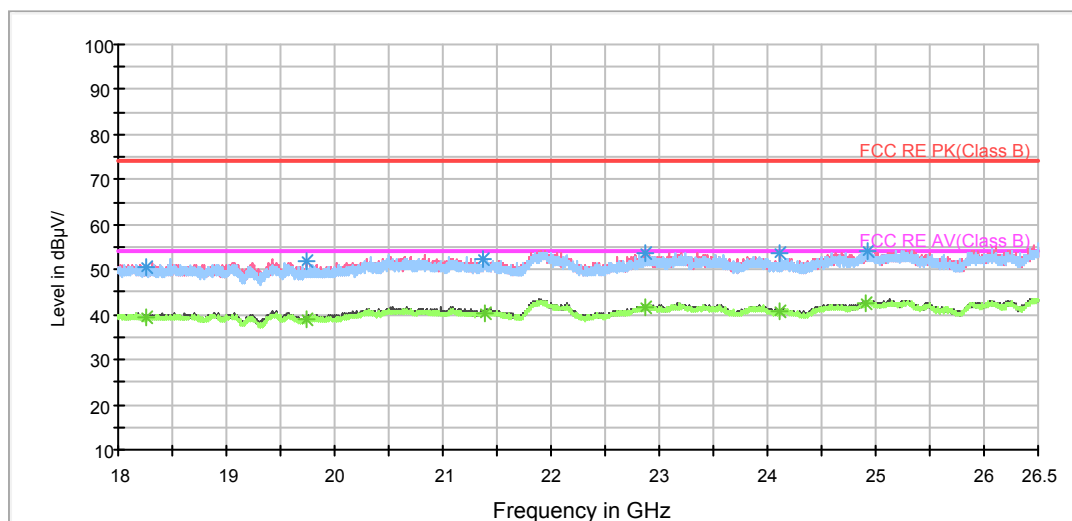

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1107.200000	48.8	100.0	H	158.0	46.7	2.1	25.2	74
1410.000000	48.6	100.0	V	318.0	45.5	3.1	25.4	74
1525.200000	49.8	100.0	V	193.0	46.3	3.5	24.2	74
2077.200000	51.5	100.0	H	0.0	46.0	5.5	22.5	74
2725.600000	52.5	100.0	V	356.0	45.2	7.3	21.5	74
2873.600000	51.6	100.0	H	5.0	44.1	7.5	22.4	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1107.200000	35.3	100.0	H	158.0	33.2	2.1	18.7	54
1410.000000	36.0	100.0	V	318.0	32.9	3.1	18.0	54
1525.200000	36.4	100.0	V	193.0	32.9	3.5	17.6	54
2077.200000	38.3	100.0	H	0.0	32.8	5.5	15.7	54
2725.600000	39.8	100.0	V	356.0	32.5	7.3	14.2	54
2873.600000	39.4	100.0	H	5.0	31.9	7.5	14.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH9

FCC RE 1G-3GHz PK+AV Class B

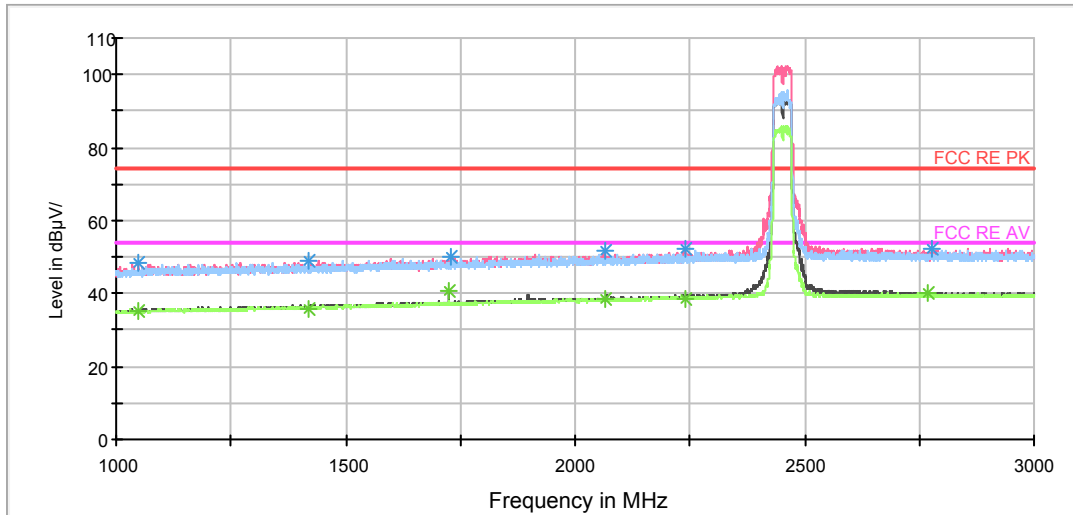


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

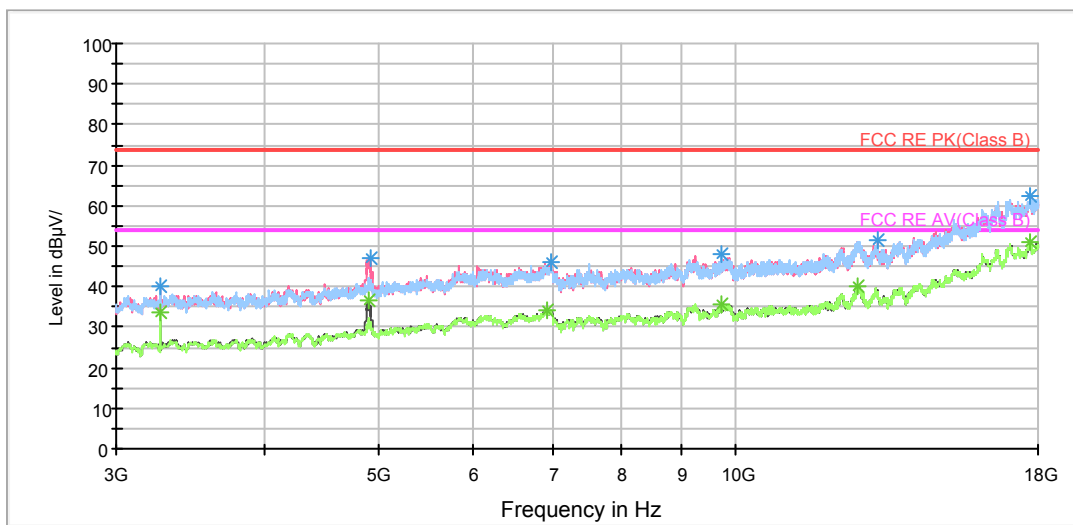

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

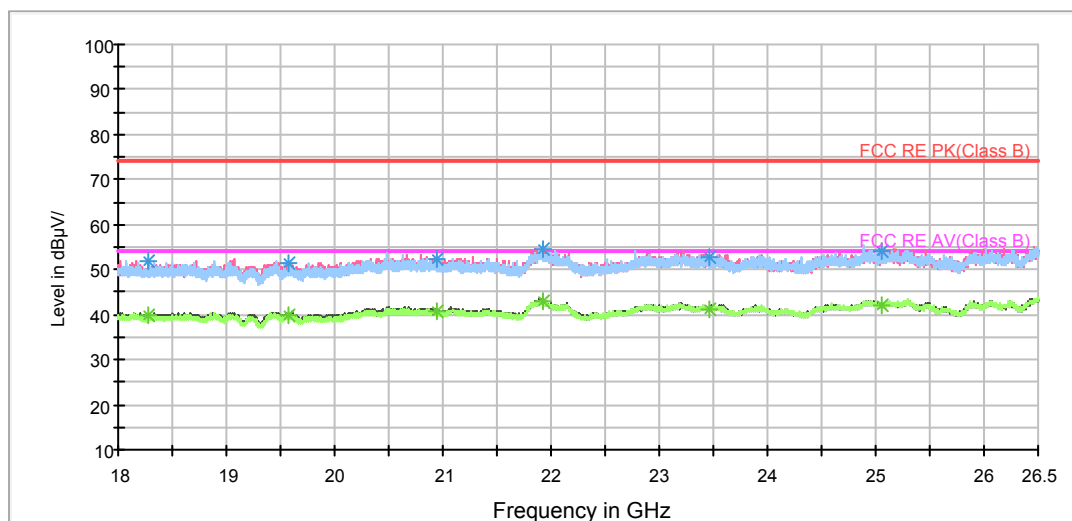

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1047.200000	48.3	100.0	V	207.0	46.3	2.0	25.7	74
1420.800000	49.1	100.0	H	4.0	46.0	3.1	24.9	74
1728.400000	50.0	100.0	H	0.0	45.8	4.2	24.0	74
2063.600000	51.5	100.0	V	199.0	46.0	5.5	22.5	74
2241.200000	52.3	100.0	V	170.0	46.1	6.2	21.7	74
2776.000000	52.1	100.0	V	87.0	44.7	7.4	21.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1047.200000	35.2	100.0	V	207.0	33.2	2.0	18.8	54
1420.800000	35.9	100.0	H	4.0	32.8	3.1	18.1	54
1724.800000	40.6	100.0	V	96.0	36.4	4.2	13.4	54
2063.600000	38.4	100.0	V	199.0	32.9	5.5	15.6	54
2241.200000	38.7	100.0	V	170.0	32.5	6.2	15.3	54
2770.000000	40.2	100.0	V	355.0	32.8	7.4	13.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


LE-Channel 0

FCC RE 1G-3GHz PK+AV Class B

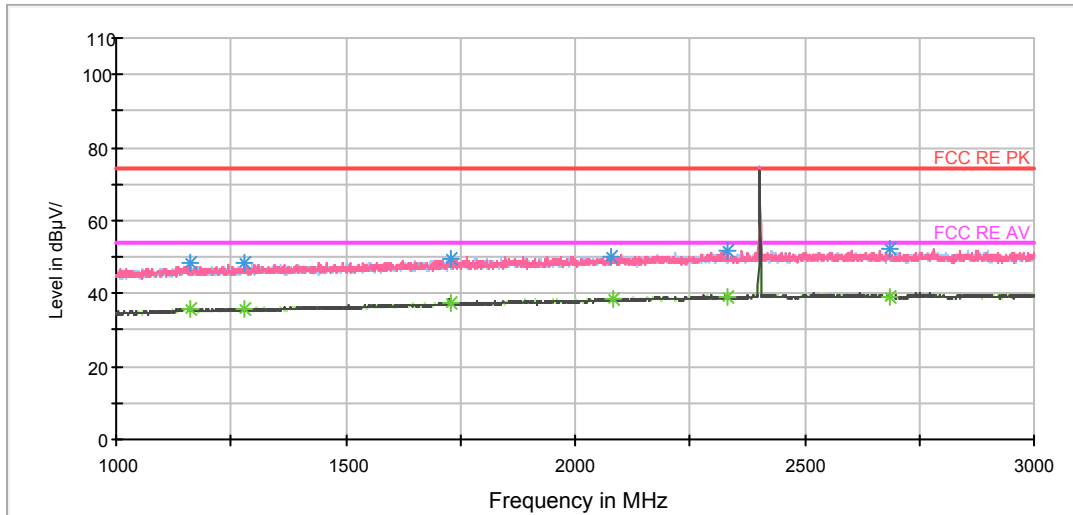


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

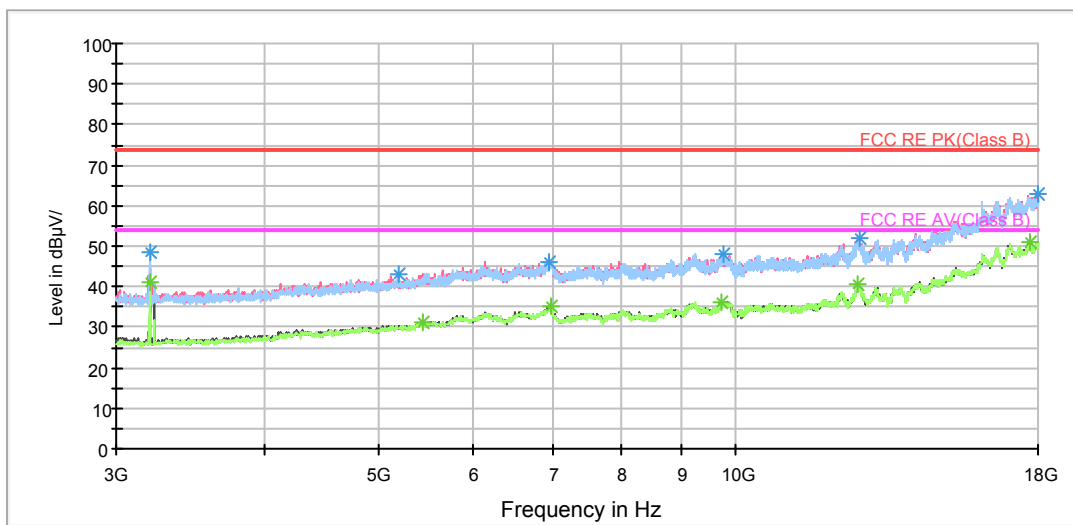

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

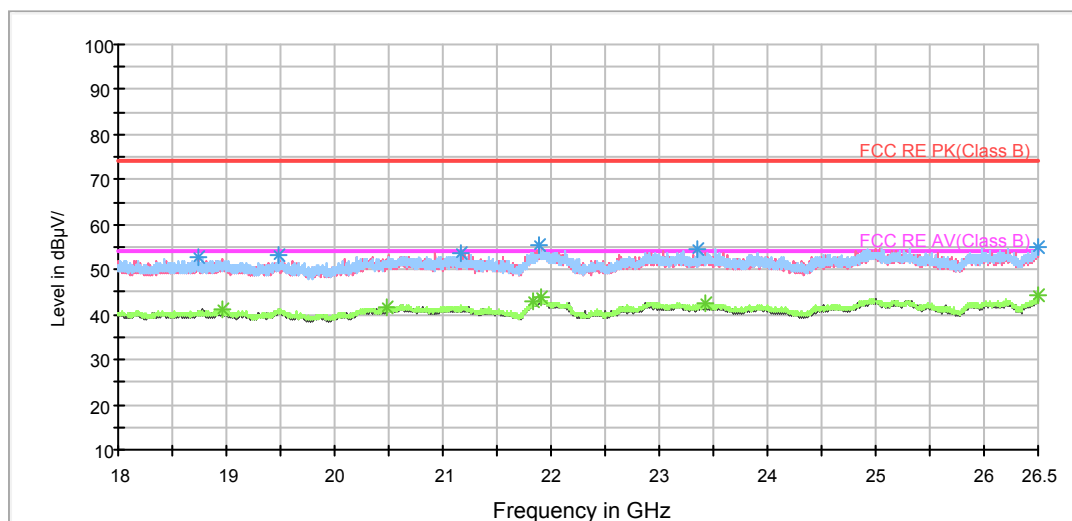

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1163.000000	48.4	100.0	H	358.0	46.1	2.3	25.6	74
1279.000000	48.5	100.0	V	44.0	45.8	2.7	25.5	74
1730.500000	49.4	100.0	V	5.0	45.2	4.2	24.6	74
2079.000000	50.3	100.0	V	229.0	44.8	5.5	23.7	74
2333.000000	51.7	100.0	V	2.0	45.2	6.5	22.3	74
2686.000000	52.0	100.0	H	336.0	44.7	7.3	22.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1163.000000	35.7	100.0	H	358.0	33.4	2.3	18.3	54
1279.000000	35.5	100.0	V	44.0	32.8	2.7	18.5	54
1730.500000	37.3	100.0	V	5.0	33.1	4.2	16.7	54
2083.500000	38.4	100.0	V	51.0	32.9	5.5	15.6	54
2333.000000	38.9	100.0	V	2.0	32.4	6.5	15.1	54
2686.000000	39.1	100.0	H	336.0	31.8	7.3	14.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


LE-Channel 19

FCC RE 1G-3GHz PK+AV Class B

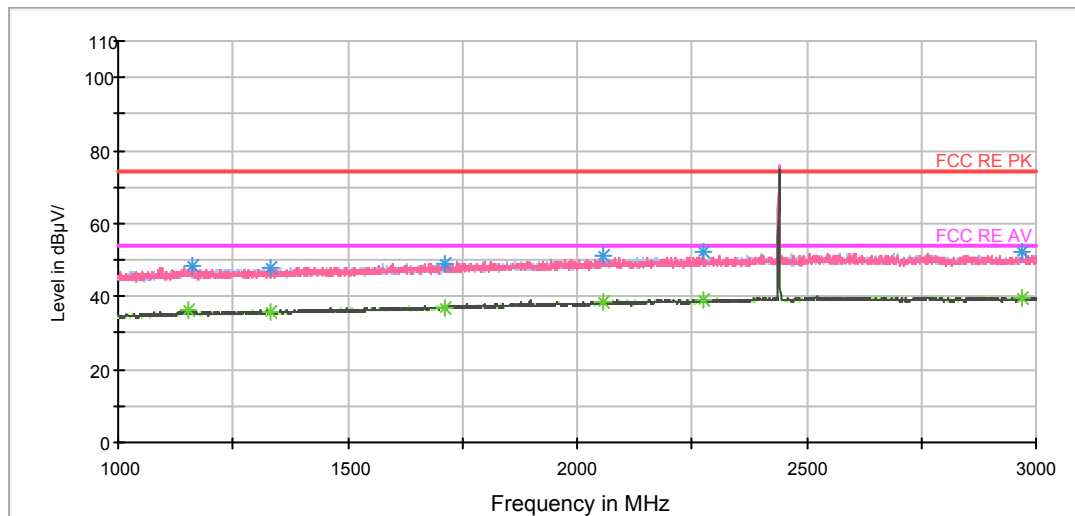


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

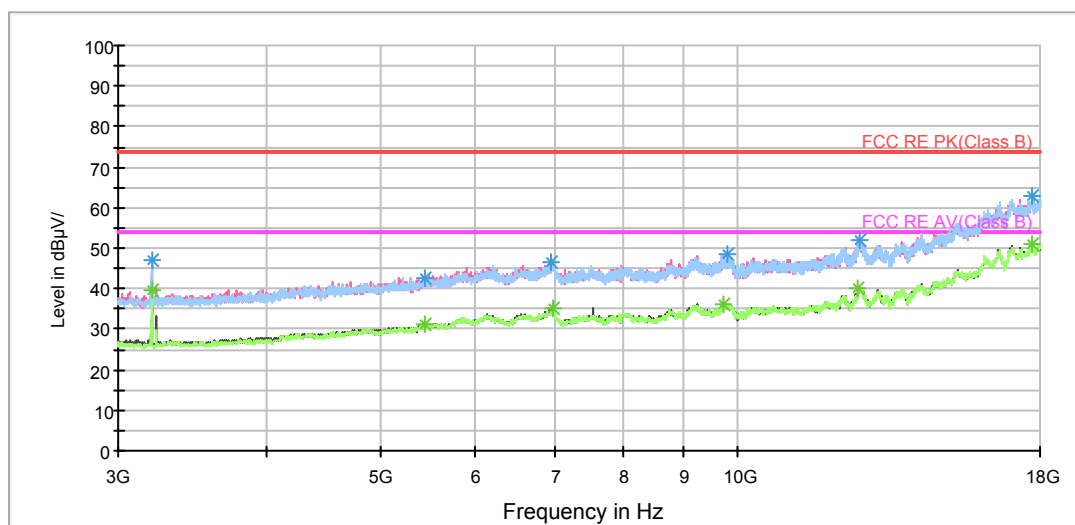

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

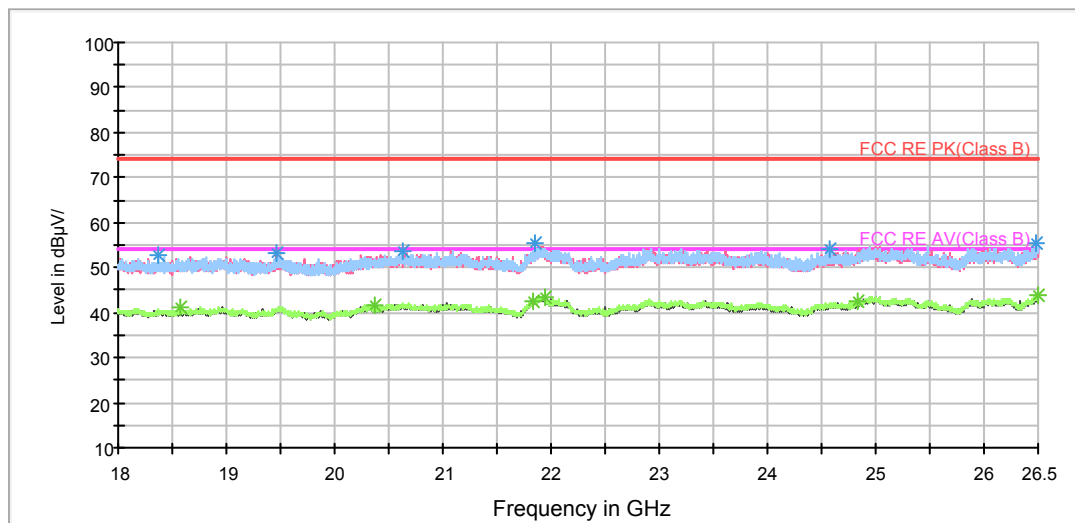

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1160.500000	48.5	100.0	V	304.0	46.2	2.3	25.5	74
1330.000000	48.1	100.0	V	67.0	45.3	2.8	25.9	74
1710.000000	49.0	100.0	H	0.0	44.9	4.1	25.0	74
2057.500000	50.9	100.0	H	358.0	45.5	5.4	23.1	74
2273.000000	52.0	100.0	V	16.0	45.7	6.3	22.0	74
2971.500000	52.0	100.0	H	0.0	44.5	7.5	22.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1153.500000	36.2	100.0	V	9.0	33.9	2.3	17.8	54
1330.000000	35.7	100.0	V	67.0	32.9	2.8	18.3	54
1710.000000	36.9	100.0	H	0.0	32.8	4.1	17.1	54
2057.500000	38.3	100.0	H	358.0	32.9	5.4	15.7	54
2273.000000	39.0	100.0	V	16.0	32.7	6.3	15.0	54
2971.500000	39.4	100.0	H	0.0	31.9	7.5	14.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


LE-Channel 39

FCC RE 1G-3GHz PK+AV Class B

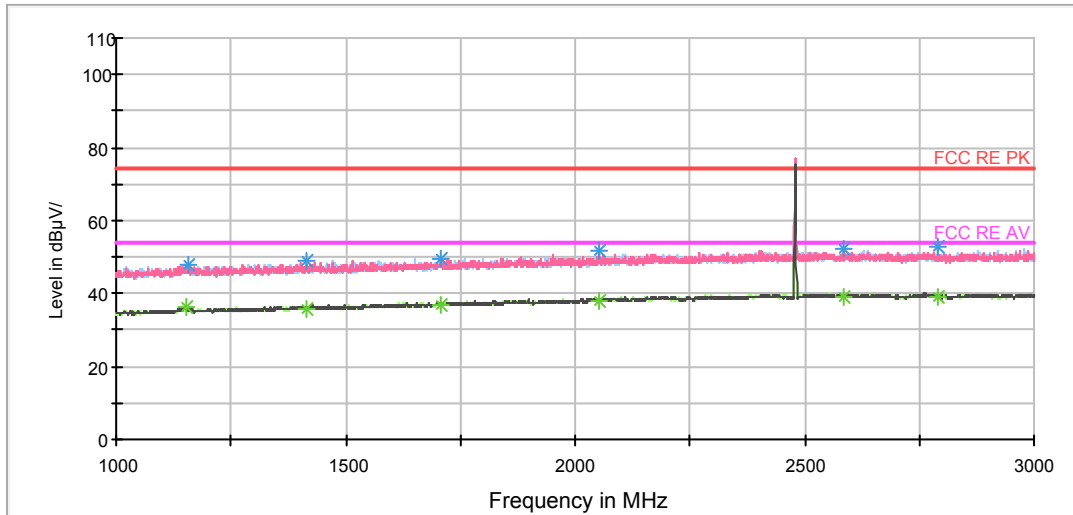


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

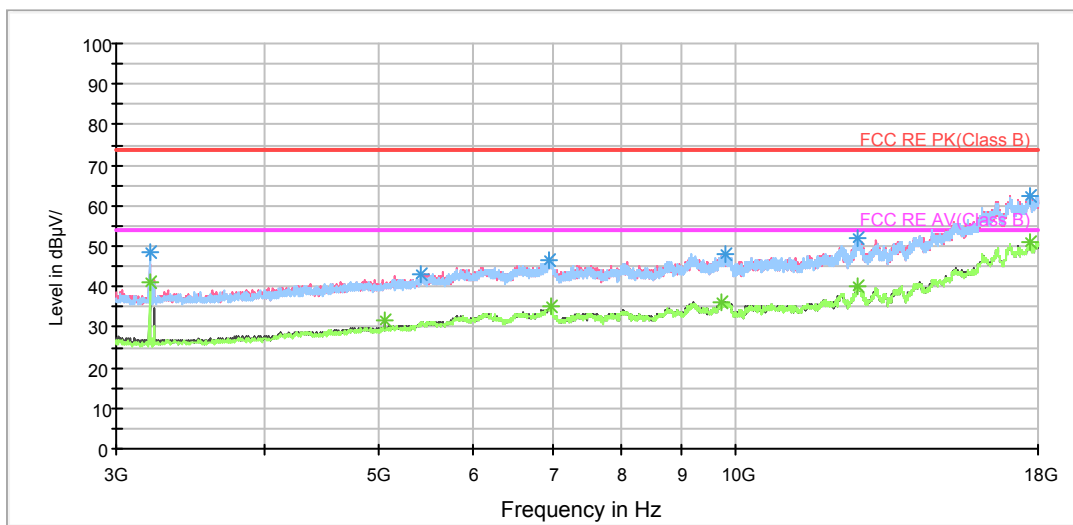

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

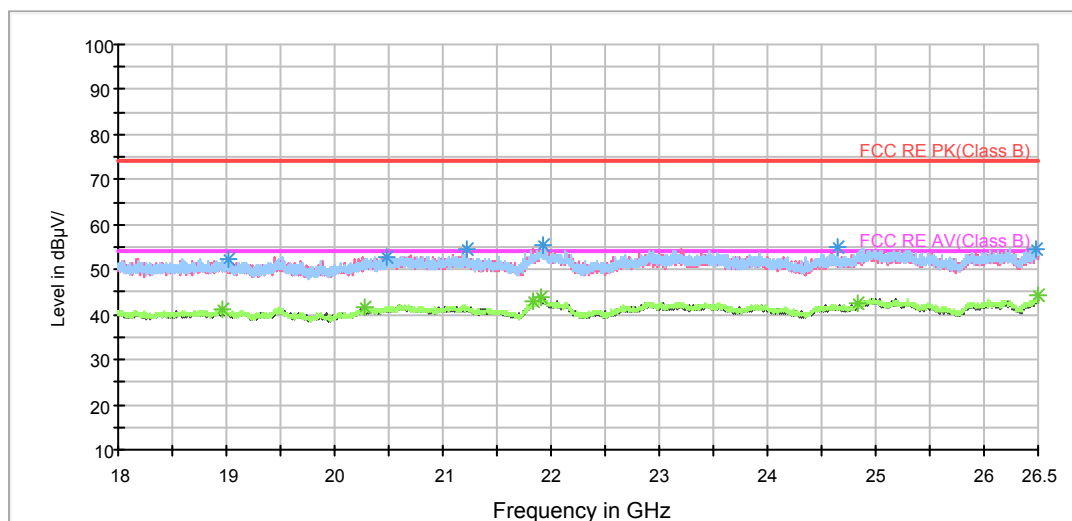

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1157.500000	47.7	100.0	H	354.0	45.4	2.3	26.3	74
1415.000000	48.8	100.0	H	357.0	45.7	3.1	25.2	74
1706.500000	49.6	100.0	V	82.0	45.5	4.1	24.4	74
2052.500000	51.5	100.0	V	2.0	46.1	5.4	22.5	74
2584.000000	52.1	100.0	V	221.0	44.9	7.2	21.9	74
2789.000000	52.6	100.0	H	0.0	45.2	7.4	21.4	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1153.500000	36.3	100.0	H	191.0	34.0	2.3	17.7	54
1415.000000	35.6	100.0	H	357.0	32.5	3.1	18.4	54
1706.500000	37.0	100.0	V	82.0	32.9	4.1	17.0	54
2052.500000	38.1	100.0	V	2.0	32.7	5.4	15.9	54
2584.000000	39.2	100.0	V	221.0	32.0	7.2	14.8	54
2789.000000	38.8	100.0	H	0.0	31.4	7.4	15.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.8. Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.
The test is in transmitting mode.

Test Setup

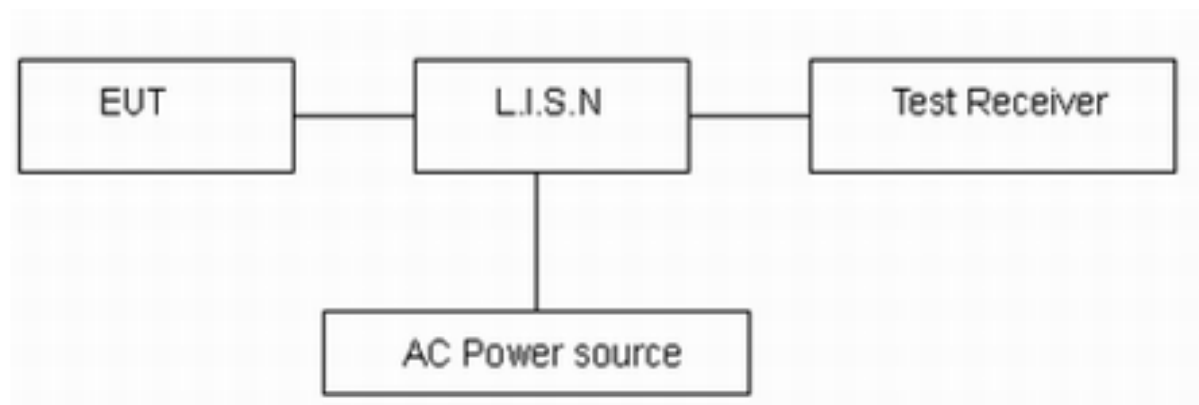

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.


Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

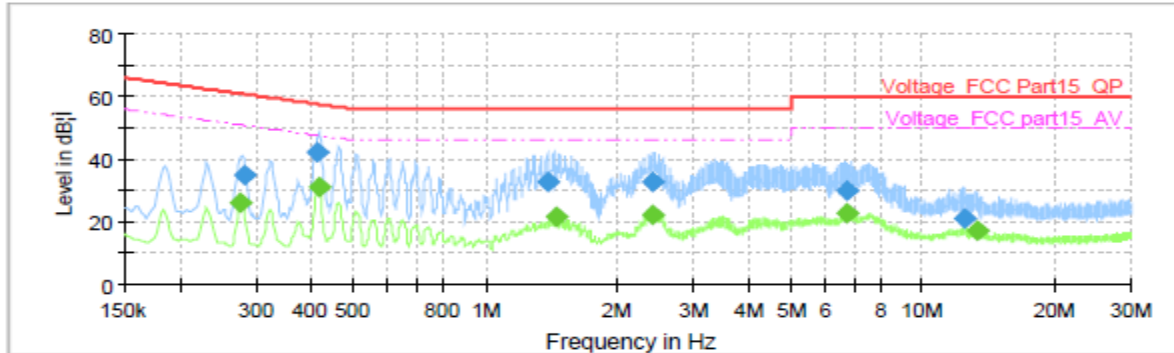

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.276000	---	26.03	50.94	24.90	1000.0	9.000	L1	ON	19.6
0.280500	35.04	---	60.80	25.76	1000.0	9.000	L1	ON	19.6
0.411000	42.14	---	57.63	15.49	1000.0	9.000	L1	ON	19.6
0.415500	---	30.87	47.54	16.67	1000.0	9.000	L1	ON	19.6
1.387500	32.78	---	56.00	23.22	1000.0	9.000	L1	ON	19.6
1.452750	---	21.43	46.00	24.57	1000.0	9.000	L1	ON	19.6
2.415750	32.60	---	56.00	23.40	1000.0	9.000	L1	ON	19.6
2.422500	---	22.15	46.00	23.85	1000.0	9.000	L1	ON	19.6
6.722250	30.05	---	60.00	29.95	1000.0	9.000	L1	ON	19.7
6.749250	---	22.52	50.00	27.48	1000.0	9.000	L1	ON	19.7
12.486750	21.32	---	60.00	38.68	1000.0	9.000	L1	ON	19.9
13.355250	---	17.05	50.00	32.95	1000.0	9.000	L1	ON	19.9

L Line

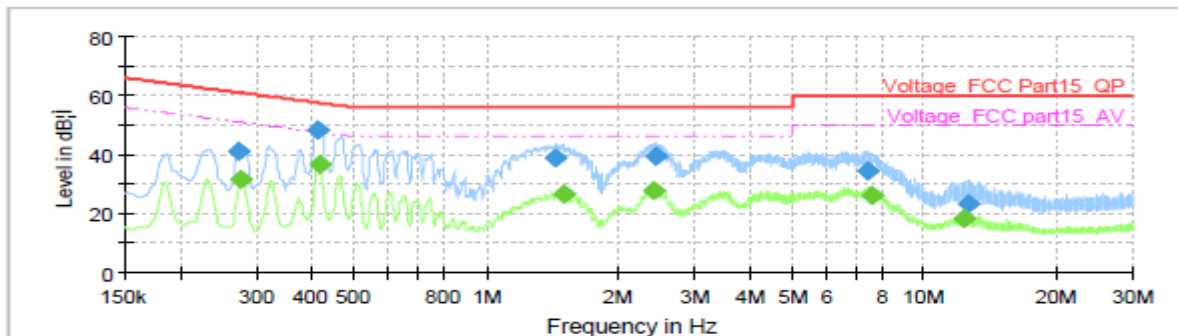

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.273750	40.87	---	61.00	20.13	1000.0	9.000	N	ON	19.6
0.276000	---	31.50	50.94	19.44	1000.0	9.000	N	ON	19.6
0.411000	48.20	---	57.63	9.43	1000.0	9.000	N	ON	19.6
0.415500	---	36.42	47.54	11.12	1000.0	9.000	N	ON	19.6
1.432500	38.69	---	56.00	17.31	1000.0	9.000	N	ON	19.6
1.497750	---	26.52	46.00	19.48	1000.0	9.000	N	ON	19.6
2.404500	---	28.05	46.00	17.95	1000.0	9.000	N	ON	19.6
2.447250	39.51	---	56.00	16.49	1000.0	9.000	N	ON	19.6
7.410750	34.39	---	60.00	25.61	1000.0	9.000	N	ON	19.7
7.581750	---	26.33	50.00	23.67	1000.0	9.000	N	ON	19.7
12.340500	---	18.31	50.00	31.69	1000.0	9.000	N	ON	19.9
12.651000	23.16	---	60.00	36.84	1000.0	9.000	N	ON	19.9

N Line

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
Spectrum Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2014-12-06	2017-12-05
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2017-11-18	2020-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2020-02-17
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2015-01-30	2018-01-29
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCS30	100138	2017-12-17	2018-12-16
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
RF Cable	Agilent	SMA 15cm	0001	2017-08-04	2018-02-03
Software (CE)	ROHDE&SCHW ARZ	EMC32	9.26.0	/	/
Software (RE/RSE)	ROHDE&SCHW ARZ	EMC32	8.52.0	/	/

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance




a: EUT

Picture 1 EUT and Accessory

A.2 Test Setup




30M Hz-1GHz

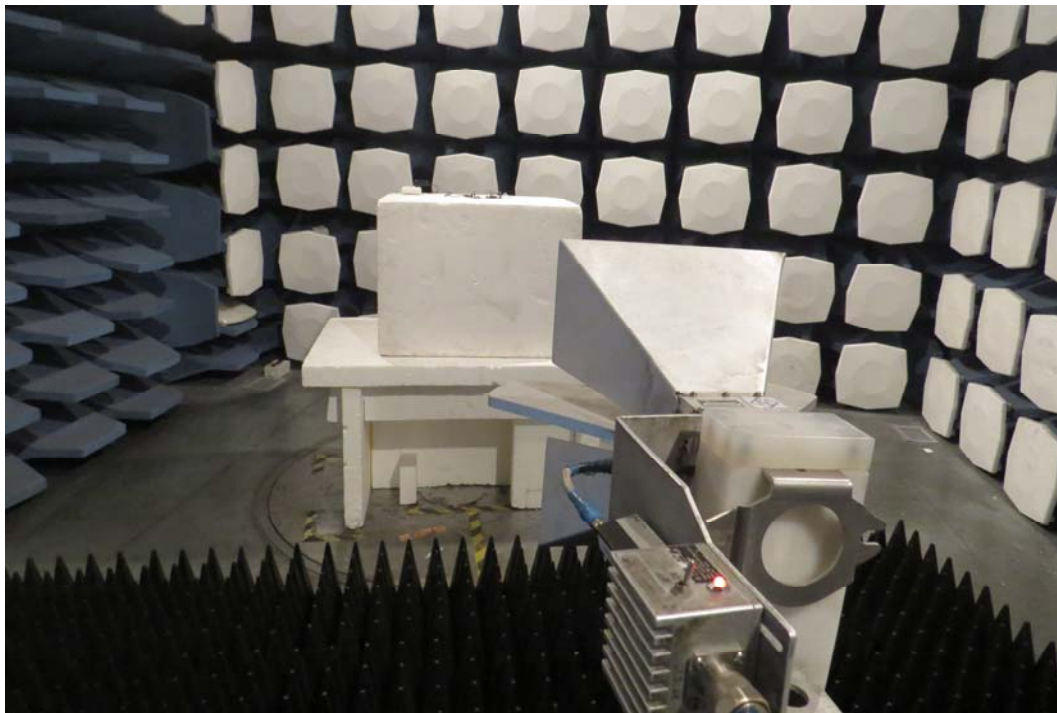

Above 1GHz

Picture 2 Radiated Emission Test Setup

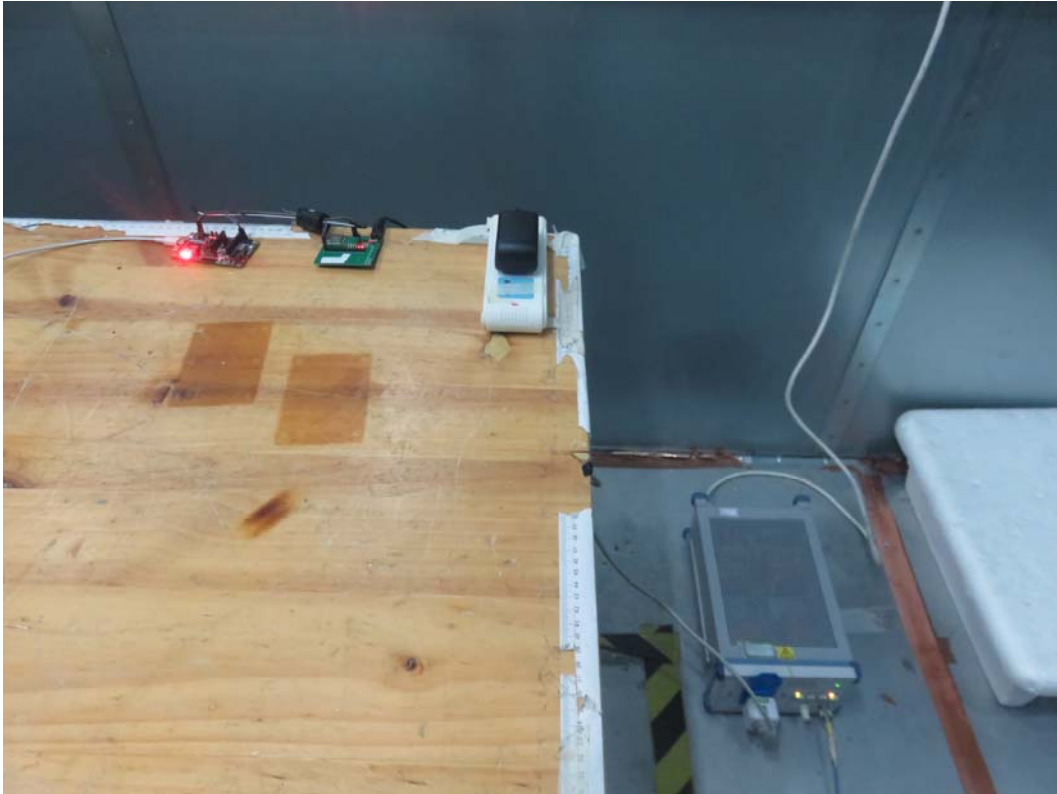

Picture 3 Conducted Emission Test Setup