

FCC PART 15B

TEST REPORT

For

electronics hub llc

3560 NW, 72nd Avenue 33122 miami Florida United States

FCC ID: 2AT5LTRITON

Report Type: Original Report	Product Type: Mobile Phone
Report Number:	RDG191011003-00C
Report Date:	2019-11-07
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

General Information	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
DECLARATIONS	4
System Test Configuration	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENT LIST	7
ENVIRONMENTAL CONDITIONS	8
Summary of Test Results	9
Conducted emissions	10
EUT SETUP	10
EMI TEST RECEIVER SETUP	10
TEST PROCEDURE	10
TEST DATA	12
Radiated emissions	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST DATA	16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile Phone
EUT Model:		Triton
Highest Operation Frequency:		2480 MHz
Rated Input Voltage:		DC 3.8V from battery or DC 5V from adapter
Adapter Information	Model:	HJ-050100B3-US
	Input:	100-240V 50/60Hz 0.15A
	Output:	5Vdc 1000mA
External Dimension:		152mm(L) * 78mm(W) * 12mm(H)
Serial Number:		191011003
EUT Received Date:		2019.10.11
EUT Received Status:		Good

Objective

This report is prepared on behalf of electronics hub llc in accordance with FCC Part 15B Part 2, subpart J, and Part 15, Subpart A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E,27 PCE submissions with FCC ID: 2AT5LTRITON

FCC Part 15C DSS submissions with FCC ID: 2AT5LTRITON

FCC Part 15C DTS submissions with FCC ID: 2AT5LTRITON

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1 °C
Humidity	±5%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “Δ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in downloading mode.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software

The software "Winthrax.exe" was used during test.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	293

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Serial Cable	yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	yes	No	1.8	USB Port of Laptop	Keyboard
USB Cable	Yes	No	0.8	Adapter	EUT
Earphone	No	No	1.2	EUT	Earphone

Block Diagram of Test Setup

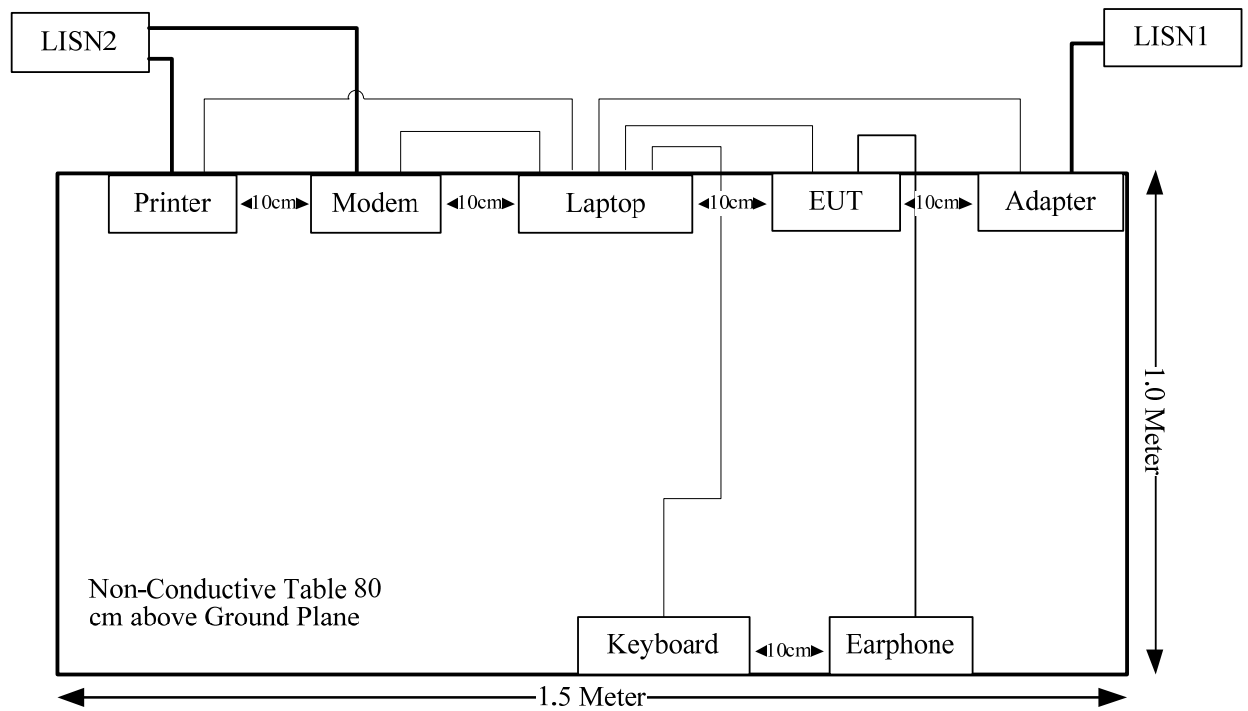

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emissions					
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2019-09-19	2020-09-19
Radiated emissions Below 1GHz					
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-2	2017-08-25	2020-08-25
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-24	2020-09-24
Sonoma	Amplifier	310N	185914	2019-10-13	2020-10-13
Radiated emissions Above 1GHz					
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2019-09-05	2020-09-05

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions


Test Item:	Conducted emissions	Radiated emissions Below 1GHz	Radiated emissions Above 1GHz
Test Date:	2019-10-21	2019-10-15	2019-10-15
Tester:	Sem Xing	Tyler Pan	Jakson Zhang
Temperature:	26.6°C	27.4°C	26.4°C
Relative Humidity:	55 %	51 %	52 %
ATM Pressure:	100.6 kPa	100.7 kPa	100.7 kPa

SUMMARY OF TEST RESULTS

Rule and Clause	Description of Test	Test Result
FCC §15.107	Conducted emissions	Compliance
FCC §15.109	Radiated emissions	Compliance

CONDUCTED EMISSIONS

EUT Setup

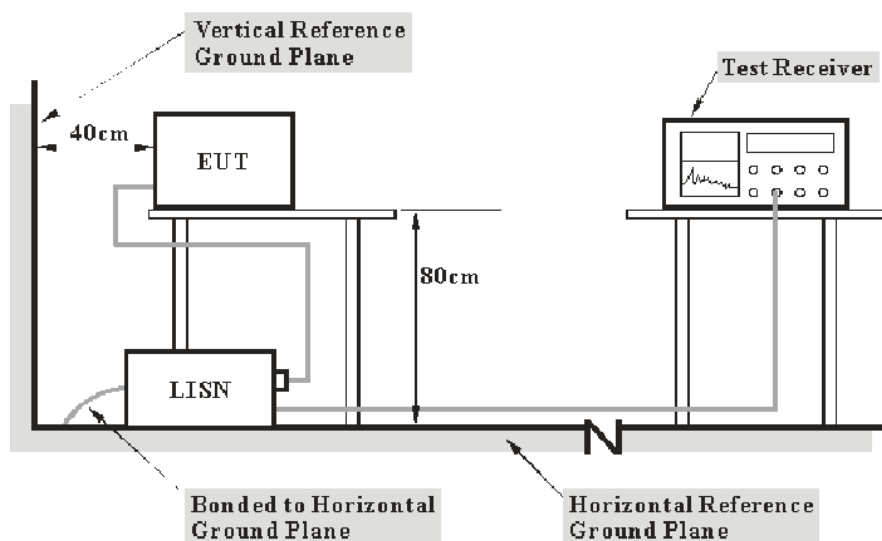

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the Main LISN with 120V/60Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the Adapter of Laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Please refer to following table and plots:

Port: L
 Test Mode: Downloading
 Power Source: AC 120V/60Hz
 Note:

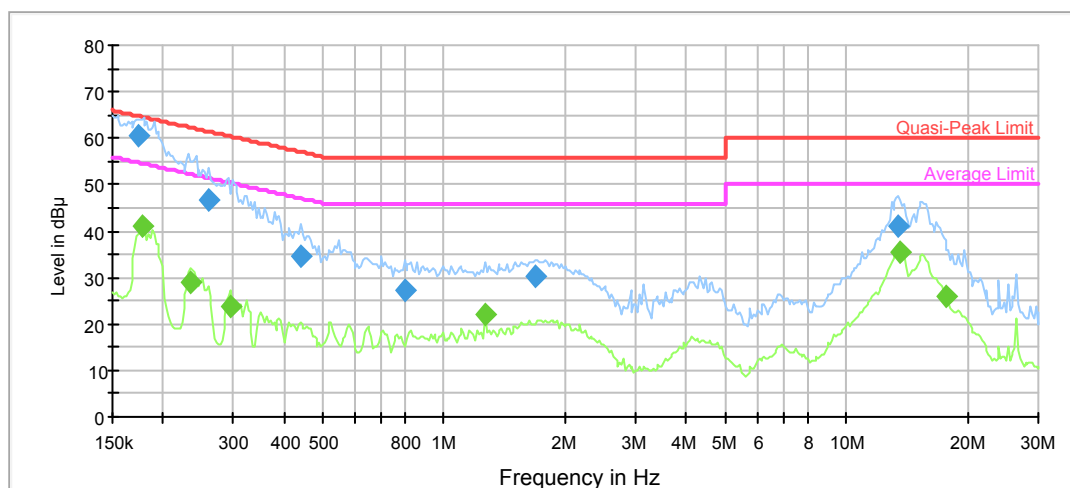


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174145	60.7	9.000	L1	10.9	4.1	64.8
0.259279	46.7	9.000	L1	10.3	14.8	61.5
0.439339	34.6	9.000	L1	9.9	22.5	57.1
0.798146	27.3	9.000	L1	9.8	28.7	56.0
1.683392	30.3	9.000	L1	9.7	25.7	56.0
13.469532	41.2	9.000	L1	9.9	18.8	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177646	41.3	9.000	L1	10.8	13.3	54.6
0.234722	29.1	9.000	L1	10.4	23.2	52.3
0.295084	23.6	9.000	L1	10.2	26.8	50.4
1.261437	22.1	9.000	L1	9.8	23.9	46.0
13.604227	35.6	9.000	L1	9.9	14.4	50.0
17.797171	25.9	9.000	L1	10.0	24.1	50.0

Port: N
 Test Mode: Downloading
 Power Source: AC 120V/60Hz
 Note:

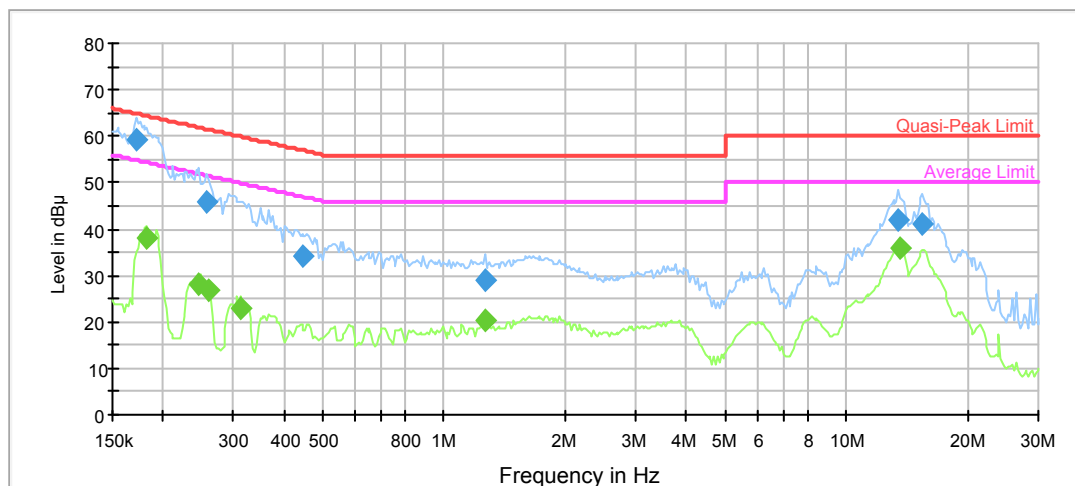

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.172421	59.2	9.000	N	10.9	5.6	64.8
0.256712	46.0	9.000	N	10.3	15.5	61.5
0.443733	34.0	9.000	N	9.9	23.0	57.0
1.261437	29.0	9.000	N	9.8	27.0	56.0
13.469532	41.8	9.000	N	9.9	18.2	60.0
15.482879	40.9	9.000	N	9.9	19.1	60.0


Final Result 2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.183029	37.9	9.000	N	10.8	16.4	54.3
0.244252	28.3	9.000	N	10.3	23.7	52.0
0.259279	26.8	9.000	N	10.3	24.7	51.5
0.313237	22.7	9.000	N	10.1	27.2	49.9
1.261437	20.4	9.000	N	9.8	25.6	46.0
13.604227	36.0	9.000	N	9.9	14.0	50.0


RADIATED EMISSIONS

EUT Setup

Below 1GHz:

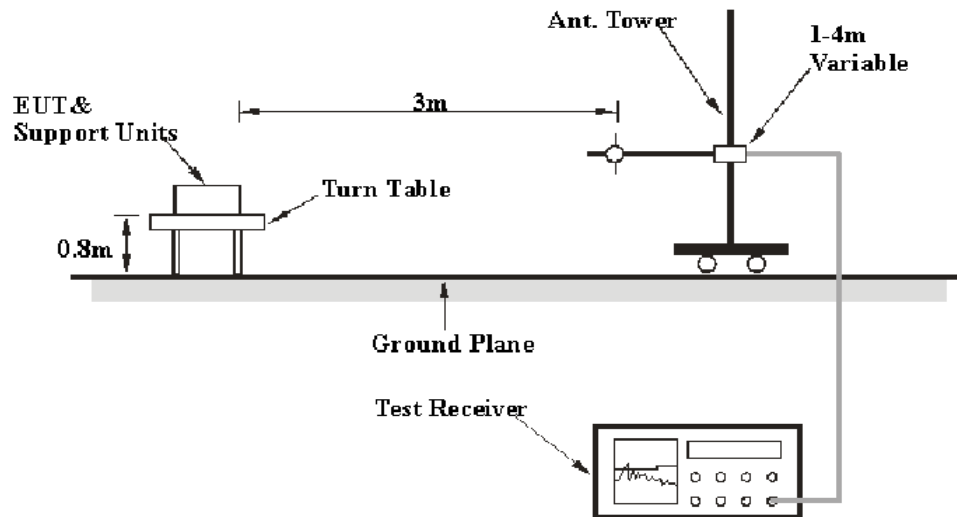

Above 1GHz:

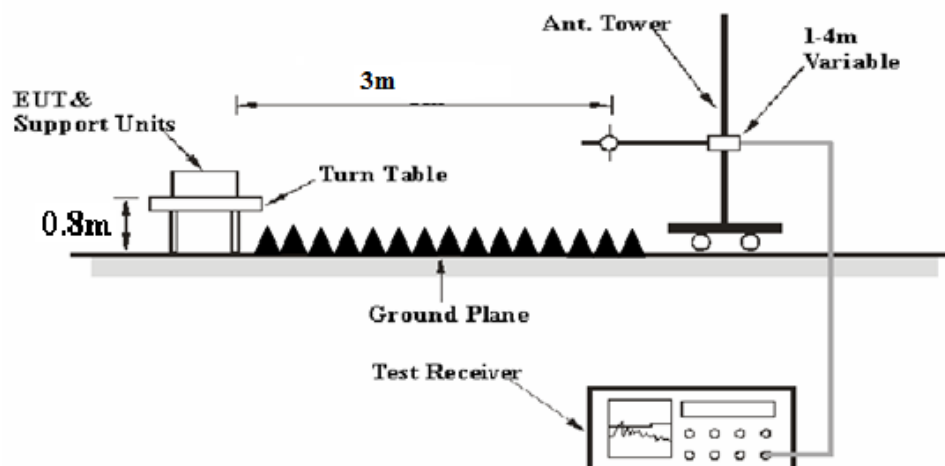

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emissions, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Meter Reading+ Corrected

Note:

Corrected = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Result}$$

Test Data

Please refer to following table and plots:

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Model: Triton
Test Mode: Downloading
Note:


Polarization: Horizontal
Power: AC 120V/60Hz
Distance: 3m

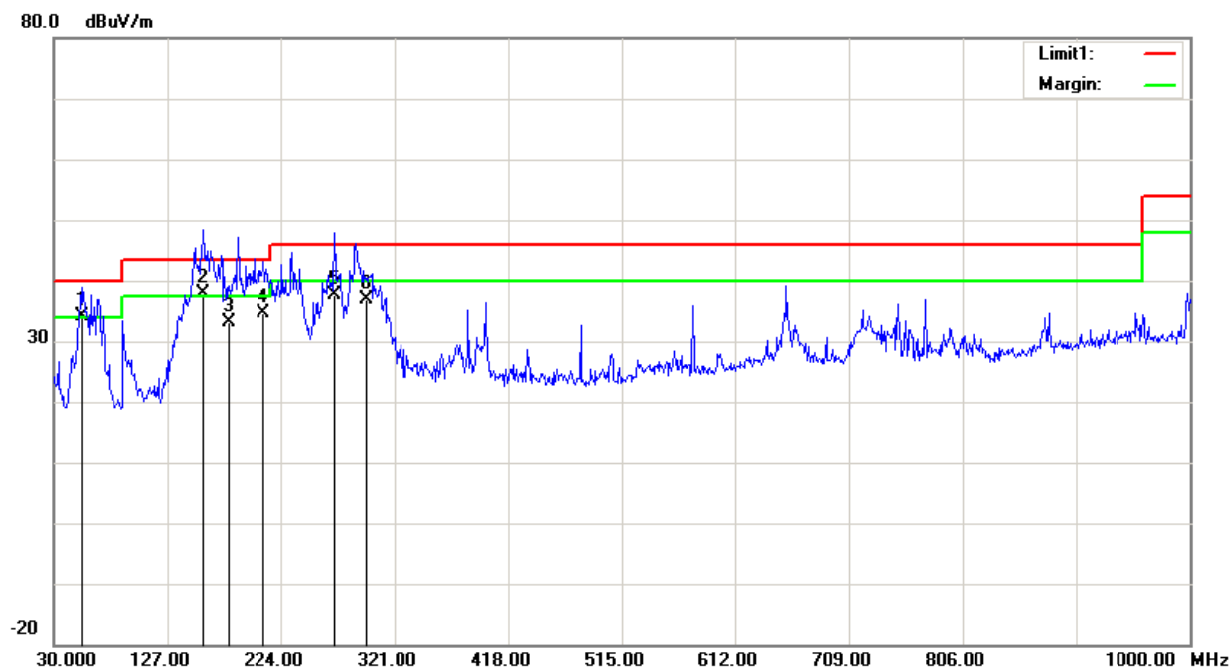

Frequency	Reading	Detector	Corrected	Result	Limit	Margin
(MHz)	(dBuV)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)
52.6600	50.59	QP	-16.49	34.10	40.00	5.90
157.0700	47.31	QP	-9.51	37.80	43.50	5.70
179.4000	43.10	QP	-9.90	33.20	43.50	10.30
208.8600	45.79	QP	-11.21	34.58	43.50	8.92
270.0100	46.47	QP	-8.87	37.60	46.00	8.40
296.7600	44.64	QP	-7.69	36.95	46.00	9.05

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Model: Triton
Test Mode: Downloading
Note:


Polarization: Vertical
Power: AC 120V/60Hz
Distance: 3m

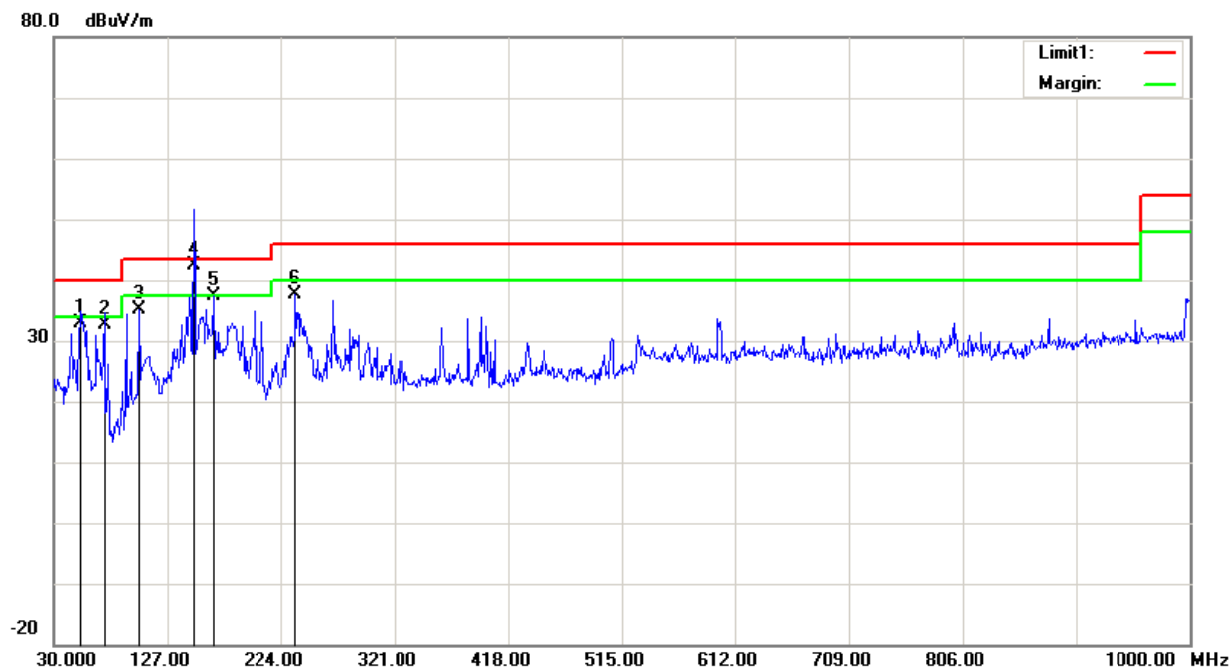

Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
52.3100	49.35	QP	-16.45	32.90	40.00	7.10
72.6800	49.00	QP	-16.39	32.61	40.00	7.39
102.7500	49.14	peak	-13.92	35.22	43.50	8.28
149.3100	51.95	QP	-9.45	42.50	43.50	1.00
165.8000	47.15	peak	-9.67	37.48	43.50	6.02
236.6100	47.85	peak	-10.19	37.66	46.00	8.34

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Model: Triton
Test Mode: Downloading
Note:


Polarization: Horizontal
Power: AC 120V/60Hz
Distance: 3m

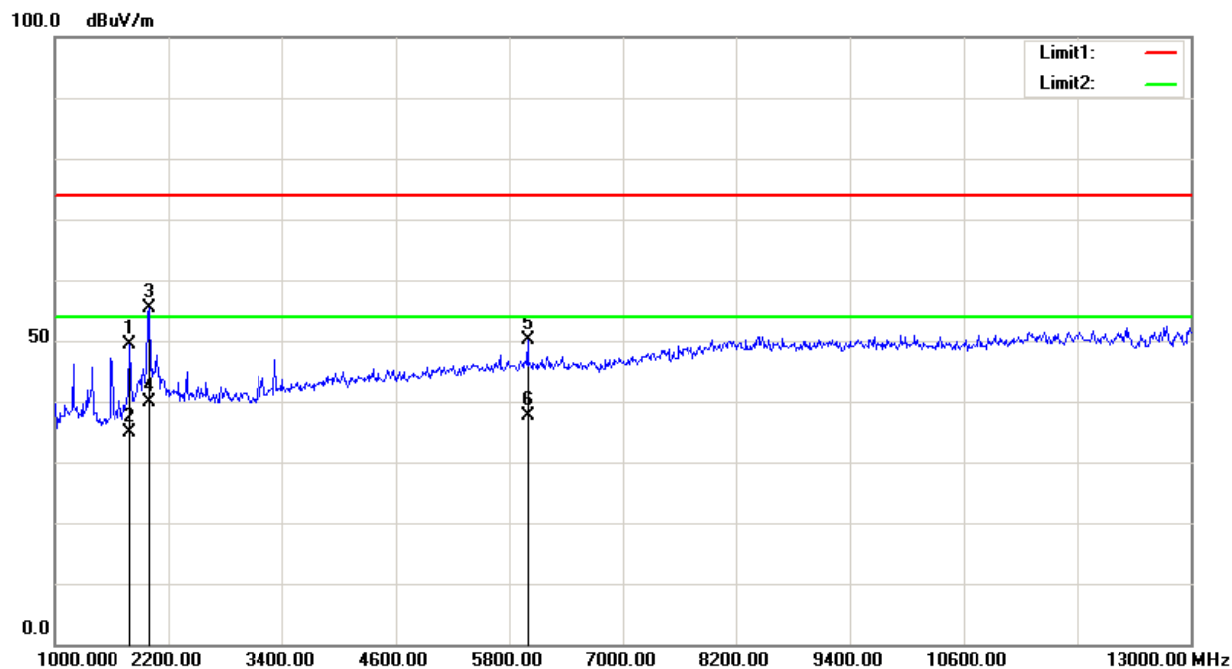

Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1798.000	57.27	peak	-7.79	49.48	74.00	24.52
1798.000	42.67	AVG	-7.79	34.88	54.00	19.12
2002.000	62.45	peak	-7.18	55.27	74.00	18.73
2002.000	47.10	AVG	-7.18	39.92	54.00	14.08
5998.000	49.44	peak	0.80	50.24	74.00	23.76
5998.000	36.87	AVG	0.80	37.67	54.00	16.33

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Model: Triton
Test Mode: Downloading
Note:

Polarization: Vertical
Power: AC 120V/60Hz
Distance: 3m

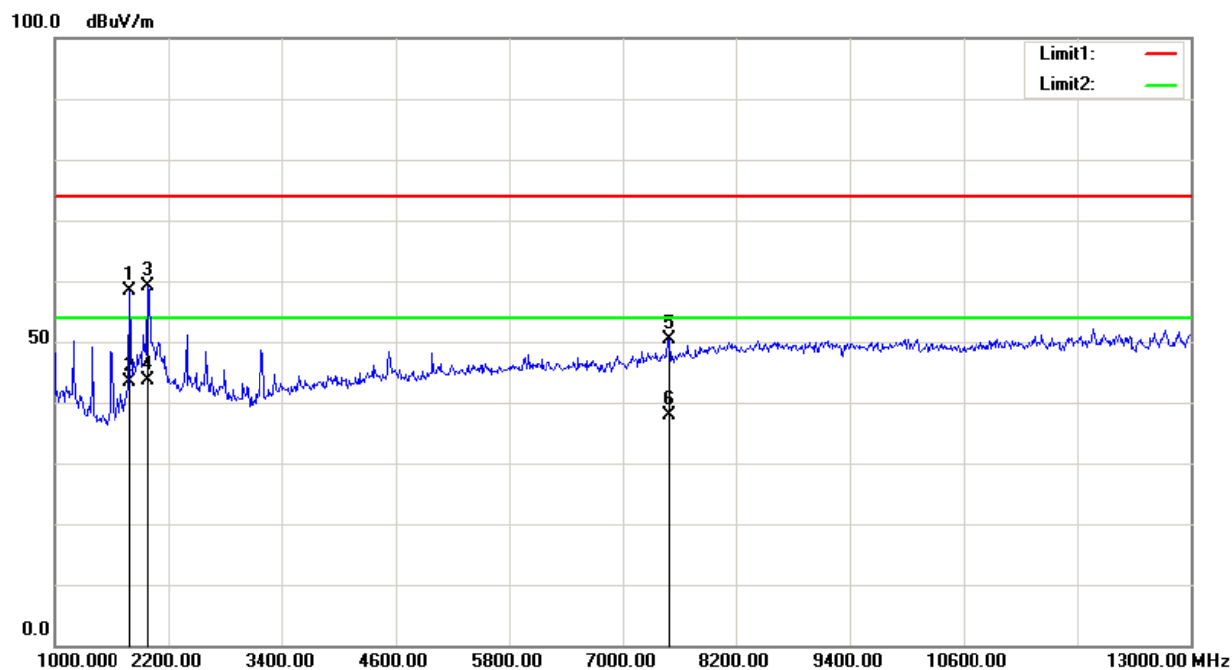

Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1798.000	66.21	peak	-7.79	58.42	74.00	15.58
1798.000	51.11	AVG	-7.79	43.32	54.00	10.68
1990.000	66.42	peak	-7.22	59.20	74.00	14.80
1990.000	50.87	AVG	-7.22	43.65	54.00	10.35
7492.000	47.09	peak	3.21	50.30	74.00	23.70
7492.000	34.56	AVG	3.21	37.77	54.00	16.23

*****END OF REPORT*****