

TEST REPORT

Applicant Name: SHENZHEN OFEIXIN TECHNOLOGY LIMITED
Address: 902, Building 4, Guangming Fenghuang Plaza, Dongkeng Community, Fenghuang Street, Guangming, Shenzhen, China
Report Number: 2601S21212E-RF-00C
FCC ID: 2AT5W-O9101SA

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: O9101SA
Model No.: O9101SA
Multiple Model(s) No.: N/A
Trade Mark: QOGRISYS
Date Received: 2026/04/09
Issue Date: 2026/08/28

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Cheeb Huang

Cheeb Huang
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
EMC Manager

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
REQUIREMENTS AND TEST PROCEDURES	12
AC LINE CONDUCTED EMISSIONS	12
SPURIOUS EMISSIONS	14
6 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	17
MAXIMUM CONDUCTED OUTPUT POWER	19
100 KHz BANDWIDTH OF FREQUENCY BAND EDGE	20
CONDUCTED SPURIOUS EMISSION	21
POWER SPECTRAL DENSITY	22
DUTY CYCLE	25
RF EXPOSURE EVALUATION	26
ANTENNA REQUIREMENT	28
TEST DATA AND RESULTS	29
AC LINE CONDUCTED EMISSIONS	29
SPURIOUS EMISSIONS	34
6dB EMISSION BANDWIDTH	124
99% OCCUPIED BANDWIDTH	128
MAXIMUM CONDUCTED OUTPUT POWER	132
POWER SPECTRAL DENSITY	133
100 KHz BANDWIDTH OF FREQUENCY BAND EDGE	137
DUTY CYCLE	140
CONDUCTED SPURIOUS EMISSION	142
EUT PHOTOGRAPHS	146
TEST SETUP PHOTOGRAPHS	147

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601S21212E-RF-00C	Original Report	2026/08/28

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	2412~2462MHz
Mode	802.11b/g/n20/n40/ax20/ax40
Maximum Conducted Output Peak Power	21.51dBm
Modulation Technique	DSSS, OFDM, OFDMA
Antenna Specification[#]	1.76dBi (provided by the applicant)
Test Voltage	DC 5V from adapter
Module Voltage	DC 3.15-3.45V
Sample serial number	3L0P-3 for AC Line Conducted Emissions and Radiated Emissions Test 3L0P-4 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition

Note: the 802.11ax mode only supports the full RU configuration.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Power Spectral Density		2.09dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
	18GHz - 40GHz	6.66dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No.: CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b/g/n20/ax20 modes were tested with Channel 1, 6 and 11.

802.11n40/ax40 modes were tested with Channel 3, 6 and 9.

EUT Exercise Software

Exercise Software [#]		Emupt.exe		
Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	15	15	15
802.11g	6Mbps	15	15	15
802.11n20	MCS0	15	15	15
802.11n40	MCS0	15	15	15
802.11ax20	MCS0	15	15	15
802.11ax40	MCS0	15	15	15

Note: The worst-case data rates are determined to be as above for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SHENZHEN OFEIXIN TECHNOLOGY LIMITED	Adapter	SK02G-0500200U	Unknown
OFEIXIN	Test fixture	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable DC Cable	1.2	Test fixture	Adapter
Unshielded Un-detachable AC Cable	1.5	Socket	AC Mains

Block Diagram of Test Setup


For AC Line Conducted Emissions:

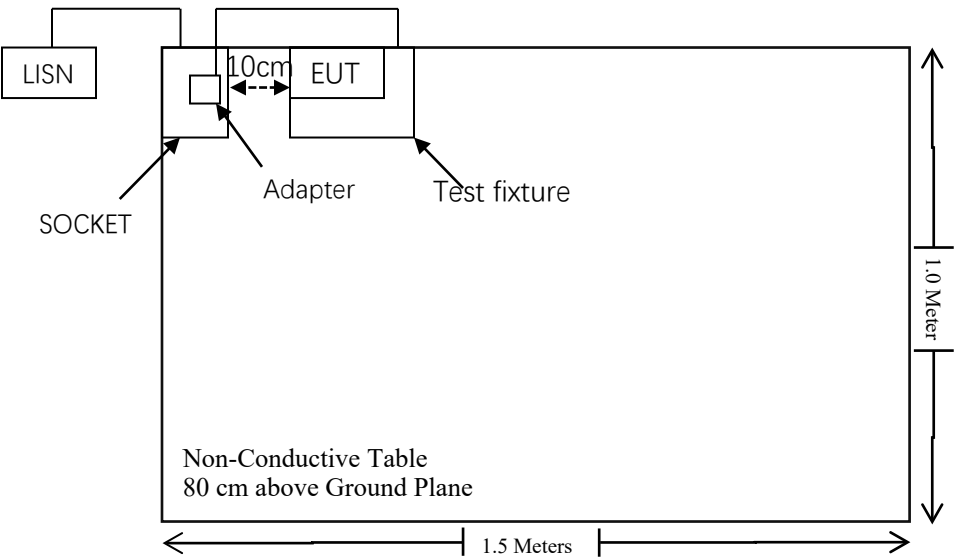

For Radiated Emissions below 1GHz:

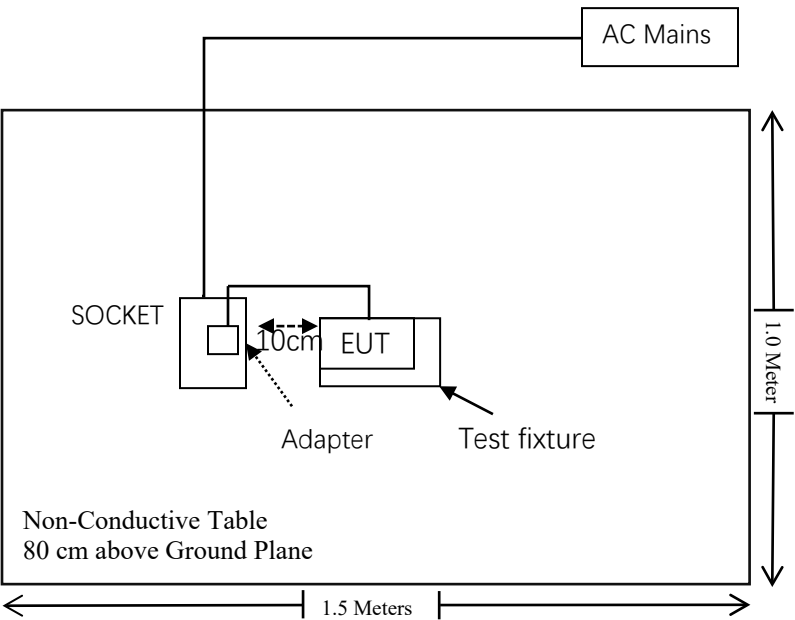

For Radiated Emissions above 1GHz:

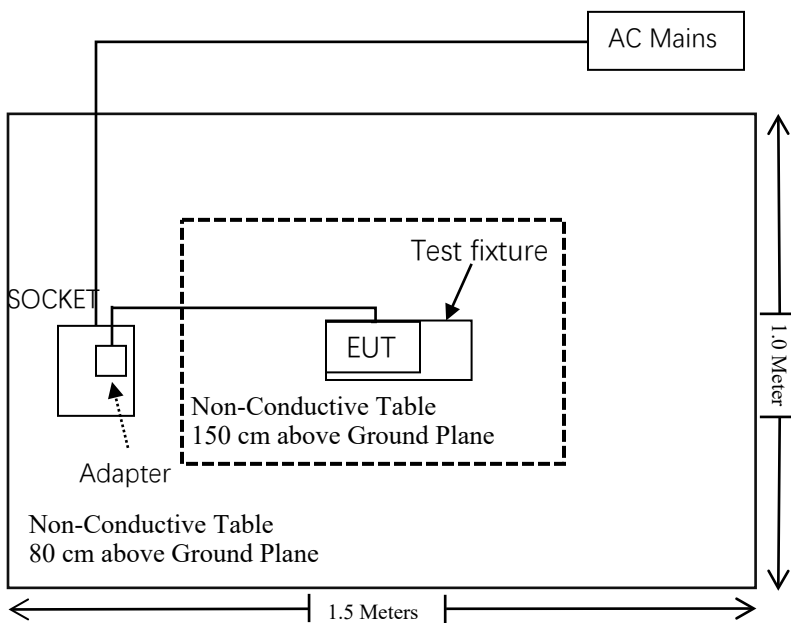

SUMMARY OF TEST RESULTS

Test Rules	Description of Test	Result
§1.1307 (b) & §2.1091	MPE-Based Exemption	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
C63.10 §11.6	Duty Cycle	/

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
JD	JD Auto Test software	NA	1.0.0.3769	NCR	NCR
Unknown	RF Cable	Cable RF2	Cable RF2	2025/09/17	2026/09/16
Unknown	10dB Attenuator	Unknown	F-03-EM224	2025/06/26	2026/06/25
ANRITSU	Microwave peak power sensor	MA24418A	12622	2025/09/01	2026/08/31

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC§15.207

EUT Setup

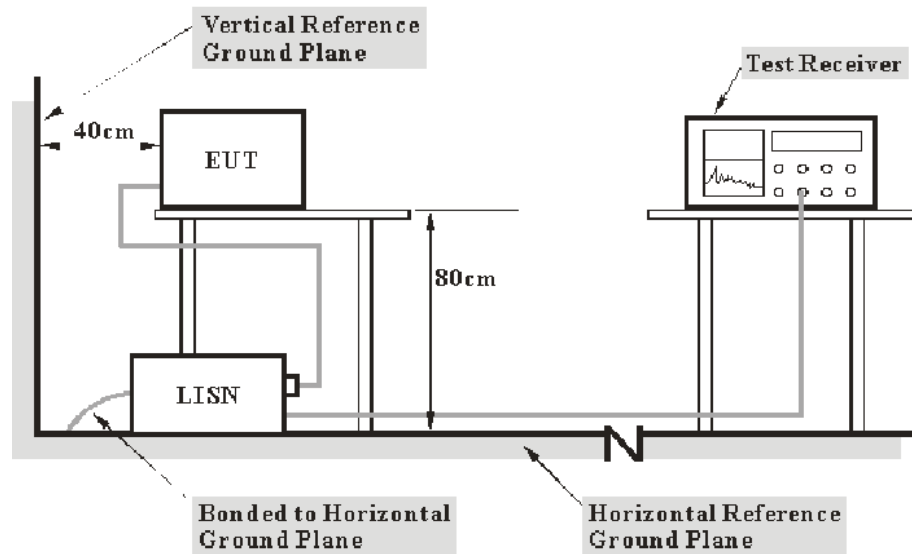

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Spurious Emissions

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

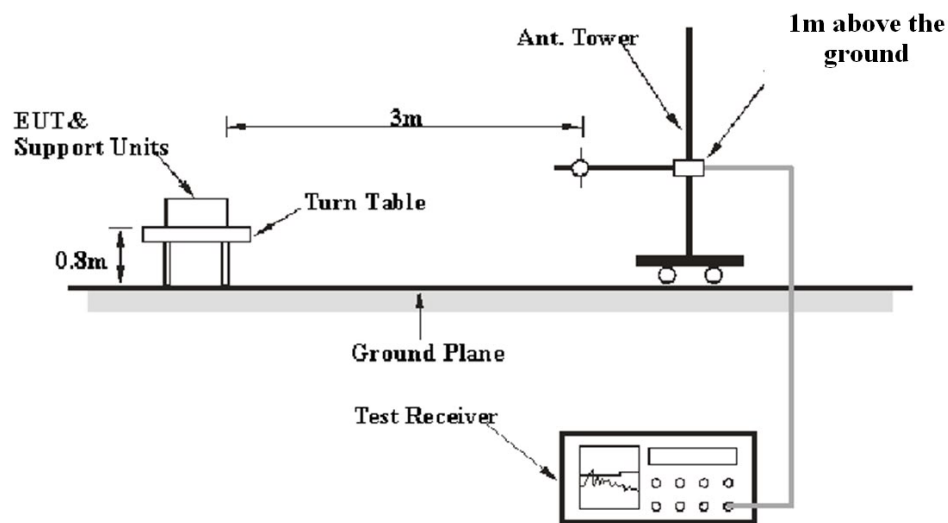

30MHz-1GHz:

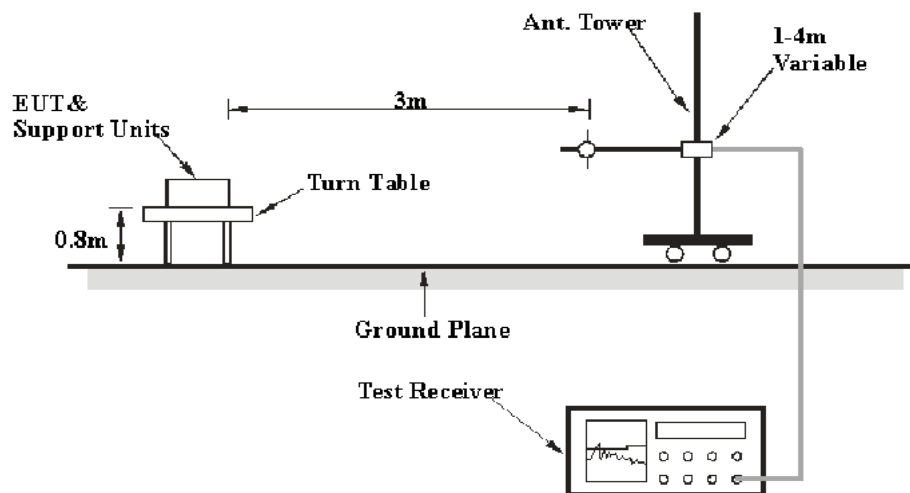

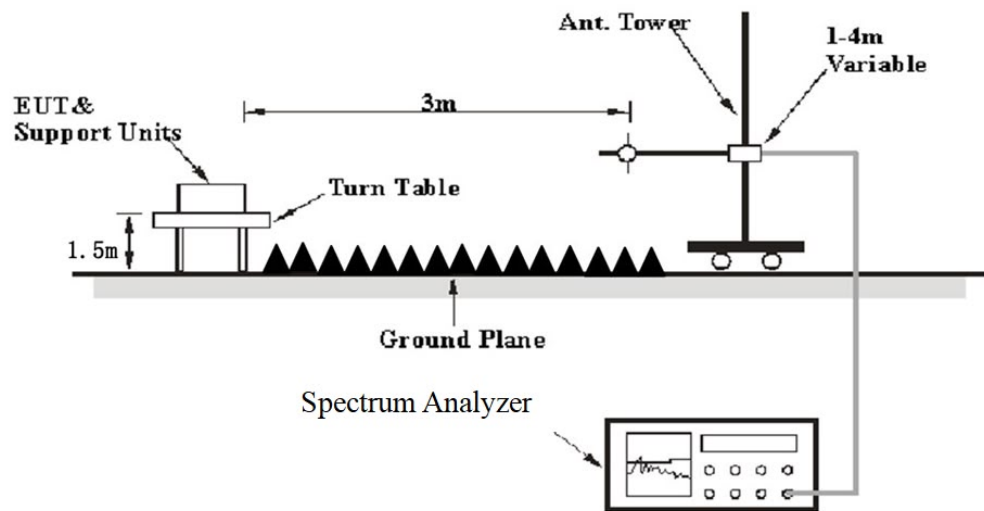Above 1GHz:

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	120 kHz	500 kHz	/	PK	Peak

1-25GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	>1/Ton, not less than 1kHz	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

6 dB Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.8.1 & Clause 6.9.3

The steps for the first option are as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

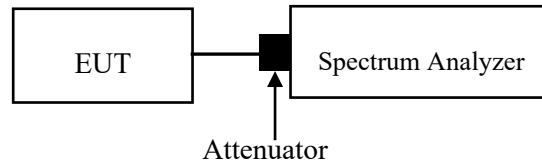

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Maximum Conducted Output Power


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test method: ANSI C63.10-2020 clause 11.9.1.2 for peak power method or clause 11.9.2.3.2 for average power method.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

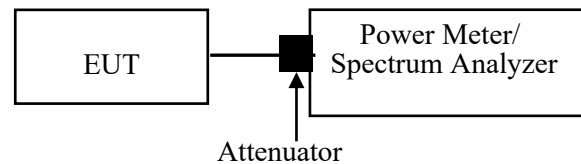

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

100 kHz Bandwidth of Frequency Band Edge

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

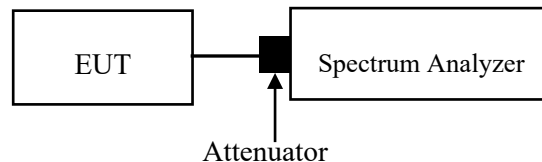

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Conducted Spurious Emission

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

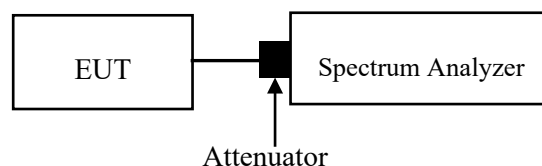

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the worst case cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note: The worst cable loss among the test frequency range was added into plots.

Power Spectral Density

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span > 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test Method: ANSI C63.10-2020 Clause 11.10.3 Method AVGPSD-1

The following procedure may be used when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has a power averaging (rms) detector, then it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously ($D \geq 98\%$), or else sweep triggering/signal gating must be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to > 1.5 times the OBW.

- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test Method: ANSI C63.10-2020 Clause 11.10.5 Method AVGPSD-2

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$):

- a) Measure the duty cycle (D) of the transmitter output signal as described in 11.6.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to > 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq [3 \times \text{RBW}]$.
- f) Detector = power averaging (rms) or sample detector (when rms not available).
- g) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering; allow sweep to “free run.”
- j) Employ trace averaging (rms) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.

m) If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test Method: ANSI C63.10-2020 Clause 11.10.7 Method AVGPS-3

The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed $\pm 2\%$):

a) Set the instrument span to > 1.5 times the OBW.

b) Set sweep trigger to “free run.”

c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

d) Set VBW $\geq [3 \times \text{RBW}]$.

e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This ensures that bin-to-bin spacing is

f) $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)

g) Sweep time $\leq [(\text{number of points in sweep}) \times T]$, where T is defined in 11.6.

NOTE—If this results in a sweep time less than the auto sweep time of the instrument, then this method shall not be used (use AVGPS-2A instead). The purpose of this step is to ensure that averaging time in each bin is less than or equal to the minimum time of a transmission.


h) Detector = Power averaging (rms).

i) Trace mode = max-hold.

j) Allow max-hold to run for at least 60 s or longer as needed to allow the trace to stabilize.

k) Use the peak marker function to determine the maximum PSD level.

l) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

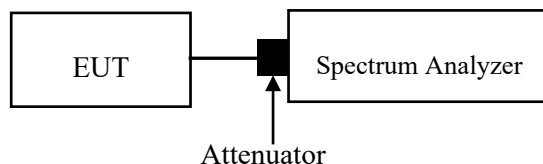

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 11.6

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

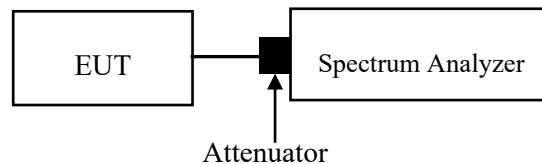

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to the subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain#		ERP		Evaluation Distance (m)	ERP Limit (mW)
			(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	4.50	1.76	-0.39	4.11	2.58	0.2	768
BLE	2402-2480	3.50	1.76	-0.39	3.11	2.05	0.2	768
2.4G Wi-Fi	2412~2462	22.0	1.76	-0.39	21.61	144.88	0.2	768
5G Wi-Fi	5150-5250	13.0	1.47	-0.68	12.32	17.06	0.2	768
	5725-5850	14.5	1.64	-0.51	13.99	25.06	0.2	768

Note 1: The tune up conducted power and antenna gain was declared by the applicant.

Note 2: The Bluetooth or BLE can transmit at same time with 5G Wi-Fi.

Simultaneous transmitting consideration:

The ratio= (ERP_{BT}/limit) + (ERP_{5G Wi-Fi}/limit) = 2.58/768 + 25.06/768 = 0.04 < 1.0

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has been tested with a FPC antenna that connects to the IPEX-4 connector. And the antenna gain[#] is 1.76dBi for the 2.4G Wi-Fi. Please refer to the EUT photos.

Result: Compliant


TEST DATA AND RESULTS

AC Line Conducted Emissions

Environmental Conditions

Temperature (°C)	25.1	Relative Humidity (%)	56
ATM Pressure (kPa)	100.3	Test engineer	Macy Shi
Test date	2026/4/29		
EUT operation mode	Transmitting (Maximum output power mode 11ax40 High channel)		

AC 120V 60 Hz, Line

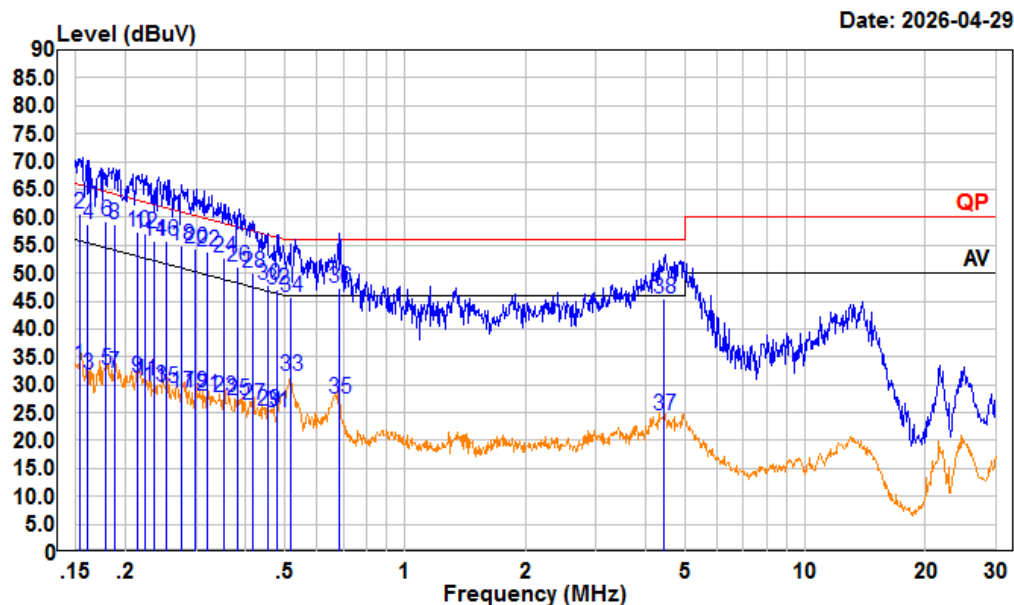

Condition: Line

Project : 2601S21212E-RF


tester : Macy.shi Note: 2.4G WIFI Transmitting

Setting : RBW: 9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	13.61	33.33	9.70	10.02	55.82	-22.49	Average
2	0.153	40.99	60.71	9.70	10.02	65.82	-5.11	QP
3	0.161	12.03	31.75	9.70	10.02	55.41	-23.66	Average
4	0.161	38.94	58.66	9.70	10.02	65.41	-6.75	QP
5	0.178	12.81	32.54	9.70	10.03	54.56	-22.02	Average
6	0.178	39.51	59.24	9.70	10.03	64.56	-5.32	QP
7	0.188	12.32	32.05	9.70	10.03	54.13	-22.08	Average
8	0.188	38.97	58.70	9.70	10.03	64.13	-5.43	QP
9	0.214	11.58	31.32	9.71	10.03	53.06	-21.74	Average
10	0.214	37.77	57.51	9.71	10.03	63.06	-5.55	QP
11	0.224	11.12	30.86	9.71	10.03	52.67	-21.81	Average
12	0.224	37.41	57.15	9.71	10.03	62.67	-5.52	QP
13	0.236	9.85	29.60	9.72	10.03	52.23	-22.63	Average
14	0.236	36.00	55.75	9.72	10.03	62.23	-6.48	QP
15	0.252	9.63	29.39	9.73	10.03	51.67	-22.28	Average
16	0.252	35.94	55.70	9.73	10.03	61.67	-5.97	QP

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
17	0.275	8.92	28.68	9.73	10.03	50.96	-22.28	Average
18	0.275	35.18	54.94	9.73	10.03	60.96	-6.02	QP
19	0.299	8.72	28.49	9.74	10.03	50.27	-21.78	Average
20	0.299	34.50	54.27	9.74	10.03	60.27	-6.00	QP
21	0.320	8.35	28.13	9.75	10.03	49.70	-21.57	Average
22	0.320	34.06	53.84	9.75	10.03	59.70	-5.86	QP
23	0.352	7.88	27.67	9.76	10.03	48.93	-21.26	Average
24	0.352	32.91	52.70	9.76	10.03	58.93	-6.23	QP
25	0.380	7.49	27.29	9.77	10.03	48.29	-21.00	Average
26	0.380	31.40	51.20	9.77	10.03	58.29	-7.09	QP
27	0.414	6.50	26.31	9.78	10.03	47.56	-21.25	Average
28	0.414	30.29	50.10	9.78	10.03	57.56	-7.46	QP
29	0.454	5.37	25.19	9.79	10.03	46.80	-21.61	Average
30	0.454	28.15	47.97	9.79	10.03	56.80	-8.83	QP
31	0.478	5.27	25.10	9.80	10.03	46.37	-21.27	Average
32	0.478	27.29	47.12	9.80	10.03	56.37	-9.25	QP
33	0.517	11.83	31.67	9.80	10.04	46.00	-14.33	Average
34	0.517	25.88	45.72	9.80	10.04	56.00	-10.28	QP
35	0.682	7.74	27.58	9.80	10.04	46.00	-18.42	Average
36	0.682	27.51	47.35	9.80	10.04	56.00	-8.65	QP
37	4.417	4.24	24.36	9.90	10.22	46.00	-21.64	Average
38	4.417	25.17	45.29	9.90	10.22	56.00	-10.71	QP

AC 120V 60 Hz, Neutral

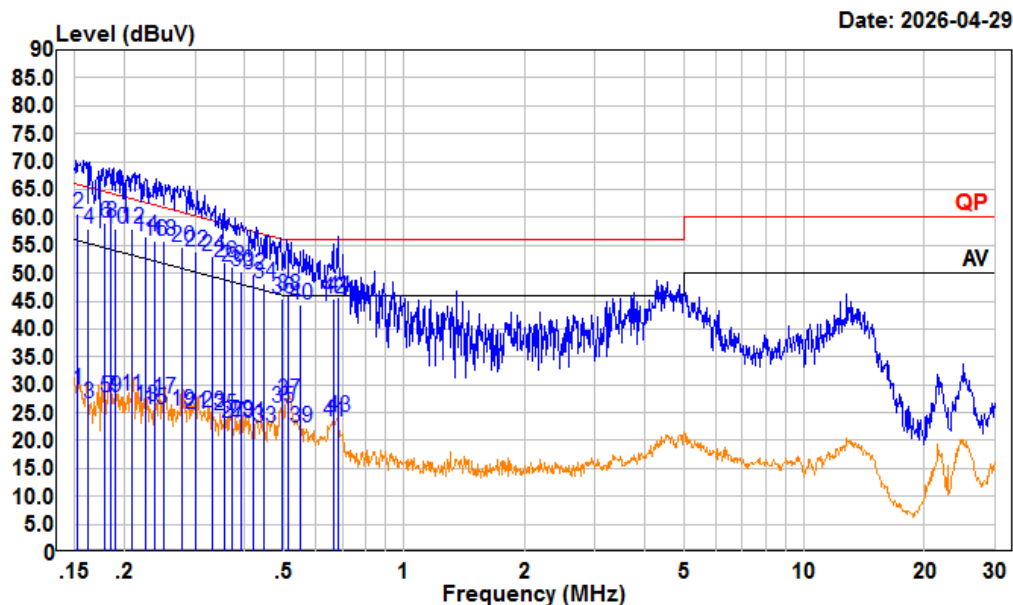

Condition: neutral

Project : 2601S21212E-RF

tester : Macy.shi Note:2.4G WIFI Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	9.38	29.00	9.60	10.02	55.87	-26.87	Average
2	0.152	41.09	60.71	9.60	10.02	65.87	-5.16	QP
3	0.162	6.99	26.61	9.60	10.02	55.35	-28.74	Average
4	0.162	38.26	57.88	9.60	10.02	65.35	-7.47	QP
5	0.178	8.24	27.87	9.60	10.03	54.56	-26.69	Average
6	0.178	39.47	59.10	9.60	10.03	64.56	-5.46	QP
7	0.185	8.22	27.85	9.60	10.03	54.26	-26.41	Average
8	0.185	39.38	59.01	9.60	10.03	64.26	-5.25	QP
9	0.190	8.19	27.82	9.60	10.03	54.04	-26.22	Average
10	0.190	38.24	57.87	9.60	10.03	64.04	-6.17	QP
11	0.208	8.33	27.96	9.60	10.03	53.29	-25.33	Average
12	0.208	38.25	57.88	9.60	10.03	63.29	-5.41	QP
13	0.226	6.40	26.03	9.60	10.03	52.60	-26.57	Average
14	0.226	37.05	56.68	9.60	10.03	62.60	-5.92	QP
15	0.237	5.88	25.51	9.60	10.03	52.20	-26.69	Average
16	0.237	36.12	55.75	9.60	10.03	62.20	-6.45	QP


	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
17	0.250	7.80	27.43	9.60	10.03	51.74	-24.31	Average
18	0.250	36.06	55.69	9.60	10.03	61.74	-6.05	QP
19	0.278	5.64	25.27	9.60	10.03	50.89	-25.62	Average
20	0.278	35.09	54.72	9.60	10.03	60.89	-6.17	QP
21	0.302	5.12	24.75	9.60	10.03	50.18	-25.43	Average
22	0.302	34.09	53.72	9.60	10.03	60.18	-6.46	QP
23	0.331	5.52	25.15	9.60	10.03	49.44	-24.29	Average
24	0.331	33.39	53.02	9.60	10.03	59.44	-6.42	QP
25	0.356	4.96	24.59	9.60	10.03	48.83	-24.24	Average
26	0.356	32.32	51.95	9.60	10.03	58.83	-6.88	QP
27	0.372	3.49	23.12	9.60	10.03	48.47	-25.35	Average
28	0.372	31.56	51.19	9.60	10.03	58.47	-7.28	QP
29	0.392	3.71	23.34	9.60	10.03	48.01	-24.67	Average
30	0.392	30.76	50.39	9.60	10.03	58.01	-7.62	QP
31	0.418	3.59	23.22	9.60	10.03	47.48	-24.26	Average
32	0.418	30.15	49.78	9.60	10.03	57.48	-7.70	QP
33	0.447	2.75	22.38	9.60	10.03	46.93	-24.55	Average
34	0.447	28.53	48.16	9.60	10.03	56.93	-8.77	QP
35	0.496	6.20	25.83	9.60	10.03	46.07	-20.24	Average
36	0.496	25.84	45.47	9.60	10.03	56.07	-10.60	QP
37	0.511	7.58	27.22	9.60	10.04	46.00	-18.78	Average
38	0.511	26.40	46.04	9.60	10.04	56.00	-9.96	QP
39	0.548	2.78	22.42	9.60	10.04	46.00	-23.58	Average
40	0.548	24.74	44.38	9.60	10.04	56.00	-11.62	QP
41	0.666	3.89	23.53	9.60	10.04	46.00	-22.47	Average
42	0.666	25.78	45.42	9.60	10.04	56.00	-10.58	QP
43	0.682	4.67	24.31	9.60	10.04	46.00	-21.69	Average
44	0.682	26.04	45.68	9.60	10.04	56.00	-10.32	QP

Spurious Emissions**Environmental Conditions**

Temperature (°C)	25.5-26.8	Relative Humidity (%)	52-59
ATM Pressure (kPa):	100.5-101.2	Test engineer:	Wing K Ji & Alex Yan
Test date:	2026/5/3-2026/5/28		
EUT operation mode:	Below 1GHz: Transmitting (Maximum output power mode 11ax40 High channel) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.		

Below 1GHz:


9kHz-150kHz

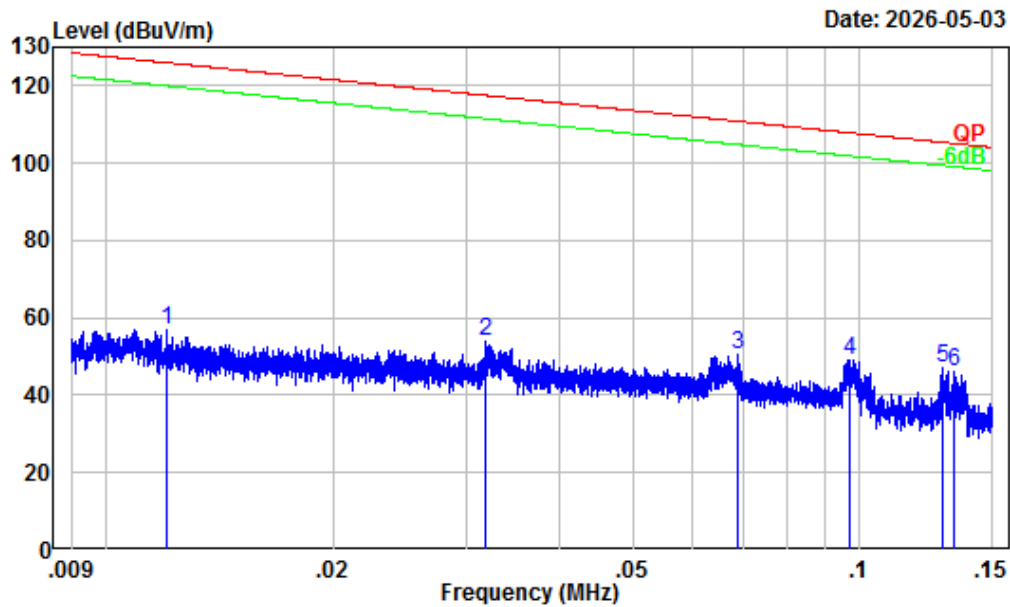

Site : Chamber A
Condition : 3m
Project Number : 2601S21212E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Alex yan

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	31.91	25.24	57.15	125.99	-68.84	Peak
2	0.032	28.30	25.82	54.12	117.53	-63.41	Peak
3	0.069	24.49	26.26	50.75	110.82	-60.07	Peak
4	0.097	22.22	27.07	49.29	107.88	-58.59	Peak
5	0.129	20.31	26.91	47.22	105.41	-58.19	Peak
6	0.134	20.01	26.21	46.22	105.08	-58.86	Peak


150kHz-30MHz

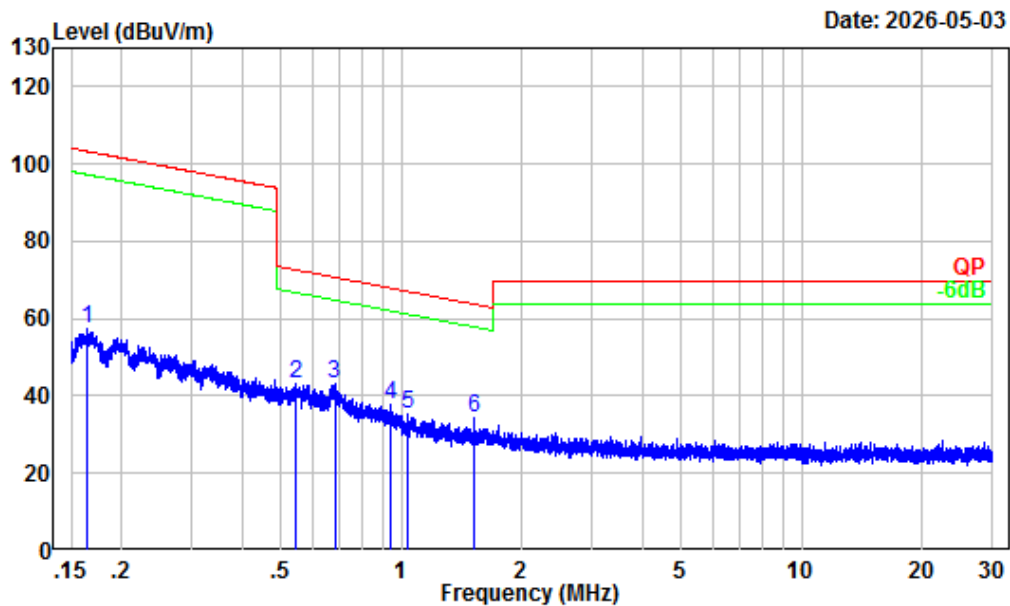

Site : Chamber A
Condition : 3m
Project Number : 2601S21212E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Alex yan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.163	18.25	39.09	57.34	103.33	-45.99	Peak
2	0.543	5.87	37.54	43.41	72.89	-29.48	Peak
3	0.682	4.15	38.88	43.03	70.87	-27.84	Peak
4	0.939	1.65	35.97	37.62	68.03	-30.41	Peak
5	1.041	1.09	34.31	35.40	67.12	-31.72	Peak
6	1.525	-0.27	34.85	34.58	63.73	-29.15	Peak


30MHz-1GHz_Horizontal

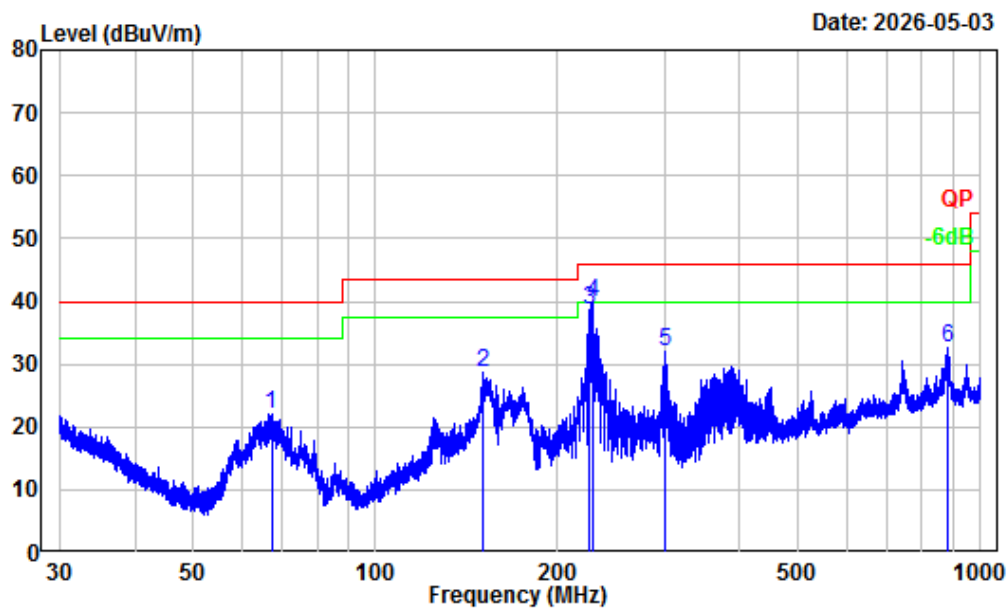

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601S21212E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Alex yan

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	67.26	-17.99	40.03	22.04	40.00	-17.96	Peak
2	150.47	-12.79	41.49	28.70	43.50	-14.80	Peak
3	225.31	-14.43	52.95	38.52	46.00	-7.48	Peak
4	228.59	-14.30	54.01	39.71	46.00	-6.29	Peak
5	300.37	-11.59	43.68	32.09	46.00	-13.91	Peak
6	882.57	-1.94	34.57	32.63	46.00	-13.37	Peak

30MHz-1GHz_Vertical

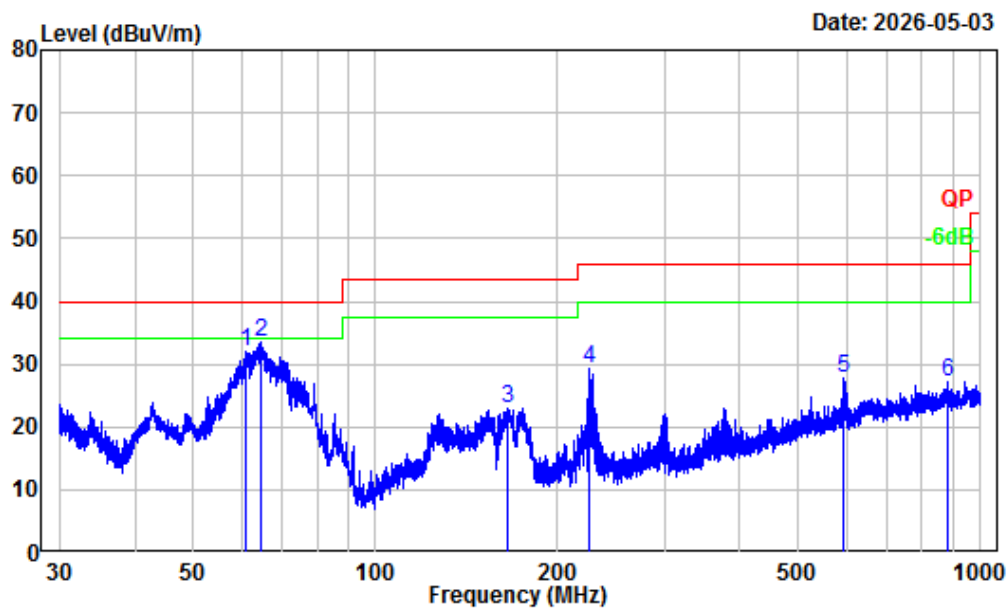

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601S21212E-RF
Test Mode : 2.4G WIFI Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Alex yan

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	61.16	-18.21	50.34	32.13	40.00	-7.87 Peak
2	64.69	-18.10	51.66	33.56	40.00	-6.44 Peak
3	165.56	-13.22	36.20	22.98	43.50	-20.52 Peak
4	225.21	-14.43	43.58	29.15	46.00	-16.85 Peak
5	595.39	-5.79	33.46	27.67	46.00	-18.33 Peak
6	883.34	-1.91	29.20	27.29	46.00	-18.71 Peak

Above 1GHz:

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11b							
Low Channel							
4824	56.9	PK	H	-7.8	49.1	74	-24.9
4824	53.63	PK	V	-7.8	45.83	74	-28.17
7236	55.61	PK	H	-2.37	53.24	74	-20.76
7236	59.47	PK	V	-2.37	57.1	74	-16.9
7236	53.28	AV	V	-2.37	50.91	54	-3.09
Middle Channel							
4874	58.65	PK	H	-7.68	50.97	74	-23.03
4874	55.41	PK	V	-7.68	47.73	74	-26.27
7311	55.61	PK	H	-2.28	53.33	74	-20.67
7311	58.78	PK	V	-2.28	56.5	74	-17.5
7311	51.63	AV	V	-2.28	49.35	54	-4.65
High Channel							
4924	58.97	PK	H	-7.62	51.35	74	-22.65
4924	55.19	PK	V	-7.62	47.57	74	-26.43
7386	55.05	PK	H	-2.16	52.89	74	-21.11
7386	58.42	PK	V	-2.16	56.26	74	-17.74
7386	50.32	AV	V	-2.16	48.16	54	-5.84
802.11g							
Low Channel							
4824	56.71	PK	H	-7.8	48.91	74	-25.09
4824	55.54	PK	V	-7.8	47.74	74	-26.26
7236	59.6	PK	H	-2.37	57.23	74	-16.77
7236	45.72	AV	H	-2.37	43.35	54	-10.65
7236	65.5	PK	V	-2.37	63.13	74	-10.87
7236	51.42	AV	V	-2.37	49.05	54	-4.95
Middle Channel							
4874	58.58	PK	H	-7.68	50.9	74	-23.1
4874	56.62	PK	V	-7.68	48.94	74	-25.06
7311	59.1	PK	H	-2.28	56.82	74	-17.18
7311	44.66	AV	H	-2.28	42.38	54	-11.62
7311	65.05	PK	V	-2.28	62.77	74	-11.23
7311	50.61	AV	V	-2.28	48.33	54	-5.67
High Channel							
4924	59.78	PK	H	-7.62	52.16	74	-21.84
4924	56.36	PK	V	-7.62	48.74	74	-25.26
7386	58.24	PK	H	-2.16	56.08	74	-17.92

7386	45.15	AV	H	-2.16	42.99	54	-11.01
7386	65.06	PK	V	-2.16	62.9	74	-11.1
7386	51.32	AV	V	-2.16	49.16	54	-4.84
802.11n20							
Low Channel							
4824	56.47	PK	H	-7.8	48.67	74	-25.33
4824	56.31	PK	V	-7.8	48.51	74	-25.49
7236	58.25	PK	H	-2.37	55.88	74	-18.12
7236	44.65	AV	H	-2.37	42.28	54	-11.72
7236	65.4	PK	V	-2.37	63.03	74	-10.97
7236	51.53	AV	V	-2.37	49.16	54	-4.84
Middle Channel							
4874	58.28	PK	H	-7.68	50.6	74	-23.4
4874	56.57	PK	V	-7.68	48.89	74	-25.11
7311	57.47	PK	H	-2.28	55.19	74	-18.81
7311	42.91	AV	H	-2.28	40.63	54	-13.37
7311	64.46	PK	V	-2.28	62.18	74	-11.82
7311	51.48	AV	V	-2.28	49.2	54	-4.8
High Channel							
4924	59.68	PK	H	-7.62	52.06	74	-21.94
4924	57.48	PK	V	-7.62	49.86	74	-24.14
7386	56.9	PK	H	-2.16	54.74	74	-19.26
7386	43.51	AV	H	-2.16	41.35	54	-12.65
7386	63.56	PK	V	-2.16	61.4	74	-12.6
7386	50.4	AV	V	-2.16	48.24	54	-5.76


Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11n40							
Low Channel							
4844	54.11	PK	H	-7.78	46.33	74	-27.67
4844	52.29	PK	V	-7.78	44.51	74	-29.49
7266	53.97	PK	H	-2.40	51.57	74	-22.43
7266	58.84	PK	V	-2.40	56.44	74	-17.56
7266	44.9	AV	V	-2.40	42.50	54	-11.50
Middle Channel							
4874	55.41	PK	H	-7.68	47.73	74	-26.27
4874	52.66	PK	V	-7.68	44.98	74	-29.02
7311	54.2	PK	H	-2.28	51.92	74	-22.08
7311	59.42	PK	V	-2.28	57.14	74	-16.86
7311	44.96	AV	V	-2.28	42.68	54	-11.32
High Channel							
4904	55.19	PK	H	-7.6	47.59	74	-26.41
4904	52.35	PK	V	-7.6	44.75	74	-29.25
7356	54.25	PK	H	-2.18	52.07	74	-21.93
7356	59.48	PK	V	-2.18	57.3	74	-16.7
7356	44.78	AV	V	-2.18	42.6	54	-11.4

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax20							
Low Channel							
4824	55.31	PK	H	-7.8	47.51	74	-26.49
4824	54.4	PK	V	-7.8	46.6	74	-27.4
7236	56.6	PK	H	-2.37	54.23	74	-19.77
7236	43.11	AV	H	-2.37	40.74	54	-13.26
7236	63.39	PK	V	-2.37	61.02	74	-12.98
7236	50.88	AV	V	-2.37	48.51	54	-5.49
Middle Channel							
4874	58.67	PK	H	-7.68	50.99	74	-23.01
4874	55.79	PK	V	-7.68	48.11	74	-25.89
7311	56.4	PK	H	-2.28	54.12	74	-19.88
7311	43.01	AV	H	-2.28	40.73	54	-13.27
7311	63.68	PK	V	-2.28	61.4	74	-12.6
7311	51.55	AV	V	-2.28	49.27	54	-4.73
High Channel							
4924	59.84	PK	H	-7.62	52.22	74	-21.78
4924	56.25	PK	V	-7.62	48.63	74	-25.37
7386	56.9	PK	H	-2.16	54.74	74	-19.26
7386	43.33	AV	H	-2.16	41.17	54	-12.83
7386	63.01	PK	V	-2.16	60.85	74	-13.15
7386	50.38	AV	V	-2.16	48.22	54	-5.78

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax40							
Low Channel							
4844	53.77	PK	H	-7.78	45.99	74	-28.01
4844	52.21	PK	V	-7.78	44.43	74	-29.57
7266	54.08	PK	H	-2.40	51.68	74	-22.32
7266	58.60	PK	V	-2.40	56.20	74	-17.80
7266	46.15	AV	V	-2.40	43.75	54	-10.25
Middle Channel							
4874	56.26	PK	H	-7.68	48.58	74	-25.42
4874	52.47	PK	V	-7.68	44.79	74	-29.21
7311	53.94	PK	H	-2.28	51.66	74	-22.34
7311	58.13	PK	V	-2.28	55.85	74	-18.15
7311	45.48	AV	V	-2.28	43.2	54	-10.8
High Channel							
4904	54.94	PK	H	-7.6	47.34	74	-26.66
4904	53.07	PK	V	-7.6	45.47	74	-28.53
7356	54.95	PK	H	-2.18	52.77	74	-21.23
7356	59.08	PK	V	-2.18	56.9	74	-17.1
7356	45.59	AV	V	-2.18	43.41	54	-10.59
Note: Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Corrected Factor + Reading Margin = Corrected. Amplitude - Limit The other spurious emission which is in the noise floor level was not recorded. The test result of peak was less than the limit of average, so just peak values were recorded.							

Test plots**1-18GHz (Listed with the worst case test plot)**


1-4GHz_Horizontal_11b

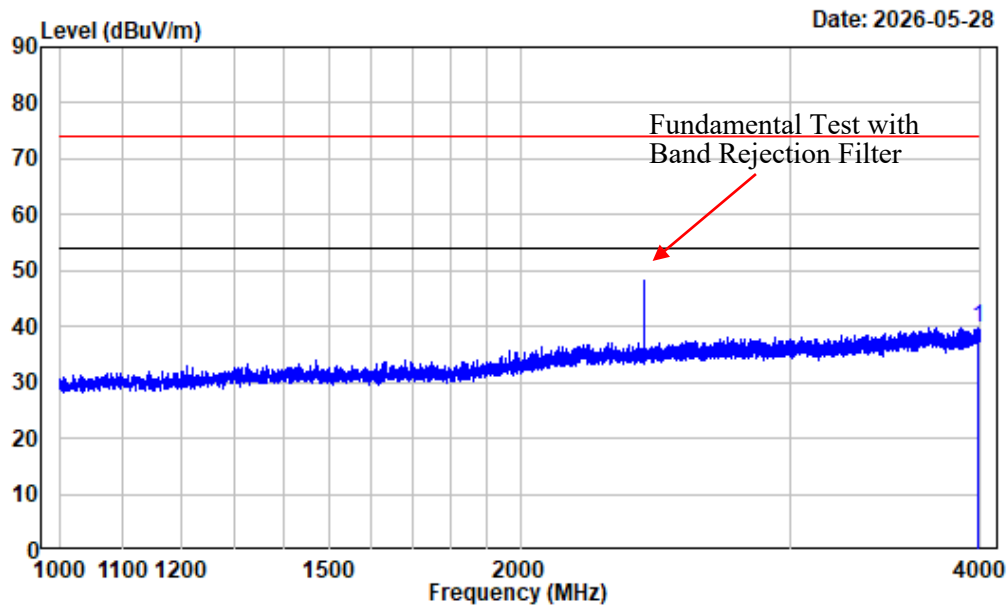

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3983.500	-8.26	48.14	39.88	74.00	-34.12	Peak


1-4GHz_Vertical_11b

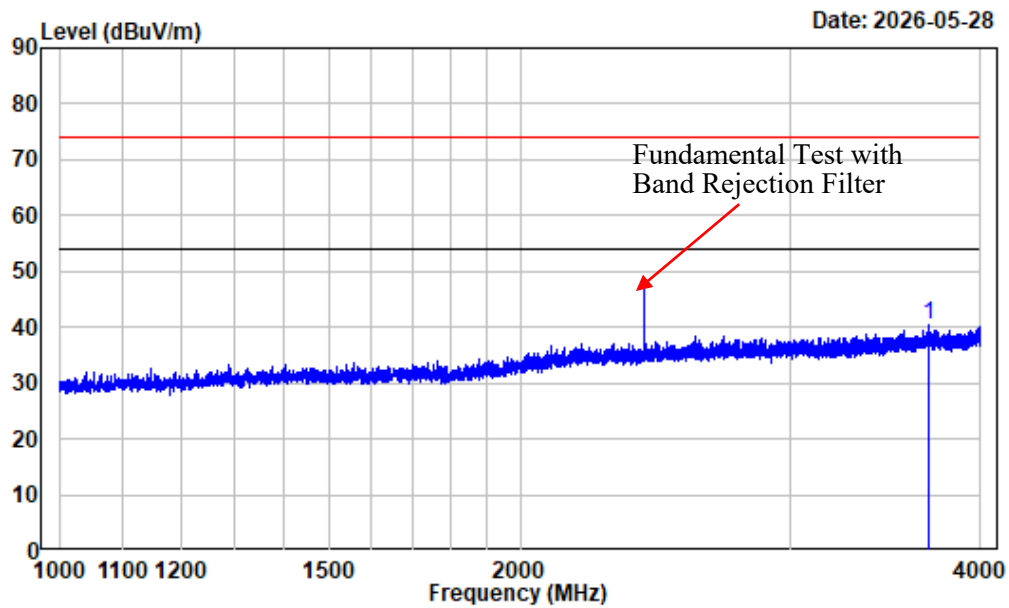

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3698.125	-8.51	48.84	40.33	74.00	-33.67	Peak


4-18GHz_Horizontal_Peak_11b

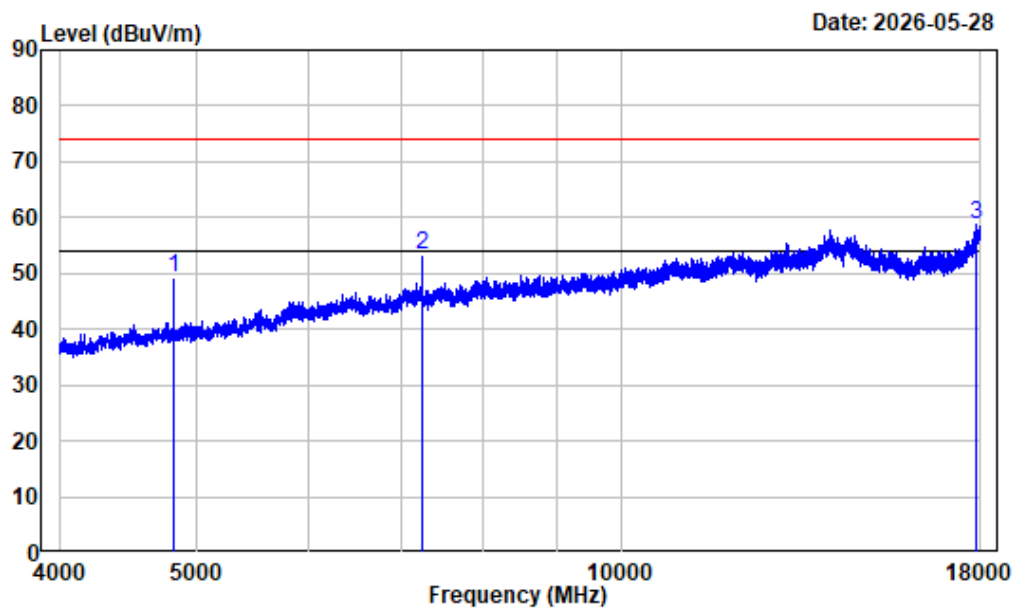

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-7.80	56.90	49.10	74.00	-24.90	Peak
2	7236.000	-2.37	55.61	53.24	74.00	-20.76	Peak
3	17865.250	8.45	50.26	58.71	74.00	-15.29	Peak


4-18GHz_Horizontal_Average_11b

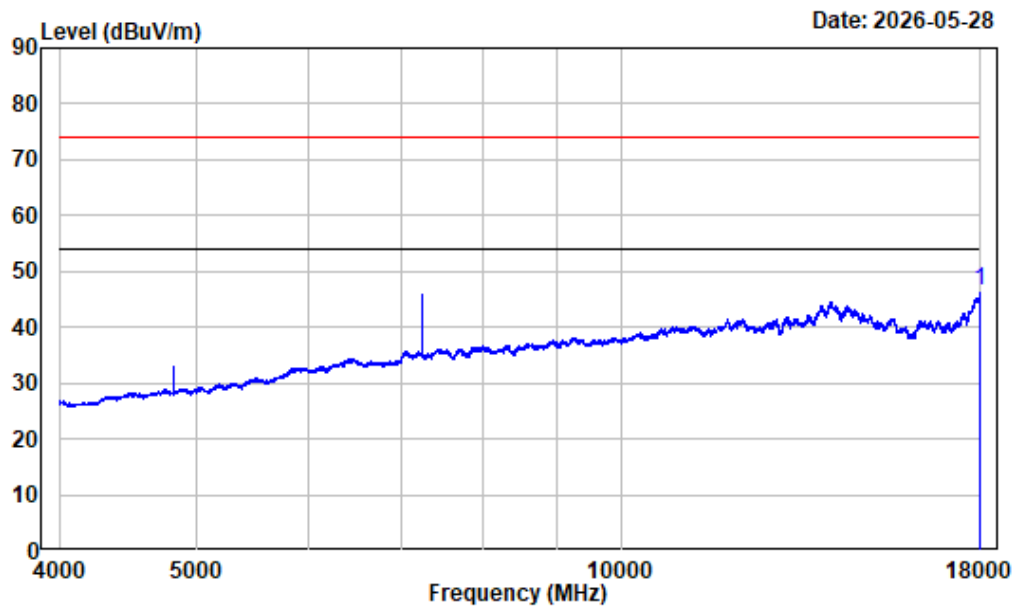

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.650	9.56	36.96	46.52	54.00	-7.48	Average


4-18GHz_Vertical_Peak_11b

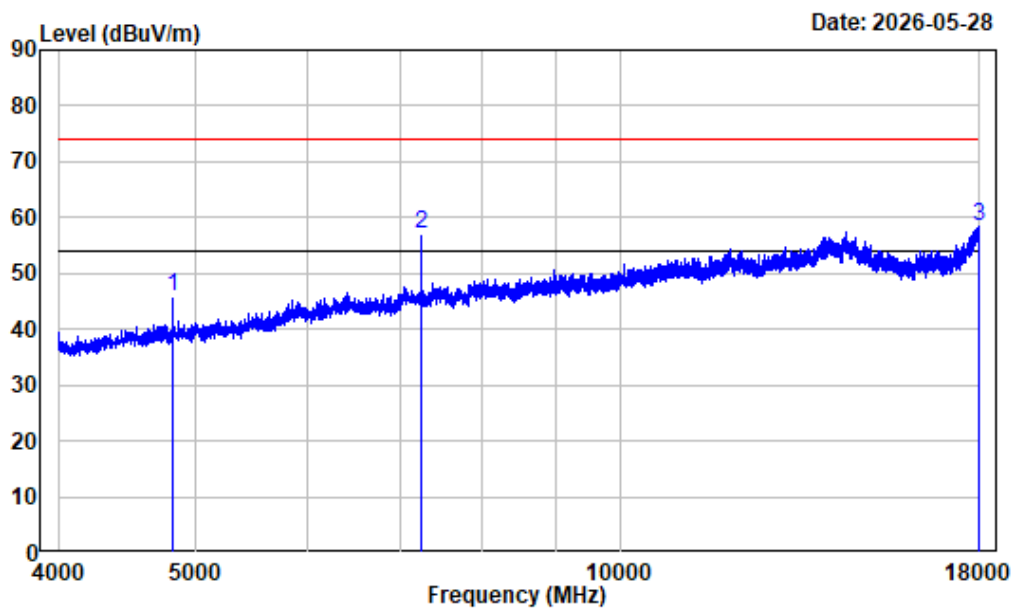

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4824.000	-7.80	53.63	45.83	74.00	-28.17	Peak
2	7236.000	-2.37	59.47	57.10	74.00	-16.90	Peak
3	17982.500	9.48	49.10	58.58	74.00	-15.42	Peak


4-18GHz_Vertical_Average_11b

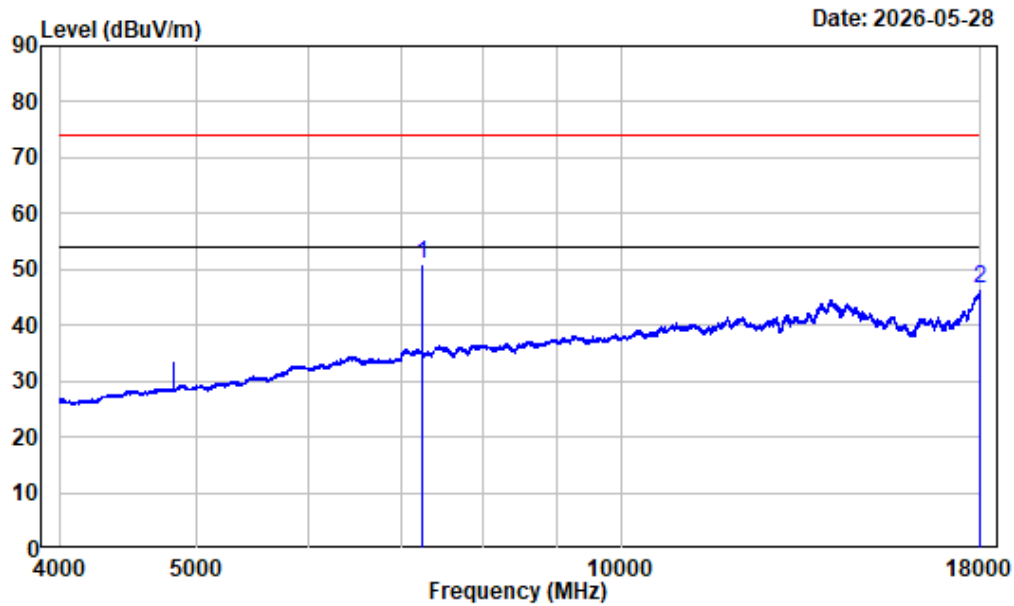

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7236.000	-2.37	53.28	50.91	54.00	-3.09	Average
2 17996.580	9.56	36.96	46.52	54.00	-7.48	Average


1-4GHz_Horizontal_11g

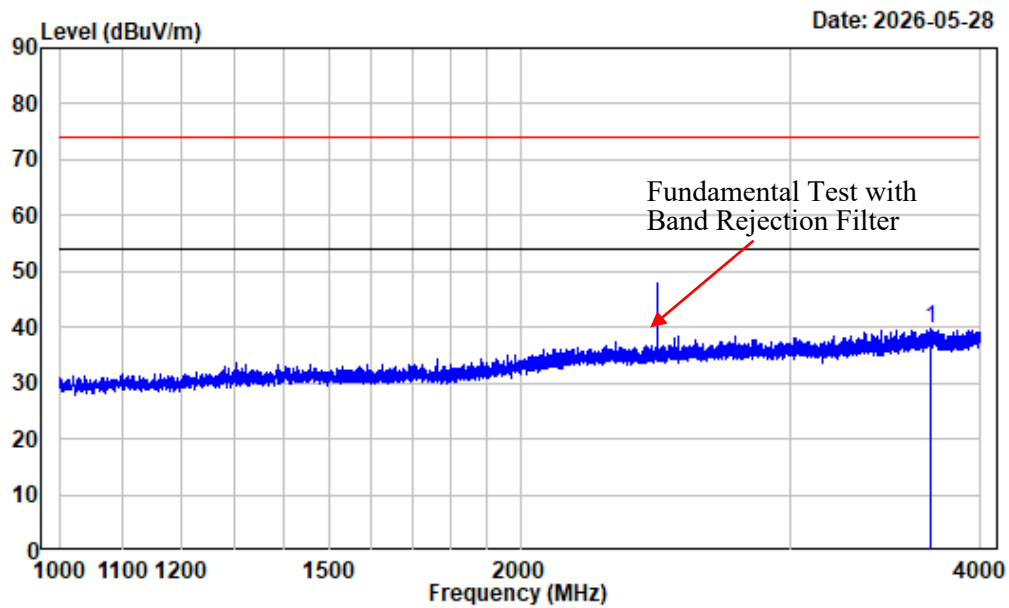

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2462

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3714.625	-8.57	48.27	39.70	74.00	-34.30 Peak


1-4GHz_Vertical_11g

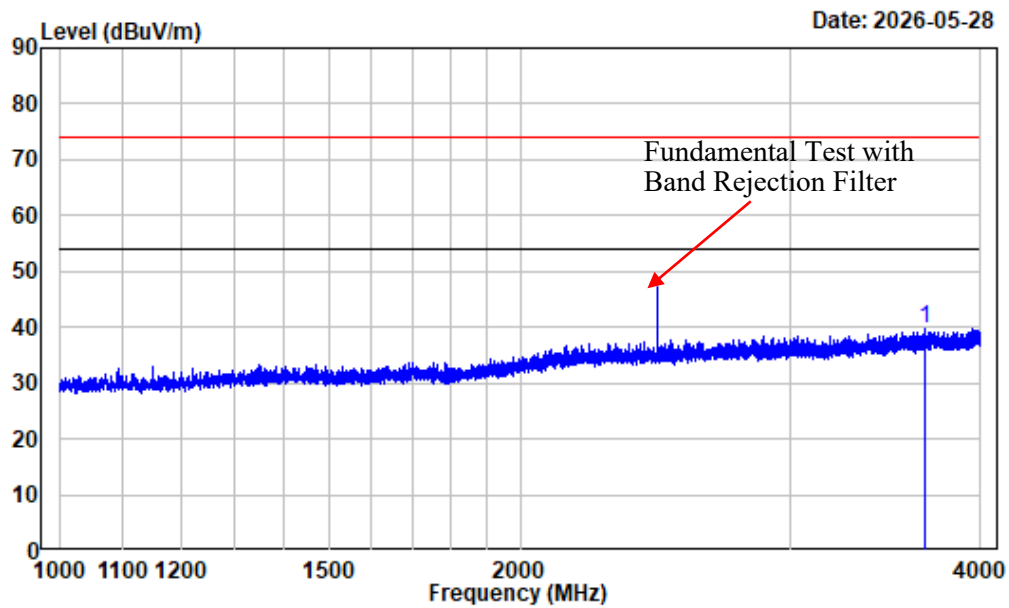

Condition : Vertical
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_g_2462

Freq Factor		Read	Limit	Over	Remark
Level	Level	Line	Limit	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3680.125	-8.64	48.47	39.83	74.00	-34.17 Peak


4-18GHz_Horizontal_Peak_11g

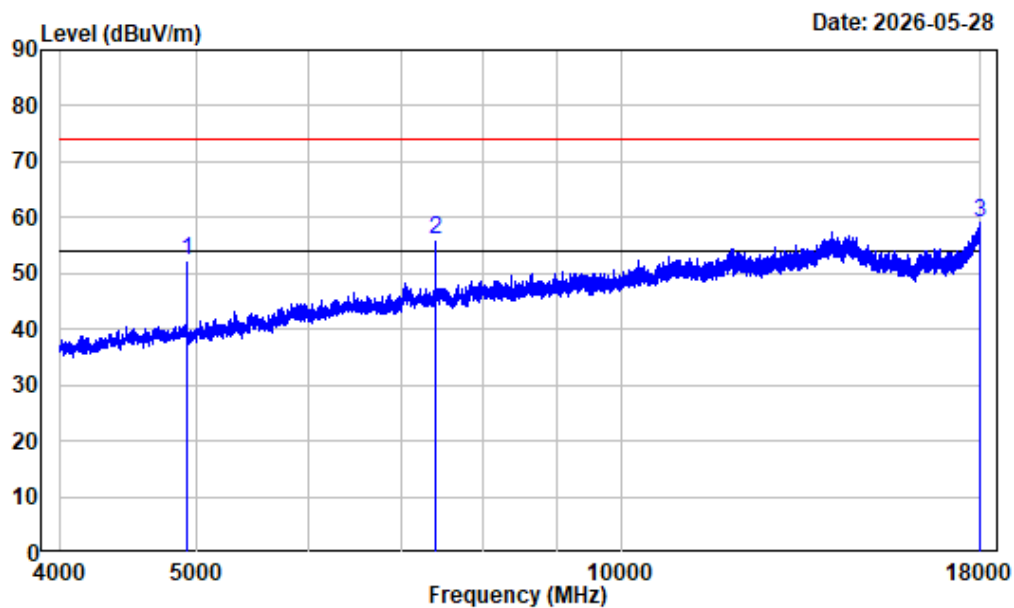

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4924.000	-7.62	59.78	52.16	74.00	-21.84	Peak
2	7386.000	-2.16	58.24	56.08	74.00	-17.92	Peak
3	17979.000	9.46	49.52	58.98	74.00	-15.02	Peak


4-18GHz_Horizontal_Average_11g

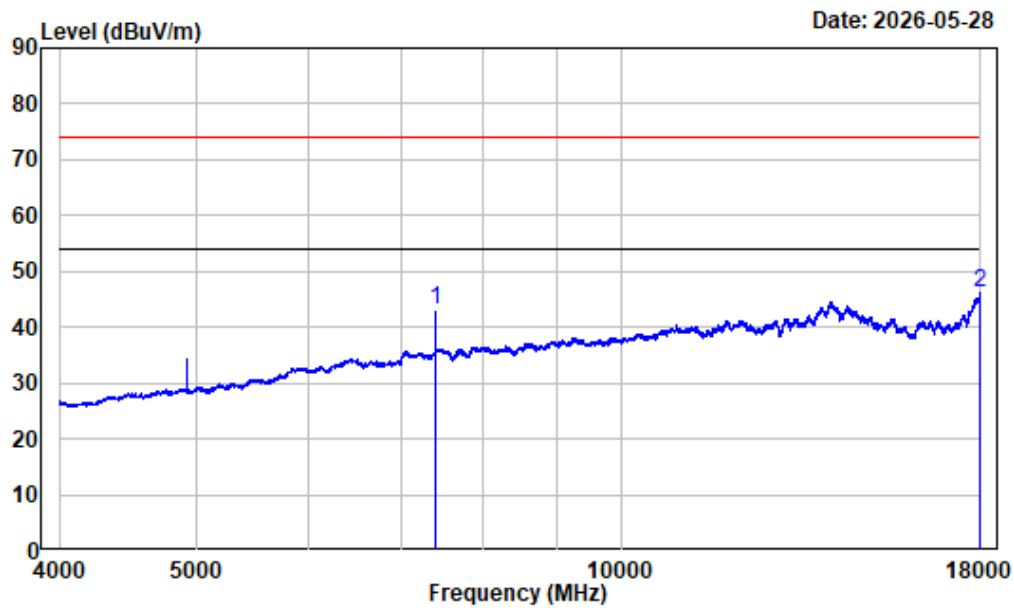

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_g_2462

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7386.000	-2.16	45.15	42.99	54.00	-11.01	Average
2 17998.250	9.55	36.73	46.28	54.00	-7.72	Average


4-18GHz_Vertical_Peak_11g

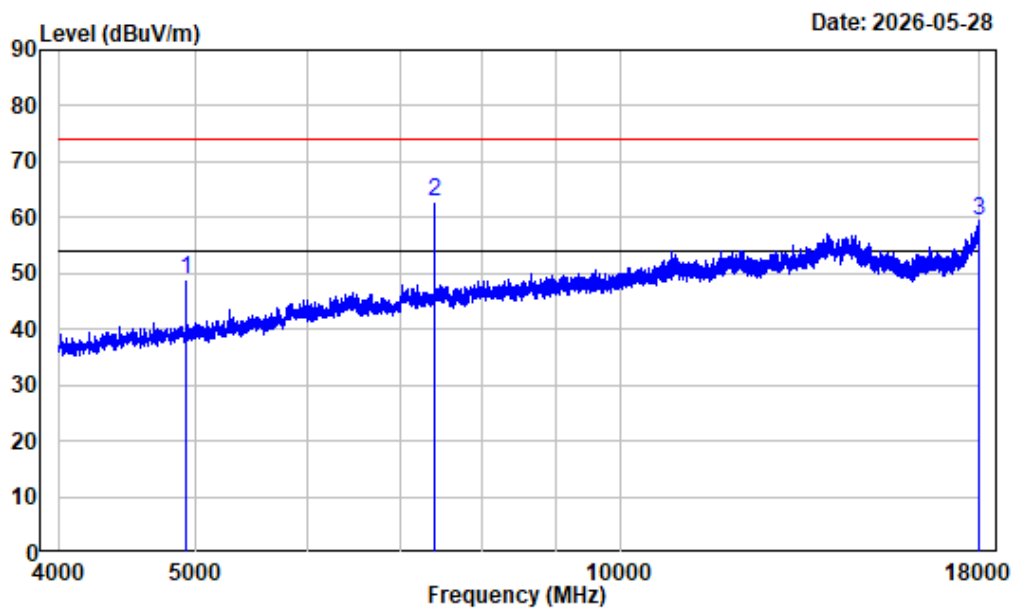

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2462

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 4924.000	-7.62	56.36	48.74	74.00	-25.26 Peak
2 7386.000	-2.16	65.06	62.90	74.00	-11.10 Peak
3 17998.250	9.55	49.71	59.26	74.00	-14.74 Peak


4-18GHz_Vertical_Average_11g

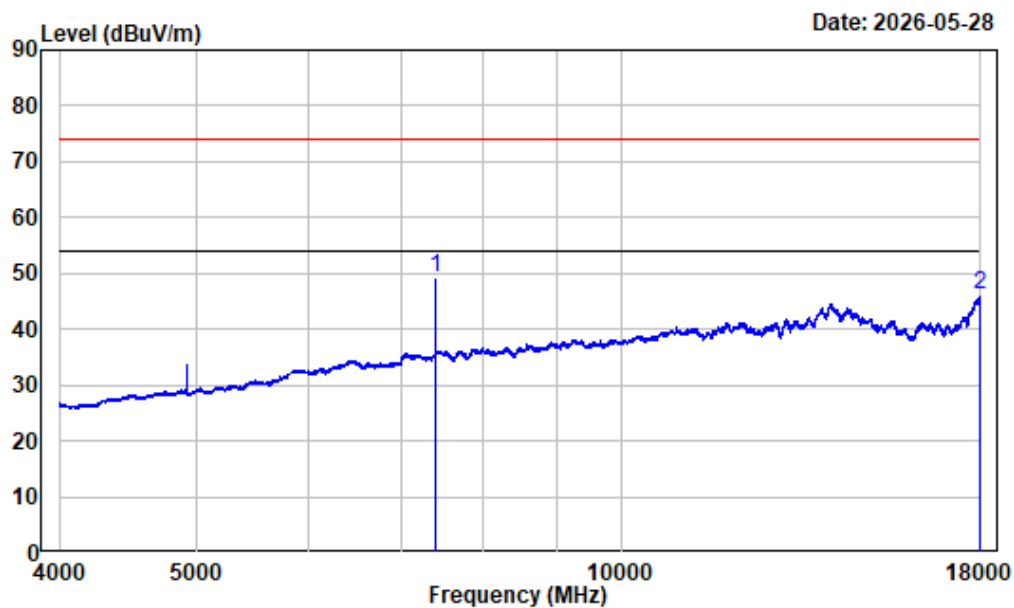

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_g_2462

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7386.000	-2.16	51.32	49.16	54.00	-4.84	Average
2 17998.250	9.55	36.63	46.18	54.00	-7.82	Average


1-4GHz_Horizontal11n20

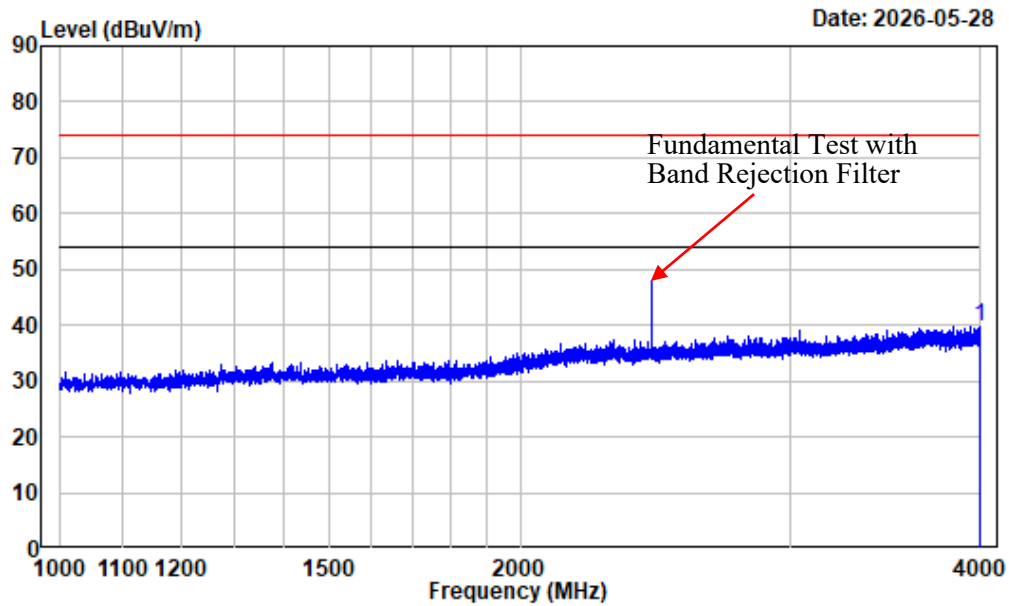

Condition : Horizontal
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_n20_2437

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3991.750	-8.24	47.95	39.71	74.00	-34.29	Peak


1-4GHz_Vertical11n20

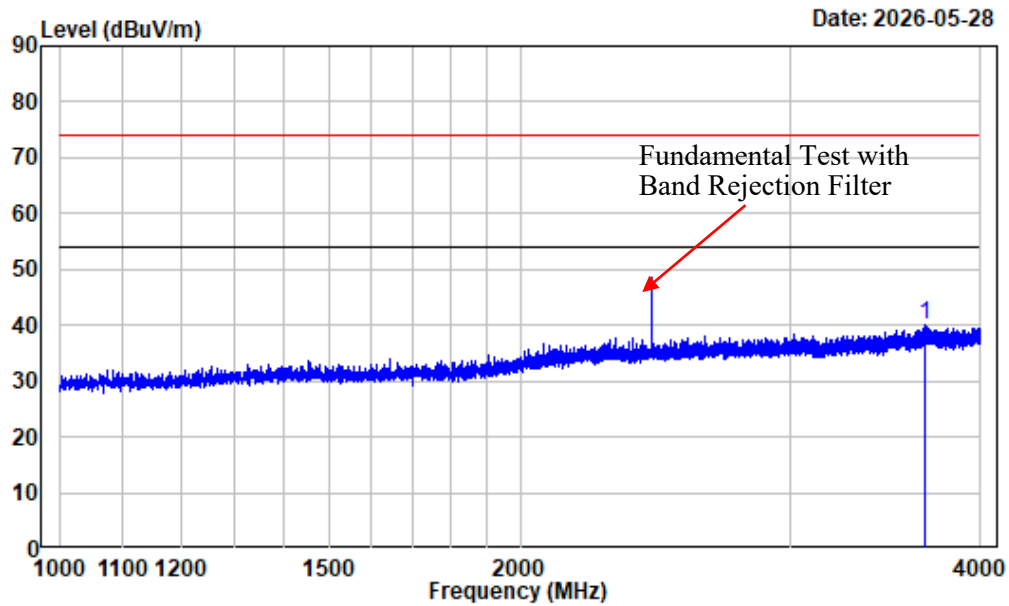

Condition : Vertical
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_n20_2437

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3682.375	-8.63	48.65	40.02	74.00	-33.98	Peak


4-18GHz_Horizontal_Peak 11n20

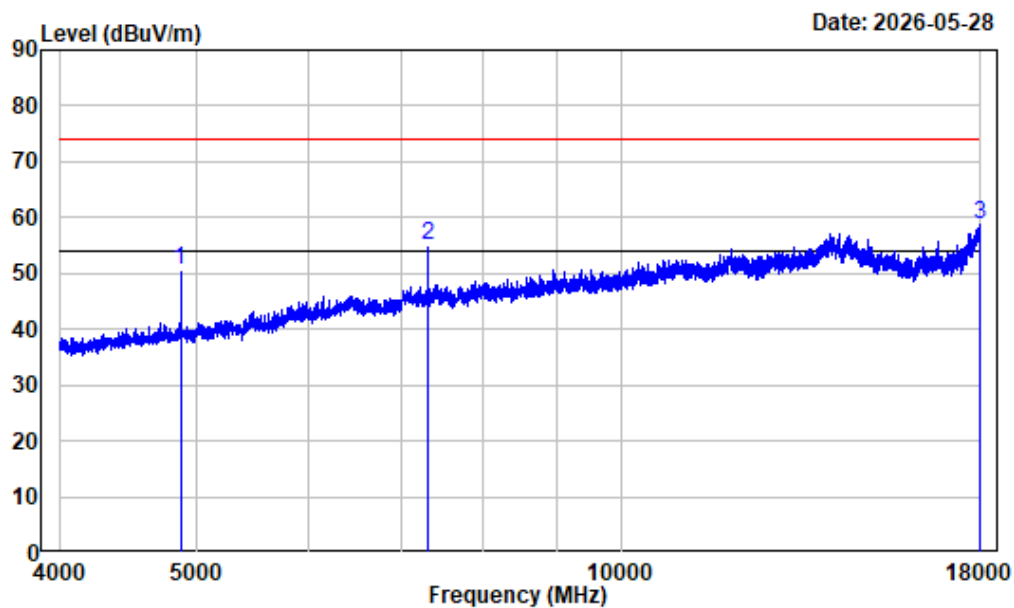

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.68	58.28	50.60	74.00	-23.40	Peak
2	7311.000	-2.28	57.47	55.19	74.00	-18.81	Peak
3	17970.250	9.42	49.19	58.61	74.00	-15.39	Peak


4-18GHz_Horizontal_Average11n20

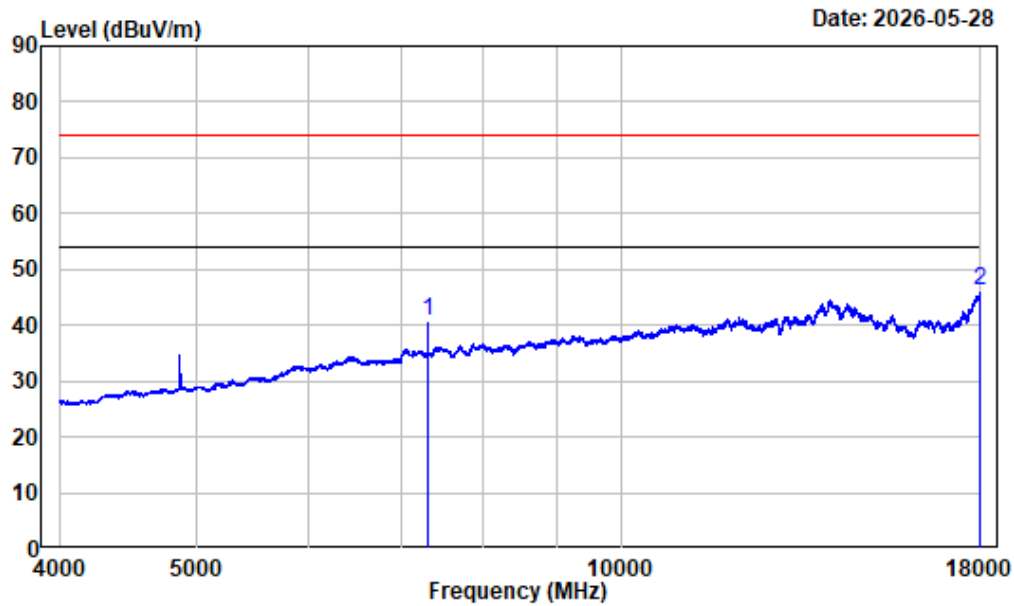

Condition : Horizontal
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : 2.4GWiFi_n20_2437

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7311.000	-2.28	42.91	40.63	54.00	-13.37	Average
2 17996.500	9.55	36.78	46.33	54.00	-7.67	Average


4-18GHz_Vertical_Peak 11n20

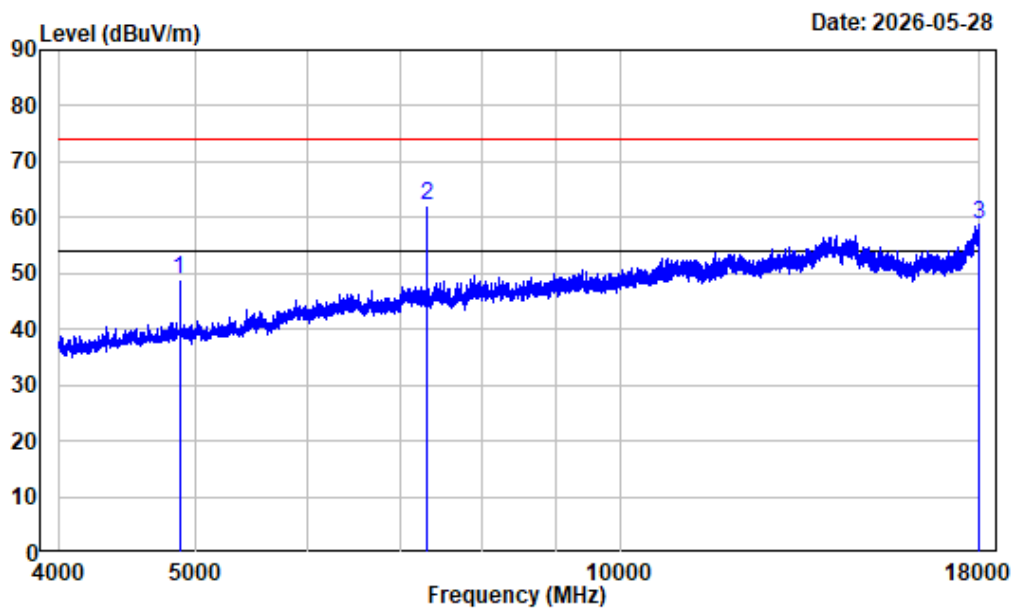

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2437

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1	4874.000	-7.68	56.57	48.89	74.00 -25.11 Peak
2	7311.000	-2.28	64.46	62.18	74.00 -11.82 Peak
3	17996.890	9.56	49.13	58.69	74.00 -15.31 Peak


4-18GHz_Vertical_Average 11n20

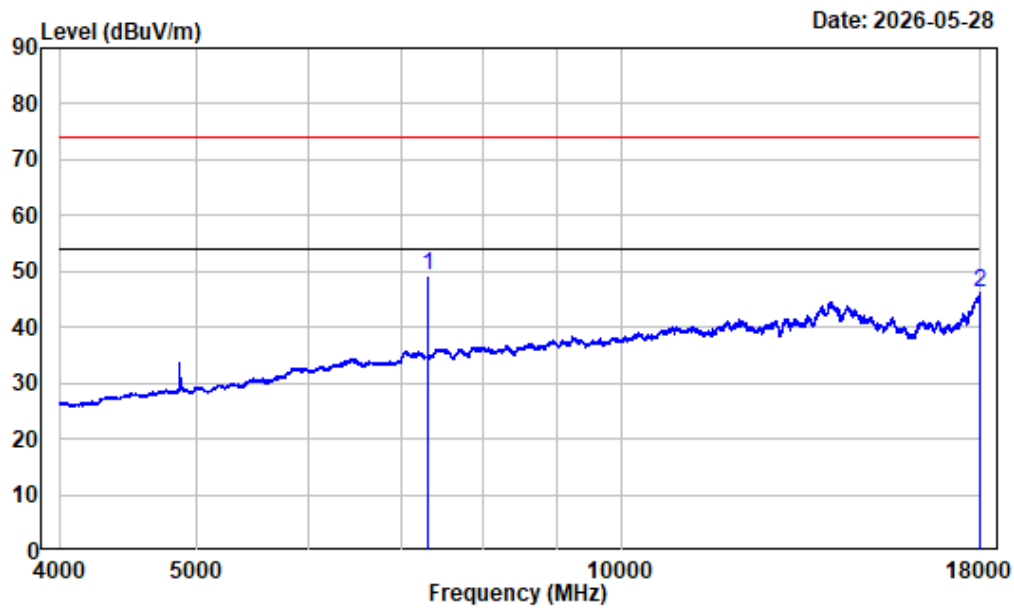

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n20_2437

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7311.000	-2.28	51.48	49.20	54.00	-4.80	Average
2 17996.500	9.55	36.80	46.35	54.00	-7.65	Average


1-4GHz_Horizontal11n40

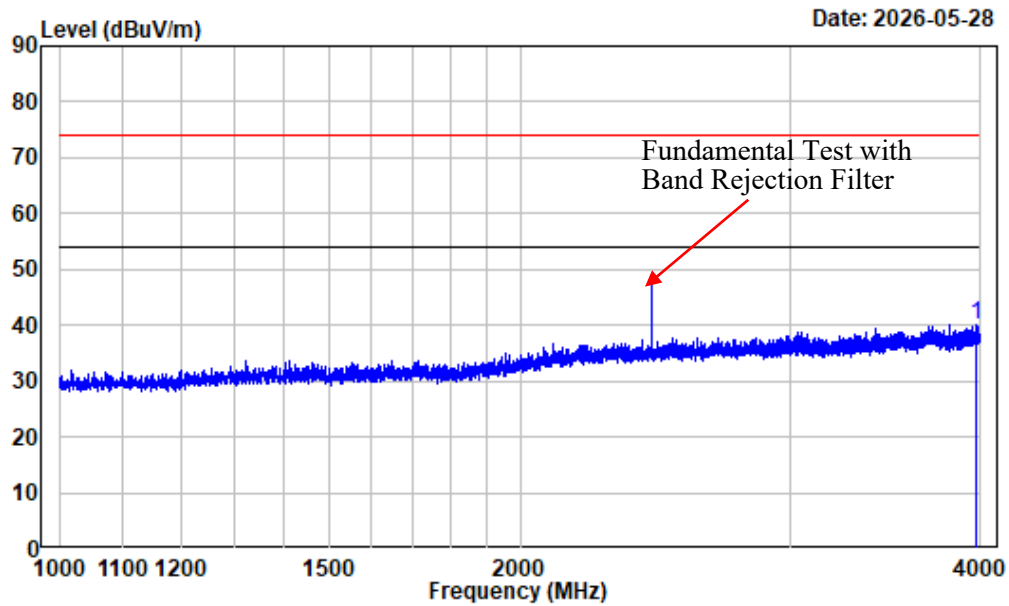

Condition : Horizontal
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_n40_2437

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3974.125	-8.27	48.26	39.99	74.00	-34.01 Peak


1-4GHz_Vertical11n40

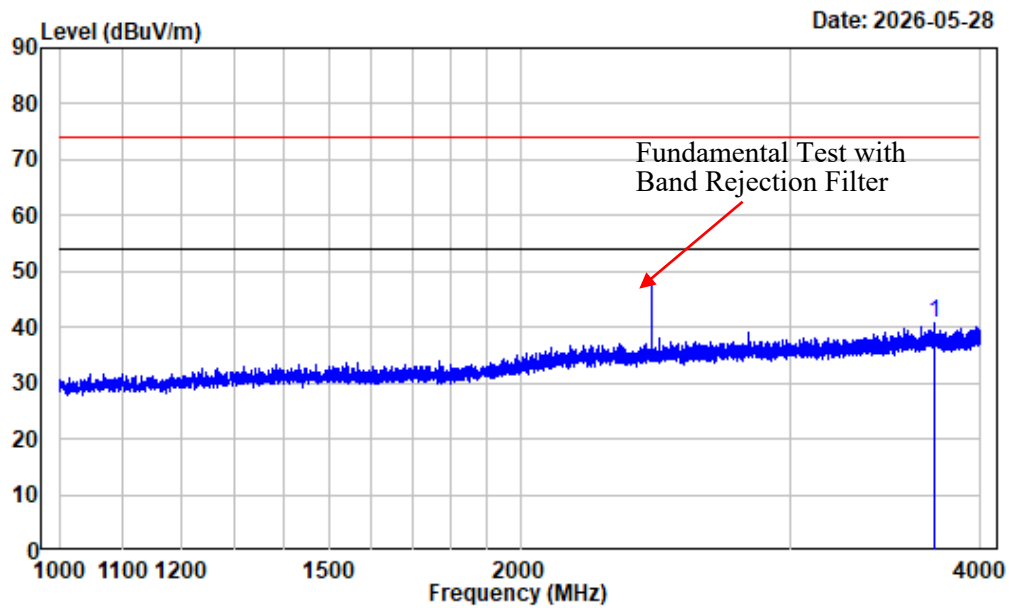

Condition : Vertical
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_n40_2437

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3731.500	-8.65	49.44	40.79	74.00	-33.21 Peak


4-18GHz_Horizontal_Peak 11n40

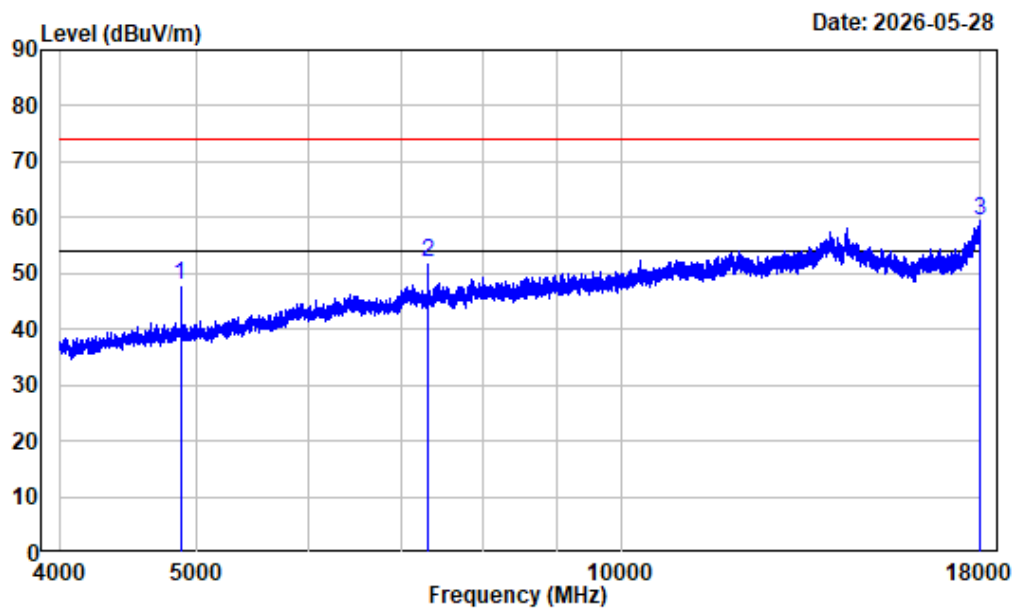

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.68	55.41	47.73	74.00	-26.27	Peak
2	7311.000	-2.28	54.20	51.92	74.00	-22.08	Peak
3	17998.570	9.56	49.92	59.48	74.00	-14.52	Peak


4-18GHz_Horizontal_Average11n40

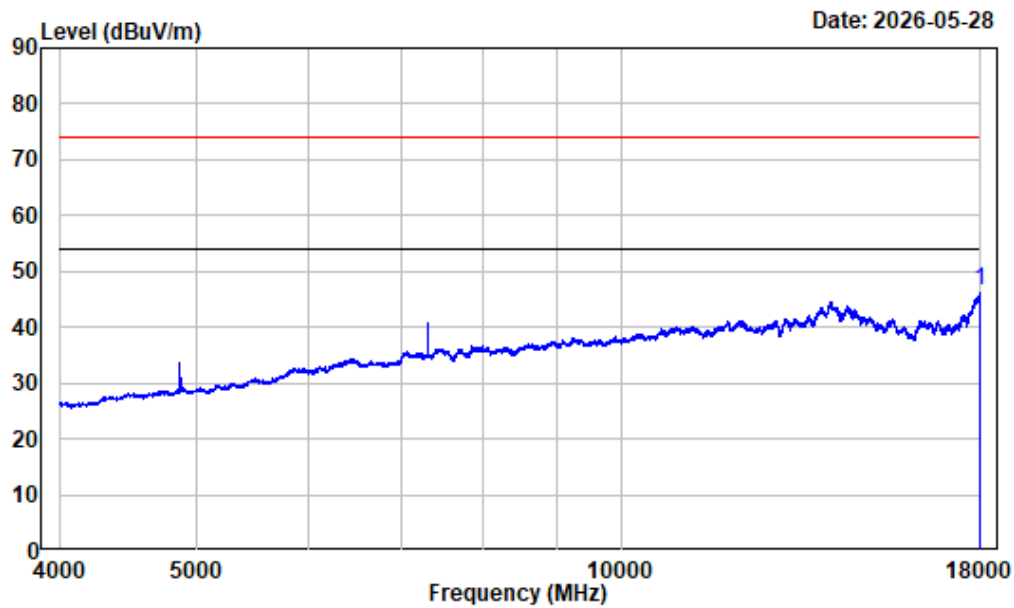

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2437

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.650	9.56	36.80	46.36	54.00	-7.64	Average


4-18GHz_Vertical_Peak 11n40

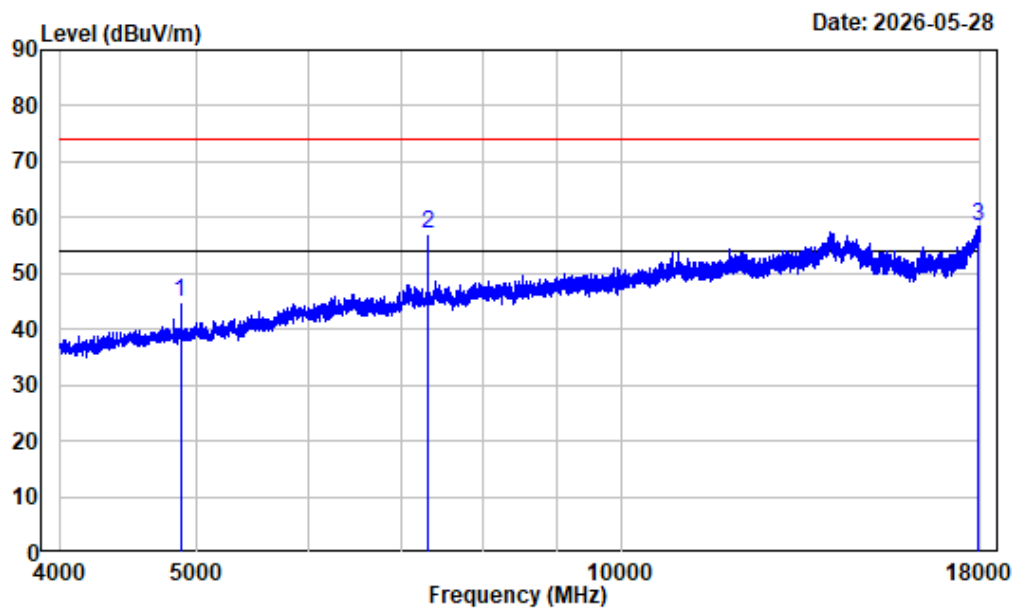

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2437

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1	4874.000	-7.68	52.66	44.98	74.00 -29.02 Peak
2	7311.000	-2.28	59.42	57.14	74.00 -16.86 Peak
3	17905.500	9.12	49.19	58.31	74.00 -15.69 Peak


4-18GHz_Vertical_Average 11n40

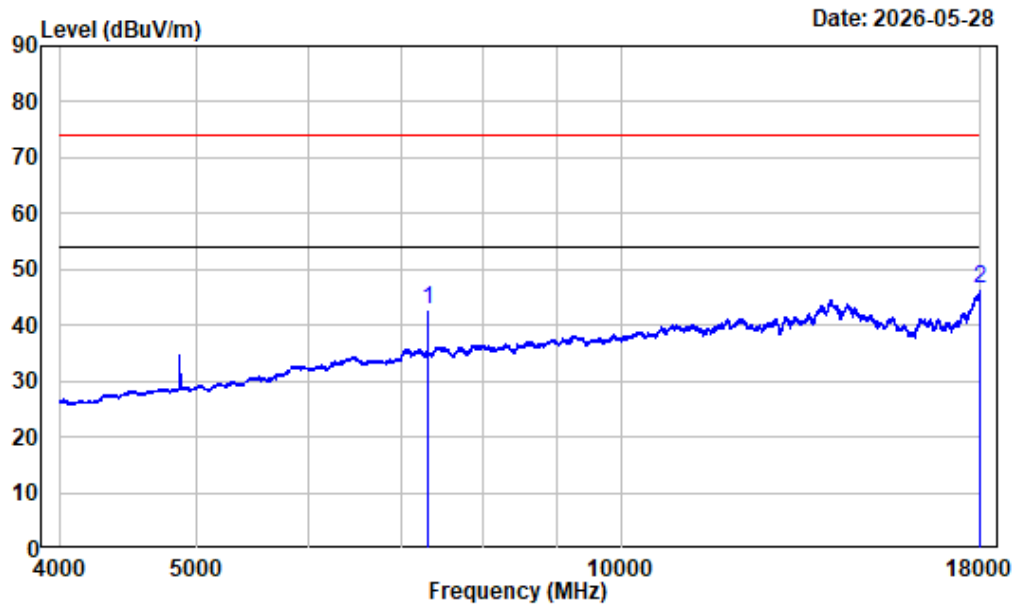

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2437

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7311.000	-2.28	44.96	42.68	54.00	-11.32	Average
2 17996.800	9.56	36.80	46.36	54.00	-7.64	Average


1-4GHz_Horizontal11ax20

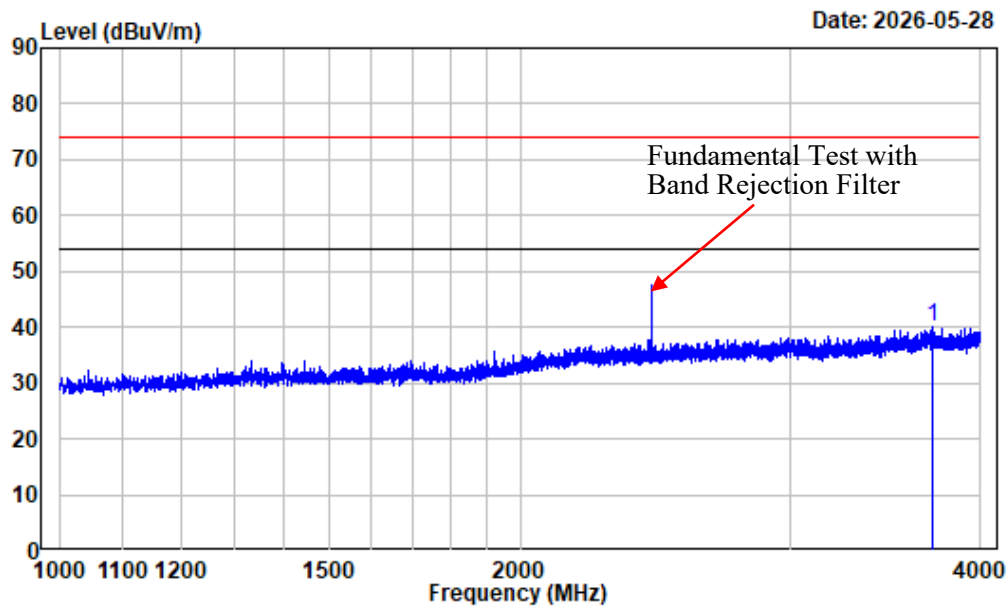

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3722.125	-8.61	48.63	40.02	74.00	-33.98	Peak


1-4GHz_Vertical11ax20

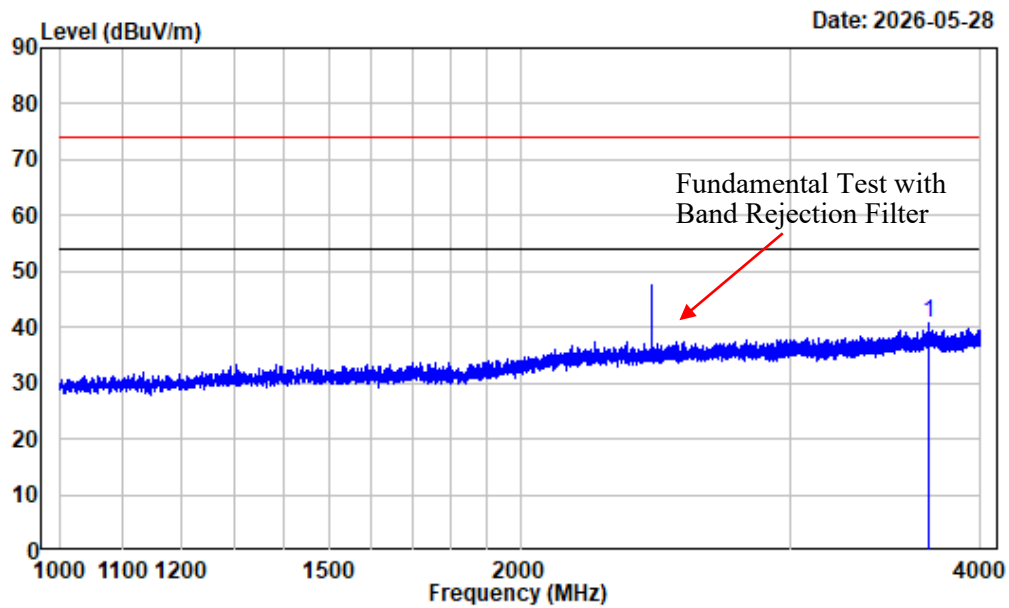

Condition : Vertical
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_ax20_2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3703.750	-8.52	49.31	40.79	74.00	-33.21	Peak


4-18GHz_Horizontal_Peak 11ax20

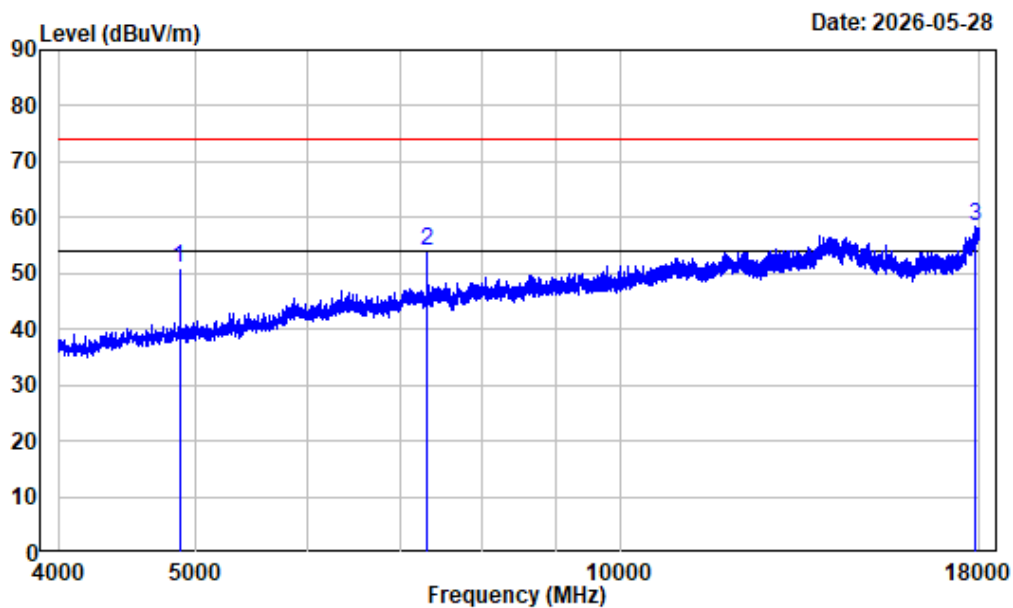

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2437

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4874.000	-7.68	58.67	50.99	74.00	-23.01	Peak
2 7311.000	-2.28	56.40	54.12	74.00	-19.88	Peak
3 17884.500	8.80	49.72	58.52	74.00	-15.48	Peak


4-18GHz_Horizontal_Average11ax20

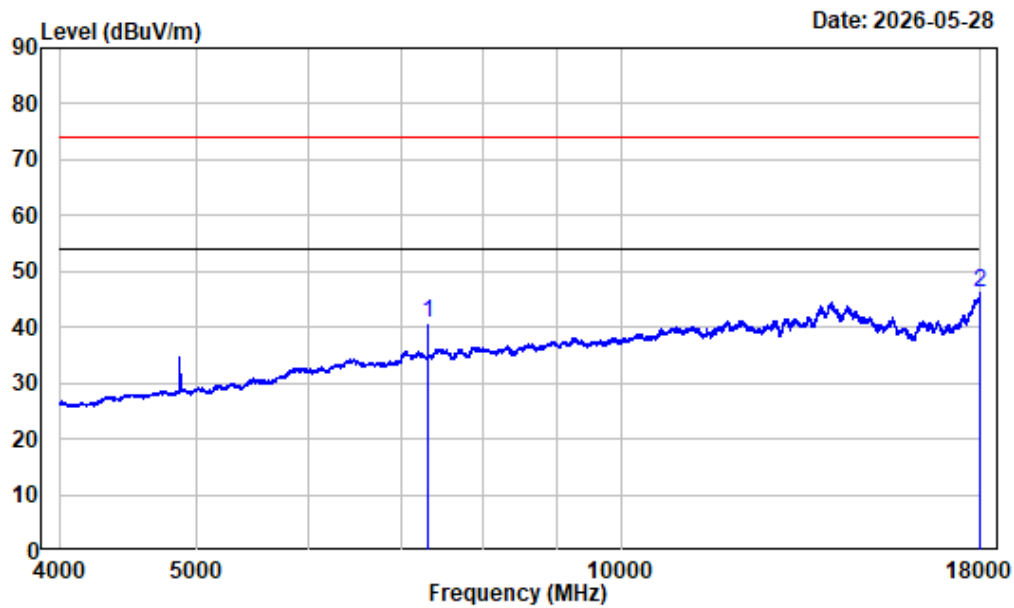

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax20_2437

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7311.000	-2.28	43.01	40.73	54.00	-13.27	Average
2 17993.500	9.53	36.59	46.12	54.00	-7.88	Average


4-18GHz_Veritical_Peak 11ax20

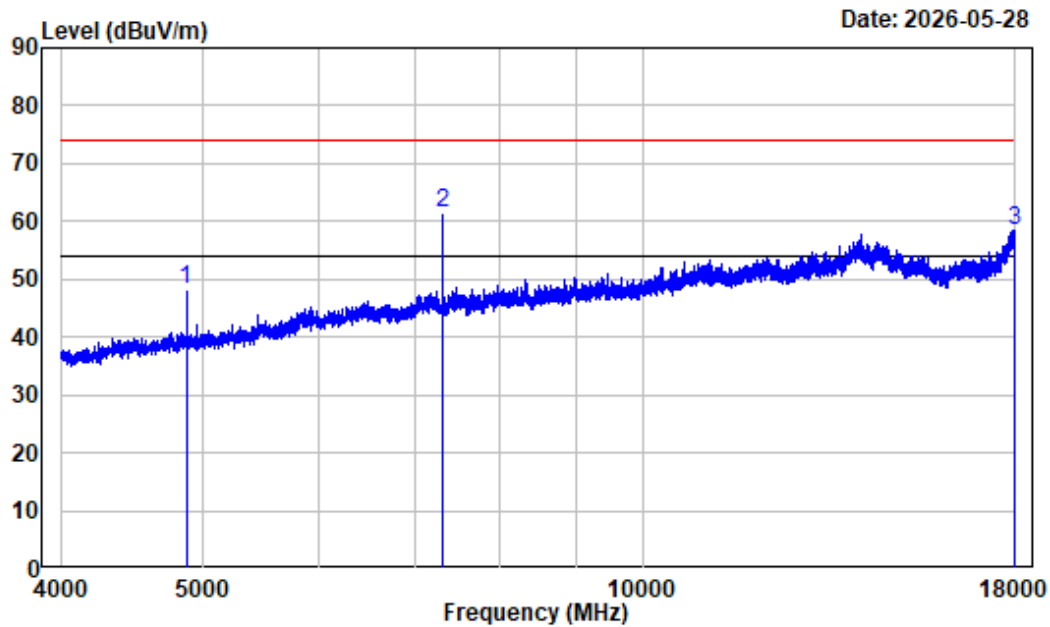

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2437

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4874.000	-7.68	55.79	48.11	74.00	-25.89	Peak
2	7311.000	-2.28	63.68	61.40	74.00	-12.60	Peak
3	17991.250	9.52	48.98	58.50	74.00	-15.50	Peak


4-18GHz_Vertical_Average 11ax20

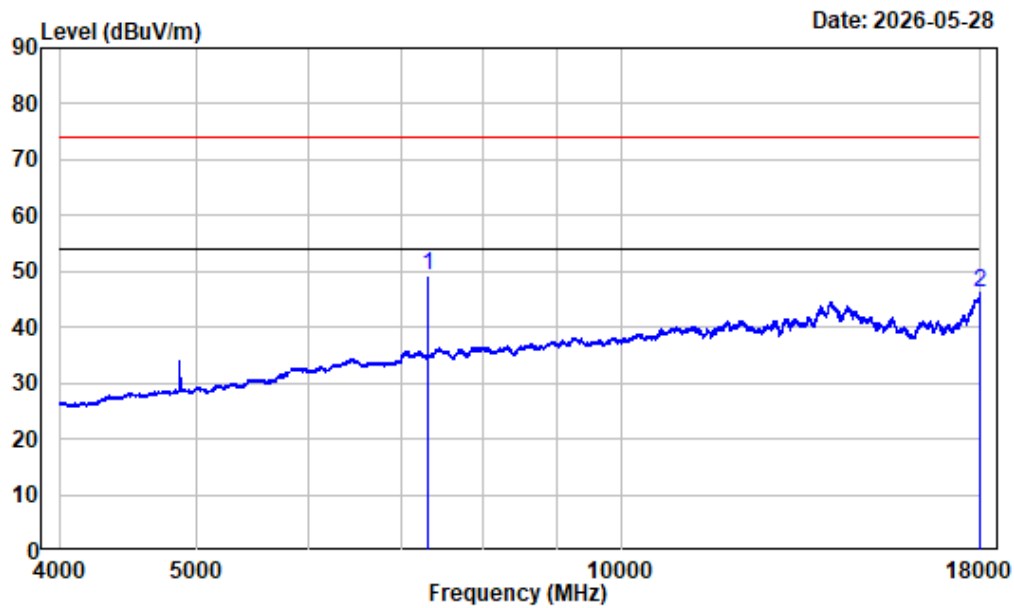

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax20_2437

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 7311.000	-2.28	51.55	49.27	54.00	-4.73	Average
2 17993.000	9.53	36.61	46.14	54.00	-7.86	Average


1-4GHz_Horizontal11ax40

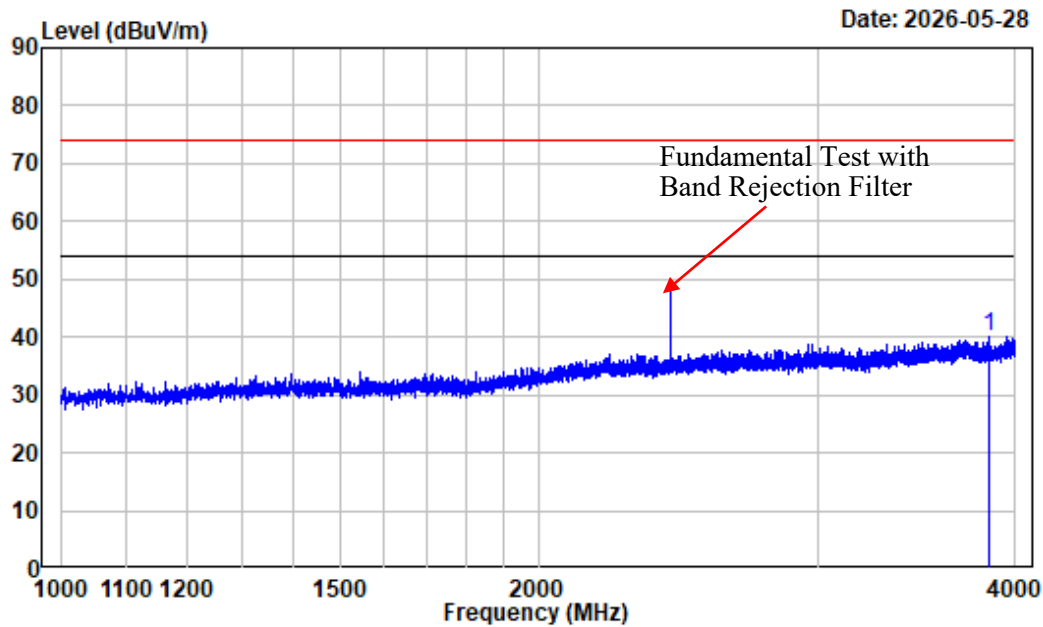

Condition : Horizontal
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_ax40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3846.625	-8.95	49.03	40.08	74.00	-33.92	Peak


1-4GHz_Vertical11ax40

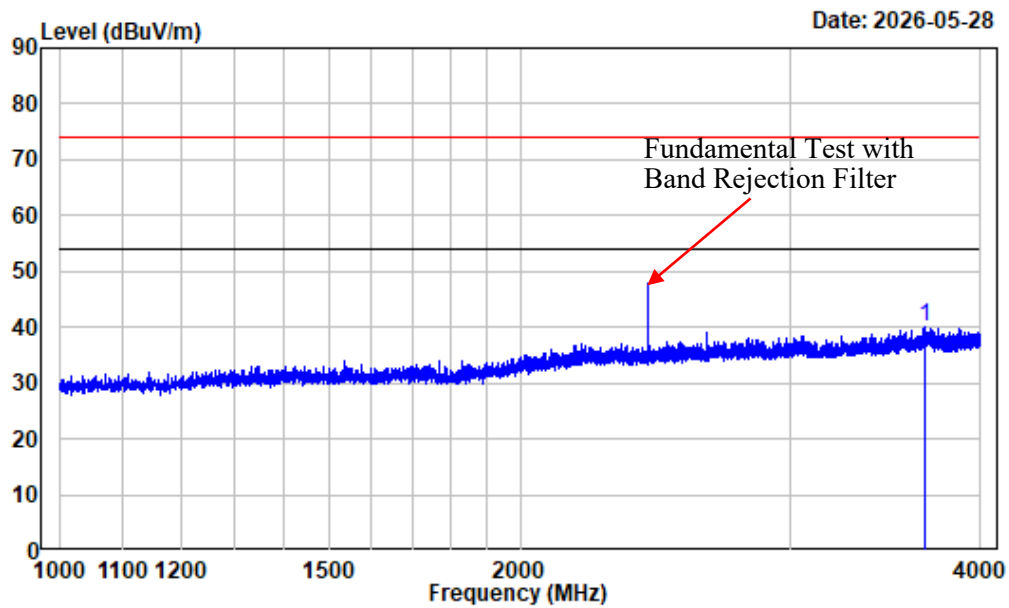

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3682.750	-8.62	48.56	39.94	74.00	-34.06 Peak


4-18GHz_Horizontal_Peak 11ax40

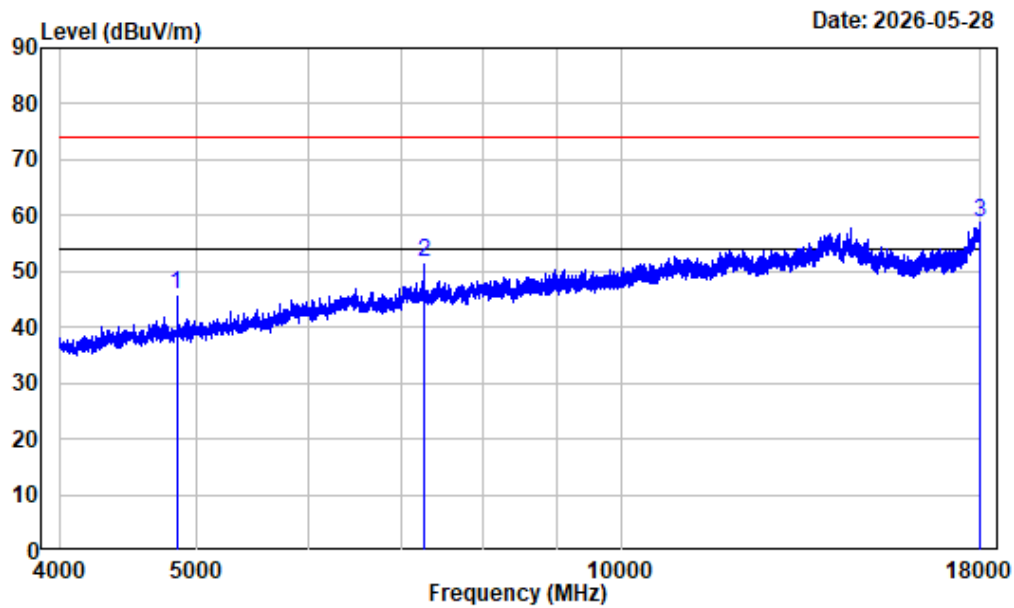

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 4844.000	-7.78	53.77	45.99	74.00	-28.01 Peak
2 7266.000	-2.40	54.08	51.68	74.00	-22.32 Peak
3 17987.750	9.50	49.37	58.87	74.00	-15.13 Peak


4-18GHz_Horizontal_Average11ax40

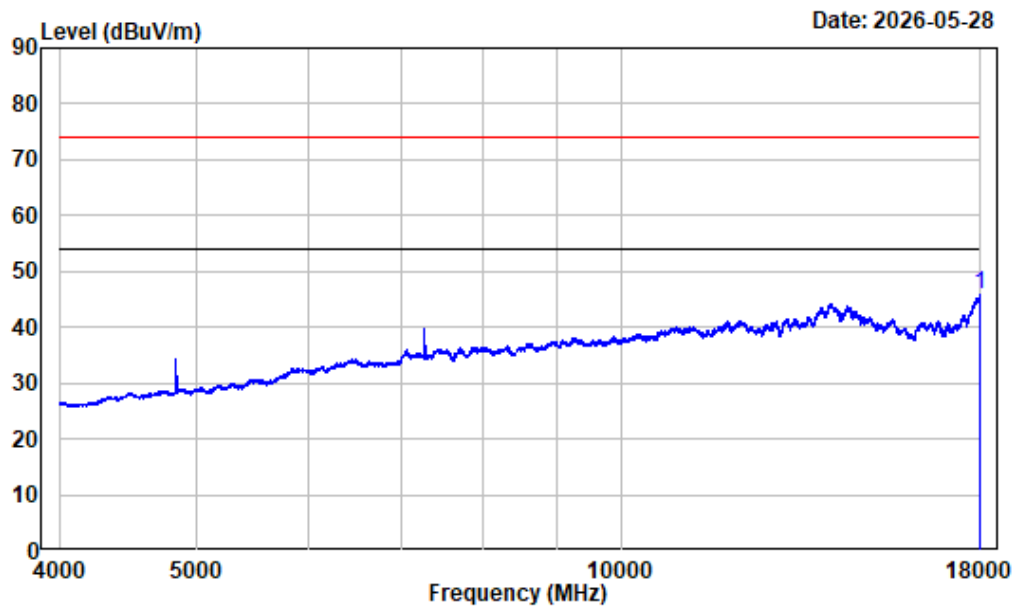

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17996.500	9.56	36.22	45.78	54.00	-8.22	Average


4-18GHz_Vertical_Peak 11ax40

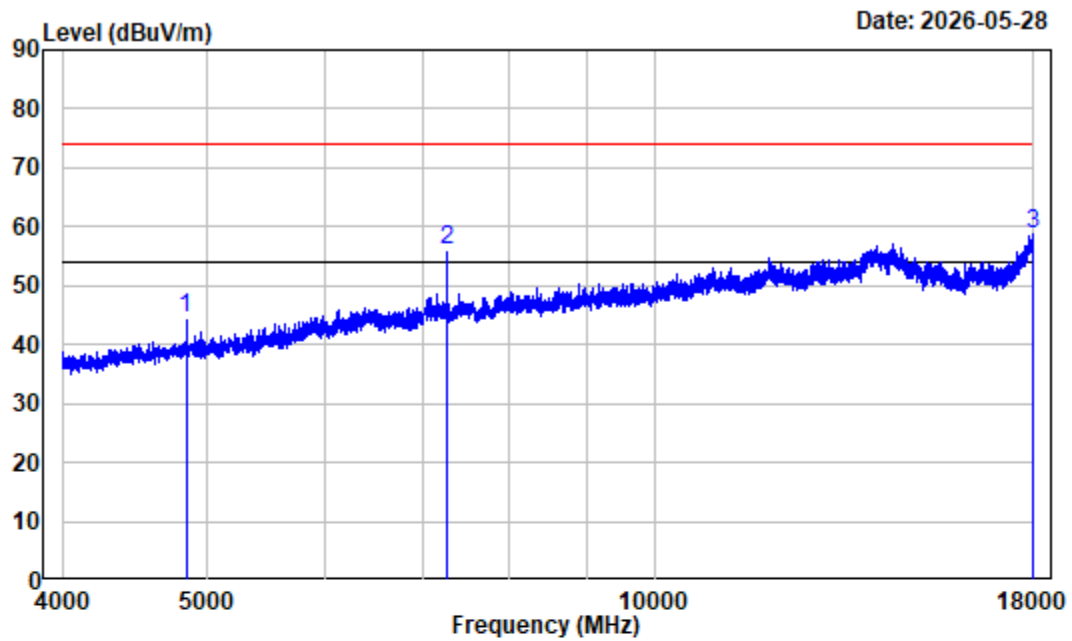

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4844.000	-7.78	52.21	44.43	74.00	-29.57	Peak
2	7266.000	-2.40	58.60	56.20	74.00	-17.80	Peak
3	17972.000	9.43	49.17	58.60	74.00	-15.40	Peak

4-18GHz_Vertical_Average 11ax40

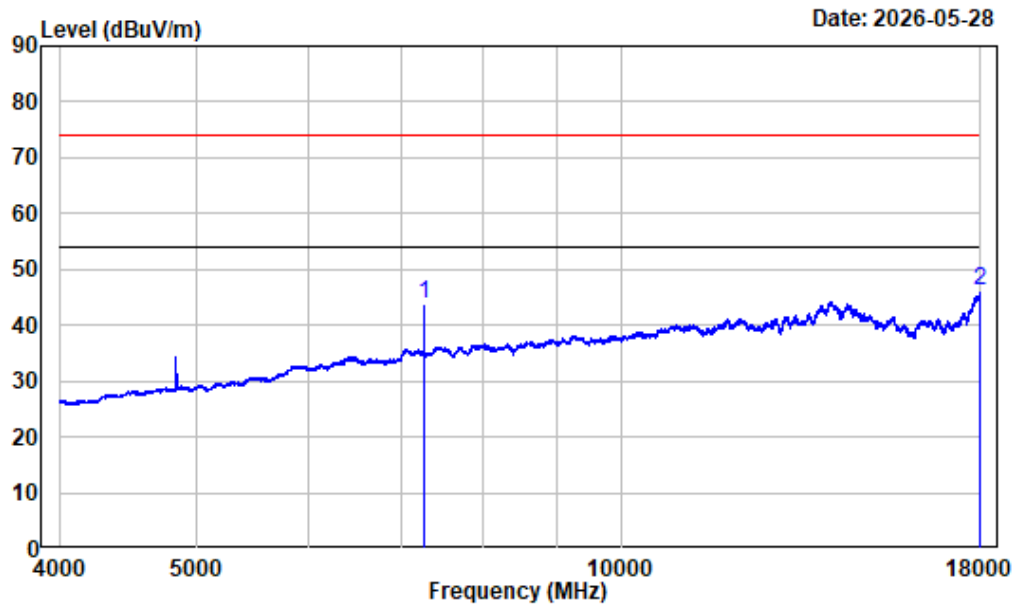


Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7266.000	-2.40	46.15	43.75	54.00	-10.25	Average
2	17994.500	9.56	36.46	46.02	54.00	-7.98	Average

18-25GHz (Only Listed with the worst case test plot)


18-25GHz_Horizontal_Peak_11b

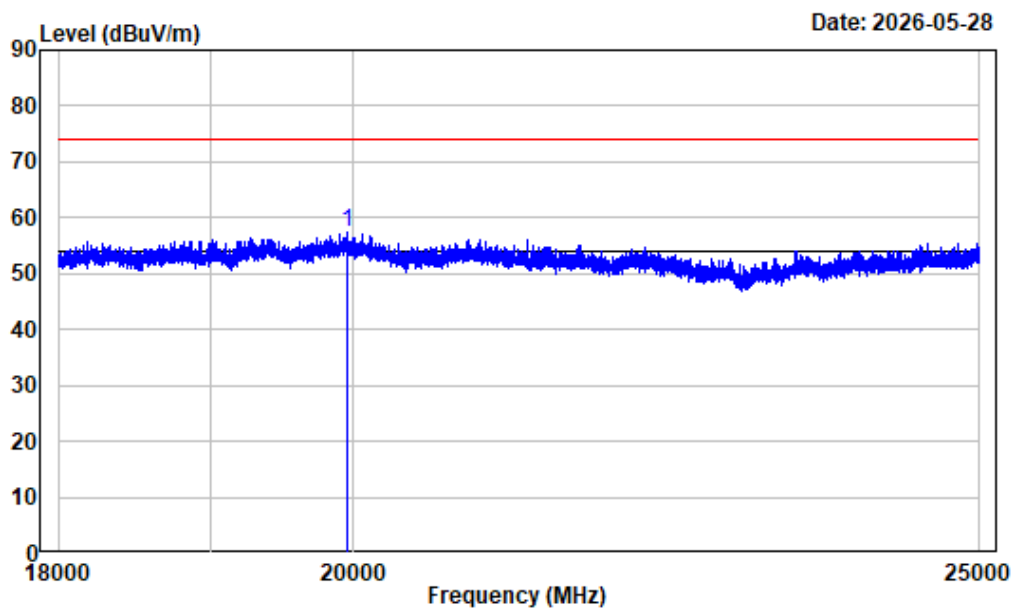

Condition : Horizontal
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_b_2412

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19947.750	17.82	39.62	57.44	74.00	-16.56	Peak


18-25GHz_Horizontal_Average_11b

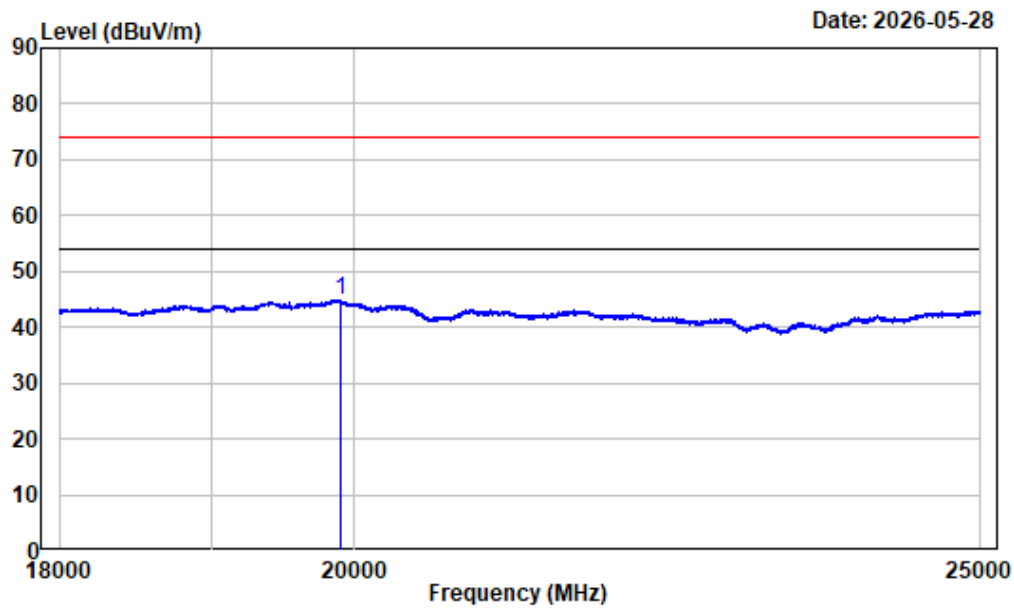

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 19902.250	17.79	27.15	44.94	54.00	-9.06 Average


18-25GHz_Vertical_Peak_11b

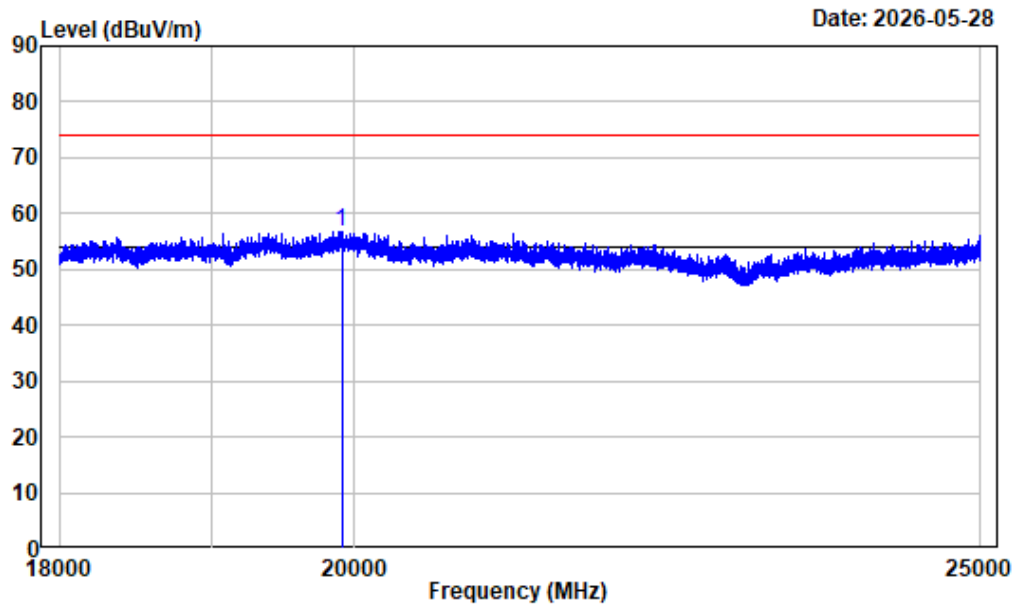

Condition : Vertical
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4GWiFi_b_2412

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19906.630	17.80	39.05	56.85	74.00	-17.15	Peak

18-25GHz_Vertical_Average_11b

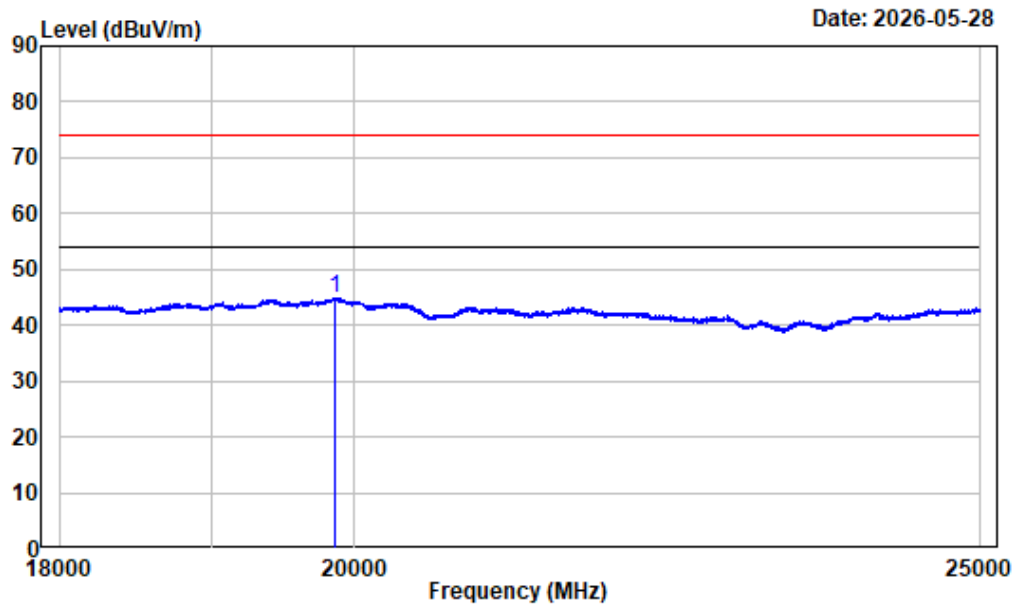


Condition : Vertical
 Project No. : 2601S21212E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
 Note : 2.4GWiFi_b_2412

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19860.250	17.77	27.09	44.86	54.00	-9.14 Average

Band Edge


Left Band edge_Horizontal_11b

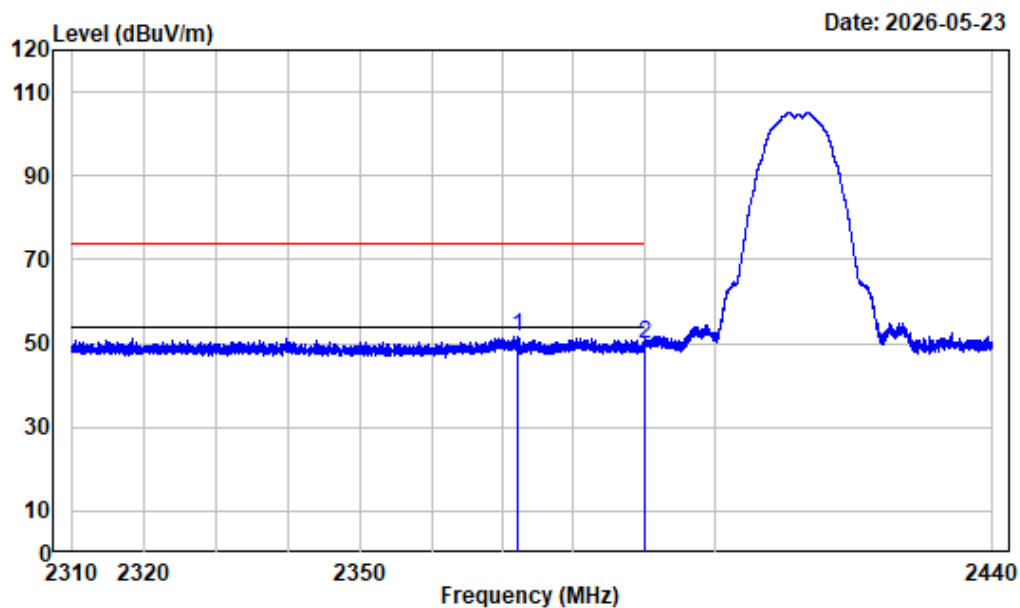

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2372.221	-10.92	62.61	51.69	74.00	-22.31 Peak
2	2390.000	-10.97	60.64	49.67	74.00	-24.33 Peak


Left Band edge_Vertical_11b

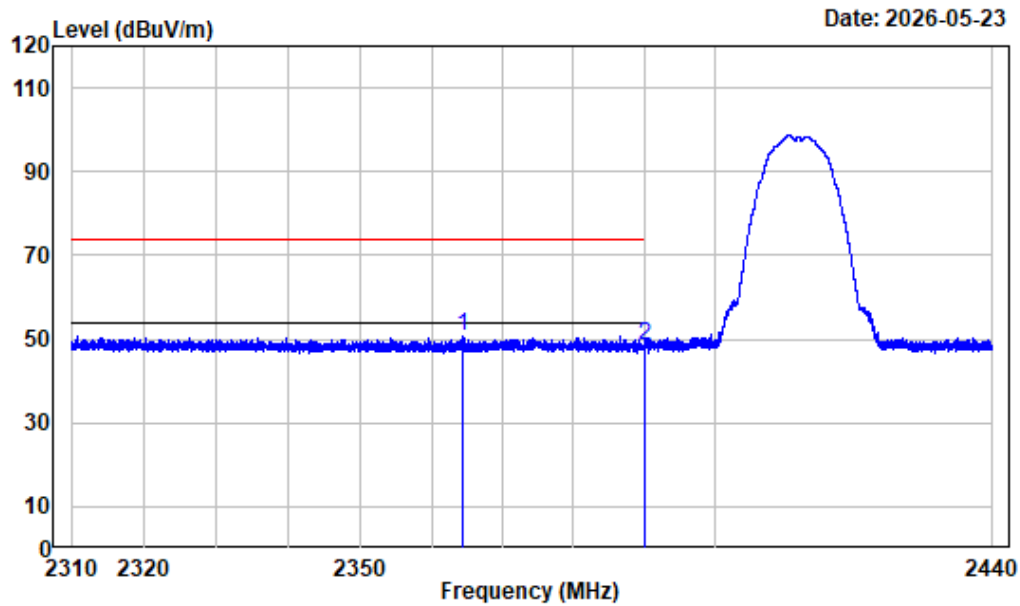

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2412

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2364.324	-10.91	61.83	50.92	74.00	-23.08 Peak
2	2390.000	-10.97	59.27	48.30	74.00	-25.70 Peak


Right Band edge_Horizontal_11b

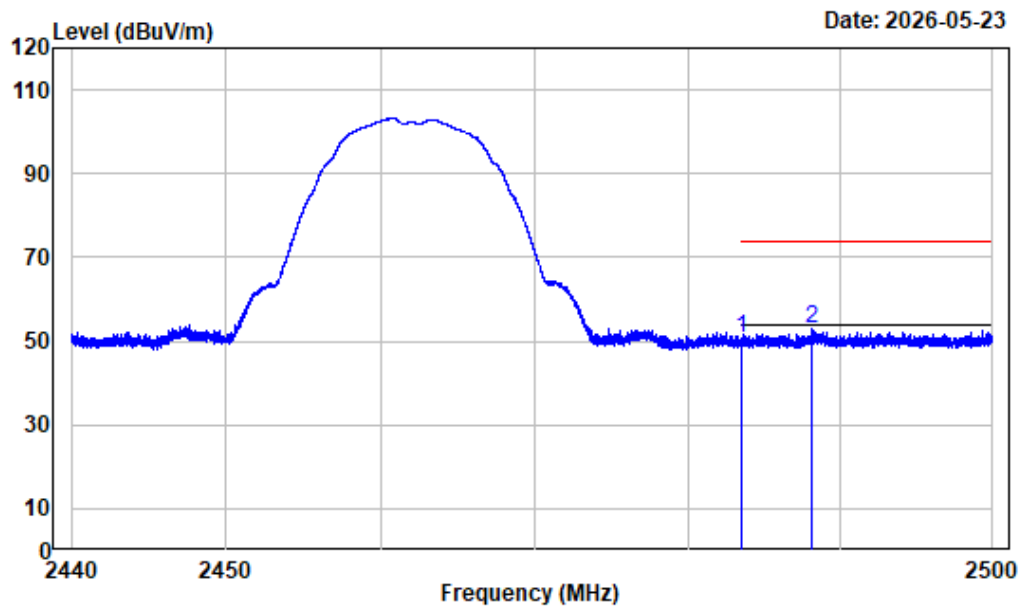

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	61.58	50.65	74.00	-23.35	Peak
2	2488.120	-10.93	63.79	52.86	74.00	-21.14	Peak


Right Band edge_Vertical_11b

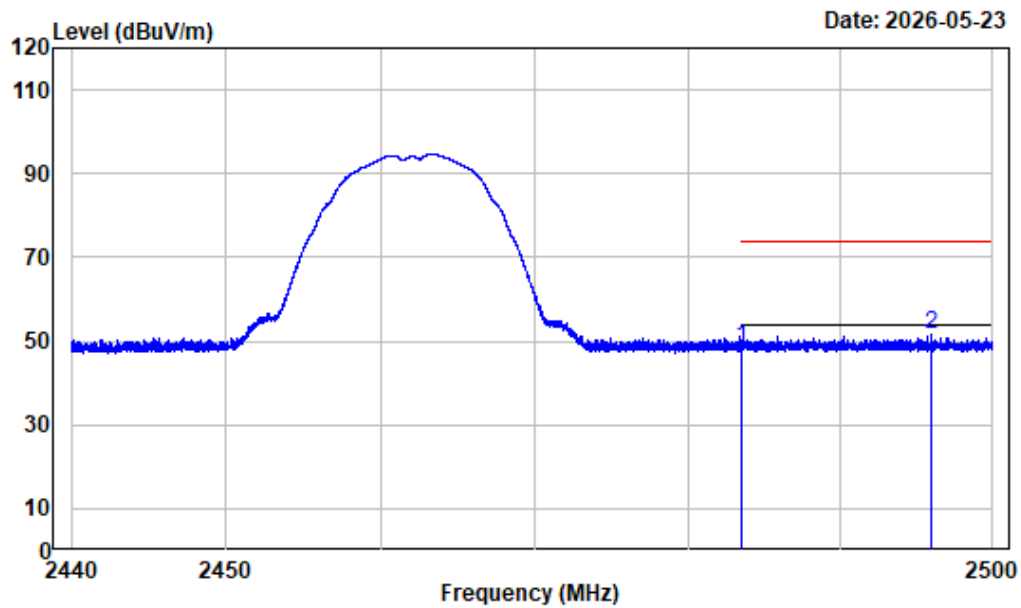

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_b_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	59.21	48.28	74.00	-25.72	Peak
2	2495.913	-10.94	62.55	51.61	74.00	-22.39	Peak


Left Band edge_Horizontal_Peak_11g

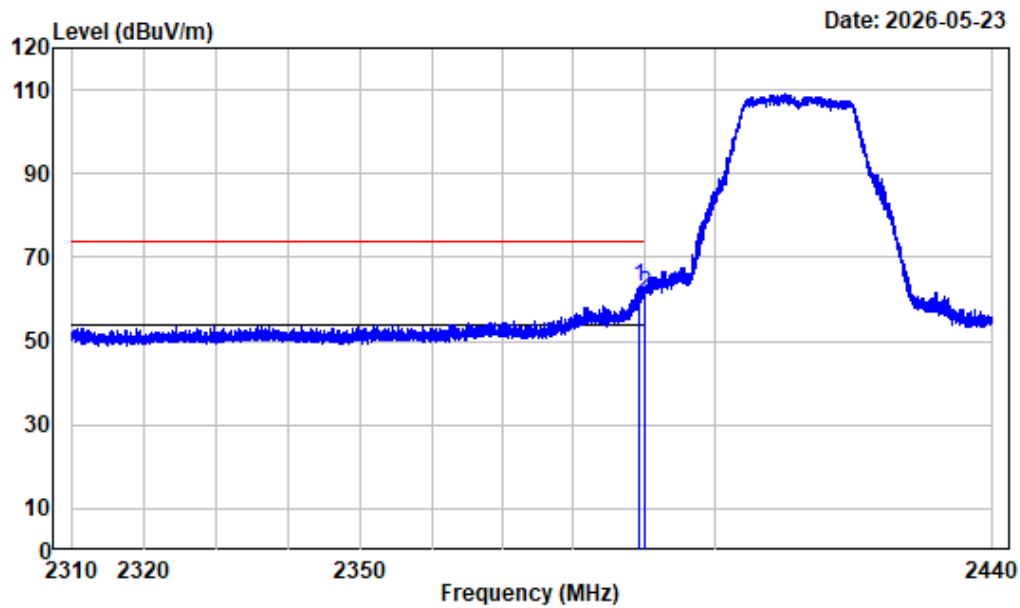

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.381	-10.96	73.84	62.88	74.00	-11.12	Peak
2	2390.000	-10.97	72.02	61.05	74.00	-12.95	Peak


Left Band edge_Horizontal_Average_11g

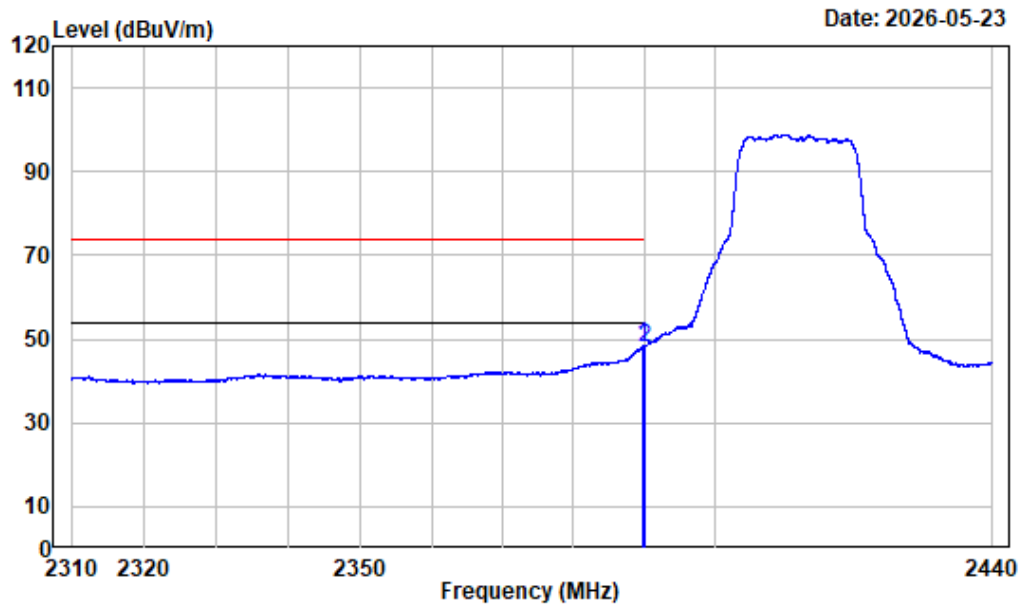

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:500Hz Detector:Peak
Note : 2.4GWiFi_g_2412

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.950	-10.97	59.20	48.23	54.00	-5.77	Average
2	2390.000	-10.97	59.16	48.19	54.00	-5.81	Average


Left Band edge_Vertical_Peak_11g

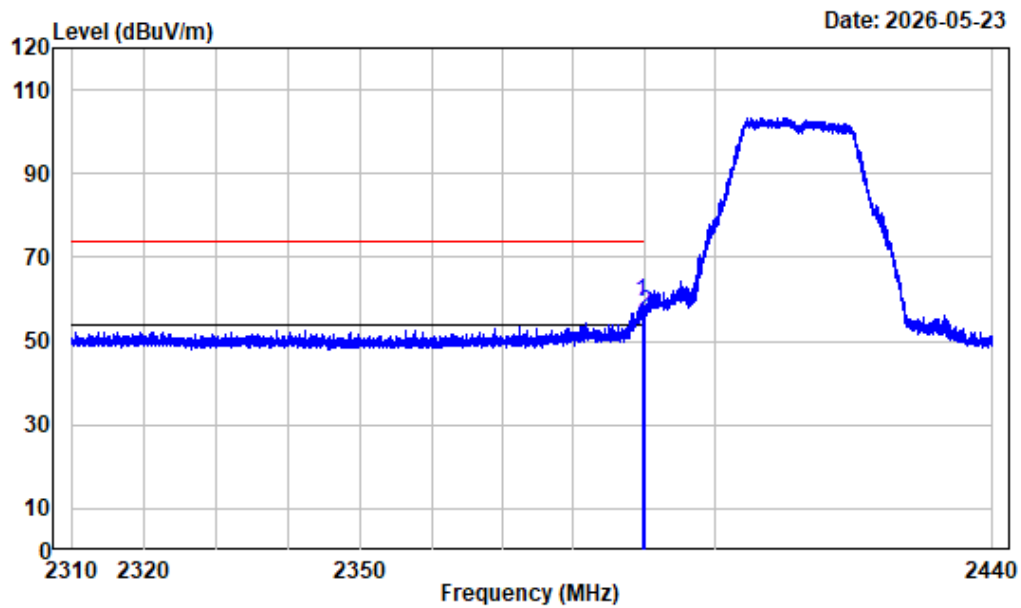

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.690	-10.96	70.26	59.30	74.00	-14.70	Peak
2	2390.000	-10.97	67.69	56.72	74.00	-17.28	Peak


Left Band edge_Vertical_Average_11g

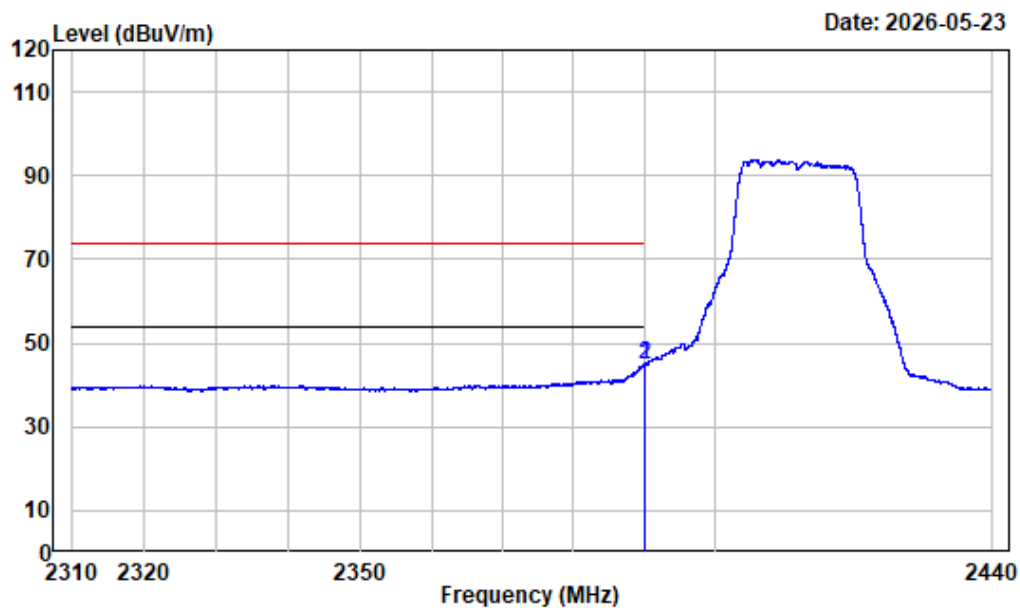

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:500Hz Detector:Peak
Note : 2.4GWiFi_g_2412

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.982	-10.97	55.86	44.89	54.00	-9.11 Average
2	2390.000	-10.97	55.85	44.88	54.00	-9.12 Average


Right Band edge_Horizontal_Peak_11g

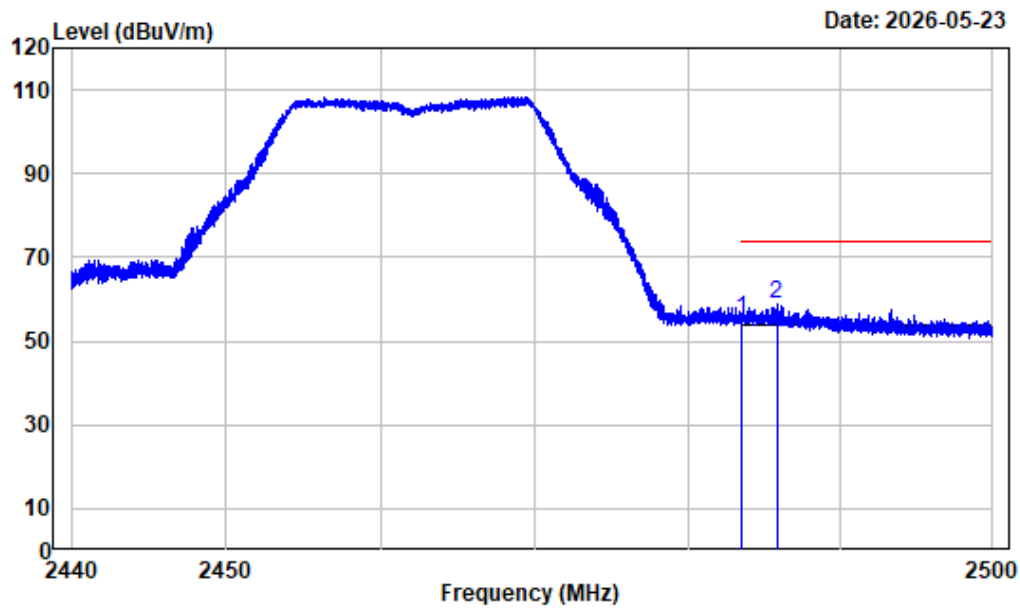

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	66.17	55.24	74.00	-18.76	Peak
2	2485.810	-10.93	69.77	58.84	74.00	-15.16	Peak


Right Band edge_Horizontal_Average_11g

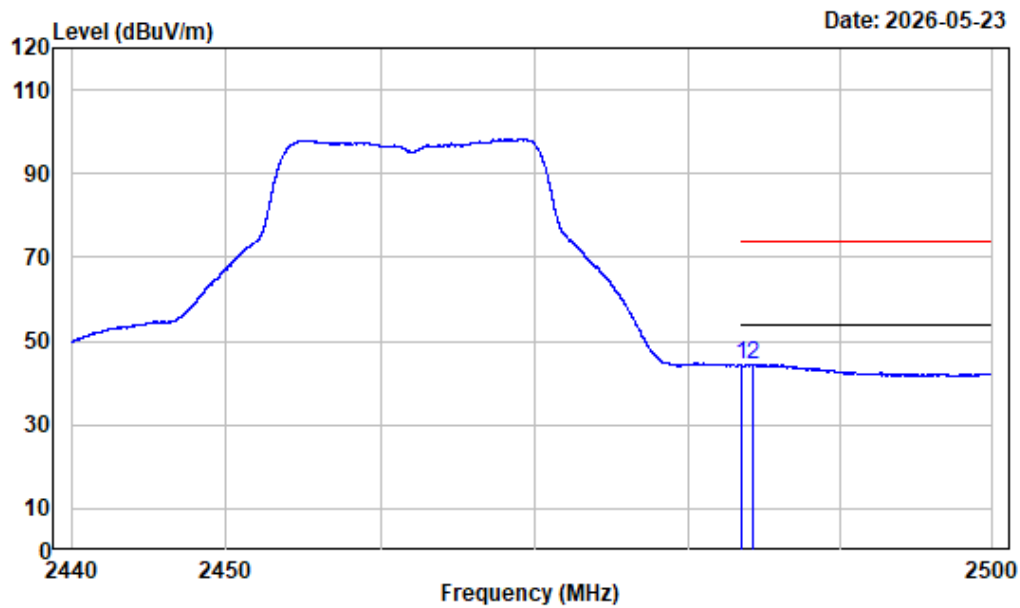

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:500Hz Detector:Peak
Note : 2.4GWiFi_g_2462

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	55.10	44.17	54.00	-9.83 Average
2	2484.242	-10.93	55.40	44.47	54.00	-9.53 Average


Right Band edge_Vertical_Peak_11g

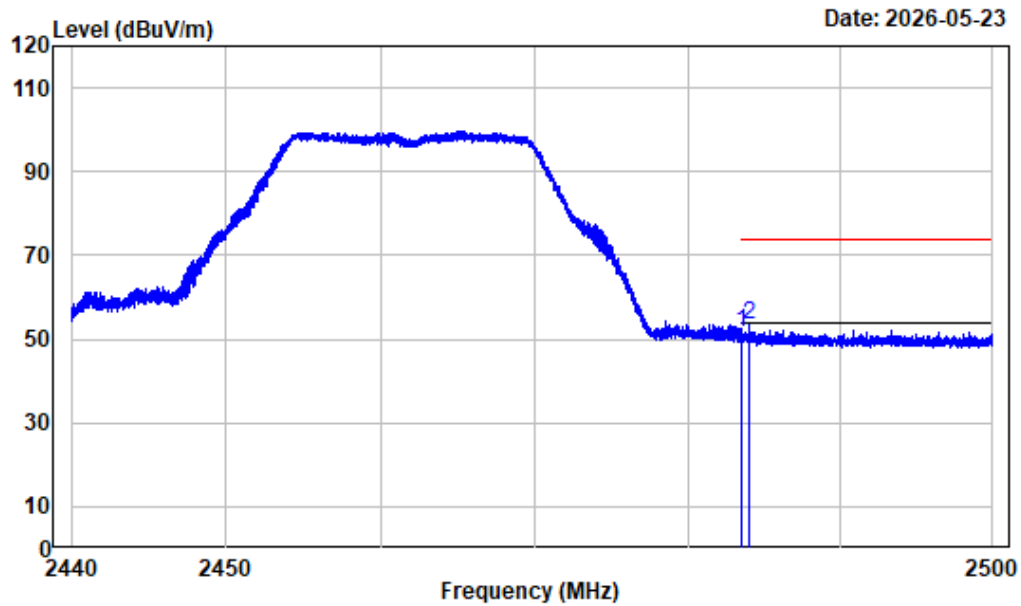

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_g_2462

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	62.66	51.73	74.00	-22.27	Peak
2 2484.040	-10.93	64.44	53.51	74.00	-20.49	Peak


Left Band edge_Horizontal_Peak_11n20

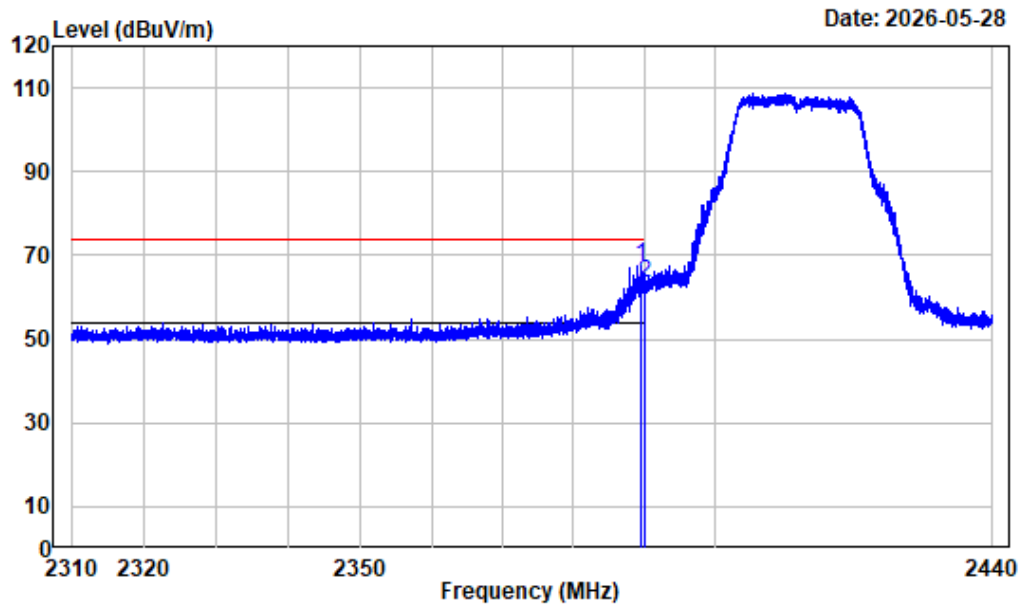

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.462	-10.96	78.62	67.66	74.00	-6.34	Peak
2	2390.000	-10.97	74.21	63.24	74.00	-10.76	Peak


Left Band edge_Horizontal_Average_11n20

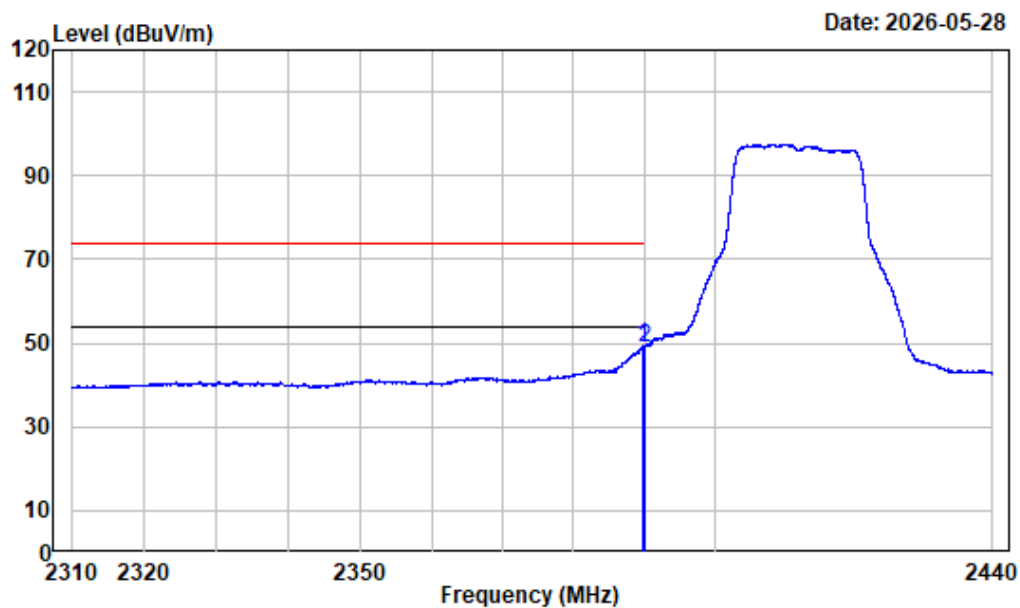

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:500Hz Detector:Peak
Note : 2.4GWiFi_n20_2412

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.934	-10.97	60.32	49.35	54.00	-4.65 Average
2	2390.000	-10.97	60.01	49.04	54.00	-4.96 Average


Left Band edge_Vertical_Peak_11n20

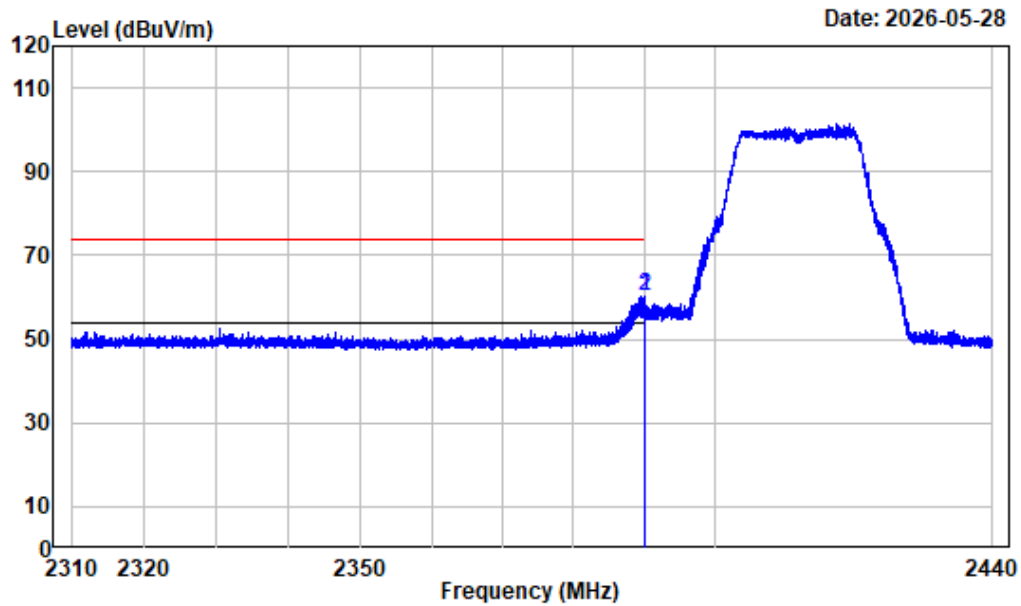

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.999	-10.97	71.03	60.06	74.00	-13.94	Peak
2	2390.000	-10.97	71.03	60.06	74.00	-13.94	Peak


Left Band edge_Vertical_Average_11n20

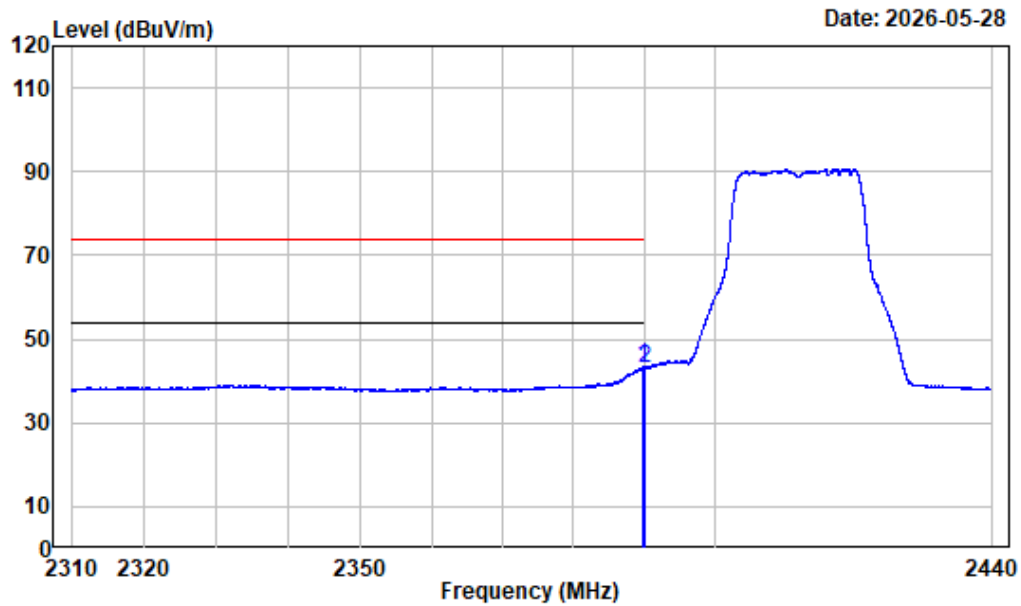

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:500Hz Detector:Peak
Note : 2.4GWiFi_n20_2412

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.901	-10.97	54.32	43.35	54.00	-10.65 Average
2	2390.000	-10.97	54.00	43.03	54.00	-10.97 Average


Right Band edge_Horizontal_Peak_11n20

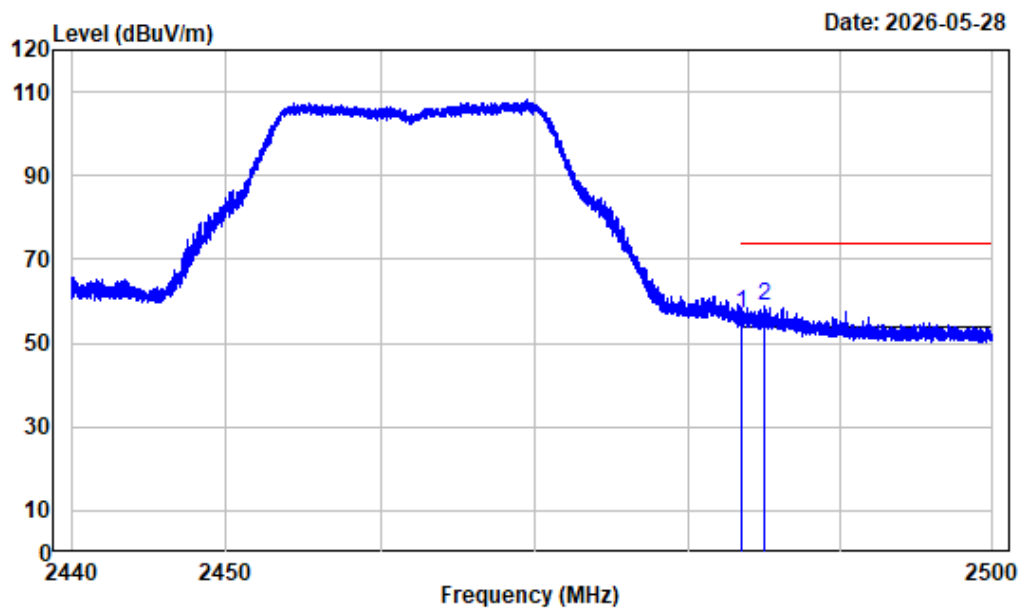

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2462

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	67.88	56.95	74.00	-17.05 Peak
2	2485.052	-10.93	69.78	58.85	74.00	-15.15 Peak


Right Band edge_Horizontal_Average_11n20

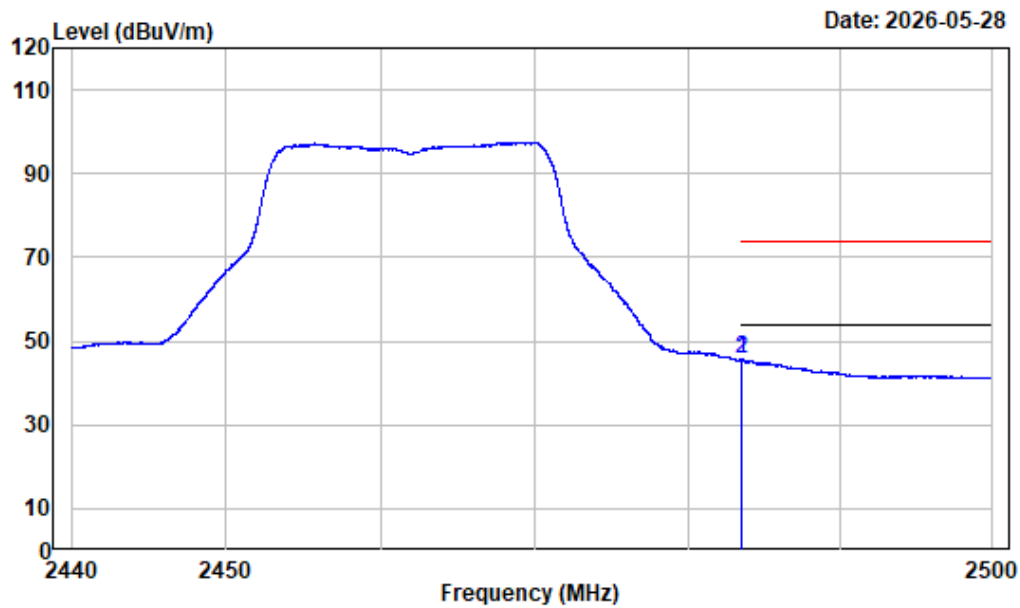

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:500Hz Detector:Peak
Note : 2.4GWiFi_n20_2462

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	56.53	45.60	54.00	-8.40 Average
2 2483.522	-10.93	56.61	45.68	54.00	-8.32 Average


Right Band edge_Vertical_Peak_11n20

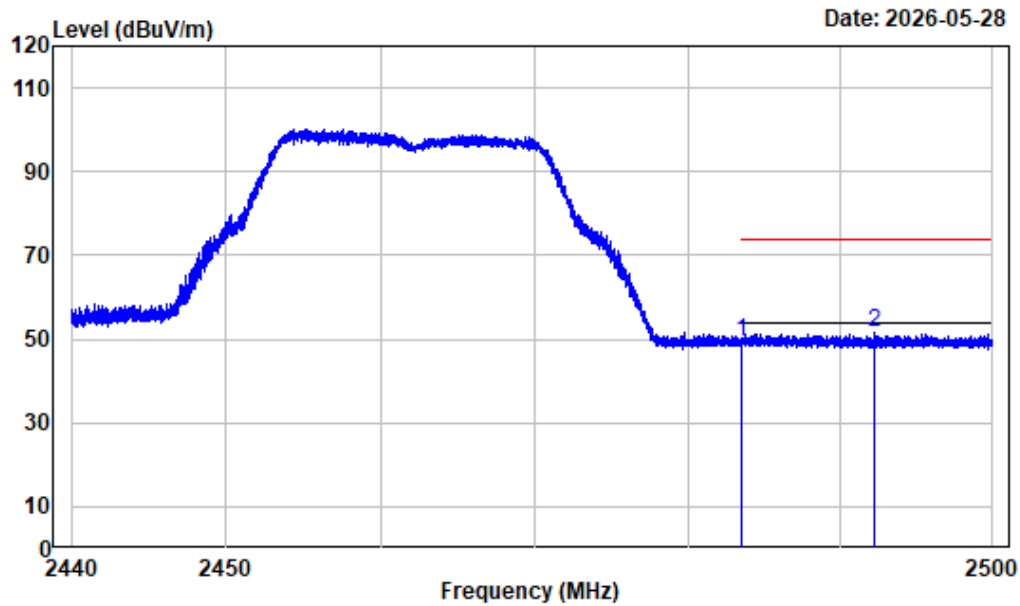

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n20_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	60.16	49.23	74.00	-24.77	Peak
2	2492.170	-10.93	62.67	51.74	74.00	-22.26	Peak


Left Band edge_Horizontal_Peak_11n40

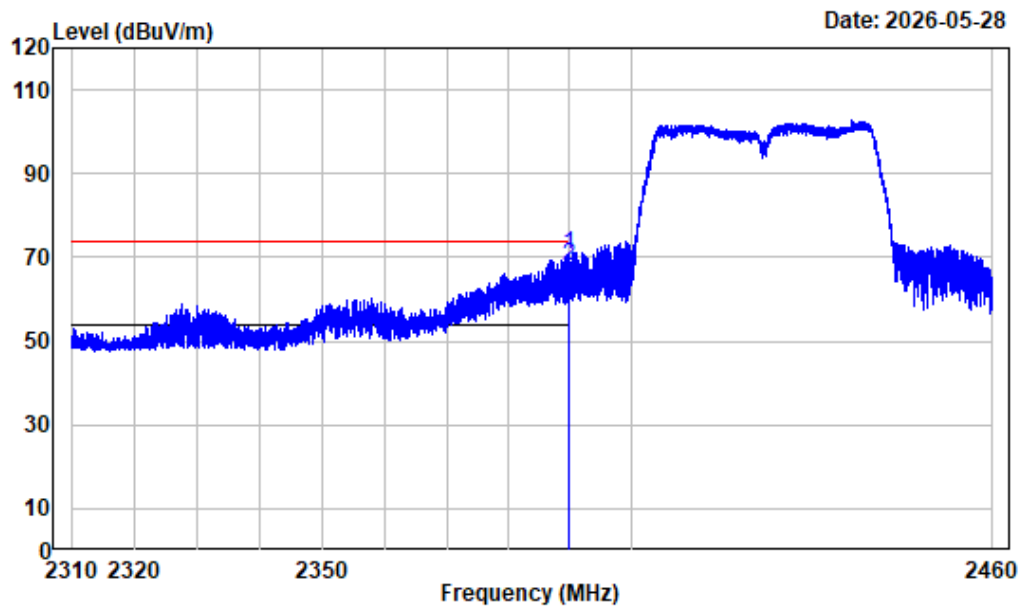

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2422

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.894	-10.97	81.68	70.71	74.00	-3.29 Peak
2	2390.000	-10.97	78.80	67.83	74.00	-6.17 Peak


Left Band edge_Horizontal_Average_11n40

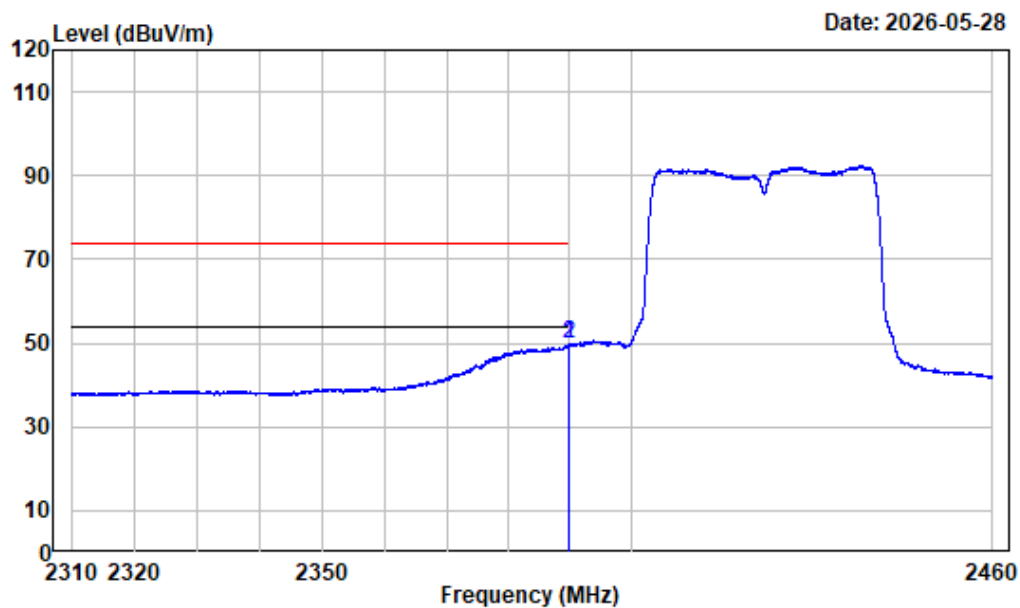

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2422

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2389.988	-10.97	60.56	49.59	54.00	-4.41 Average
2 2390.000	-10.97	60.65	49.68	54.00	-4.32 Average


Left Band edge_Vertical_Peak_11n40

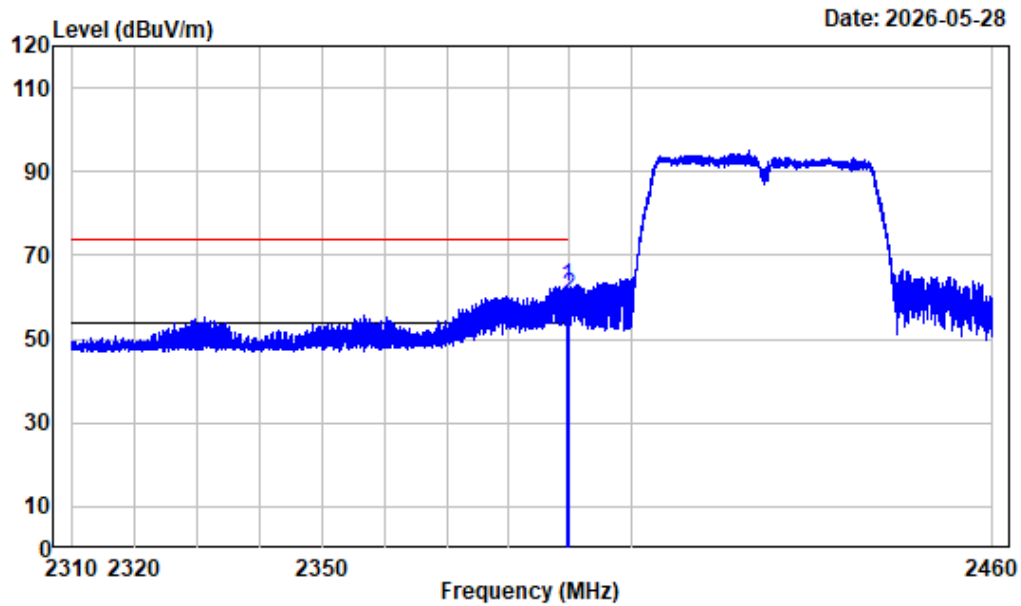

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.462	-10.96	73.61	62.65	74.00	-11.35	Peak
2	2390.000	-10.97	71.24	60.27	74.00	-13.73	Peak


Left Band edge_Vertical_Average_11n40

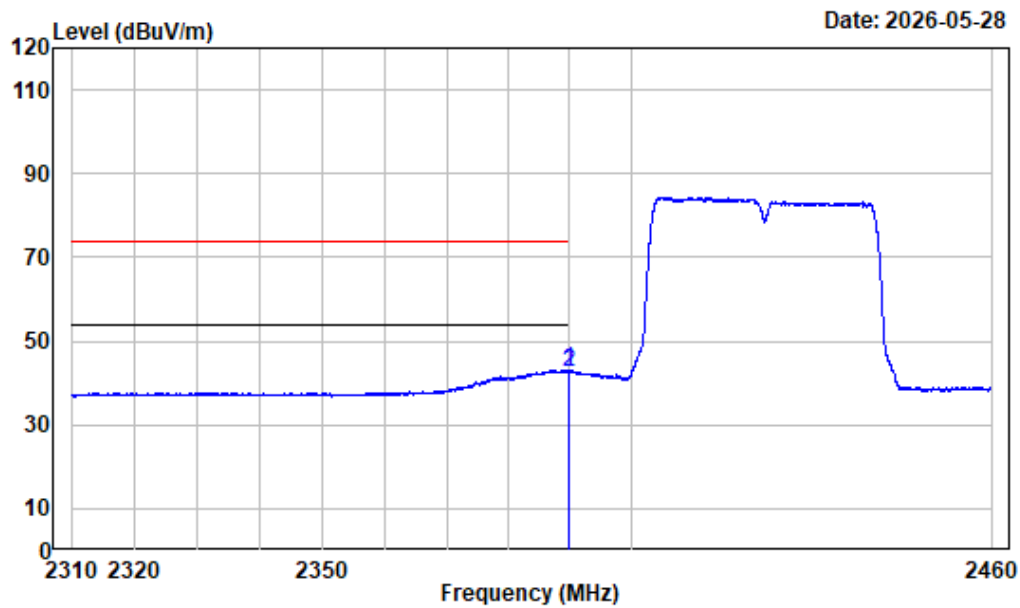

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.931	-10.97	54.10	43.13	54.00	-10.87	Average
2	2390.000	-10.97	53.57	42.60	54.00	-11.40	Average


Right Band edge_Horizontal_Peak_11n40

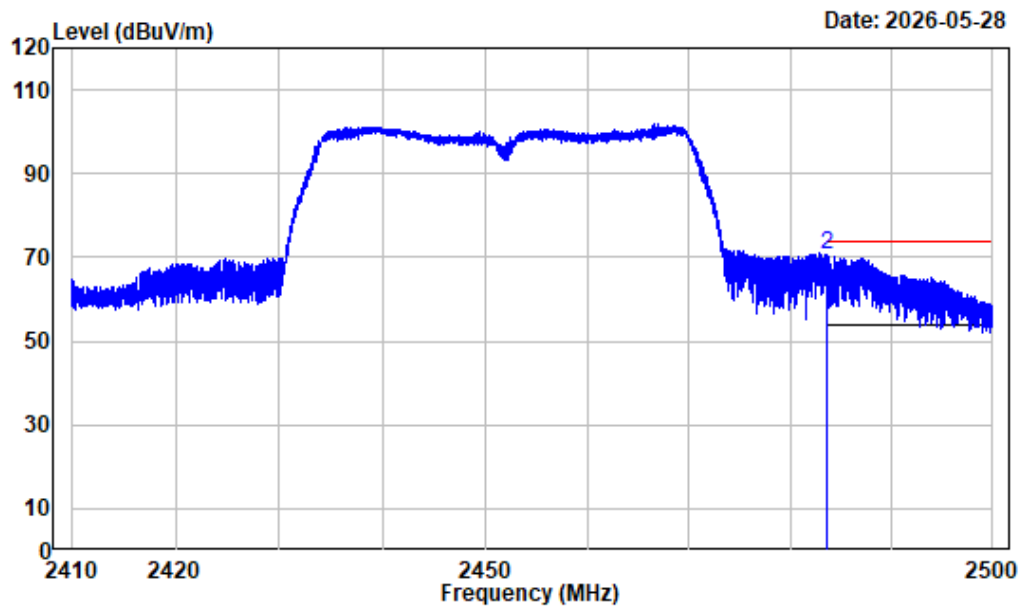

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2452

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	71.67	60.74	74.00	-13.26 Peak
2	2483.508	-10.93	81.48	70.55	74.00	-3.45 Peak


Right Band edge_Horizontal_Average_11n40

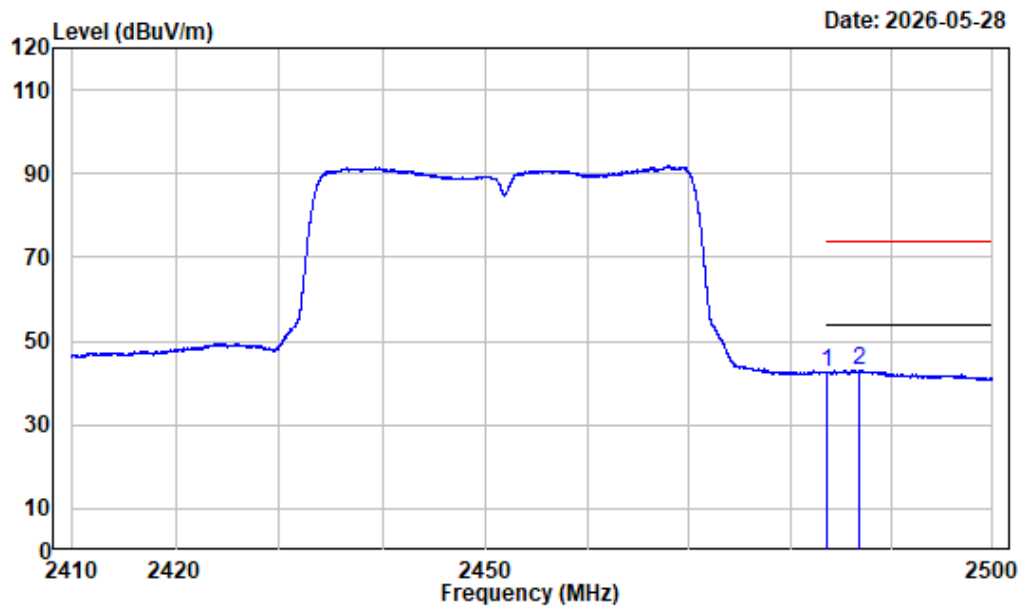

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2452

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	53.28	42.35	54.00	-11.65	Average
2	2486.837	-10.92	53.93	43.01	54.00	-10.99	Average


Right Band edge_Vertical_Peak_11n40

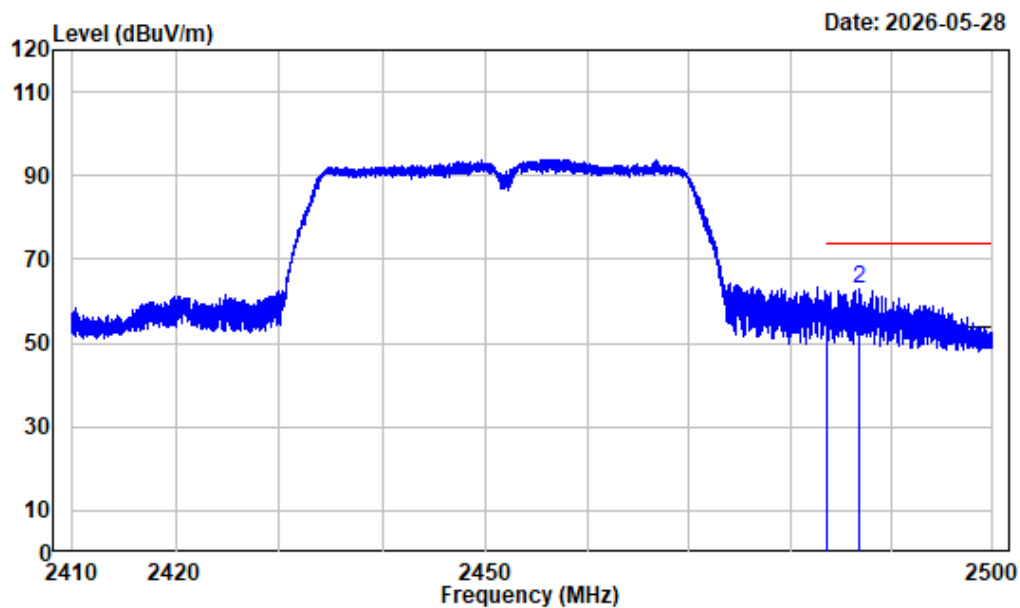

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_n40_2452

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	66.54	55.61	74.00	-18.39	Peak
2	2486.826	-10.92	73.85	62.93	74.00	-11.07	Peak


Right Band edge_Vertical_Average_11n40

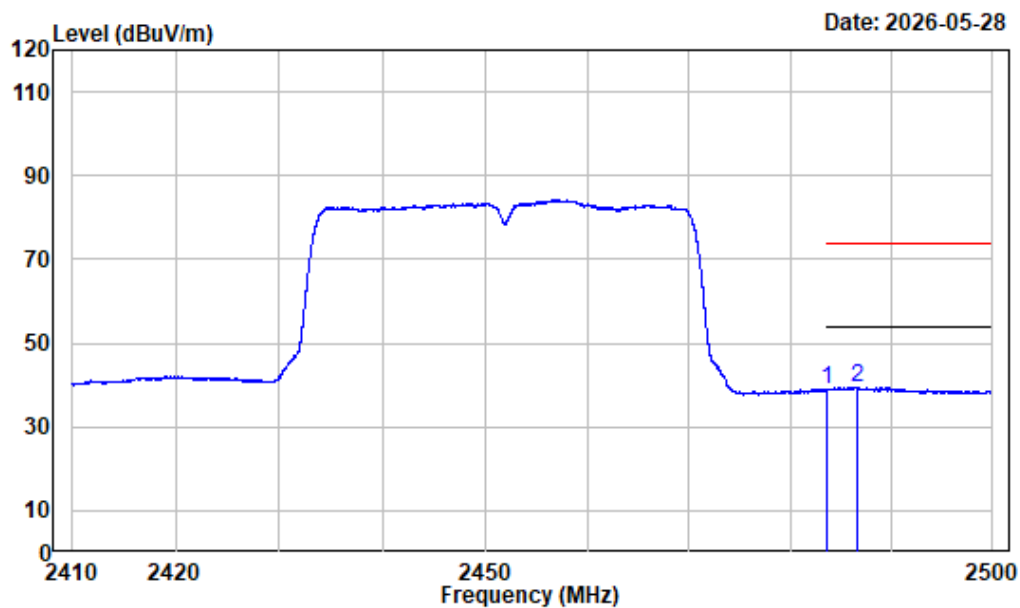

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_n40_2452

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	49.66	38.73	54.00	-15.27	Average
2 2486.522	-10.92	50.43	39.51	54.00	-14.49	Average


Left Band edge_Horizontal_Peak_11ax20

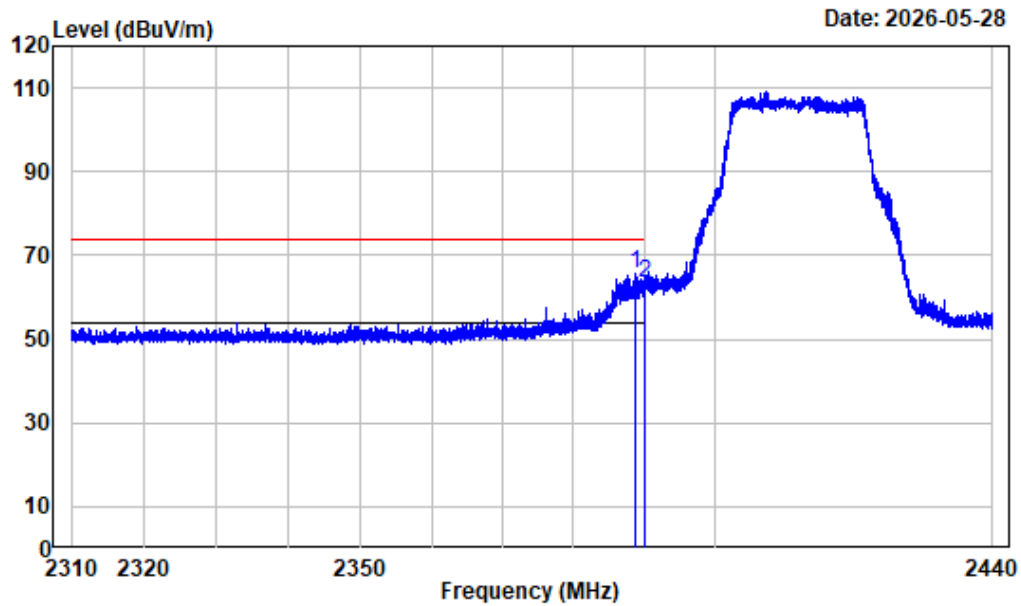

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2412

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2388.861	-10.96	76.84	65.88	74.00	-8.12	Peak
2	2390.000	-10.97	74.59	63.62	74.00	-10.38	Peak


Left Band edge_Horizontal_Average_11ax20

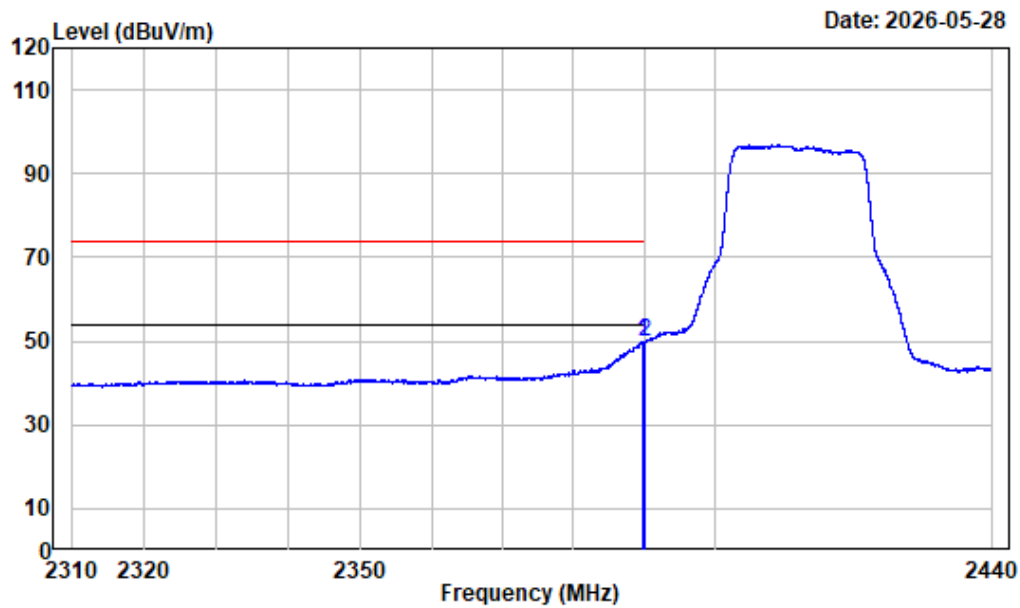

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax20_2412

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.934	-10.97	60.90	49.93	54.00	-4.07 Average
2	2390.000	-10.97	60.58	49.61	54.00	-4.39 Average


Left Band edge_Vertical_Peak_11ax20

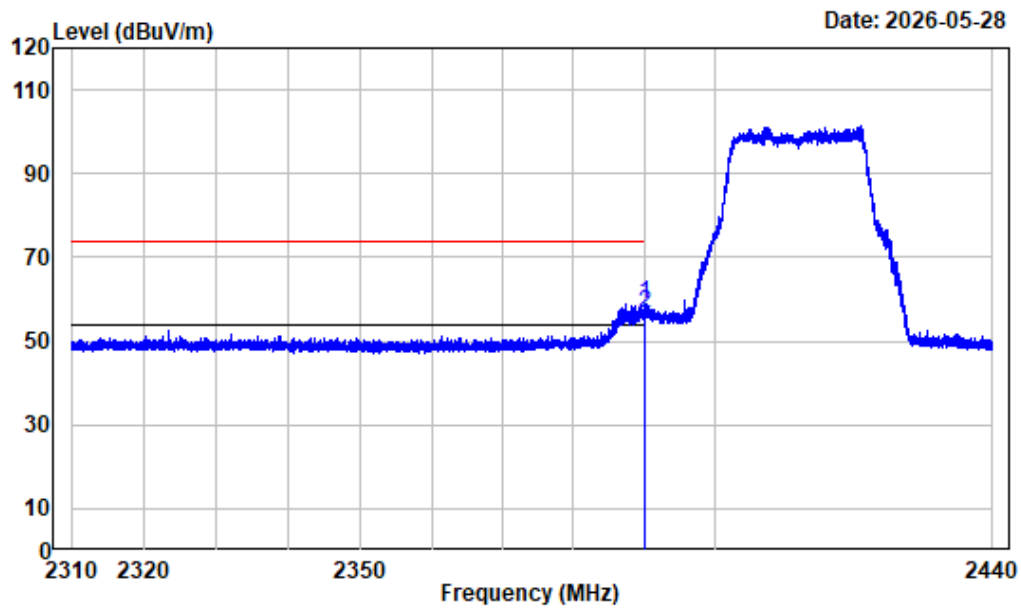

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2412

	Freq Factor		Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.982	-10.97	69.84	58.87	74.00	-15.13	Peak
2	2390.000	-10.97	67.47	56.50	74.00	-17.50	Peak


Left Band edge_Vertical_Average_11ax20

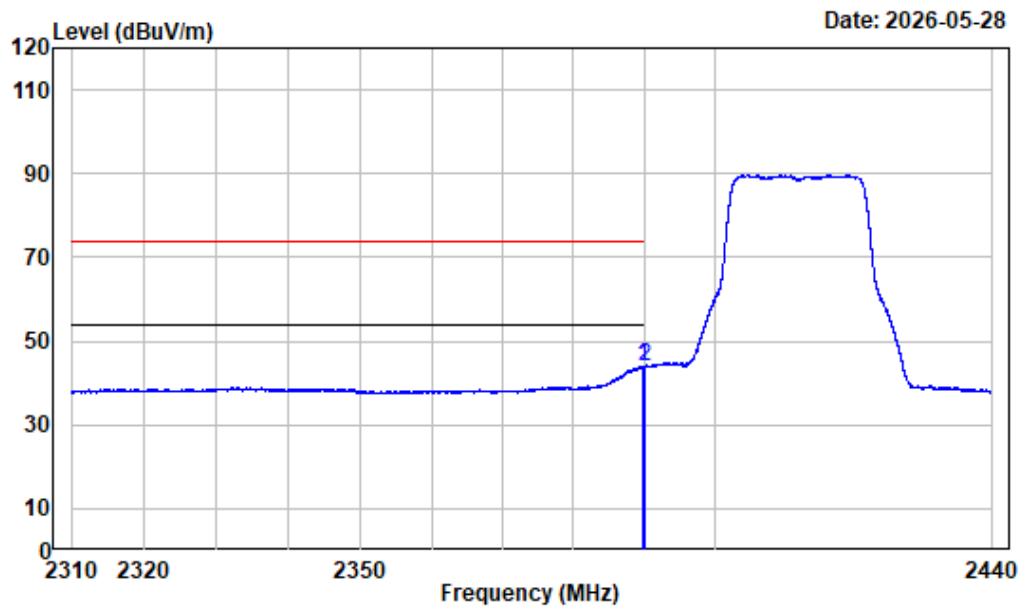

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax20_2412

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.820	-10.97	55.00	44.03	54.00	-9.97 Average
2	2390.000	-10.97	54.96	43.99	54.00	-10.01 Average


Right Band edge_Horizontal_Peak_11ax20

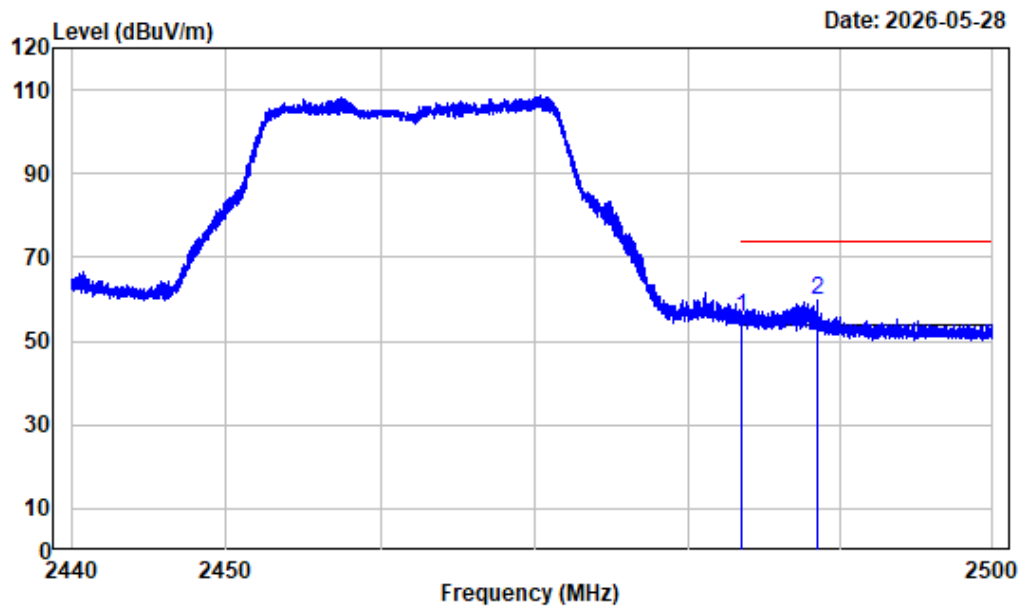

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2462

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	66.42	55.49	74.00	-18.51	Peak
2	2488.488	-10.93	70.73	59.80	74.00	-14.20	Peak


Right Band edge_Horizontal_Average_11ax20

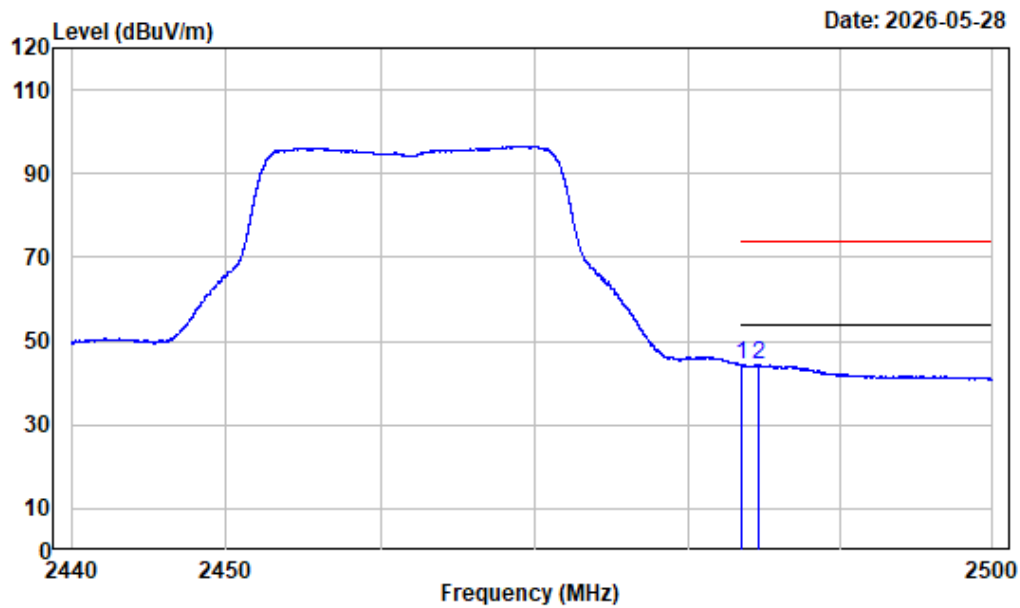

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax20_2462

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	55.25	44.32	54.00	-9.68 Average
2 2484.670	-10.93	55.26	44.33	54.00	-9.67 Average


Right Band edge_Vertical_Peak_11ax20

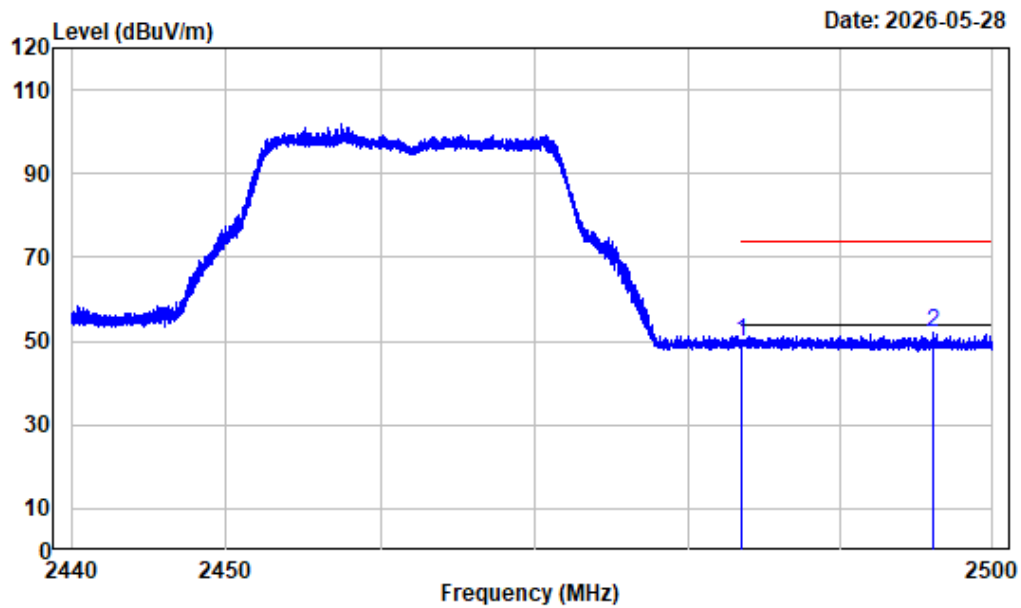

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax20_2462

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1	2483.500 -10.93	60.74	49.81	74.00	-24.19 Peak
2	2496.145 -10.94	63.05	52.11	74.00	-21.89 Peak


Left Band edge_Horizontal_Peak_11ax40

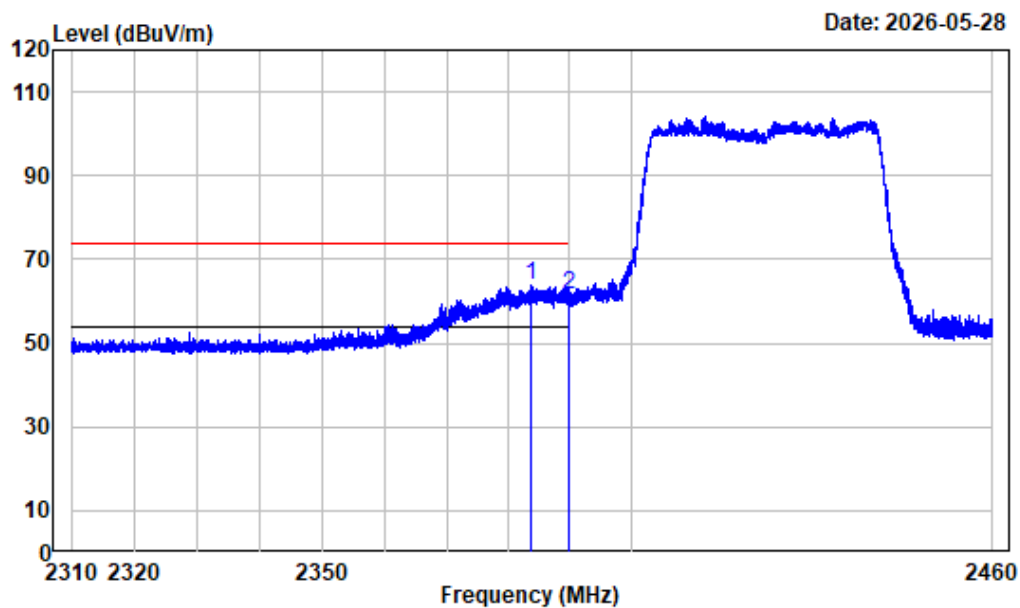

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2383.800	-10.96	74.64	63.68	74.00	-10.32 Peak
2 2390.000	-10.97	72.60	61.63	74.00	-12.37 Peak


Left Band edge_Horizontal_Average_11ax40

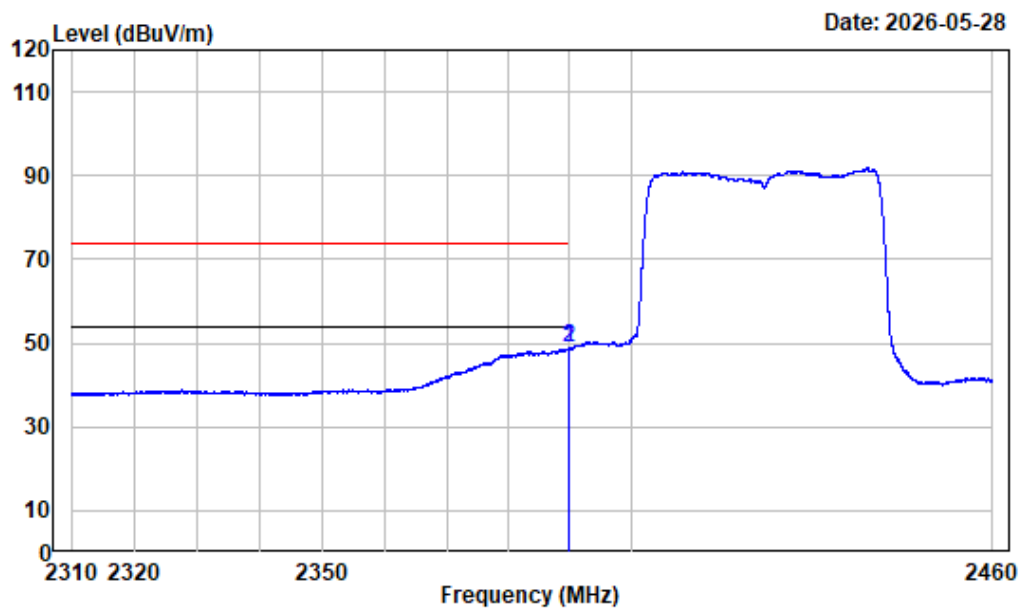

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2389.913	-10.97	59.88	48.91	54.00	-5.09	Average
2 2390.000	-10.97	59.75	48.78	54.00	-5.22	Average


Left Band edge_Vertical_Peak_11ax40

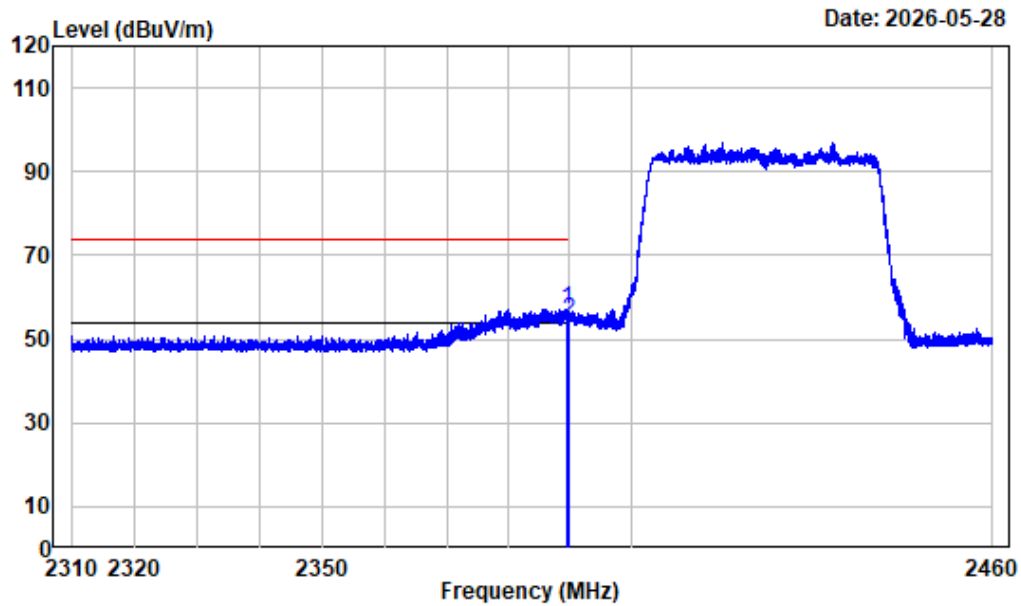

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2389.444	-10.96	68.24	57.28	74.00	-16.72	Peak
2	2390.000	-10.97	65.14	54.17	74.00	-19.83	Peak


Left Band edge_Vertical_Average_11ax40

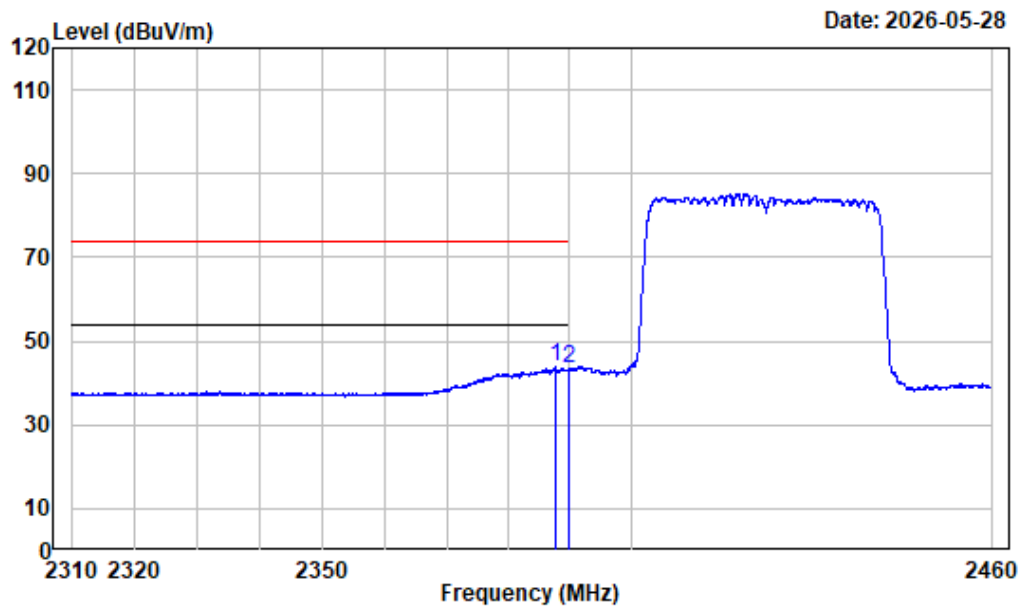

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax40_2422

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2387.606	-10.96	54.67	43.71	54.00	-10.29	Average
2 2390.000	-10.97	54.22	43.25	54.00	-10.75	Average


Right Band edge_Horizontal_Peak_11ax40

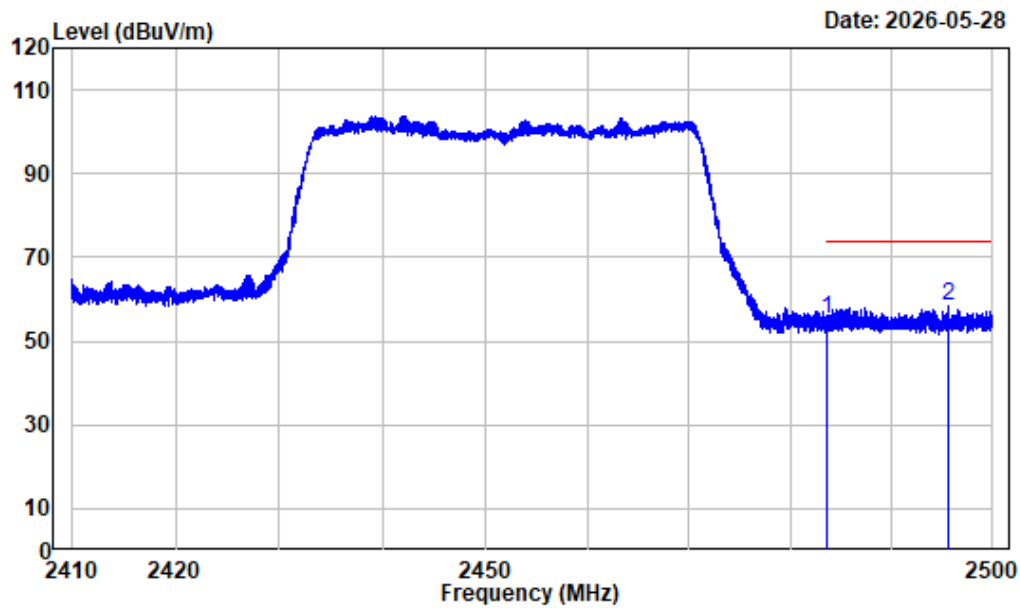

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2452

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	66.00	55.07	74.00	-18.93 Peak
2	2495.669	-10.94	69.47	58.53	74.00	-15.47 Peak


Right Band edge_Horizontal_Average_11aX40

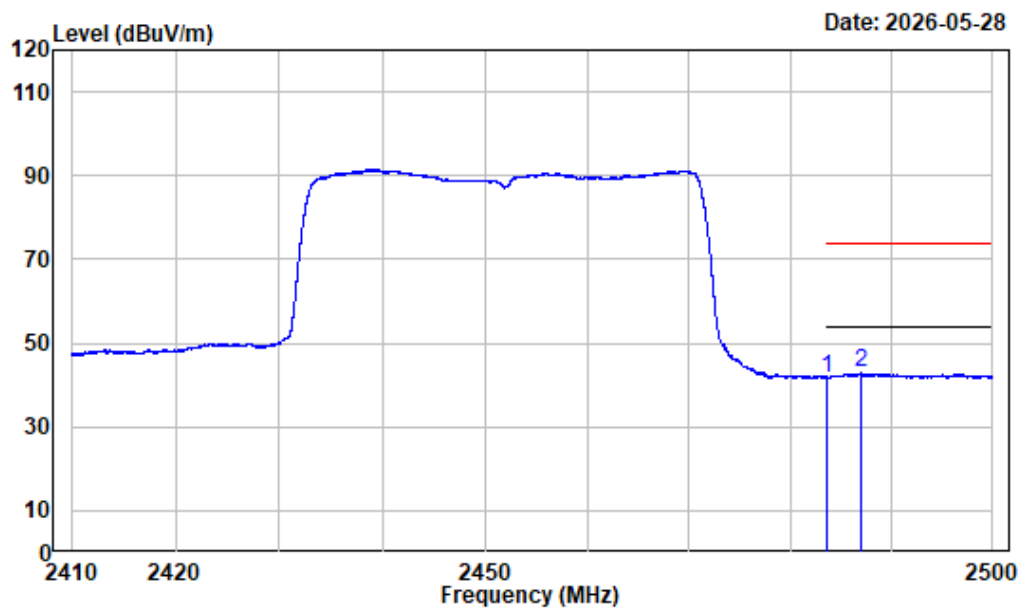

Condition : Horizontal
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 2.4GWiFi_ax40_2452

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	52.73	41.80	54.00	-12.20	Average
2	2486.894	-10.92	53.71	42.79	54.00	-11.21	Average

Right Band edge_Vertical_Peak_11ax40

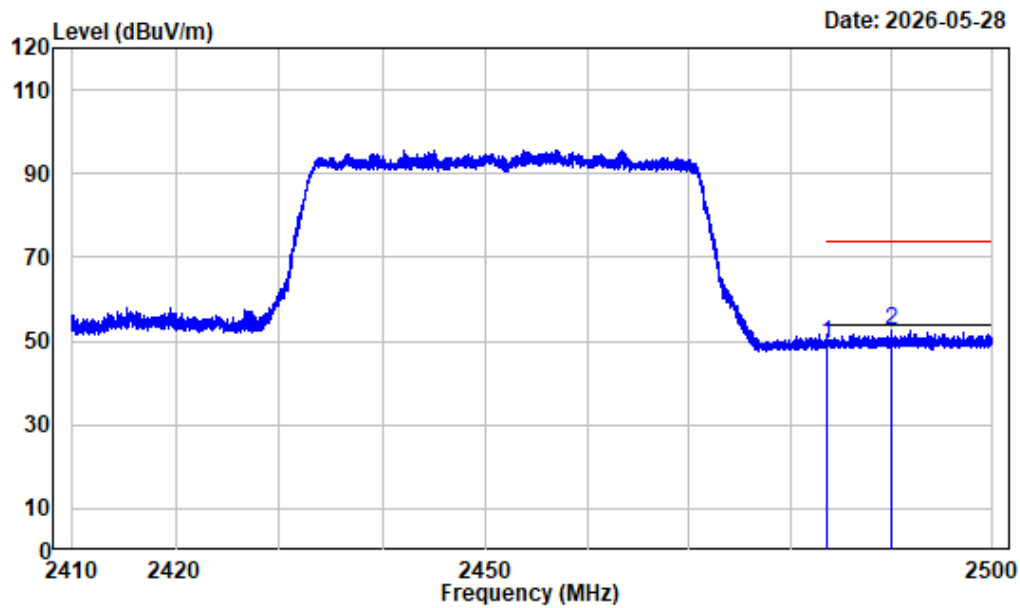

Condition : Vertical
Project No. : 2601S21212E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 2.4GWiFi_ax40_2452

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.93	60.48	49.55	74.00	-24.45	Peak
2 2489.954	-10.93	63.54	52.61	74.00	-21.39	Peak

6dB Emission Bandwidth**Test Information:**

Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Data:


Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11b	2412	8.248	≥ 0.5	Pass
	2437	8.248	≥ 0.5	Pass
	2462	8.248	≥ 0.5	Pass
802.11g	2412	16.617	≥ 0.5	Pass
	2437	16.577	≥ 0.5	Pass
	2462	16.577	≥ 0.5	Pass
802.11n20	2412	17.778	≥ 0.5	Pass
	2437	17.778	≥ 0.5	Pass
	2462	17.778	≥ 0.5	Pass
802.11n40	2422	36.837	≥ 0.5	Pass
	2437	36.757	≥ 0.5	Pass
	2452	36.677	≥ 0.5	Pass
802.11ax20_RU_FULL	2412	19.339	≥ 0.5	Pass
	2437	19.179	≥ 0.5	Pass
	2462	19.179	≥ 0.5	Pass
802.11ax40_RU_FULL	2422	38.358	≥ 0.5	Pass
	2437	38.599	≥ 0.5	Pass
	2452	38.438	≥ 0.5	Pass

802.11b_2412MHz

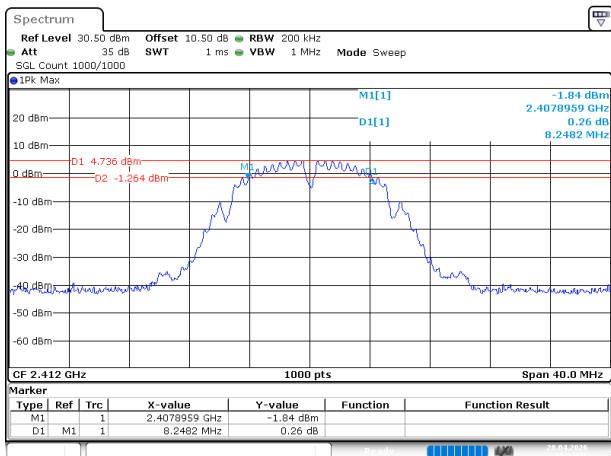


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:24:36

802.11b_2437MHz

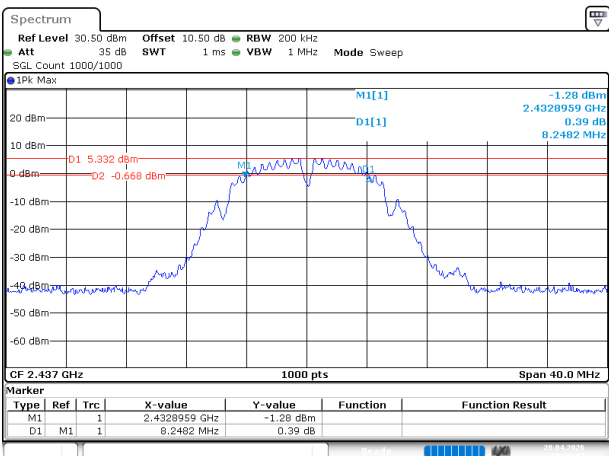


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:36:13

802.11b_2462MHz

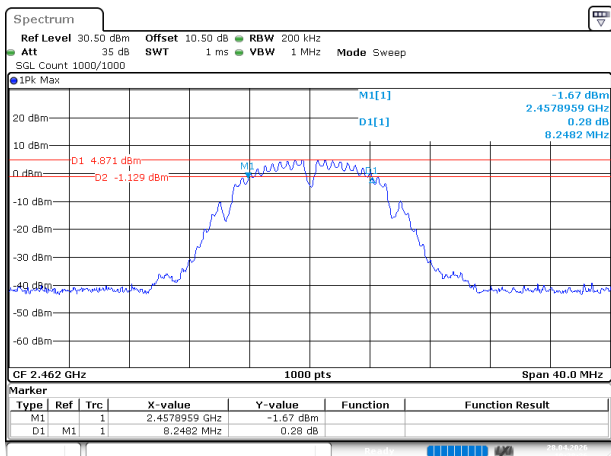


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:38:37

802.11g_2412MHz

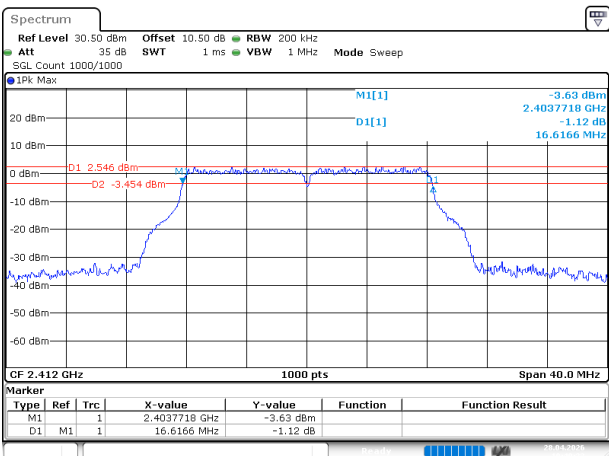


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:40:24

802.11g_2437MHz

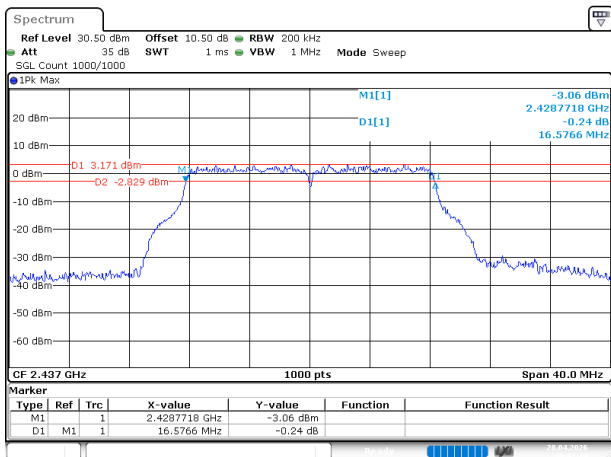


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:42:20

802.11g_2462MHz

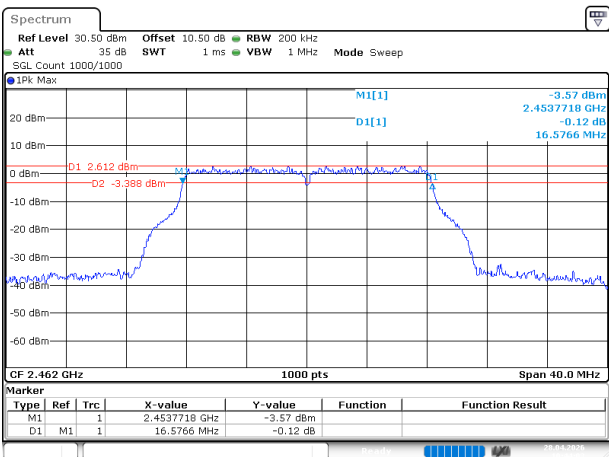


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:44:04

802.11n20_2412MHz

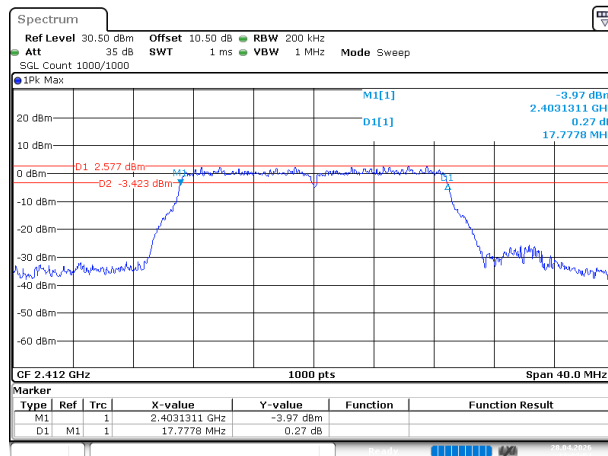


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:02:55

802.11n20_2437MHz

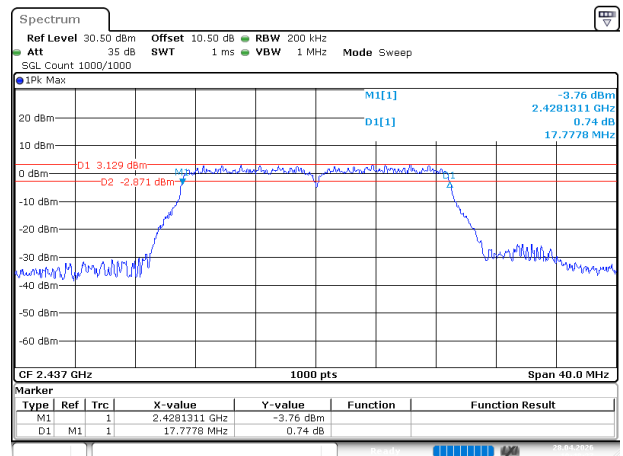


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:48:27

802.11n20_2462MHz

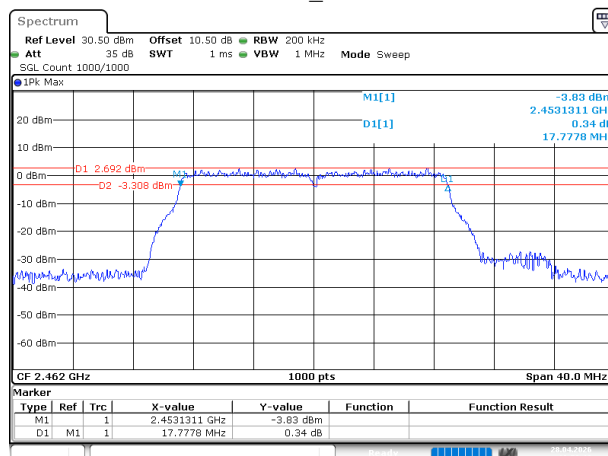


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:50:19

802.11n40_2422MHz

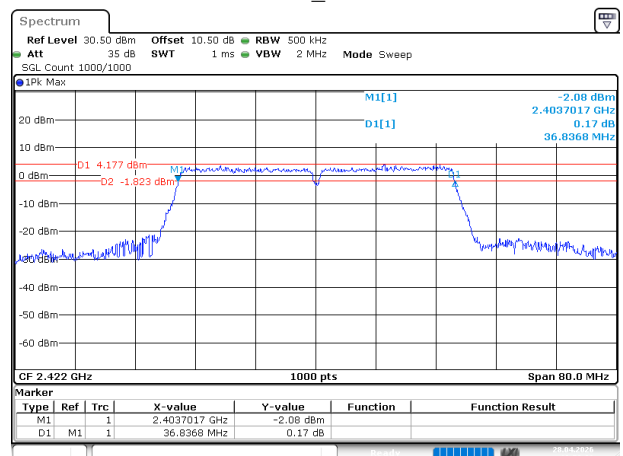


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:52:38

802.11n40_2437MHz

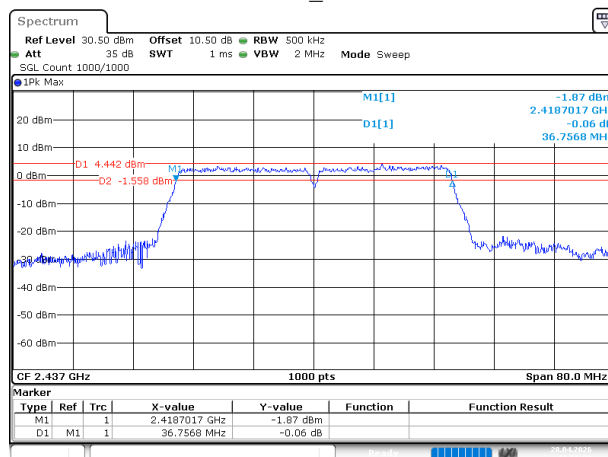


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:55:21

802.11n40_2452MHz

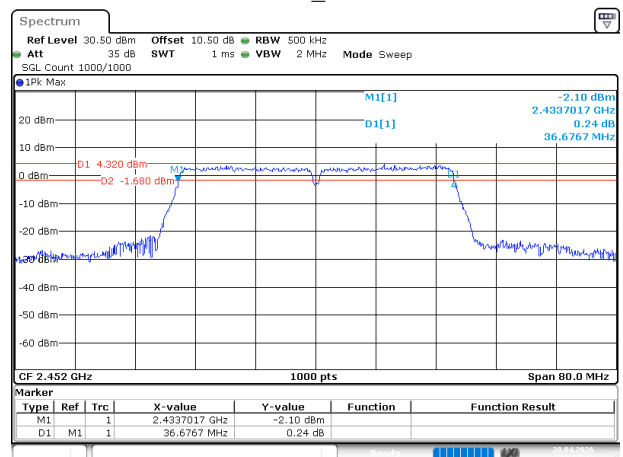


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:58:44

802.11ax20_2412MHz_RU_FULL

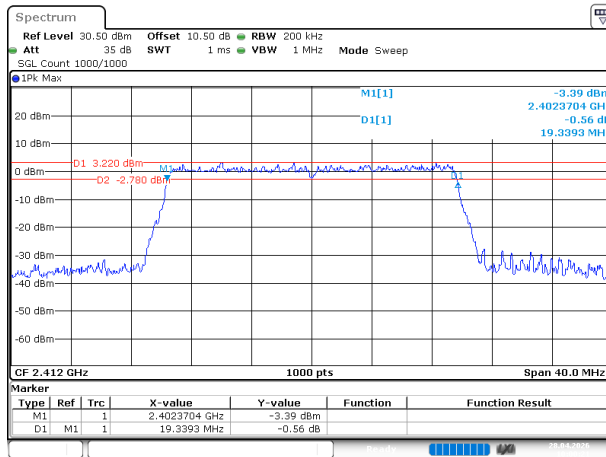


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:00:21

802.11ax20_2437MHz_RU_FULL

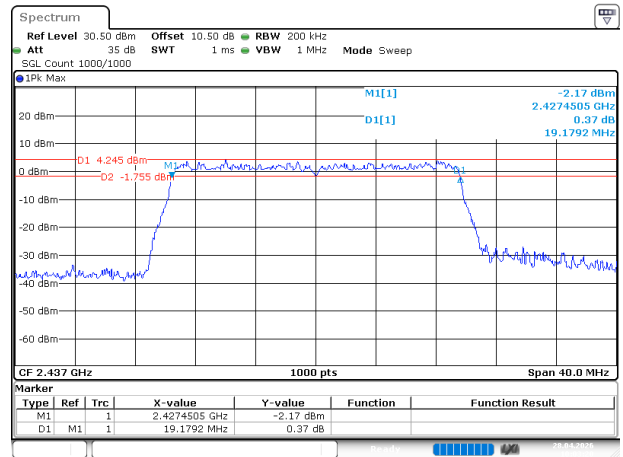


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:03:20

802.11ax20_2462MHz_RU_FULL

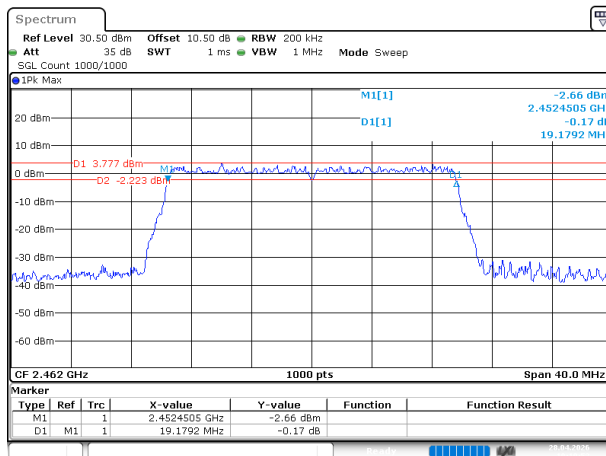


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:10:54

802.11ax40_2422MHz_RU_FULL

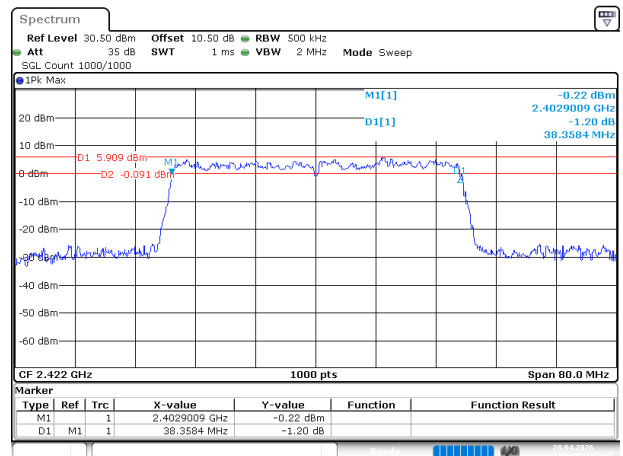


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:13:45

802.11ax40_2437MHz_RU_FULL

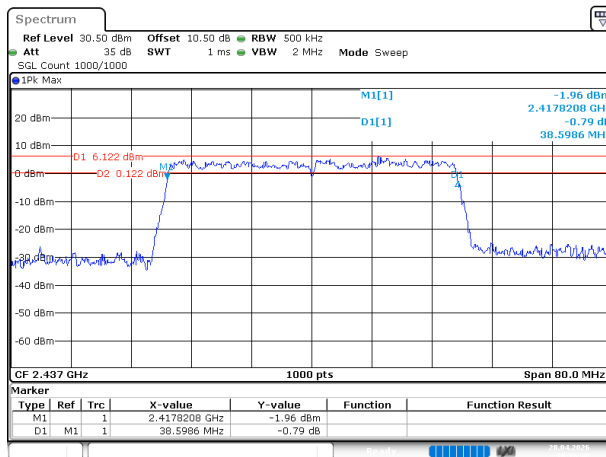

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:16:49

802.11ax40_2452MHz_RU_FULL

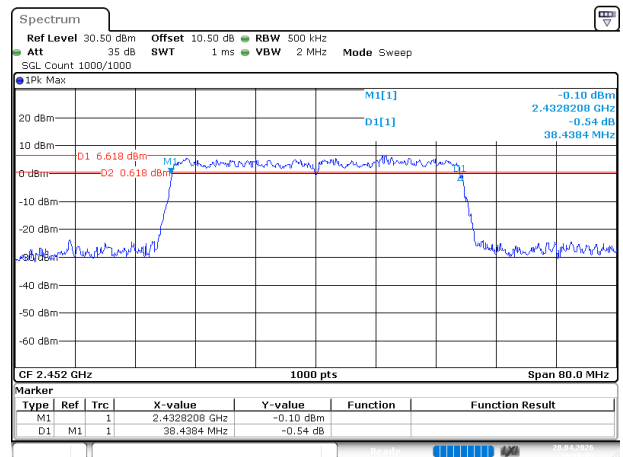

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:19:13

99% Occupied Bandwidth**Test Information:**

Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	N/A


Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Data:


Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11b	2412	10.480
	2437	10.560
	2462	10.440
802.11g	2412	16.680
	2437	16.680
	2462	16.680
802.11n20	2412	17.920
	2437	17.920
	2462	17.840
802.11n40	2422	36.880
	2437	36.880
	2452	36.880
802.11ax20_RU_FULL	2412	19.120
	2437	19.120
	2462	19.080
802.11ax40_RU_FULL	2422	38.160
	2437	38.160
	2452	38.240

802.11b_2412MHz

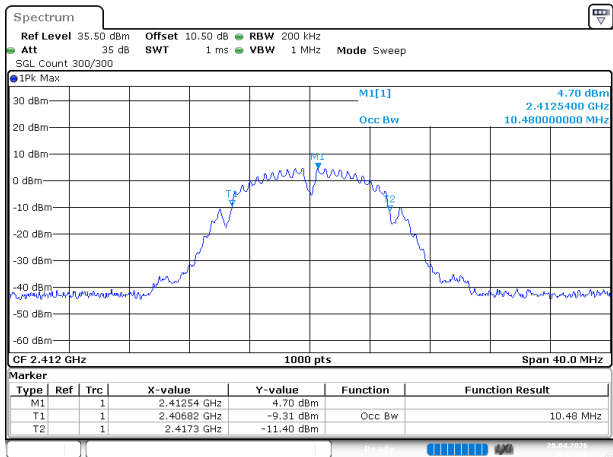


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:24:49

802.11b_2437MHz

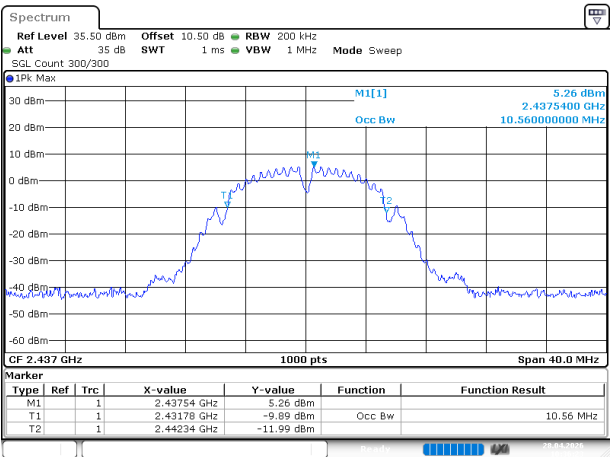


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:36:24

802.11b_2462MHz

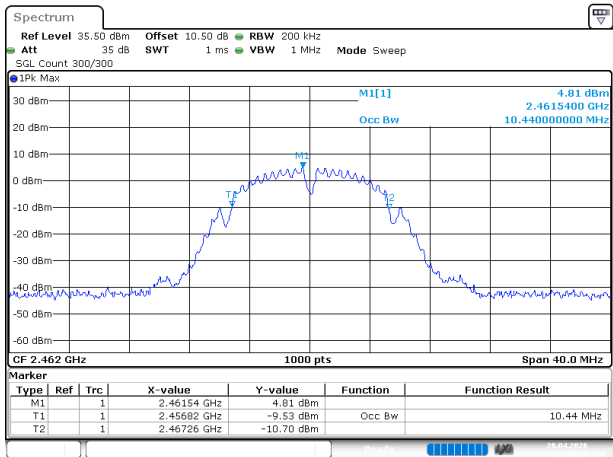


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:38:49

802.11g_2412MHz

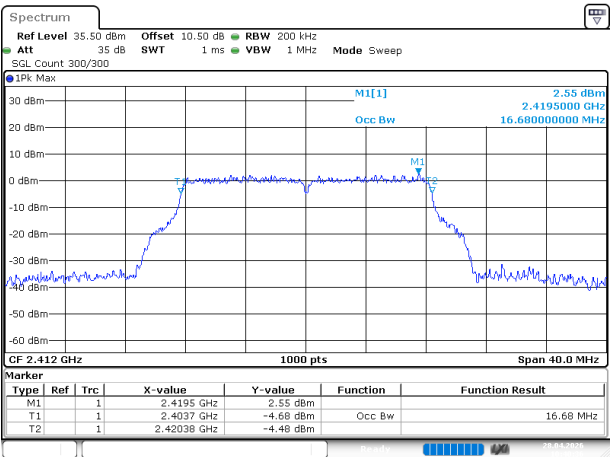


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:40:37

802.11g_2437MHz

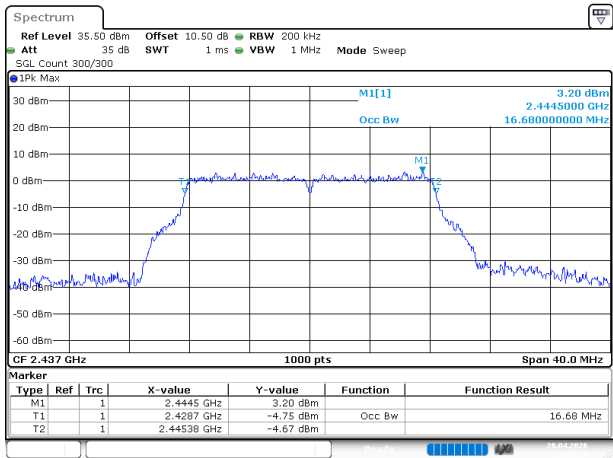


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:42:31

802.11g_2462MHz

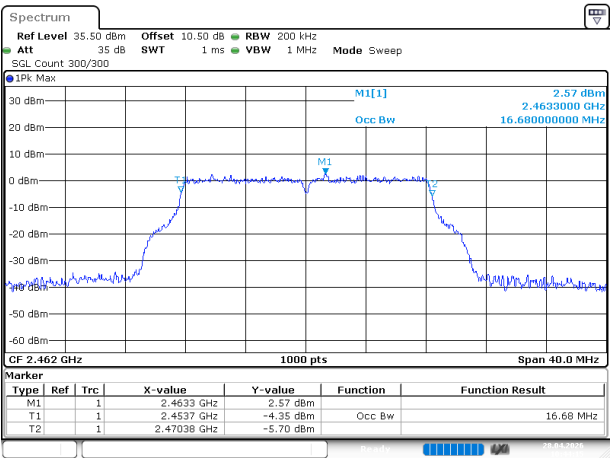


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:44:15

802.11n20_2412MHz

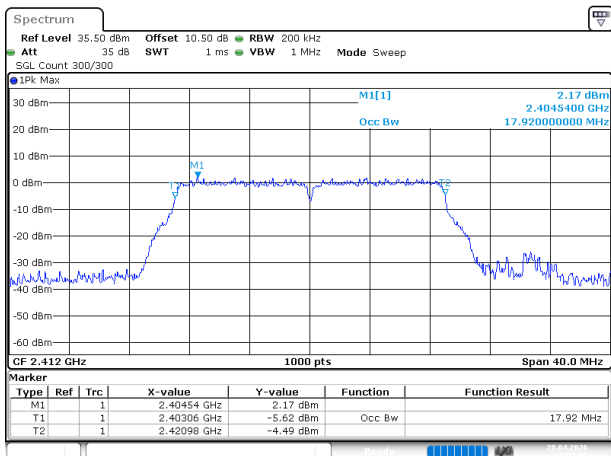


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:03:07

802.11n20_2437MHz

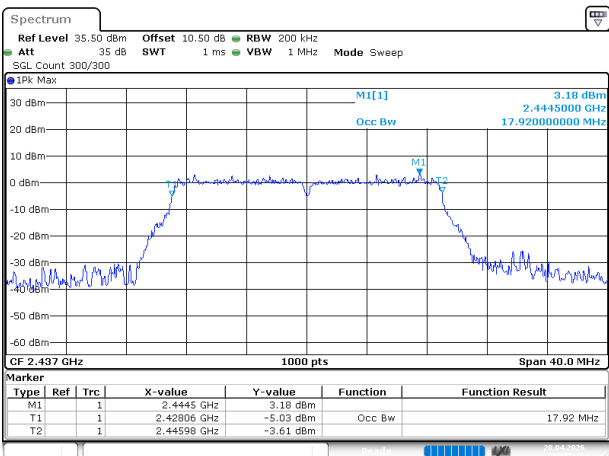


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:48:39

802.11n20_2462MHz

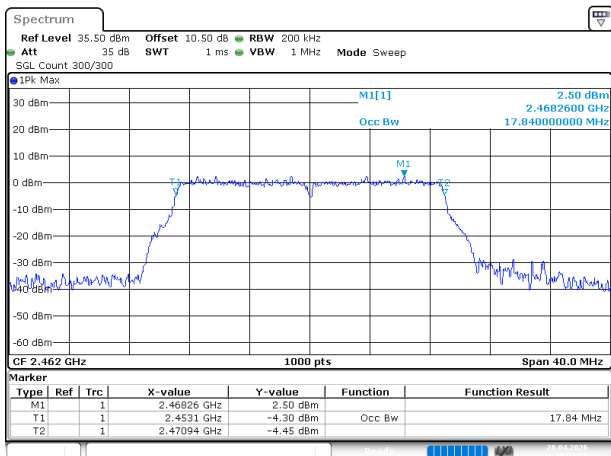


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:50:30

802.11n40_2422MHz

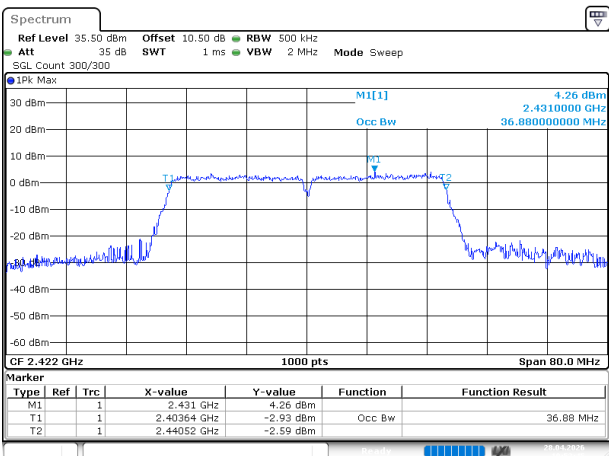


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:52:46

802.11n40_2437MHz

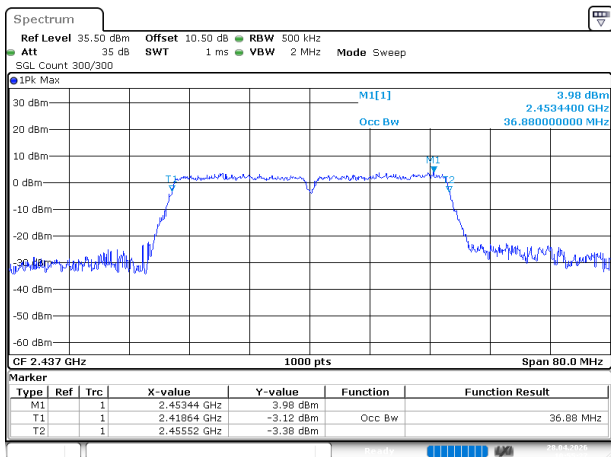


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:55:28

802.11n40_2452MHz

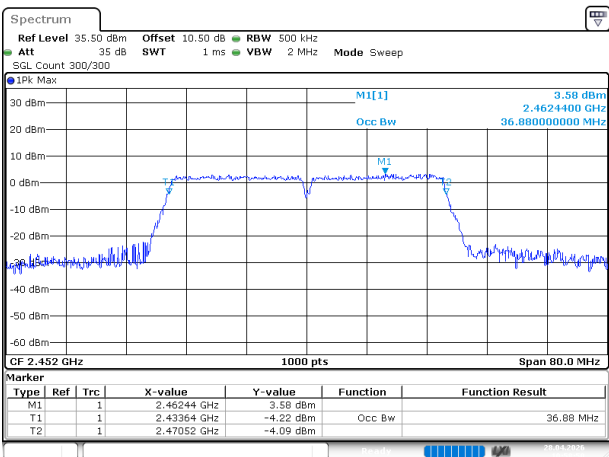


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:58:51

802.11ax20_2412MHz_RU_FULL

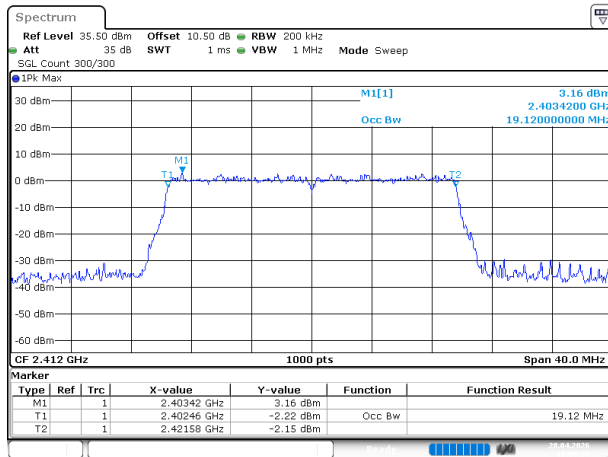


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:00:34

802.11ax20_2437MHz_RU_FULL

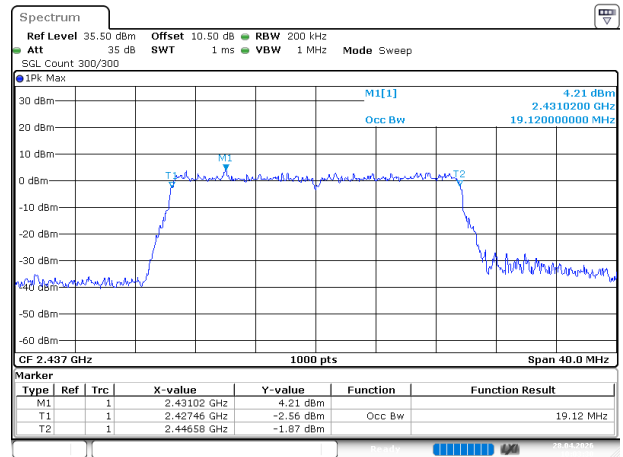


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:03:31

802.11ax20_2462MHz_RU_FULL

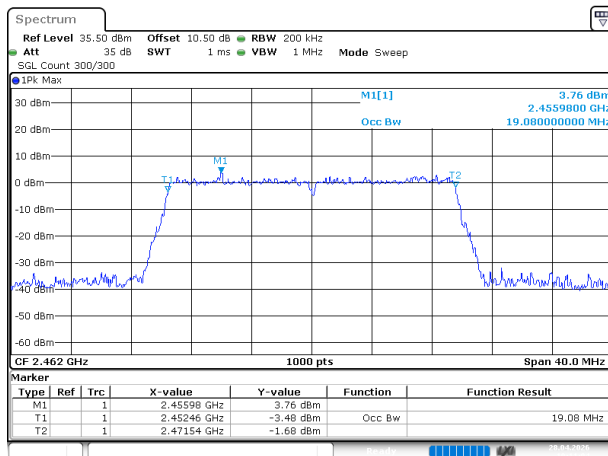


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:11:05

802.11ax40_2422MHz_RU_FULL

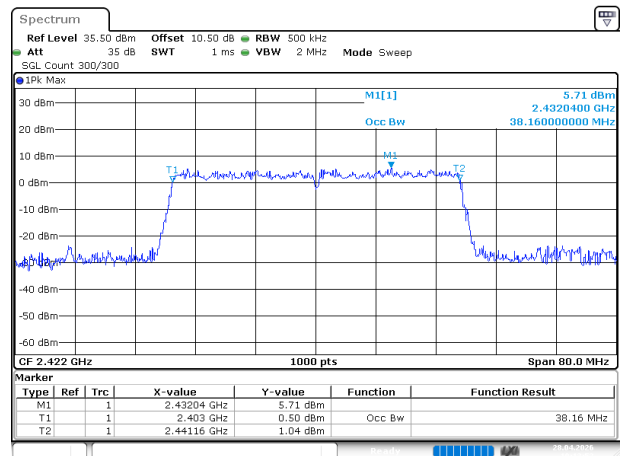


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:13:53

802.11ax40_2437MHz_RU_FULL

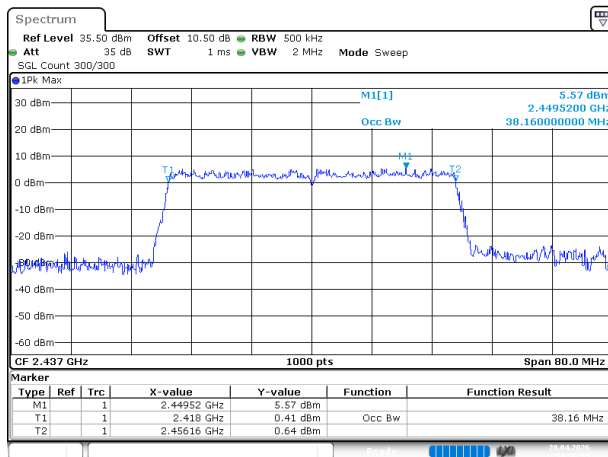

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:16:56

802.11ax40_2452MHz_RU_FULL

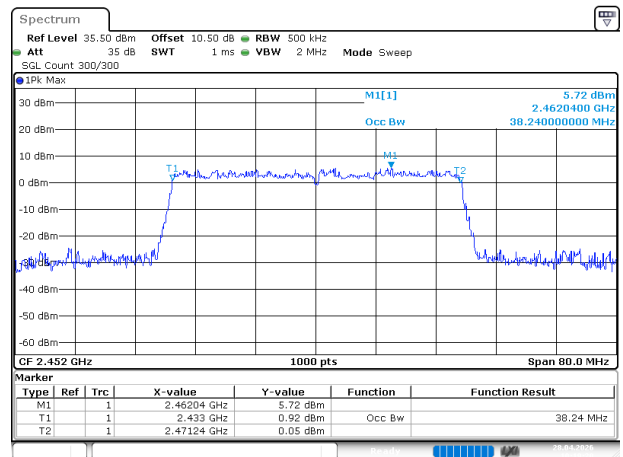

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:19:21

Maximum Conducted Output Power**Test Information:**

Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Data:

Mode	Test Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Verdict
802.11b	2412	15.66	30.00	Pass
	2437	16.28	30.00	Pass
	2462	15.77	30.00	Pass
802.11g	2412	20.44	30.00	Pass
	2437	20.91	30.00	Pass
	2462	20.49	30.00	Pass
802.11n20	2412	20.35	30.00	Pass
	2437	20.96	30.00	Pass
	2462	20.43	30.00	Pass
802.11n40	2422	20.88	30.00	Pass
	2437	21.07	30.00	Pass
	2452	20.96	30.00	Pass
802.11ax20_RU_FULL	2412	21.08	30.00	Pass
	2437	21.50	30.00	Pass
	2462	21.17	30.00	Pass
802.11ax40_RU_FULL	2422	21.25	30.00	Pass
	2437	21.46	30.00	Pass
	2452	21.51	30.00	Pass

Power Spectral Density**Test Information:**

Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Data:


Mode	Test Frequency (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	2412	-9.82	8	Pass
	2437	-6.72	8	Pass
	2462	-9.25	8	Pass
802.11g	2412	-11.05	8	Pass
	2437	-10.54	8	Pass
	2462	-11.03	8	Pass
802.11n20	2412	-12.80	8	Pass
	2437	-12.27	8	Pass
	2462	-12.67	8	Pass
802.11n40	2422	-15.21	8	Pass
	2437	-15.00	8	Pass
	2452	-15.03	8	Pass
802.11ax20_RU_FULL	2412	-13.18	8	Pass
	2437	-12.61	8	Pass
	2462	-13.12	8	Pass
802.11ax40_RU_FULL	2422	-15.53	8	Pass
	2437	-15.24	8	Pass
	2452	-15.23	8	Pass

802.11b_2412MHz

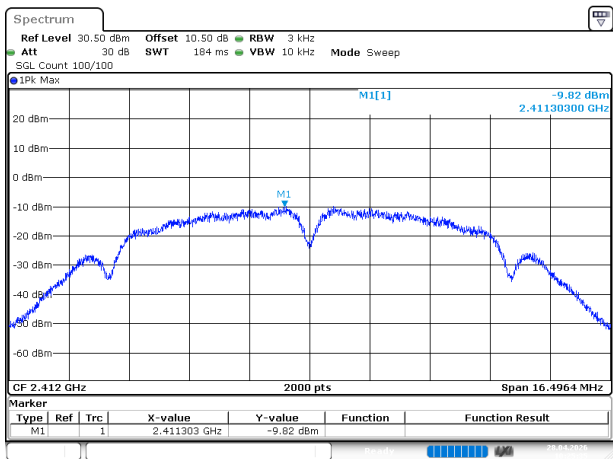


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:25:35

802.11b_2437MHz

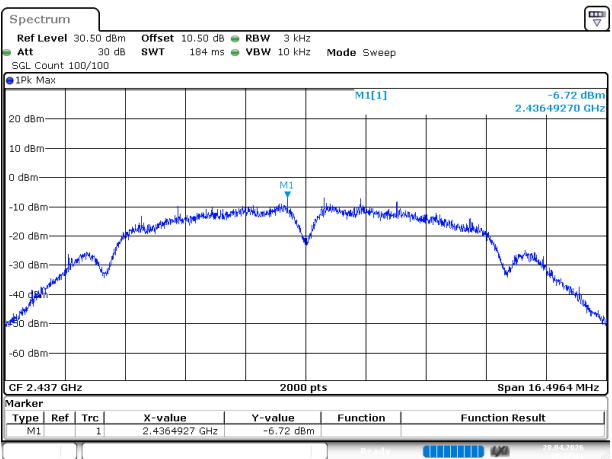


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:37:12

802.11b_2462MHz

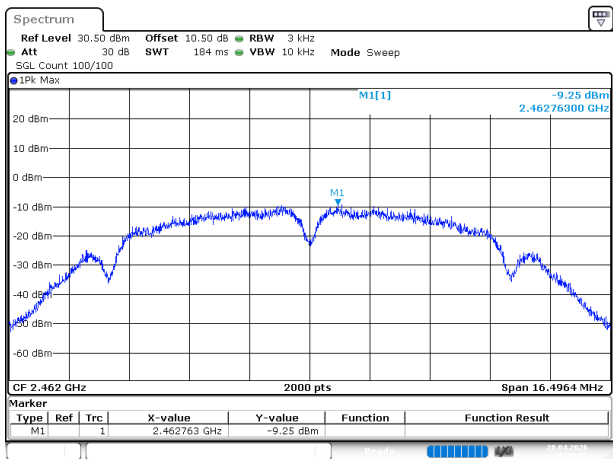


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:39:38

802.11g_2412MHz

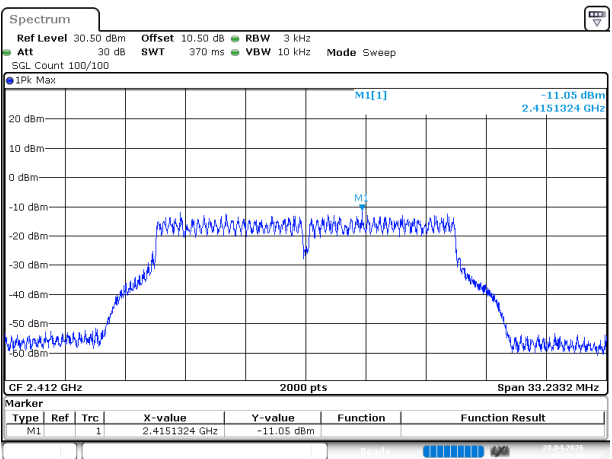


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:41:46

802.11g_2437MHz

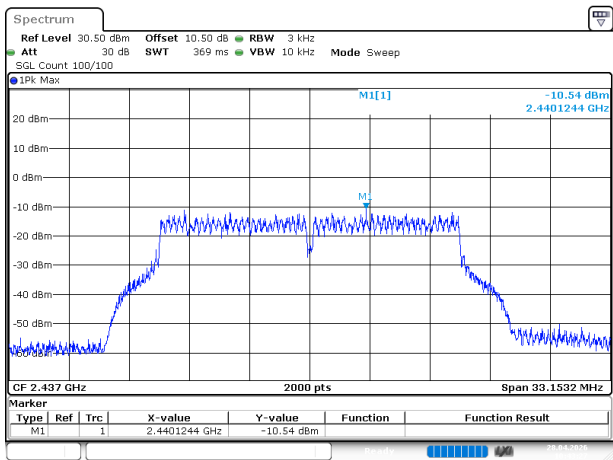


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:43:28

802.11g_2462MHz

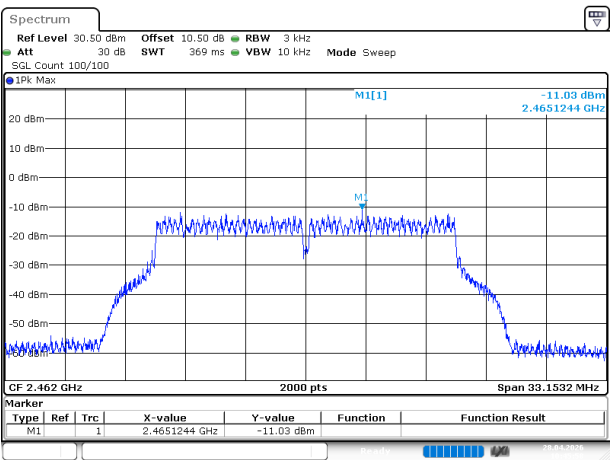


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:45:58

802.11n20_2412MHz

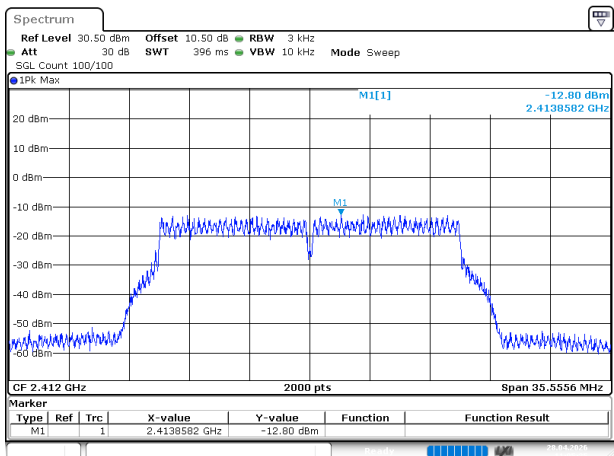


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:05:36

802.11n20_2437MHz

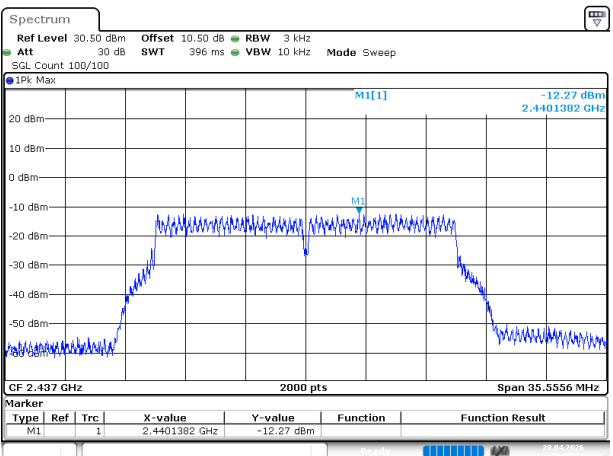


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:49:44

802.11n20_2462MHz

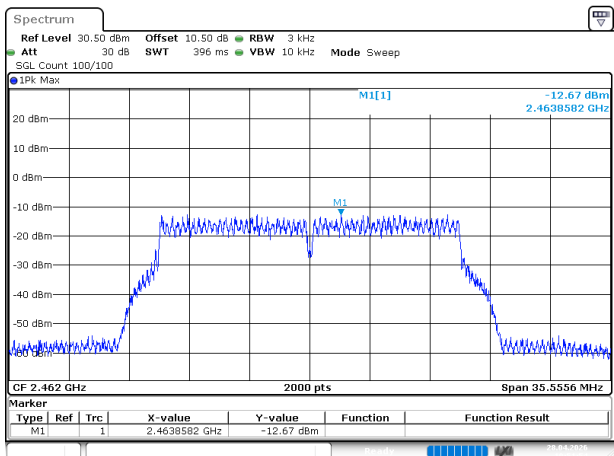


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:51:54

802.11n40_2422MHz

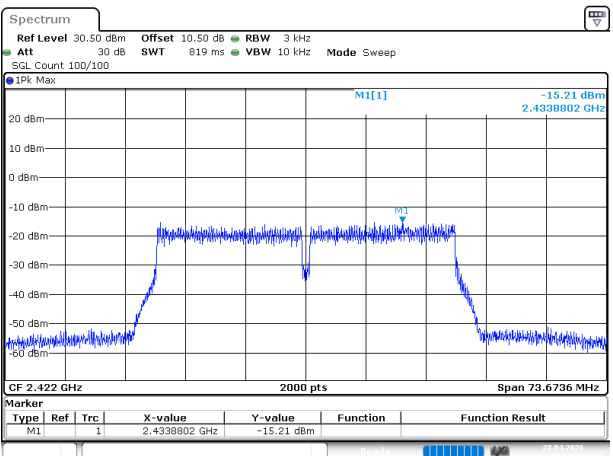


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:54:59

802.11n40_2437MHz

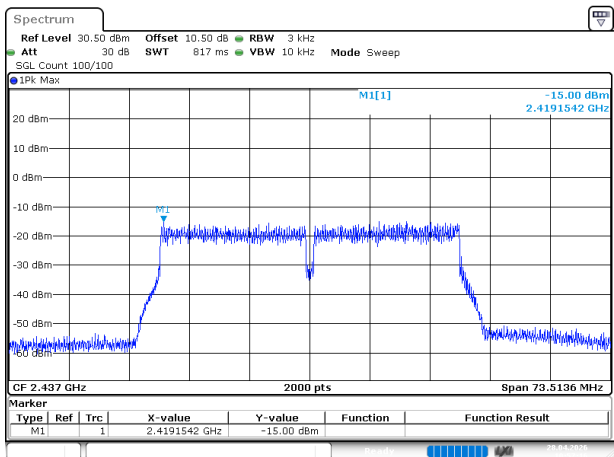


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:57:17

802.11n40_2452MHz

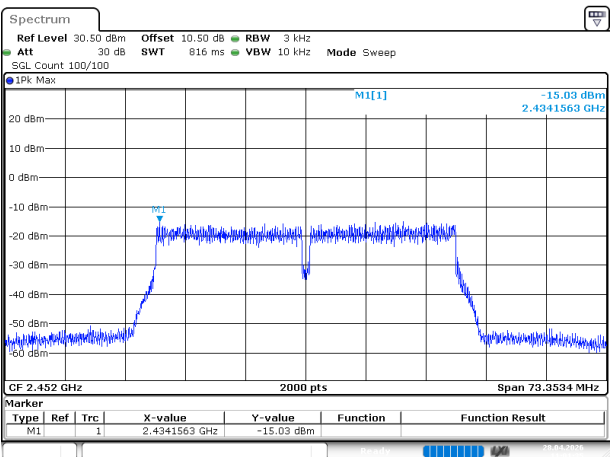


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:01:35

802.11ax20_2412MHz_RU_FULL

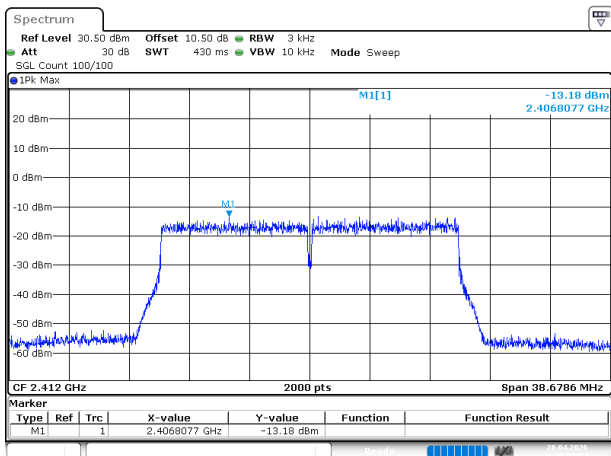


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:01:55

802.11ax20_2437MHz_RU_FULL

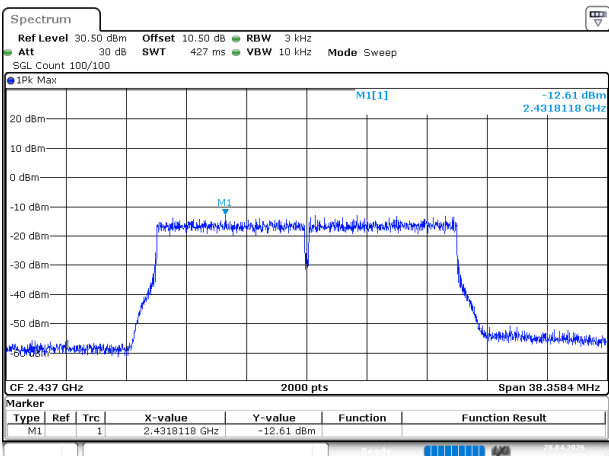


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:09:31

802.11ax20_2462MHz_RU_FULL

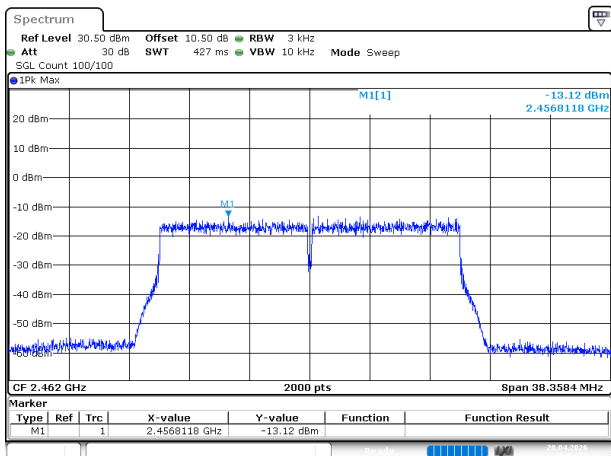


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:12:59

802.11ax40_2422MHz_RU_FULL

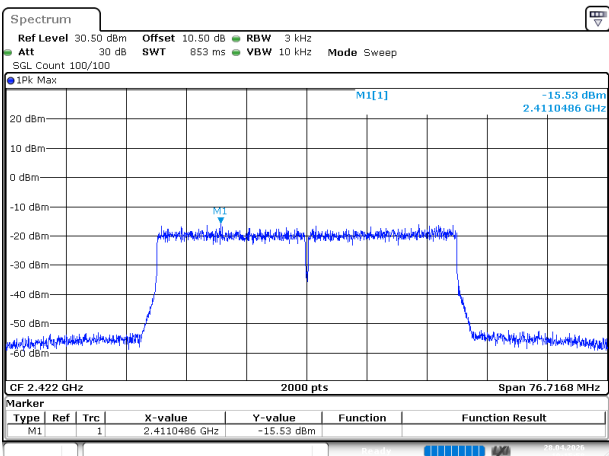


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:15:59

802.11ax40_2437MHz_RU_FULL

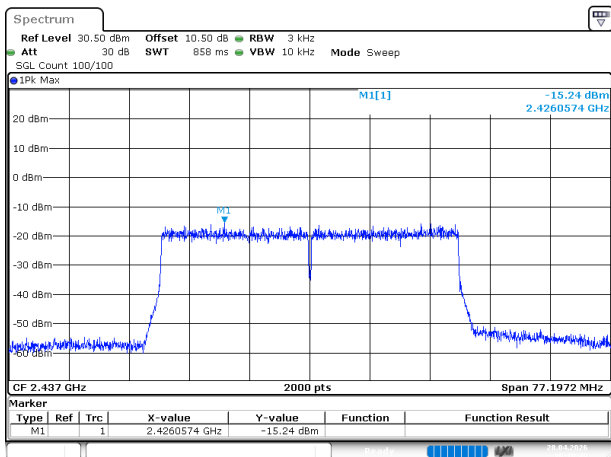

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:18:50

802.11ax40_2452MHz_RU_FULL

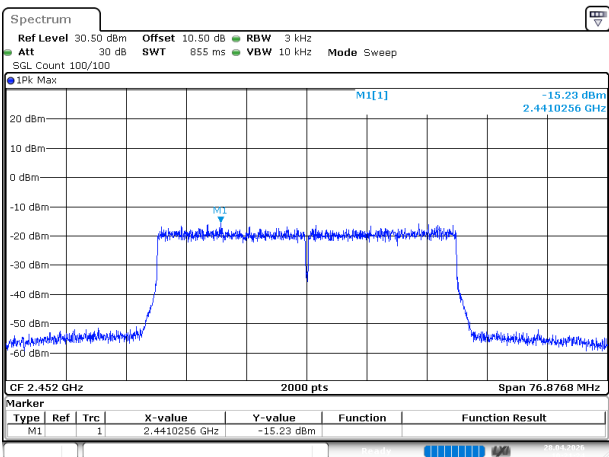

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:21:24

100 kHz Bandwidth of Frequency Band Edge**Test Information:**


Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----


Test Data:

802.11b_2412MHz

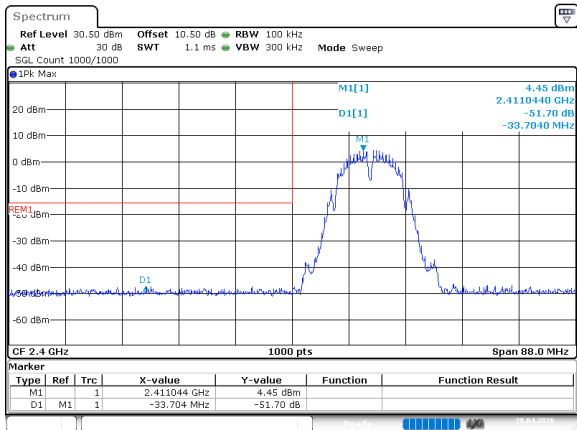


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:25:10

802.11b_2462MHz

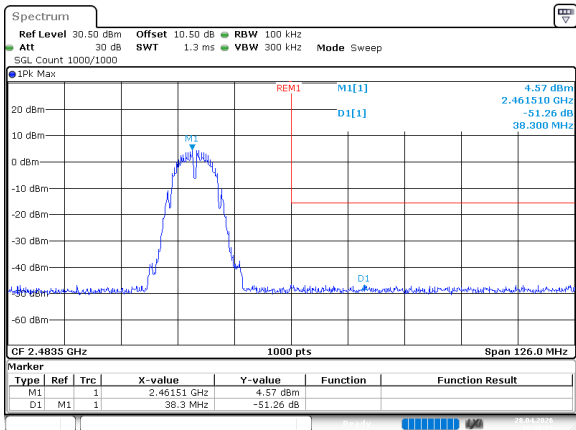


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:39:12

802.11g_2412MHz

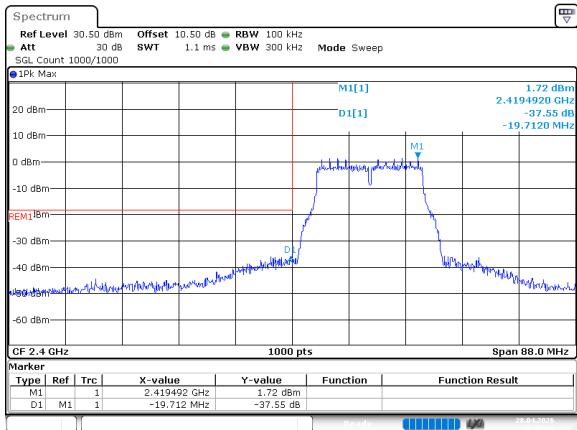


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:40:59

802.11g_2462MHz

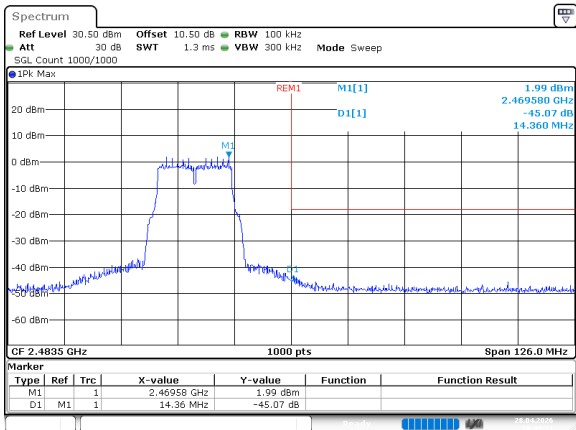


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:45:12

802.11n20_2412MHz

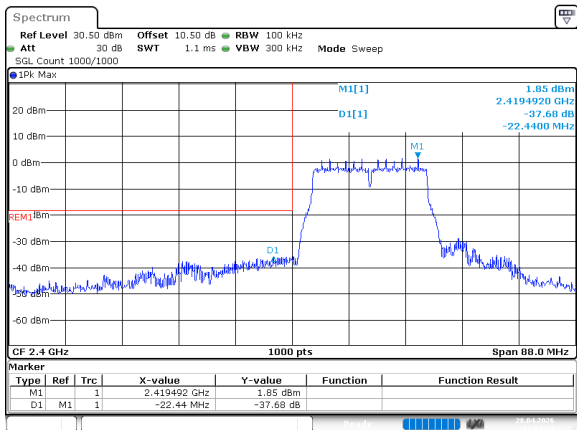


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:04:46

802.11n20_2462MHz

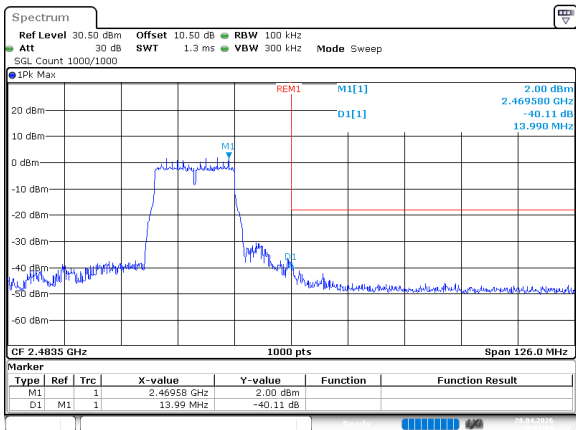


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:51:05

802.11n40_2422MHz

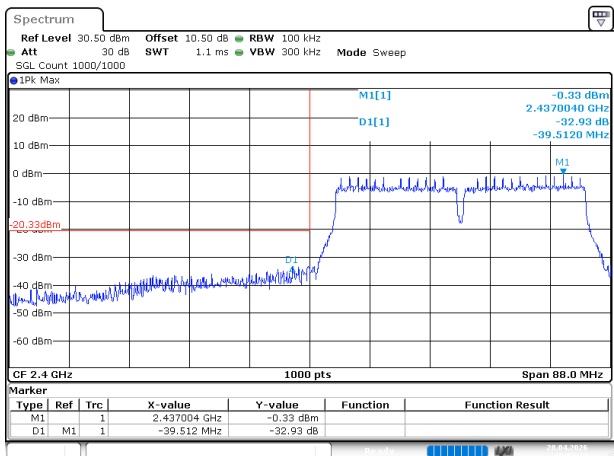


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:53:20

802.11n40_2452MHz

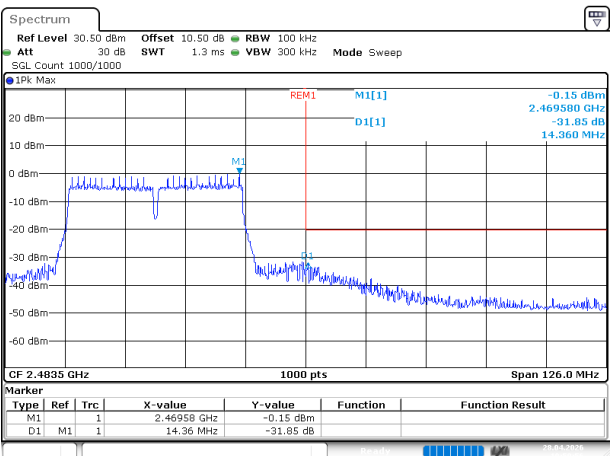


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:59:57

802.11ax20_2412MHz_RU_FULL

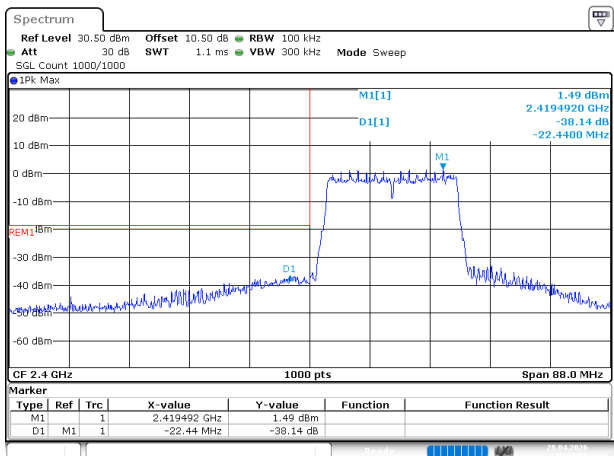


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:01:01

802.11ax20_2462MHz_RU_FULL

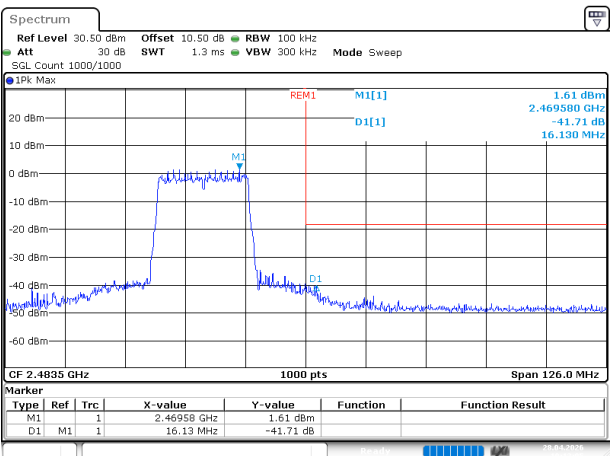


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:12:06

802.11ax40_2422MHz_RU_FULL

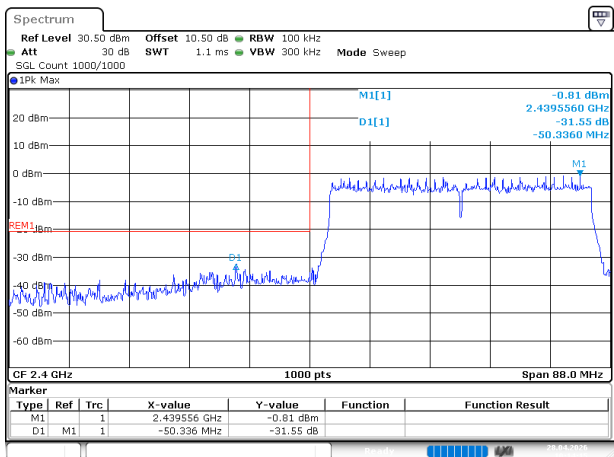

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:14:16

802.11ax40_2452MHz_RU_FULL

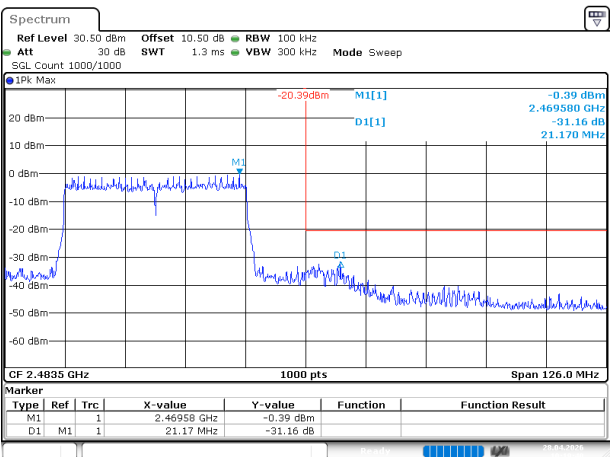

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 10:19:41

Duty Cycle**Test Information:**

Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	N/A

Environmental Conditions:


Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Data:

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)
802.11b	2437	16.786	17.033	98.55	/	/
802.11g	2437	2.787	2.868	97.18	0.12	359
802.11n20	2437	2.592	2.672	97.01	0.13	386
802.11n40	2437	1.268	1.345	94.28	0.26	789
802.11ax20_RU_FULL	2437	1.985	2.065	96.13	0.17	504
802.11ax40_RU_FULL	2437	1.022	1.098	93.08	0.31	978


Duty Cycle = Ton/(Ton+Toff)*100%

802.11b_2437MHz

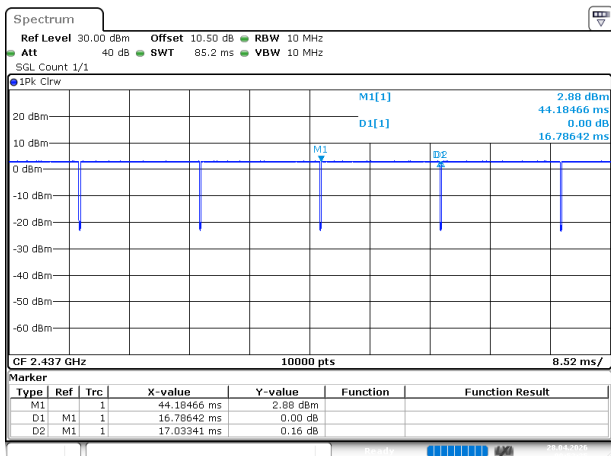


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 09:52:36

802.11g_2437MHz

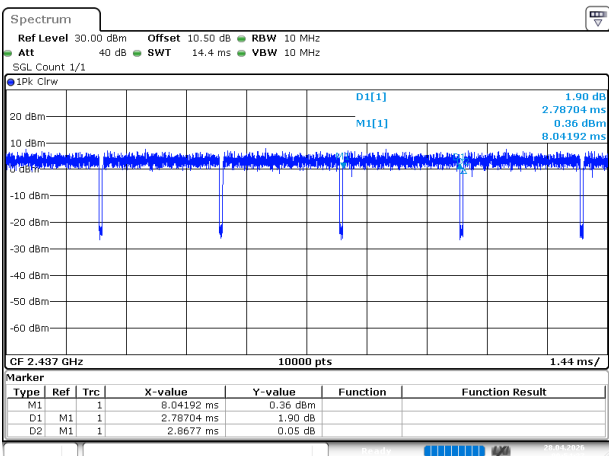


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 09:54:38

802.11n20_2437MHz

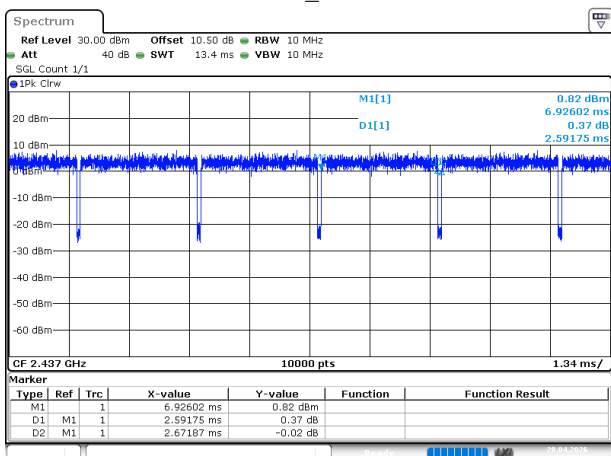


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 09:55:12

802.11n40_2437MHz

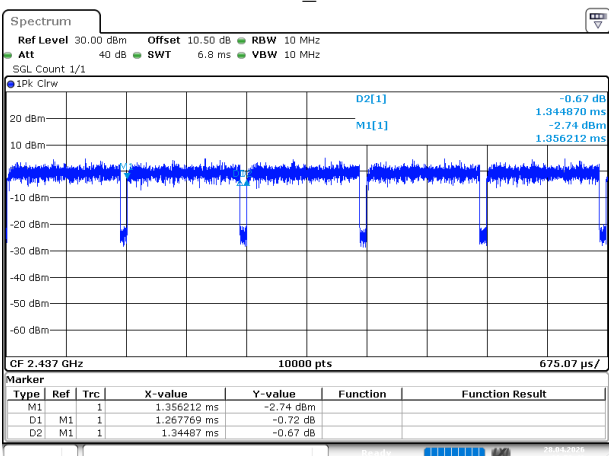


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 09:56:41

802.11ax20_2437MHz_RU_FULL

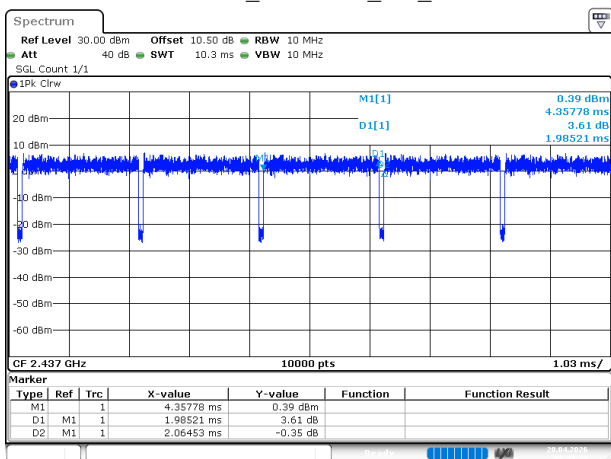

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 09:50:00

802.11ax40_2437MHz_RU_FULL

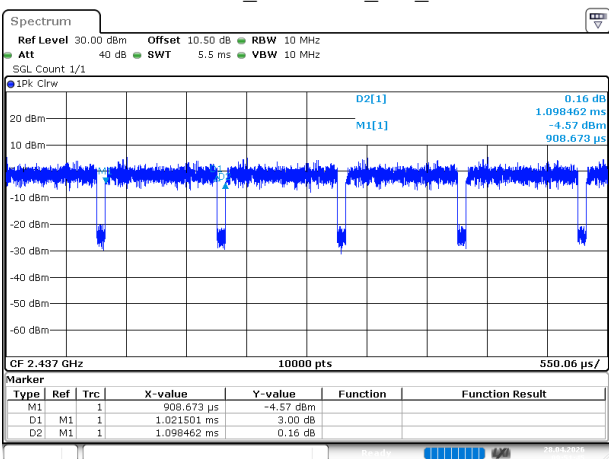

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 09:51:46

Conducted Spurious Emission**Test Information:**


Sample No.:	3L0P-4	Test Date:	2026/04/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Yuna Mo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----


Test Data:

802.11b_2412MHz

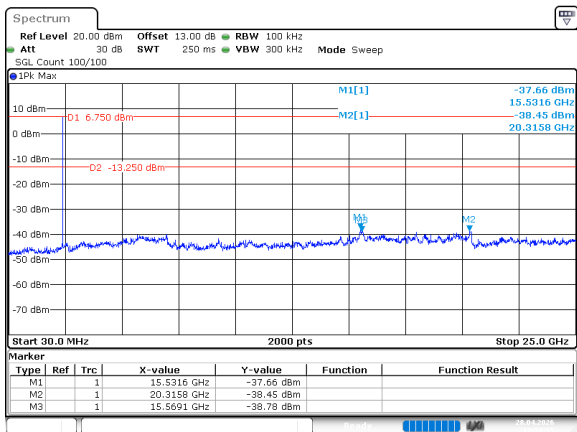


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:51:16

802.11b_2437MHz

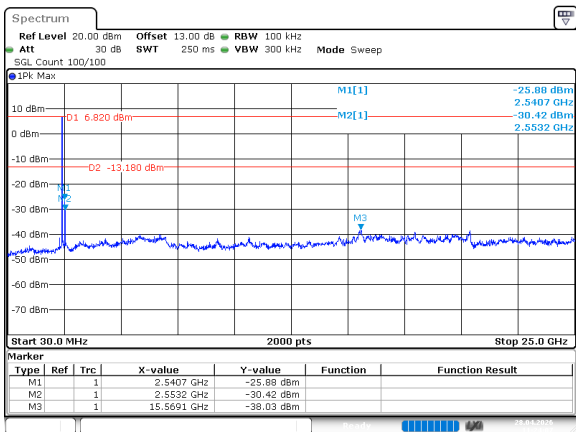


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:24:07

802.11b_2462MHz

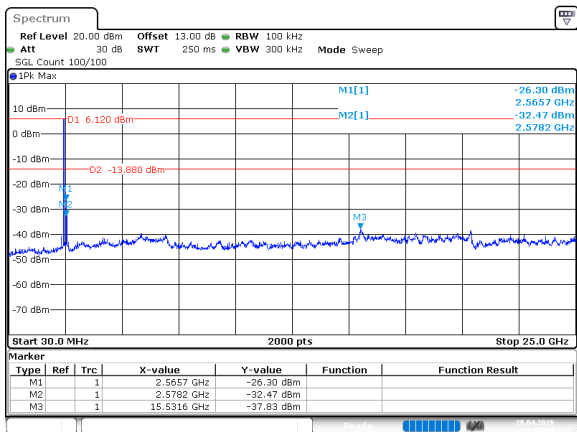


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:26:46

802.11g_2412MHz

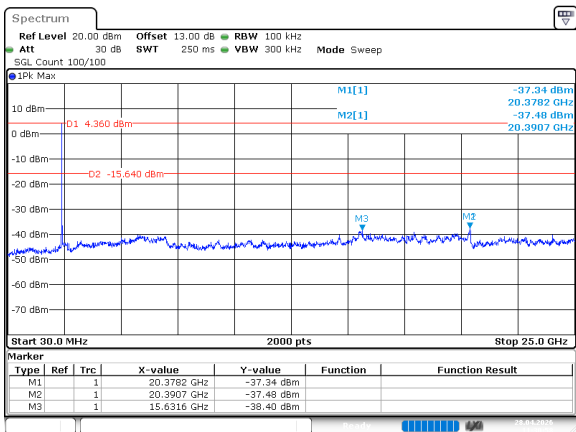


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:30:59

802.11g_2437MHz

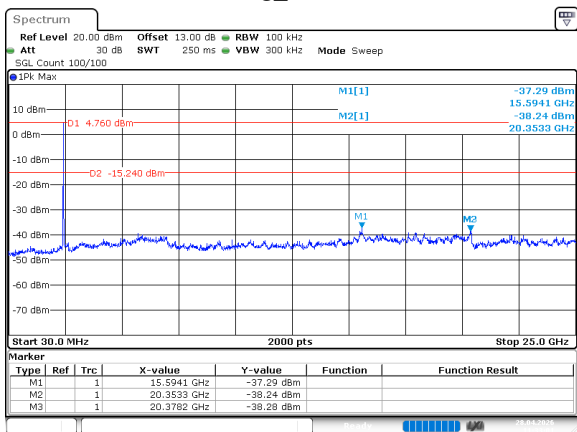


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:33:02

802.11g_2462MHz

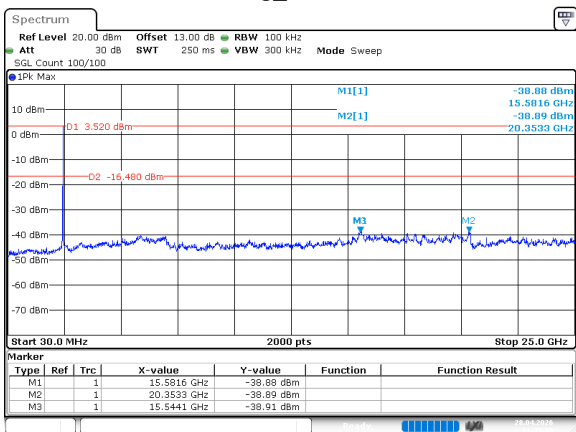


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:35:10

802.11n20_2412MHz

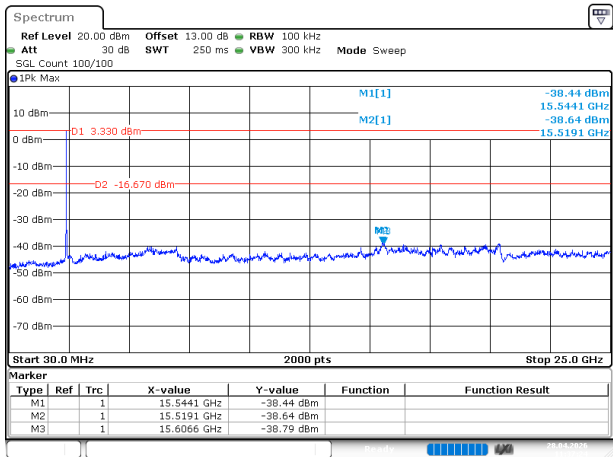


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:37:25

802.11n20_2437MHz

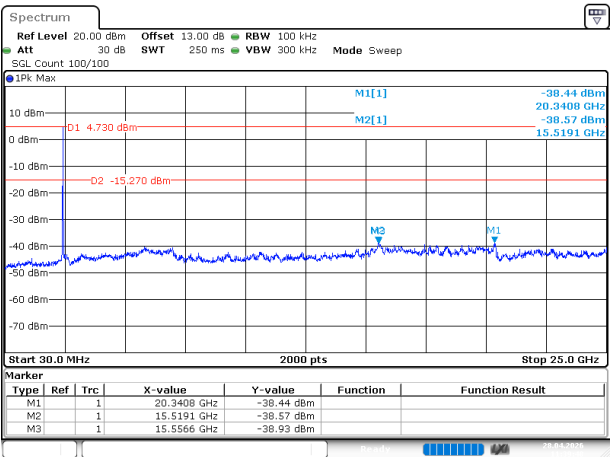


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:39:49

802.11n20_2462MHz

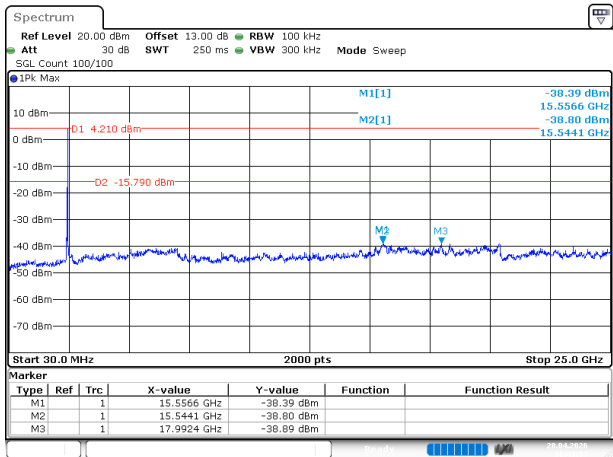


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:41:54

802.11n40_2422MHz

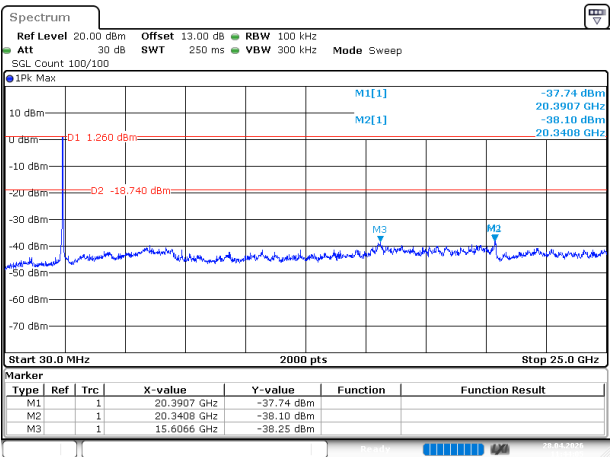


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:44:06

802.11n40_2437MHz

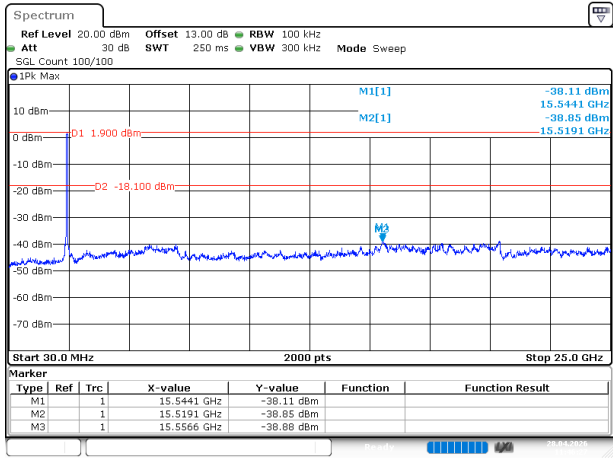


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:46:28

802.11n40_2452MHz

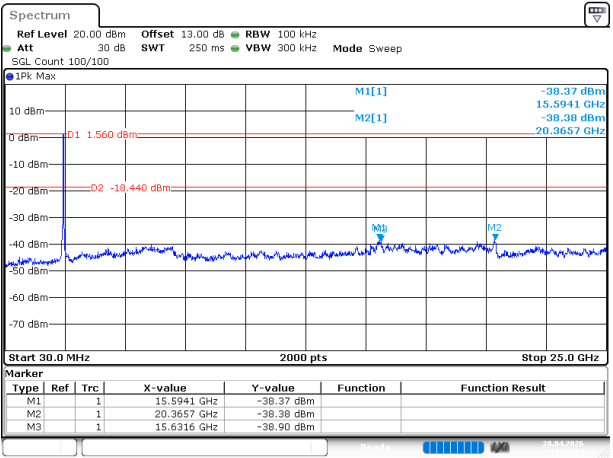


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:48:34

802.11ax20_2412MHz_RU_FULL

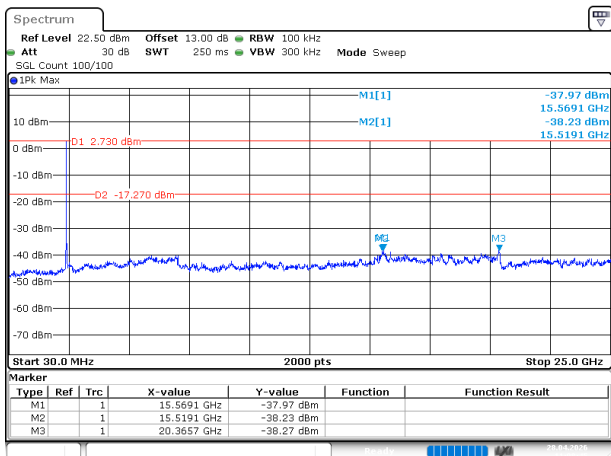


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:08:46

802.11ax20_2437MHz_RU_FULL

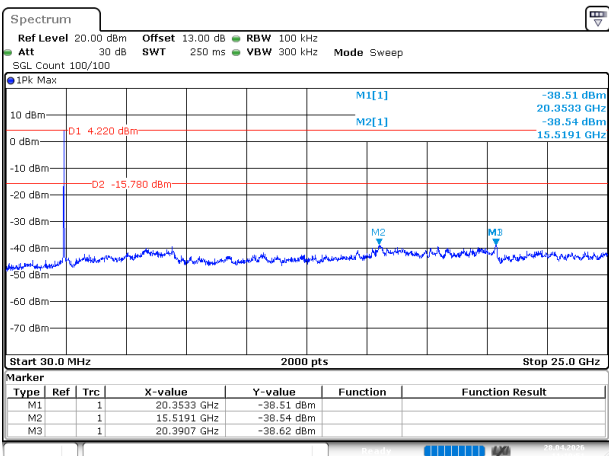


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:10:52

802.11ax20_2462MHz_RU_FULL

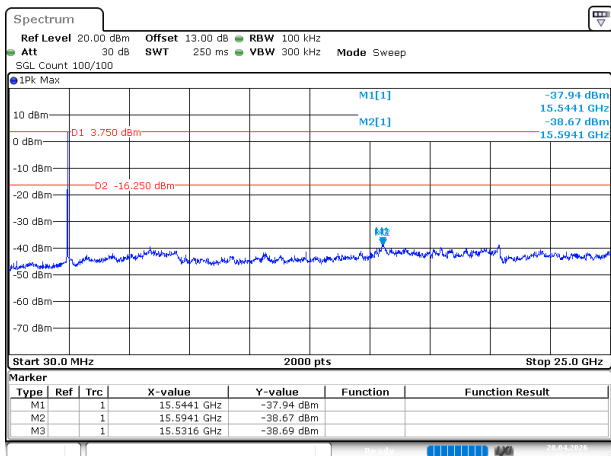


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:12:59

802.11ax40_2422MHz_RU_FULL

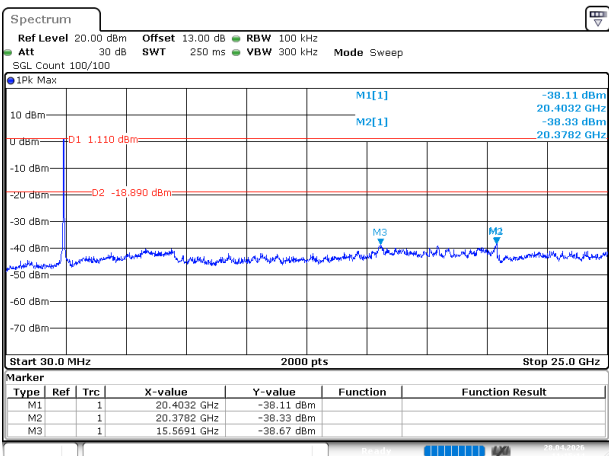


ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:15:15

802.11ax40_2437MHz_RU_FULL

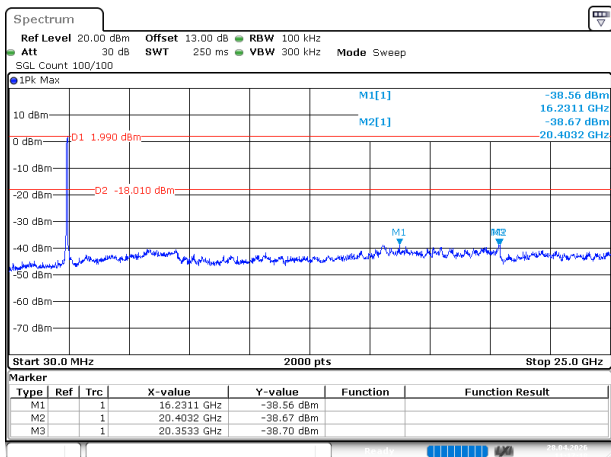

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:17:19

802.11ax40_2452MHz_RU_FULL

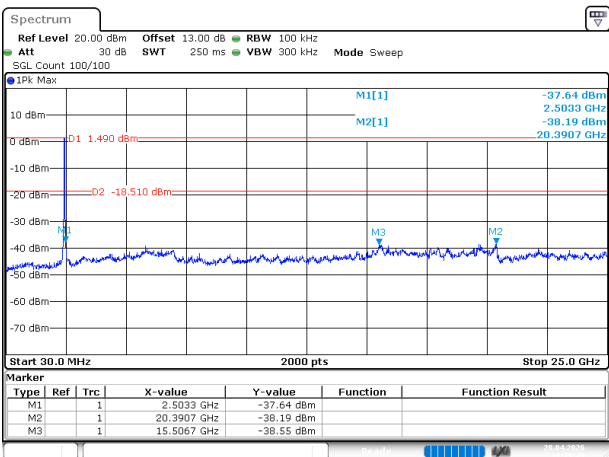

ProjectNo.:2601S21212E-RF Tester:Yuna Mo
Date: 28.APR.2026 11:19:49

EUT PHOTOGRAPHS

Please refer to the attachment 2601S21212E-RF-EXP External photo and 2601S21212E-RF-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2601S21212E-RF-TSPA Test Setup photo.

******* END OF REPORT *******