



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 1 of 87

TEST REPORT

Application No.: SHCR2602000296HS
FCC ID: 2AT72-ISSATEETH
Applicant: VIS (Shanghai) Technology Limited
Address of Applicant: No.58 Linsheng Road, Tinglin Town, Jinshan District, Shanghai, China
Manufacturer: FOREO AB
Address of Manufacturer: KARLAVÄGEN 41, 114, 31 STOCKHOLM, SWEDEN
Factory: VIS (Shanghai) Technology Limited
Address of Factory: No.58 Linsheng Road, Tinglin Town, Jinshan District, Shanghai, China
Equipment Under Test (EUT):
EUT Name: issa™ teeth whitening device
Model No.: issa™ teeth whitening device
Trade Mark: FOREO
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-02-02
Date of Test: 2026-02-03 to 2026-03-16
Date of Issue: 2026-03-17

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 2 of 87

Revision Record			
Version	Description	Date	Remark
00	Original	2026-03-17	/

Authorized for issue by:				
Tested By		Bill Wu		
		Bill Wu/Project Engineer		
Approved By		Parlam Zhan		
		Parlam Zhan / Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectral Density		ANSI C63.10 (2020) Section 11.10.3	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units.....	6
4.3 Power level setting using in test.....	6
4.4 Measurement Uncertainty	6
4.5 Test Location	7
4.6 Test Facility.....	7
4.7 Deviation from Standards	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	11
7.1.1 E.U.T. Operation	11
7.1.2 Test Mode Description	11
7.1.3 Test Setup Diagram	11
7.1.4 Measurement Procedure and Data.....	12
7.2 Radiated Emissions which fall in the restricted bands	15
7.2.1 E.U.T. Operation	15
7.2.2 Test Mode Description	15
7.2.3 Test Setup Diagram	16
7.2.4 Measurement Procedure and Data.....	16
7.3 Radiated Spurious Emissions Below 1GHz.....	25
7.3.1 E.U.T. Operation	25
7.3.2 Test Mode Description	25
7.3.3 Test Setup Diagram	26
7.3.4 Measurement Procedure and Data.....	26
7.4 Radiated Spurious Emissions Above 1GHz	31
7.4.1 E.U.T. Operation	31
7.4.2 Test Mode Description	31
7.4.3 Test Setup Diagram	31
7.4.4 Measurement Procedure and Data.....	32
7.5 Maximum Conducted Output Power	59
7.5.1 E.U.T. Operation	59
7.5.2 Test Mode Description	59
7.5.3 Test Setup Diagram	59
7.5.4 Measurement Procedure and Data.....	59
7.6 Minimum 6dB Bandwidth.....	60
7.6.1 E.U.T. Operation	60
7.6.2 Test Mode Description	60



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 5 of 87

7.6.3	Test Setup Diagram	60
7.6.4	Measurement Procedure and Data	60
7.7	Power Spectral Density	61
7.7.1	E.U.T. Operation	61
7.7.2	Test Mode Description	61
7.7.3	Test Setup Diagram	61
7.7.4	Measurement Procedure and Data	61
7.8	Conducted Band Edges Measurement	62
7.8.1	E.U.T. Operation	62
7.8.2	Test Mode Description	62
7.8.3	Test Setup Diagram	62
7.8.4	Measurement Procedure and Data	62
7.9	Conducted Spurious Emissions	63
7.9.1	E.U.T. Operation	63
7.9.2	Test Mode Description	63
7.9.3	Test Setup Diagram	63
7.9.4	Measurement Procedure and Data	63
8	Test Setup Photo	64
9	EUT Constructional Details (EUT Photos)	64
10	Appendix	64

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.7V 300mAh Rechargeable battery
Test voltage:	AC 120V 60Hz by Adapter
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Ceramic Antenna
Antenna Gain:	0.44 dBi (Provided by manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-
Serial port adapter plate	-	Test Plate 3	-
Adapter	MASS POWER	ED2-050100UE	-

4.3 Power level setting using in test

Channel	Power setting
2402	-3.6
2440	-3.6
2480	-3.6

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)
		5.0dB (6GHz-18GHz)
		5.4dB (18GHz-40GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2025/12/17	2026/12/16
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2025/04/30	2026/04/29
Signal Generator	R&S	SMR20	SHEM006-1	2025/07/30	2026/07/29
Signal Generator	Agilent	N5182A	SHEM182-1	2025/07/30	2026/07/29
Communication Tester	R&S	CMW270	SHEM183-1	2025/04/30	2026/04/29
Communication Tester	R&S	CMW500	SHEM268-1	2025/04/30	2026/04/29
Power Sensor	Keysight	U2021XA * 4	SHEM293-1	2025/07/30	2026/07/29
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2024/11/05	2026/11/04
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2025/12/17	2026/12/16
DC Power Supply	HP	6010A	SHEM222-1	2025/12/17	2026/12/16
Conducted test Cable	/	RF01~RF04	/	2025/12/17	2026/12/16
Switcher	Tonscend	JS0806	SHEM293-1	2025/07/30	2026/07/29
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2025/07/30	2026/07/29
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
Spectrum Analyzer	Keysight	N9010A	SHEM181-2	2025/04/30	2026/04/29
Communication Tester	R&S	CMW500	SHEM268-1	2025/04/30	2026/04/29
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2025/12/17	2026/12/16
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2025/08/31	2027/08/30
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2025/04/12	2027/04/11
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024/08/05	2026/08/04
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2025/08/31	2027/08/30
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2025/08/31	2027/08/30
Pre-Amplifier	HP	8447D	SHEM236-1	2025/12/17	2026/12/16
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2025/12/17	2026/12/16
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
RE test Cable	/	PT18-NMMN-10M	SHEM217-2	2025/07/30	2026/07/29
Test software	ESE	E3	Version: 6.111221a	/	/



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 9 of 87

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2025/12/17	2026/12/16
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2025/12/17	2026/12/16
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2025/12/17	2026/12/16
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2025/12/17	2026/12/16
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2026/12/18
CE test Cable	/	9kHz-30MHz	SHEM172-2	2025/12/17	2026/12/16
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is ceramic antenna and no consideration of replacement. The best case gain of the antenna is 0.44 dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.0 °C


Humidity: 50.8 % RH

Atmospheric Pressure: 1018 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

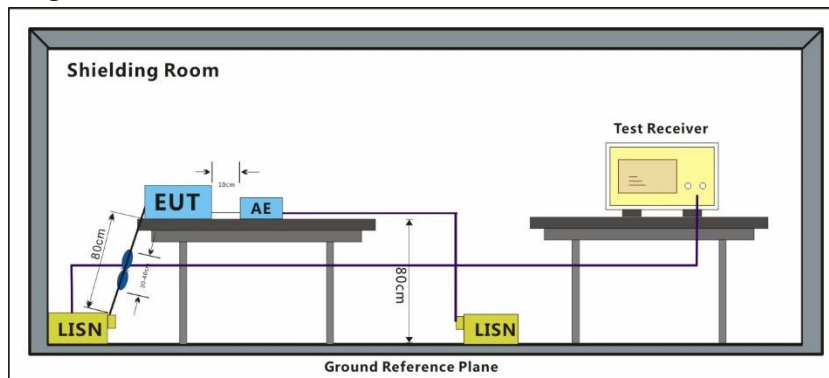


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

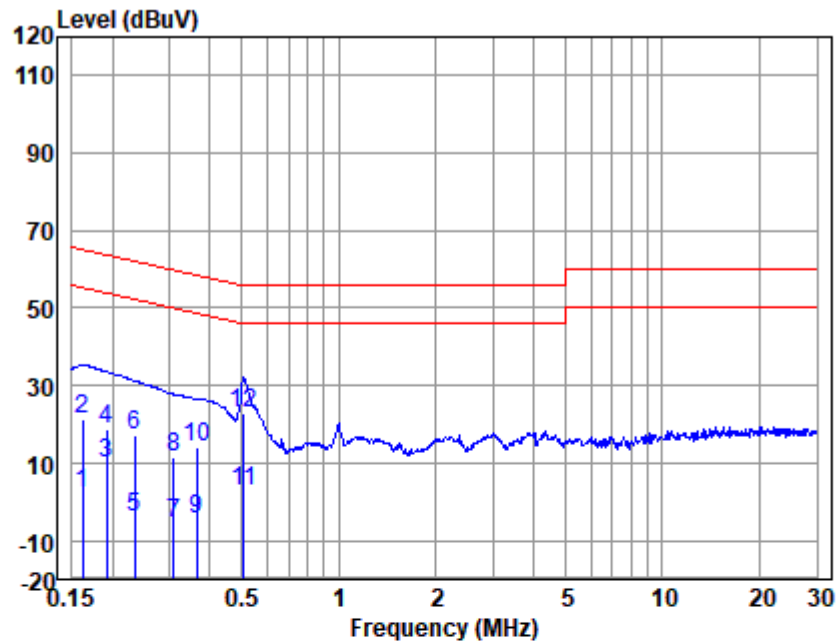


LISN : LINE
EUT/Project No : 0296HS
Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	-7.79	0.10	9.90	2.21	55.38	-53.17	Average
2	0.16	11.36	0.10	9.90	21.36	65.38	-44.02	QP
3	0.19	0.00	0.10	9.90	10.00	53.98	-43.98	Average
4	0.19	8.63	0.10	9.90	18.63	63.98	-45.35	QP
5	0.23	-14.10	0.10	9.90	-4.10	52.30	-56.40	Average
6	0.23	7.26	0.10	9.90	17.26	62.30	-45.04	QP
7	0.31	-15.76	0.10	9.90	-5.76	49.97	-55.73	Average
8	0.31	1.44	0.10	9.90	11.44	59.97	-48.53	QP
9	0.36	-14.72	0.10	9.90	-4.72	48.65	-53.37	Average
10	0.36	3.93	0.10	9.90	13.93	58.65	-44.72	QP
11	0.51	-7.15	0.10	9.90	2.85	46.00	-43.15	Average
12	0.51	12.71	0.10	9.90	22.71	56.00	-33.29	QP

Notes1: Emission Level = Read Level + LISN Factor + Cable loss

Notes2: Average in Remark means CISPR AV detector

Test Mode: 00; Line: Neutral Line

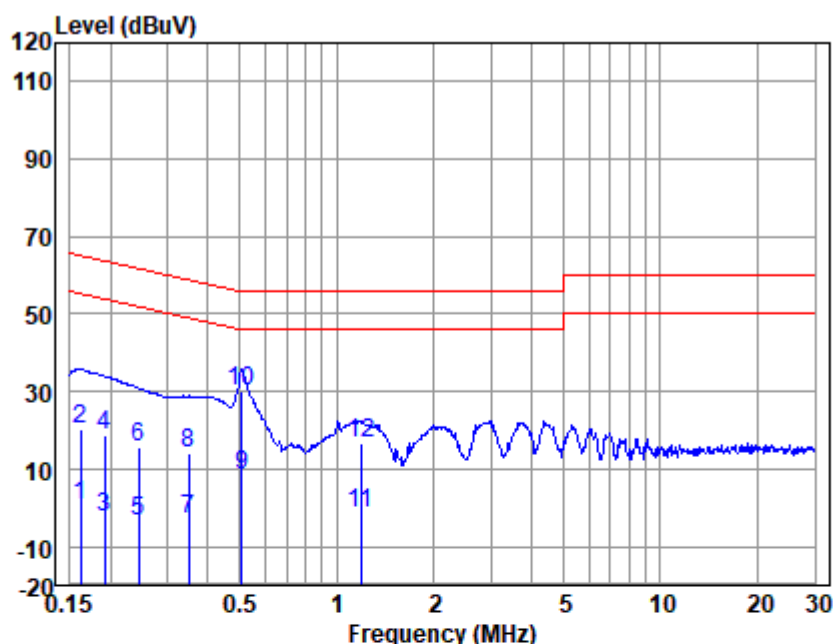

LISN : NEUTRAL

EUT/Project No : 0296HS

Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	-9.40	0.10	9.90	0.60	55.38	-54.78	Average
2	0.16	10.50	0.10	9.90	20.50	65.38	-44.88	QP
3	0.19	-12.52	0.10	9.90	-2.52	53.93	-56.45	Average
4	0.19	8.56	0.10	9.90	18.56	63.93	-45.37	QP
5	0.24	-13.49	0.10	9.90	-3.49	51.95	-55.44	Average
6	0.24	5.64	0.10	9.90	15.64	61.95	-46.31	QP
7	0.35	-13.07	0.10	9.90	-3.07	48.96	-52.03	Average
8	0.35	4.11	0.10	9.90	14.11	58.96	-44.85	QP
9	0.51	-1.69	0.10	9.90	8.31	46.00	-37.69	Average
10	0.51	19.94	0.10	9.90	29.94	56.00	-26.06	QP
11	1.18	-11.31	0.10	9.90	-1.31	46.00	-47.31	Average
12	1.18	6.53	0.10	9.90	16.53	56.00	-39.47	QP

Notes1: Emission Level = Read Level + LISN Factor + Cable loss

Notes2: Average in Remark means CISPR AV detector

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5 & 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 19.1 °C


Humidity: 41.0 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.2.3 Test Setup Diagram

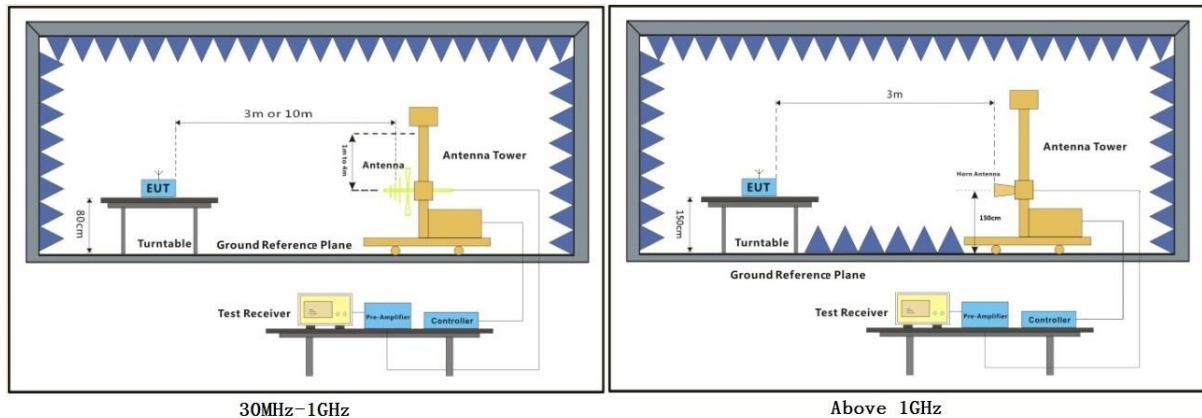


7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

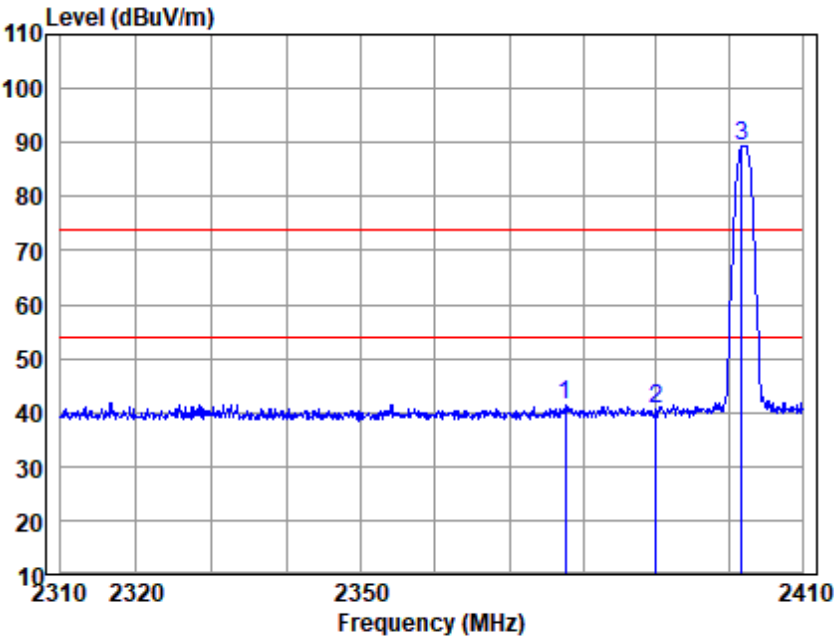


Antenna Polarity :HORIZONTAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2377.638	44.60	28.76	3.32	35.17	41.51	74.00	-32.49	Peak
2390.000	43.86	28.80	3.33	35.18	40.81	74.00	-33.19	Peak
2401.741	92.50	28.85	3.34	35.19	89.50	74.00	15.50	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

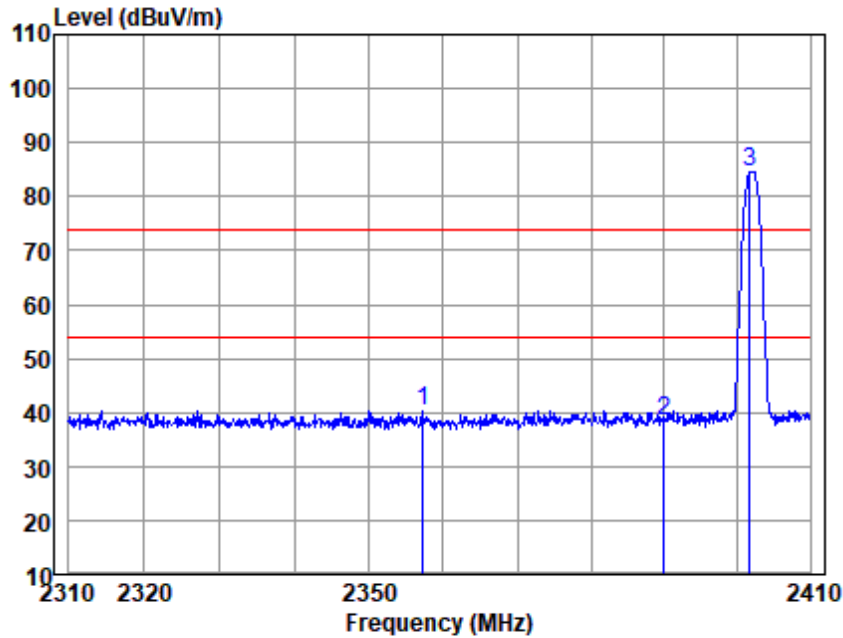


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2357.271	43.58	28.66	3.30	35.16	40.38	74.00	-33.62	Peak
2390.000	41.45	28.80	3.33	35.18	38.40	74.00	-35.60	Peak
2401.741	87.65	28.85	3.34	35.19	84.65	74.00	10.65	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

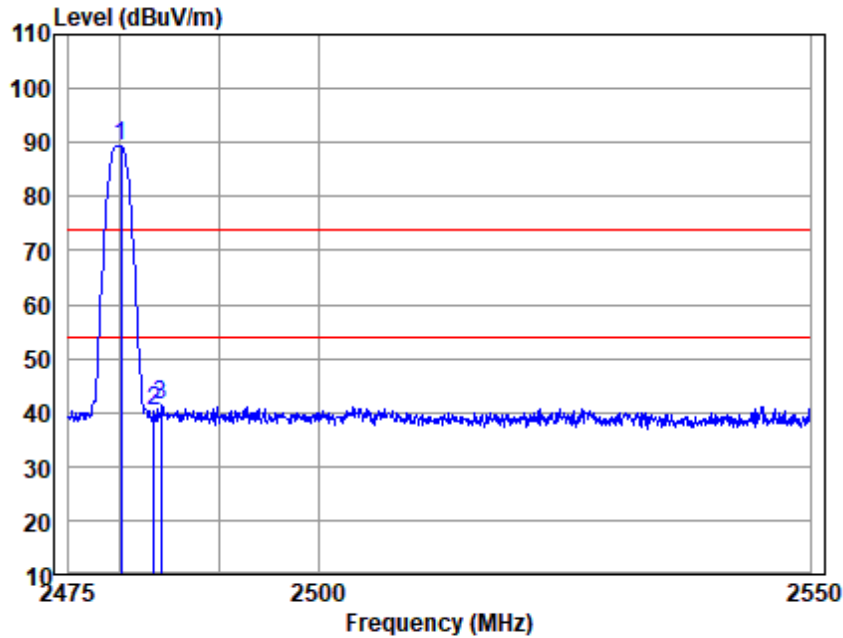


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.251	92.13	29.08	3.40	35.25	89.36	74.00	15.36	Peak
2483.500	43.11	29.09	3.41	35.26	40.35	74.00	-33.65	Peak
2484.253	43.98	29.09	3.41	35.26	41.22	74.00	-32.78	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

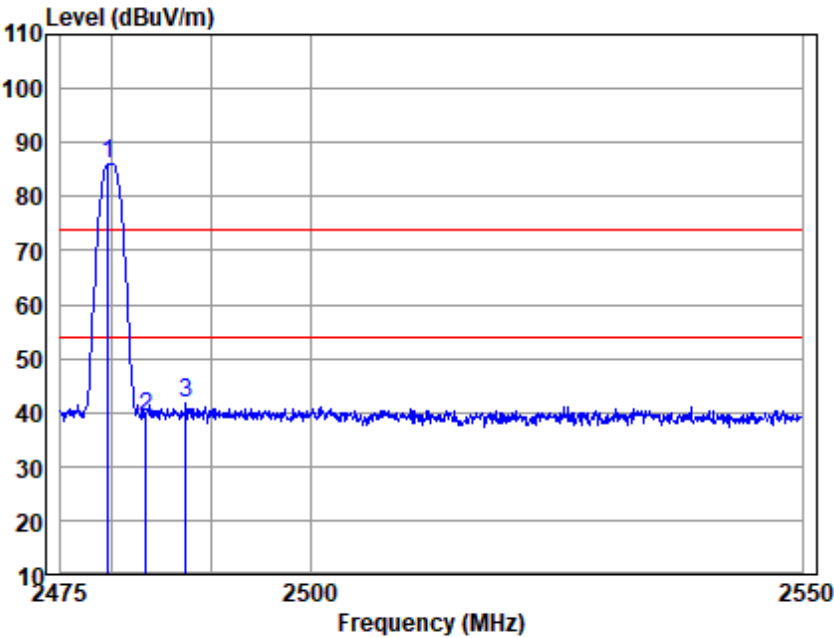


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2479.733	88.72	29.08	3.40	35.25	85.95	74.00	11.95	Peak
2483.500	42.03	29.09	3.41	35.26	39.27	74.00	-34.73	Peak
2487.518	44.46	29.09	3.41	35.26	41.70	74.00	-32.30	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

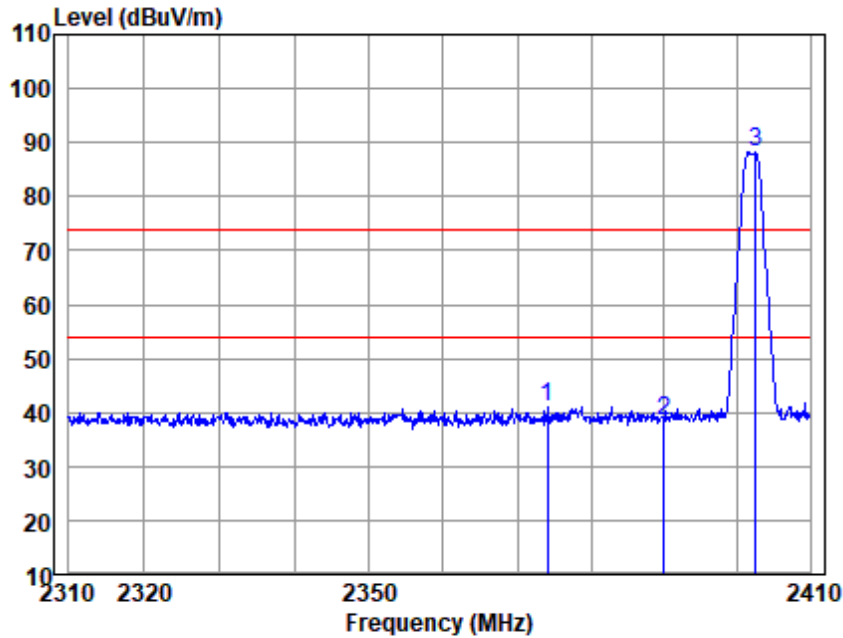


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2374.115	44.05	28.71	3.32	35.17	40.91	74.00	-33.09	Peak
2390.000	41.56	28.80	3.33	35.18	38.51	74.00	-35.49	Peak
2402.454	91.14	28.85	3.34	35.19	88.14	74.00	14.14	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

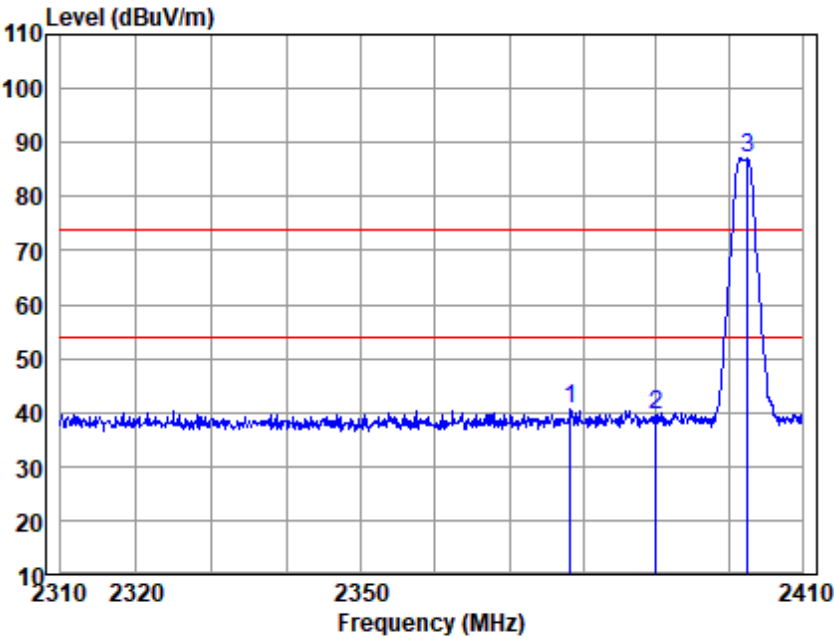


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2378.344	43.55	28.76	3.32	35.17	40.46	74.00	-33.54	Peak
2390.000	42.65	28.80	3.33	35.18	39.60	74.00	-34.40	Peak
2402.454	90.09	28.85	3.34	35.19	87.09	74.00	13.09	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

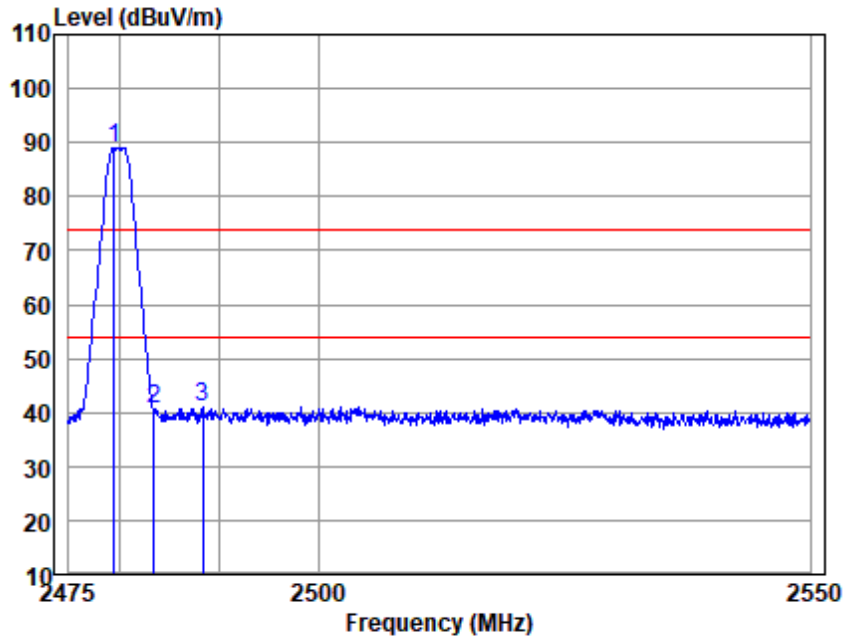


Antenna Polarity :HORIZONTAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2479.511	91.86	29.08	3.40	35.25	89.09	74.00	15.09	Peak
2483.500	43.43	29.09	3.41	35.26	40.67	74.00	-33.33	Peak
2488.410	43.71	29.09	3.41	35.26	40.95	74.00	-33.05	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

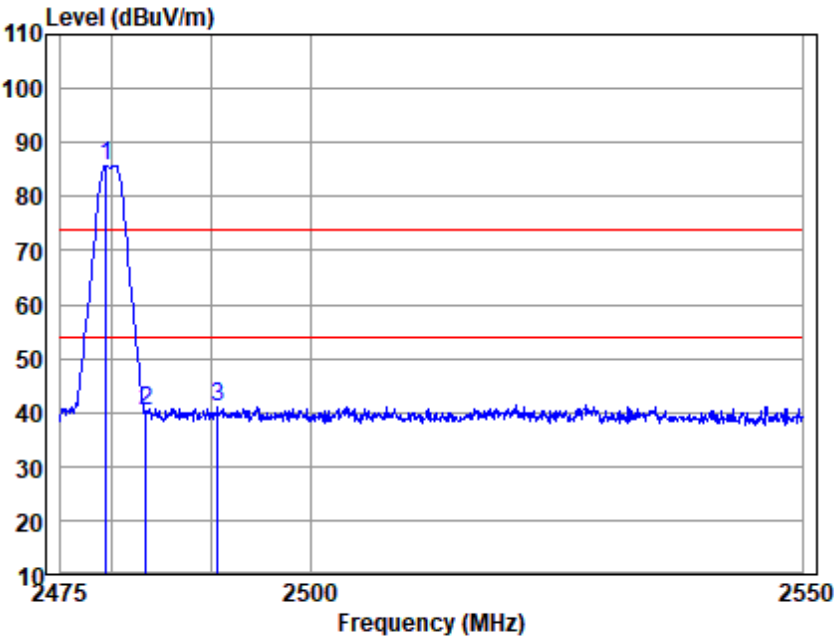

Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.511	88.56	29.08	3.40	35.25	85.79	74.00	11.79	Peak
2483.500	43.07	29.09	3.41	35.26	40.31	74.00	-33.69	Peak
2490.714	43.77	29.10	3.41	35.26	41.02	74.00	-32.98	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C


Humidity: 49.6 % RH

Atmospheric Pressure: 1033 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

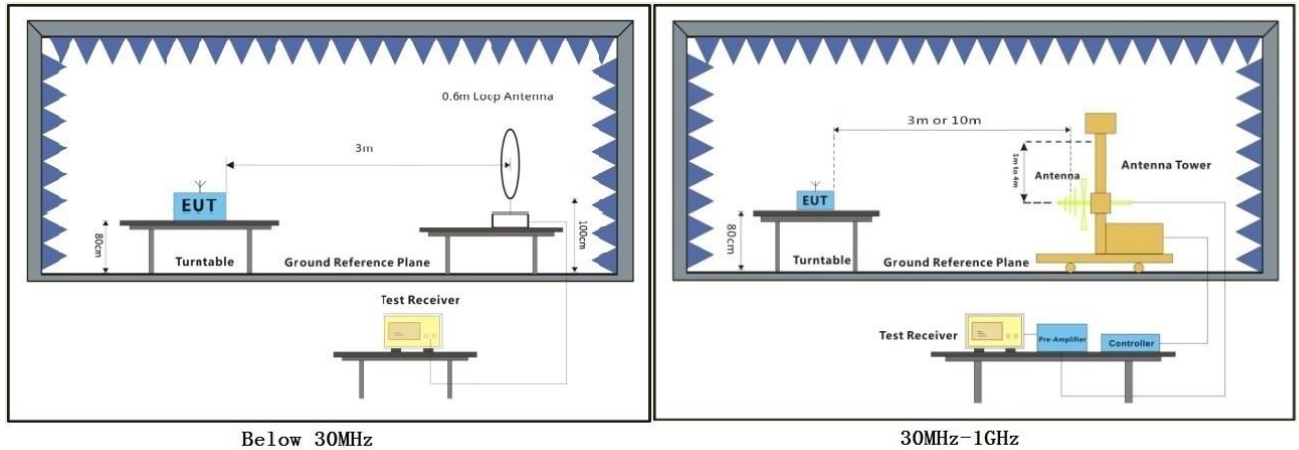


7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only below points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

Test Mode: 00; Polarity: Horizontal

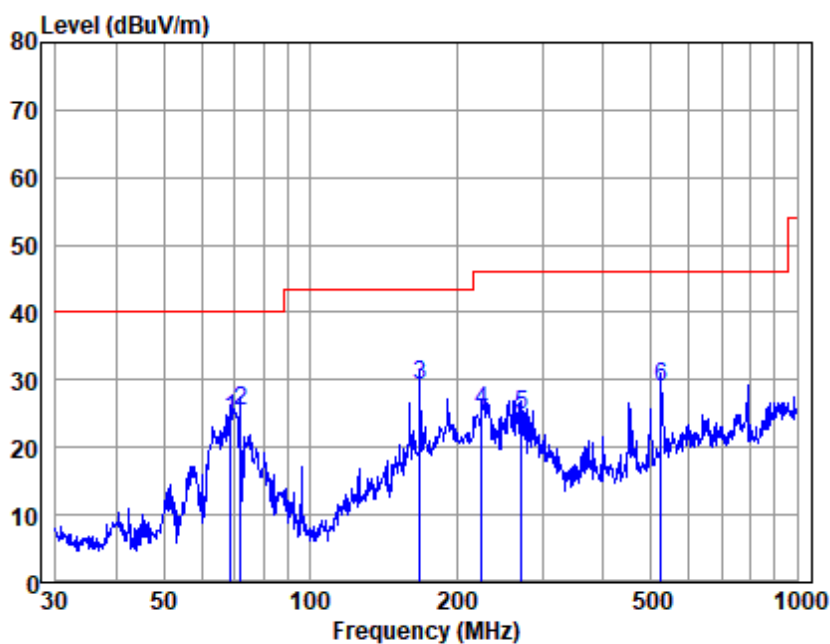

Antenna Polarity :HORIZONTAL


EUT/Project :0296HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	68.631	45.05	10.60	1.66	33.10	24.21	40.00	-15.79	QP
2	72.084	46.62	10.10	1.71	33.10	25.33	40.00	-14.67	QP
3	167.824	47.31	12.30	2.67	32.96	29.32	43.50	-14.18	QP
4	225.308	45.11	9.90	3.12	32.86	25.27	46.00	-20.73	QP
5	271.325	42.62	11.67	3.44	32.79	24.94	46.00	-21.06	QP
6	524.554	39.52	17.10	4.93	32.60	28.95	46.00	-17.05	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

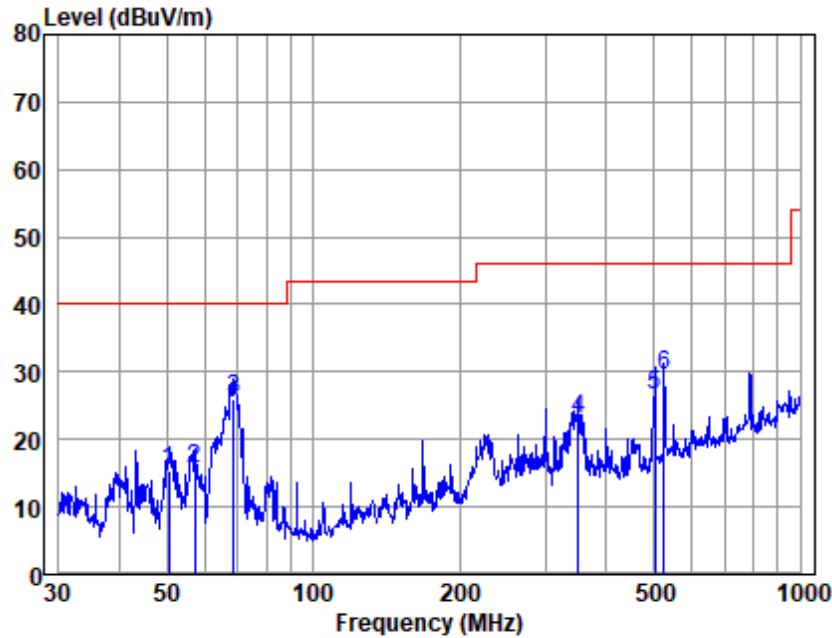


Antenna Polarity :VERTICAL
 EUT/Project :0296HS
 Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	50.409	33.93	13.10	1.41	33.20	15.24	40.00	-24.76	QP
2	56.991	35.10	12.20	1.51	33.13	15.68	40.00	-24.32	QP
3	68.631	46.87	10.60	1.66	33.10	26.03	40.00	-13.97	QP
4	350.477	37.61	14.10	3.94	32.70	22.95	46.00	-23.05	QP
5	504.706	37.25	17.10	4.83	32.60	26.58	46.00	-19.42	QP
6	526.397	39.98	17.10	4.96	32.60	29.44	46.00	-16.56	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Radiated Emissions(9kHz-30MHz)

Test Mode: 00; Polarity: Coaxial

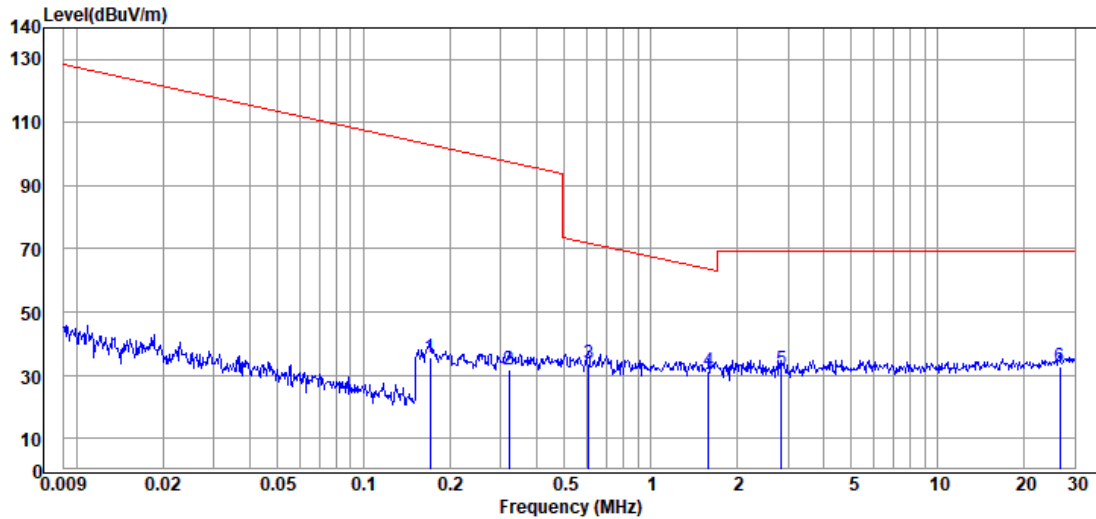


Item	Freq.	Read Level	Antenna Factor	Cable Loss	Result Level@3m	Result Level@SPEC	Limit Line@SPEC	Over Limit	Detector
(Mark)	(MHz)	(dBuV)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.170	18.09	17.30	0.30	35.69	-44.31	23.01	-67.32	Average
2	0.319	14.32	17.30	0.30	31.92	-48.08	17.52	-65.60	Average
3	0.606	15.77	17.40	0.30	33.47	-6.53	31.96	-38.49	QP
4	1.592	13.06	17.67	0.30	31.03	-8.97	23.60	-32.57	QP
5	2.854	13.47	17.79	0.30	31.56	-8.44	29.50	-37.94	QP
6	26.563	12.56	19.61	0.35	32.52	-7.48	29.50	-36.98	QP

Remark: Result Level@3m = Read Level + Antenna Factor + Cable Loss

Result Level@SPEC= Result Level@3m+ Distance Extrapolation Factor

Test Mode: 00; Polarity: Coplanar

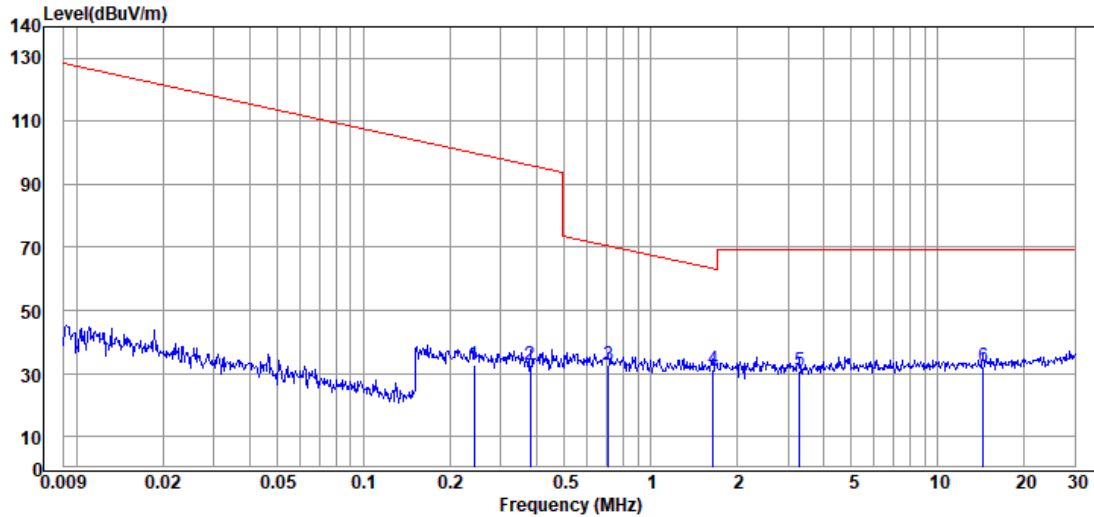

Item	Freq.	Read Level	Antenna Factor	Cable Loss	Result Level@3m	Result Level@SPEC	Limit Line@SPEC	Over Limit	Detector
(Mark)	(MHz)	(dBμV)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.242	15.25	17.30	0.30	32.85	-47.15	19.91	-67.06	Average
2	0.379	14.97	17.30	0.30	32.57	-47.43	16.04	-63.47	Average
3	0.713	15.14	17.41	0.30	32.85	-7.15	30.55	-37.70	QP
4	1.644	13.47	17.67	0.30	31.44	-8.56	23.31	-31.87	QP
5	3.303	12.66	17.83	0.30	30.79	-9.21	29.50	-38.71	QP
6	14.340	13.38	18.45	0.35	32.18	-7.82	29.50	-37.32	QP

Remark: Result Level@3m = Read Level + Antenna Factor + Cable Loss

Result Level@SPEC= Result Level@3m+ Distance Extrapolation Factor

Note: For test distance other than what is specified, but fulfilling the requirements of section 15.31(f) (2) the field strength is calculated by adding additionally an extrapolation factor of 40dB/decade (inverse linear distance for field strength measurements). So the Distance Extrapolation Factor in dB is $40 \cdot \log(D_{TEST} / D_{SPEC})$ where D_{TEST} = Test Distance and D_{SPEC} = Specified Distance. Field strength limit (dBμV/m)@test distance= Field strength limit (dBμV/m)@specified distance +Distance Extrapolation Factor

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 11.12

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 52.4 % RH

Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

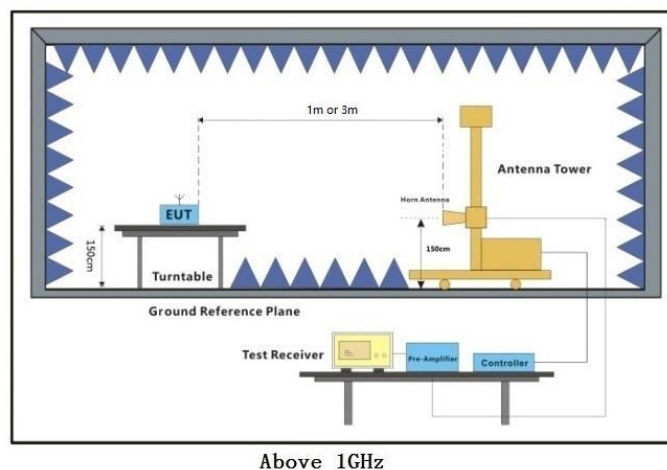


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst-case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

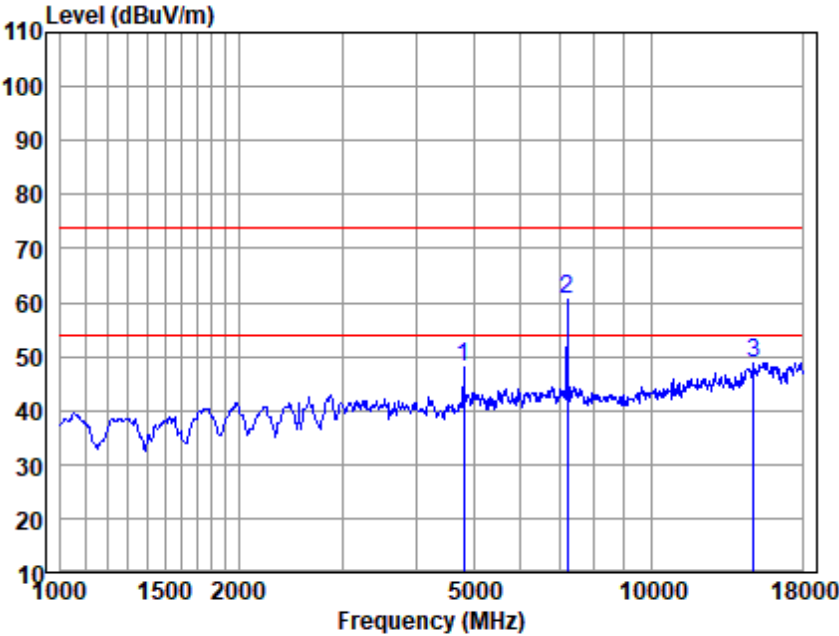


Antenna Polarity :HORIZONTAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4804.110	46.01	33.57	5.23	36.79	48.02	74.00	-25.98	Peak
7200.309	54.47	36.24	7.33	37.53	60.51	74.00	-13.49	Peak
14916.940	34.94	42.65	11.97	40.99	48.57	74.00	-25.43	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

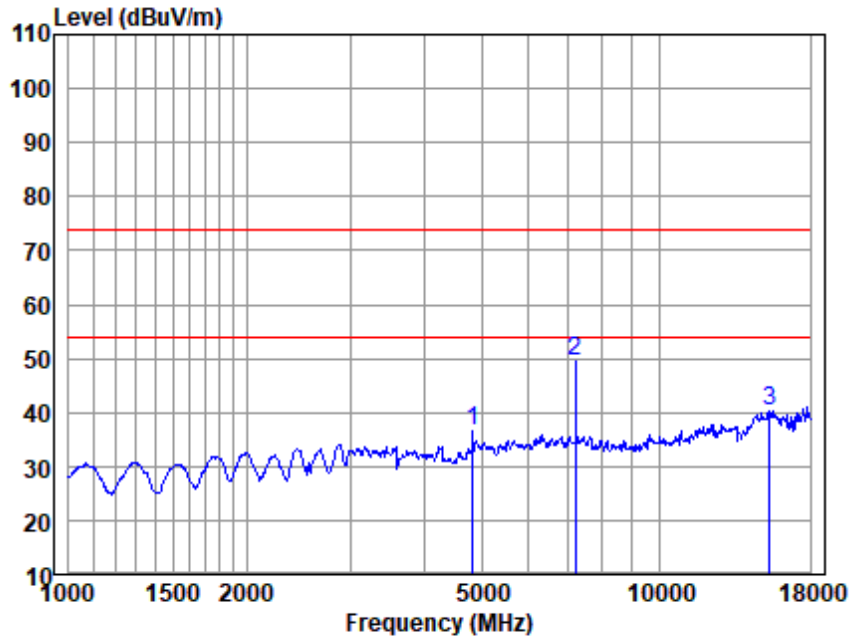


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4831.962	34.61	33.63	5.25	36.79	36.70	54.00	-17.30	Average
7221.150	43.56	36.26	7.34	37.51	49.65	54.00	-4.35	Average
15354.390	26.36	43.59	12.24	41.83	40.36	54.00	-13.64	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

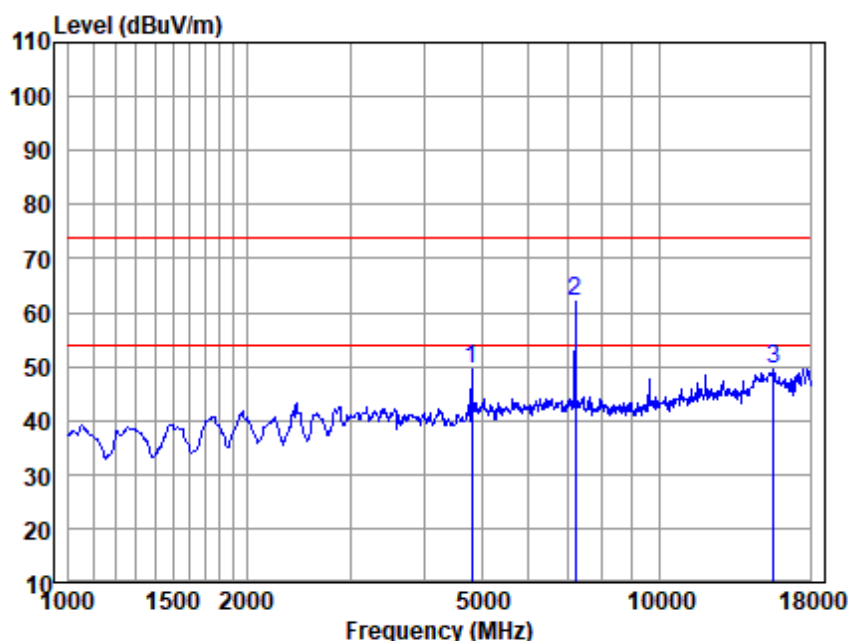


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	47.40	33.57	5.23	36.79	49.41	74.00	-24.59	Peak
7200.309	56.09	36.24	7.33	37.53	62.13	74.00	-11.87	Peak
15622.990	34.88	43.19	12.40	40.81	49.66	74.00	-24.34	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

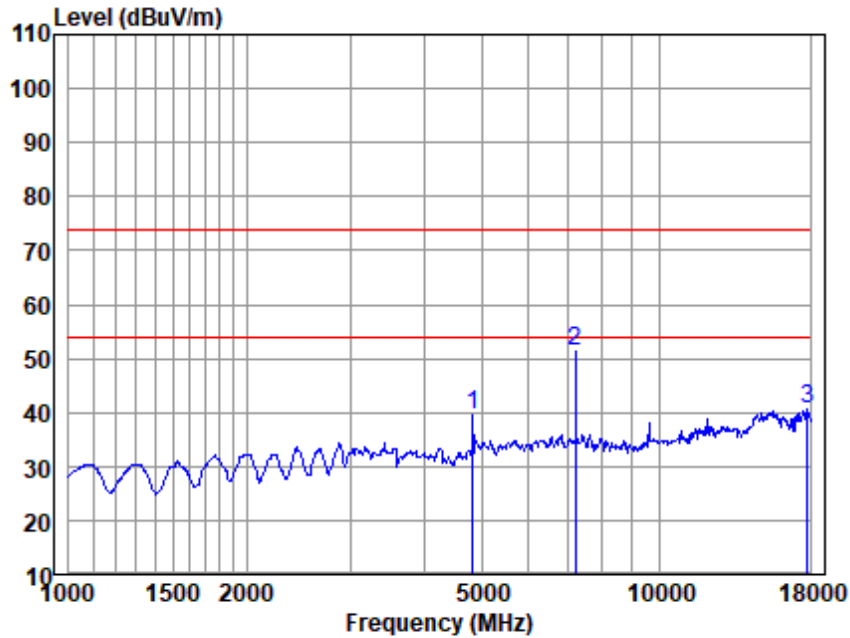


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4831.962	37.35	33.63	5.25	36.79	39.44	54.00	-14.56	Average
7221.150	45.28	36.26	7.34	37.51	51.37	54.00	-2.63	Average
17793.090	24.73	42.90	13.75	40.64	40.74	54.00	-13.26	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

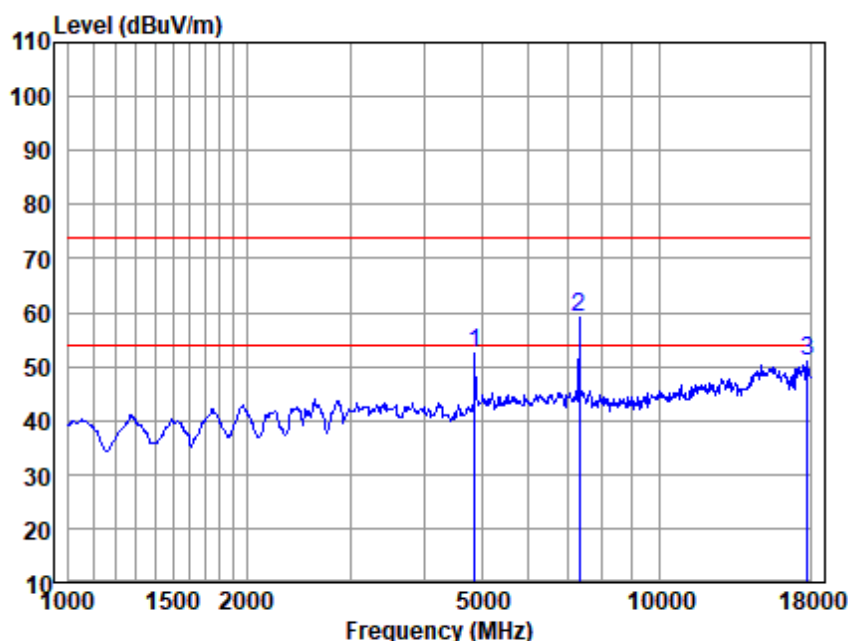


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4874.043	50.47	33.66	5.28	36.81	52.60	74.00	-21.40	Peak
7326.267	52.57	36.33	7.44	37.42	58.92	74.00	-15.08	Peak
17793.090	34.81	42.90	13.75	40.64	50.82	74.00	-23.18	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

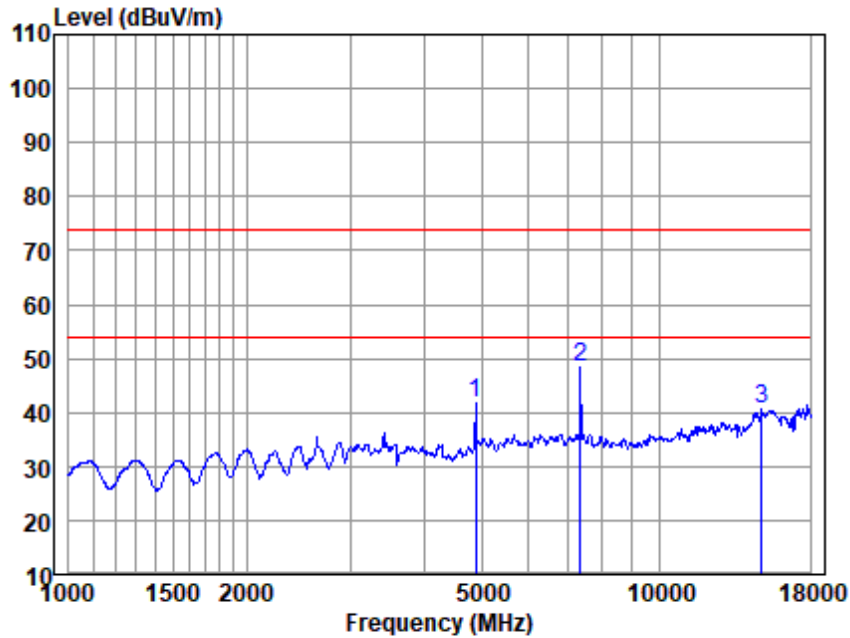


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4888.151	39.48	33.66	5.29	36.81	41.62	54.00	-12.38	Average
7347.474	41.94	36.35	7.45	37.41	48.33	54.00	-5.67	Average
14916.940	26.98	42.65	11.97	40.99	40.61	54.00	-13.39	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

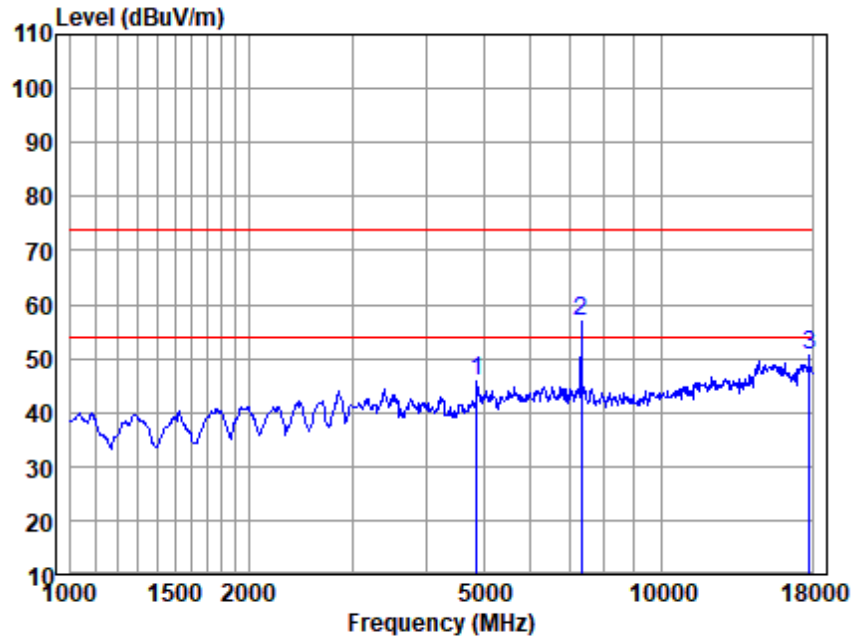


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4874.043	43.76	33.66	5.28	36.81	45.89	74.00	-28.11	Peak
7326.267	50.37	36.33	7.44	37.42	56.72	74.00	-17.28	Peak
17793.090	34.66	42.90	13.75	40.64	50.67	74.00	-23.33	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

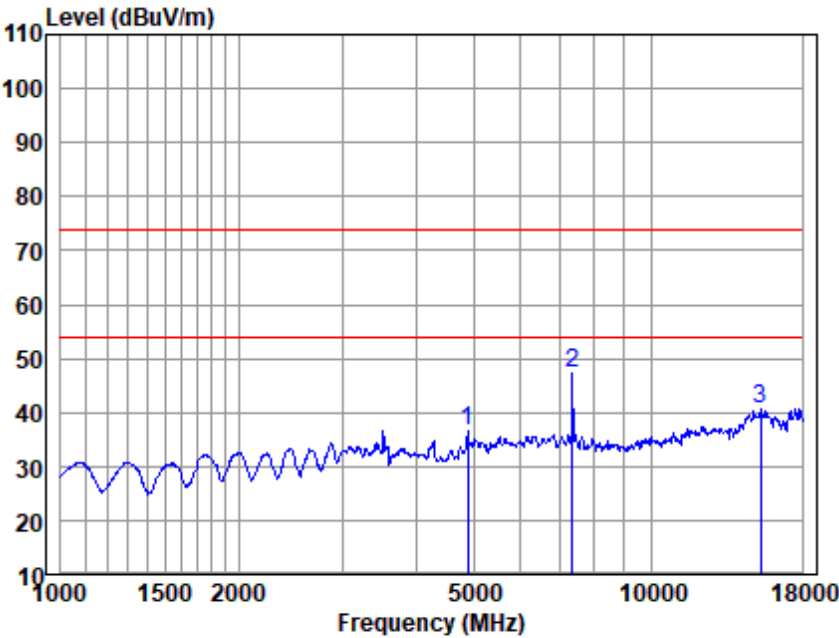


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4888.151	34.27	33.66	5.29	36.81	36.41	54.00	-17.59	Average
7347.474	40.83	36.35	7.45	37.41	47.22	54.00	-6.78	Average
15310.070	26.67	43.48	12.21	41.83	40.53	54.00	-13.47	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

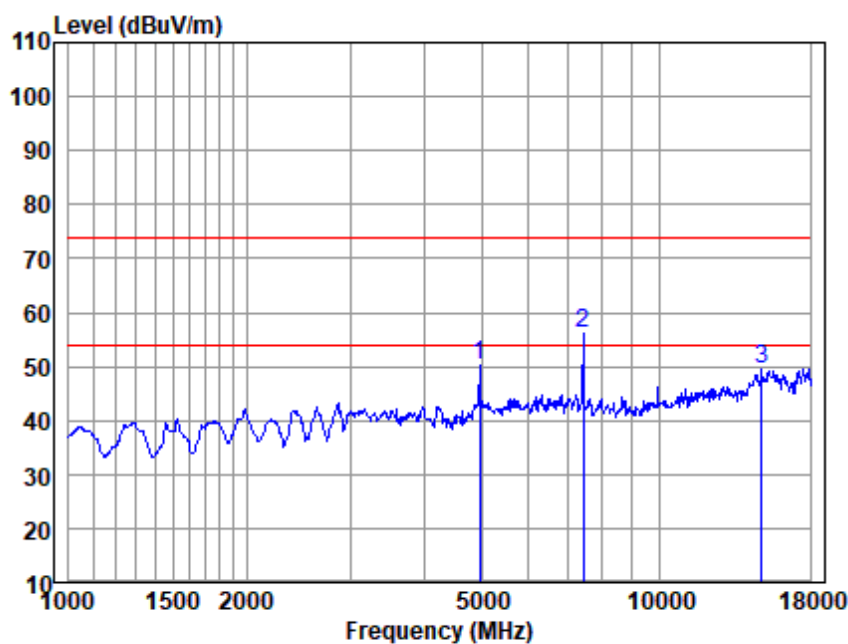


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4959.307	47.89	33.65	5.34	36.83	50.05	74.00	-23.95	Peak
7432.914	49.61	36.31	7.53	37.34	56.11	74.00	-17.89	Peak
14916.940	35.92	42.65	11.97	40.99	49.55	74.00	-24.45	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

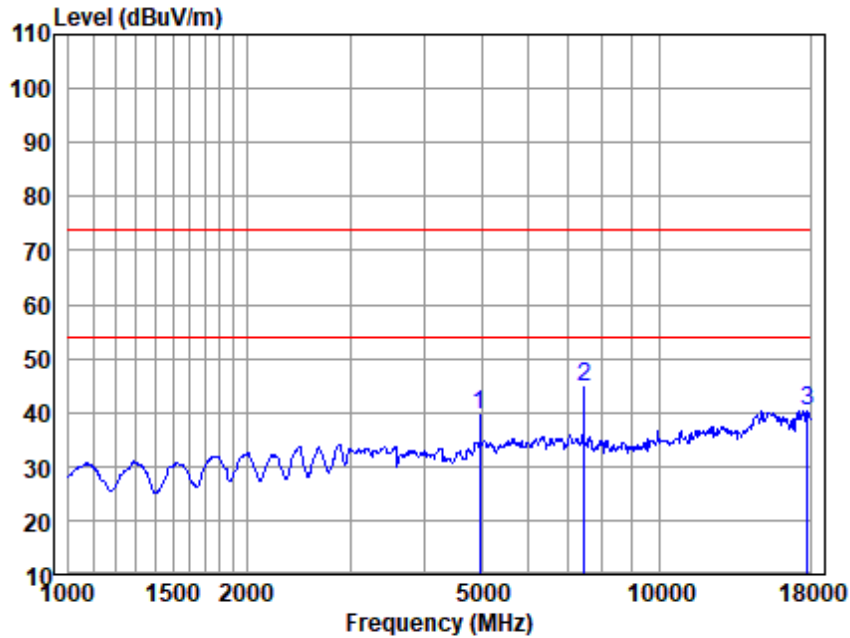


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4973.662	37.28	33.66	5.36	36.83	39.47	54.00	-14.53	Average
7454.429	38.14	36.29	7.55	37.32	44.66	54.00	-9.34	Average
17844.590	24.22	42.99	13.79	40.57	40.43	54.00	-13.57	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

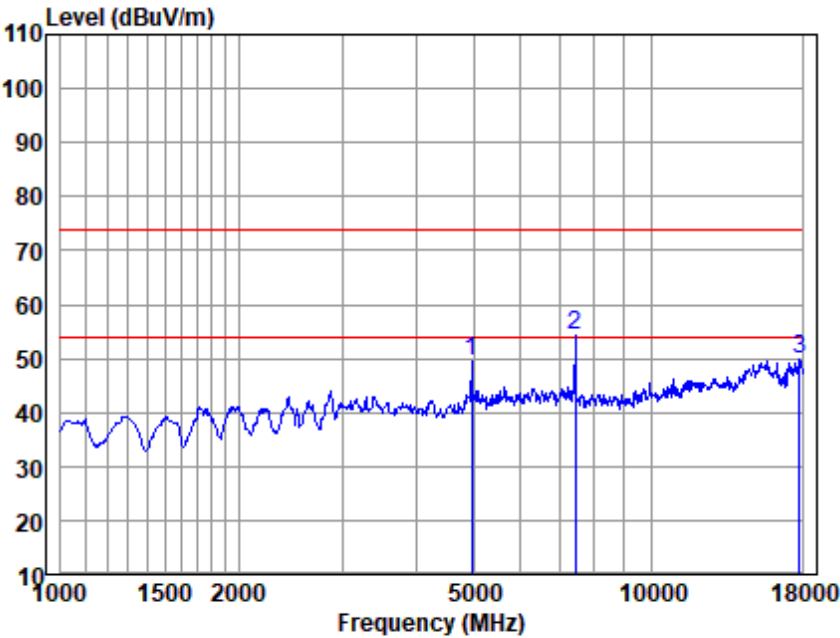


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4959.307	47.44	33.65	5.34	36.83	49.60	74.00	-24.40	Peak
7432.914	47.82	36.31	7.53	37.34	54.32	74.00	-19.68	Peak
17793.090	33.92	42.90	13.75	40.64	49.93	74.00	-24.07	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

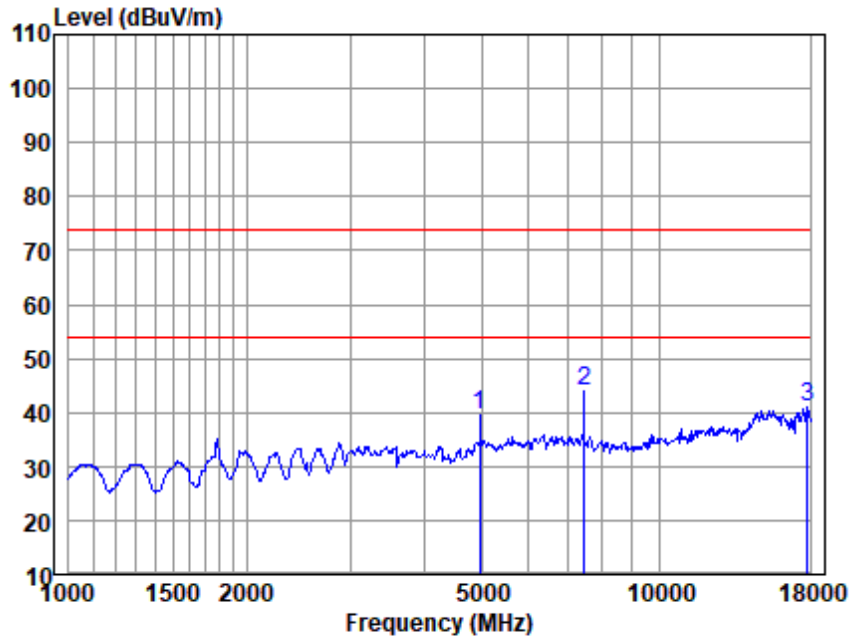


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4973.662	37.50	33.66	5.36	36.83	39.69	54.00	-14.31	Average
7454.429	37.40	36.29	7.55	37.32	43.92	54.00	-10.08	Average
17793.090	24.84	42.90	13.75	40.64	40.85	54.00	-13.15	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

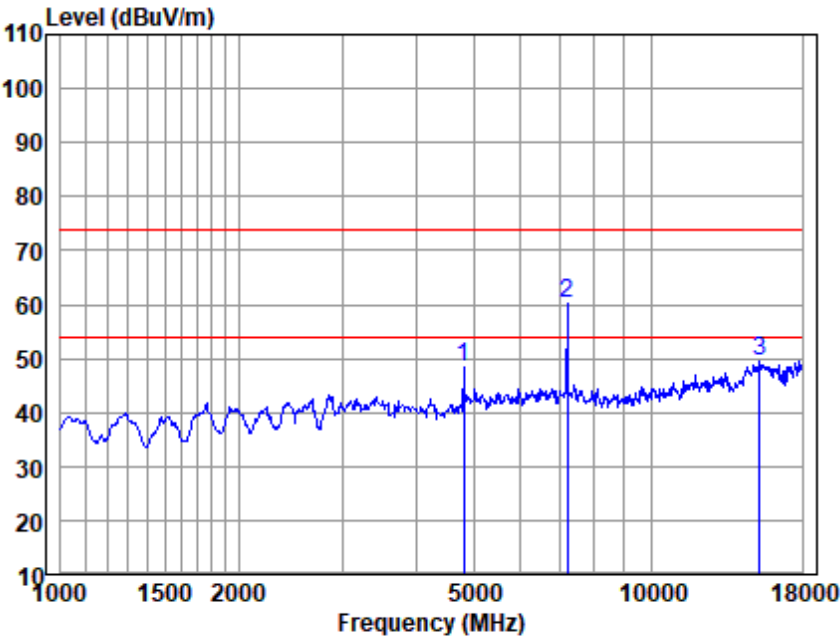


Antenna Polarity :HORIZONTAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4804.110	46.28	33.57	5.23	36.79	48.29	74.00	-25.71	Peak
7200.309	54.25	36.24	7.33	37.53	60.29	74.00	-13.71	Peak
15265.880	35.80	43.33	12.18	41.83	49.48	74.00	-24.52	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

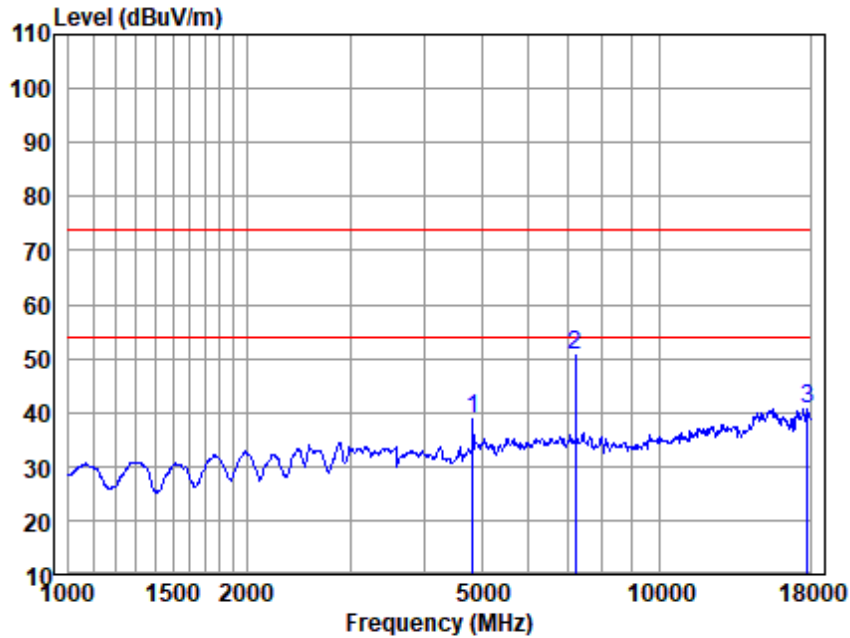


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4831.962	36.54	33.63	5.25	36.79	38.63	54.00	-15.37	Average
7221.150	44.47	36.26	7.34	37.51	50.56	54.00	-3.44	Average
17793.090	24.73	42.90	13.75	40.64	40.74	54.00	-13.26	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

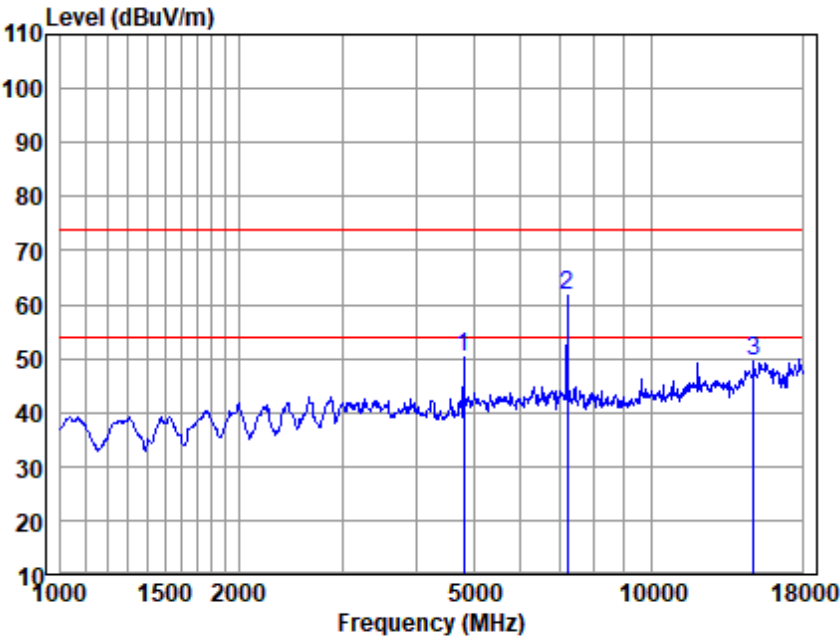


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	48.22	33.57	5.23	36.79	50.23	74.00	-23.77	Peak
7200.309	55.62	36.24	7.33	37.53	61.66	74.00	-12.34	Peak
14916.940	35.77	42.65	11.97	40.99	49.40	74.00	-24.60	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

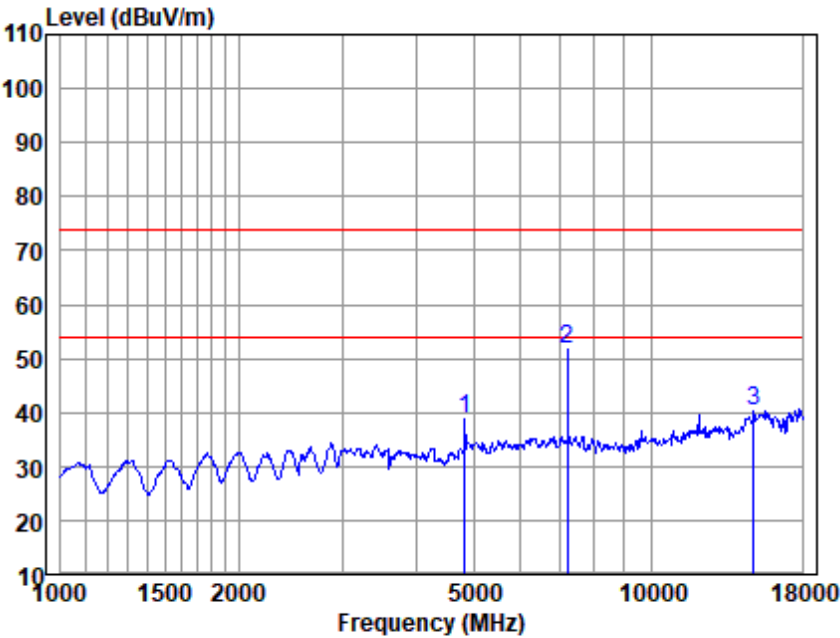


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4831.962	36.84	33.63	5.25	36.79	38.93	54.00	-15.07	Average
7221.150	45.79	36.26	7.34	37.51	51.88	54.00	-2.12	Average
14916.940	26.59	42.65	11.97	40.99	40.22	54.00	-13.78	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

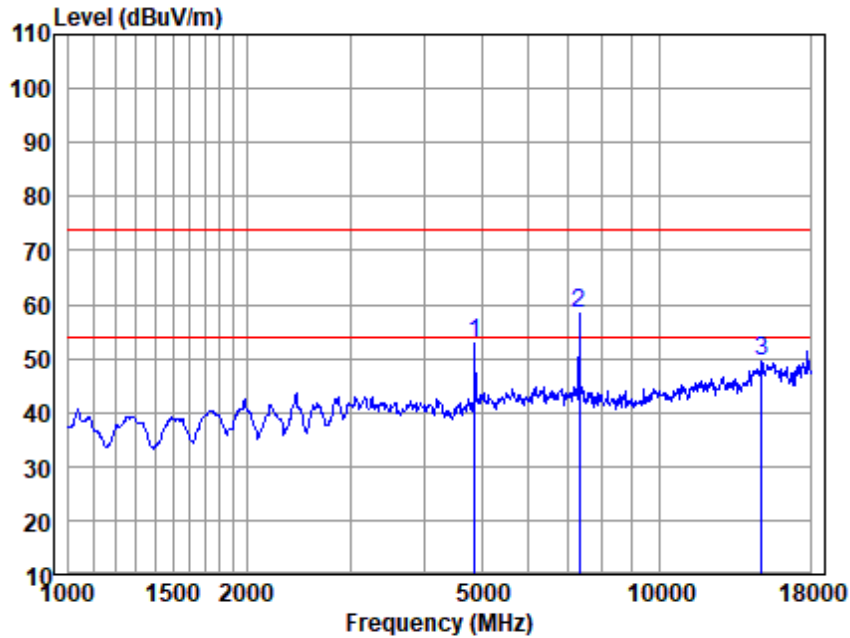


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4874.043	50.68	33.66	5.28	36.81	52.81	74.00	-21.19	Peak
7326.267	51.92	36.33	7.44	37.42	58.27	74.00	-15.73	Peak
14916.940	35.96	42.65	11.97	40.99	49.59	74.00	-24.41	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

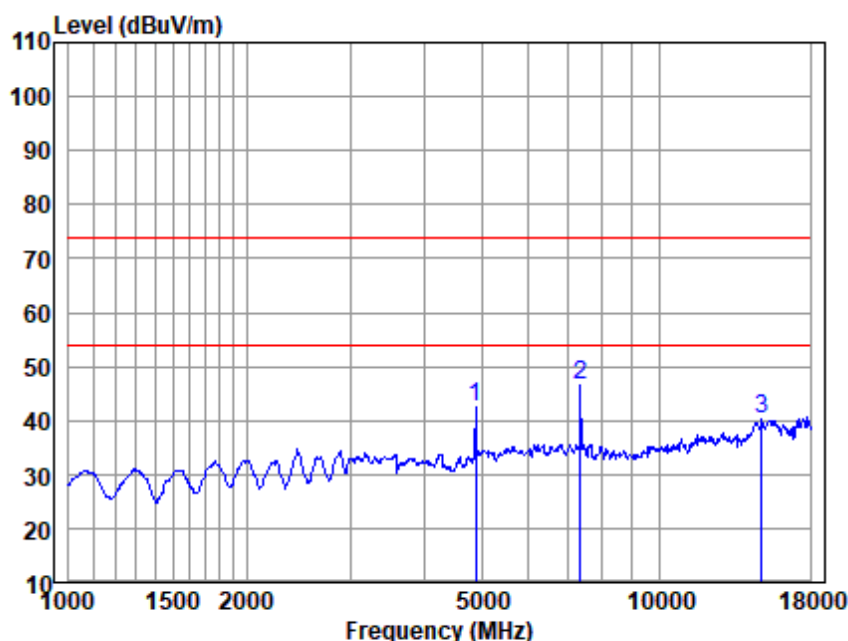


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4888.151	40.51	33.66	5.29	36.81	42.65	54.00	-11.35	Average
7347.474	40.03	36.35	7.45	37.41	46.42	54.00	-7.58	Average
14916.940	26.58	42.65	11.97	40.99	40.21	54.00	-13.79	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamplifier Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

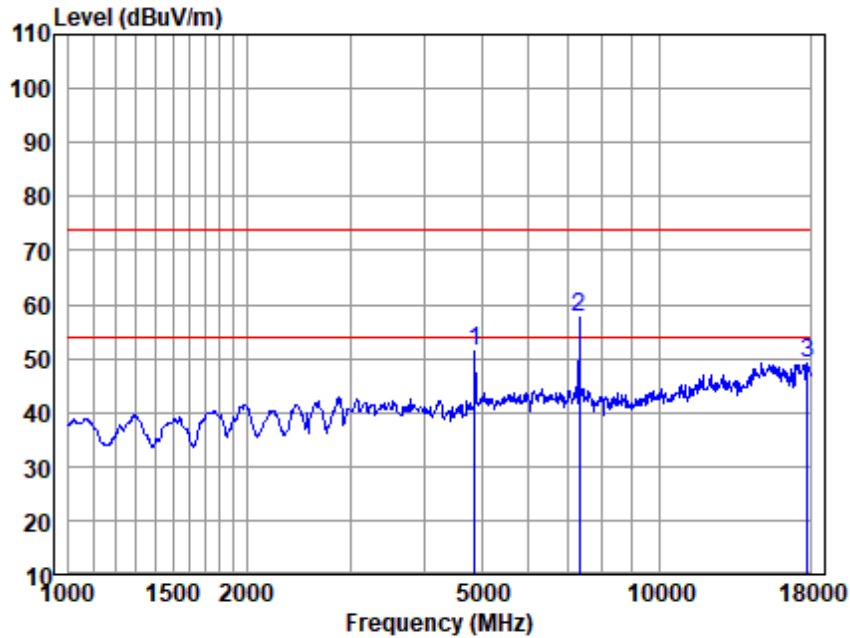


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4874.043	49.04	33.66	5.28	36.81	51.17	74.00	-22.83	Peak
7326.267	51.11	36.33	7.44	37.42	57.46	74.00	-16.54	Peak
17844.590	33.04	42.99	13.79	40.57	49.25	74.00	-24.75	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

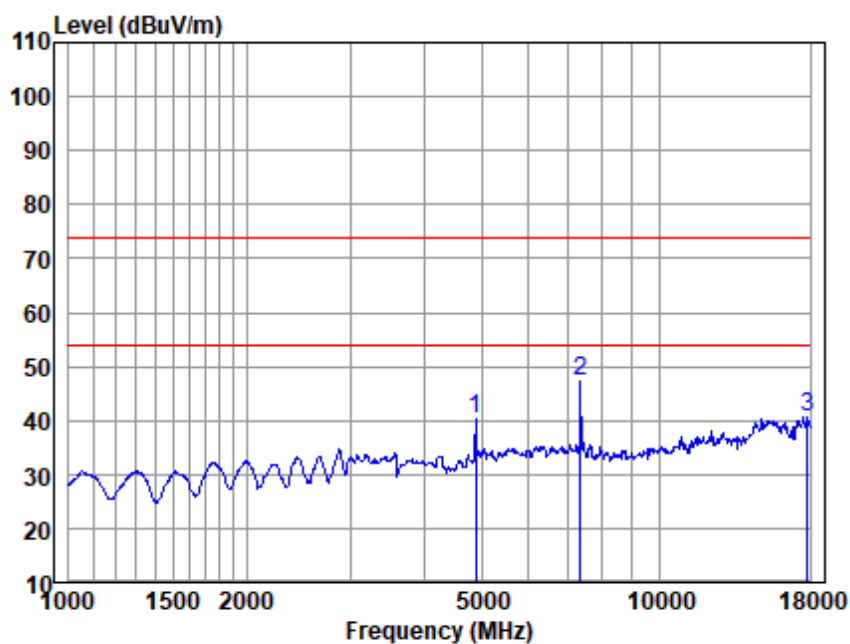


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4888.151	38.18	33.66	5.29	36.81	40.32	54.00	-13.68	Average
7347.474	40.80	36.35	7.45	37.41	47.19	54.00	-6.81	Average
17793.090	24.70	42.90	13.75	40.64	40.71	54.00	-13.29	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

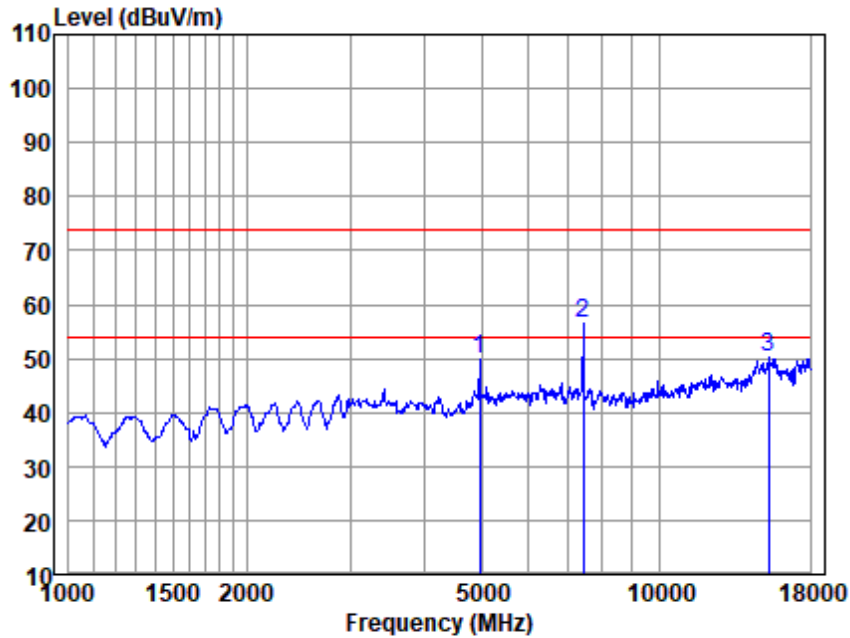


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4959.307	47.87	33.65	5.34	36.83	50.03	74.00	-23.97	Peak
7432.914	50.14	36.31	7.53	37.34	56.64	74.00	-17.36	Peak
15310.070	36.45	43.48	12.21	41.83	50.31	74.00	-23.69	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

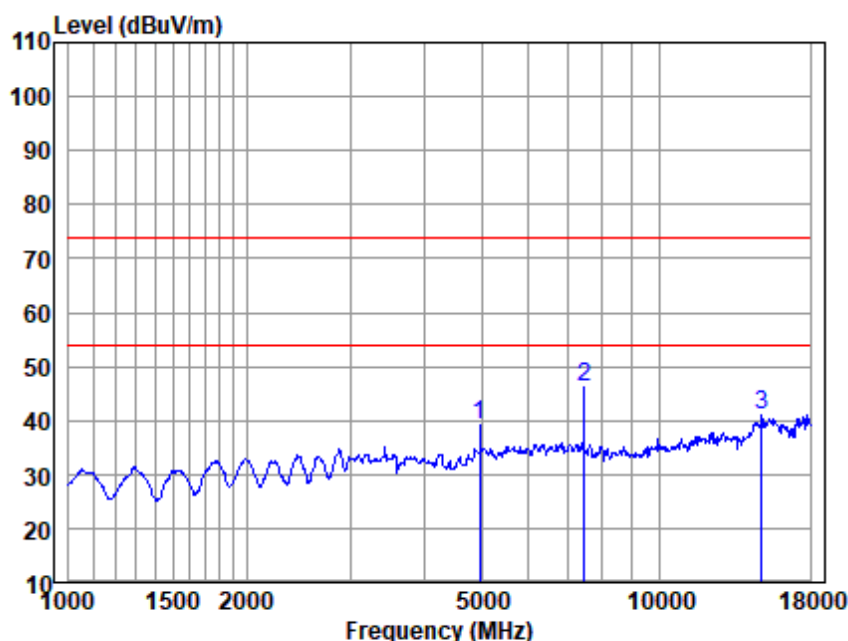


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4973.662	37.13	33.66	5.36	36.83	39.32	54.00	-14.68	Average
7454.429	39.56	36.29	7.55	37.32	46.08	54.00	-7.92	Average
14916.940	27.30	42.65	11.97	40.99	40.93	54.00	-13.07	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

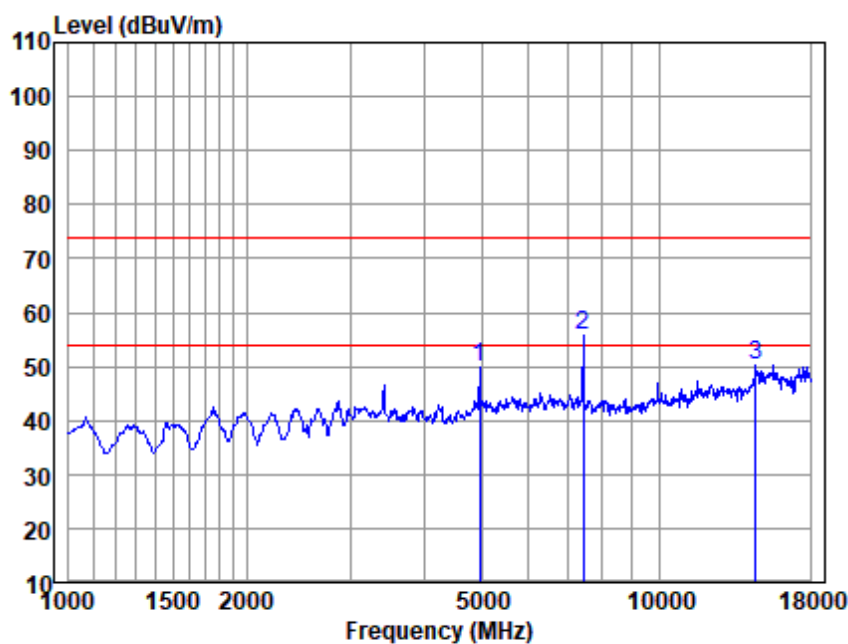


Antenna Polarity :VERTICAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4959.307	47.66	33.65	5.34	36.83	49.82	74.00	-24.18	Peak
7432.914	49.36	36.31	7.53	37.34	55.86	74.00	-18.14	Peak
14575.970	38.54	41.66	11.75	41.56	50.39	74.00	-23.61	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

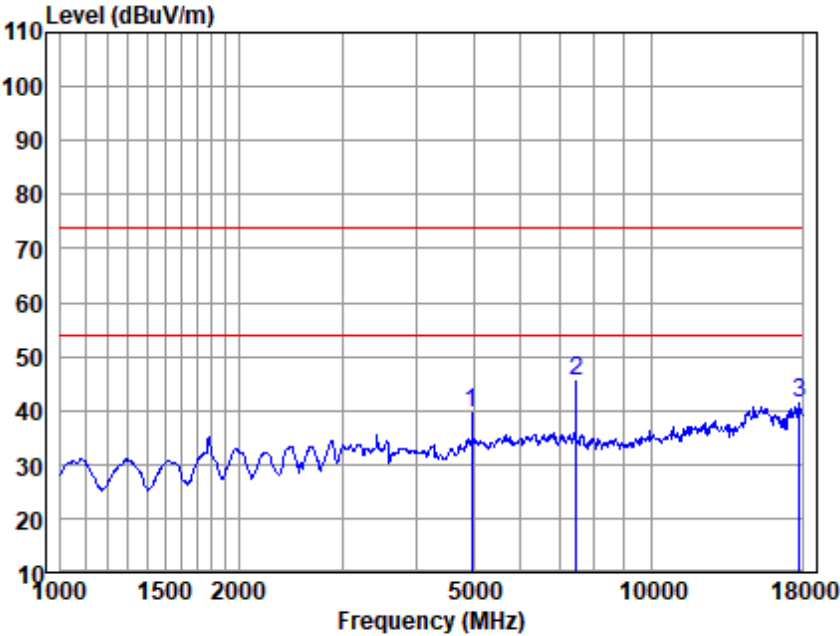


Antenna Polarity :VERTICAL
EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4973.662	37.43	33.66	5.36	36.83	39.62	54.00	-14.38	Average
7454.429	38.85	36.29	7.55	37.32	45.37	54.00	-8.63	Average
17844.590	24.98	42.99	13.79	40.57	41.19	54.00	-12.81	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

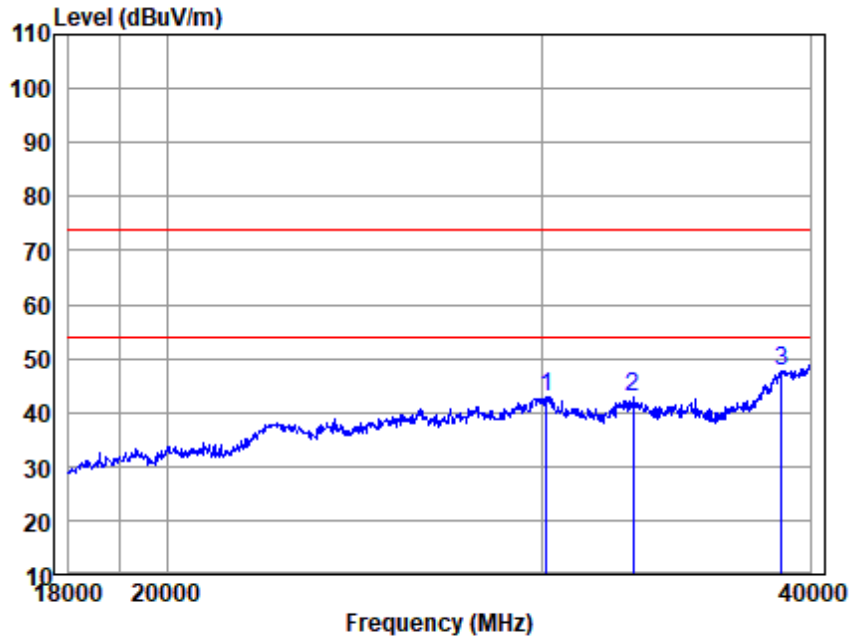


Antenna Polarity :HORIZONTAL

EUT/Project :0296HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
30126.620	53.10	40.46	4.00	54.54	43.02	74.00	-30.98	Peak
33076.880	53.89	41.89	3.78	56.66	42.90	74.00	-31.10	Peak
38804.500	55.76	43.45	4.70	56.17	47.74	74.00	-26.26	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

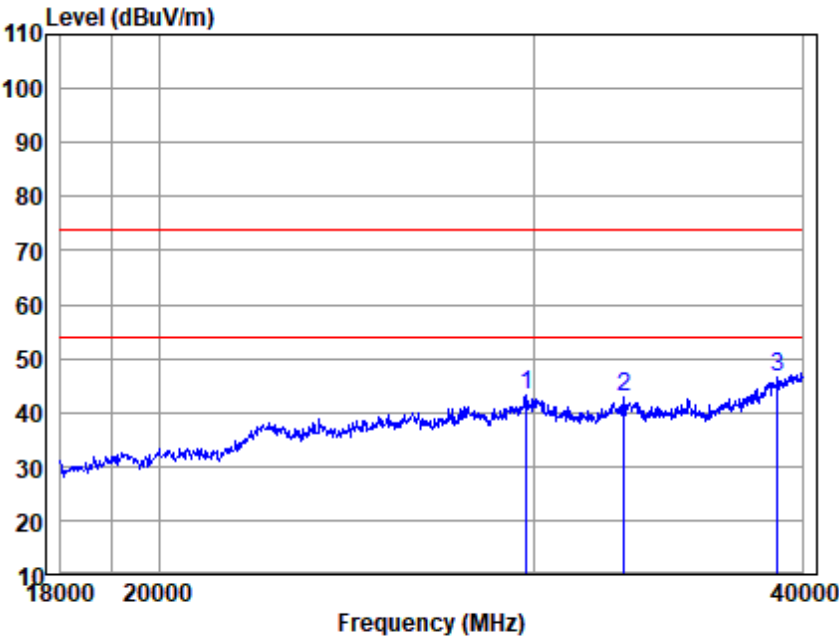

Antenna Polarity :VERTICAL
EUT/Project :0296HS

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
29720.430	53.88	40.28	3.99	54.92	43.23	74.00	-30.77	Peak
33024.100	53.75	42.03	3.78	56.69	42.87	74.00	-31.13	Peak
38959.730	54.82	43.57	4.71	56.50	46.60	74.00	-27.40	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 19.1 °C


Humidity: 41.0 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

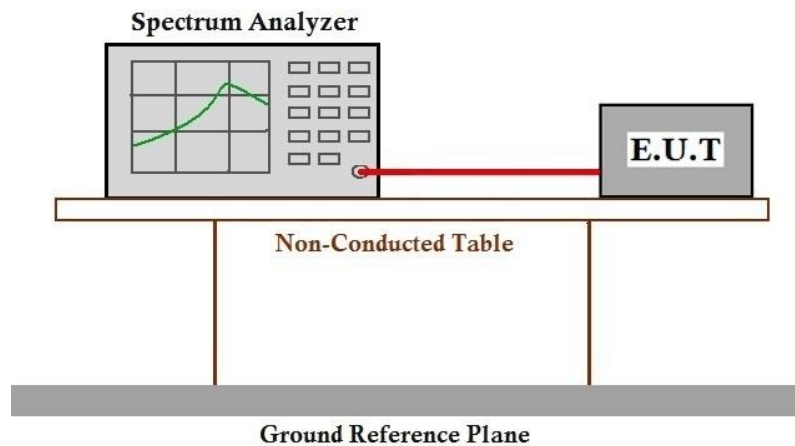

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:
 ≥500 kHz


7.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 19.0 °C Humidity: 41.0 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

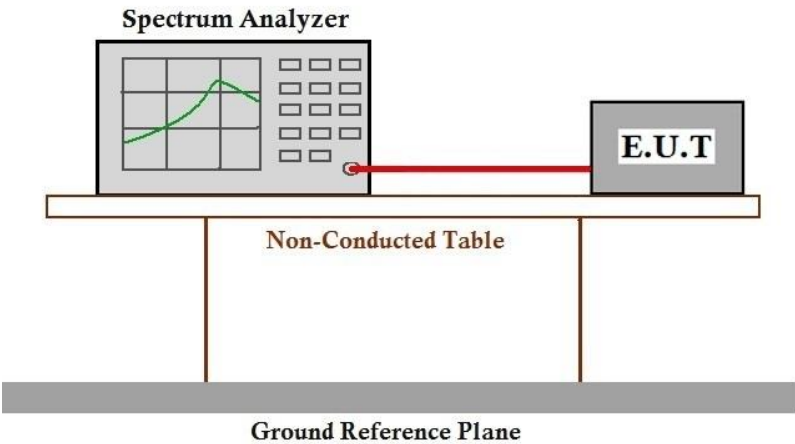

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.3

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 19.0 °C


Humidity: 41.2 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

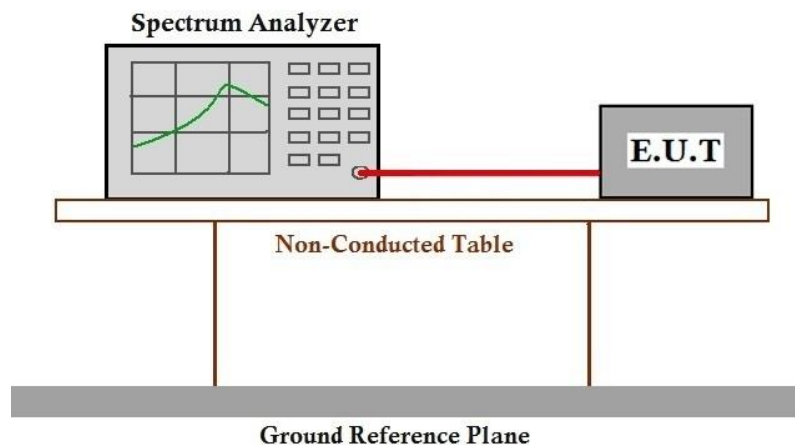

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 19.1 °C


Humidity: 41.1 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

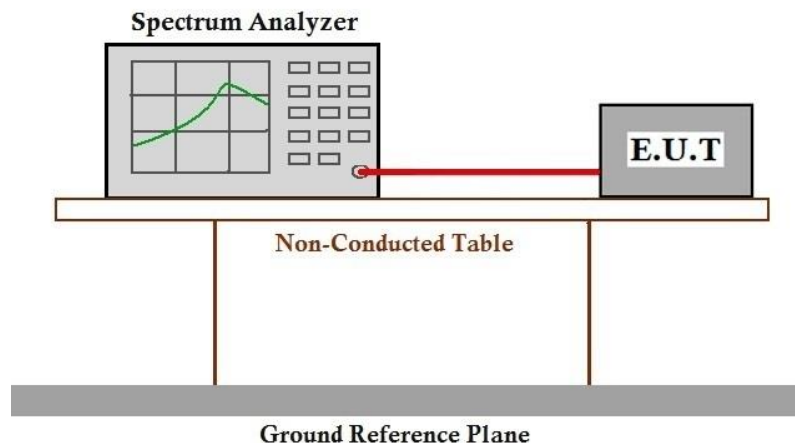

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 19.0 °C


Humidity: 41.0 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.9.3 Test Setup Diagram

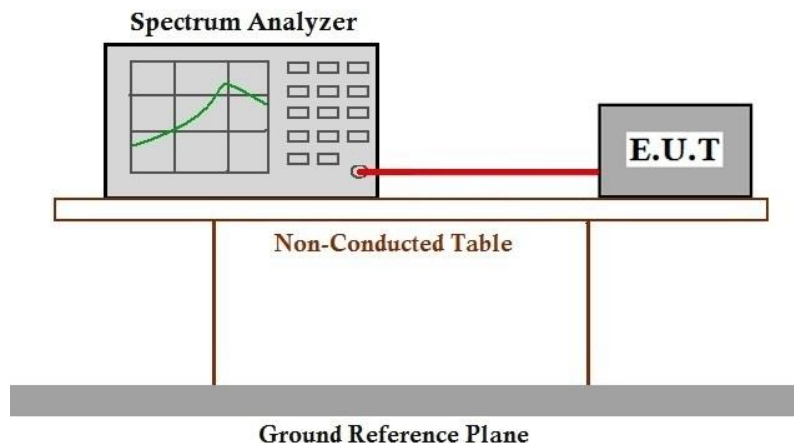

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2602000296HS

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SHCR2602000296HS

10 Appendix

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.016	/	Pass
		2440	1	1.007	/	Pass
		2480	1	1.023	/	Pass
2M	SISO	2402	1	2.033	/	Pass
		2440	1	2.043	/	Pass
		2480	1	2.003	/	Pass


1.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.682	≥ 0.5	Pass
		2440	1	0.676	≥ 0.5	Pass
		2480	1	0.679	≥ 0.5	Pass
2M	SISO	2402	1	1.297	≥ 0.5	Pass
		2440	1	1.349	≥ 0.5	Pass
		2480	1	1.331	≥ 0.5	Pass


1.2 Test Graph

1.2.1 OBW

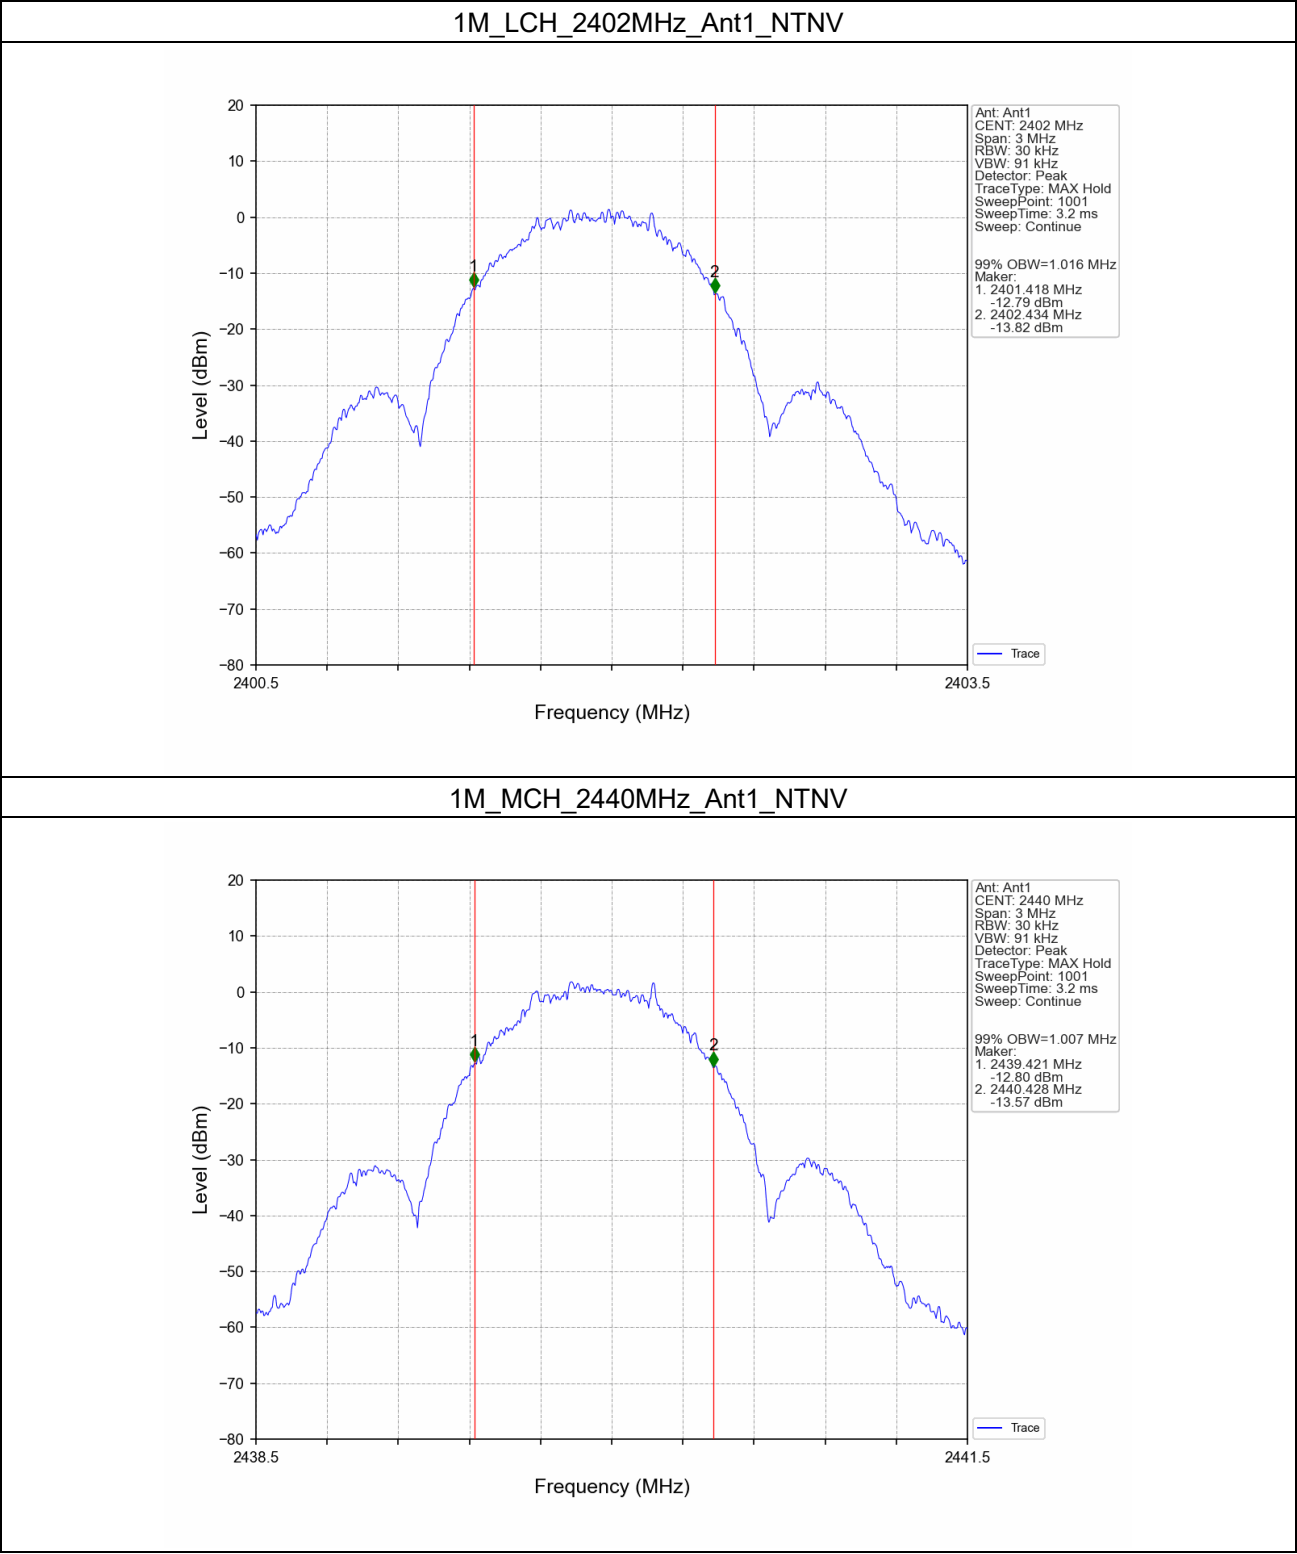


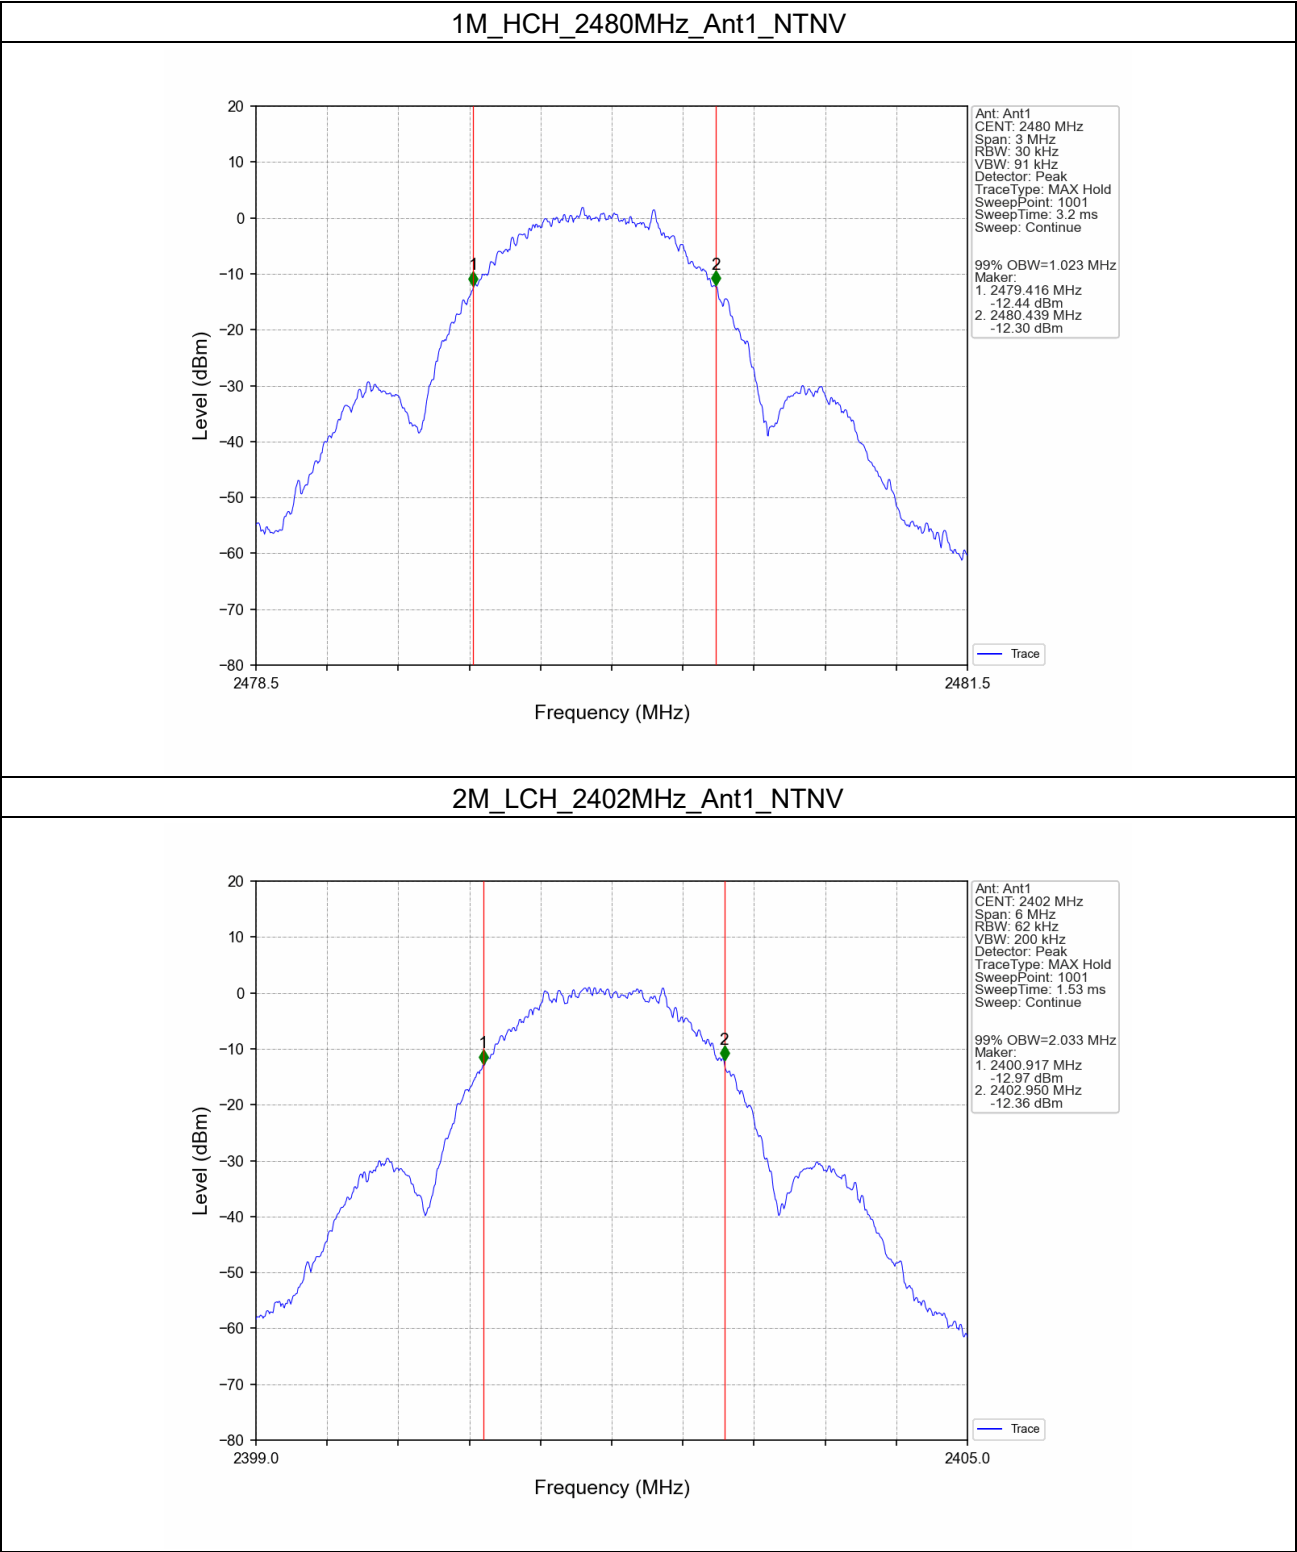


2M_MCH_2440MHz_Ant1_NTNV

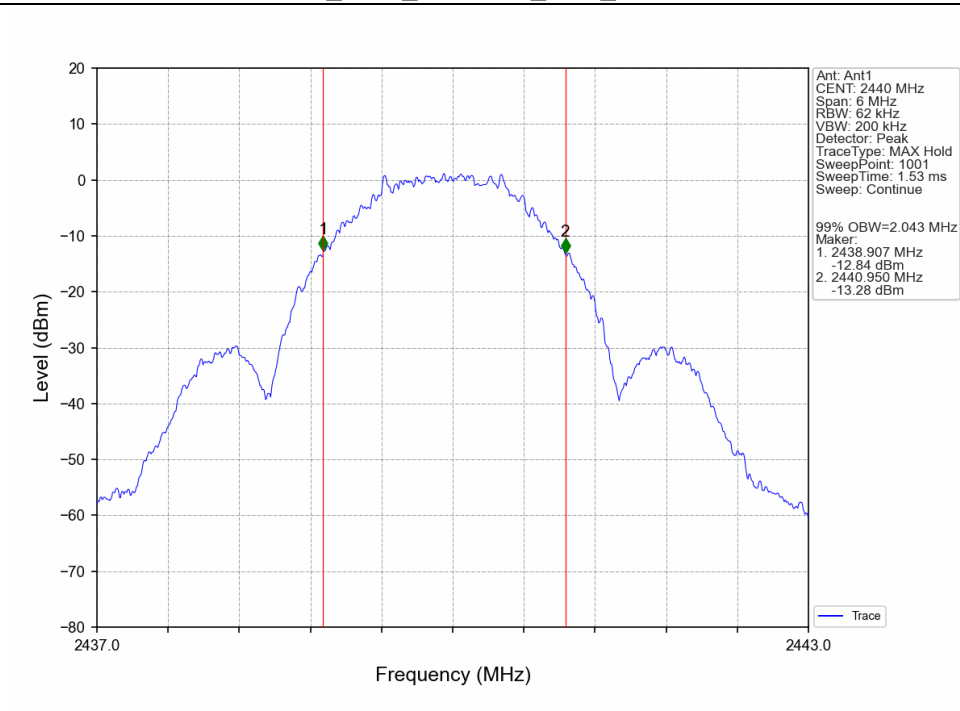


2M_HCH_2480MHz_Ant1_NTNV

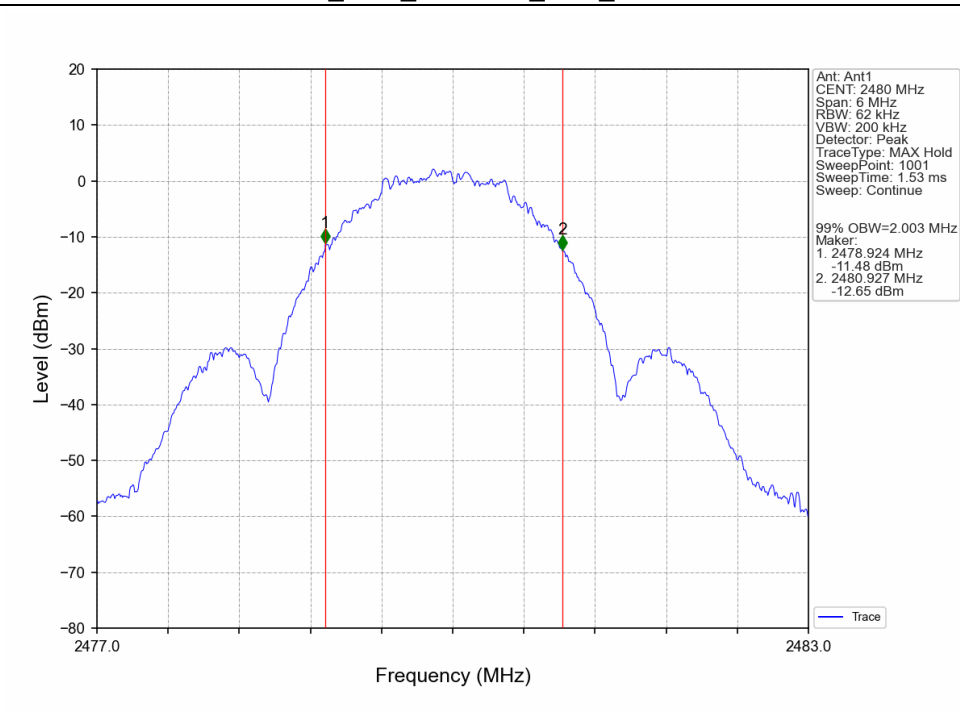


1.2.2 6dB BW

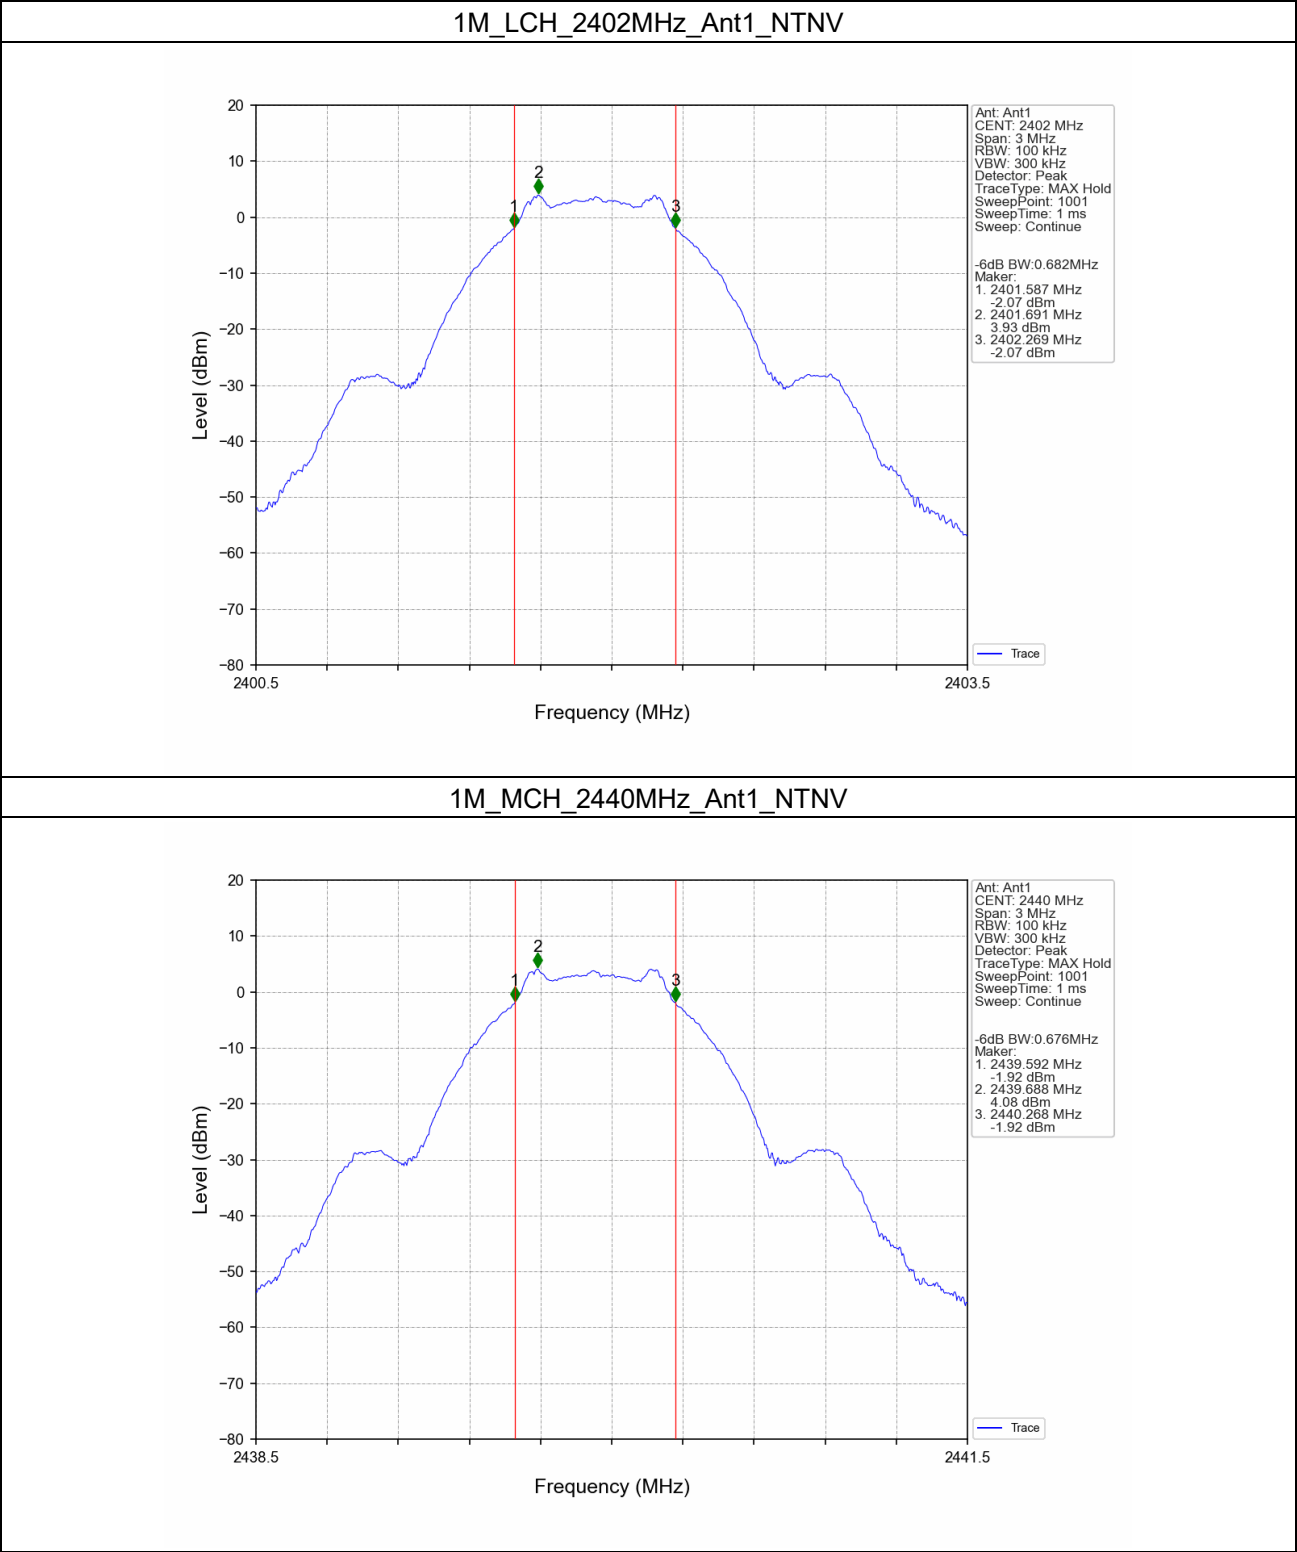


1M_HCH_2480MHz_Ant1_NTNV

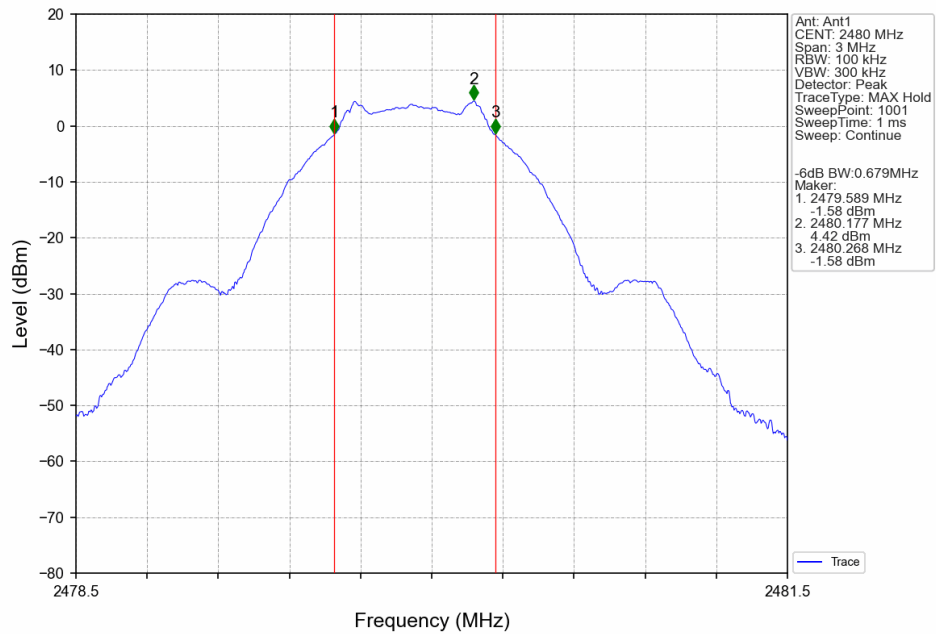


2M_LCH_2402MHz_Ant1_NTNV

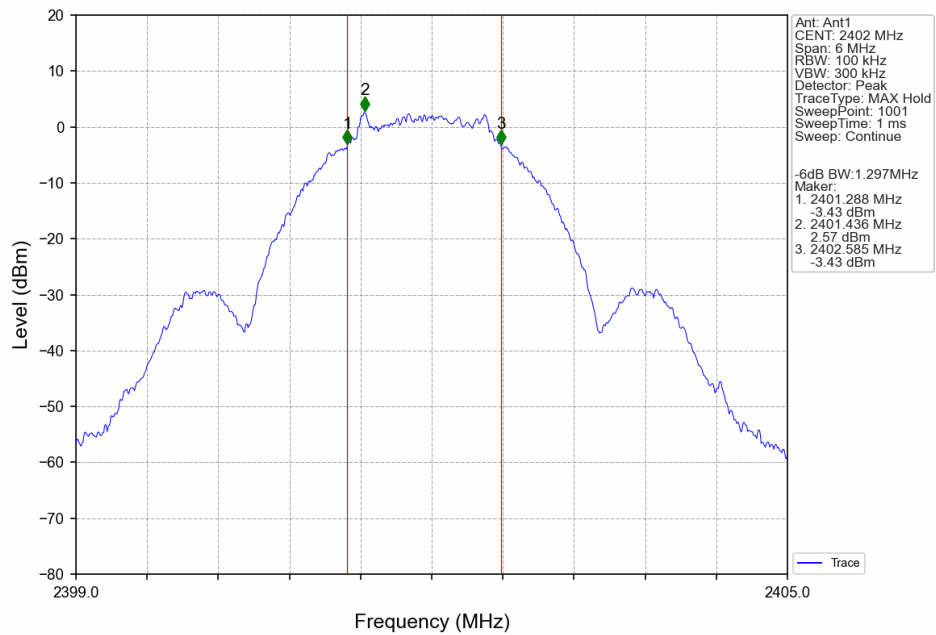

2M_MCH_2440MHz_Ant1_NTNV

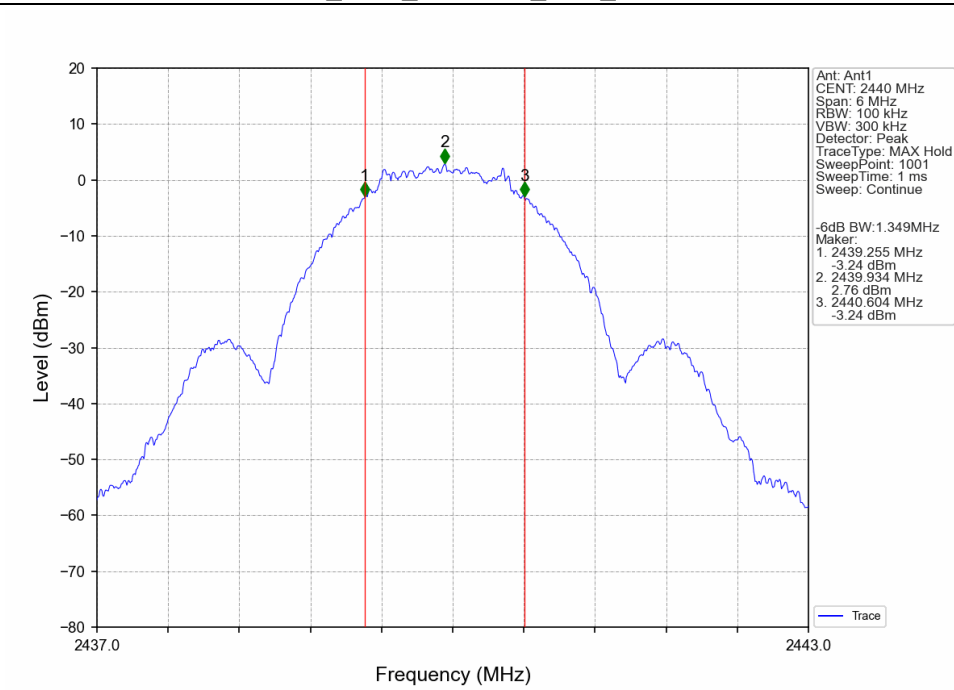

2M_HCH_2480MHz_Ant1_NTNV

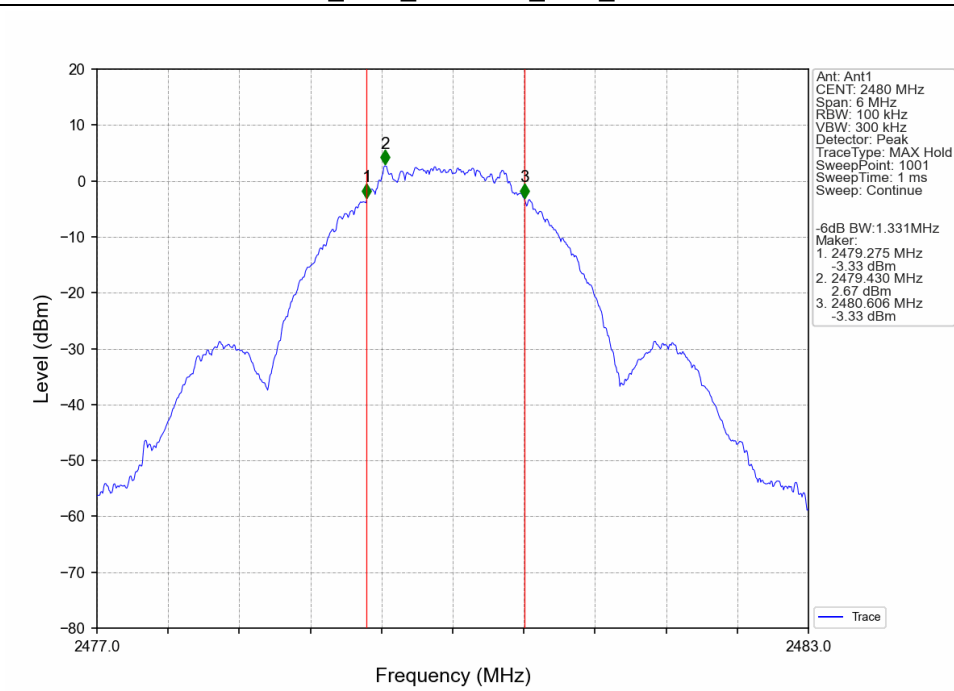

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-3.74	<=30	Pass
		2440	-3.74	<=30	Pass
		2480	-3.47	<=30	Pass
2M	SISO	2402	-3.70	<=30	Pass
		2440	-3.76	<=30	Pass
		2480	-3.48	<=30	Pass

Note1: Antenna Gain: Ant1: 0.44dBi;



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 72 of 87

2.2 Test Graph

2.2.1 Power

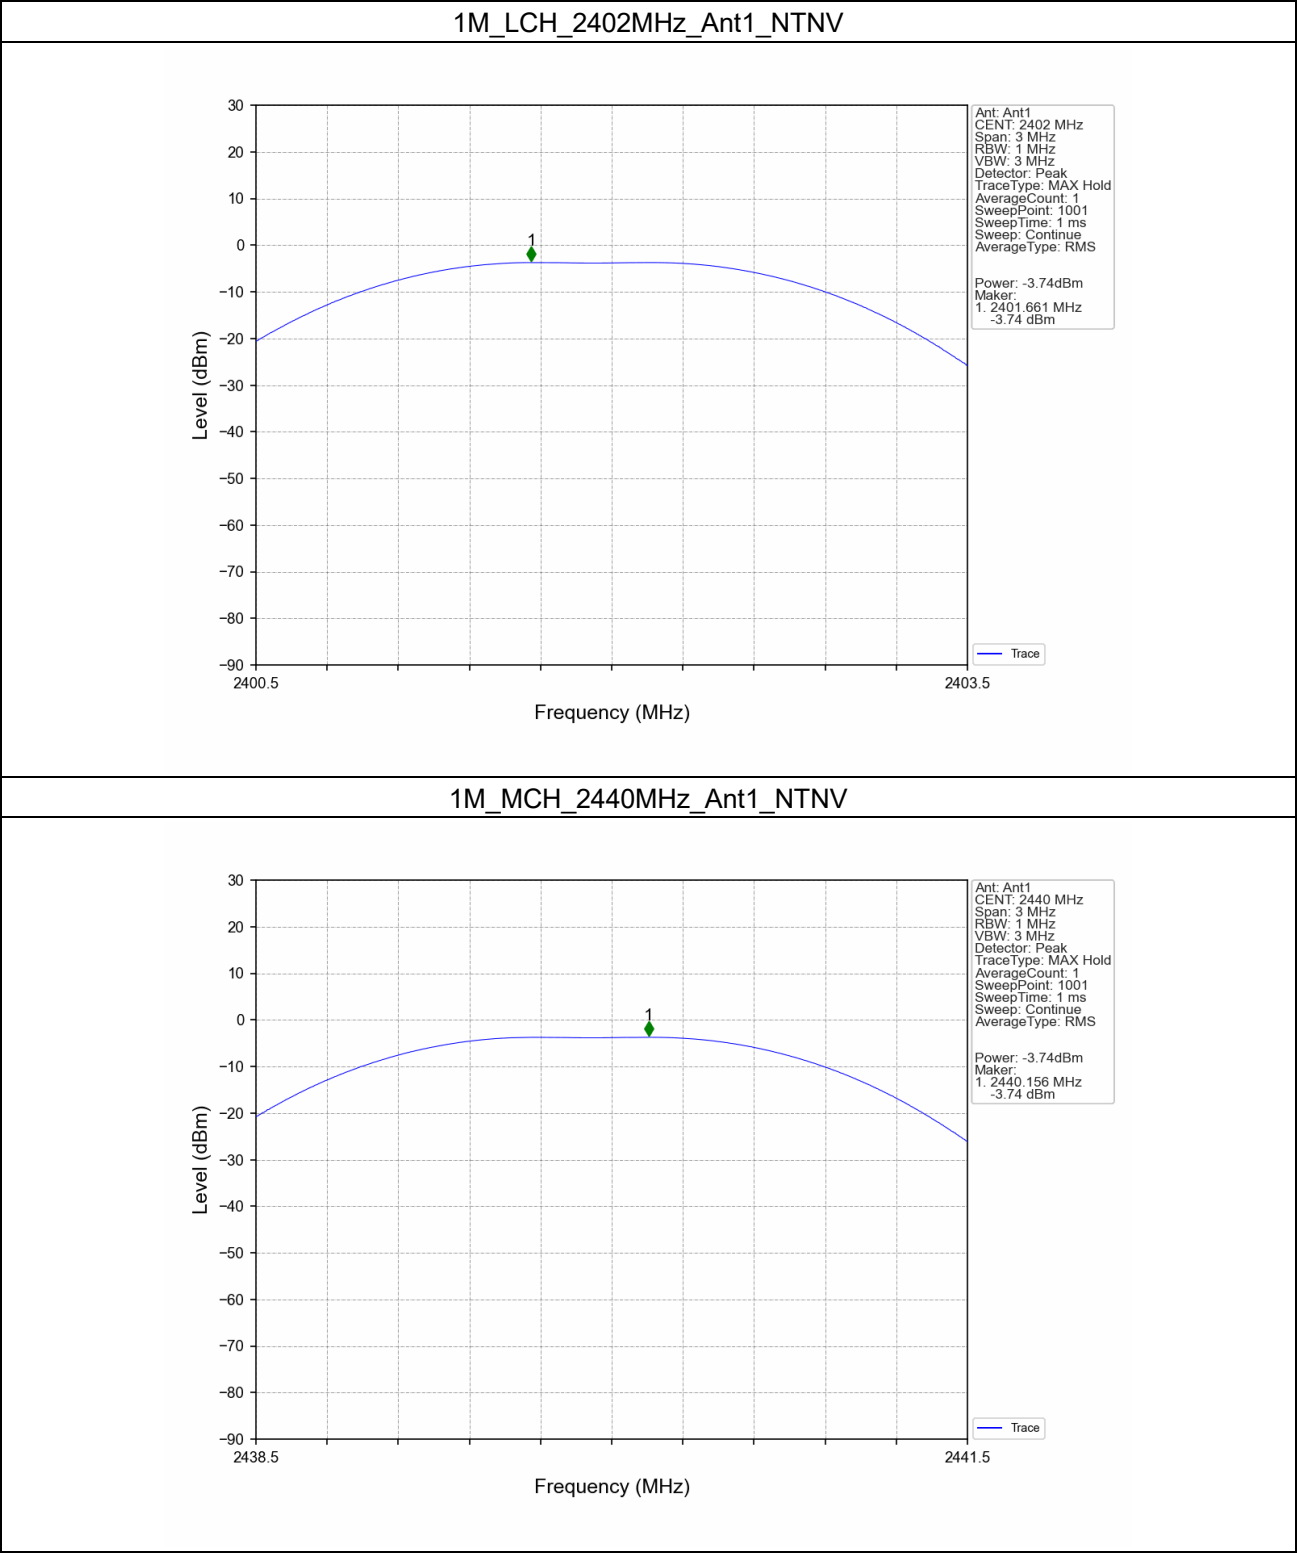




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 73 of 87

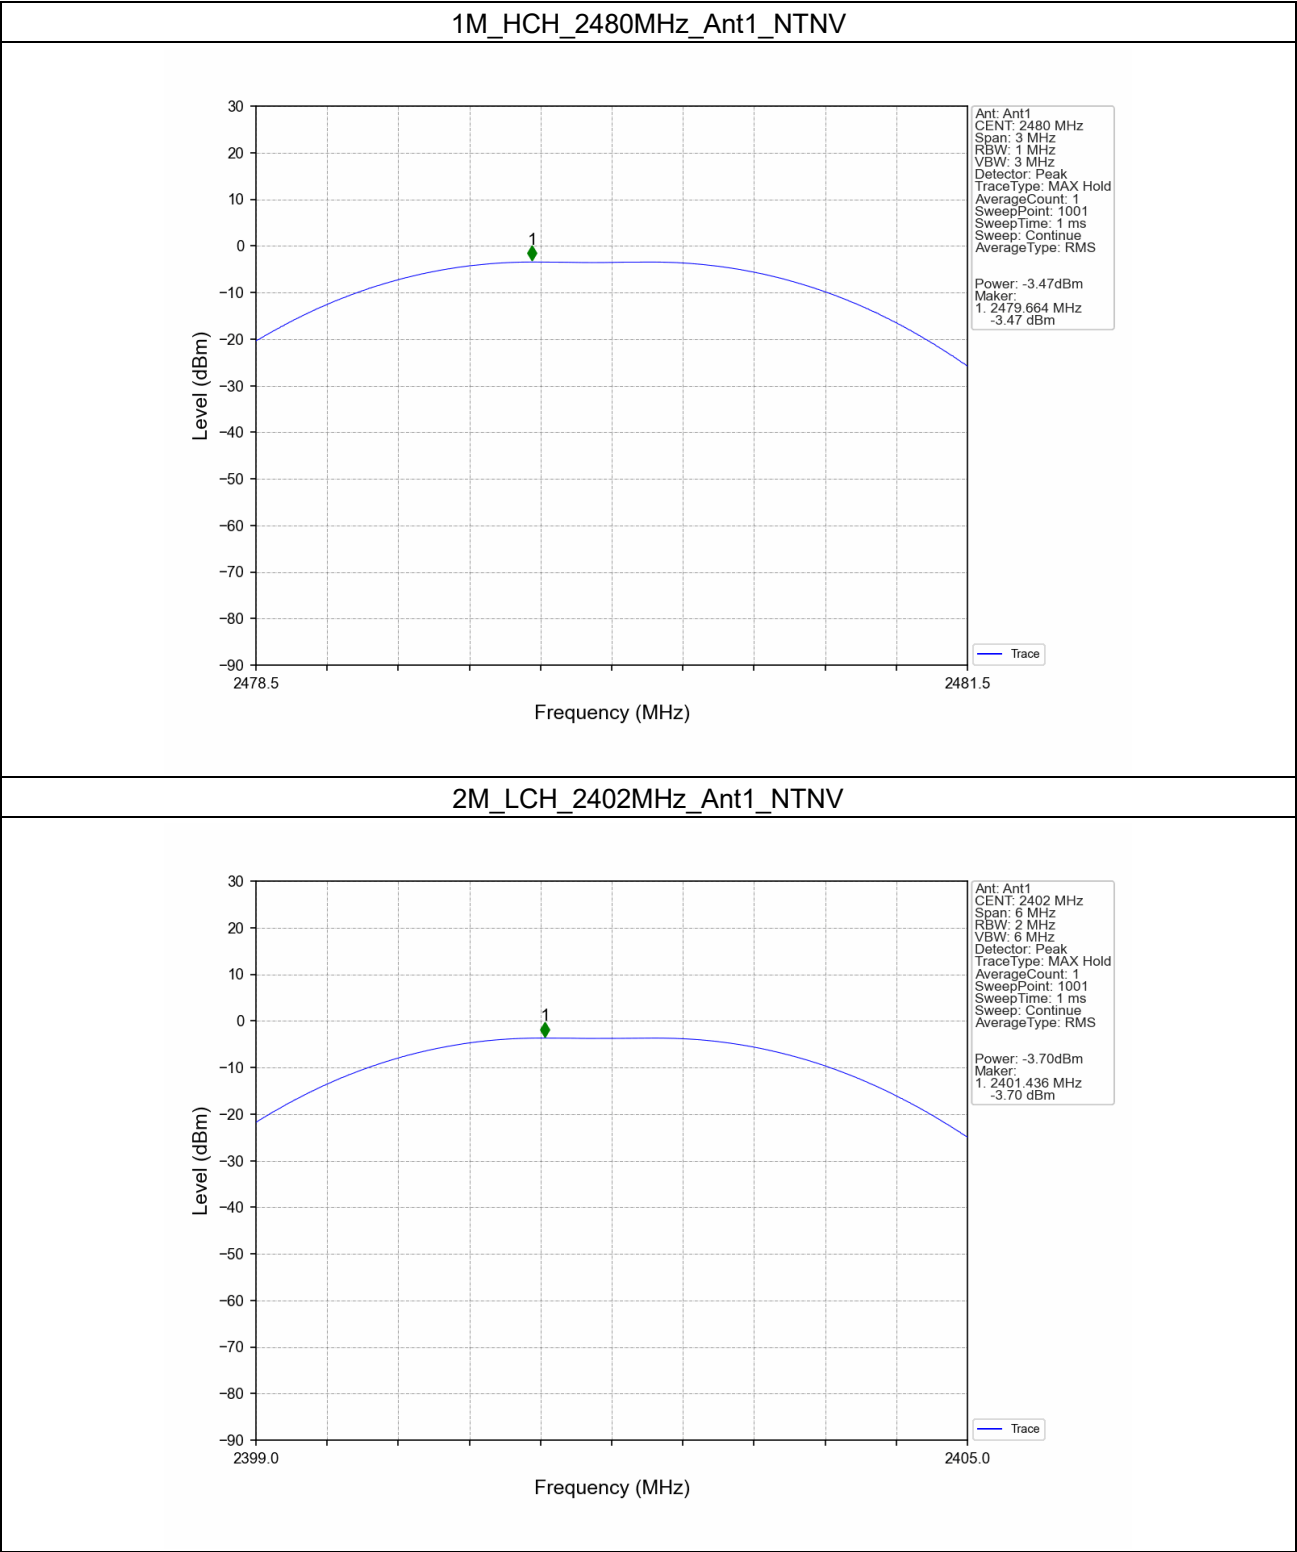




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 74 of 87

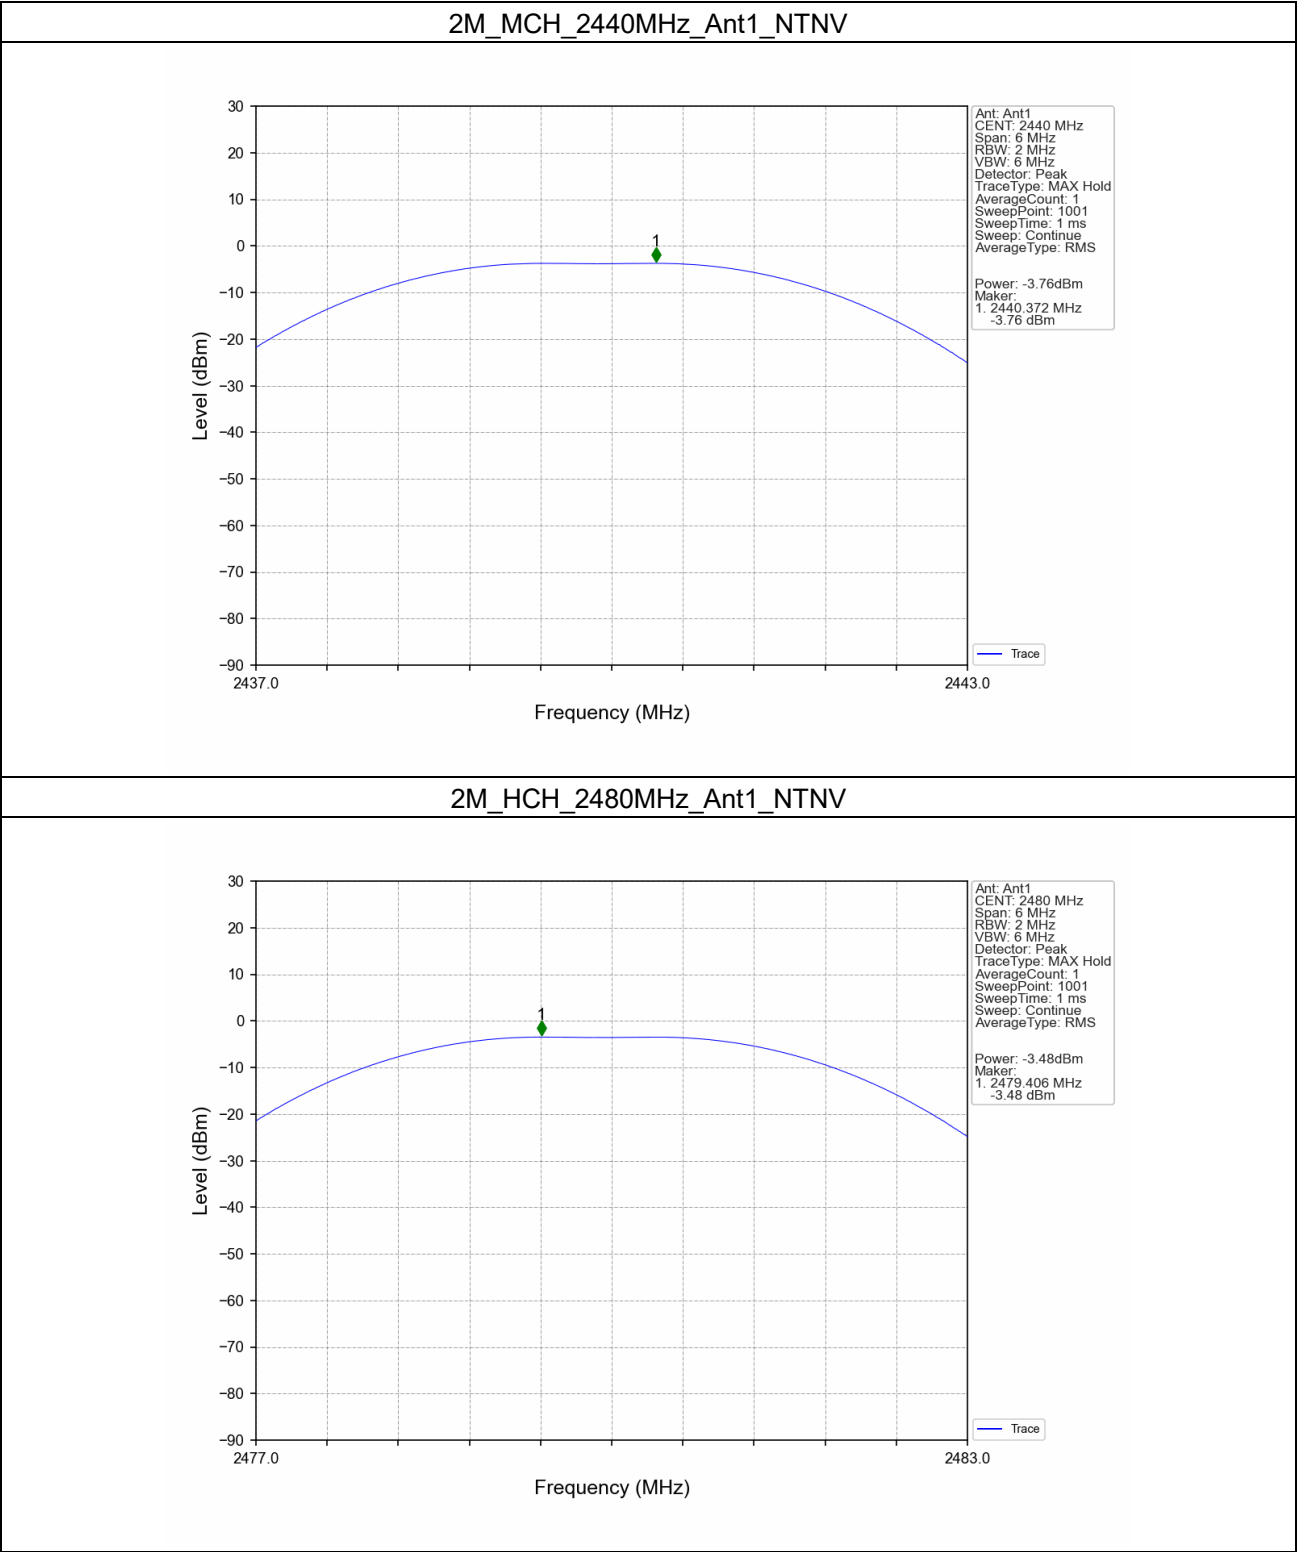



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR260200029601

Page: 75 of 87

3. Maximum Power Spectral Density

3.1 Test Result


3.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-3.98	<=8	Pass
		2440	-4.12	<=8	Pass
		2480	-3.70	<=8	Pass
2M	SISO	2402	-5.55	<=8	Pass
		2440	-5.49	<=8	Pass
		2480	-5.45	<=8	Pass

Note1: Antenna Gain: Ant1: 0.44dBi;


3.2 Test Graph

3.2.1 PSD

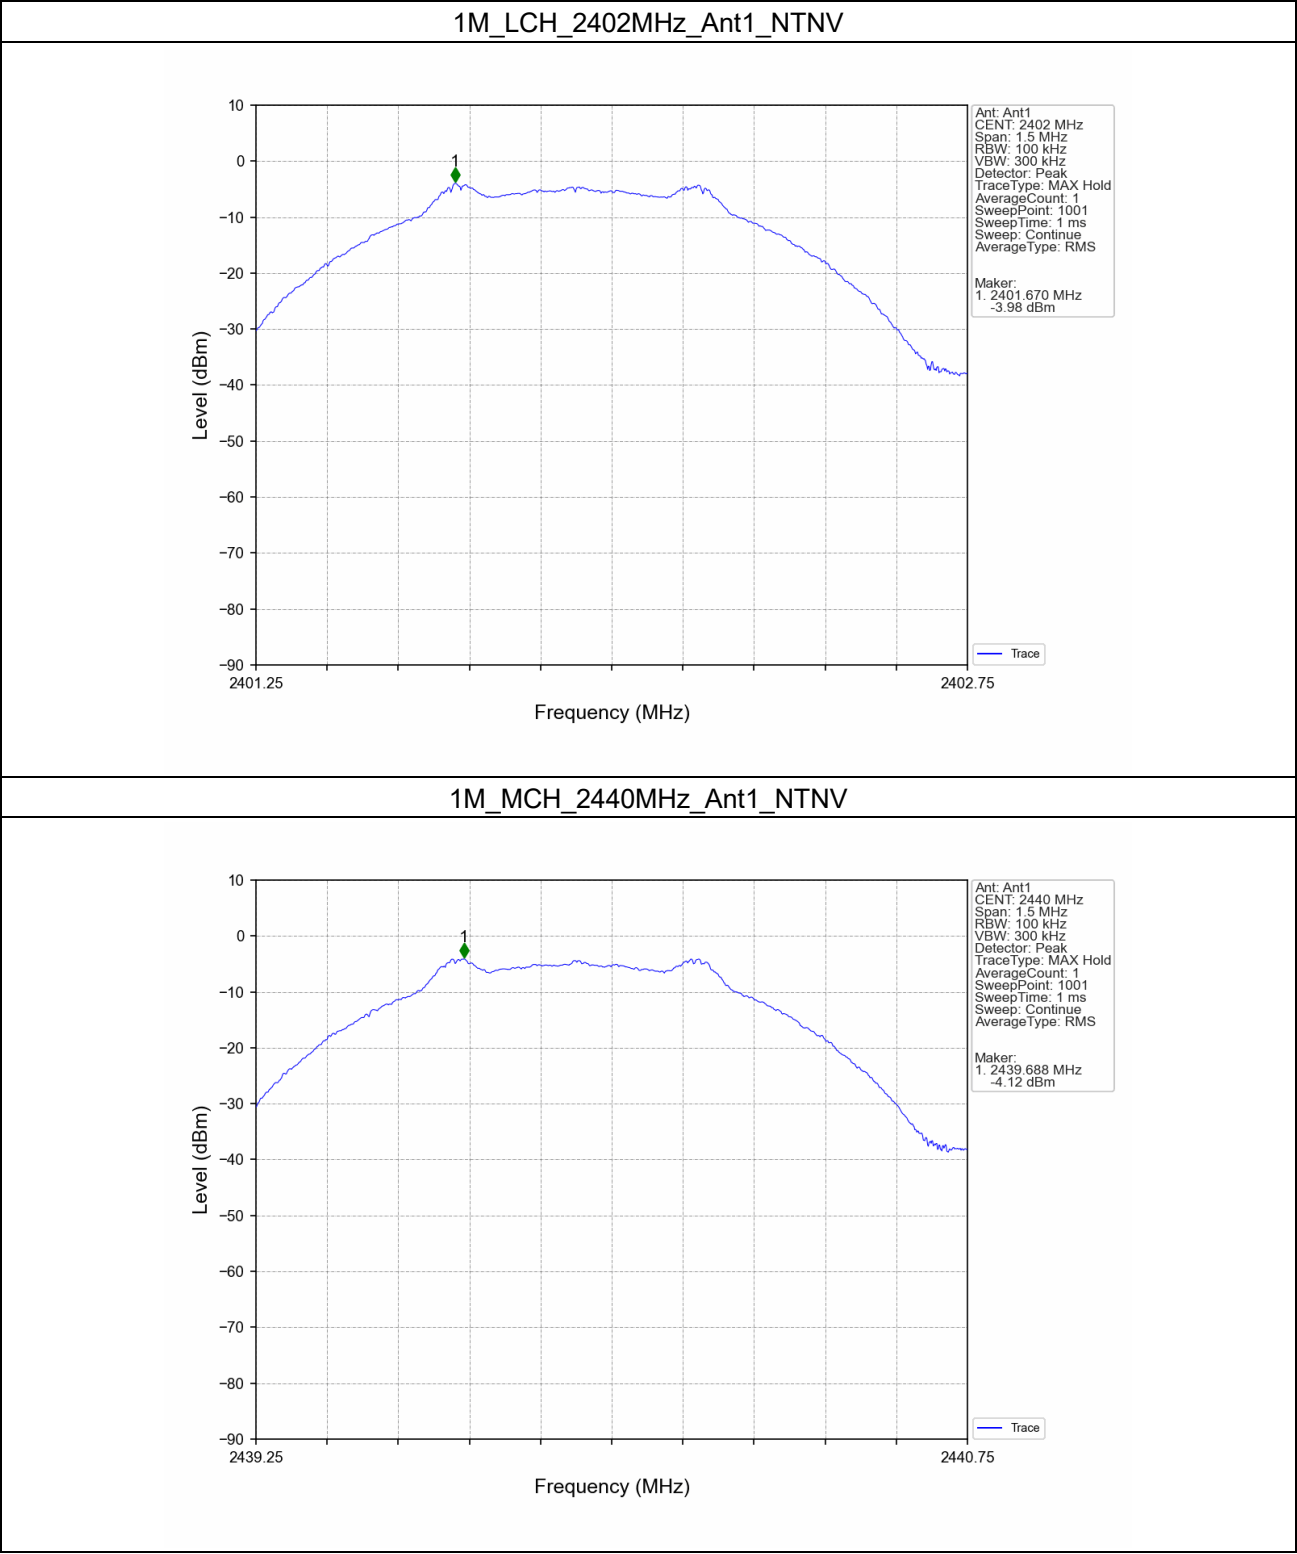


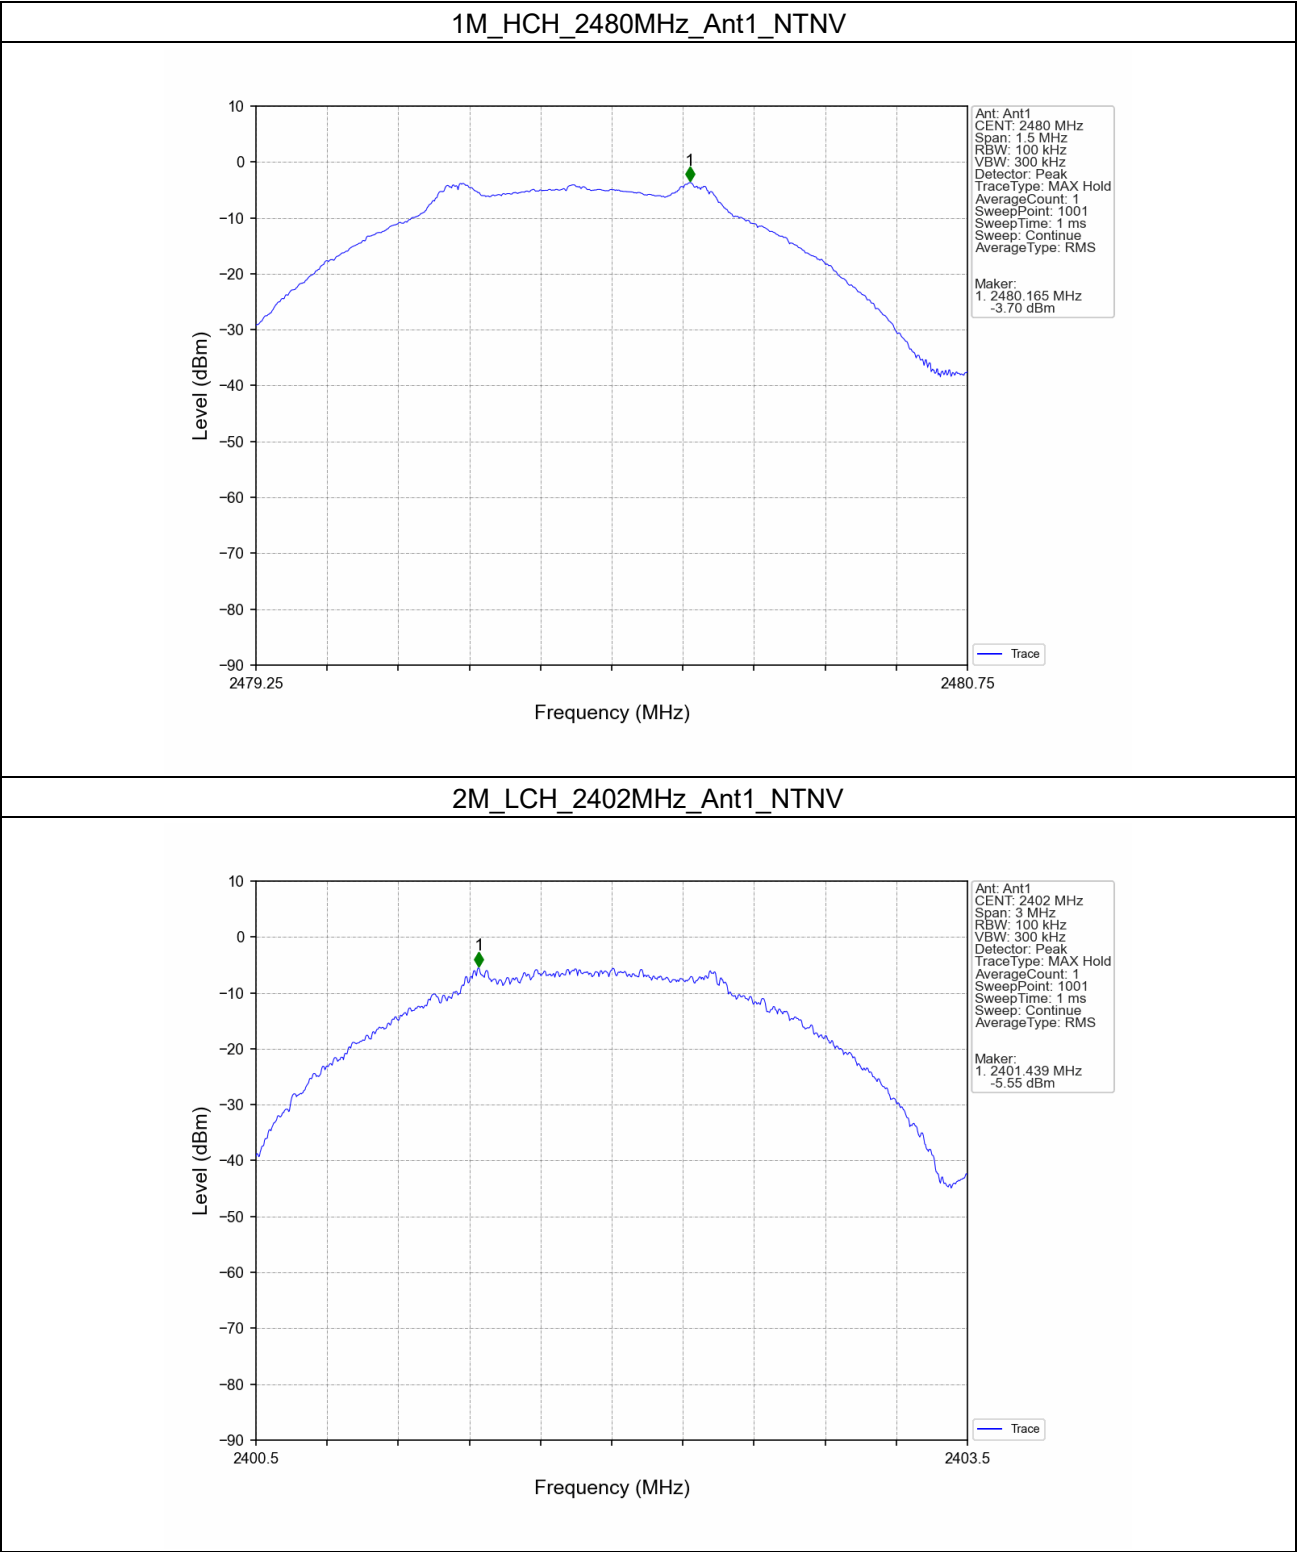

2M_MCH_2440MHz_Ant1_NTNV

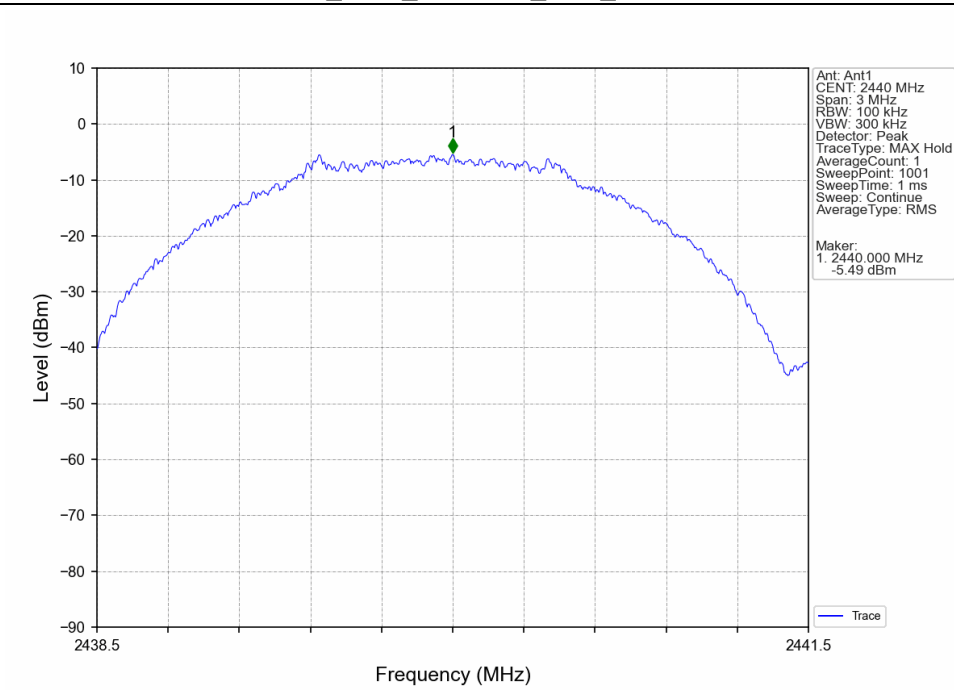

2M_HCH_2480MHz_Ant1_NTNV

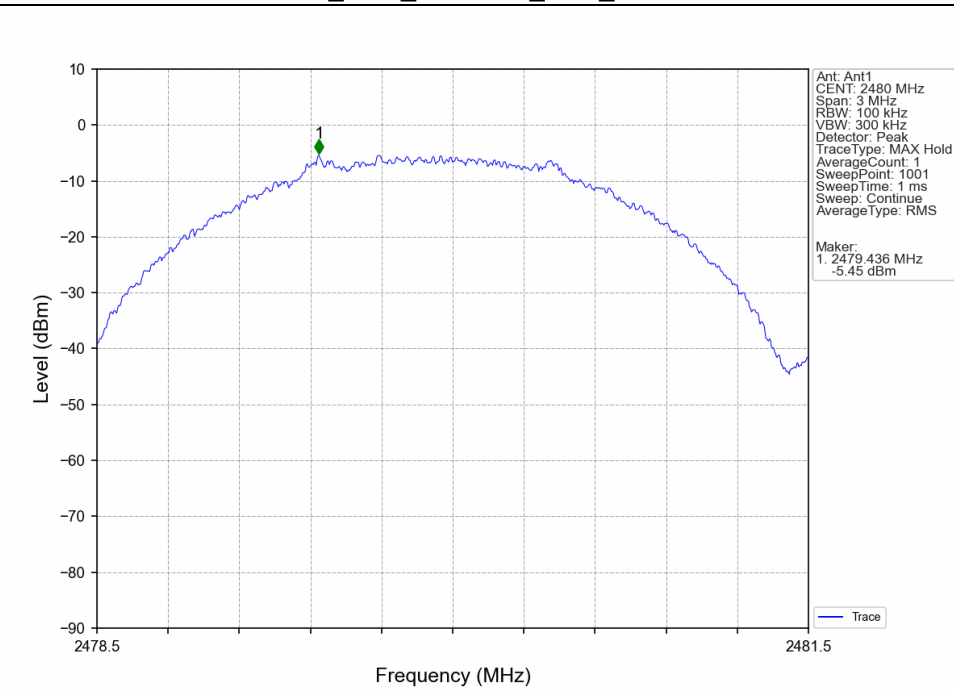

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Test Result

4.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-3.90
		2440	1	-4.03
		2480	1	-3.68
2M	SISO	2402	1	-5.61
		2440	1	-5.13
		2480	1	-4.97


4.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-3.68	-23.68	Pass
		2440	1	-3.68	-23.68	Pass
		2480	1	-3.68	-23.68	Pass
2M	SISO	2402	1	-4.97	-24.97	Pass
		2440	1	-4.97	-24.97	Pass
		2480	1	-4.97	-24.97	Pass

4.2 Test Graph

4.2.1 Ref

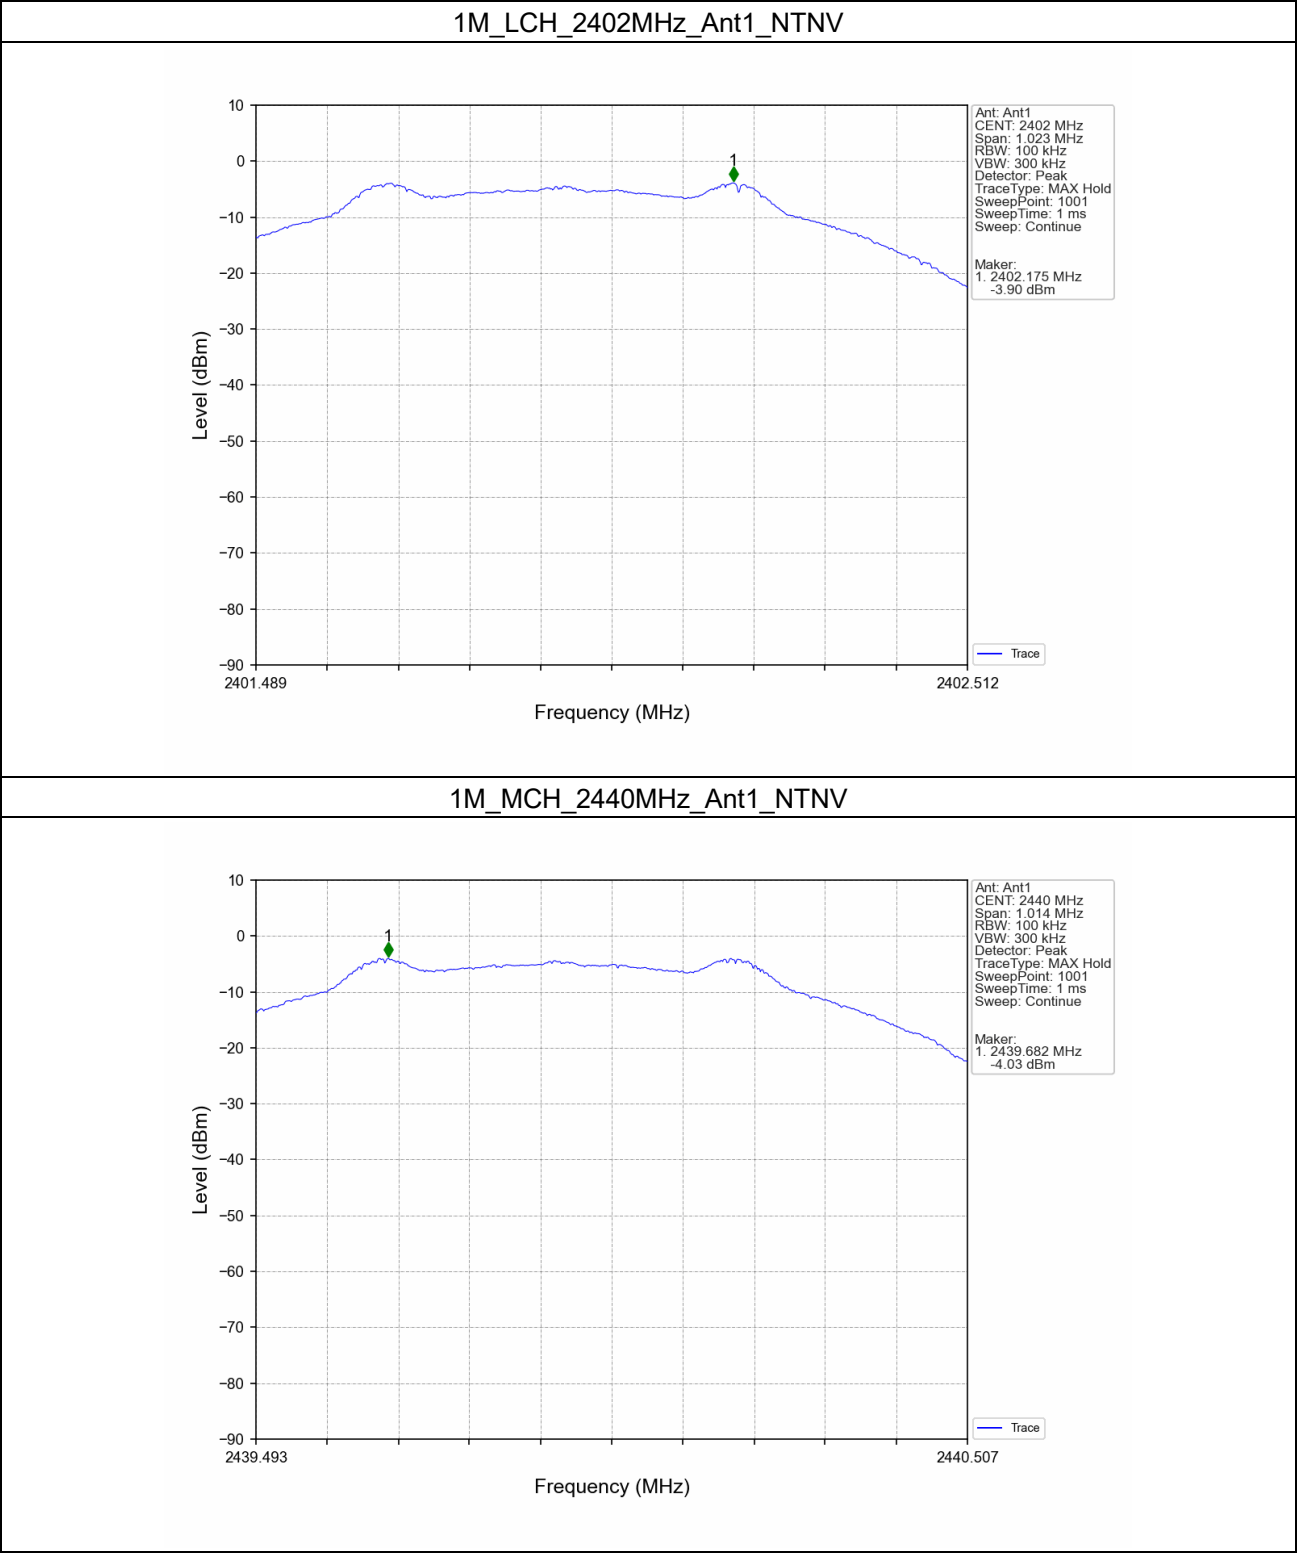

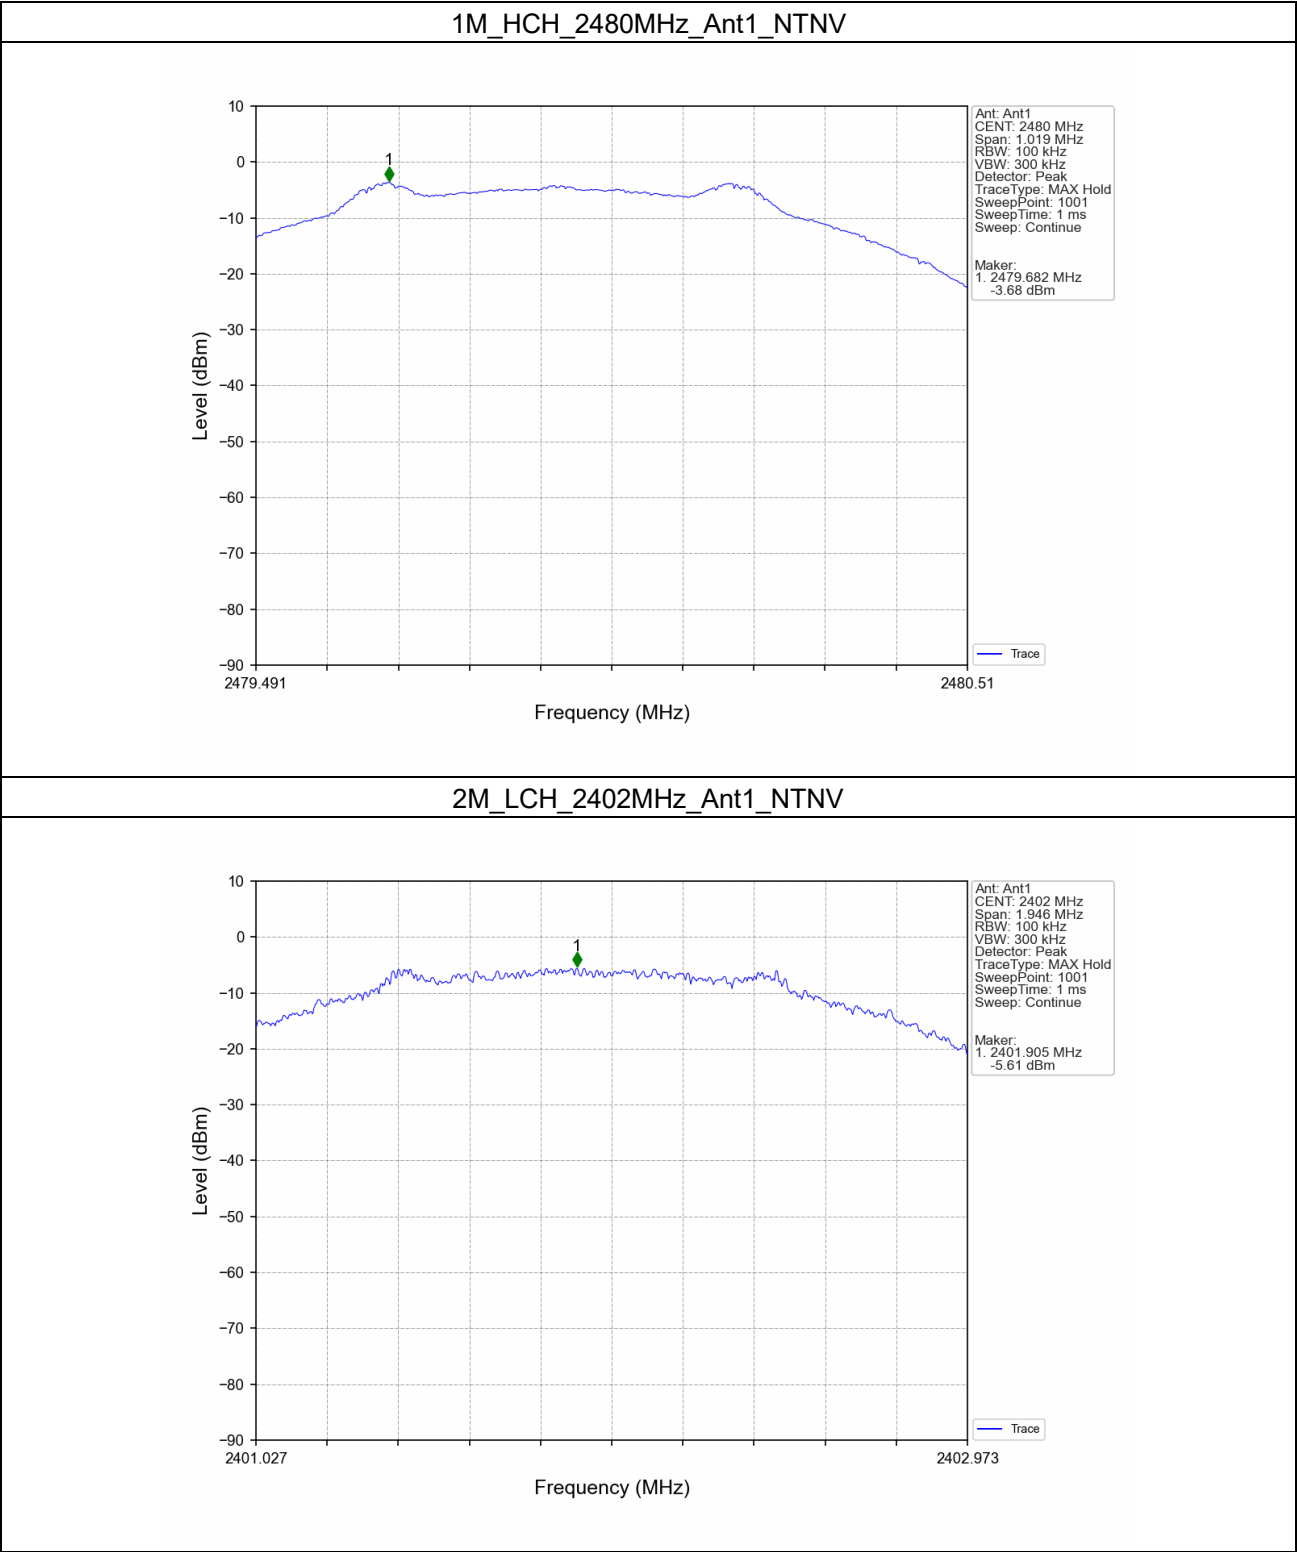




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


SHEM-TRF-001 Rev. 02 Sep01, 2023


Report No.: SHCR260200029601


Page: 82 of 87

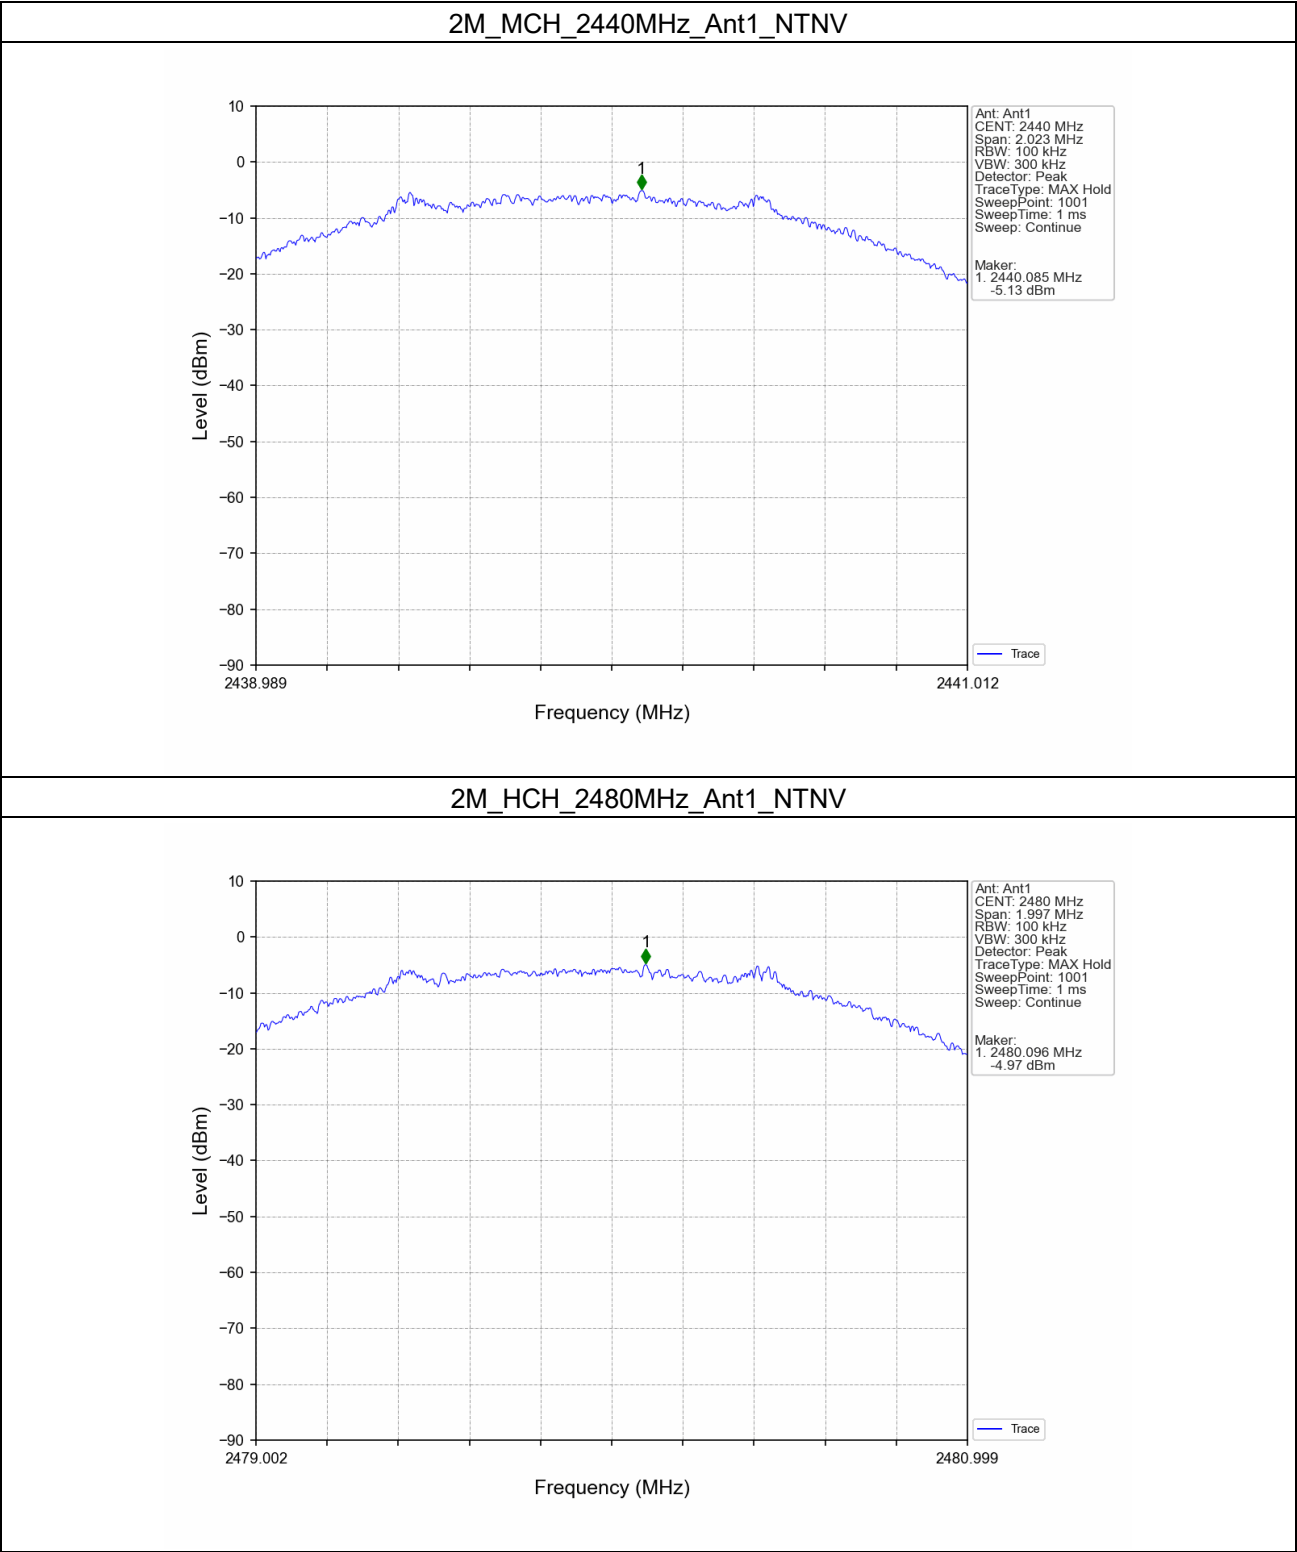


4.2.2 CSE

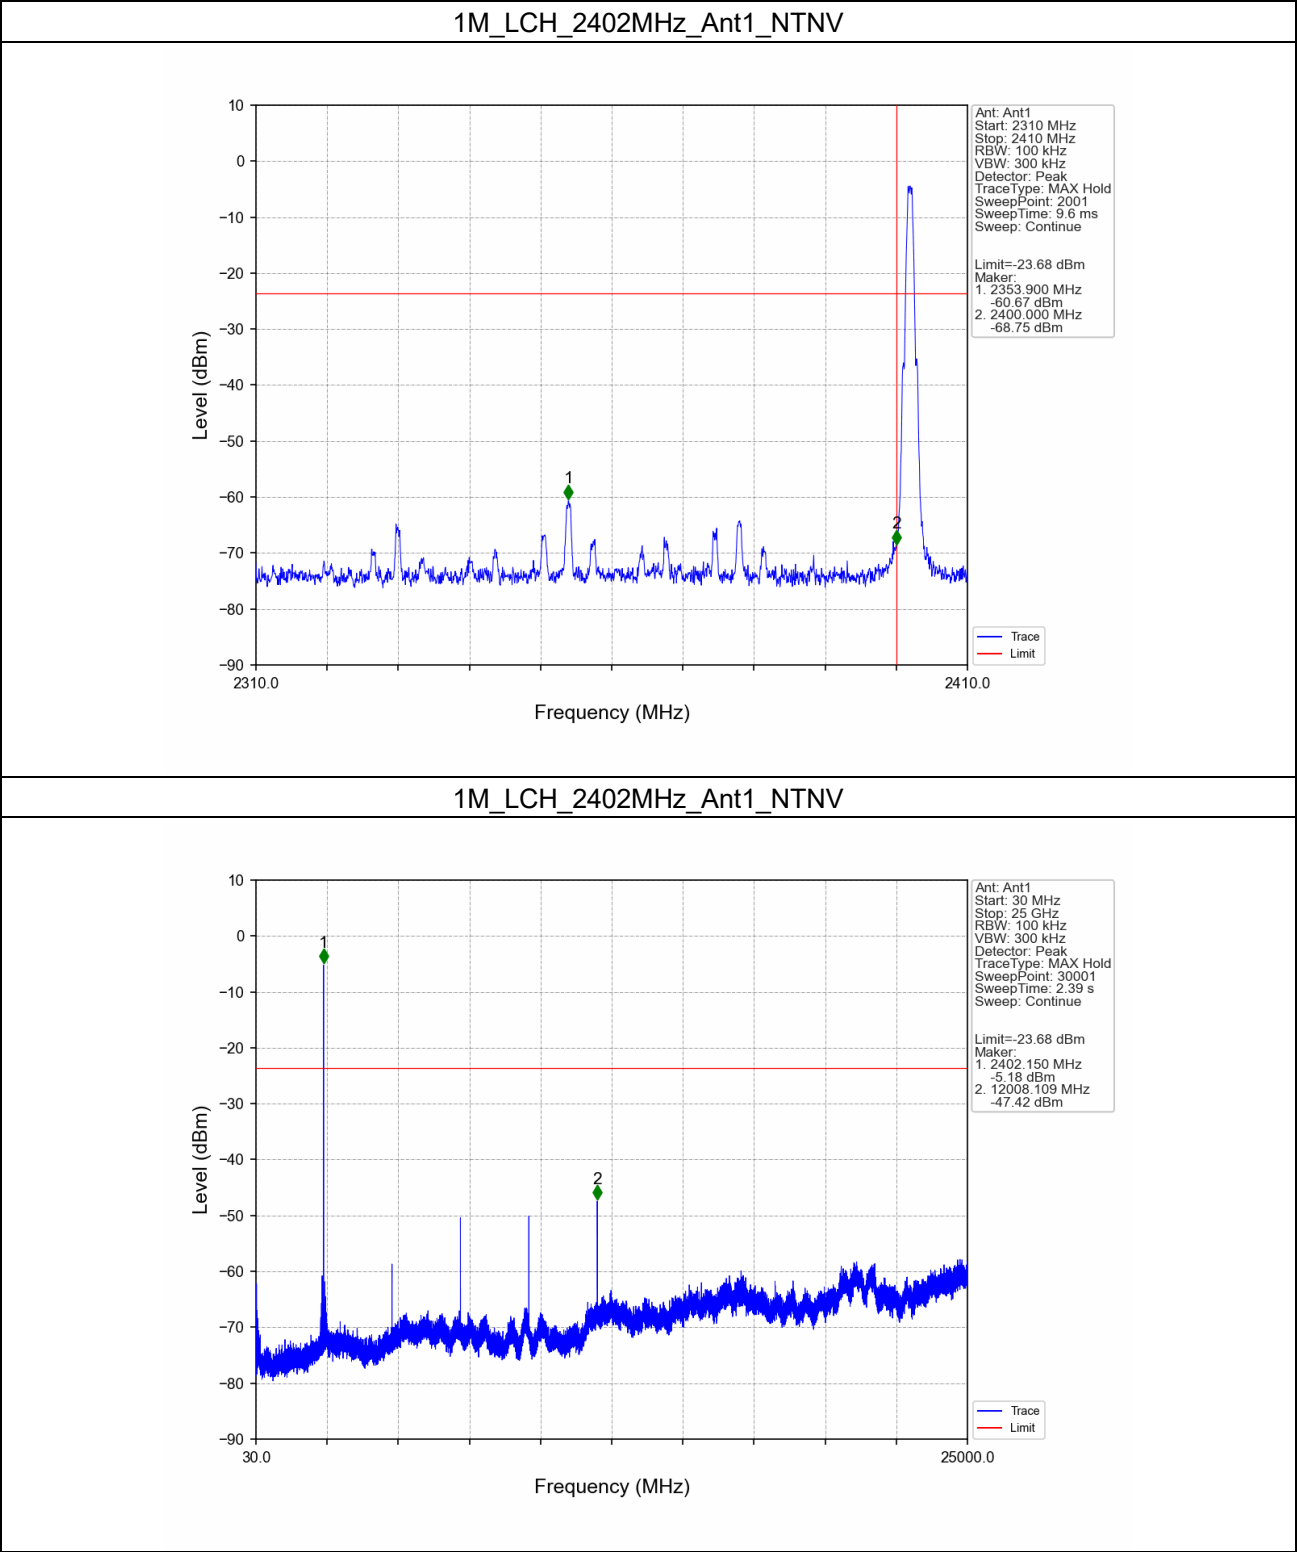

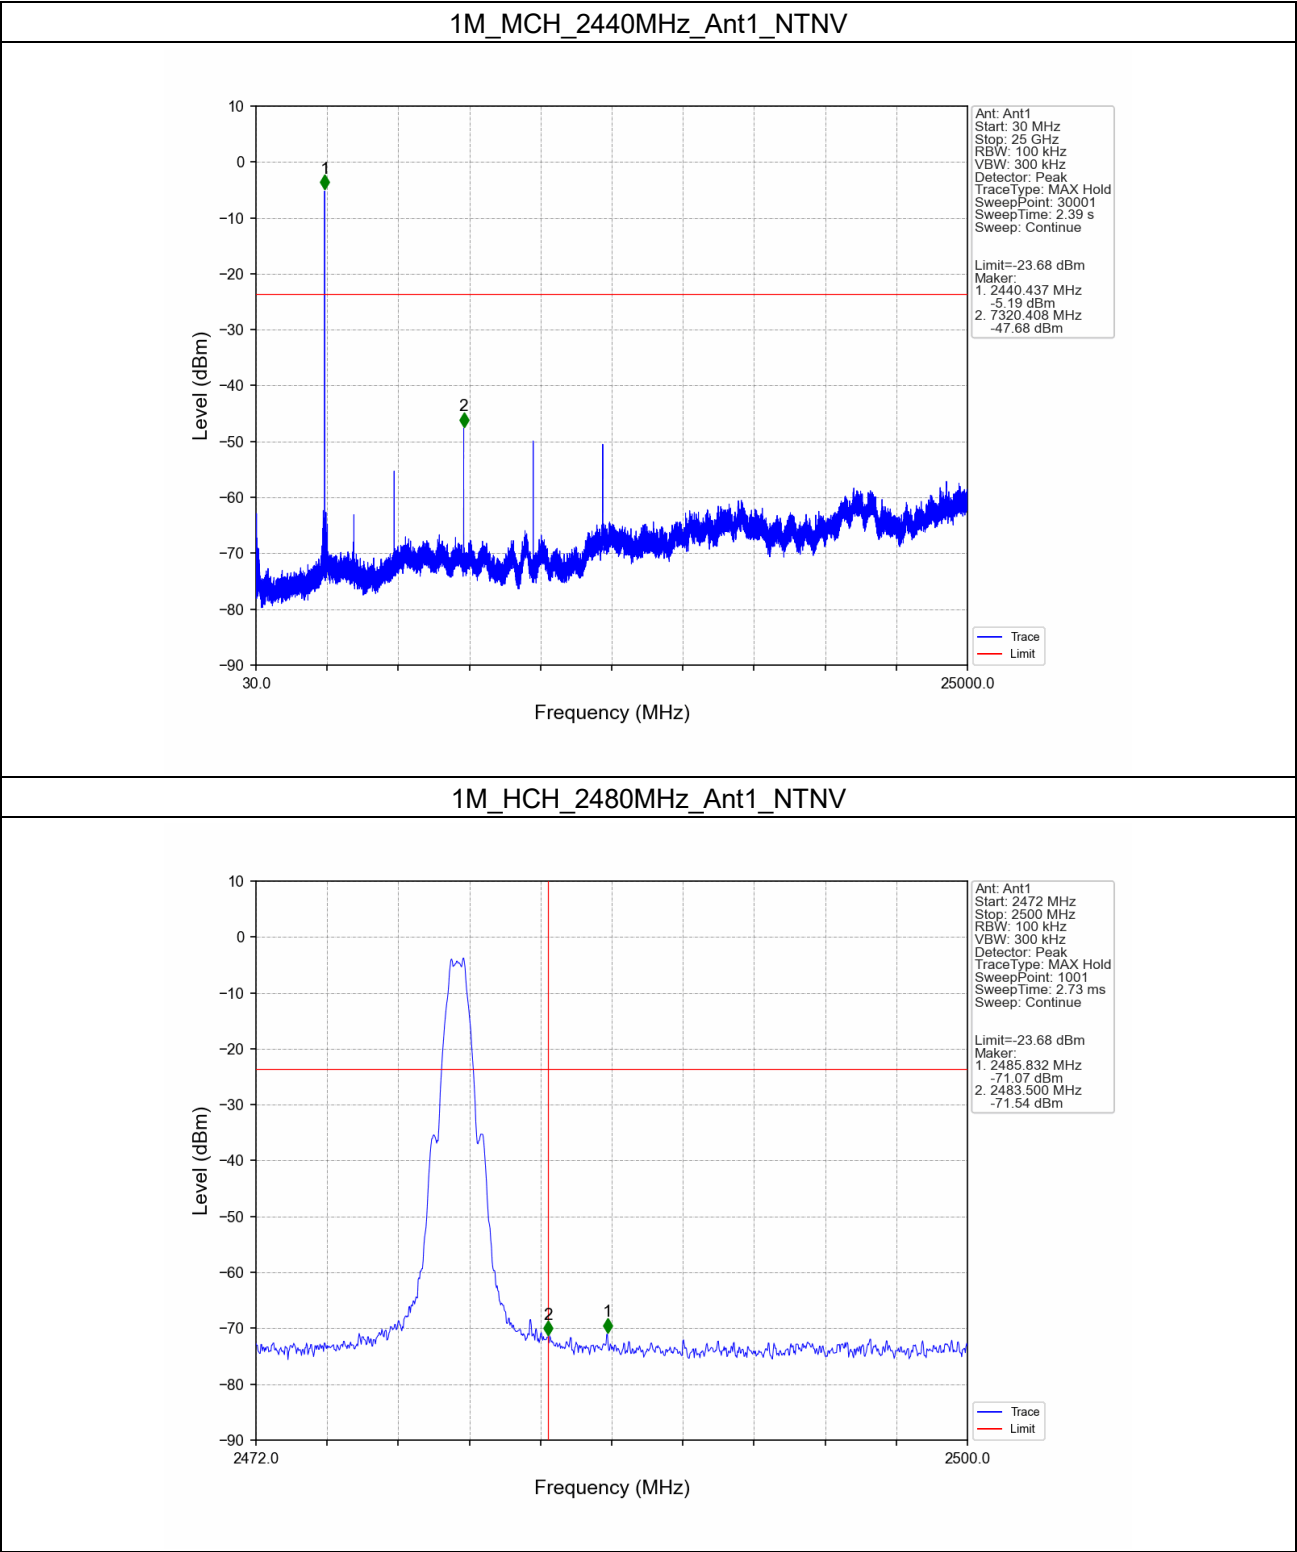

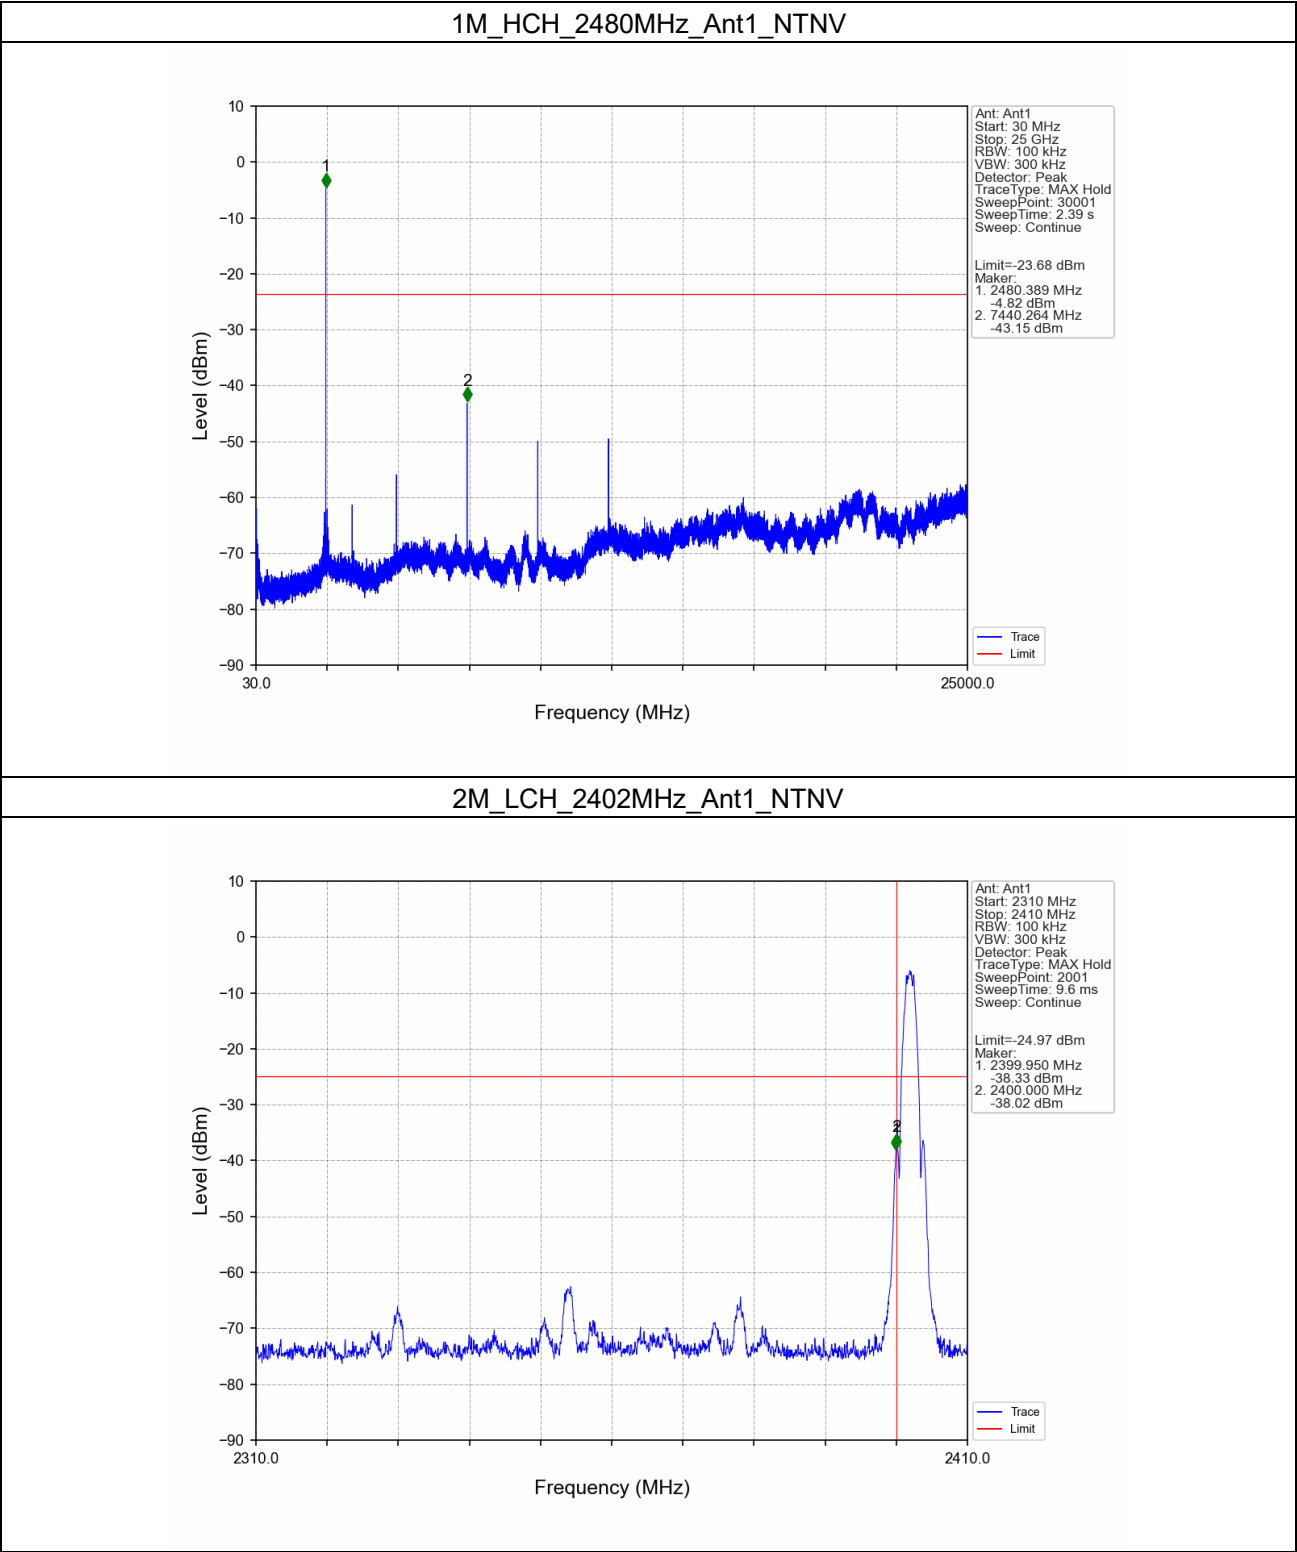

2M_LCH_2402MHz_Ant1_NTNV

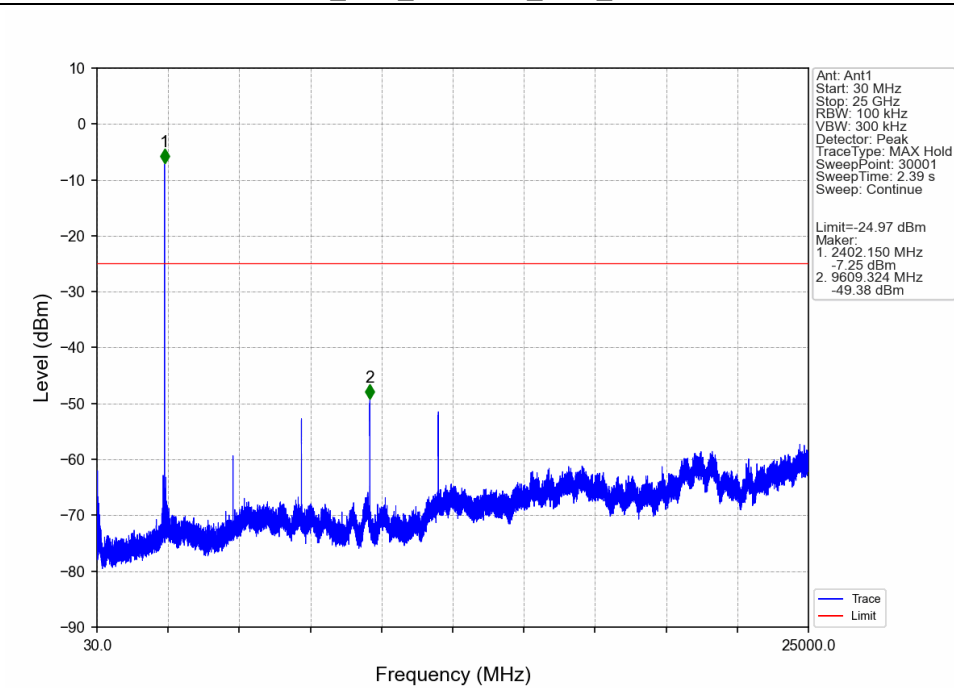

2M_MCH_2440MHz_Ant1_NTNV

