



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V04

Report Template Revision Date: 2018-07-06

TEST REPORT

Report No. : CQASZ20201200047EX-01

Applicant: Wenzhou Morning Electronics Co.,LTD

Address of Applicant: NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China

Equipment Under Test (EUT):

Product: Smart Switch

All Model No.: WS-EU3-RF, SYT-A01, SYT-B01, SYT-C01, SYT-ZB01, WS-EU1-RF, WS-US1-RF, WS-EU1-L, WS-US1-L, WS-EUB1-WR, ZS-EUB1, ZTS-EU1, ZTS-EU1-WR, ZTS-US1, ZTS-US1-WR, WS-EUR-C, WS-USR-C, WS-EUR-2C, WS-USR-2C, WS-EUR-F, WS-USR-F, WS-EUR-FL, WS-USR-FL, WS-EUR-D, WS-USR-D, ZTS-EUR-C, ZTS-USR-C, ZTS-EUR-2C, ZTS-USR-2C, ZTS-EUR-F, ZTS-USR-F, ZTS-EUR-FL, ZTS-USR-FL, ZTS-EUR-D, ZTS-USR-D, SR-WS1, SR-ZS1, BS-EU BS-US BS-EUB

Test Model No.: WS-EU3-RF

Brand Name: N/A

FCC ID: 2AT8P-WSEUNX

Standards: 47 CFR FCC Part 15 Subpart C 15.247

Date of Test: Dec. 18, 2020 to Jan. 04, 2021

Date of Issue: Jan. 04, 2021

Test Result : PASS

Tested By:

Jun Li

(Jun Li)

Reviewed By:

Ares Liu

(Ares Liu)

Approved By:

Sheek Luo

(Sheek Luo)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested.

Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History of Report

Report No.	Version	Description	Issue Date
CQASZ20201200047EX-01	Rev.01	Initial report	Jan. 04, 2021

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

3 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY	3
3 CONTENTS.....	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 DESCRIPTION OF SUPPORT UNITS	7
4.4 TEST LOCATION	7
4.5 TEST FACILITY	7
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.7 DEVIATION FROM STANDARDS	8
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
4.10 EQUIPMENT LIST.....	9
5 TEST RESULTS AND MEASUREMENT DATA	10
5.1 ANTENNA REQUIREMENT	10
5.2 CONDUCTED EMISSIONS	11
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	15
5.4 6dB OCCUPY BANDWIDTH	16
5.5 POWER SPECTRAL DENSITY	21
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	26
5.7 RF CONDUCTED SPURIOUS EMISSIONS	31
5.8 RADIATED SPURIOUS EMISSIONS.....	45
5.8.1 Radiated emission below 1GHz	48
5.8.2 Transmitter emission above 1GHz	50
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	52
6 PHOTOGRAPHS - EUT TEST SETUP.....	58
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	60

4 General Information

4.1 Client Information

Applicant:	Wenzhou Morning Electronics Co.,LTD
Address of Applicant:	NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China
Manufacturer:	Wenzhou Morning Electronics Co.,LTD
Address of Manufacturer:	NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing, Zhejiang, China

4.2 General Description of EUT

Product Name:	Smart Switch
Model No.:	WS-EU3-RF
All Model No.:	WS-EU3-RF, SYT-A01, SYT-B01, SYT-C01, SYT-ZB01, WS-EU1-RF, WS-US1-RF, WS-EU1-L, WS-US1-L, WS-EUB1-WR, ZS-EUB1, ZTS-EU1, ZTS-EU1-WR, ZTS-US1, ZTS-US1-WR, WS-EUR-C, WS-USR-C, WS-EUR-2C, WS-USR-2C, WS-EUR-F, WS-USR-F, WS-EUR-FL, WS-USR-FL, WS-EUR-D, WS-USR-D, ZTS-EUR-C, ZTS-USR-C, ZTS-EUR-2C, ZTS-USR-2C, ZTS-EUR-F, ZTS-USR-F, ZTS-EUR-FL, ZTS-USR-FL, ZTS-EUR-D, ZTS-USR-D, SR-WS1, SR-ZS1, BS-EU, BS-US, BS-EUB
Trade Mark:	N/A
Hardware version:	V1.0
Software version:	V2.5.8
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422 MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n(HT40): 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11 g/n(HT20)/n(HT40) : OFDM
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Test Software of EUT:	RF test (manufacturer declare)
Antenna Type	PCB Antenna
Antenna Gain	0dBi
Power Supply:	AC 120V 50/60Hz
Adapter Information:	/

Note: Please refer to the instruction manual for details.

There are many models here, but only tested: WS-EU3-RF, Their electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20)		For 802.11n (HT40)	
Channel	Frequency	Channel	Frequency
The Lowest channel	2412MHz	The Lowest channel	2422MHz
The Middle channel	2437MHz	The Middle channel	2437MHz
The Highest channel	2462MHz	The Highest channel	2452MHz

Note: Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.3 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	/

4.4 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.

4.10 Equipment List

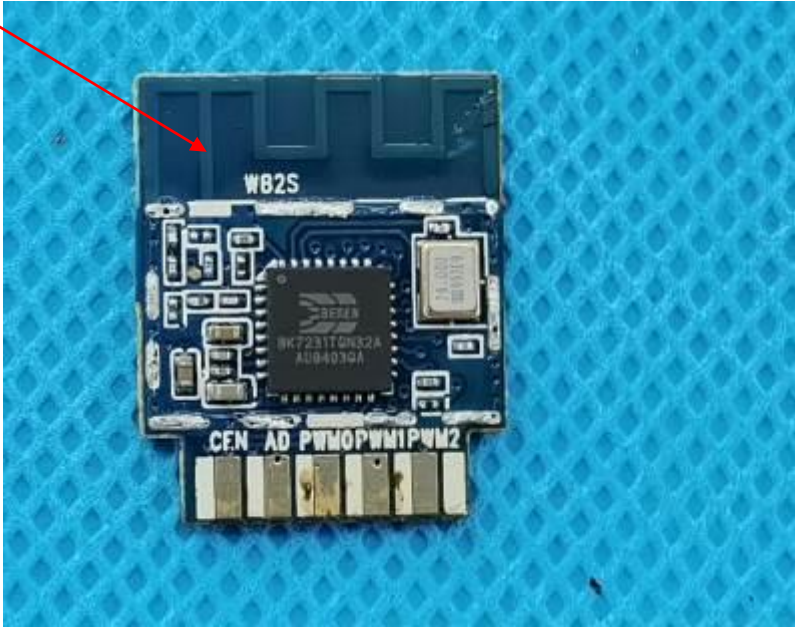
Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/9/22	2021/9/21
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/24	2021/10/23
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/9/22	2021/9/21
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/10/28	2021/10/27
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2020/10/24	2021/10/23
Bilog Antenna	R&S	HL562	CQA-011	2020/9/22	2021/9/21
Horn Antenna	R&S	HF906	CQA-012	2020/9/22	2021/9/21
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/22	2021/9/21
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/9/22	2021/9/21
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/9/22	2021/9/21
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/22	2021/9/21
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/22	2021/9/21
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2020/9/22	2021/9/21
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2020/9/22	2021/9/21
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/22	2021/9/21
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/9/22	2021/9/21
LISN	R&S	ENV216	CQA-003	2020/11/1	2021/10/30
Coaxial cable	CQA	N/A	CQA-C009	2020/9/22	2021/9/21

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

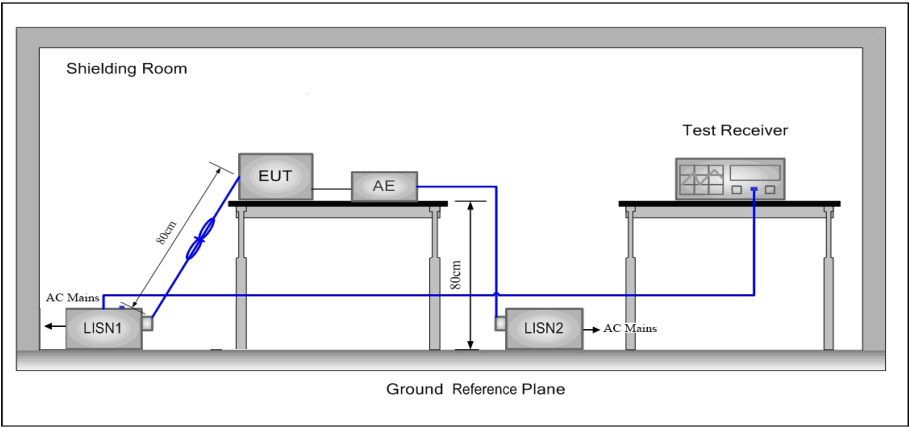
5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Antenna 
The antenna is PCB antenna. The best case gain of the antenna is 0dBi.	

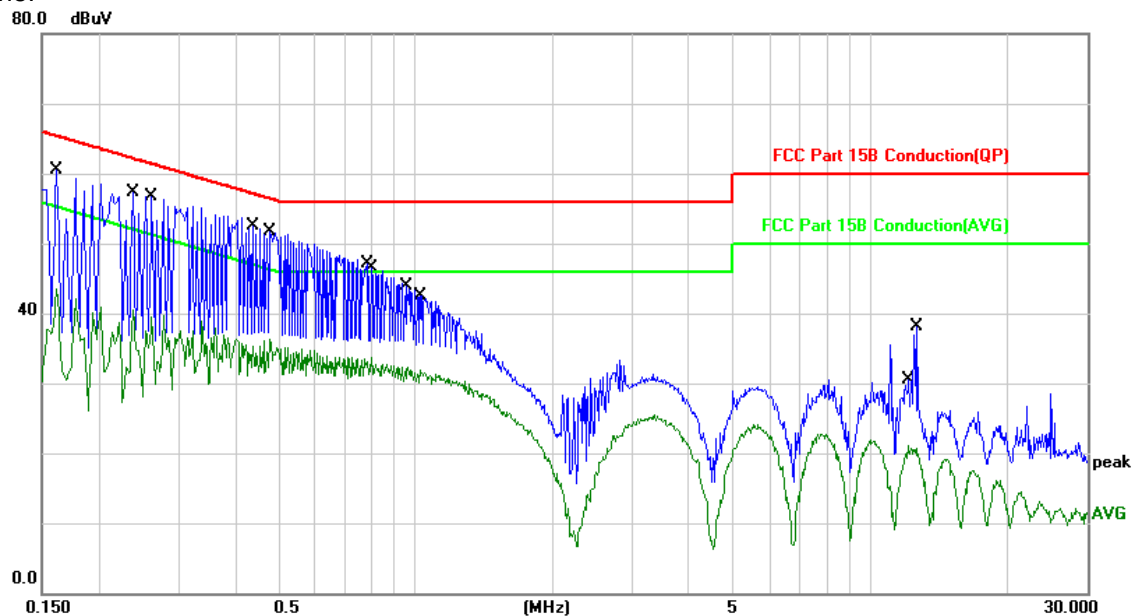
5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	All modes of 802.11b/g/n20/n40 were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

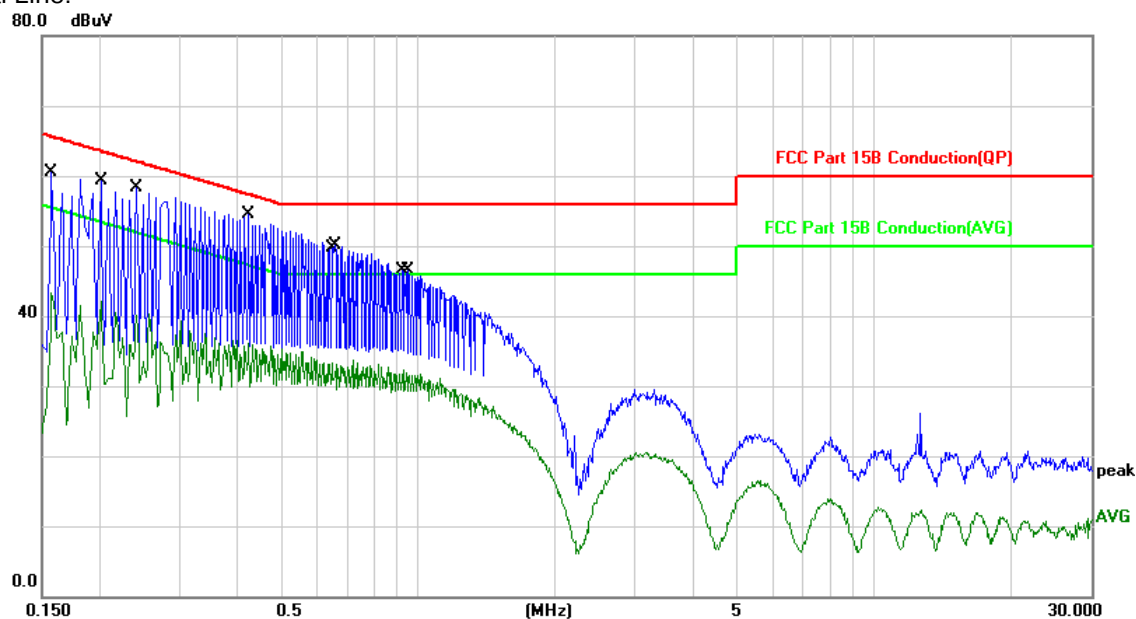


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	60.71	-0.13	60.58	65.36	-4.78	QP	
2		0.1620	43.61	-0.13	43.48	55.36	-11.88	AVG	
3		0.2380	40.51	-0.11	40.40	52.16	-11.76	AVG	
4		0.2620	56.72	-0.11	56.61	61.36	-4.75	QP	
5	*	0.4380	52.44	-0.02	52.42	57.10	-4.68	QP	
6		0.4780	36.34	-0.03	36.31	46.37	-10.06	AVG	
7		0.7820	47.12	-0.07	47.05	56.00	-8.95	QP	
8		0.7980	33.81	-0.07	33.74	46.00	-12.26	AVG	
9		0.9620	32.49	-0.11	32.38	46.00	-13.62	AVG	
10		1.0220	42.70	-0.12	42.58	56.00	-13.42	QP	
11		12.1140	21.17	-0.14	21.03	50.00	-28.97	AVG	
12		12.6860	38.27	-0.14	38.13	60.00	-21.87	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	60.62	-0.13	60.49	65.56	-5.07	QP	
2		0.1580	43.40	-0.13	43.27	55.56	-12.29	AVG	
3		0.2020	59.35	-0.13	59.22	63.52	-4.30	QP	
4		0.2020	42.21	-0.13	42.08	53.52	-11.44	AVG	
5		0.2420	58.37	-0.11	58.26	62.02	-3.76	QP	
6		0.2420	40.18	-0.11	40.07	52.02	-11.95	AVG	
7	*	0.4260	54.43	-0.02	54.41	57.33	-2.92	QP	
8		0.4260	36.08	-0.02	36.06	47.33	-11.27	AVG	
9		0.6500	33.40	-0.05	33.35	46.00	-12.65	AVG	
10		0.6580	50.20	-0.05	50.15	56.00	-5.85	QP	
11		0.9340	32.34	-0.11	32.23	46.00	-13.77	AVG	
12		0.9540	46.65	-0.11	46.54	56.00	-9.46	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

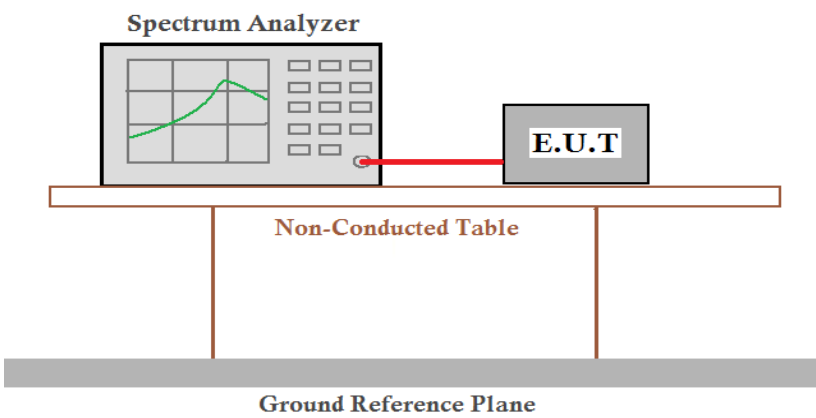
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20)/n(HT40); Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

WIFI

Type	Test channel	Peak Output Power (dBm)	Average Output Power dBm)	Limit (dBm)	Result
802.11b	Lowest	14.63	10.89	30.00	Pass
	Middle	13.47	9.73		
	Highest	12.97	9.07		
802.11g	Lowest	13.97	8.35	30.00	Pass
	Middle	13.57	7.15		
	Highest	11.35	4.70		
802.11n(HT20)	Lowest	13.08	8.11	30.00	Pass
	Middle	12.78	7.76		
	Highest	11.54	6.41		
802.11n(HT40)	Lowest	12.53	7.56	30.00	Pass
	Middle	12.10	6.03		
	Highest	11.01	6.08		

Note: 1.The test results including the cable lose.

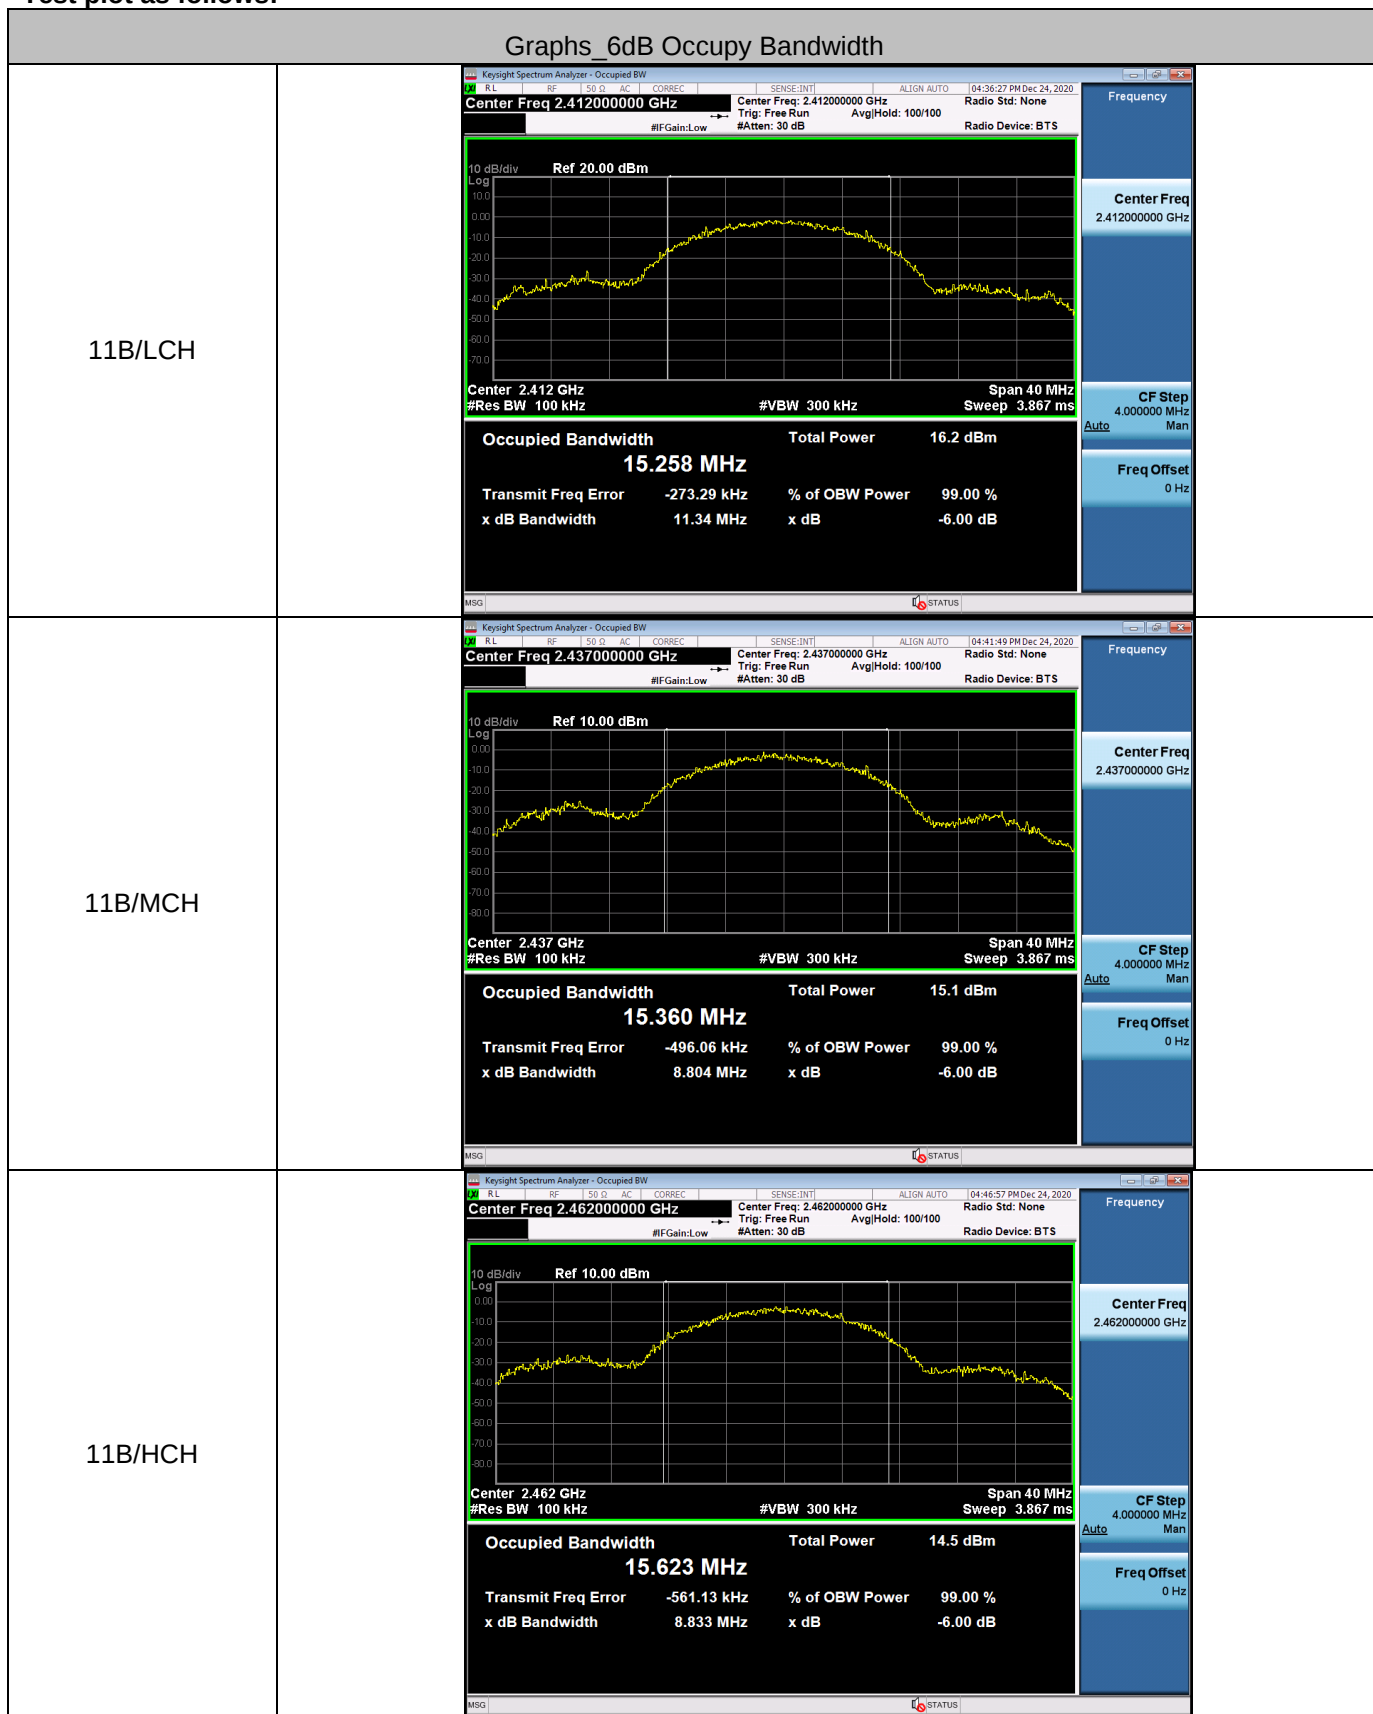
5.4 6dB Occupy Bandwidth

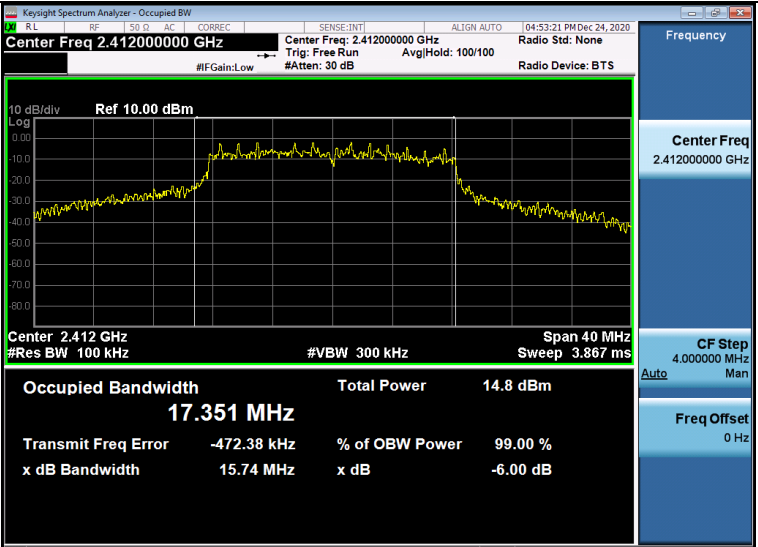
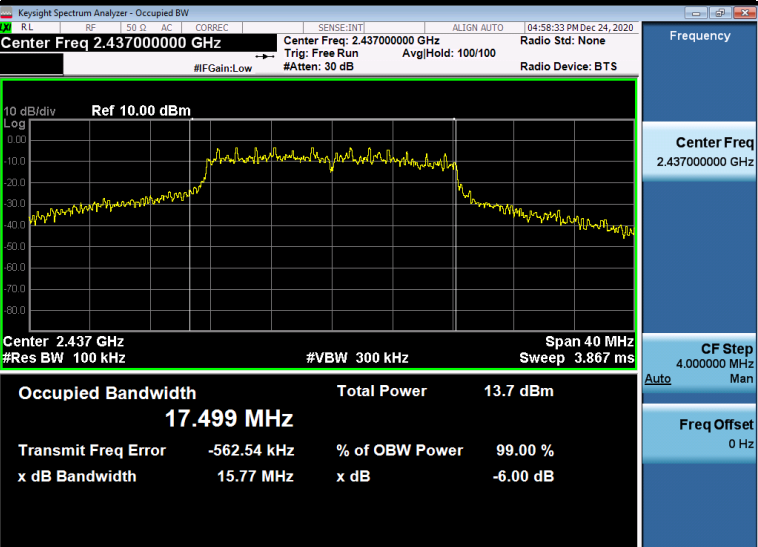
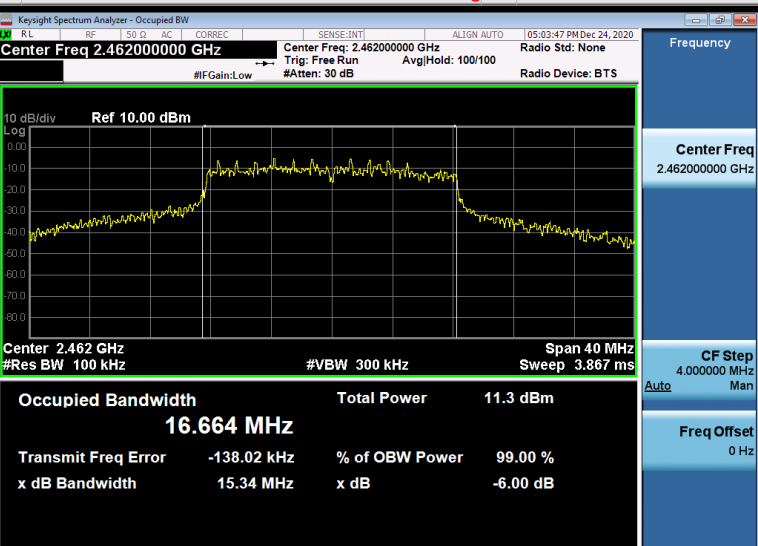
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20)/n(HT40); Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

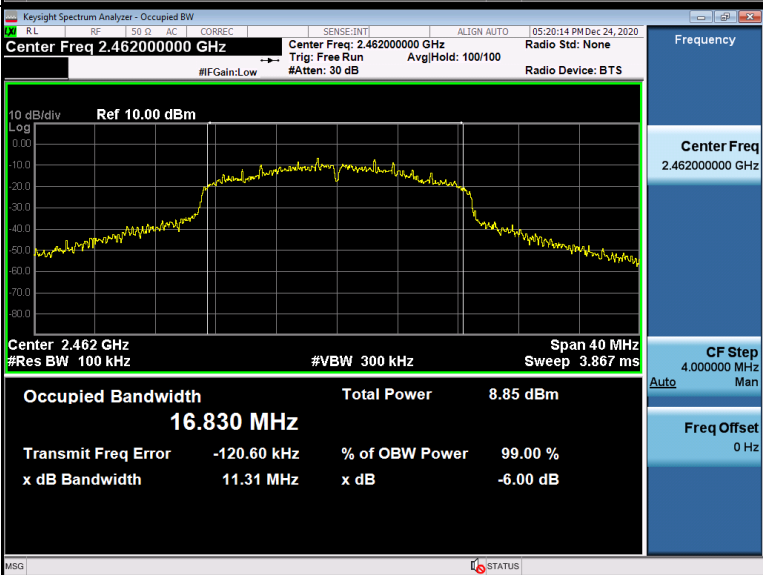
Measurement Data

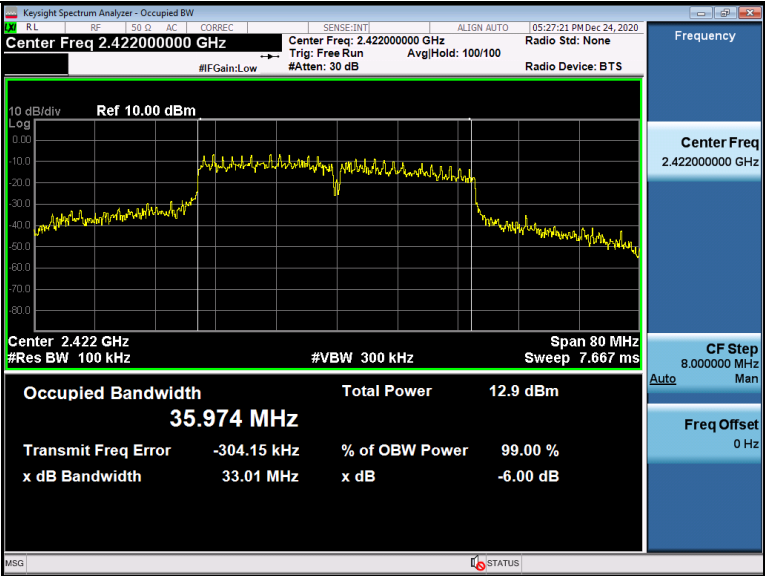
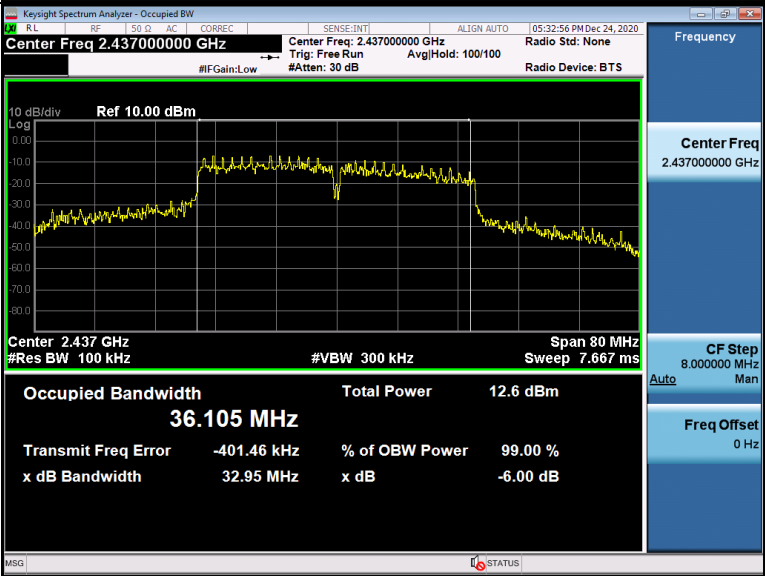
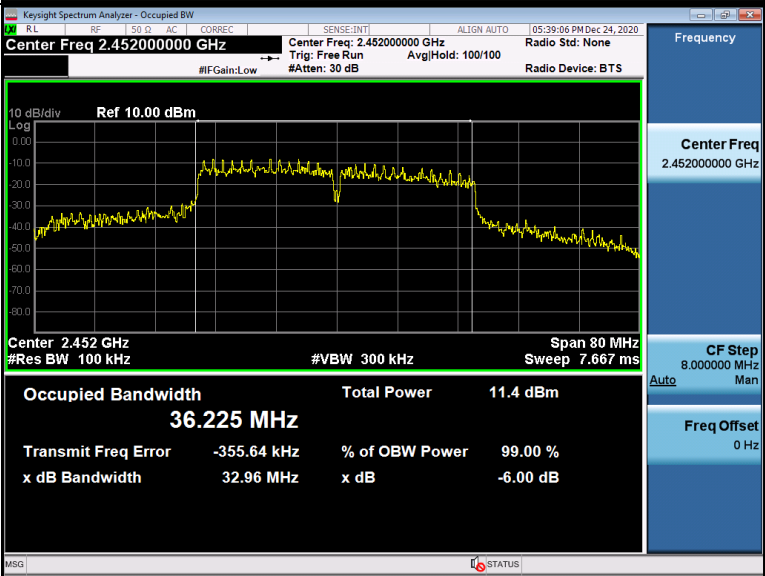
Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	Lowest	11.342	≥ 500	Pass
	Middle	8.804		
	Highest	8.833		
802.11g	Lowest	15.74	≥ 500	Pass
	Middle	15.77		
	Highest	15.34		
802.11n(HT20)	Lowest	12.60	≥ 500	Pass
	Middle	12.55		
	Highest	11.31		
802.11n(HT40)	Lowest	33.01	≥ 500	Pass
	Middle	32.95		
	Highest	32.96		

Test plot as follows:

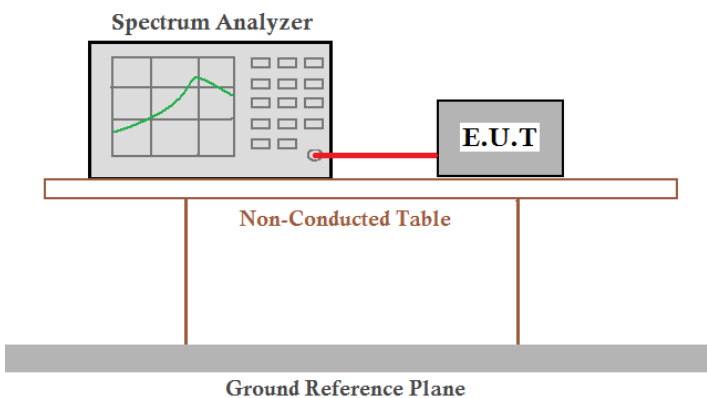


11G/LCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 30 dB 10 dB/div Ref 10.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.351 MHz Total Power 14.8 dBm Transmit Freq Error -472.38 kHz % of OBW Power 99.00 % x dB Bandwidth 15.74 MHz x dB -6.00 dB Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz MSG STATUS
11G/MCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 30 dB 10 dB/div Ref 10.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.499 MHz Total Power 13.7 dBm Transmit Freq Error -562.54 kHz % of OBW Power 99.00 % x dB Bandwidth 15.77 MHz x dB -6.00 dB Frequency Center Freq 2.43700000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz MSG STATUS
11G/HCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 30 dB 10 dB/div Ref 10.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.664 MHz Total Power 11.3 dBm Transmit Freq Error -138.02 kHz % of OBW Power 99.00 % x dB Bandwidth 15.34 MHz x dB -6.00 dB Frequency Center Freq 2.46200000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz MSG STATUS

11N20/LCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.871 MHz Total Power 14.8 dBm Transmit Freq Error -509.67 kHz % of OBW Power 99.00 % x dB Bandwidth 12.60 MHz x dB -6.00 dB CF Step 4.000000 MHz Freq Offset 0 Hz
11N20/MCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.998 MHz Total Power 11.4 dBm Transmit Freq Error -211.29 kHz % of OBW Power 99.00 % x dB Bandwidth 12.55 MHz x dB -6.00 dB CF Step 4.000000 MHz Freq Offset 0 Hz
11N20/HCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.830 MHz Total Power 8.85 dBm Transmit Freq Error -120.60 kHz % of OBW Power 99.00 % x dB Bandwidth 11.31 MHz x dB -6.00 dB CF Step 4.000000 MHz Freq Offset 0 Hz

11N40/LCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.974 MHz Total Power 12.9 dBm Transmit Freq Error -304.15 kHz % of OBW Power 99.00 % x dB Bandwidth 33.01 MHz x dB -6.00 dB
11N40/MCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 36.105 MHz Total Power 12.6 dBm Transmit Freq Error -401.46 kHz % of OBW Power 99.00 % x dB Bandwidth 32.95 MHz x dB -6.00 dB
11N40/HCH	 Keysight Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS 10 dB/div Ref 10.00 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 36.225 MHz Total Power 11.4 dBm Transmit Freq Error -355.64 kHz % of OBW Power 99.00 % x dB Bandwidth 32.96 MHz x dB -6.00 dB

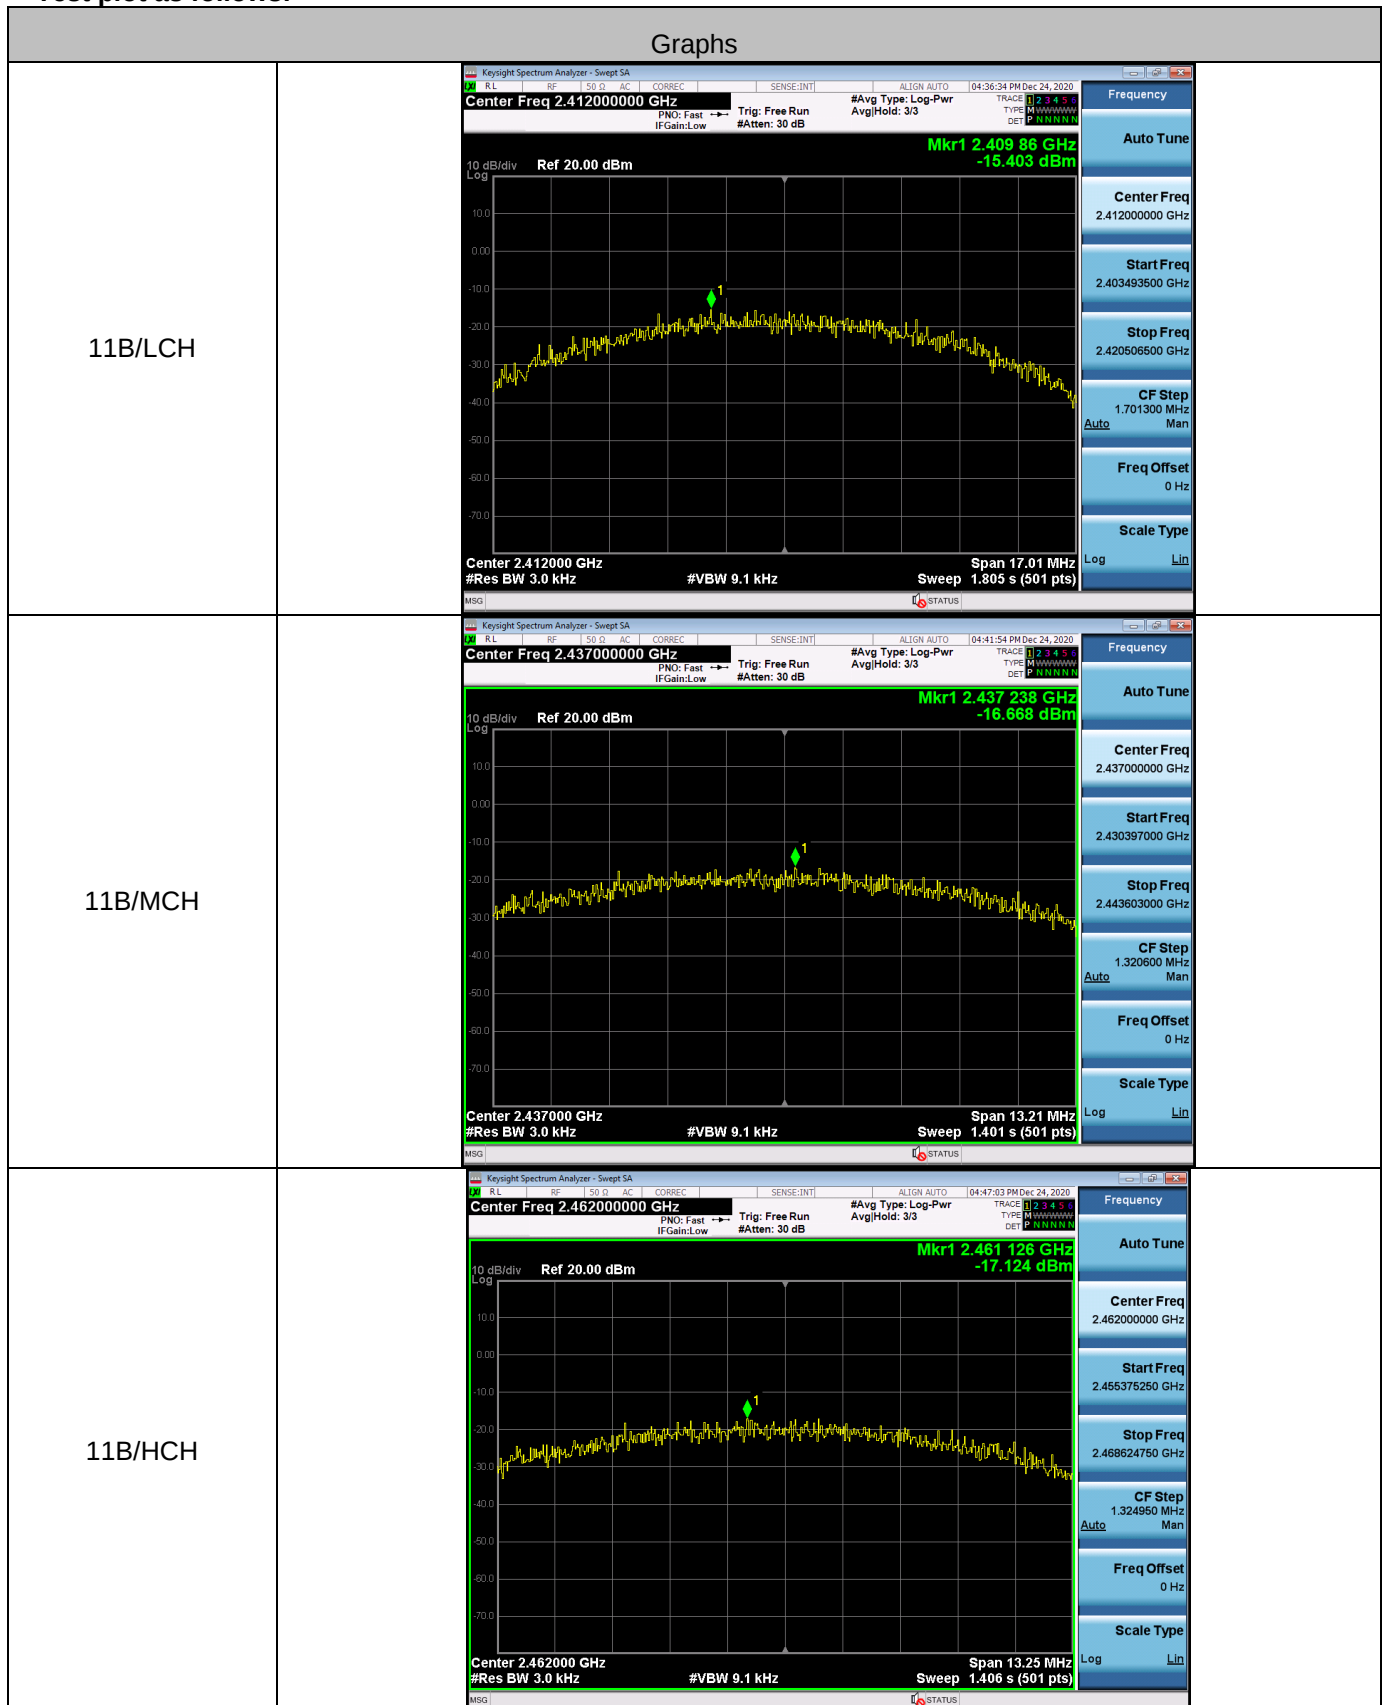
5.5 Power Spectral Density

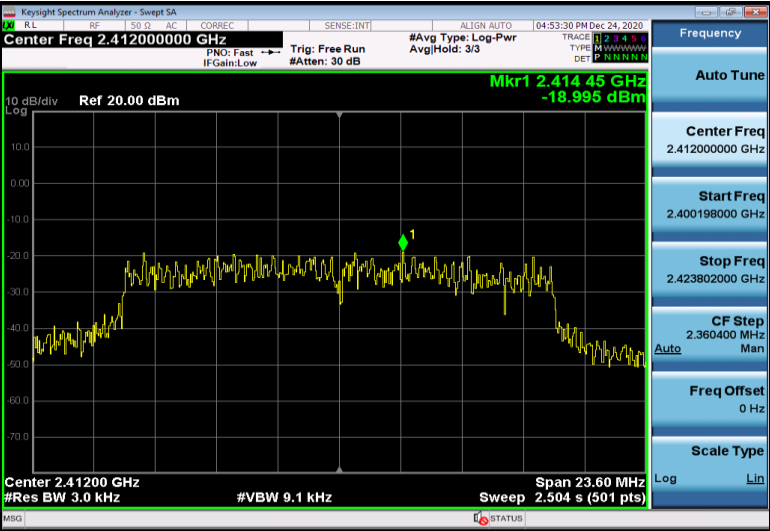
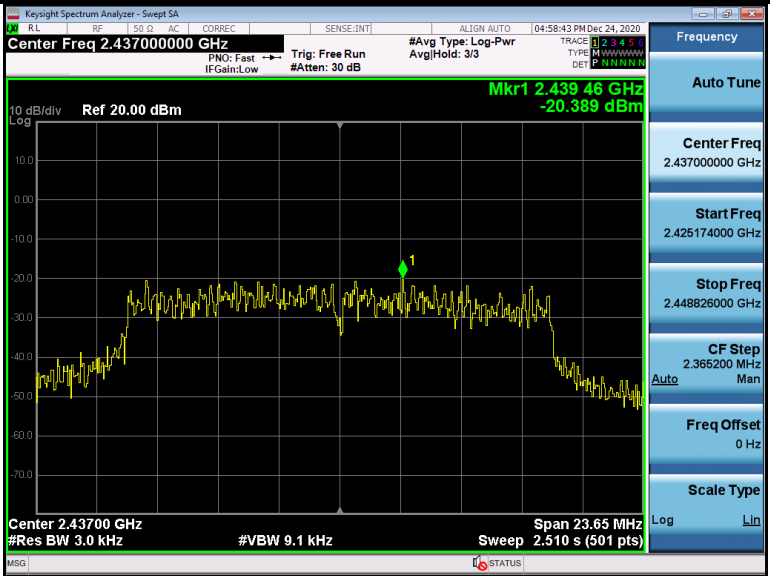
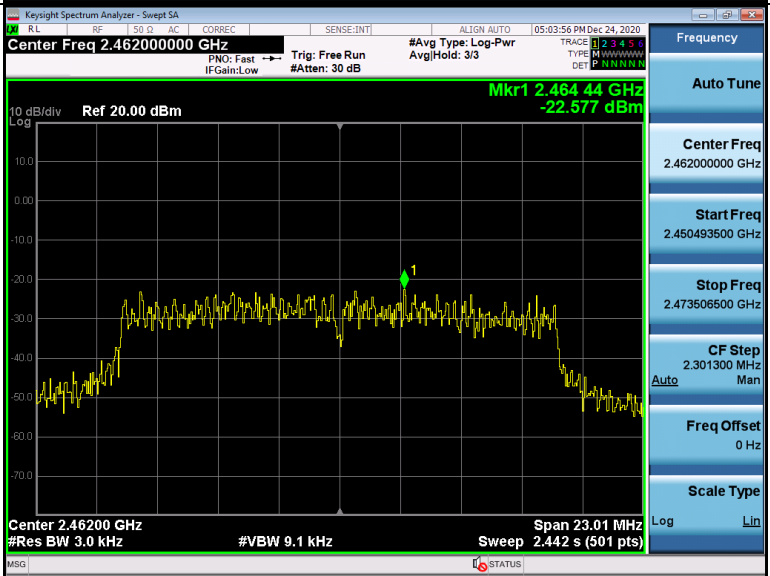
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20)/n(HT40); Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass

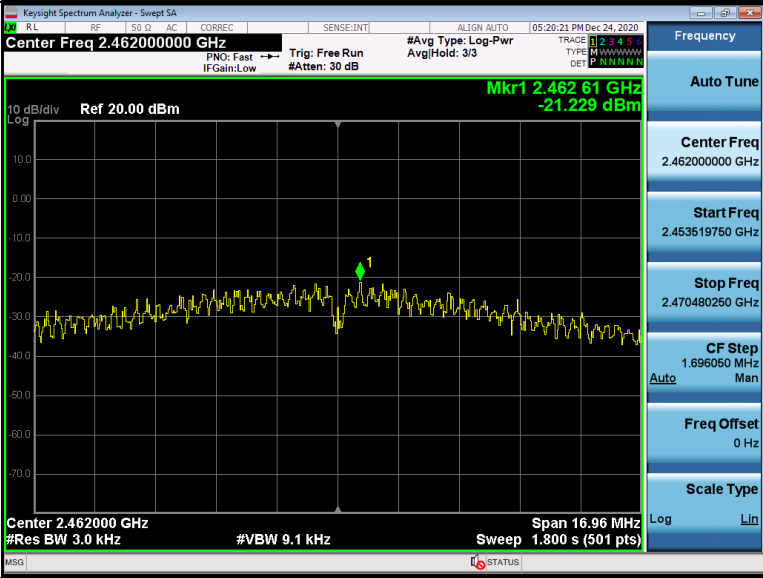
Measurement Data

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	Lowest	-15.403	8	Pass
	Middle	-16.668		
	Highest	-17.124		
802.11g	Lowest	-18.995	8	Pass
	Middle	-20.389		
	Highest	-22.577		
802.11n(HT20)	Lowest	-15.621	8	Pass
	Middle	-19.984		
	Highest	-21.229		
802.11n(HT40)	Lowest	-24.292	8	Pass
	Middle	-24.673		
	Highest	-26.508		

Test plot as follows:

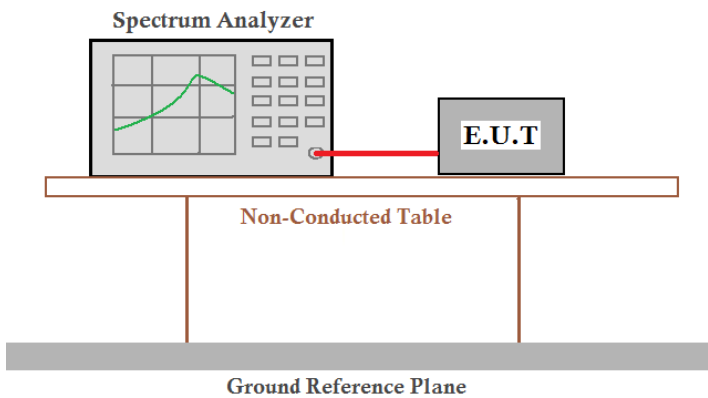


11G/LCH	
11G/MCH	
11G/HCH	

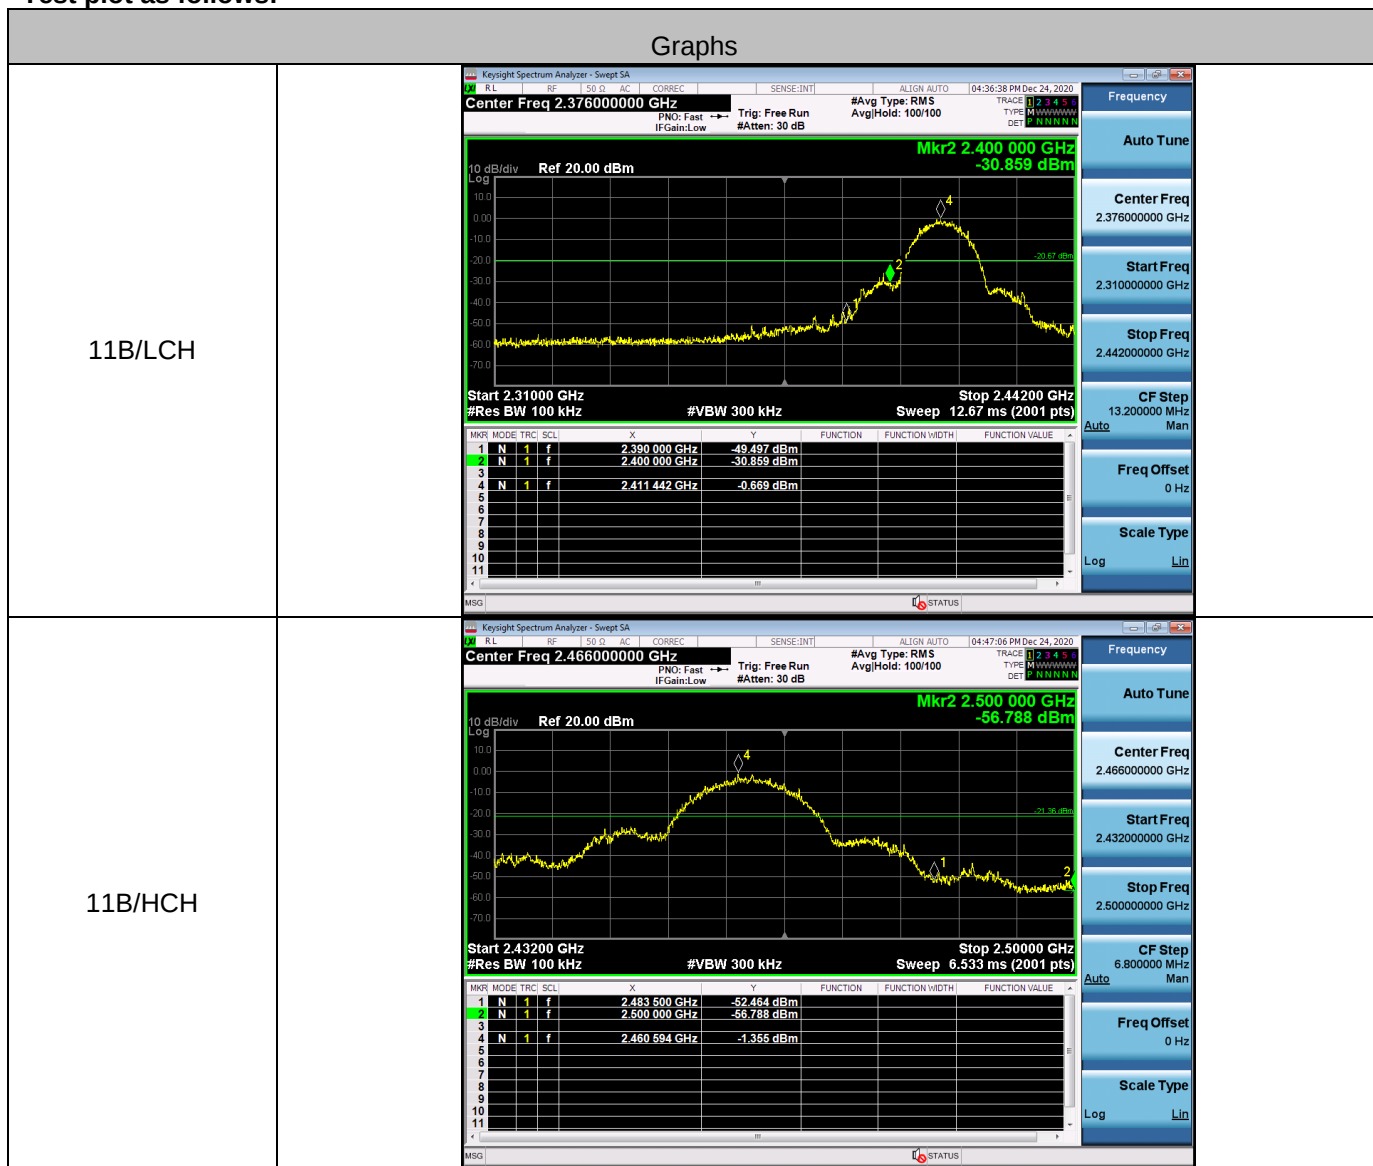
11N20/LCH	
11N20/MCH	
11N20/HCH	

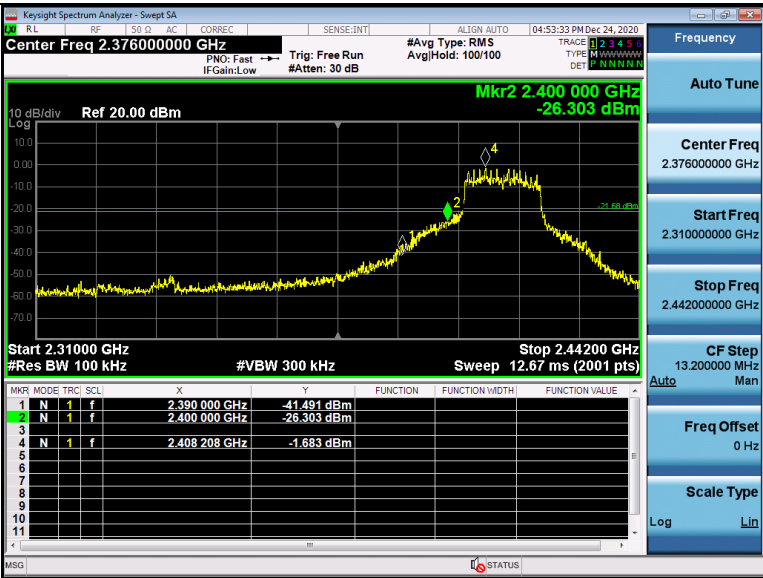
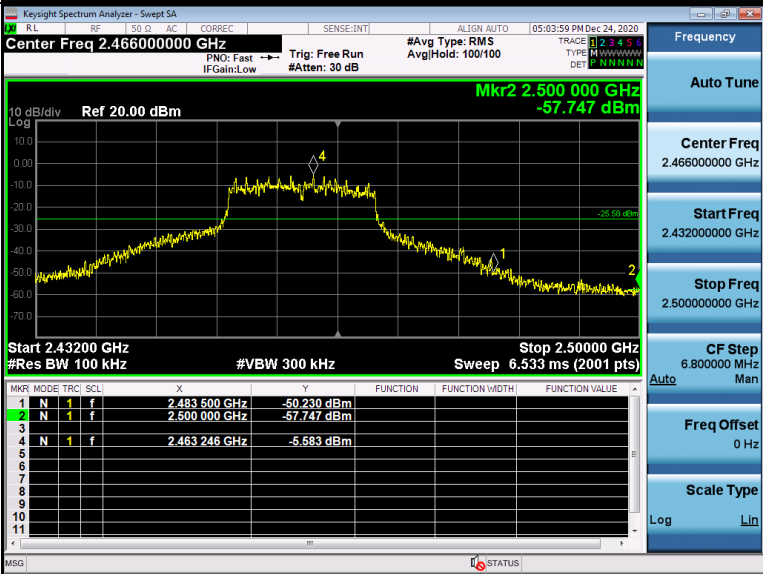
11N40/LCH	 Keysight Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Trig: Free Run #Avg Type: Log-Pwr AvgHold: 3/3 Ref 20.00 dBm Mkr1 2.41447 GHz -24.292 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 49.51 MHz Sweep 5.253 s (501 pts) Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.397244750 GHz Stop Freq 2.446755250 GHz CF Step 4.951050 MHz Auto Freq Offset 0 Hz Scale Type Log
11N40/MCH	 Keysight Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Trig: Free Run #Avg Type: Log-Pwr AvgHold: 3/3 Ref 20.00 dBm Mkr1 2.42949 GHz -24.673 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 49.42 MHz Sweep 5.243 s (501 pts) Frequency Auto Tune Center Freq 2.43700000 GHz Start Freq 2.412291250 GHz Stop Freq 2.461708750 GHz CF Step 4.941750 MHz Auto Freq Offset 0 Hz Scale Type Log
11N40/HCH	 Keysight Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Trig: Free Run #Avg Type: Log-Pwr AvgHold: 3/3 Ref 20.00 dBm Mkr1 2.44448 GHz -26.508 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 9.1 kHz Span 49.44 MHz Sweep 5.246 s (501 pts) Frequency Auto Tune Center Freq 2.45200000 GHz Start Freq 2.427277750 GHz Stop Freq 2.476722250 GHz CF Step 4.944450 MHz Auto Freq Offset 0 Hz Scale Type Log

5.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20)/n(HT40); Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test plot as follows:



11G/LCH		
11G/HCH		

11N20/LCH	Keysight Spectrum Analyzer - Swept SA Center Freq 2.376000000 GHz PN0: Fast IFGain:Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: 100/100 ALIGN AUTO 05:09:33 PM Dec 24, 2020 TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Log Ref 20.00 dBm Mkr2 2.400 000 GHz -25.970 dBm
-----------	---

11N40/LCH

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.396000000 GHz

Trig: Free Run #Att: 30 dB

#Avg Type: RMS Avg/Hold: 100/100

Ref 20.00 dBm

Mkr2 2.400 000 GHz -29.753 dBm

Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 16.53 ms (2001 pts)

Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.390 000 GHz	-38.787 dBm			
2	N	1	f	2.400 000 GHz	-29.753 dBm			
3								
4	N	1	f	2.414 490 GHz	-6.586 dBm			
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq 2.396000000 GHz

Start Freq 2.310000000 GHz

Stop Freq 2.482000000 GHz

CF Step 17.200000 MHz Man

Freq Offset 0 Hz

Scale Type Log Lin

11N40/HCH

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.446000000 GHz

Trig: Free Run #Att: 30 dB

#Avg Type: RMS Avg/Hold: 100/100

Ref 20.00 dBm

Mkr2 2.500 000 GHz -56.817 dBm

Start 2.39200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.40 ms (2001 pts)

Mkr	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.483 500 GHz	-44.508 dBm			
2	N	1	f	2.500 000 GHz	-56.817 dBm			
3								
4	N	1	f	2.436 740 GHz	-8.037 dBm			
5								
6								
7								
8								
9								
10								
11								

Frequency

Auto Tune

Center Freq 2.446000000 GHz

Start Freq 2.392000000 GHz

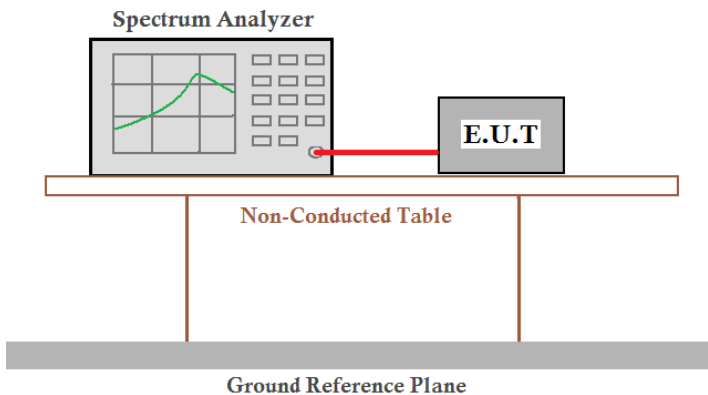
Stop Freq 2.500000000 GHz

CF Step 10.800000 MHz Man

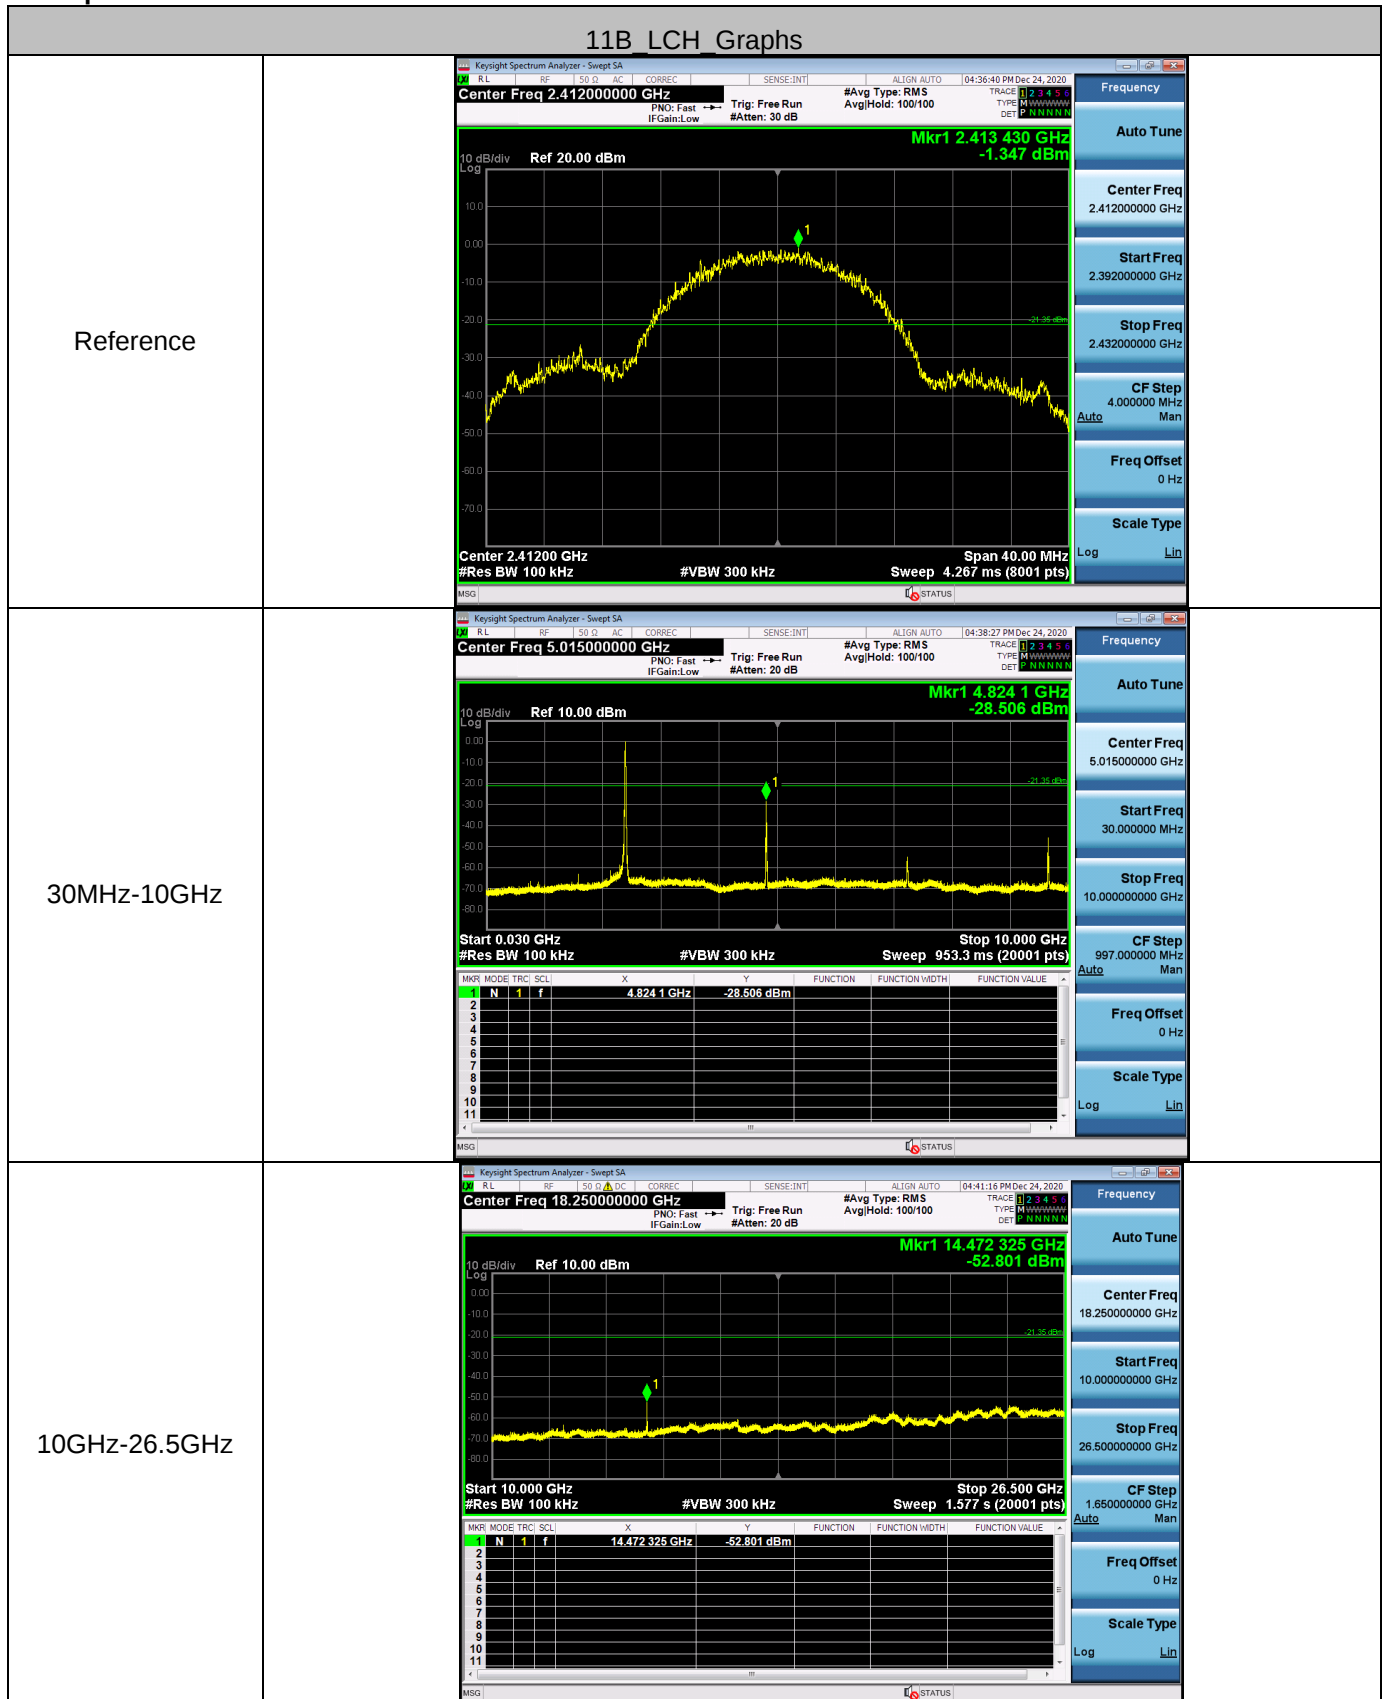
Freq Offset 0 Hz

Scale Type Log Lin

5.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20)/n(HT40); Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test plot as follows:

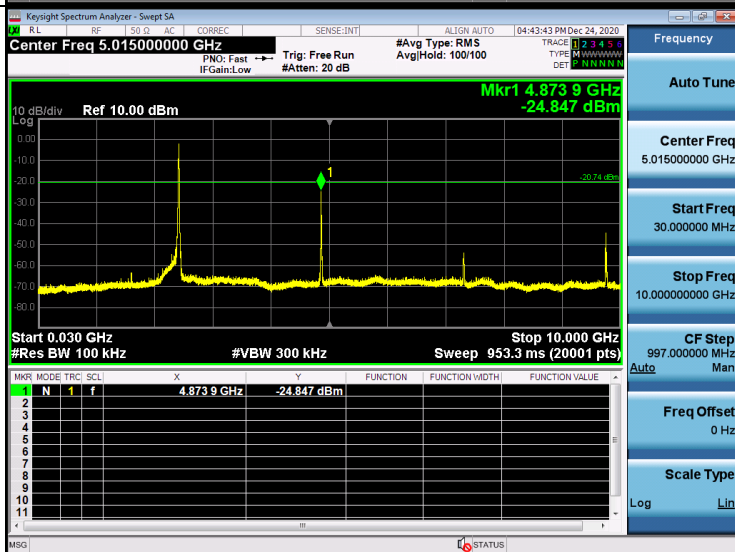


11B MCH Graphs

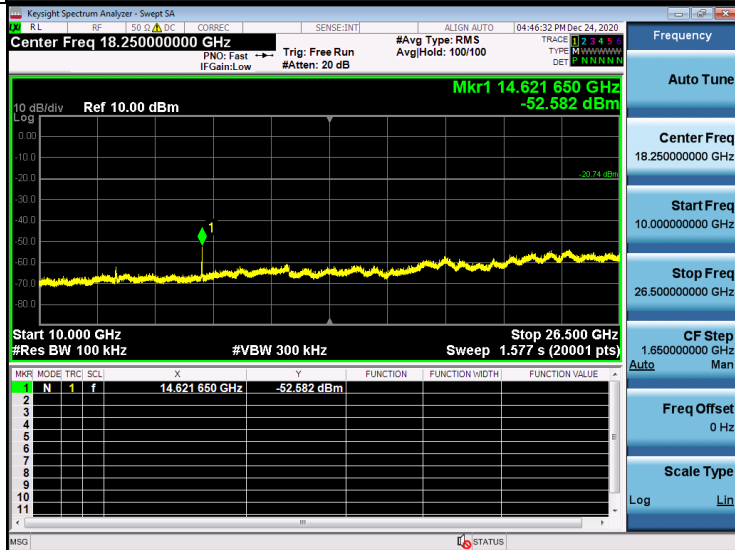
Reference

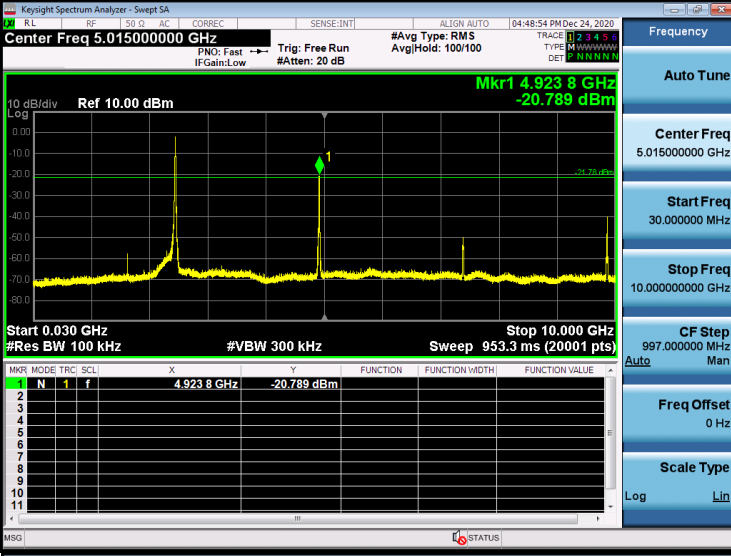
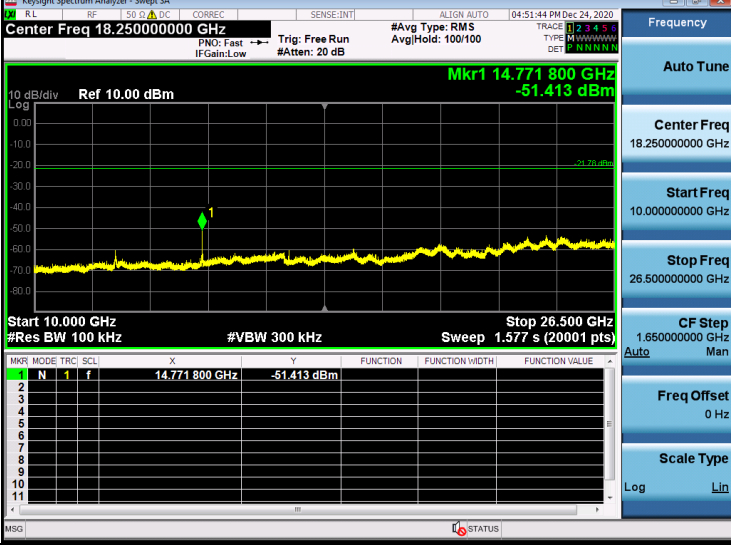


30MHz-10GHz



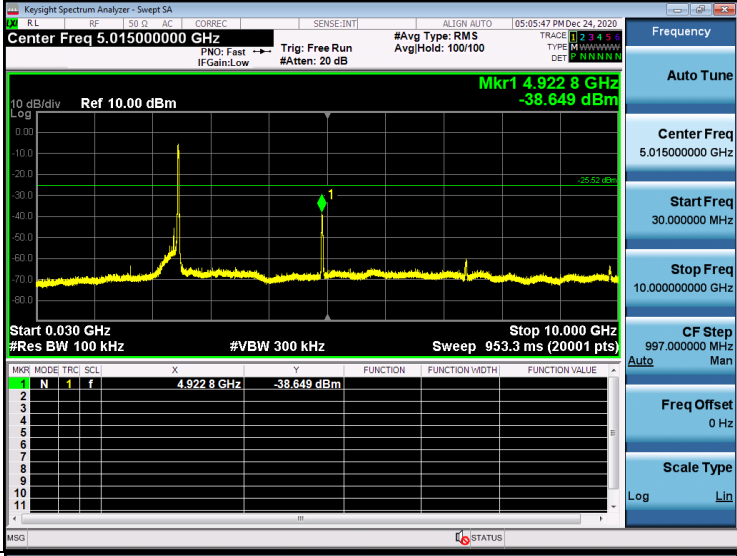
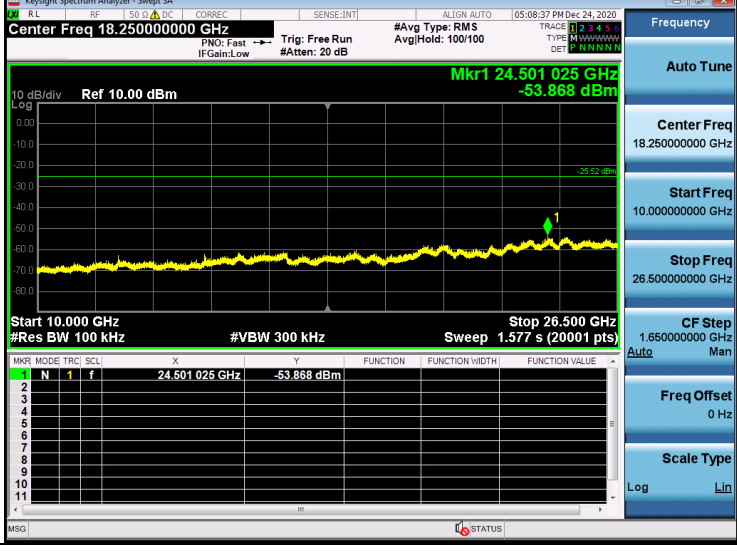
10GHz-26.5GHz



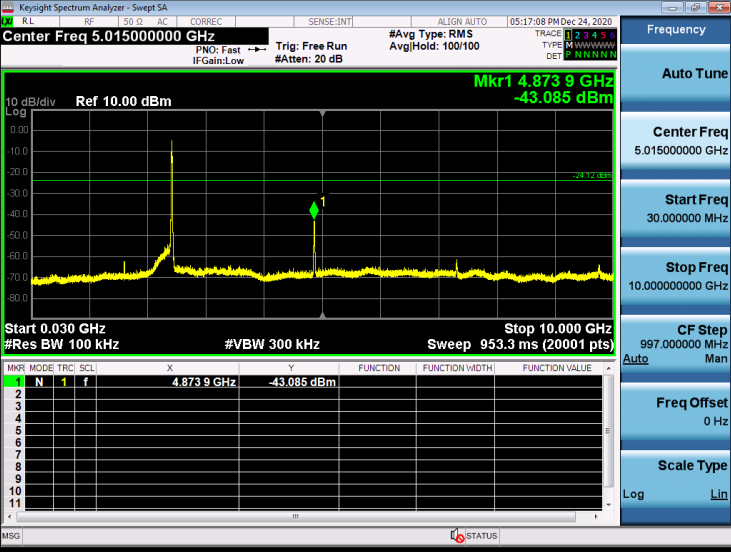
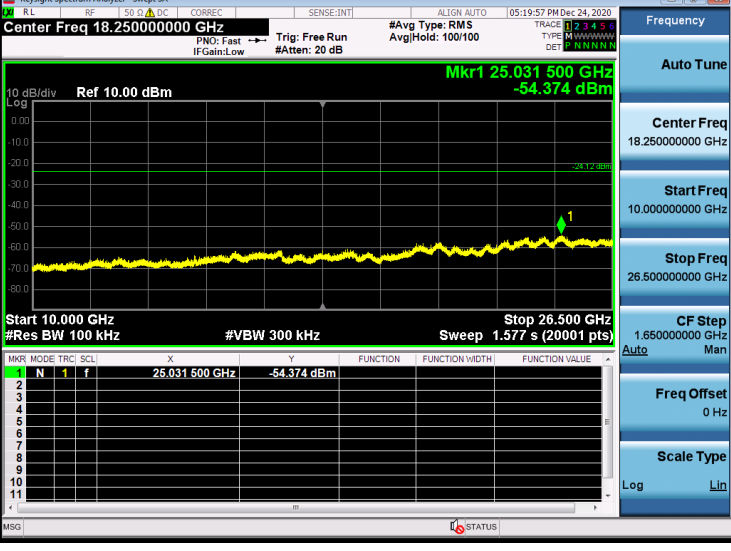
11B HCH Graphs		
Reference	 Keysight Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.267 ms (3001 pts) Mkr1 2.462 240 GHz -1.785 dBm	
30MHz-10GHz	 Keysight Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 953.3 ms (20001 pts) Mkr1 4.923 8 GHz -20.789 dBm	
10GHz-26.5GHz	 Keysight Spectrum Analyzer - Swept SA Center Freq 18.250000000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.577 s (20001 pts) Mkr1 14.771 800 GHz -51.413 dBm	

11G LCH Graphs		
Reference	Keysight Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref 20.00 dBm Mkr1 2.413 240 GHz -1.696 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.267 ms (3001 pts) Span 40.00 MHz Trig: Free Run #Avg Type: RMS Avg/Hold: 100/100 Trig: Fast #Atten: 30 dB IFGain: Low ALIGN AUTO 04:53:35 PM Dec 24, 2020 Frequency Auto Tune Center Freq 2.412000000 GHz Start Freq 2.392000000 GHz Stop Freq 2.432000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	
30MHz-10GHz	Keysight Spectrum Analyzer - Swept SA Center Freq 5.015000000 GHz Ref 10.00 dBm Mkr1 4.822 6 GHz -40.058 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 953.3 ms (20001 pts) Stop 10.000 GHz Trig: Free Run #Avg Type: RMS Avg/Hold: 100/100 Trig: Fast #Atten: 20 dB IFGain: Low ALIGN AUTO 04:55:22 PM Dec 24, 2020 Frequency Auto Tune Center Freq 5.015000000 GHz Start Freq 30.000000 MHz Stop Freq 10.000000000 GHz CF Step 997.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	
10GHz-26.5GHz	Keysight Spectrum Analyzer - Swept SA Center Freq 18.250000000 GHz Ref 10.00 dBm Mkr1 25.000 150 GHz -53.463 dBm Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.577 s (20001 pts) Stop 26.500 GHz Trig: Free Run #Avg Type: RMS Avg/Hold: 100/100 Trig: Fast #Atten: 20 dB IFGain: Low ALIGN AUTO 04:58:11 PM Dec 24, 2020 Frequency Auto Tune Center Freq 18.250000000 GHz Start Freq 10.000000000 GHz Stop Freq 26.500000000 GHz CF Step 1.650000000 GHz Man Freq Offset 0 Hz Scale Type Log Lin	

11G MCH Graphs		
Reference		
30MHz-10GHz		
10GHz-26.5GHz		

11G HCH Graphs		
Reference		
30MHz-10GHz		
10GHz-26.5GHz		

11N20 LCH Graphs		
Reference	Keysight Spectrum Analyzer - Swept SA RL RF 50 dB AC CORREC SENSE-INT ALIGN AUTO 05-09-55 PM Dec 24, 2020 Center Freq 2.412000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: 100/100 TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Ref 20.00 dBm Log Mkr1 2.409 455 GHz -2.002 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.267 ms (8001 pts) Span 40.00 MHz MSG STATUS Frequency Auto Tune Center Freq 2.412000000 GHz Start Freq 2.392000000 GHz Stop Freq 2.432000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	
30MHz-10GHz	Keysight Spectrum Analyzer - Swept SA RL RF 50 dB DC CORREC SENSE-INT ALIGN AUTO 05-11-41 PM Dec 24, 2020 Center Freq 5.015000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB #Avg Type: RMS Avg/Hold: 100/100 TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Ref 10.00 dBm Log Mkr1 4.822 6 GHz -39.390 dBm Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 953.3 ms (20001 pts) Stop 10.000 GHz MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 4.822 6 GHz -39.390 dBm 2 3 4 5 6 7 8 9 10 11 MSG STATUS Frequency Auto Tune Center Freq 5.015000000 GHz Start Freq 30.000000 MHz Stop Freq 10.000000000 GHz CF Step 997.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	
10GHz-26.5GHz	Keysight Spectrum Analyzer - Swept SA RL RF 50 dB DC CORREC SENSE-INT ALIGN AUTO 05-14-31 PM Dec 24, 2020 Center Freq 18.250000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 20 dB #Avg Type: RMS Avg/Hold: 100/100 TRACE 1 2 3 4 5 6 TYPE M W W W W W W W DET P N N N N N 10 dB/div Ref 10.00 dBm Log Mkr1 25.044 700 GHz -54.042 dBm Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.577 s (20001 pts) Stop 26.500 GHz MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 25.044 700 GHz -54.042 dBm 2 3 4 5 6 7 8 9 10 11 MSG STATUS Frequency Auto Tune Center Freq 18.250000000 GHz Start Freq 10.000000000 GHz Stop Freq 26.500000000 GHz CF Step 1.650000000 GHz Man Freq Offset 0 Hz Scale Type Log Lin	

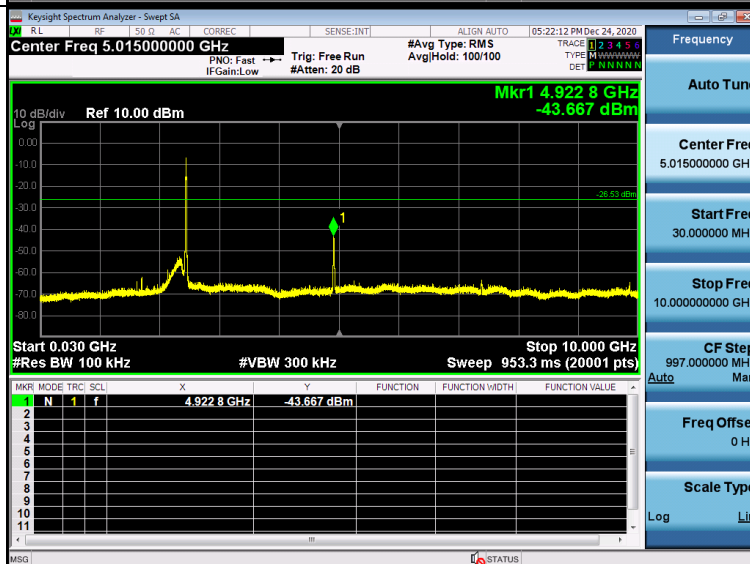
11N20 MCH Graphs		
Reference	 Key parameters for Reference: - Center Freq: 2.437000000 GHz - Span: 40.00 MHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 4.267 ms (8001 pts) - Ref: 20.00 dBm - Mkr1: 2.438 824 GHz, -4.124 dBm	
30MHz-10GHz	 Key parameters for 30MHz-10GHz: - Center Freq: 5.015000000 GHz - Span: 9.933 GHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 953.3 ms (20001 pts) - Ref: 10.00 dBm - Mkr1: 4.873 9 GHz, -43.085 dBm	
10GHz-26.5GHz	 Key parameters for 10GHz-26.5GHz: - Center Freq: 18.250000000 GHz - Span: 16.500 GHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.577 s (20001 pts) - Ref: 10.00 dBm - Mkr1: 25.031 500 GHz, -54.374 dBm	

11N20 HCH Graphs

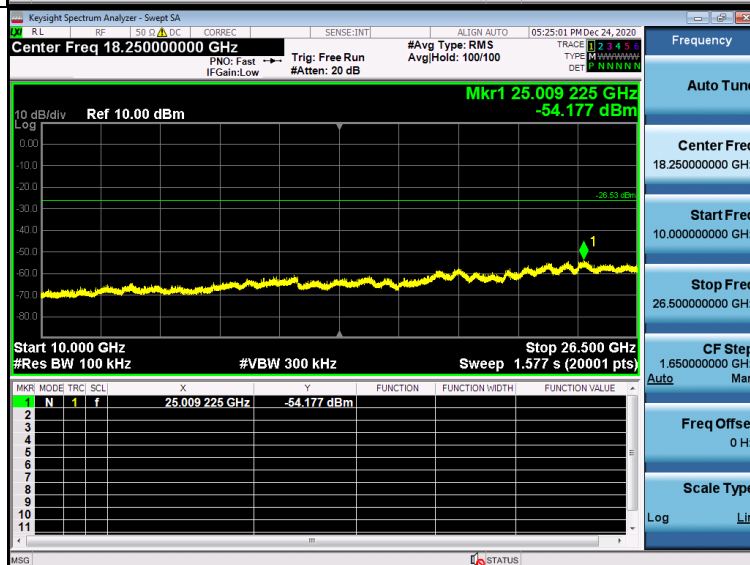
Reference

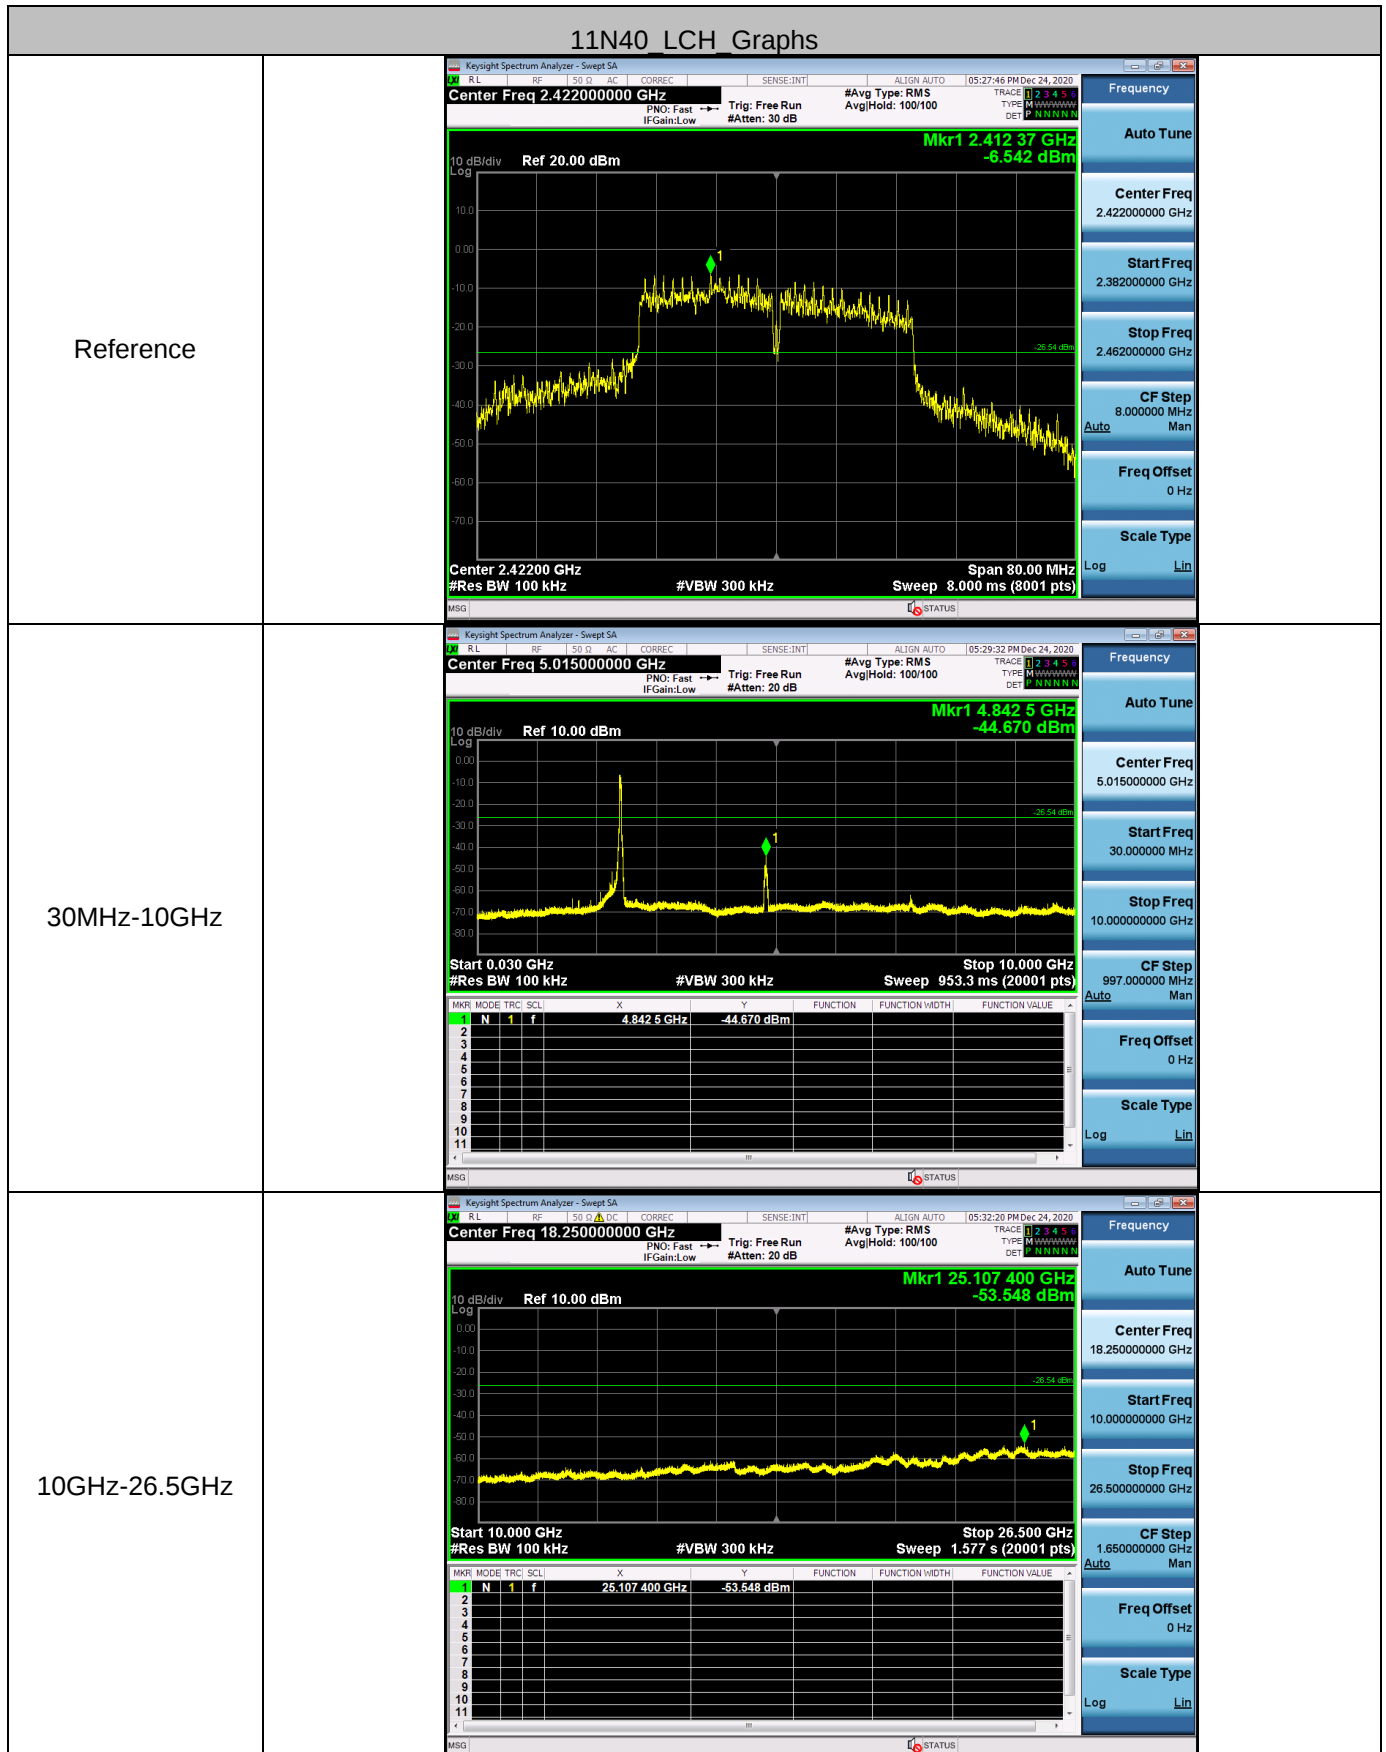


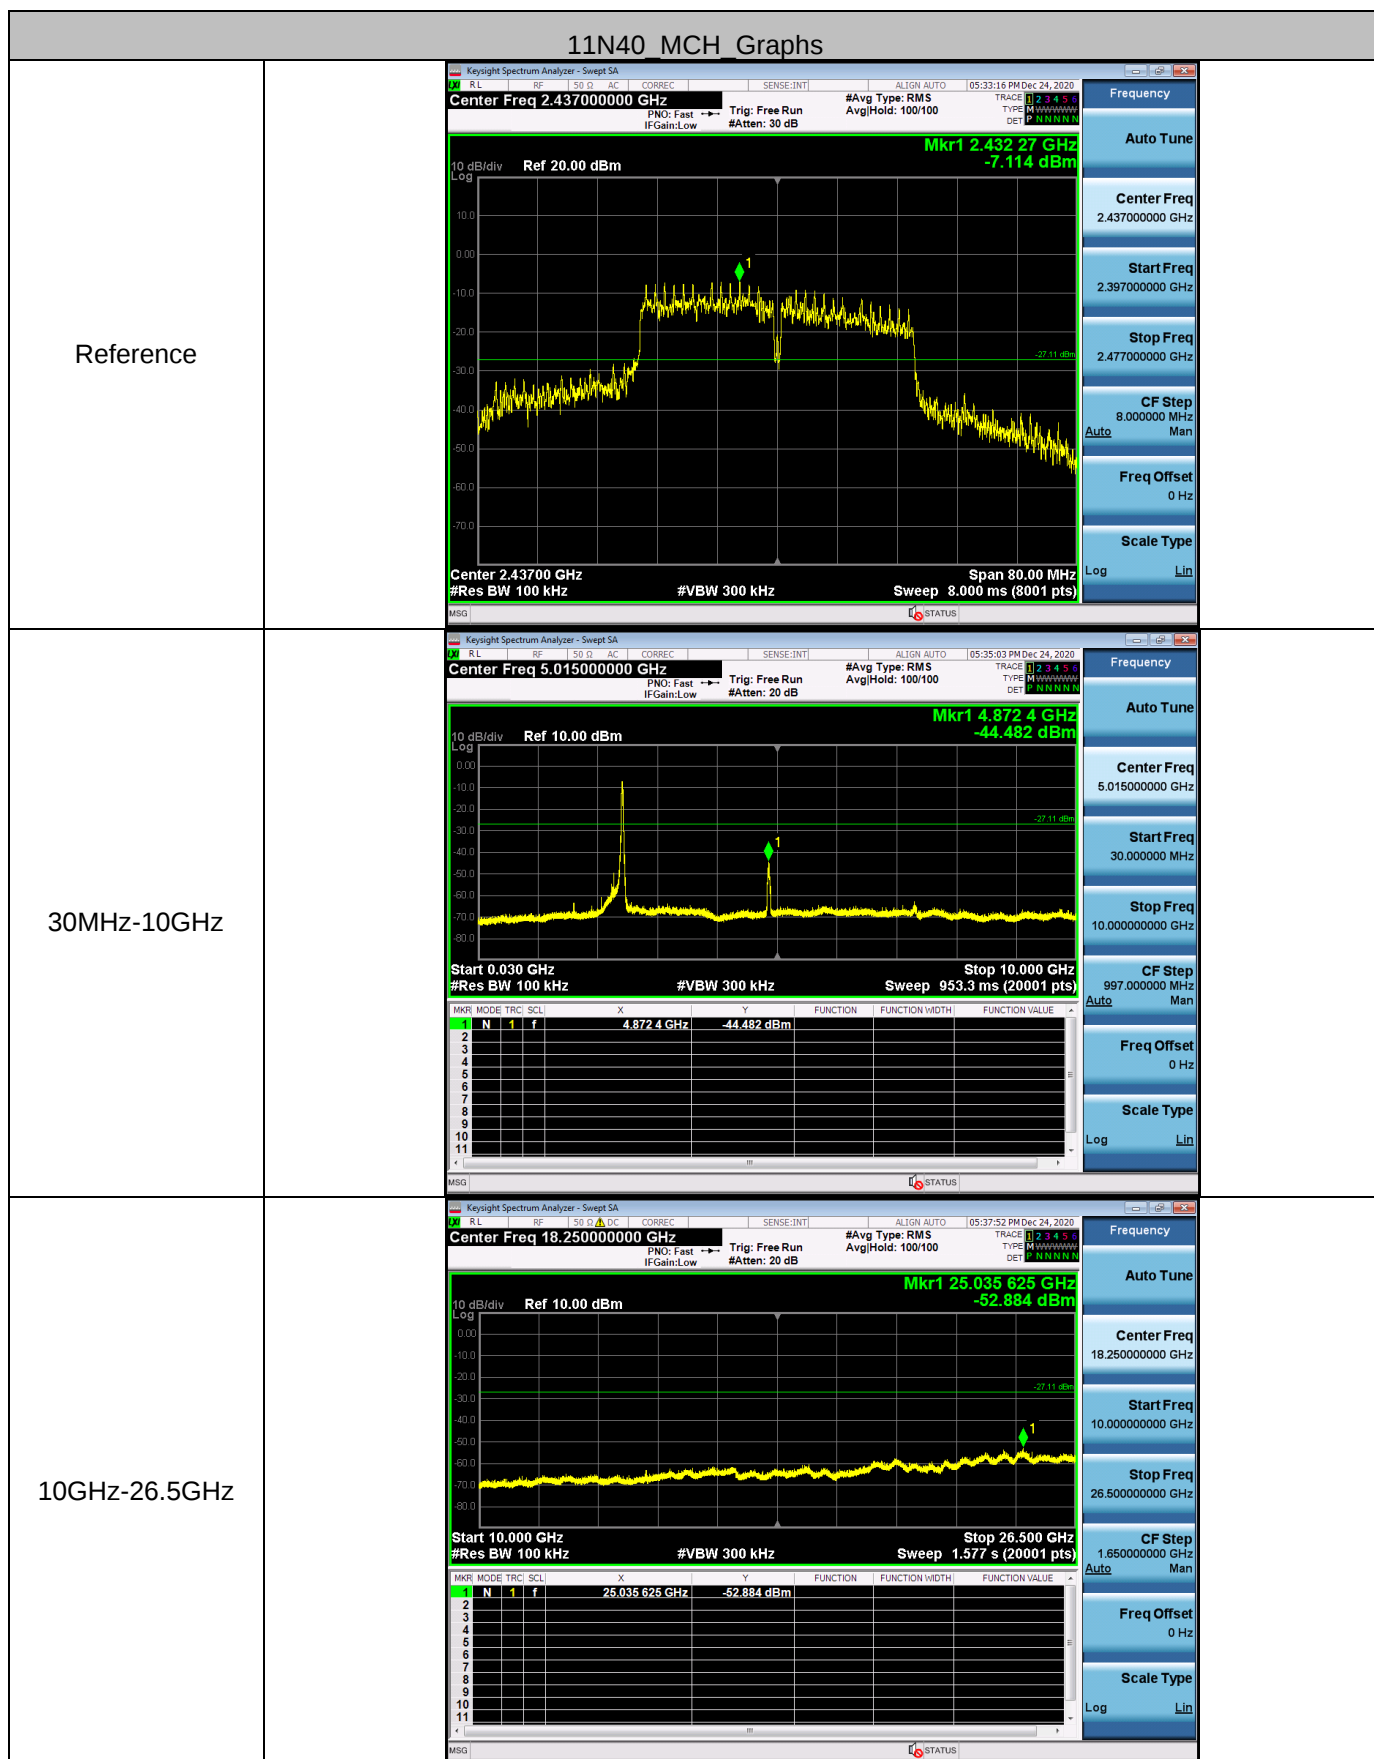
30MHz-10GHz

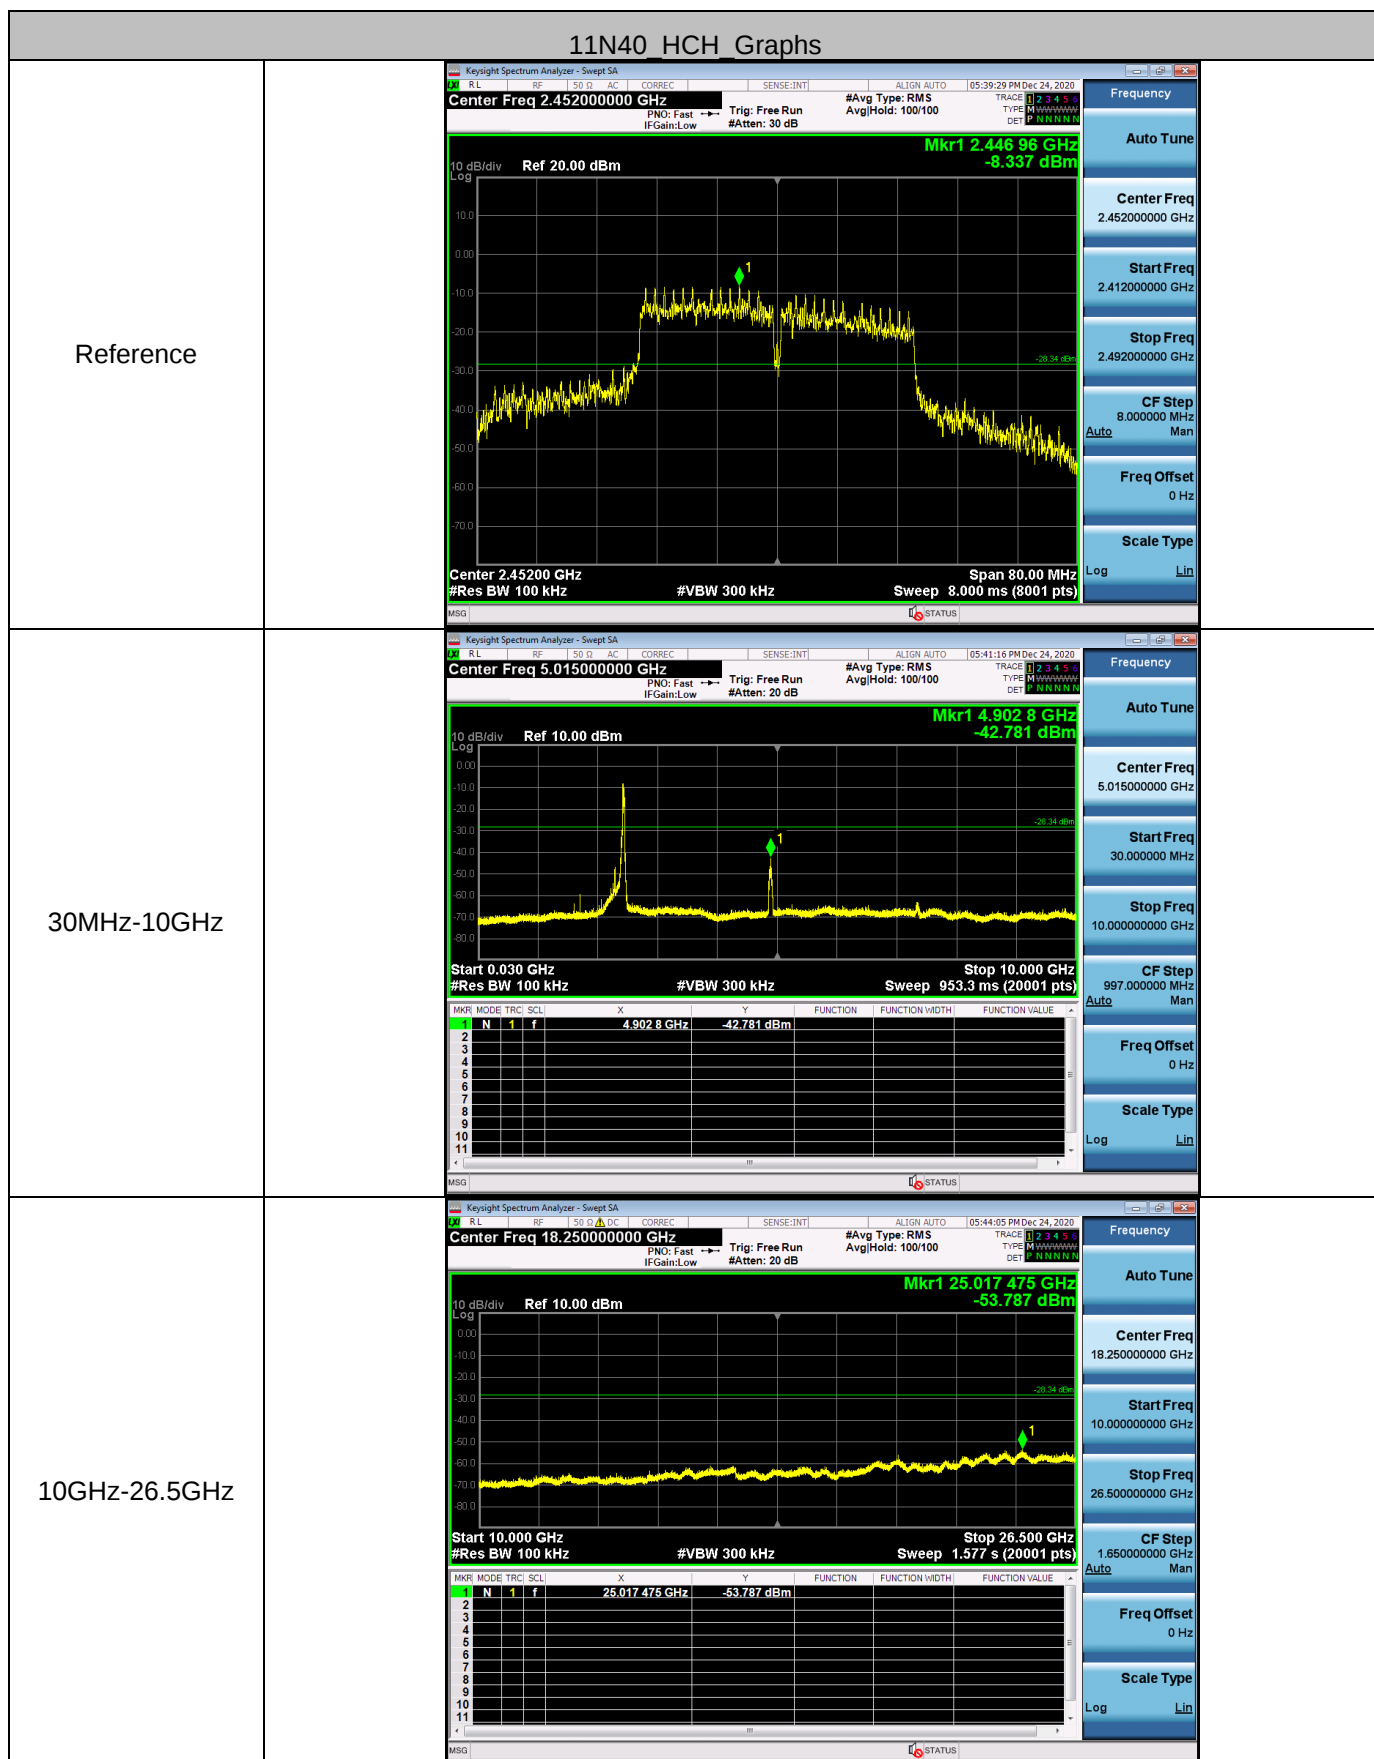


10GHz-26.5GHz









Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.
Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

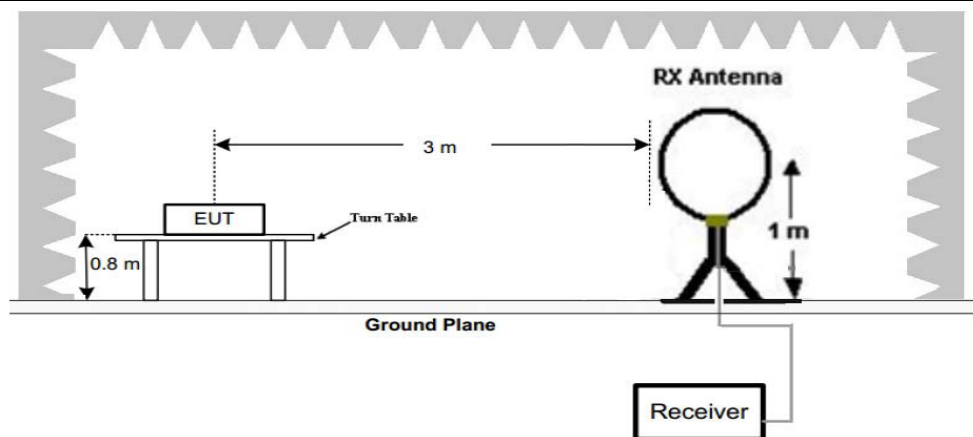


Figure 1. Below 30MHz

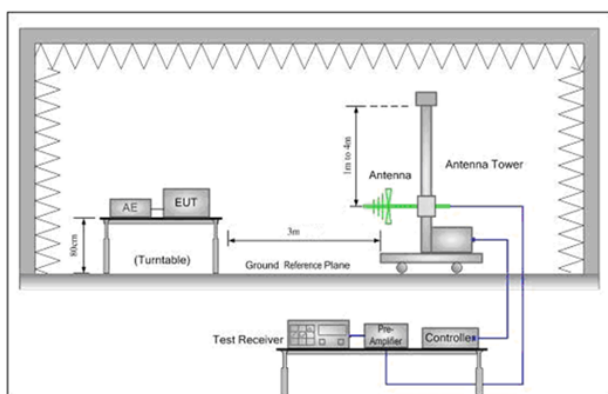


Figure 2. 30MHz to 1GHz

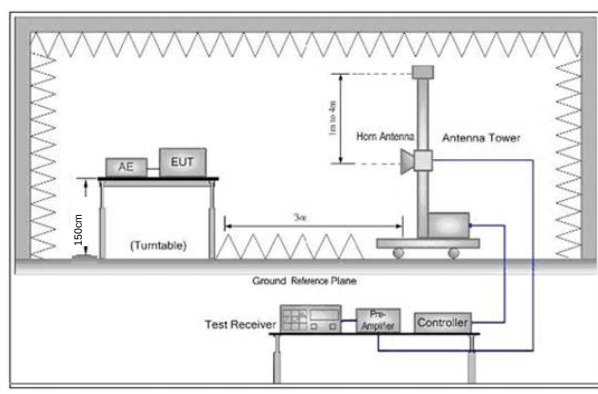


Figure 3. Above 1 GHz

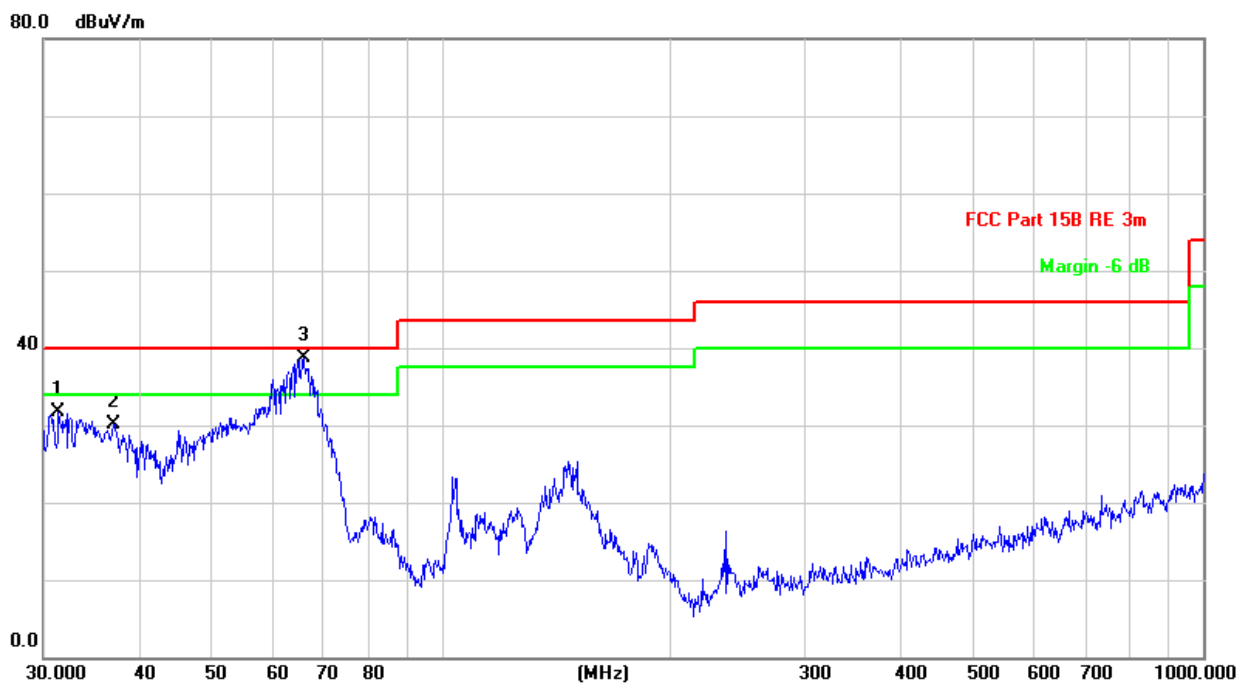
Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the

	ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20); For below 1GHz, through Pre-scan, find the 11Mbps of rate of 802.11b at lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

5.8.1 Radiated emission below 1GHz

30MHz~1GHz		
Test mode:	Charge +Transmitting	Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	31.3992	38.73	-6.06	32.67	40.00	-7.32	QP		
2	X	37.0248	41.58	-10.69	30.89	40.00	-9.11	QP		
3	!	65.8031	57.37	-18.76	38.61	40.00	-1.39	QP		

Remark:

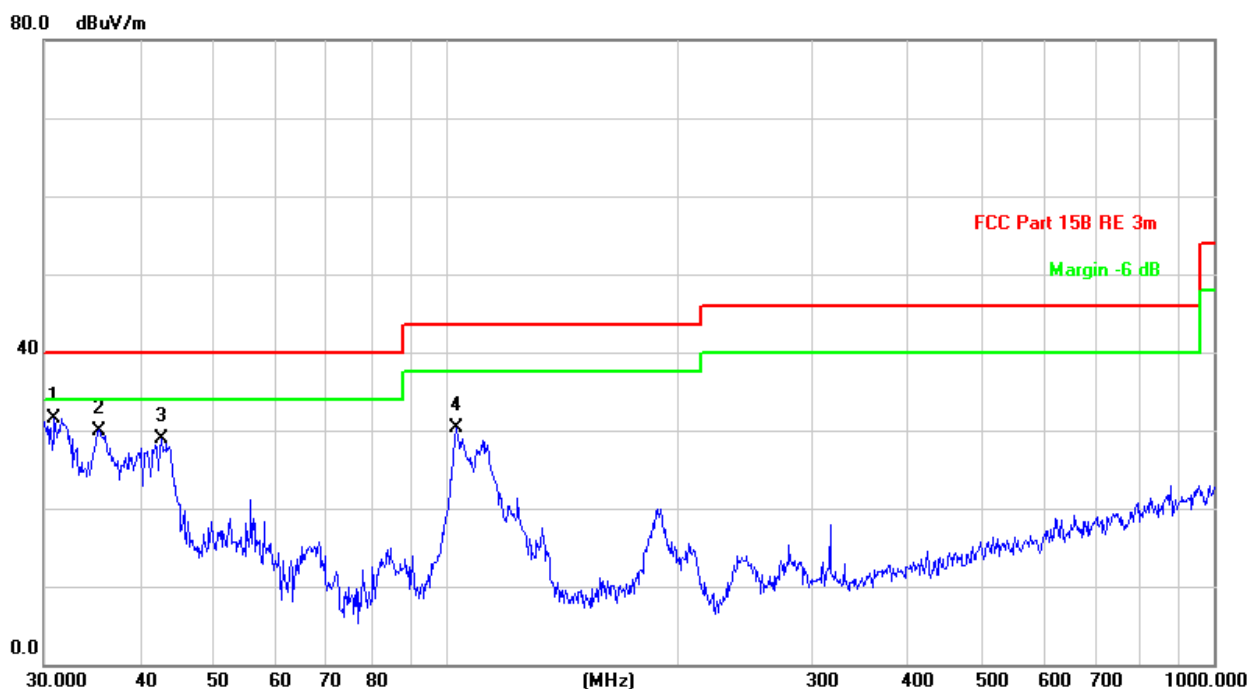
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Charge +Transmitting	Horizontal
------------	----------------------	------------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	30.9618	35.92	-4.33	31.59	40.00	-8.41	QP			
2		35.3750	38.09	-8.09	30.00	40.00	-10.00	QP			
3		42.7496	42.57	-13.76	28.81	40.00	-11.19	QP			
4		103.0799	45.25	-14.94	30.31	43.50	-13.19	QP			

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.8.2 Transmitter emission above 1GHz

Test mode:		802.11b(11Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	59.95	-4.26	55.69	74	-18.31	PK	H
4824.000	41.53	-4.26	37.27	54	-16.73	AV	H
7236.000	61.11	1.18	62.29	74	-11.71	PK	H
7236.000	39.35	1.18	40.53	54	-13.47	AV	H
4824.000	59.66	-4.26	55.40	74	-18.60	PK	V
4824.000	42.41	-4.26	38.15	54	-15.85	AV	V
7236.000	61.56	1.18	62.74	74	-11.26	PK	V
7236.000	39.35	1.18	40.53	54	-13.47	AV	V

Test mode:		802.11b(11Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	59.19	-4.12	55.07	74	-18.93	PK	H
4874.000	40.51	-4.12	36.39	54	-17.61	AV	H
7311.000	61.31	1.46	62.77	74	-11.23	PK	H
7311.000	40.84	1.46	42.30	54	-11.70	AV	H
4874.000	58.94	-4.12	54.82	74	-19.18	PK	V
4874.000	42.27	-4.12	38.15	54	-15.85	AV	V
7311.000	61.22	1.46	62.68	74	-11.32	PK	V
7311.000	38.48	1.46	39.94	54	-14.06	AV	V

Test mode:		802.11b(11Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	59.50	-4.03	55.47	74	-18.53	PK	H
4924.000	40.08	-4.03	36.05	54	-17.95	AV	H
7386.000	60.16	1.66	61.82	74	-12.18	PK	H
7386.000	40.05	1.66	41.71	54	-12.29	AV	H
4924.000	58.85	-4.03	54.82	74	-19.18	PK	V
4924.000	40.66	-4.03	36.63	54	-17.37	AV	V
7386.000	61.87	1.66	63.53	74	-10.47	PK	V
7386.000	40.45	1.66	42.11	54	-11.89	AV	V

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

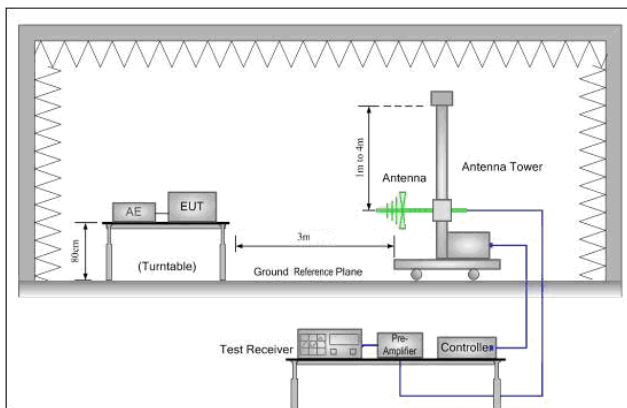


Figure 1. 30MHz to 1GHz

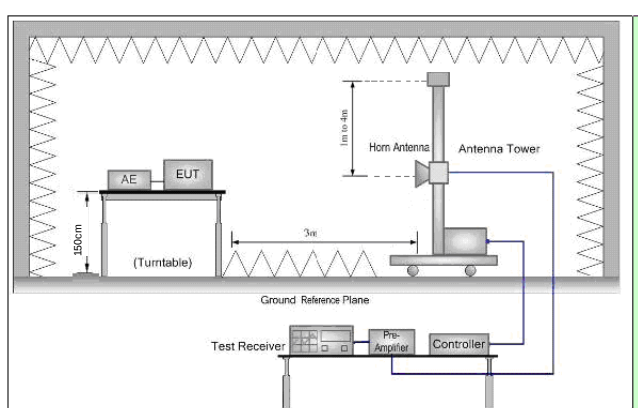


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; MCS7Mbps of rate is the worst case of 802.11n(HT20); Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(11Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	55.88	-9.2	46.68	74	-27.32	PK	H
2390.000	37.61	-9.2	28.41	54	-25.59	AV	H
2400.000	57.48	-9.39	48.09	74	-25.91	PK	H
2400.000	36.28	-9.39	26.89	54	-27.11	AV	H
2390.000	56.49	-9.2	47.29	74	-26.71	PK	V
2390.000	37.35	-9.2	28.15	54	-25.85	AV	V
2400.000	58.02	-9.39	48.63	74	-25.37	PK	V
2400.000	35.72	-9.39	26.33	54	-27.67	AV	V

Worse case mode:		802.11b(11Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	56.59	-9.29	47.30	74	-26.70	PK	H
2483.500	37.83	-9.29	28.54	54	-25.46	AV	H
2483.500	56.52	-9.29	47.23	74	-26.77	PK	V
2483.500	37.31	-9.29	28.02	54	-25.98	AV	V

Worse case mode:		802.11g(54Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	58.12	-9.2	48.92	74	-25.08	PK	H
2390.000	35.94	-9.2	26.74	54	-27.26	AV	H
2400.000	55.68	-9.39	46.29	74	-27.71	PK	H
2400.000	35.53	-9.39	26.14	54	-27.86	AV	H
2390.000	56.34	-9.2	47.14	74	-26.86	PK	V
2390.000	37.75	-9.2	28.55	54	-25.45	AV	V
2400.000	57.29	-9.39	47.90	74	-26.10	PK	V
2400.000	36.21	-9.39	26.82	54	-27.18	AV	V

Worse case mode:		802.11g(54Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	56.31	-9.29	47.02	74	-26.98	PK	H
2483.500	37.76	-9.29	28.47	54	-25.53	AV	H
2483.500	56.52	-9.29	47.23	74	-26.77	PK	V
2483.500	36.18	-9.29	26.89	54	-27.11	AV	V

Worse case mode:		802.11n(HT20)(MCS7)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	57.14	-9.29	47.85	74	-26.15	PK	H
2390.000	37.08	-9.29	27.79	54	-26.21	AV	H
2400.000	57.61	-9.29	48.32	74	-25.68	PK	H
2400.000	38.03	-9.29	28.74	54	-25.26	AV	H
2390.000	56.80	-9.29	47.51	74	-26.49	PK	V
2390.000	35.82	-9.29	26.53	54	-27.47	AV	V
2400.000	55.56	-9.29	46.27	74	-27.73	PK	V
2400.000	36.53	-9.29	27.24	54	-26.76	AV	V

Worse case mode:		802.11n(HT20)(MCS7)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	55.74	-9.29	46.45	74	-27.55	PK	H
2483.500	37.87	-9.29	28.58	54	-25.42	AV	H
2483.500	55.74	-9.29	46.45	74	-27.55	PK	V
2483.500	37.62	-9.29	28.33	54	-25.67	AV	V

Worse case mode:		802.11n(HT40)(MCS7)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	58.24	-9.29	48.95	74	-25.05	PK	H
2390.000	36.79	-9.29	27.50	54	-26.50	AV	H
2400.000	55.55	-9.29	46.26	74	-27.74	PK	H
2400.000	35.15	-9.29	25.86	54	-28.14	AV	H
2390.000	57.70	-9.29	48.41	74	-25.59	PK	V
2390.000	37.11	-9.29	27.82	54	-26.18	AV	V
2400.000	55.58	-9.29	46.29	74	-27.71	PK	V
2400.000	36.78	-9.29	27.49	54	-26.51	AV	V

Worse case mode:		802.11n(HT40)(MCS7)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	56.49	-9.29	47.20	74	-26.80	PK	H
2483.500	36.62	-9.29	27.33	54	-26.67	AV	H
2483.500	56.99	-9.29	47.70	74	-26.30	PK	V
2483.500	36.51	-9.29	27.22	54	-26.78	AV	V

Note:

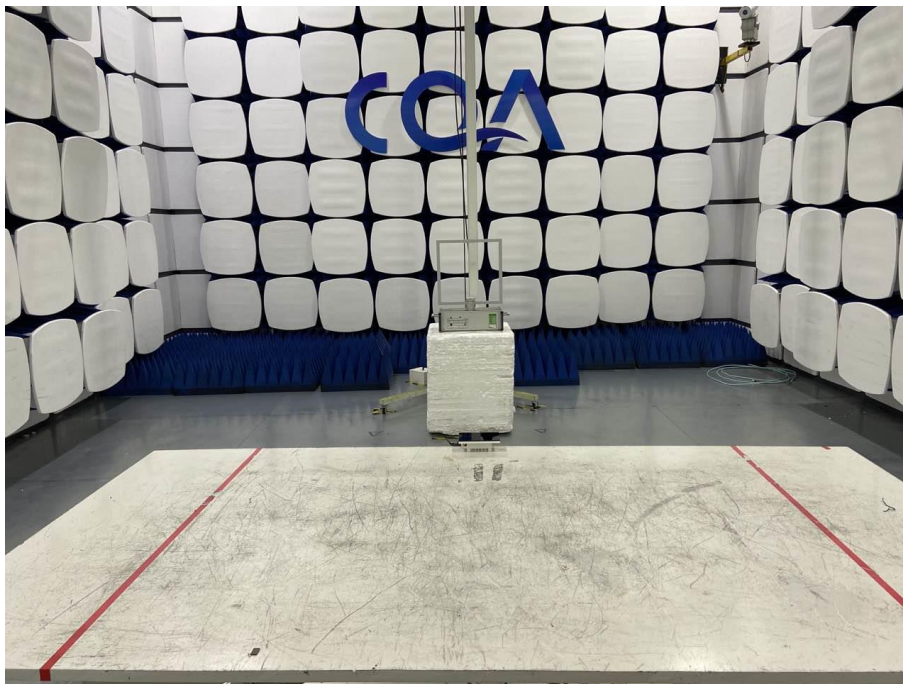
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

6 Photographs - EUT Test Setup

Please refer to the test setup file

9kHz~30MHz:



30MHz~1GHz:



Above 1GHz:

