

	2502M-L	 RoHS Compliant
Date of Issue: 2025-9-13		dipole antenna
Page (1) of (6)	i-Top Drawing # 20250913	Revision #: Initial Release

Specification Approval Sheet

Vender Name	Shenzhen i-Top Technology Co., Ltd
Supplier address	Room 711, Building 2, Phase II of Gaoxinqi, Longchang Road, Xin'an Sub-district, Bao'an District, Shenzhen City
Project Name	2502M
Part Name	2502M-L
Part Number	2502M-L-V1.2
Part Version	V1.2
Part Spec.	

The materials meet the following environmental requirements:

- ☐ Banned and Monitored Substances Control Standard(Latest Edition)
☐ Halogen-free technical standard

Vender Confirm (Stamp)	Prepared by	Checked by	Approved by

Customer Approved (Stamp)	Sourcing	DQ	RD	Approved by


	2502M-L	
Date of Issue: 2025-9-13		dipole antenna
Page (1) of (6)	i-Top Drawing # 20250913	Revision #: Initial Release

Number of revisions	Date	Version number	Revision Notes	remark
1	2025.09.13	V1.2	First release	

1. Antenna picture

顶设科技 i-Top	2502M-L	 RoHS Compliant
Date of Issue: 2025-9-13		dipole antenna
Page (2) of (6)	i-Top Drawing # 20250913	Revision #: Initial Release

Thereport mainly provides the test status oftheelectricalproperties parametersof **2502-M-L-V1.2**The **2502-M-L-V1.2** antenna is a **BT** Band . The antenna Picture and assembly are shown below.

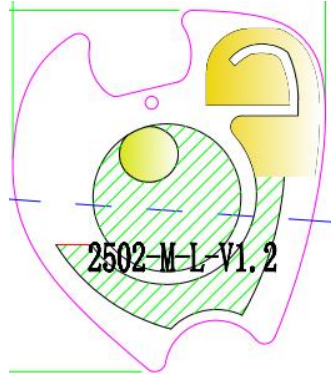

FPC Antenna picture & assembly picture

Prototype position:



2.Antenna Test Equipment Introduction

Test of antenna input characteristics using **Agilent E5071C** and **Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber , and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

顶设科技 i-Top	2502M-L	 RoHS Compliant
Date of Issue: 2025-9-13		dipole antenna
Page (3) of (6)	i-Top Drawing # 20250913	Revision #: Initial Release

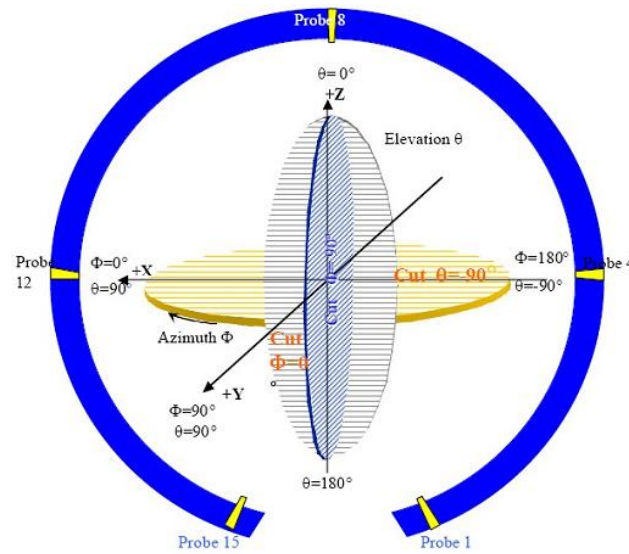


图 4 3D 微波暗室测试坐标系 (back view)

3. Electrical Specification

3-2 Passive S11 parameter


Measuring Method is a 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.



VSWR

3-3 2D/3D field pattern diagram

顶设科技 i-Top	2502M-L	Pb RoHS Compliant
Date of Issue: 2025-9-13		dipole antenna
Page (4) of (6)	i-Top Drawing # 20250913	Revision #: Initial Release

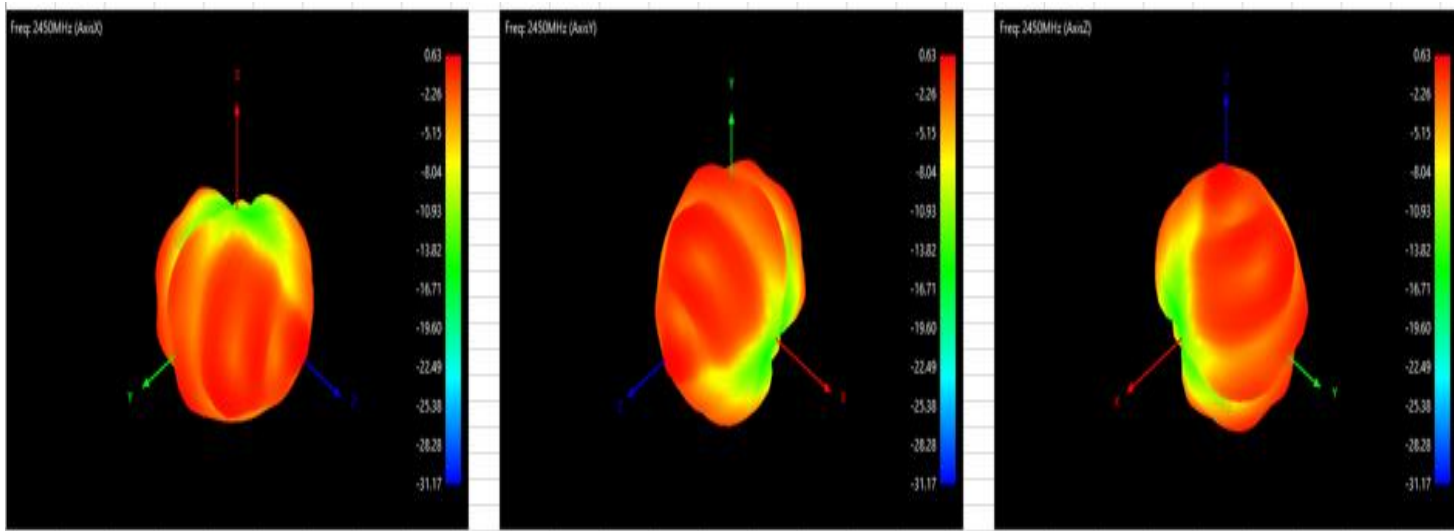

3-4 Passive efficiency & Gain

Frequency(MHz)	Gain(dBi)	Efficiency(%)
2400	0.66	33.67
2410	0.45	33.41
2420	0.37	33.62
2430	0.44	33.96
2440	0.5	34.24
2450	0.63	34.4
2460	0.81	34.37
2470	1.03	34.29
2480	1.18	34.19
2490	1.2	33.91
2500	1.22	33.27


3-5 OTA active

FS		BT TEST	L
CH	TRP	TIS	
0	6.75	-91.26	
39	7.08	-90.85	
78	7.45	-90.03	
BH		BT TEST	L
CH	TRP	TIS	
0	5.26	-89.96	
39	6.22	-88.75	
78	6.35	-88.25	

4. Mechanical Specification:

Mechanical Configuration (Unit: mm) he appearance of the antenna is according to drawing Figure 10

	2502M-L	 RoHS Compliant
Date of Issue: 2025-9-13		dipole antenna
Page (5) of (6)	i-Top Drawing # 20250913	Revision #: Initial Release



注:

- 1: 金手指沉金3u


- 1: 布铜区域


- 2: 基材区域

