

Test Plot 1#: GSM 850 Mid Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.786$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @836.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.612 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.67 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below = 20.4 mm

Ratio of SAR at M2 to SAR at M1 = 80%

Maximum value of SAR (measured) = 0.619 W/kg

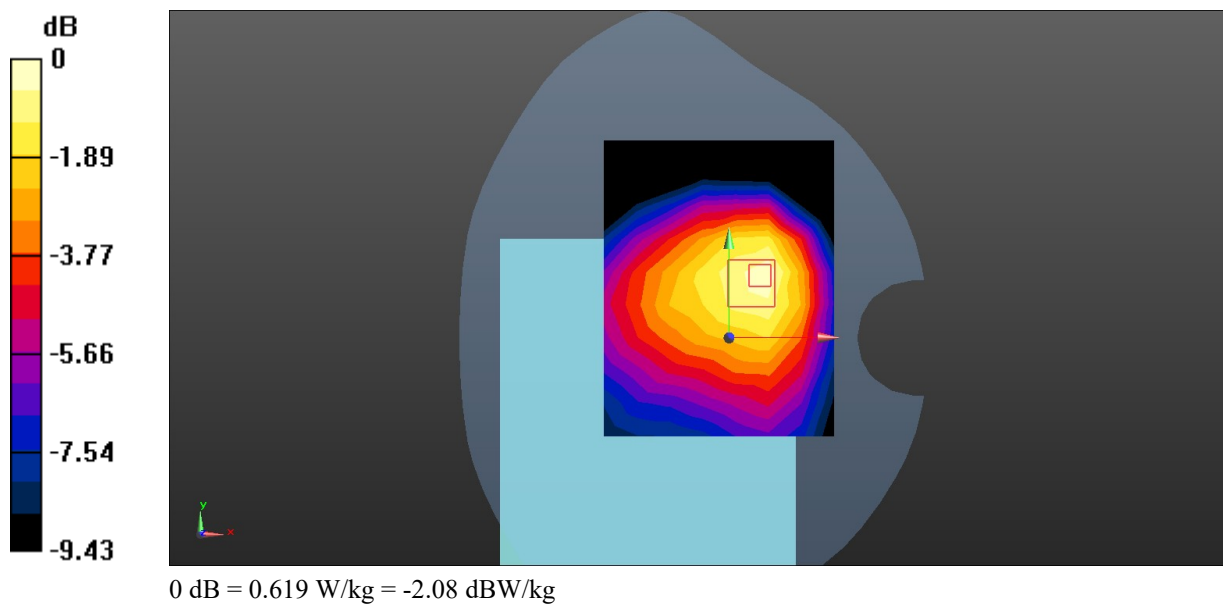

Test Plot 2#: GSM 1900 High Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 41.035$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1909.8 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.645 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 1.02 W/kg

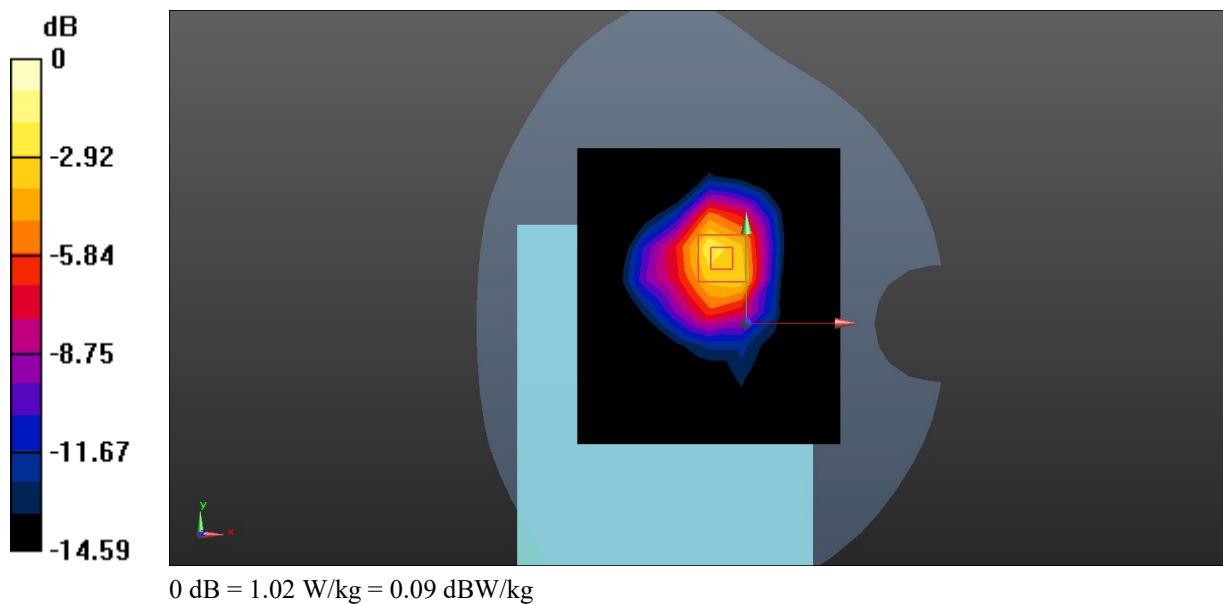

Test Plot 3#: WCDMA Band 2 High Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 41.085$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1907.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.69 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.435 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 1.04 W/kg

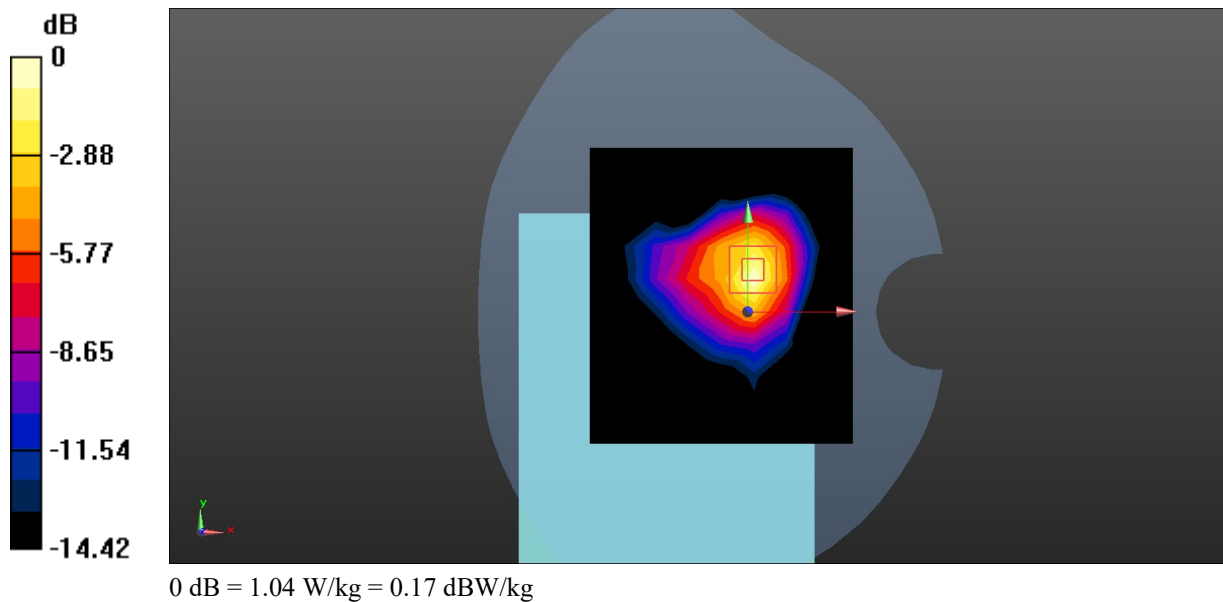

Test Plot 4#: WCDMA Band 4 Low Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.912$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1712.4 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.961 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.276 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.970 W/kg

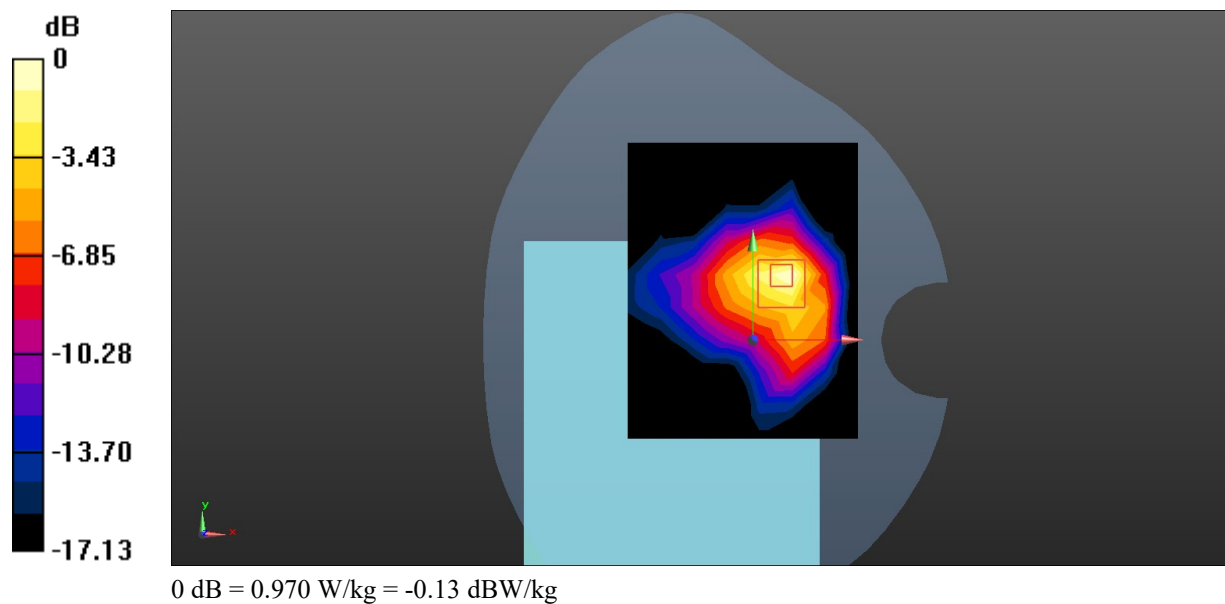

Test Plot 5#: WCDMA Band 5 High Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**


Communication System: WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 41.725$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @846.6 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

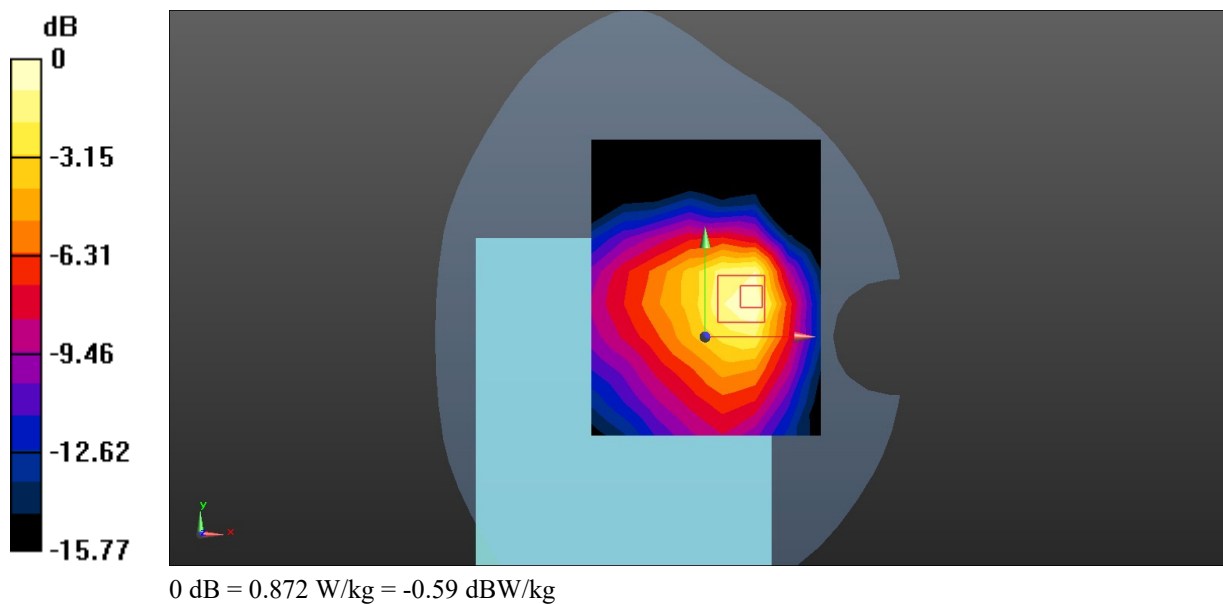Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.836 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.88 V/m ; Power Drift = 0.18 dB Peak SAR (extrapolated) = 1.54 W/kg **SAR(1 g) = 0.774 W/kg ; SAR(10 g) = 0.456 W/kg** Smallest distance from peaks to all points 3 dB below = 8.2 mm Ratio of SAR at M2 to SAR at M1 = 57.4% Maximum value of SAR (measured) = 0.872 W/kg 

Test Plot 6#: LTE Band 2 1RB High Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: Generic FDD-LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 41.255$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.94, 6.91, 6.83) @1900 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.905 W/kg

Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.24 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.491 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 1.34 W/kg

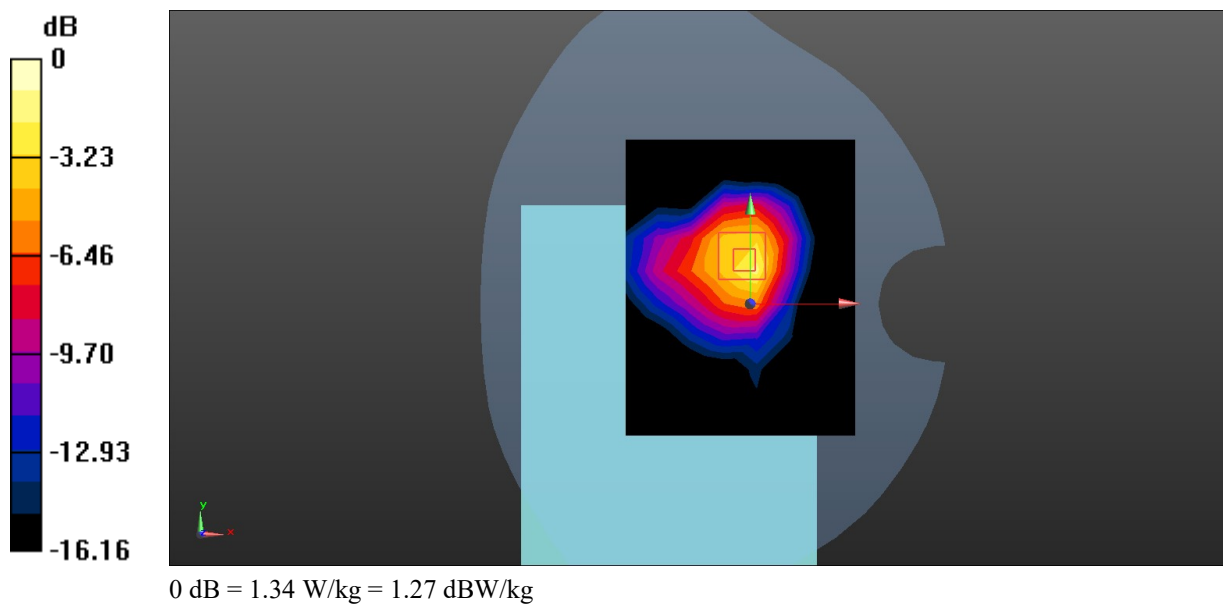

Test Plot 7#: LTE Band 5 1RB High Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**


Communication System: Generic FDD-LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 41.741$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.4, 8.36, 8.26) @844 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

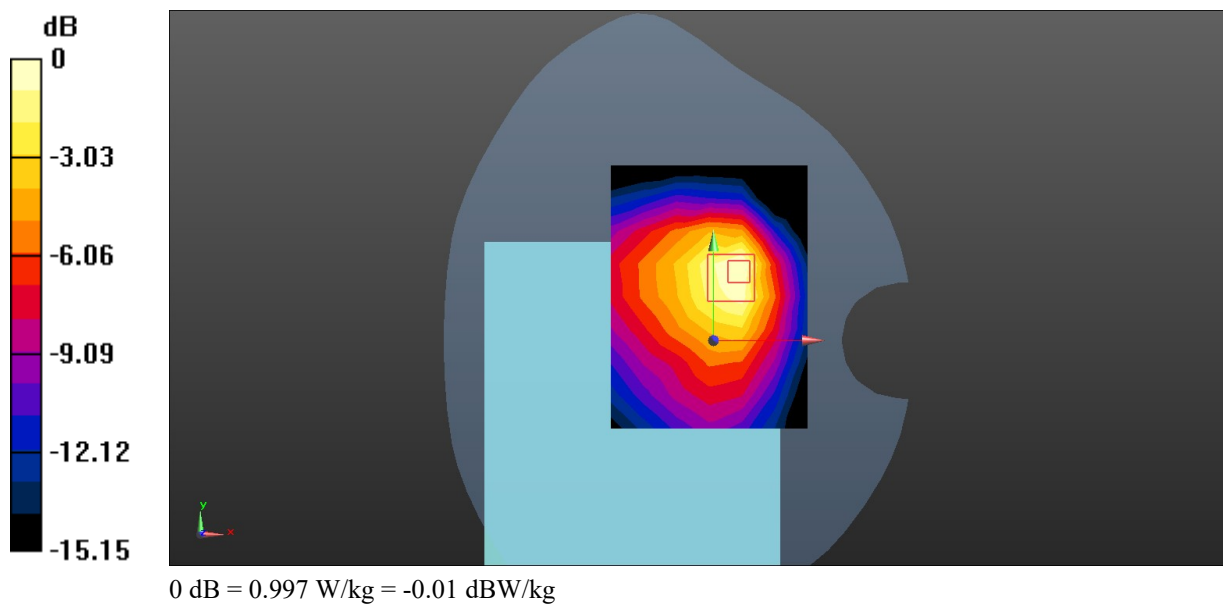Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.06 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.64 V/m ; Power Drift = 0.18 dB Peak SAR (extrapolated) = 1.88 W/kg **SAR(1 g) = 0.940 W/kg ; SAR(10 g) = 0.554 W/kg** Smallest distance from peaks to all points 3 dB below = 8.6 mm Ratio of SAR at M2 to SAR at M1 = 54.6% Maximum value of SAR (measured) = 0.997 W/kg 

Test Plot 8#: LTE Band 12 1RB Low Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**


Communication System: Generic FDD-LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 43.282$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.76, 8.73, 8.61) @704 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

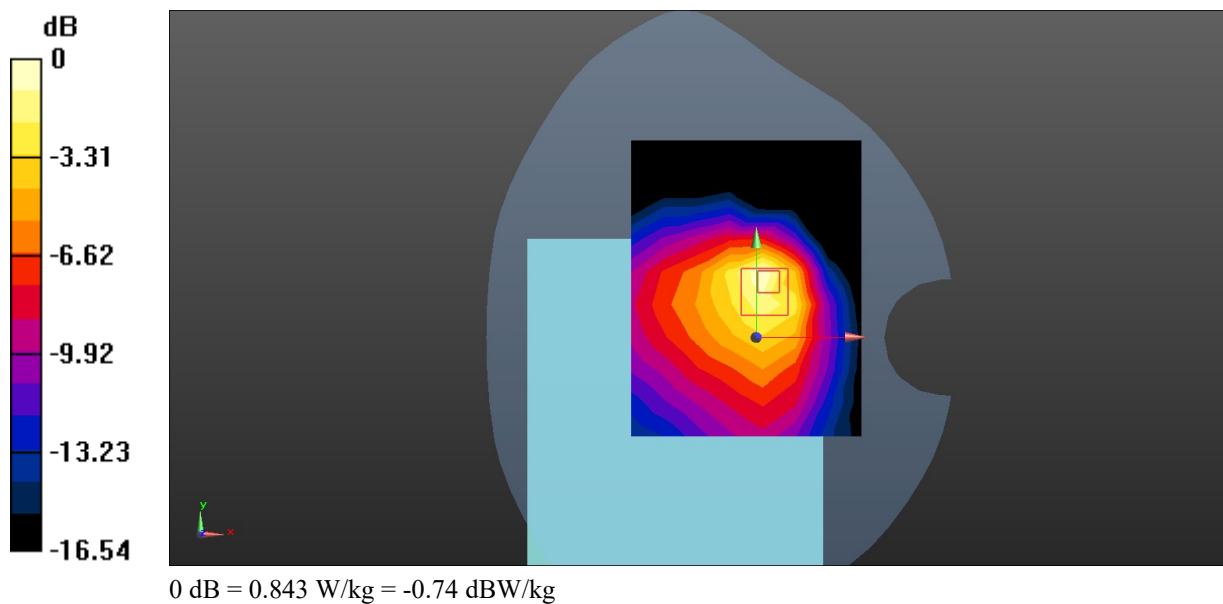Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.852 W/kg **Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.78 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 1.80 W/kg **SAR(1 g) = 0.807 W/kg ; SAR(10 g) = 0.436 W/kg** Smallest distance from peaks to all points 3 dB below = 9.1 mm Ratio of SAR at M2 to SAR at M1 = 56.4% Maximum value of SAR (measured) = 0.843 W/kg 

Test Plot 9#: LTE Band 41 1RB Mid Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 40.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.32, 6.29, 6.21) @2595 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.586 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.176 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.638 W/kg

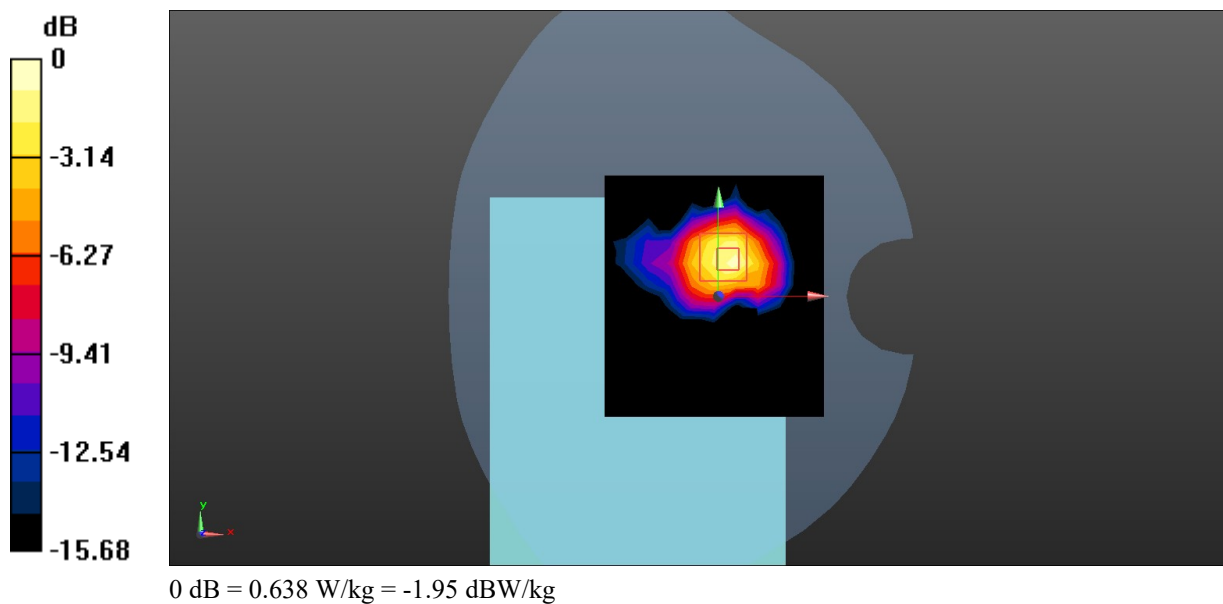

Test Plot 10#: LTE Band 66 1RB Low Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 40.932$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.13, 7.09, 7) @1720 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.822 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.681 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.406 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.910 W/kg

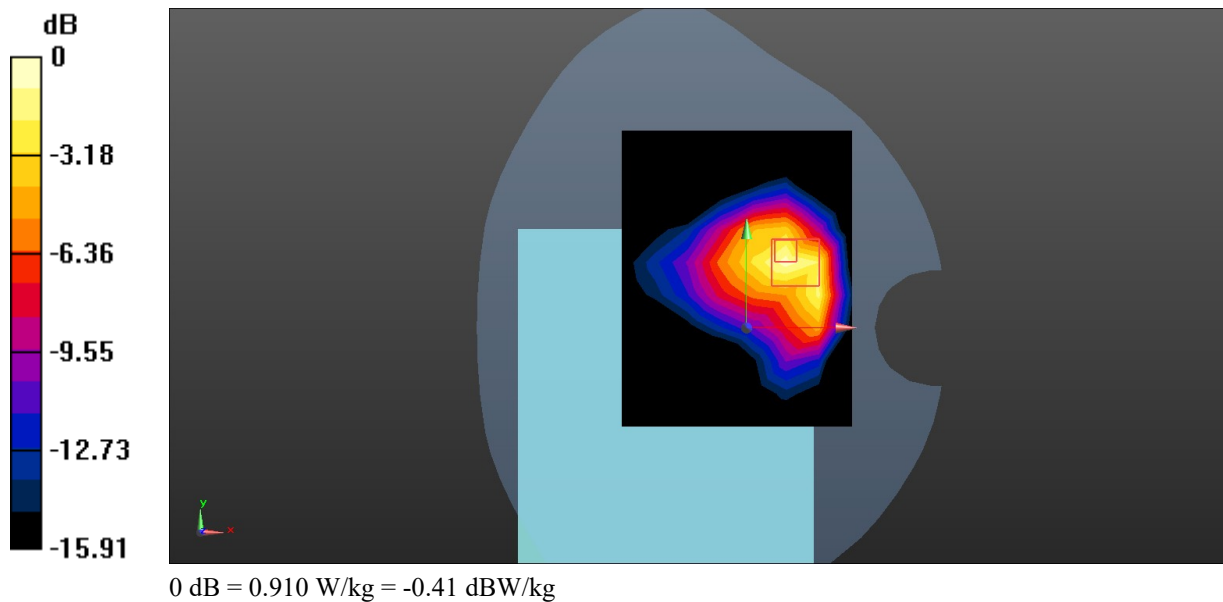

Test Plot 11#: WLAN 802.11b Mid Body Back**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.018
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.852$ S/m; $\epsilon_r = 40.115$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(6.49, 6.46, 6.38) @2437 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.261 W/kg

Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.642 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.280 W/kg

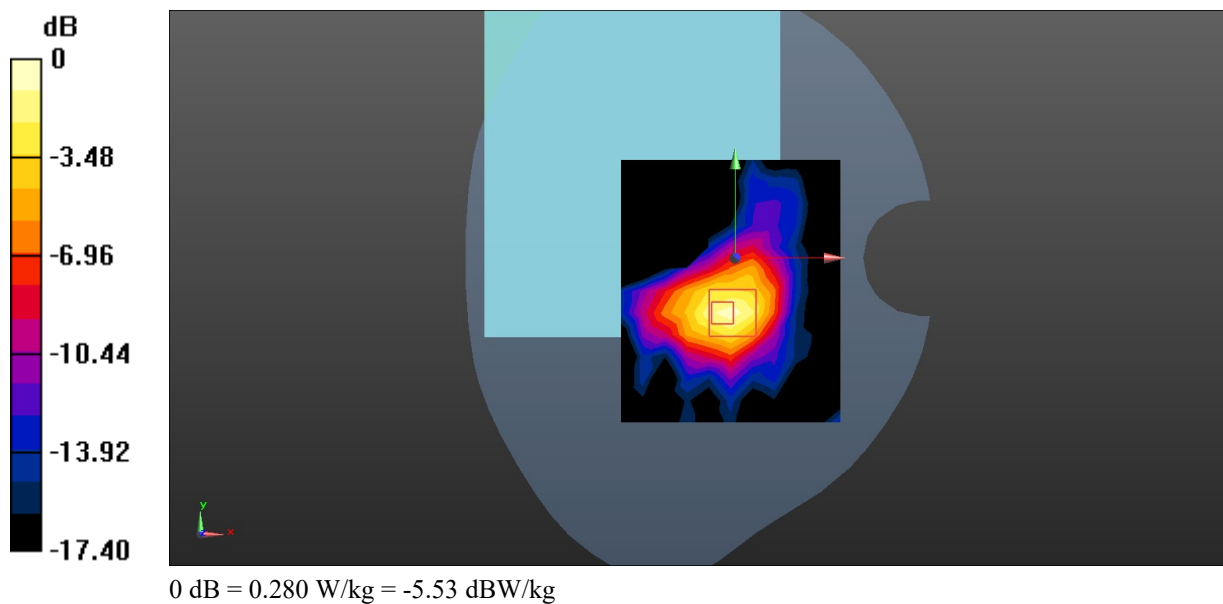

Test Plot 12#: WLAN 5.2G 802.11a Mid 2 Body Top**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.107
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.636$ S/m; $\epsilon_r = 36.422$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @5200 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.364 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.275 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.3%

Maximum value of SAR (measured) = 0.417 W/kg

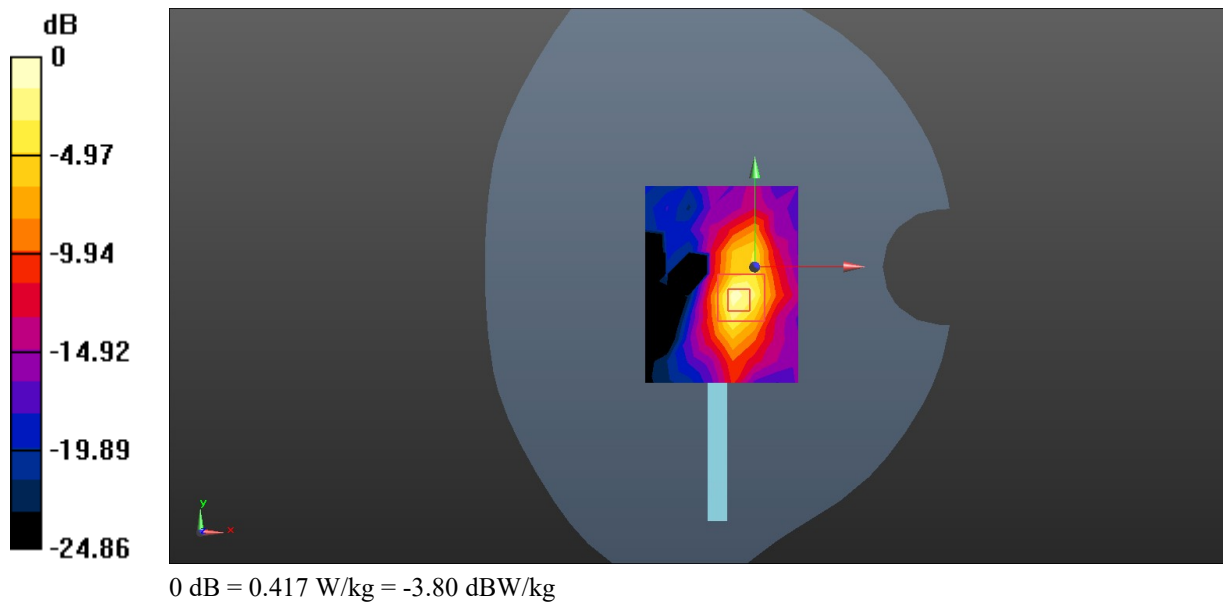

Test Plot 13#: WLAN 5.3G 802.11a Mid Body Top**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: 5.3G WiFi (0); Frequency: 5280 MHz; Duty Cycle: 1:1.107
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.757$ S/m; $\epsilon_r = 37.308$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.11, 5.08, 5.02) @5280 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.385 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.957 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.412 W/kg

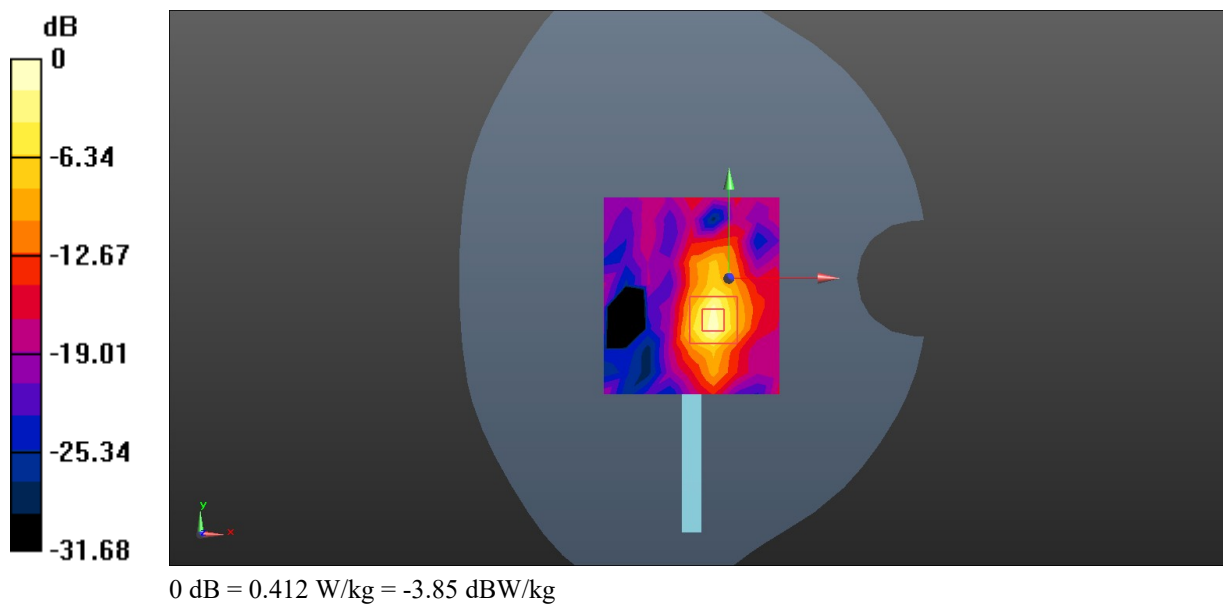

Test Plot 14#: WLAN 5.6G 802.11a Mid Body Top**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: 5.6G WiFi (0); Frequency: 5580 MHz; Duty Cycle: 1:1.107
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.046$ S/m; $\epsilon_r = 36.126$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.73, 4.71, 4.65) @5580 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.484 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.033 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.3%

Maximum value of SAR (measured) = 0.457 W/kg

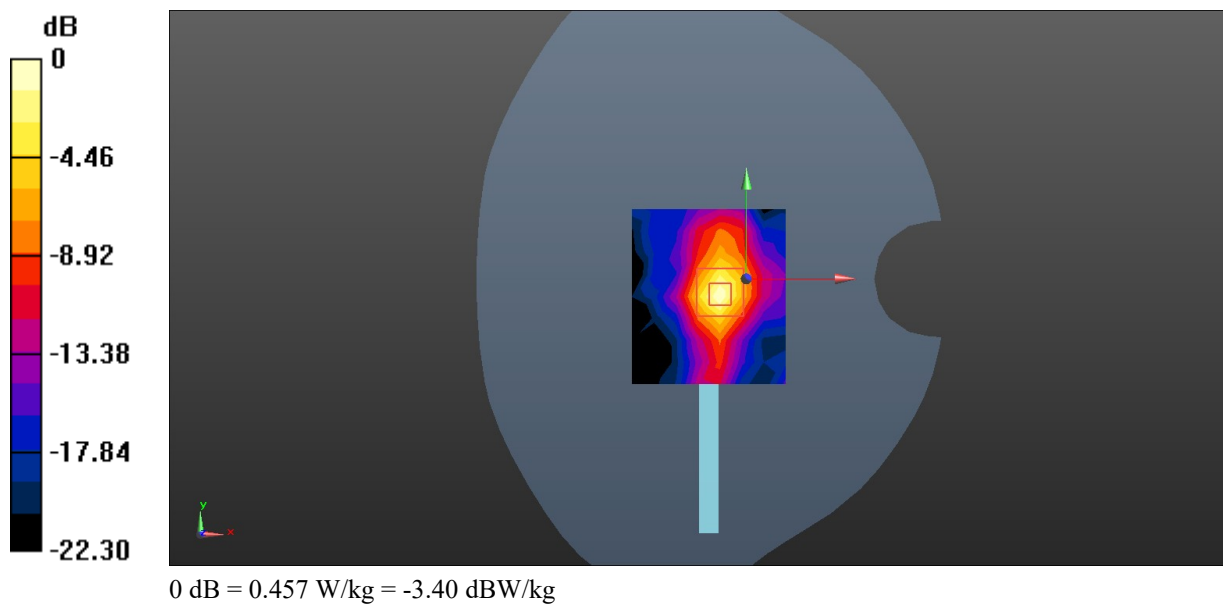

Test Plot 15#: WLAN 5.8G 802.11a Low Body Top**DUT: Tablet; Type: RugKing Pad Pro; Serial: 3BVT-1**

Communication System: 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1.114
Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.259 \text{ S/m}$; $\epsilon_r = 35.461$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.78, 4.76, 4.7) @5745 MHz; Calibrated: 2025/09/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1562; Calibrated: 2024/12/31
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.385 W/kg

Zoom Scan (8x8x12) /Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.289 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.6%

Maximum value of SAR (measured) = 0.403 W/kg

