

# DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

## TEST REPORT

### SCOPE OF WORK

FCC TESTING— ECH-REFL01-5G, ECH-REFL02-5G,  
ECH-REFL03, ECH-REFL03-SPT

### REPORT NUMBER

201207054SZN-004

### ISSUE DATE

June 17, 2021 [-----]

### [REVISED DATE]

### PAGES

27

### DOCUMENT CONTROL NUMBER

FCC ID 249\_C

© 2017 INTERTEK



**DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD**

Application  
For  
Certification

**FCC ID: 2ATAP-ECHELON****REFLECT MIRROR, REFLECT TOUCH SPORT****Model: ECH-REFL01-5G, ECH-REFL02-5G, ECH-REFL03, ECH-REFL03-SPT****2.4GHz Transceiver****Report No.: 201207054SZN-004**

We hereby certify that the sample of the above item is considered to comply with the requirements  
of FCC Part 15, Subpart C for Intentional Radiator,  
mention 47 CFR [10-1-19]

**Prepared and Checked by:****Approved by:**

**Winkey Wang**  
**Senior Project Engineer**

---

**Peter Kang**  
**Senior Technical Supervisor**  
**Date: June 17, 2021**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

**MEASUREMENT/TECHNICAL REPORT**

This report concerns (check one:)      Original Grant\_      Class II Change   X  

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes \_\_\_\_\_      No   X  

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date  
of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes \_\_\_\_\_      No   X  

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-19 Edition] provision.

Report prepared by:

Winkey Wang  
Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue,  
Zhangkengjing Community, GuanHu Subdistrict,  
LongHua District, ShenZhen, P.R. China  
Tel / Fax: 86-755-8614 0684/86-755-8601 6751

## Table of Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1.0 Summary of Test Result .....</b>                           | <b>4</b>  |
| <b>2.0 General Description .....</b>                              | <b>5</b>  |
| 2.1 Product Description.....                                      | 5         |
| 2.2 Related Submittal(s) Grants.....                              | 6         |
| 2.3 Test Methodology .....                                        | 6         |
| 2.4 Test Facility .....                                           | 6         |
| <b>3.0 System Test Configuration .....</b>                        | <b>7</b>  |
| 3.1 Justification.....                                            | 7         |
| 3.2 EUT Exercising Software.....                                  | 7         |
| 3.3 Special Accessories.....                                      | 7         |
| 3.4 Equipment Modification .....                                  | 7         |
| 3.5 Measurement Uncertainty .....                                 | 8         |
| 3.6 Support Equipment List and Description.....                   | 8         |
| <b>4.0 Emission Results.....</b>                                  | <b>9</b>  |
| 4.1 Radiated Test Results .....                                   | 9         |
| 4.1.1 Field Strength Calculation .....                            | 9         |
| 4.1.2 Radiated Emission Configuration Photograph.....             | 10        |
| 4.1.3 Radiated Emissions.....                                     | 10        |
| 4.1.4 Transmitter Spurious Emissions.....                         | 13        |
| 4.2 Conducted Emission Configuration Photograph.....              | 17        |
| 4.2.1 Conducted Emission .....                                    | 17        |
| <b>5.0 Equipment Photographs .....</b>                            | <b>20</b> |
| <b>6.0 Product Labelling.....</b>                                 | <b>20</b> |
| <b>7.0 Technical Specifications .....</b>                         | <b>20</b> |
| <b>8.0 Instruction Manual .....</b>                               | <b>20</b> |
| <b>9.0 Miscellaneous Information.....</b>                         | <b>21</b> |
| 9.1 Bandedge Plot .....                                           | 21        |
| 9.2 20dB Bandwidth .....                                          | 23        |
| 9.3 Discussion of Pulse Desensitization.....                      | 24        |
| 9.4 Transmitter Duty Cycle Calculation FCC Rule 15.35(b, c) ..... | 24        |
| 9.5 Emissions Test Procedures .....                               | 25        |
| <b>10.0 Test Equipment List .....</b>                             | <b>27</b> |

**1.0 Summary of Test Result**

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Applicant Address: Room 201, Building 3rd, No. 43 of Gangjian RD. Changping town, Dongguan City, Guangdong Province, China

Manufacturer: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Manufacturer Address: Room 201, Building 3rd, No. 43 of Gangjian RD. Changping town, Dongguan City, Guangdong Province, China

**Model: ECH-REFL01-5G, ECH-REFL02-5G, ECH-REFL03, ECH-REFL03-SPT**

**FCC ID: 2ATAP-ECHELON**

| Test Specification            | Reference              | Results |
|-------------------------------|------------------------|---------|
| Transmitter Radiated Emission | 15.249 &15.209 &15.205 | Pass    |
| Conducted Emission            | 15.207                 | Pass    |
| Bandedge                      | 15.249 &15.209 &15.205 | Pass    |
| 20dB Bandwidth                | 15.215(c)              | Pass    |

Notes: The EUT uses an Internal Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

## 2.0 General Description

### 2.1 Product Description

The Equipment Under Test (EUT) is an Echelon Reflect with BT5.0 (dual-mode) operating in 2402-2480MHz, 2.4G Wi-Fi function operating in 2412-2462MHz and 5G Wi-Fi function operating in 5180-5240&5745-5825MHz. The EUT is powered by A.C. 120V, 60Hz. Bluetooth and WIFI transmitters are share one antenna and can transmit simultaneously, but 2.4G WIFI and 5G WIFI cannot transmit simultaneously. User cannot access USB/LAN/SD card ports in normal use. For more detailed features description, please refer to the user's manual.

Antenna Type: Internal Antenna

Modulation Type: GFSK

Antenna Gain: 3dBi Max

Bluetooth Version: 5.0 BLE

The model: ECH-REFL03 is the same as the model: ECH-REFL03-SPT in hardware aspect. Their difference in product name, model number and with/without support touch screen function for marketing purpose. Details as below:

| Product name        | Model Number   | Description                       |
|---------------------|----------------|-----------------------------------|
| REFLECT MIRROR      | ECH-REFL03     | Not support touch screen function |
| REFLECT TOUCH SPORT | ECH-REFL03-SPT | Support touch screen function     |

There are 4 replaceable touch screen function board be used in model ECH-REFL03-SPT, all independently installed in the product for testing.

| Product name        | Model Number   | touch screen function board Model |
|---------------------|----------------|-----------------------------------|
| REFLECT TOUCH SPORT | ECH-REFL03-SPT | 126                               |
|                     |                | 4101                              |
|                     |                | 8083                              |
|                     |                | 8756                              |

Partial tests are required to both designing schemes after evaluation, but only worst-case is reflected in the report.

The Models: ECH-REFL03, ECH-REFL03-SPT are the same as the certified models: ECH-REFL01-5G, ECH-REFL02-5G which was approved on 2019-11-07, except mentioned as below:

| Production Name     | Model Number   | Description                                                                                              |
|---------------------|----------------|----------------------------------------------------------------------------------------------------------|
| REFLECT MIRROR      | ECH-REFL01-5G  | Certified model                                                                                          |
| REFLECT TOUCH SPORT | ECH-REFL03     | Different appearance, power supply board and camera board with model ECH-REFL01-5G                       |
| REFLECT MIRROR      | ECH-REFL02-5G  | Certified model                                                                                          |
| REFLECT TOUCH SPORT | ECH-REFL03-SPT | Different appearance, power supply board and camera board, touch function board with model ECH-REFL02-5G |

This report bases on the previous report with report number 190926001SZN-004 dated October 17, 2019 (original signature by Jeff Liang, Kidd Yang on file), due to added model number, partial tests are required after evaluation.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

## 2.2 Related Submittal(s) Grants

The Models: ECH-REFL01-5G, ECH-REFL02-5G has been granted under the certification number with FCC ID: 2ATAP-ECHELON.

This is an application for certification of a transceiver for the Echelon Reflect which has Bluetooth 5.0 BLE function.

Remaining functions are subjected to the following documents:

For the 2.4G Wi-Fi function was tested and demonstrated in report 201207054SZN-001.

For the 5G Wi-Fi function was tested and demonstrated in report 201207054SZN-002.

For the BT 5.0 EDR function was tested and demonstrated in report 201207054SZN-003.

For other functions were reported in the SDoC report: 201207054SZN-005.

## 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

## 2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

### 3.0 System Test Configuration

#### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by A.C. 120V, 60Hz during the test. Both designing schemes have been considered, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the Senior Project Engineer to maximize emissions through its placement in the three orthogonal axes.

#### 3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

Test Software: Ampak RFTTestTool, VER: 5.6

#### 3.3 Special Accessories

No special accessories used.

#### 3.4 Equipment Modification

Any modifications installed previous to testing by DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.6 Support Equipment List and Description

| Description                                 | Manufacturer | Remark        |
|---------------------------------------------|--------------|---------------|
| Portable computer<br>(Provided by Intertek) | DELL         | Latitude 3480 |

## 4.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

### 4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

#### 4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

#### 4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Simultaneous transmission was considered during the test.

Worst Case Radiated Emission  
at  
445.523750 MHz

Judgement: Passed by 3.4 dB

#### **TEST PERSONNEL:**

*Sign on file*

Winkey Wang, Senior Project Engineer  
*Typed/Printed Name*

January 29, 2021  
*Date*

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD


Date of Test: January 29, 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Simultaneous transmission

ANT Polarity: Horizontal

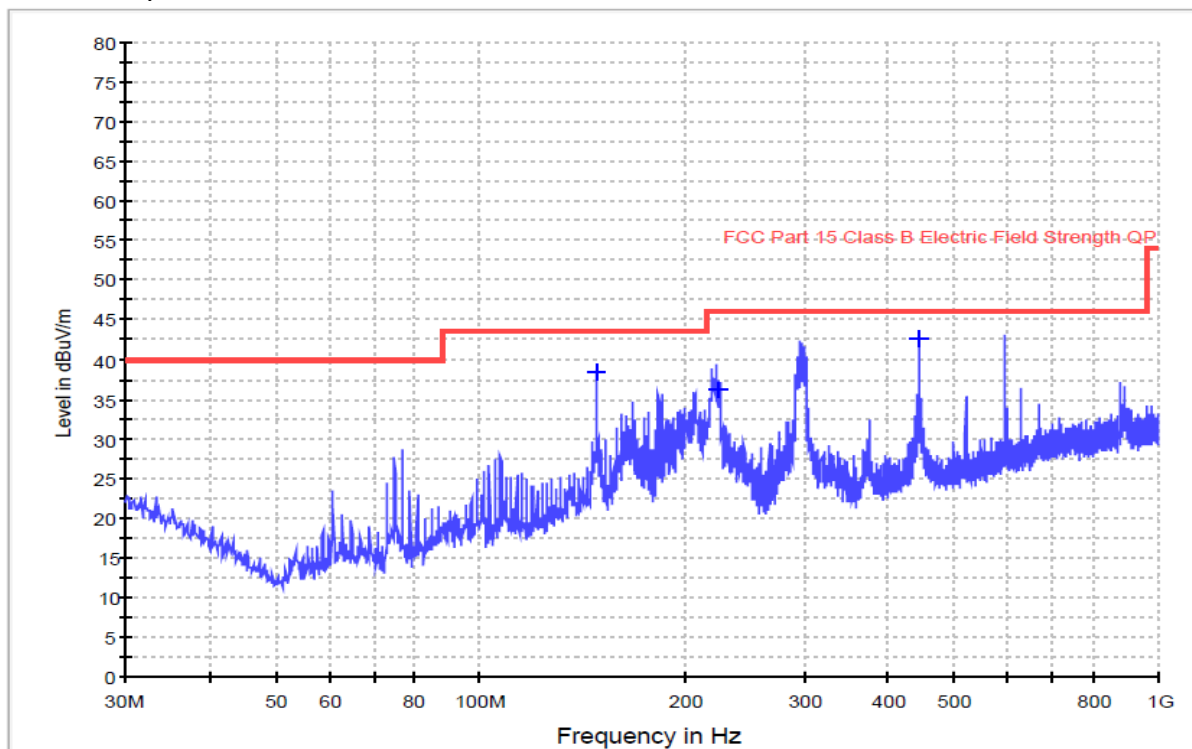

| Frequency (MHz) | Quasi Peak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Polarization | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|---------------------|-----------------|-----------------|--------------|------------|-------------------|----------------------|
| 148.461250      | 38.3                | 1000.0          | 120.000         | H            | 11.1       | 5.2               | 43.5                 |
| 224.285750      | 36.1                | 1000.0          | 120.000         | H            | 13.8       | 9.9               | 46.0                 |
| 445.523750      | 42.6                | 1000.0          | 120.000         | H            | 21.0       | 3.4               | 46.0                 |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Limit Line(dBuV/m) – Level (dBuV/m)

## TEST REPORT

Intertek Report No.: 201207054SZN-004

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD


Date of Test: January 29, 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Simultaneous transmission

ANT Polarity: Vertical

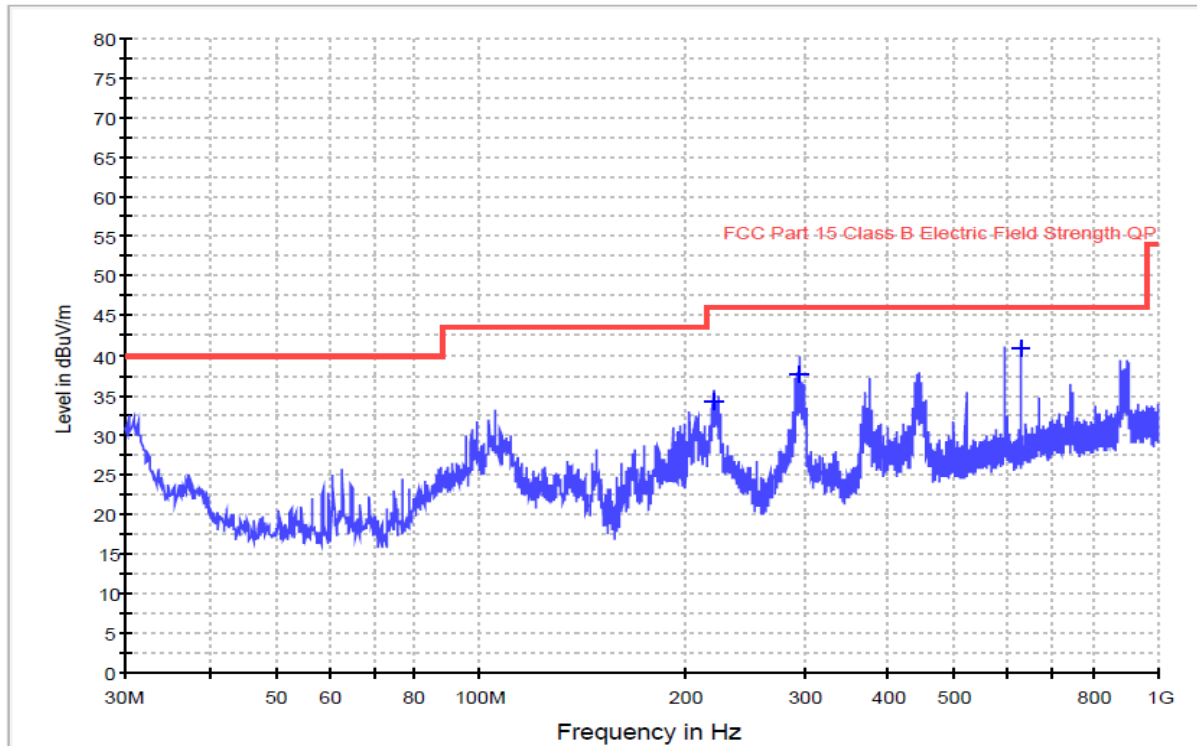

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Polarization | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|--------------|------------|-------------------|----------------------|
| 220.483750      | 34.2               | 1000.0          | 120.000         | V            | 13.7       | 11.8              | 46.0                 |
| 296.992500      | 37.7               | 1000.0          | 120.000         | V            | 16.7       | 8.3               | 46.0                 |
| 625.095000      | 40.8               | 1000.0          | 120.000         | V            | 24.7       | 5.2               | 46.0                 |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Limit Line(dBμV/m) – Level (dBμV/m)

#### 4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission  
at  
9608.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 14.9 dB

**TEST PERSONNEL:**

*Sign on file*

Winkey Wang, Senior Project Engineer  
*Typed/Printed Name*

January 29, 2021  
*Date*

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: January 29, 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Transmitting

Table 1

**Radiated Emissions**

(2402MHz)

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|---------------------------|-------------|
| Horizontal   | 2402.000        | 102.2          | 36.7              | 28.1                | 93.6               | 114.0                     | -20.4       |
| Horizontal   | 4804.000        | 56.5           | 36.7              | 35.5                | 55.3               | 74.0                      | -18.7       |
| Horizontal   | 7206.000        | 56.8           | 36.1              | 36.5                | 57.2               | 74.0                      | -16.8       |
| Horizontal   | 9608.000        | 57.4           | 36.3              | 38.0                | 59.1               | 74.0                      | -14.9       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (-dB) | Net at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|----------------------|--------------------|------------------------------|-------------|
| Horizontal   | 2402.000        | 102.2          | 36.7              | 28.1                | 22.5                 | 71.1               | 94.0                         | -22.9       |
| Horizontal   | 4804.000        | 56.5           | 36.7              | 35.5                | 22.5                 | 32.8               | 54.0                         | -21.2       |
| Horizontal   | 7206.000        | 56.8           | 36.1              | 36.5                | 22.5                 | 34.7               | 54.0                         | -19.3       |
| Horizontal   | 9608.000        | 57.4           | 36.3              | 38.0                | 22.5                 | 36.6               | 54.0                         | -17.4       |

- Notes: 1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Winkey Wang

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: January 29, 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Transmitting

Table 2

**Radiated Emissions**

(2440MHz)

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|---------------------------|-------------|
| Horizontal   | 2441.000        | 100.2          | 36.7              | 28.1                | 91.6               | 114.0                     | -22.4       |
| Horizontal   | 4882.000        | 56.4           | 36.7              | 35.5                | 55.2               | 74.0                      | -18.8       |
| Horizontal   | 7323.000        | 52.3           | 36.1              | 37.2                | 53.4               | 74.0                      | -20.6       |
| Horizontal   | 9764.000        | 56.7           | 36.2              | 37.0                | 57.5               | 74.0                      | -16.5       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (-dB) | Net at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|----------------------|--------------------|------------------------------|-------------|
| Horizontal   | 2441.000        | 100.2          | 36.7              | 28.1                | 22.5                 | 69.1               | 94.0                         | -24.9       |
| Horizontal   | 4882.000        | 56.4           | 36.7              | 35.5                | 22.5                 | 32.7               | 54.0                         | -21.3       |
| Horizontal   | 7323.000        | 52.3           | 36.1              | 37.2                | 22.5                 | 30.9               | 54.0                         | -23.1       |
| Horizontal   | 9764.000        | 56.7           | 36.2              | 37.0                | 22.5                 | 35.0               | 54.0                         | -19.0       |

- Notes: 1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Winkey Wang

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: January 29, 2021

Model: ECH-REFL03-SPT

Worst Case Operating Mode:

Transmitting

Table 3

**Radiated Emissions**

(2480MHz)

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|---------------------------|-------------|
| Horizontal   | 2480.000        | 102.0          | 36.7              | 28.1                | 93.4               | 114.0                     | -20.6       |
| Horizontal   | 4960.000        | 58.3           | 36.7              | 35.5                | 57.1               | 74.0                      | -16.9       |
| Horizontal   | 7440.000        | 55.1           | 36.1              | 37.2                | 56.2               | 74.0                      | -17.8       |
| Horizontal   | 9920.000        | 56.5           | 36.3              | 38.9                | 59.1               | 74.0                      | -14.9       |

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (-dB) | Net at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|----------------------|--------------------|------------------------------|-------------|
| Horizontal   | 2480.000        | 102.0          | 36.7              | 28.1                | 22.5                 | 70.9               | 94.0                         | -23.1       |
| Horizontal   | 4960.000        | 58.3           | 36.7              | 35.5                | 22.5                 | 34.6               | 54.0                         | -19.4       |
| Horizontal   | 7440.000        | 55.1           | 36.1              | 37.2                | 22.5                 | 33.7               | 54.0                         | -20.3       |
| Horizontal   | 9920.000        | 56.5           | 36.3              | 38.9                | 22.5                 | 36.6               | 54.0                         | -17.4       |

- Notes:
1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Winkey Wang

#### 4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

##### 4.2.1 Conducted Emission

Worst Case Conducted Configuration  
at  
5.218000MHz

Judgement: Passed by 9.7dB margin

#### **TEST PERSONNEL:**

*Sign on file*

Winkey Wang, Senior Project Engineer

*Typed/Printed Name*

December 15, 2020

*Date*

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: December 15, 2020


Model: ECH-REFL03-SPT

Worst Case Operating Mode: Simultaneous transmission

Phase: Live

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

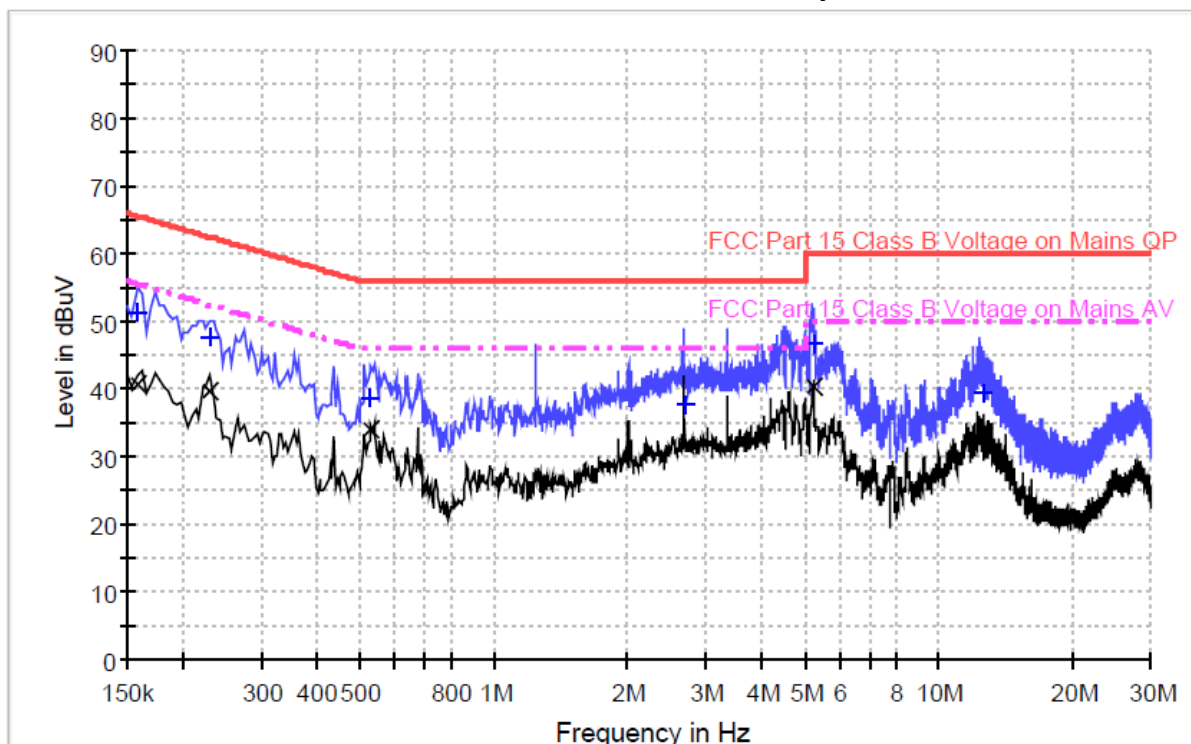

#### Limit and Margin QP

| Frequency (MHz) | Quasi Peak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-------------------|-----------------|------|------------|-------------|--------------|
| 0.158000        | 51.5              | 9.000           | L1   | 9.6        | 14.1        | 65.6         |
| 0.230000        | 47.7              | 9.000           | L1   | 9.6        | 14.7        | 62.4         |
| 0.530000        | 38.5              | 9.000           | L1   | 9.6        | 17.5        | 56.0         |
| 2.706000        | 37.8              | 9.000           | L1   | 9.7        | 18.2        | 56.0         |
| 5.218000        | 46.8              | 9.000           | L1   | 9.8        | 13.2        | 60.0         |
| 12.594000       | 39.3              | 9.000           | L1   | 9.9        | 20.7        | 60.0         |

#### Limit and Margin AV

| Frequency (MHz) | Average (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|
| 0.158000        | 40.5           | 9.000           | L1   | 9.6        | 15.1        | 55.6         |
| 0.230000        | 39.6           | 9.000           | L1   | 9.6        | 12.8        | 52.4         |
| 0.530000        | 33.8           | 9.000           | L1   | 9.6        | 12.2        | 46.0         |
| 2.706000        | 31.5           | 9.000           | L1   | 9.7        | 14.5        | 46.0         |
| 5.218000        | 40.3           | 9.000           | L1   | 9.8        | 9.7         | 50.0         |
| 12.594000       | 33.1           | 9.000           | L1   | 9.9        | 16.9        | 50.0         |

Applicant: DONGGUAN TYSTART GLASS TECHNOLOGY CO., LTD

Date of Test: December 15, 2020


Model: ECH-REFL03-SPT

Worst Case Operating Mode: Simultaneous transmission

Phase: Neutral

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

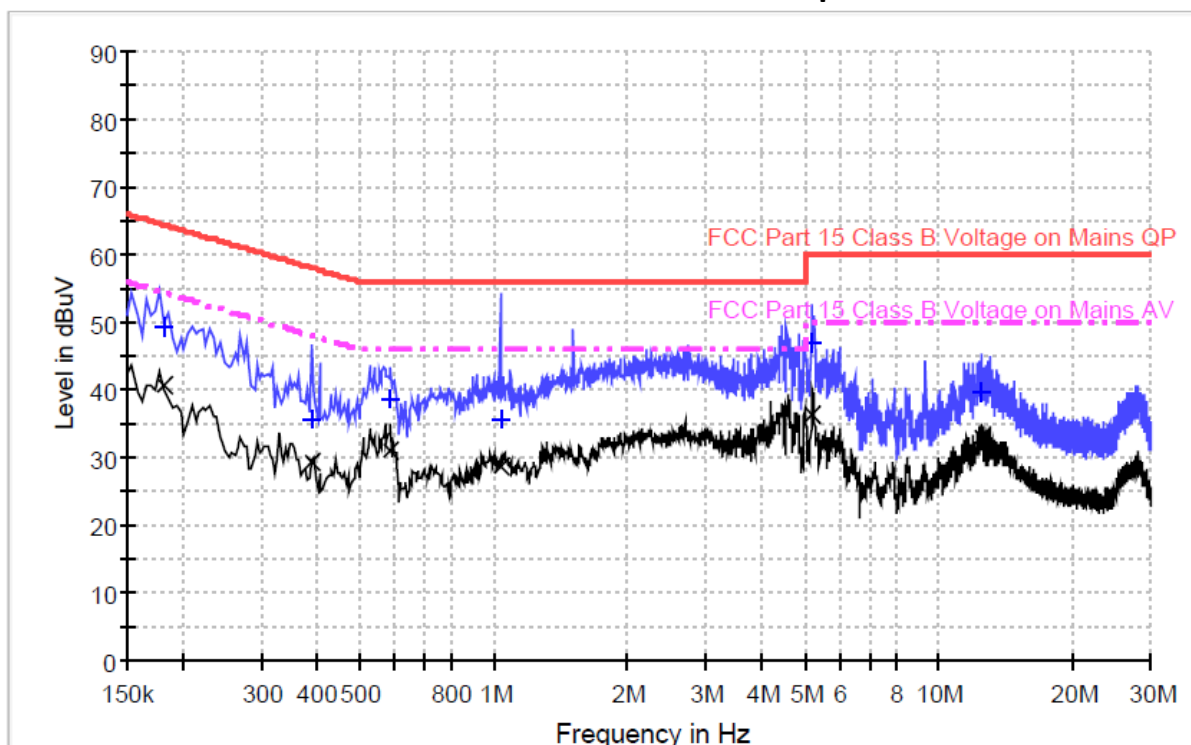

#### Result Table QP

| Frequency (MHz) | Quasi Peak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|-------------------|-----------------|------|------------|-------------|--------------|
| 0.181500        | 49.5              | 9.000           | N    | 9.6        | 14.9        | 64.4         |
| 0.390000        | 35.7              | 9.000           | N    | 9.6        | 22.4        | 58.1         |
| 0.586000        | 38.7              | 9.000           | N    | 9.7        | 17.3        | 56.0         |
| 1.034000        | 35.7              | 9.000           | N    | 9.7        | 20.3        | 56.0         |
| 5.170000        | 46.9              | 9.000           | N    | 9.8        | 13.1        | 60.0         |
| 12.506000       | 39.6              | 9.000           | N    | 9.9        | 20.4        | 60.0         |

#### Result Table AV

| Frequency (MHz) | Average (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|
| 0.181500        | 40.6           | 9.000           | N    | 9.6        | 13.8        | 54.4         |
| 0.390000        | 29.4           | 9.000           | N    | 9.6        | 18.7        | 48.1         |
| 0.586000        | 31.0           | 9.000           | N    | 9.7        | 15.0        | 46.0         |
| 1.034000        | 28.8           | 9.000           | N    | 9.7        | 17.2        | 46.0         |
| 5.170000        | 36.4           | 9.000           | N    | 9.8        | 13.6        | 50.0         |
| 12.506000       | 32.9           | 9.000           | N    | 9.9        | 17.1        | 50.0         |

**5.0 Equipment Photographs**

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

**6.0 Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**7.0 Technical Specifications**

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**8.0 Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## 9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

### 9.1 Bandedge Plot

The test plots are attached as below. From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

#### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

#### (i) **Lowest frequency channel (2402MHz):**

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 93.6 \text{ dB}\mu\text{V/m} - 50.79 \text{ dB} \\ &= 42.81 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 71.1 \text{ dB}\mu\text{V/m} - 50.79 \text{ dB} \\ &= 20.31 \text{ dB}\mu\text{V/m} \end{aligned}$$

#### (ii) **Highest frequency channel (2480MHz):**

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot


$$\begin{aligned} &= 93.4 \text{ dB}\mu\text{V/m} - 49.76 \text{ dB} \\ &= 43.64 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 70.9 \text{ dB}\mu\text{V/m} - 49.76 \text{ dB} \\ &= 21.14 \text{ dB}\mu\text{V/m} \end{aligned}$$


The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB $\mu$ V/m (Peak Limit) and 54dB $\mu$ V/m (Average Limit).

### Lowest frequency Channel

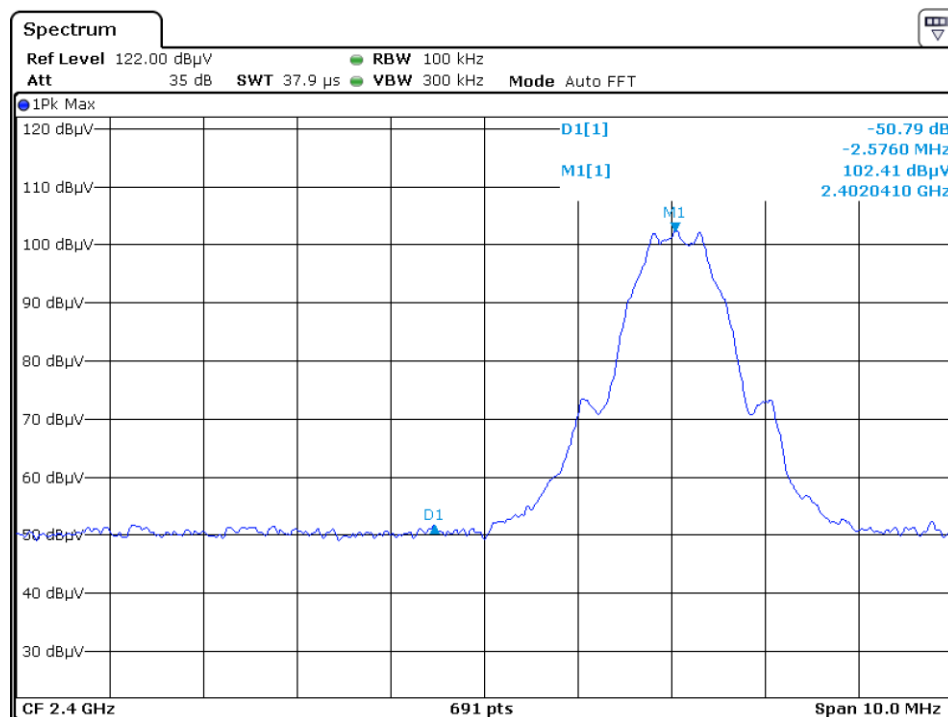

Date: 15.OCT.2019 10:36:58


### Highest frequency Channel

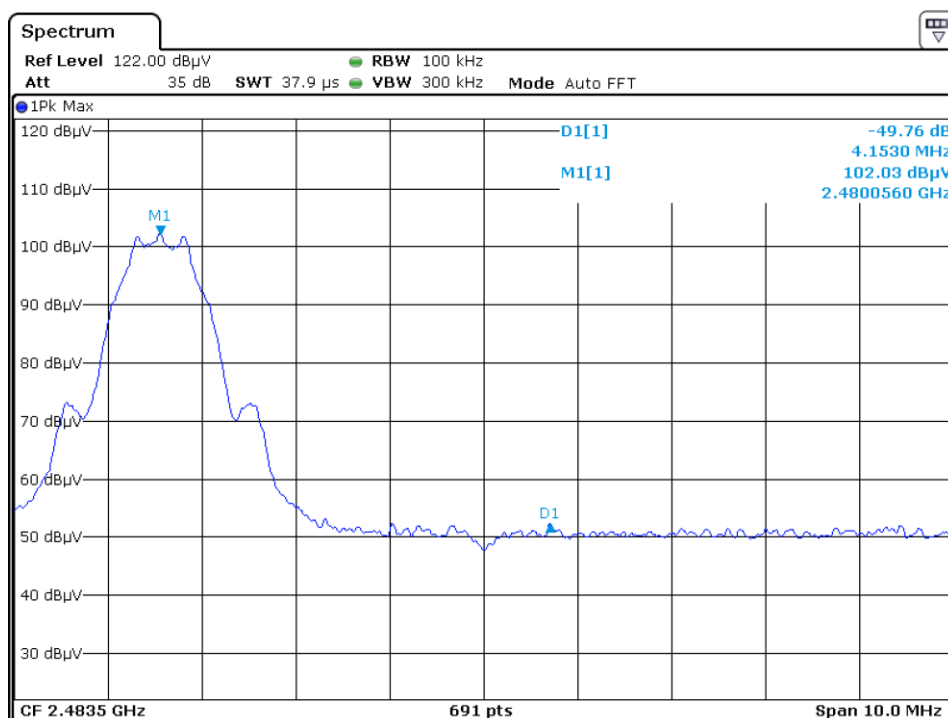


Date: 15.OCT.2019 10:39:48

## 9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

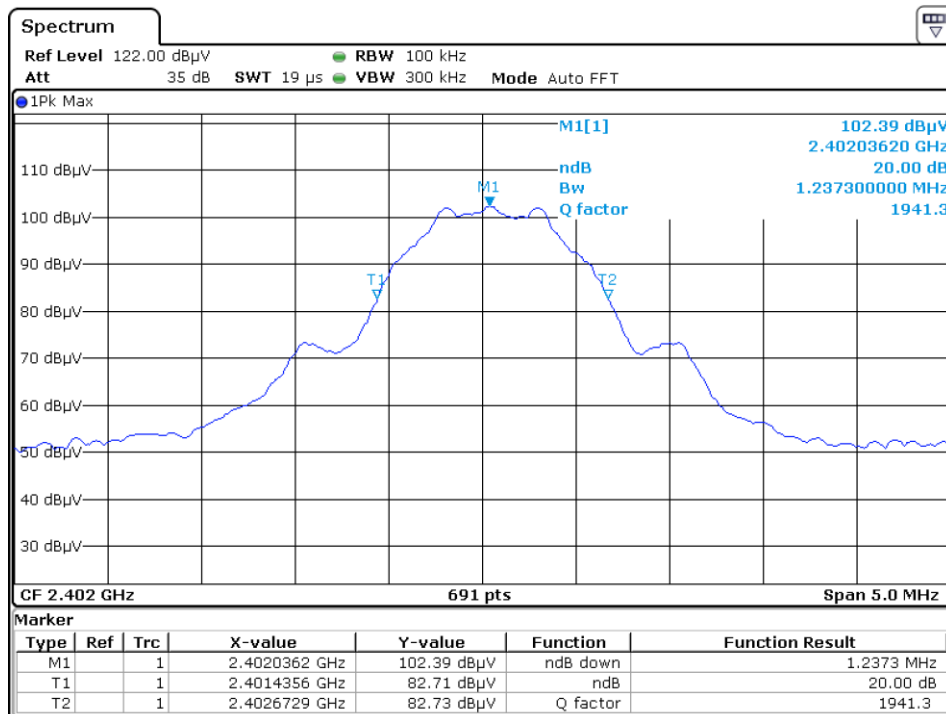

Date: 15.OCT.2019 10:38:02

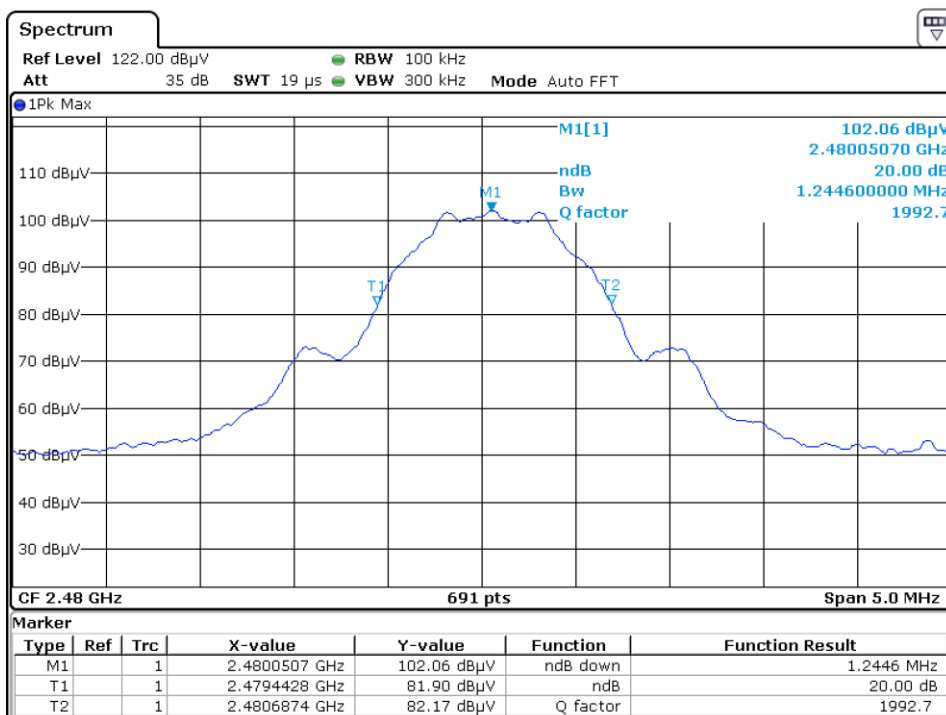

Date: 15.OCT.2019 10:38:52

### 9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

### 9.4 Transmitter Duty Cycle Calculation, FCC Rule 15.35(b, c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEF function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

|   |                                                                 |
|---|-----------------------------------------------------------------|
|   | See attached spectrum analyzer chart (s) for Transmitter timing |
|   | See Transmitter timing diagram provided by manufacturer         |
| x | Not applicable, duty cycle was not used.                        |

## 9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

## 9.5 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

## 10.0 Test Equipment List

| Equipment No. | Equipment              | Manufacturer  | Model No.    | Serial No.     | Cal. Date   | Due Date    |
|---------------|------------------------|---------------|--------------|----------------|-------------|-------------|
| SZ061-12      | BiConiLog Antenna      | ETS           | 3142E        | 00166158       | 14-Sep-2018 | 14-Sep-2021 |
| SZ185-01      | EMI Receiver           | R&S           | ESCI         | 100547         | 24-Dec-2019 | 24-Dec-2020 |
|               |                        |               |              |                | 22-Dec-2020 | 22-Dec-2021 |
| SZ061-08      | Horn Antenna           | ETS           | 3115         | 00092346       | 7-Sep-2019  | 7-Sep-2021  |
| SZ061-07      | Pyramidal Horn Antenna | ETS           | 3160-09      | 00083067       | 13-Aug-2019 | 13-Aug-2021 |
| SZ056-03      | Spectrum Analyzer      | R&S           | FSP 30       | 101148         | 27-May-2020 | 27-May-2021 |
| SZ056-06      | Signal Analyzer        | R&S           | FSV 40       | 101101         | 27-May-2020 | 27-May-2021 |
| SZ181-04      | Preamplifier           | Agilent       | 8449B        | 3008A02474     | 27-May-2020 | 27-May-2021 |
| SZ188-01      | Anechoic Chamber       | ETS           | RFD-F/A-100  | 4102           | 15-Dec-2018 | 15-Dec-2021 |
| SZ062-02      | RF Cable               | RADIALL       | RG 213U      | --             | 12-Jun-2020 | 12-Jun-2021 |
| SZ062-05      | RF Cable               | RADIALL       | 0.04-26.5GHz | --             | 26-Feb-2020 | 26-Feb-2021 |
| SZ062-12      | RF Cable               | RADIALL       | 0.04-26.5GHz | --             | 26-Feb-2020 | 26-Feb-2021 |
| SZ067-04      | Notch Filter           | Micro-Tronics | BRM50702-02  | --             | 27-May-2020 | 27-May-2021 |
| SZ185-02      | EMI Test Receiver      | R&S           | ESCI         | 100692         | 27-Oct-2020 | 27-Oct-2021 |
| SZ187-01      | Two-Line V-Network     | R&S           | ENV216       | 100072         | 27-Oct-2020 | 27-Oct-2021 |
| SZ187-02      | Two-Line V-Network     | R&S           | ENV216       | 100072         | 27-May-2020 | 27-May-2021 |
| SZ188-03      | Shielding Room         | ETS           | RFD-100      | 4100           | 07-Jan-2020 | 07-Jan-2023 |
| SZ062-16      | RF Cable               | HUBER+SUHNER  | CBL2-BN-1m   | 110127-2231000 | 13-Nov-2020 | 13-Nov-2021 |

\*\*\*\*\* End of Report\*\*\*\*\*