

FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

For

Rokid Glass

MODEL No.: RG101

FCC ID: 2ATE3RG101

Trade Mark: Rokid Glass

REPORT NO: ES190424945W04

ISSUE DATE: July 2, 2019

Prepared for

Hangzhou Ling Ban Technology Co., LTD

102 room, no.3, yixuan road, xixiyishujihecun, wuchang subdistrict, yuhang district, Hangzhou, China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

1 TEST RESULT CERTIFICATION

Applicant : Hangzhou Ling Ban Technology Co., LTD.
Address : 102 room, no.3, yixuan road, xixiyishujihecun, wuchang subdistrict, yuhang district, Hangzhou,China
Manufacturer : Hangzhou Ling Ban Technology Co., LTD.
Address : 102 room, no.3, yixuan road, xixiyishujihecun, wuchang subdistrict, yuhang district, Hangzhou,China
EUT : Rokid Glass
Model Name : RG101
Trademark : Rokid Glass

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test : April 30,2019 to May 28, 2019

Prepared by:


Sewen Guo /Editor

Reviewer:


Joe Xia /Supervisor

Approve & Authorized Signer :


Lisa Wang/Manager



TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	2
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	6
4	TEST METHODOLOGY	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	11
5.1	FACILITIES.....	11
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	11
6	TEST SYSTEM UNCERTAINTY	12
7	SETUP OF EQUIPMENT UNDER TEST	13
7.1	RADIO FREQUENCY TEST SETUP	13
7.2	RADIO FREQUENCY TEST SETUP	13
7.3	CONDUCTED EMISSION TEST SETUP	15
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	16
7.5	SUPPORT EQUIPMENT.....	16
8	TEST REQUIREMENTS	17
8.1	BANDWIDTH MEASUREMENT	17
8.2	MAXIMUM CONDUCTED OUTPUT POWER.....	50
8.3	MAXIMUM PEAK POWER DENSITY	60
8.4	FREQUENCY STABILITY	113
8.5	UNDESIRABLE RADIATED SPURIOUS EMISSION.....	120
8.6	POWER LINE CONDUCTED EMISSIONS.....	141
8.7	ANTENNA APPLICATION	144

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description	
Product	Rokid Glass	
Model Number	RG101	
Wifi Type	☒ UNII-1: 5150MHz-5250MHz Band ☒ UNII-2A: with 5250MHz-5350MHz Band ☐ UNII-2C: with 5470MHz-5725MHz Band ☒ UNII-3 with 5725MHz-5850MHz Band	
WLAN Supported	☒ 802.11a ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth) ☒ 802.11ac(20MHz channel bandwidth) ☒ 802.11ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)	
Data Rate	802.11a:54/48/36/24/18/12/9/6Mbps 802.11n:up to 600 Mbps 802.11ac:up to 1.733Gbps	
Modulation	☒ OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n; ☒ OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac;	
Frequency Range	☒ UNII-1: 5150MHz-5250MHz Band	
	☒ 5180-5240MHz for 802.11a; ☒ 5180-5240MHz for 802.11n(HT20); ☒ 5180-5240MHz for 802.11ac(HT20);	☒ 5190-5230MHz for 802.11n(HT40); ☒ 5190-5230MHz for 802.11ac(HT40); ☒ 5210MHz for 802.11ac(HT80);
	☒ UNII-2A: with 5250MHz-5350MHz Band	
	☒ 5260-5320MHz for 802.11a; ☒ 5260-5320MHz for 802.11n(HT20); ☒ 5260-5320MHz for 802.11ac(HT20);	☒ 5270-5310MHz for 802.11n(HT40); ☒ 5270-5310MHz for 802.11ac(HT40); ☒ 5290MHz for 802.11ac(HT80);
	☒ UNII-3 with 5725MHz-5850MHz Band	
	☒ 5745-5825MHz for 802.11a; ☒ 5745-5825MHz for 802.11n(HT20); ☒ 5745-5825MHz for 802.11ac(HT20);	☒ 5755-5795MHz for 802.11n(HT40); ☒ 5755-5795MHz for 802.11ac(HT40); ☒ 5775MHz for 802.11ac(HT80);
TCP Function	☐ Applicable	☒ Not Applicable
Antenna Type	Internal Antenna	
Antenna Gain	2.3 dBi	
Transmit Power	Output Power (Max.) for UNII-1 (1TX)	802.11a: 16.12dBm 802.11n(HT 20 MHz): 16.81dBm 802.11n(HT 40 MHz): 16.09dBm 802.11ac (HT 20 MHz): 16.02dBm 802.11ac (HT 40 MHz): 15.87dBm 802.11ac (HT 80 MHz): 14.74dBm
	Output Power (Max.) for UNII-2A	802.11a: 17.24dBm 802.11n(HT 20 MHz): 17.23dBm

	(1TX)	802.11n(HT 40 MHz): 16.85dBm 802.11ac (HT 20 MHz): 17.35dBm 802.11ac (HT 40 MHz): 16.90dBm 802.11ac (HT 80 MHz): 15.40dBm
	Output Power (Max.) for UNII-3 (1TX)	802.11a: 13.72dBm 802.11n(HT 20 MHz): 13.70dBm 802.11n(HT 40 MHz): 13.85dBm 802.11ac (HT 20 MHz): 13.74dBm 802.11ac (HT 40 MHz): 13.87dBm 802.11ac (HT 80 MHz): 9.71dBm
	Output Power (Max.) for UNII-1 (2TX)	802.11a: 18.47dBm 802.11n(HT 20 MHz): 18.48dBm 802.11n(HT 40 MHz): 18.49dBm 802.11ac (HT 20 MHz): 18.39dBm 802.11ac (HT 40 MHz): 18.38dBm 802.11ac (HT 80 MHz): 17.24dBm
	Output Power (Max.) for UNII-2A (2TX)	802.11a: 19.50dBm 802.11n(HT 20 MHz): 19.56dBm 802.11n(HT 40 MHz): 19.31dBm 802.11ac (HT 20 MHz): 19.39dBm 802.11ac (HT 40 MHz): 19.26dBm 802.11ac (HT 80 MHz): 17.90dBm
	Output Power (Max.) for UNII-3 (2TX)	802.11a: 15.68dBm 802.11n(HT 20 MHz): 15.67dBm 802.11n(HT 40 MHz): 15.76dBm 802.11ac (HT 20 MHz): 15.69dBm 802.11ac (HT 40 MHz): 15.78dBm 802.11ac (HT 80 MHz): 12.48dBm
Power supply	☒ DC 5V for adapter	
	☒ Adapter : Model : A8A-050200U-US1 Input : 100-240V,50/60Hz,0.35A Output: 5V,2A	

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 789033 D2 General UNII Test Procedures New Rules v02r01, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ATE3RG101 filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789033 D2 General UNII Test Procedures New Rules v02r01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2019	05/15/2020
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2019	05/15/2020
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/16/2019	05/15/2020
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2019	05/15/2020
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2019	05/15/2020
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2019	05/15/2020

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2019	05/15/2020
Pre-Amplifier	HP	8447D	2944A07999	05/16/2019	05/15/2020
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2019	05/15/2020
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2019	05/15/2020
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2019	05/15/2020
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2019	05/15/2020
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2019	05/15/2020
Cable	Rosenberger	N/A	FP2RX2	05/16/2019	05/15/2020
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2019	05/15/2020
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2019	05/15/2020

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2019	05/15/2020
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2019	05/15/2020
Power meter	Anritsu	ML2495A	0824006	05/16/2019	05/15/2020
Power sensor	Anritsu	MA2411B	0738172	05/16/2019	05/15/2020
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	05/16/2019	05/15/2020
Temperature & Humidity Chamber	YINHE	SDH0525F	2003003	05/19/2019	05/18/2020

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Wifi 5G with U-NII - 1

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac Wave2 (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac Wave2 (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

☒ Wifi 5G with U-NII -2A

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		
56	5280	64	5320		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270				
62	5310				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	56	5280	64	5320

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	N/A	N/A	62	5310

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

☒ Wifi 5G with U-NII -3

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2018.11.30

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2018.03.30

The Laboratory has been assessed according to the requirements
ISO/IEC 17025

Accredited by FCC, August 09, 2018

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA, August 08, 2018

The Certificate Registration Number is 4321.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK(SHENZHEN) CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

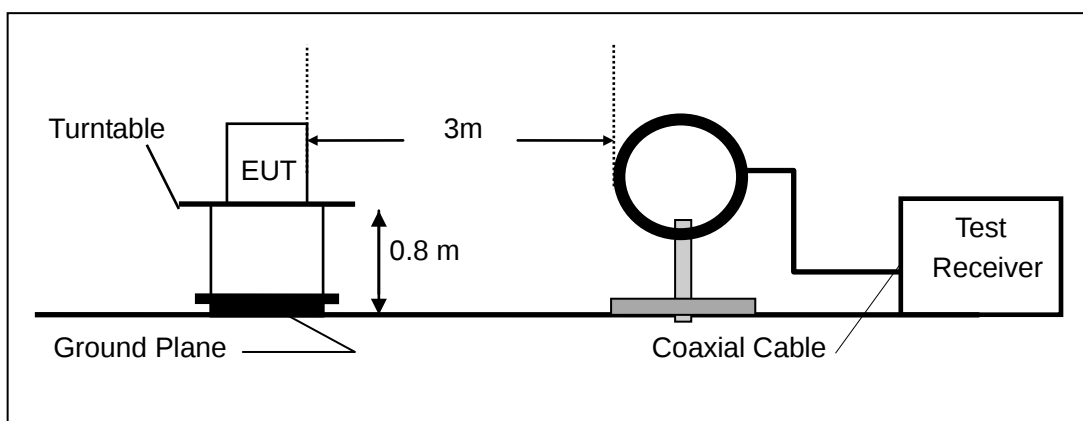

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

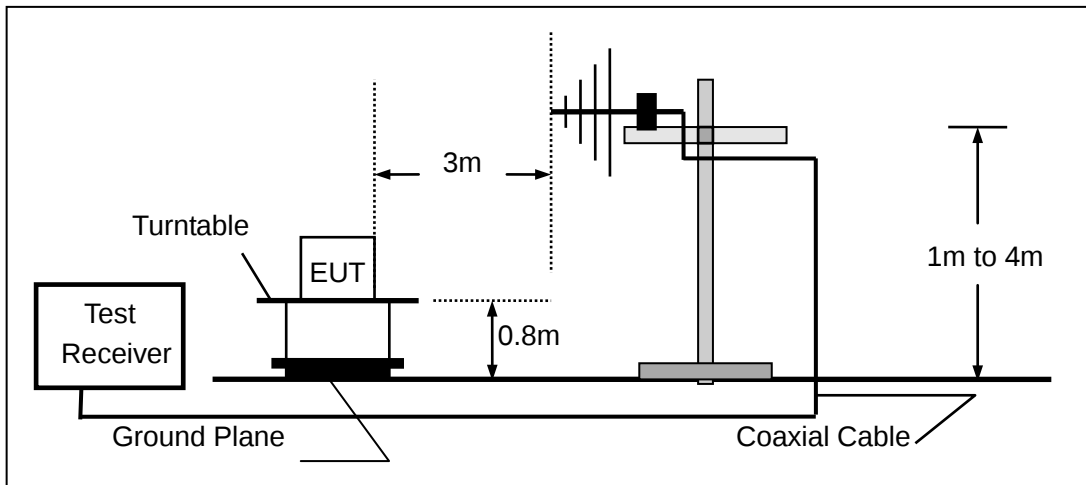

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

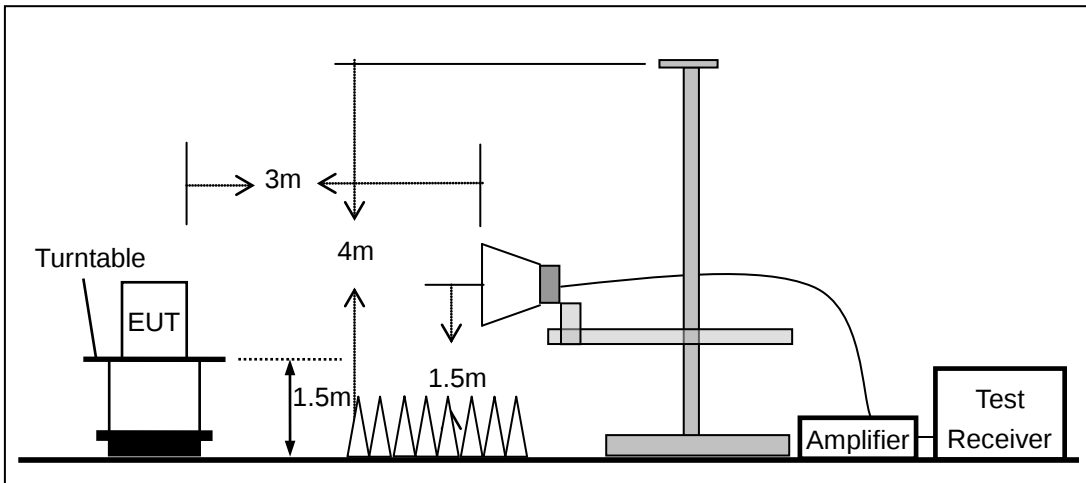


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

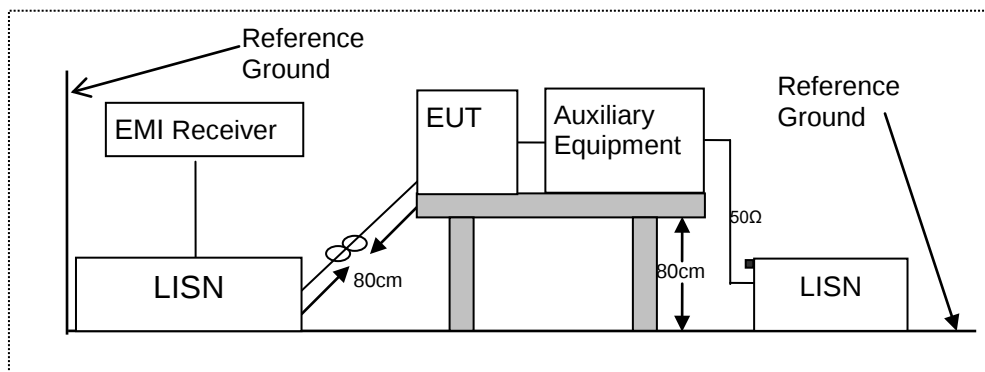

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

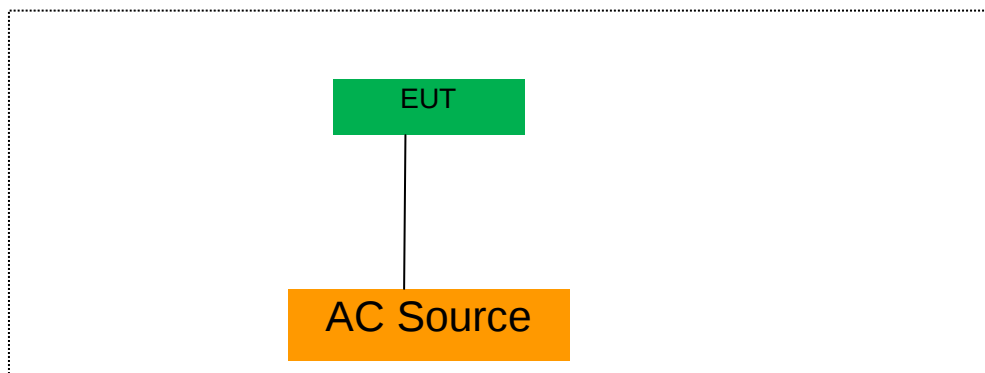

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB cable	1.2	Unshielded	Without Ferrite

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	acer	ZR1	LXTECOCO76643158 372500

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to FCC Part 15.407(e) for UNII Band III
According to 789033 D02 Section II(C)
According to 789033 D02 Section II(D)

8.1.2 Conformance Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

According to 789033 D02 v02r01 section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v01r02 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:


1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot \text{RBW}$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results


5150-5250MHz

Test Mode	Test Channel MHz		26 dB Bandwidth MHz	99% Bandwidth MHz	Verdict
802.11a	CH36	5180	38.52	20.310	Pass
	CH40	5200	39.21	20.754	Pass
	CH48	5240	35.39	19.211	Pass
802.11n-HT20	CH36	5180	39.64	20.460	Pass
	CH40	5200	38.95	19.998	Pass
	CH48	5240	38.78	20.177	Pass
802.11ac(HT20)	CH36	5180	39.21	20.320	Pass
	CH40	5200	37.80	19.521	Pass
	CH48	5240	38.48	19.544	Pass
802.11n-HT40	CH38	5190	78.57	42.402	Pass
	CH46	5230	78.14	40.402	Pass
802.11ac(HT40)	CH38	5190	77.19	41.694	Pass
	CH46	5230	77.98	40.280	Pass
802.11ac(HT80)	CH42	5210	142.60	80.647	Pass


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11a Frequency(MHz) 5180

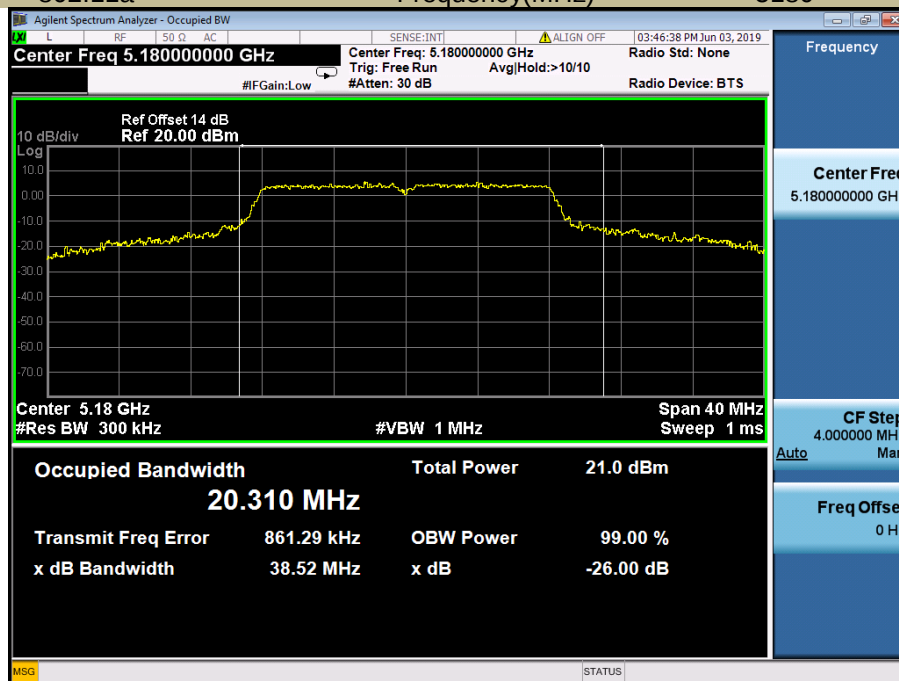


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11a Frequency(MHz) 5200

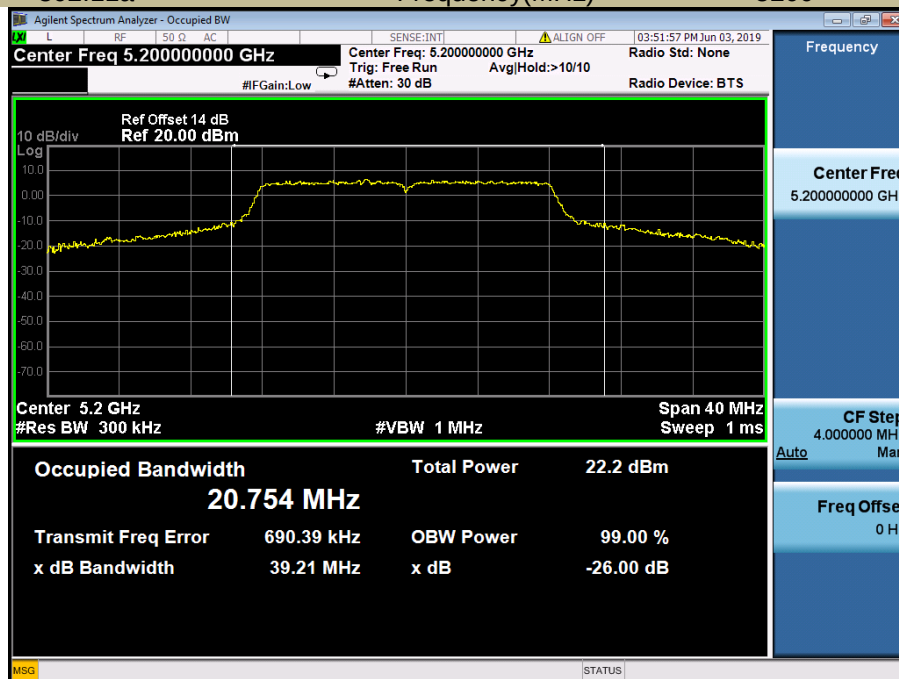


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11a Frequency(MHz) 5240

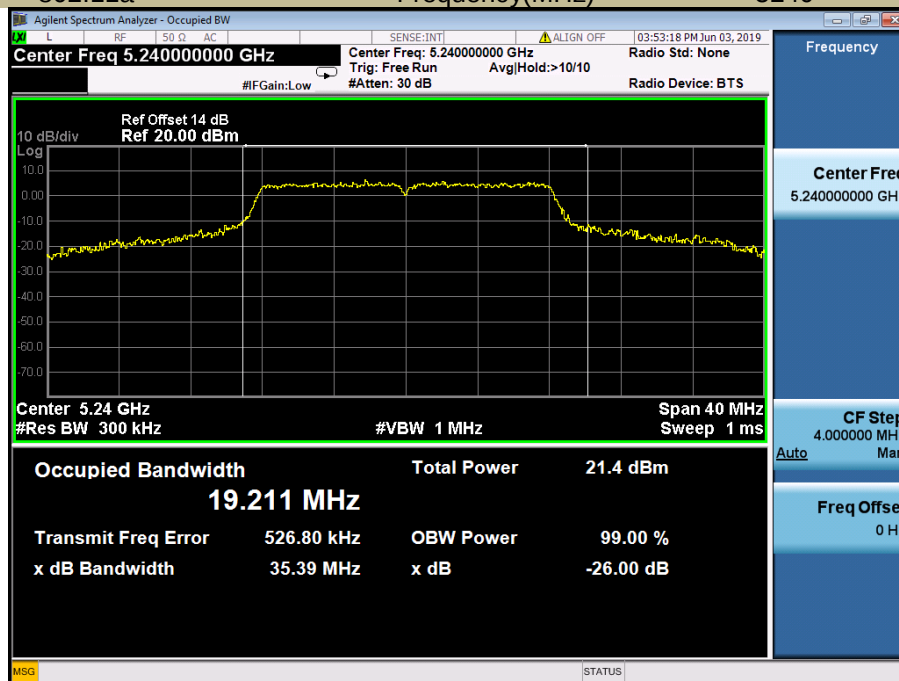


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11n-HT20 Frequency(MHz) 5180

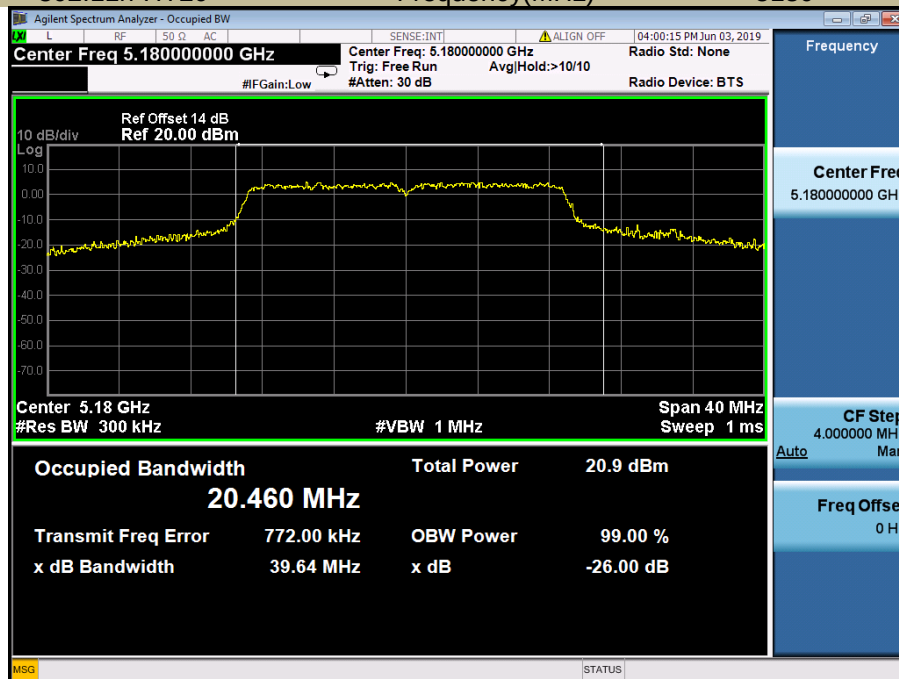


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11n-HT20 Frequency(MHz) 5200

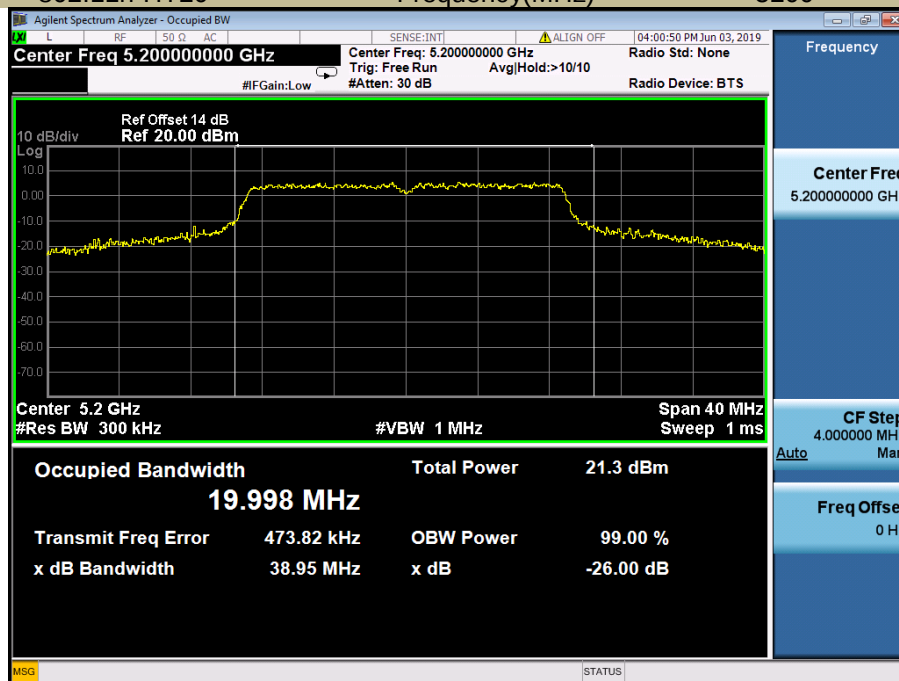


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11n-HT20 Frequency(MHz) 5240

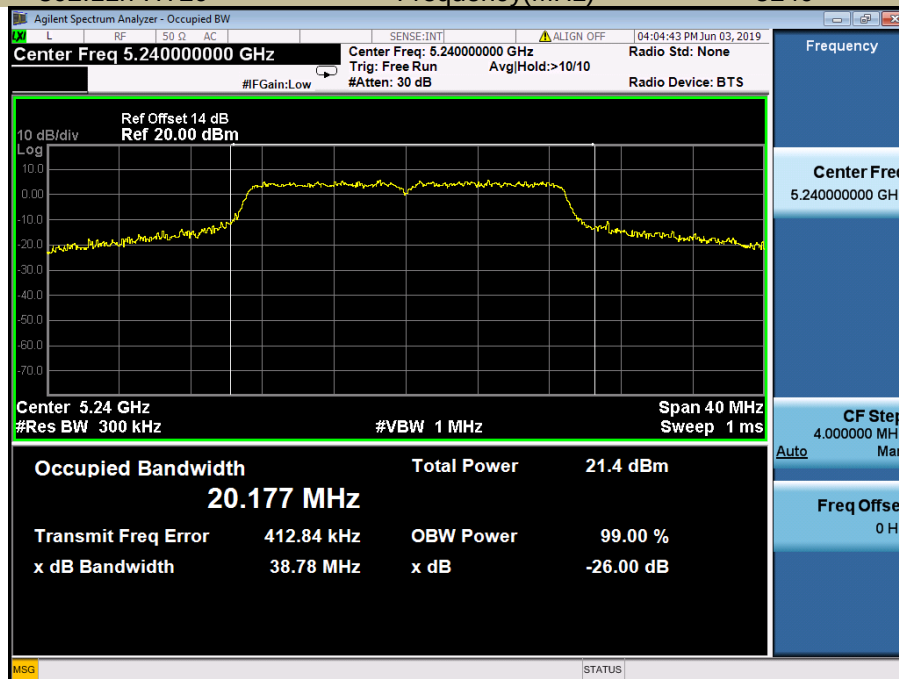


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11ac(HT20) Frequency(MHz) 5180

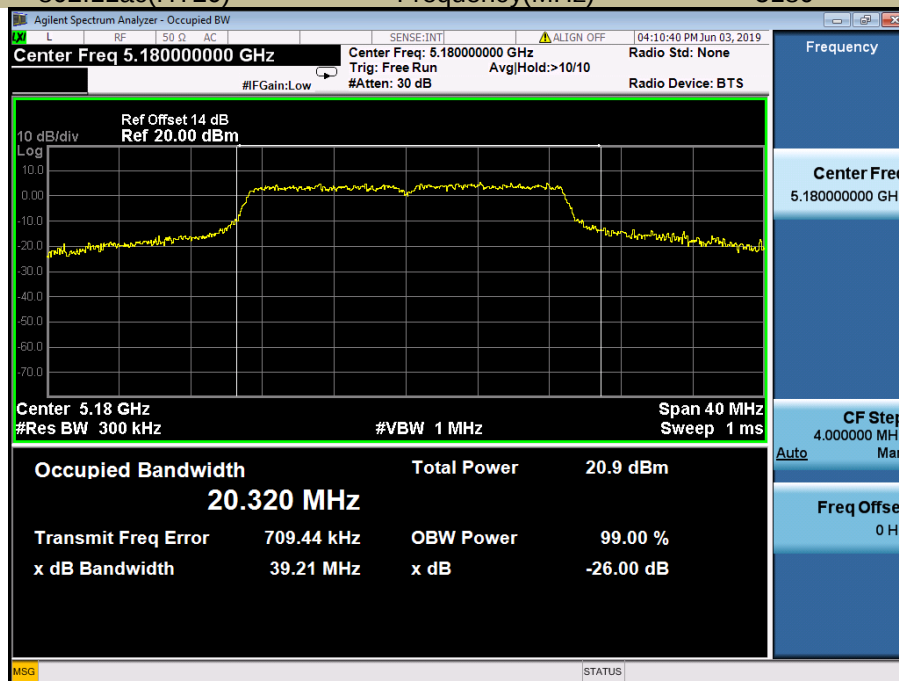


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11ac(HT20) Frequency(MHz) 5200

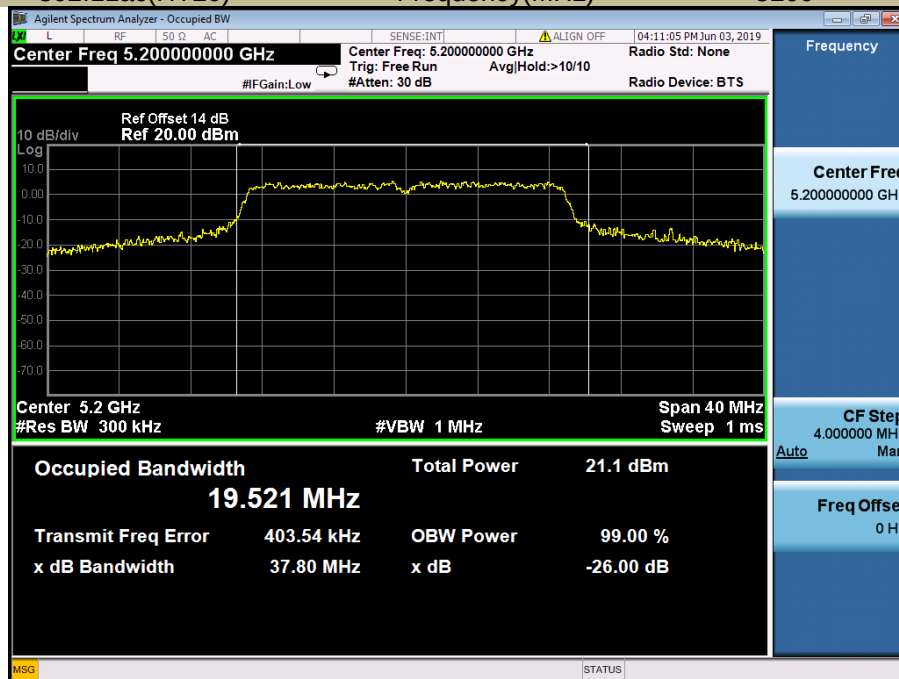


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11ac(HT20) Frequency(MHz) 5240

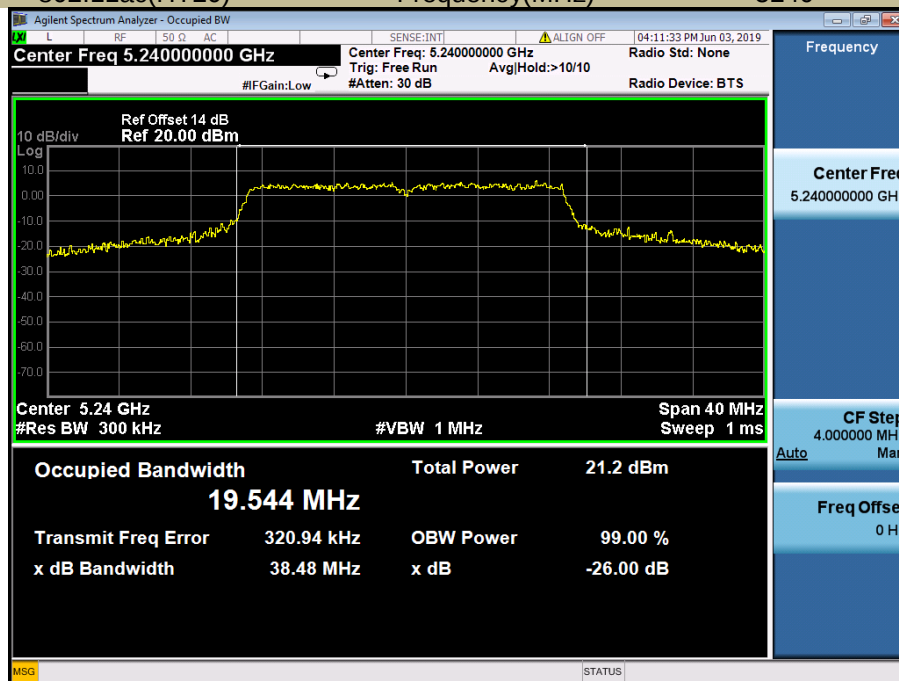


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11n-HT40 Frequency(MHz) 5190

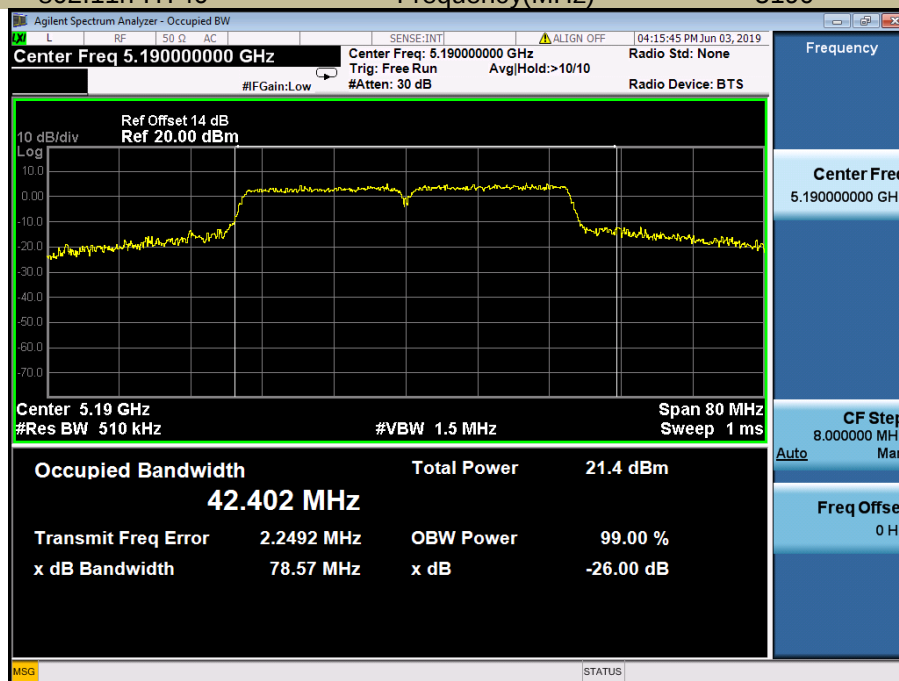


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11n-HT40 Frequency(MHz) 5230

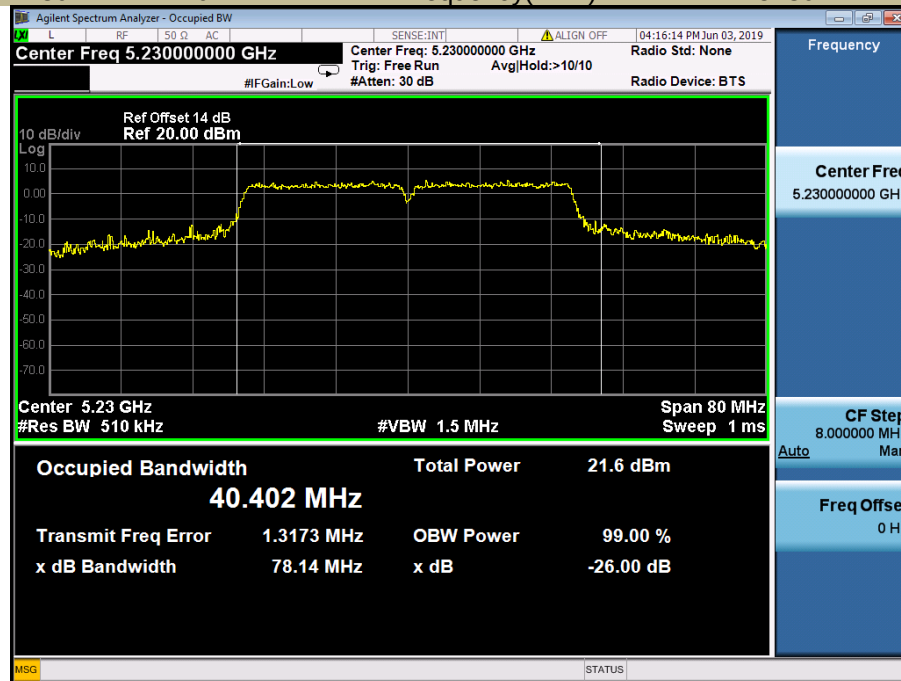


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11ac(HT40) Frequency(MHz) 5190

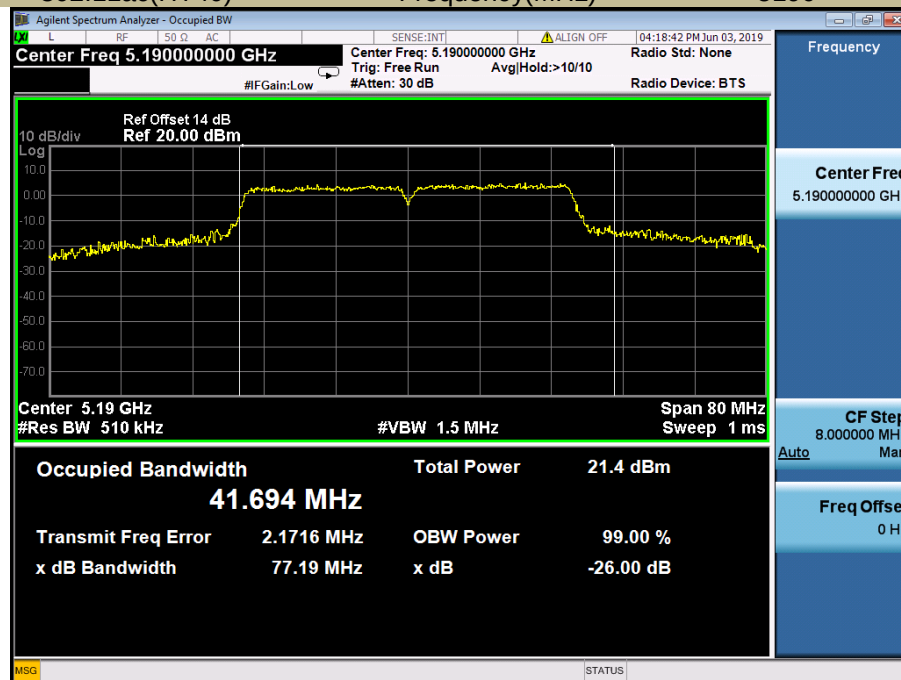

Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11ac(HT40) Frequency(MHz) 5230

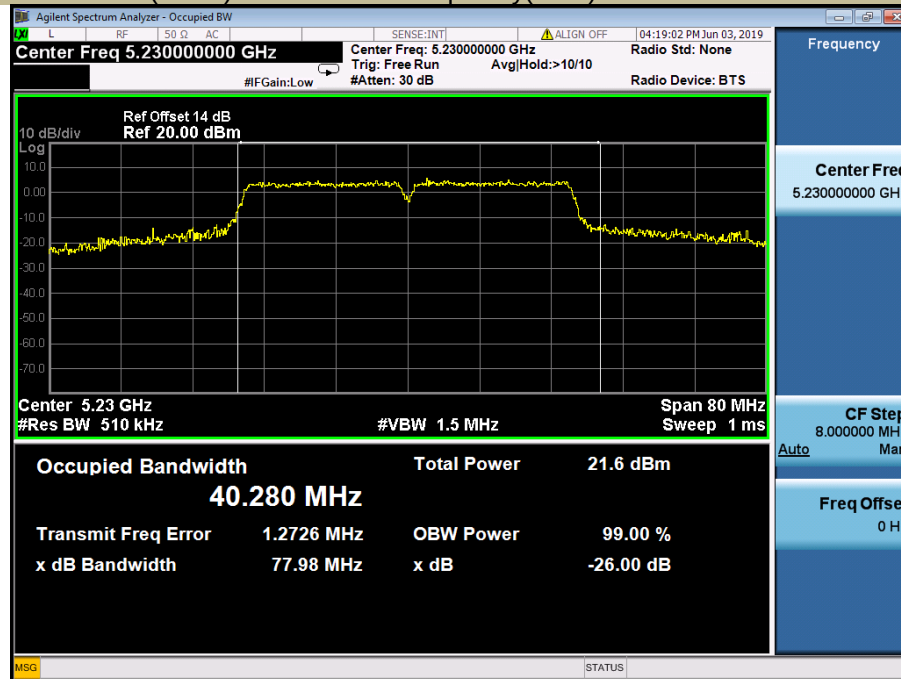


Emission Bandwidth&99% Occupied Bandwidth U-NII - 1
Test Model 802.11ac 80 Frequency(MHz) 5210

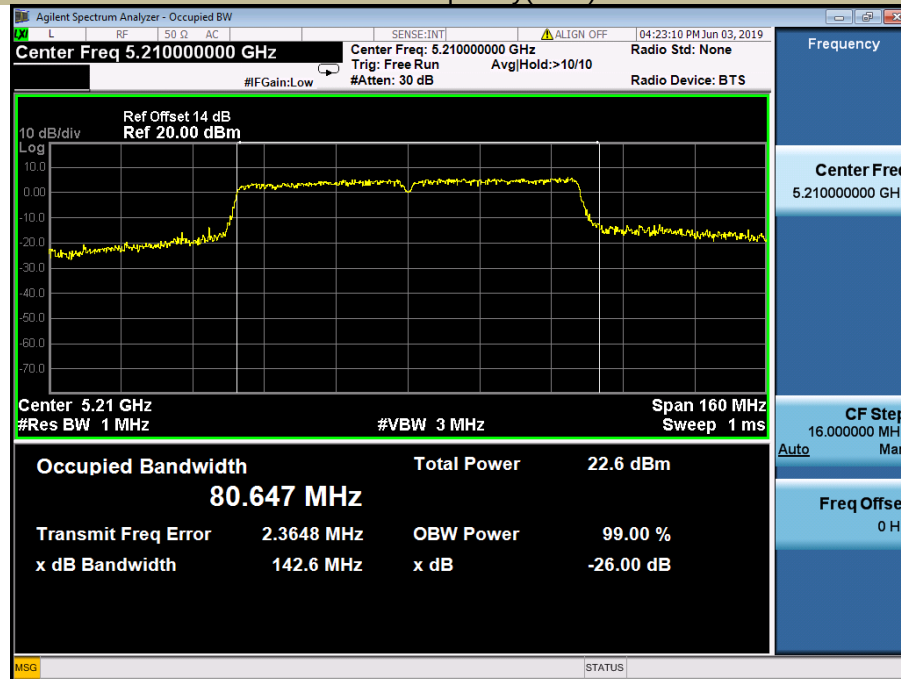


5250-5350MHz

Test Mode	Test Channel MHz		26 dB Bandwidth MHz	99% Bandwidth MHz	Verdict
802.11a	CH52	5260	38.90	20.166	Pass
	CH56	5280	35.16	18.997	Pass
	CH64	5320	33.06	17.903	Pass
802.11n-HT20	CH52	5260	37.55	19.907	Pass
	CH56	5280	37.29	19.466	Pass
	CH64	5320	37.37	18.846	Pass
802.11ac(HT20)	CH52	5260	39.03	19.899	Pass
	CH56	5280	37.56	19.558	Pass
	CH64	5320	35.54	18.705	Pass
802.11n-HT40	CH54	5270	77.55	40.550	Pass
	CH62	5310	77.34	37.746	Pass
802.11ac(HT40)	CH54	5270	74.00	40.816	Pass
	CH62	5310	74.13	37.525	Pass
802.11ac(HT80)	CH58	5290	146.30	77.388	Pass


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11a Frequency(MHz) 5260

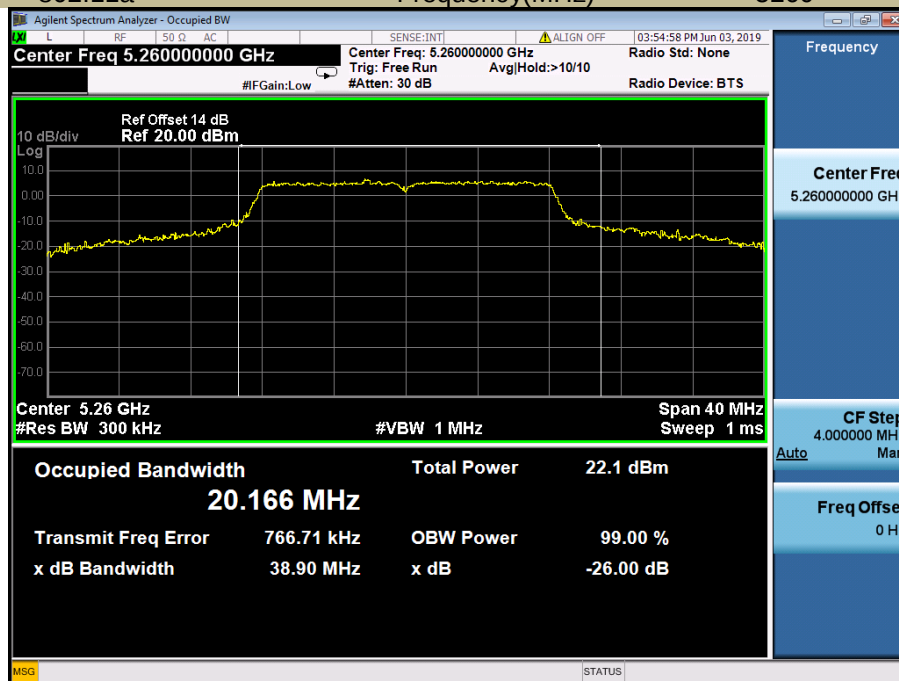


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11a Frequency(MHz) 5280

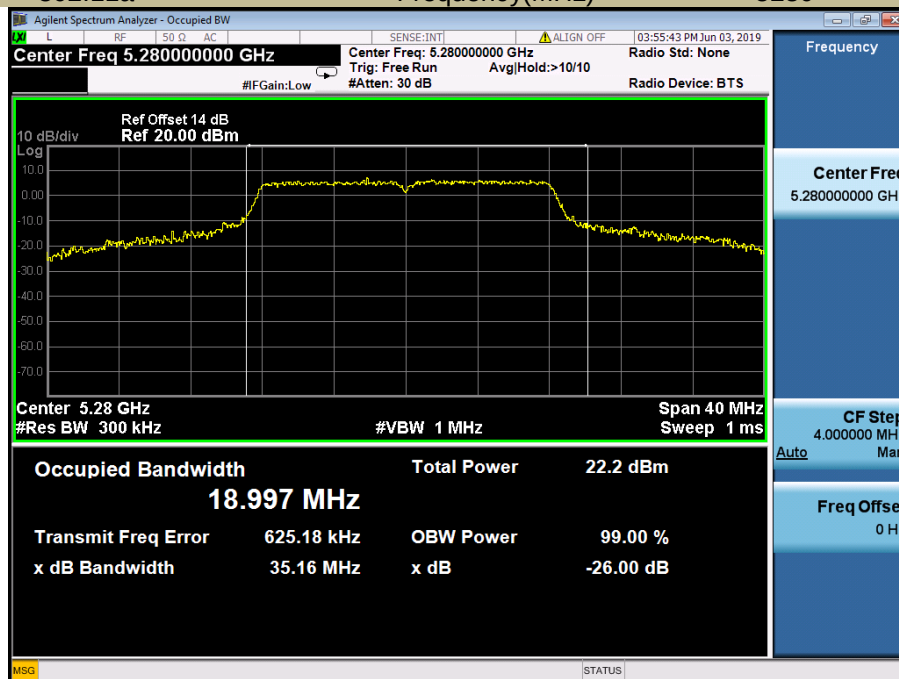

Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11a Frequency(MHz) 5320

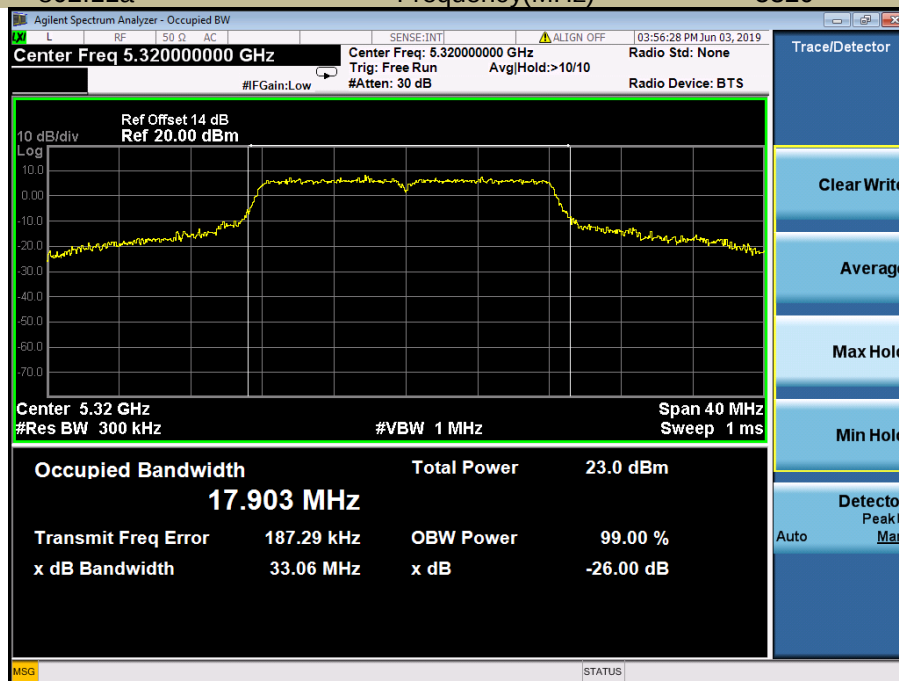


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11n-HT20 Frequency(MHz) 5260

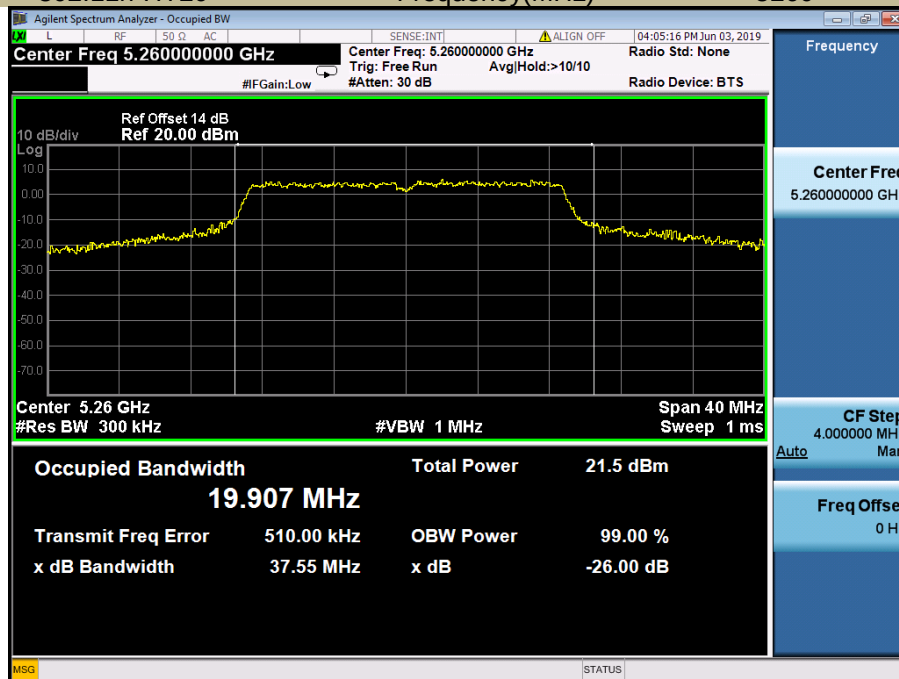

Emission Bandwidth&99% Occupied Bandwidth
Test Model 802.11n-HT20

U-NII – 2A
Frequency(MHz)


5280

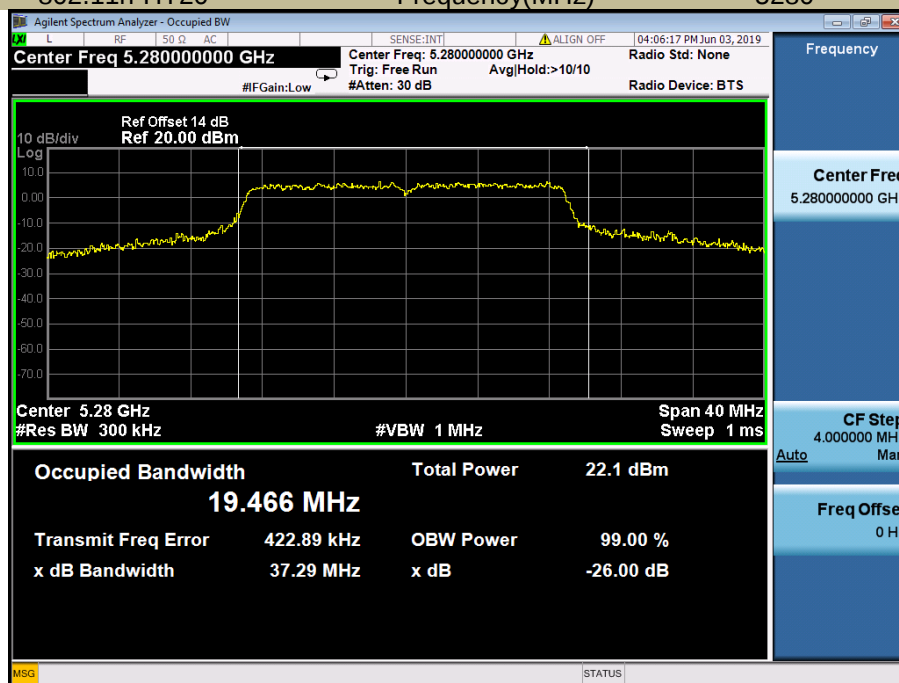


Emission Bandwidth&99% Occupied Bandwidth
Test Model 802.11n-HT20

U-NII – 2A
Frequency(MHz)


5320

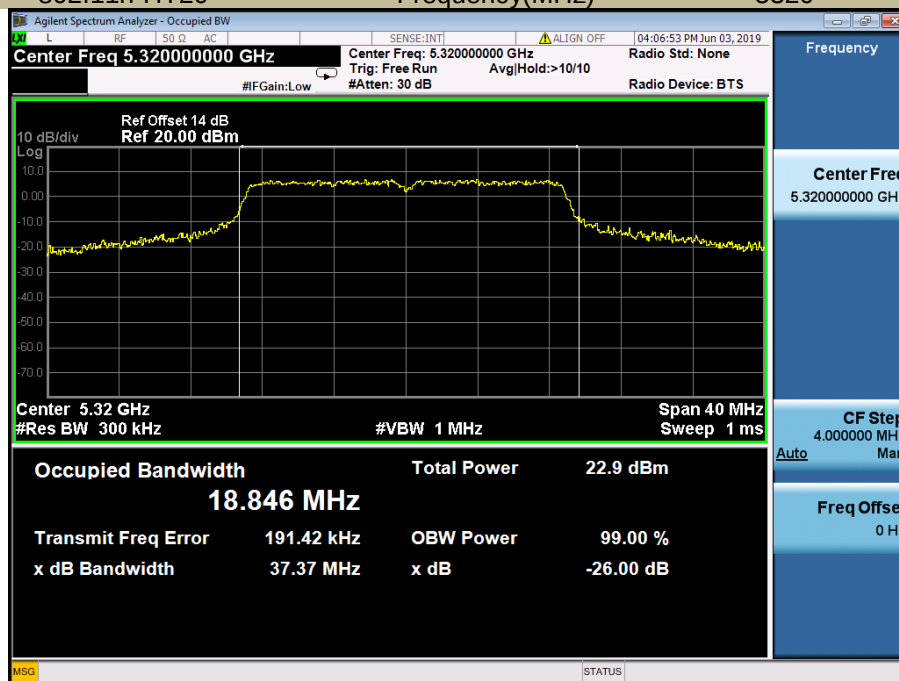


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11ac(HT20) Frequency(MHz) 5260

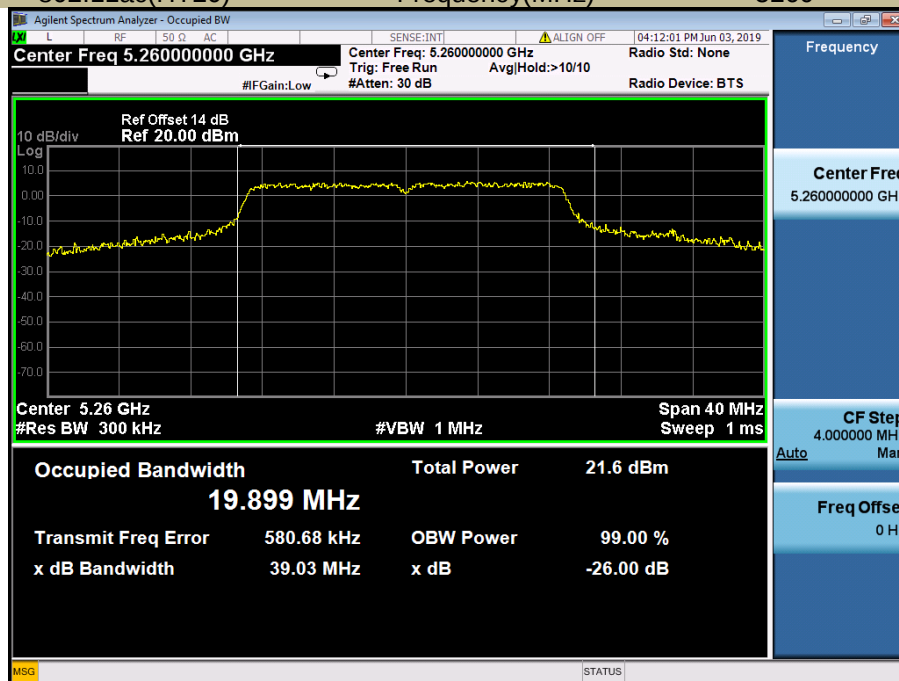


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11ac(HT20) Frequency(MHz) 5280

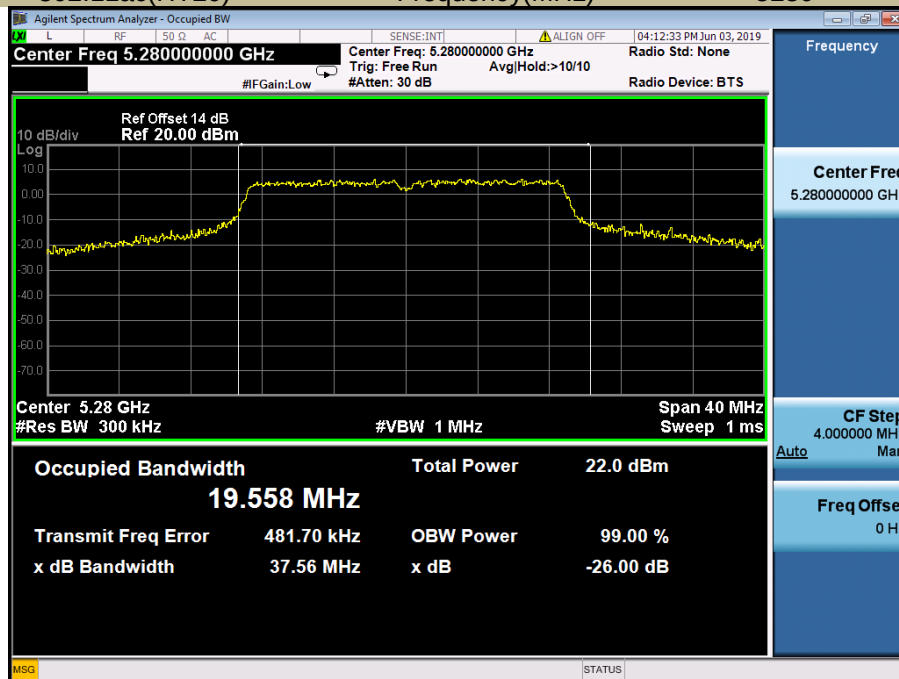


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11ac(HT20) Frequency(MHz) 5320

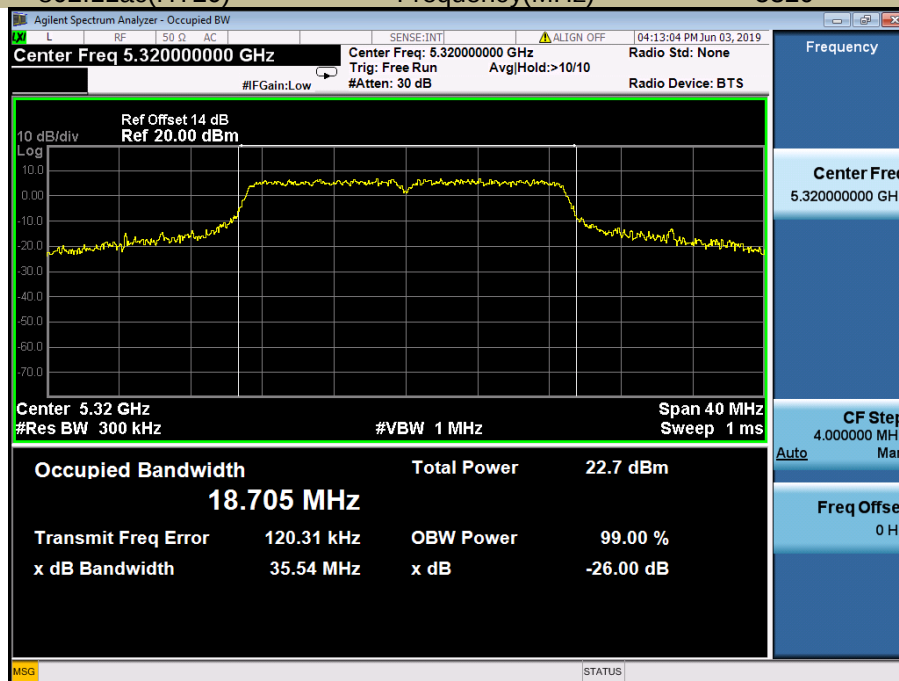


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11n-HT40 Frequency(MHz) 5270

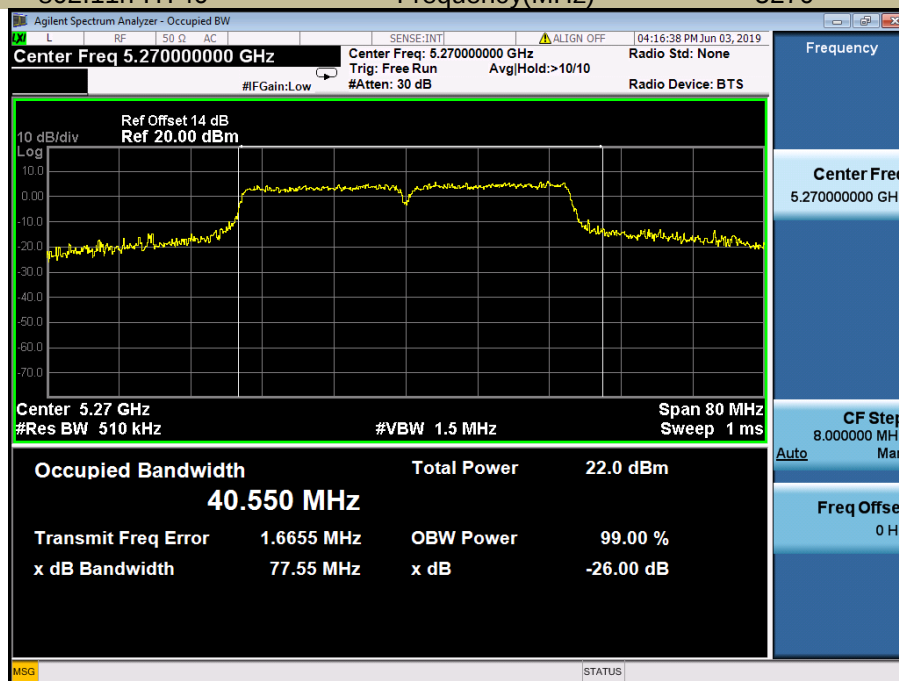


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11n-HT40 Frequency(MHz) 5310

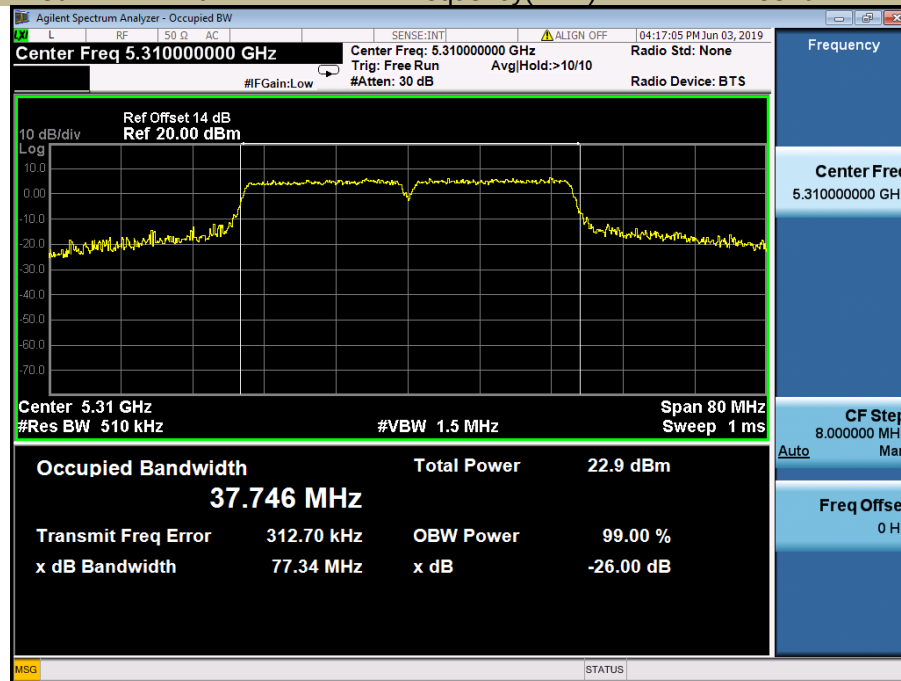


Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11ac(HT40) Frequency(MHz) 5270

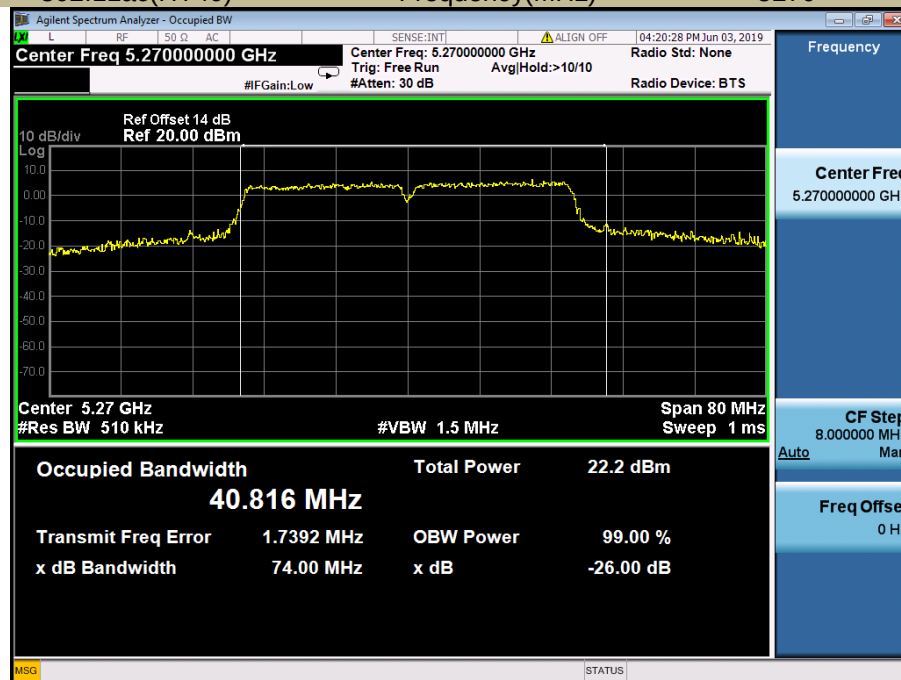

Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11ac(HT40) Frequency(MHz) 5310

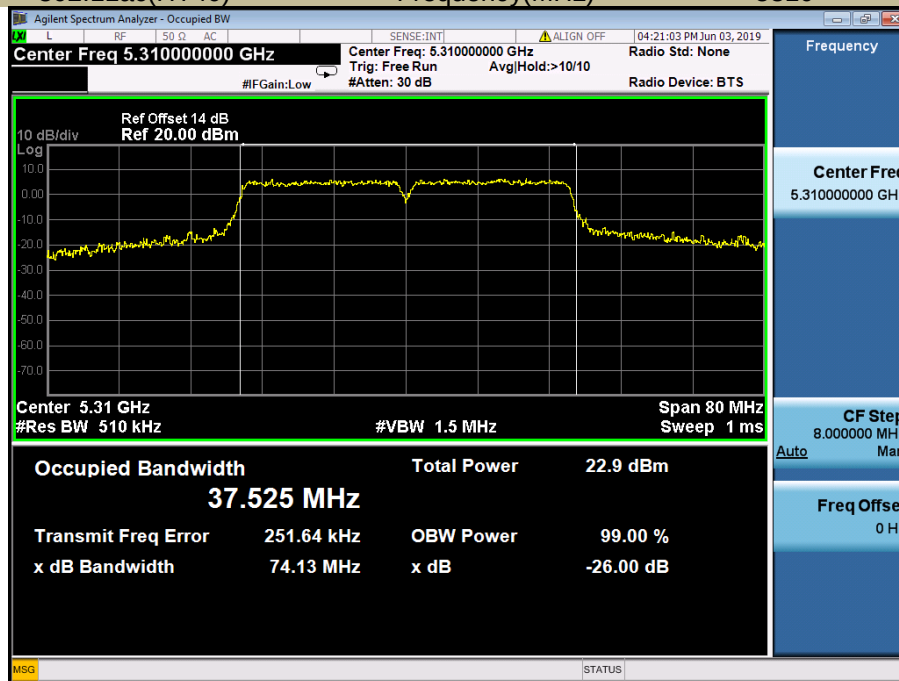

Emission Bandwidth&99% Occupied Bandwidth U-NII – 2A
Test Model 802.11ac 80 Frequency(MHz) 5290

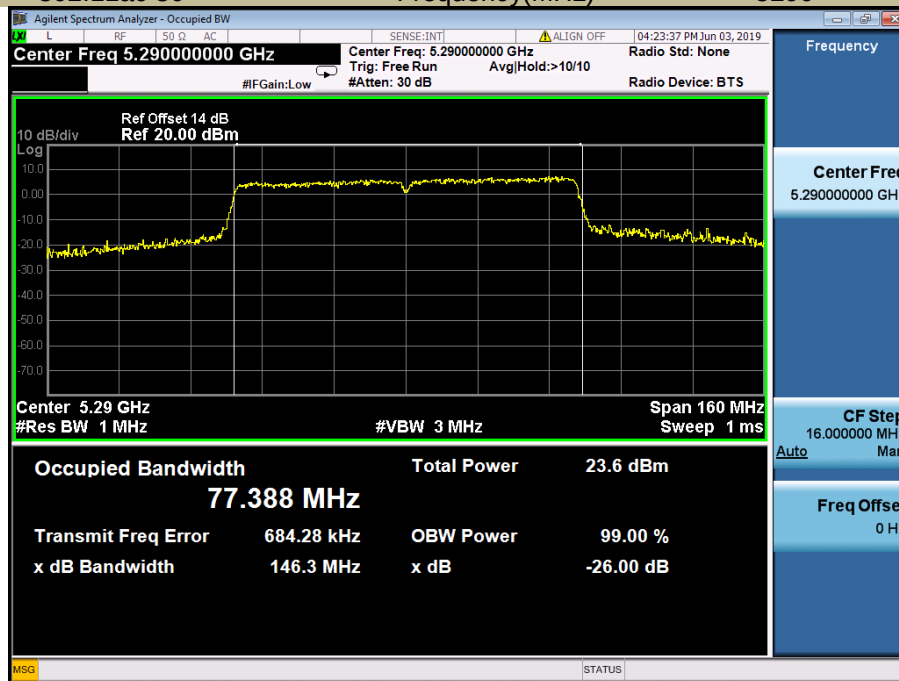


5725-5850MHz

Test Mode	Test Channel MHz		6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11a	CH149	5745	16.382	17.076	≥500
	CH157	5785	16.382	17.018	≥500
	CH165	5825	16.382	17.018	≥500
802.11n-HT20	CH149	5745	17.656	18.118	≥500
	CH157	5785	17.598	18.234	≥500
	CH165	5825	17.540	18.176	≥500
802.11ac(HT20)	CH149	5745	17.540	18.176	≥500
	CH157	5785	17.598	18.234	≥500
	CH165	5825	17.598	18.176	≥500
802.11n-HT40	CH151	5755	36.240	36.816	≥500
	CH159	5795	36.350	37.163	≥500
802.11ac(HT40)	CH151	5755	36.350	36.816	≥500
	CH159	5795	36.350	37.163	≥500
802.11ac(HT80)	CH155	5775	76.180	76.410	≥500

6db Emission Bandwidth
Test Model 802.11a

U-NII - 3
Frequency(MHz)

5745

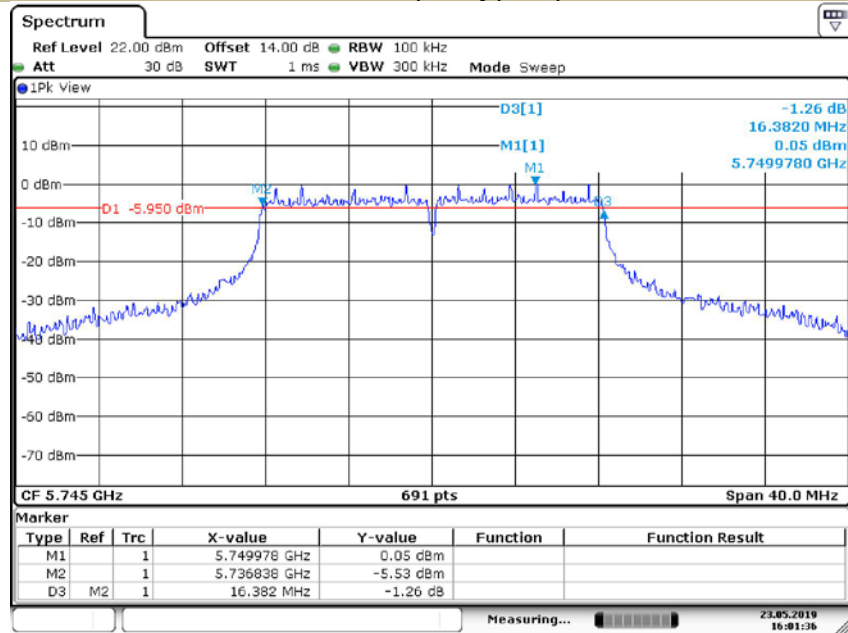


Date: 23.MAY.2019 16:01:35

6db Emission Bandwidth
Test Model 802.11a

U-NII - 3
Frequency(MHz)


5785

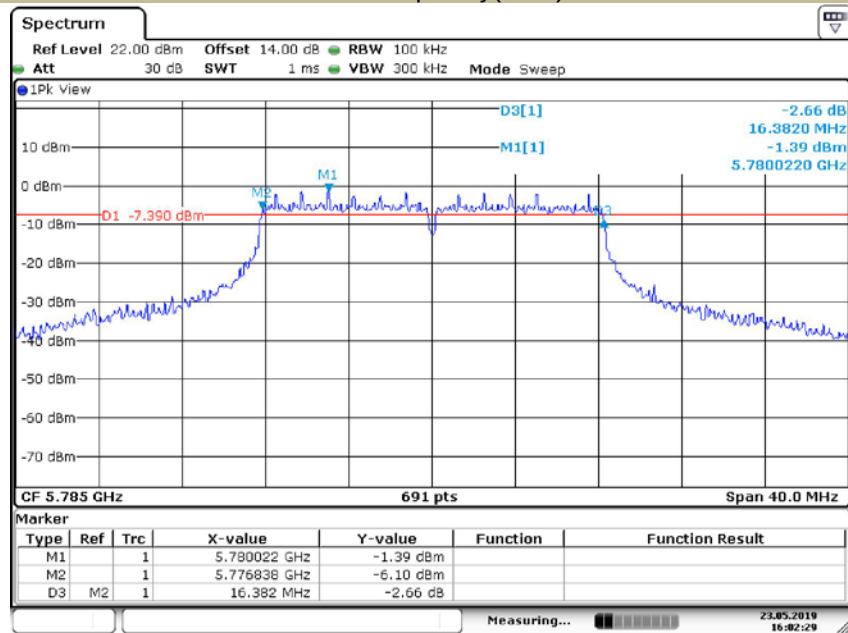

Date: 23.MAY.2019 16:02:29

6db Emission Bandwidth
Test Model 802.11a


U-NII - 3
Frequency(MHz) 5825

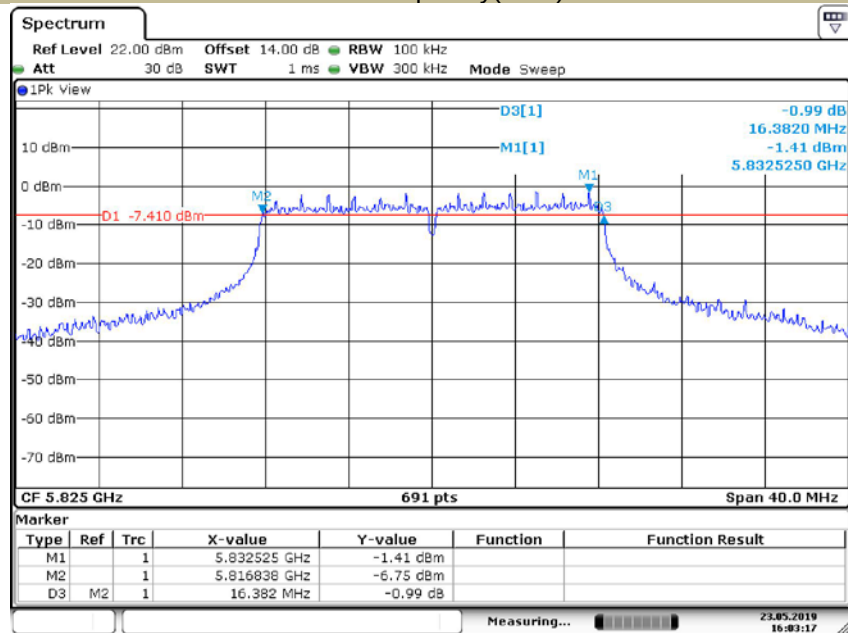

Date: 23.MAY.2019 16:03:17

6db Emission Bandwidth
Test Model 802.11n-HT20


U-NII - 3
Frequency(MHz) 5745

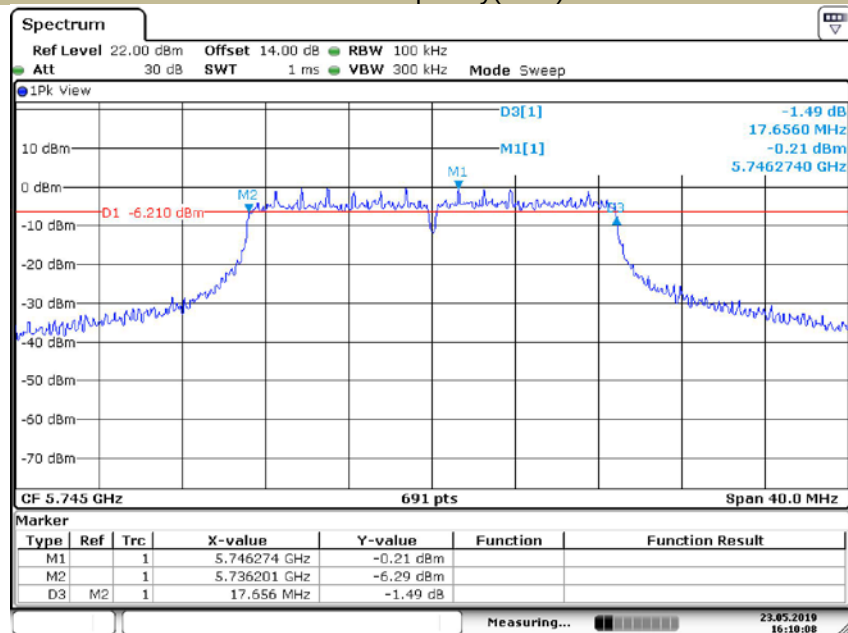

Date: 23.MAY.2019 16:10:07

6db Emission Bandwidth
Test Model 802.11n-HT20


U-NII - 3
Frequency(MHz) 5785

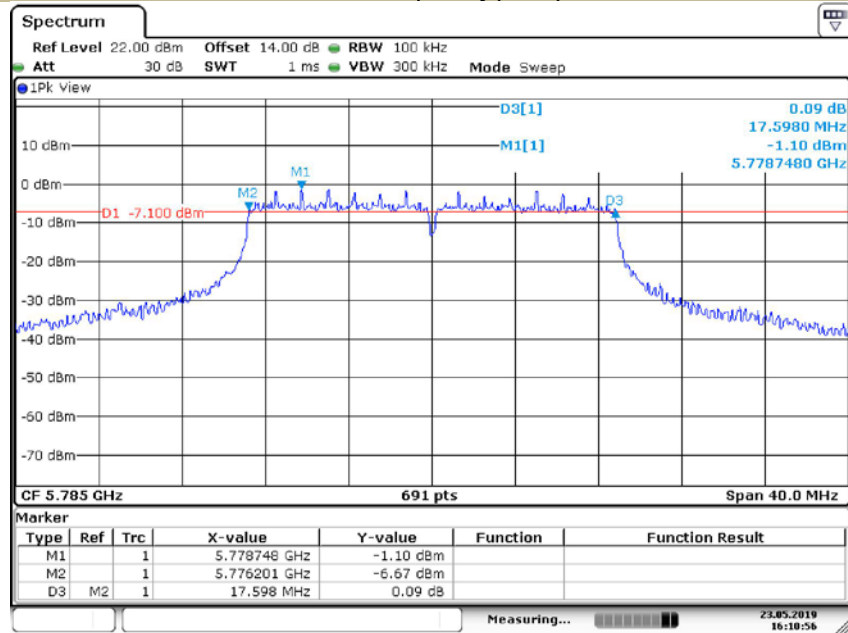

Date: 23.MAY.2019 16:10:56

6db Emission Bandwidth
Test Model 802.11n-HT20


U-NII - 3
Frequency(MHz) 5825

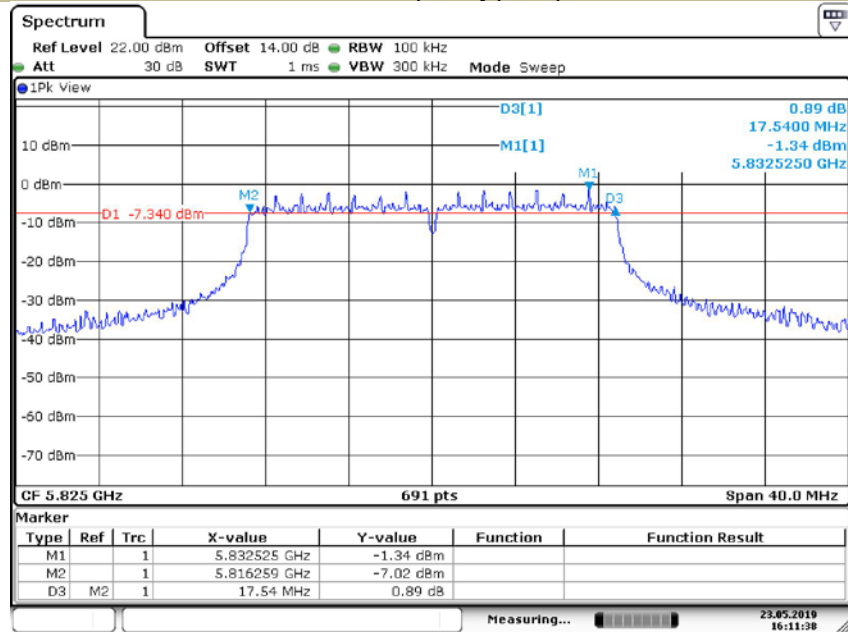

Date: 23.MAY.2019 16:11:38

6db Emission Bandwidth
Test Model 802.11ac(HT20)


U-NII - 3
Frequency(MHz) 5745

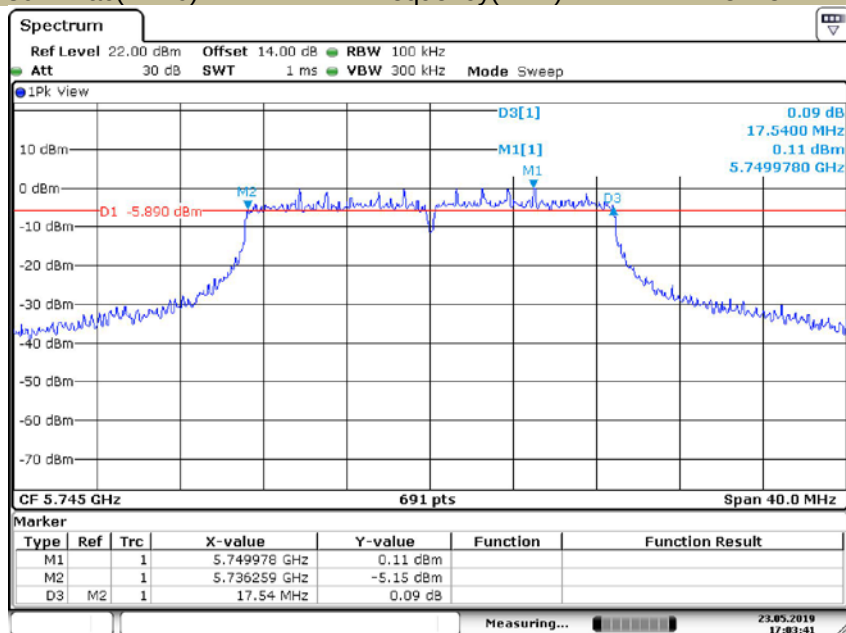

Date: 23.MAY.2019 17:03:41

6db Emission Bandwidth
Test Model 802.11ac(HT20)


U-NII - 3
Frequency(MHz) 5785

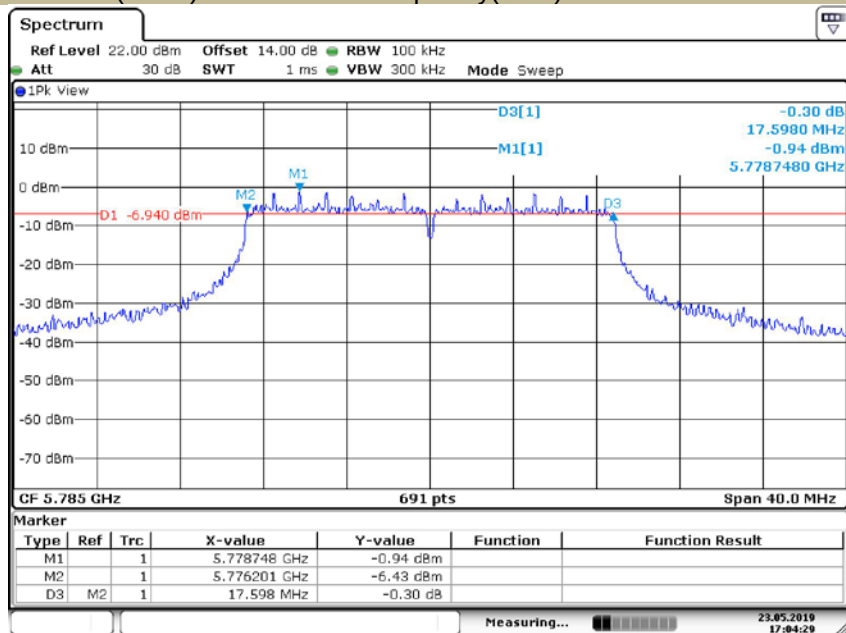

Date: 23.MAY.2019 17:04:29


6db Emission Bandwidth
Test Model 802.11ac(HT20)

U-NII - 3
Frequency(MHz) 5825

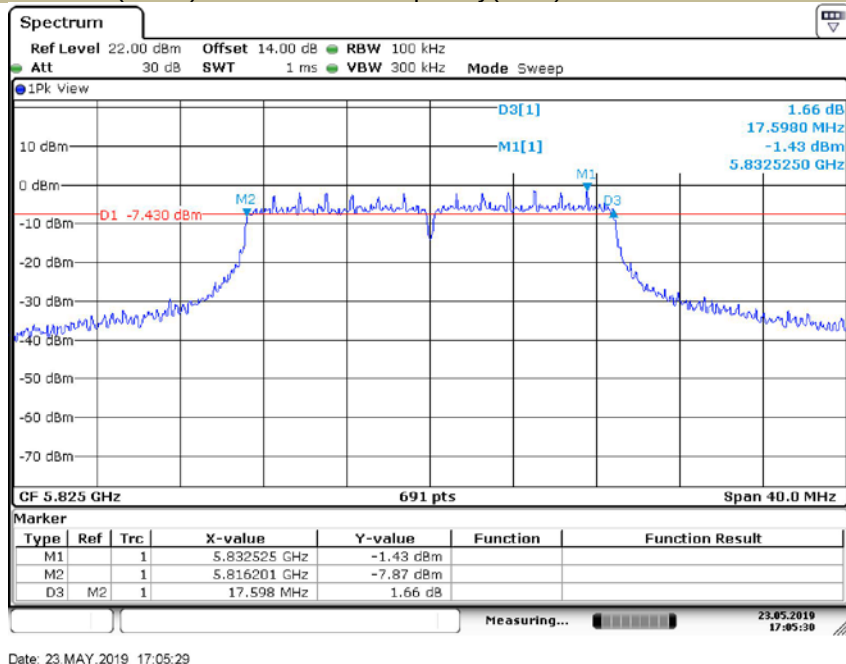


6db Emission Bandwidth
Test Model 802.11n-HT40

U-NII - 3
Frequency(MHz) 5755

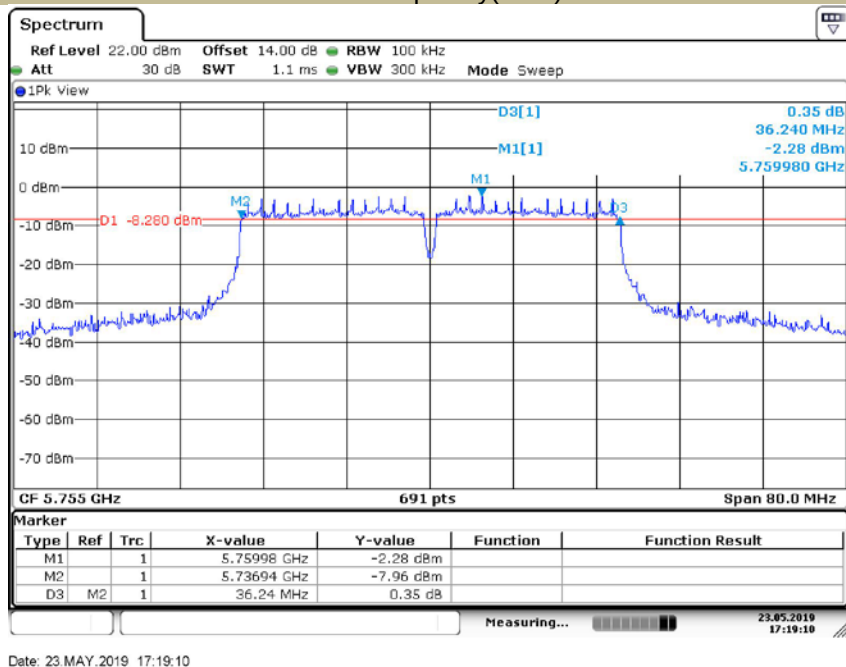

6db Emission Bandwidth
Test Model 802.11n-HT40


U-NII - 3
Frequency(MHz) 5795

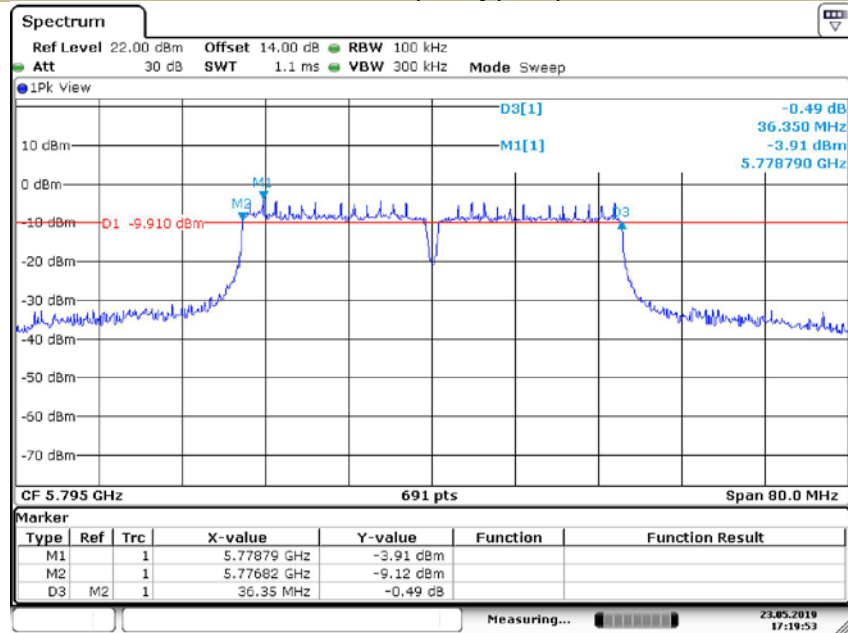

Date: 23.MAY.2019 17:19:54

6db Emission Bandwidth
Test Model 802.11ac(HT40)


U-NII - 3
Frequency(MHz) 5755

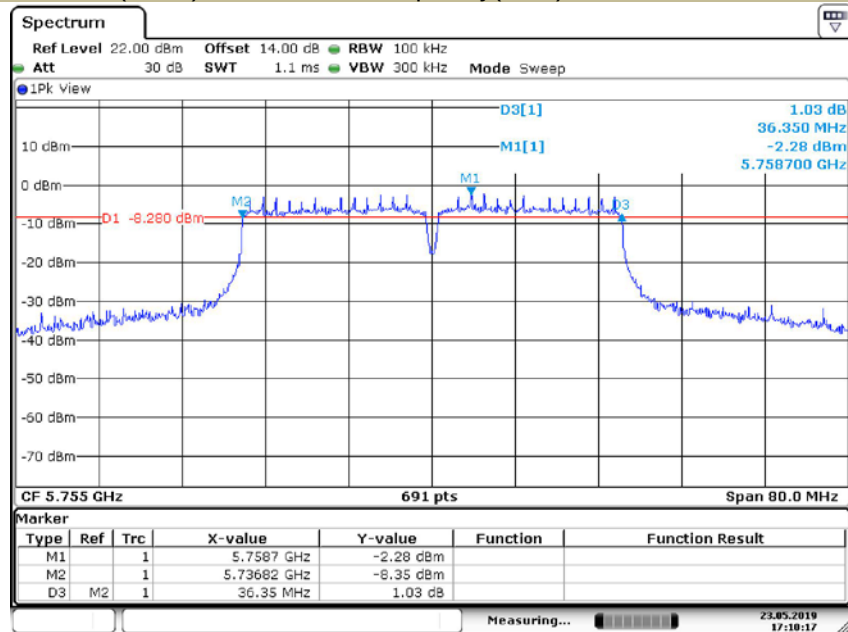

Date: 23.MAY.2019 17:10:18

6db Emission Bandwidth
Test Model 802.11ac(HT40)


U-NII - 3
Frequency(MHz) 5795

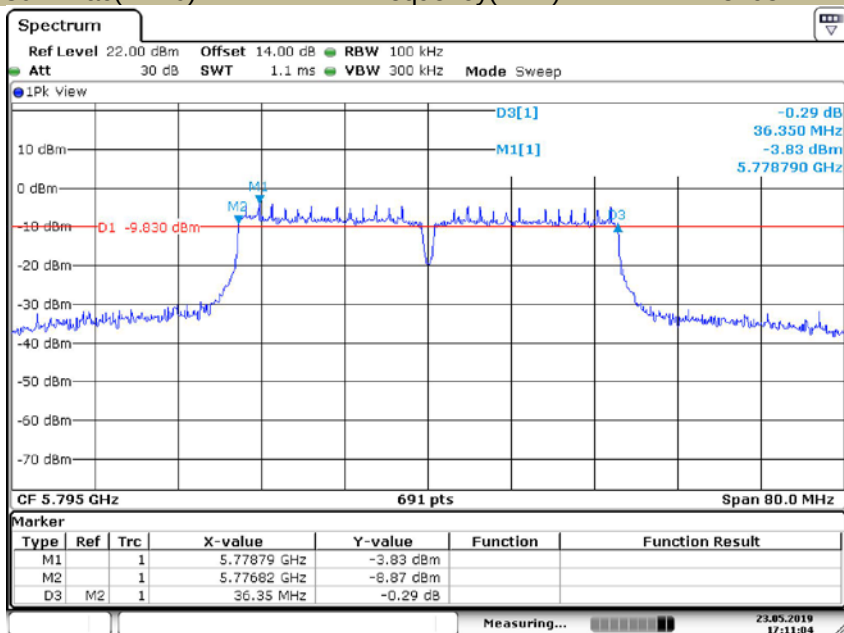

Date: 23.MAY.2019 17:11:04

6db Emission Bandwidth
Test Model 802.11ac 80

U-NII - 3
Frequency(MHz) 5775

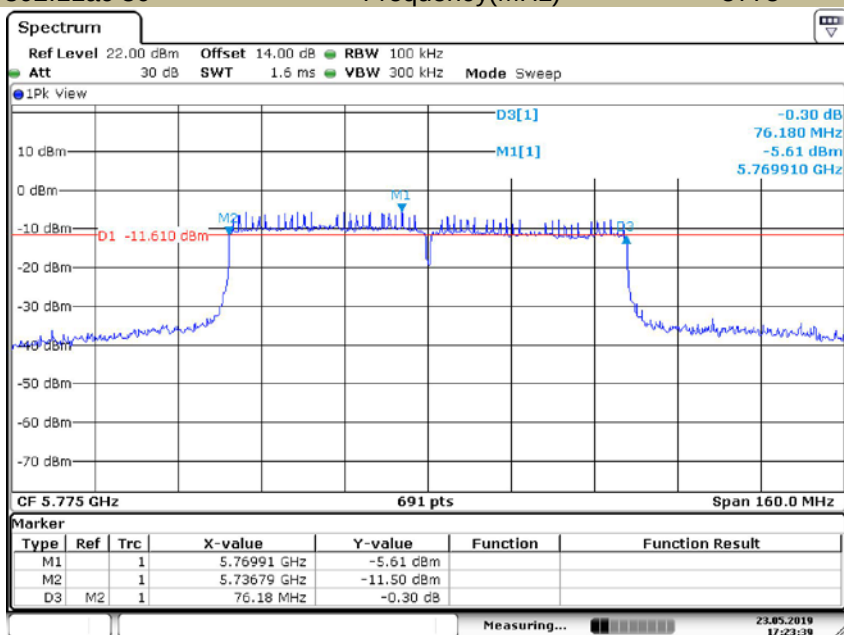


Date: 23.MAY.2019 17:23:39

99% Occupied Bandwidth
Test Model 802.11a

U-NII - 3
Frequency(MHz)

5745

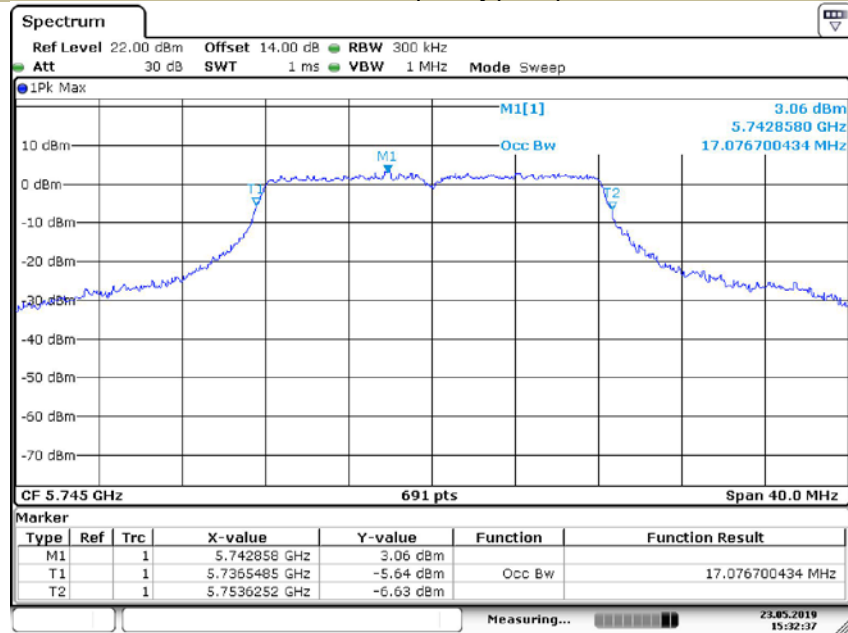


Date: 23.MAY.2019 15:32:38

99% Occupied Bandwidth
Test Model 802.11a

U-NII - 3
Frequency(MHz)

5785

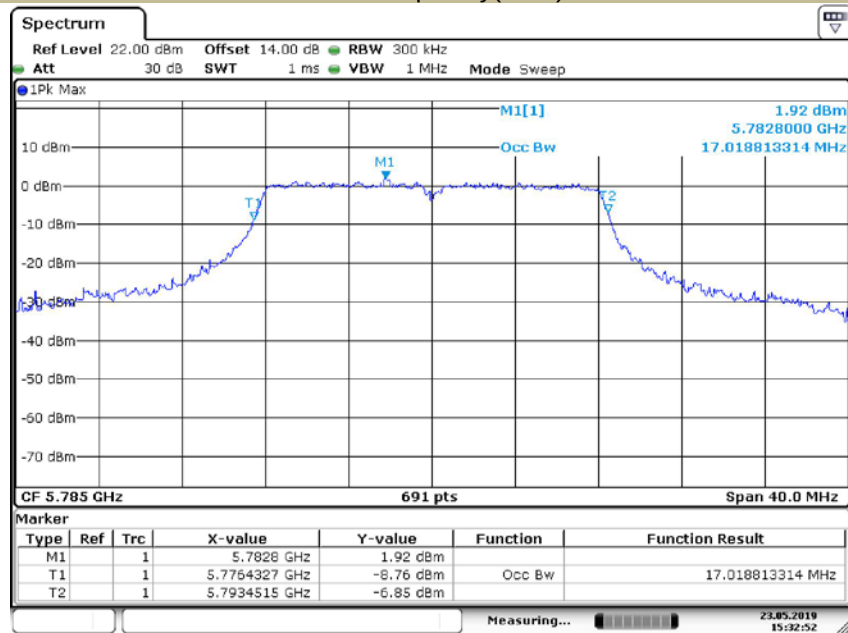

Date: 23.MAY.2019 15:32:51


99% Occupied Bandwidth

Test Model 802.11a

U-NII - 3

Frequency(MHz)

5825

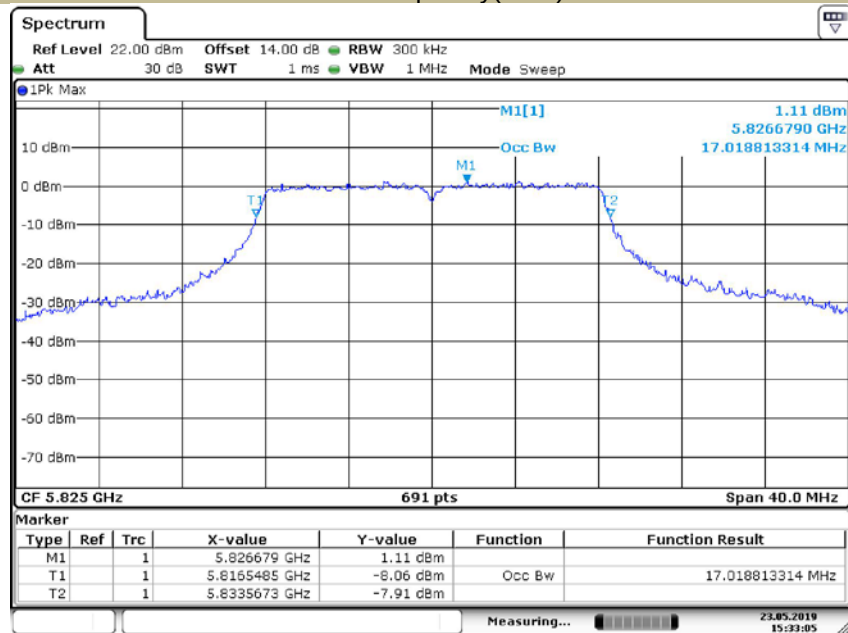

Date: 23.MAY.2019 15:33:05


99% Occupied Bandwidth

Test Model 802.11n-HT20

U-NII - 3

Frequency(MHz)


5745

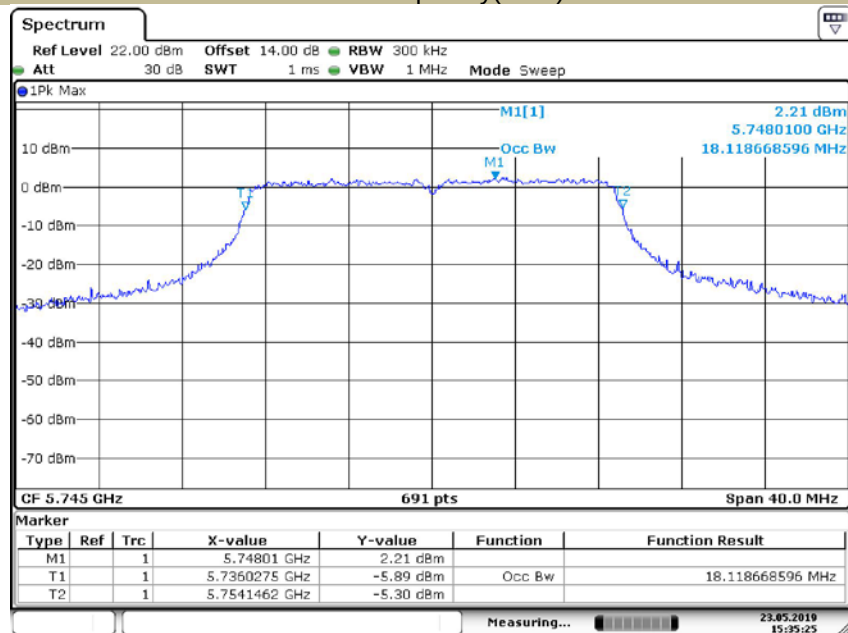

Date: 23.MAY.2019 15:35:25

99% Occupied Bandwidth
Test Model 802.11n-HT20


U-NII - 3
Frequency(MHz) 5785

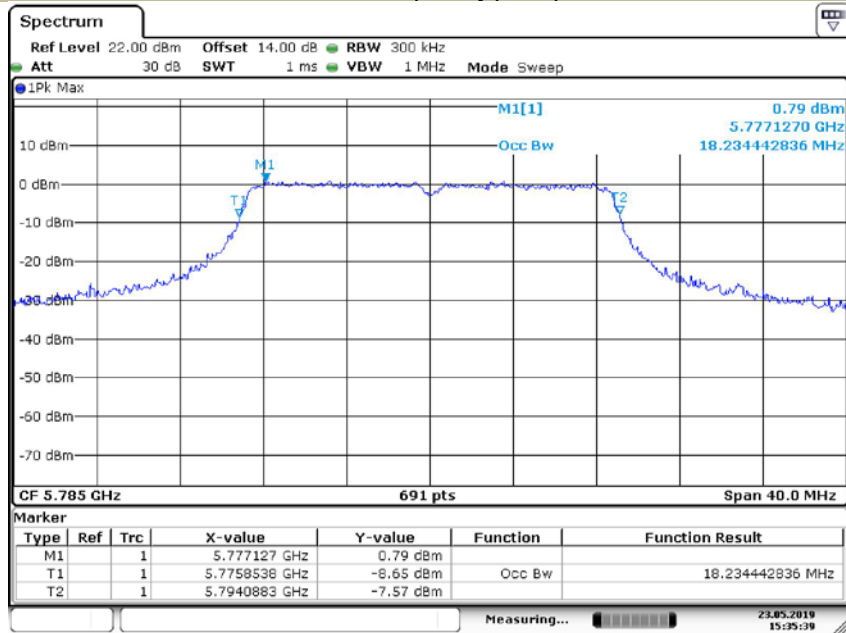

Date: 23.MAY.2019 15:35:39

99% Occupied Bandwidth
Test Model 802.11n-HT20


U-NII - 3
Frequency(MHz) 5825

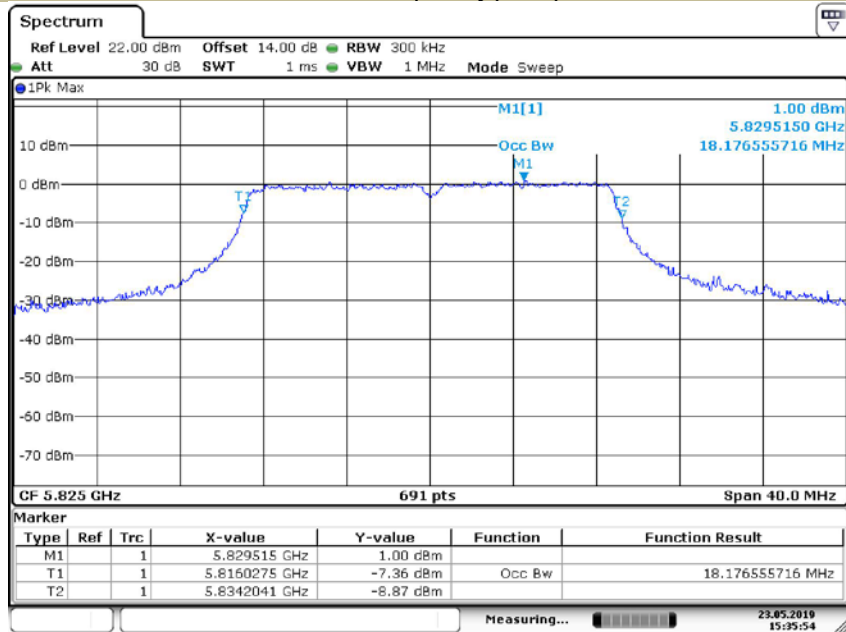

Date: 23.MAY.2019 15:35:54

99% Occupied Bandwidth
Test Model 802.11ac(HT20)


U-NII - 3
Frequency(MHz) 5745

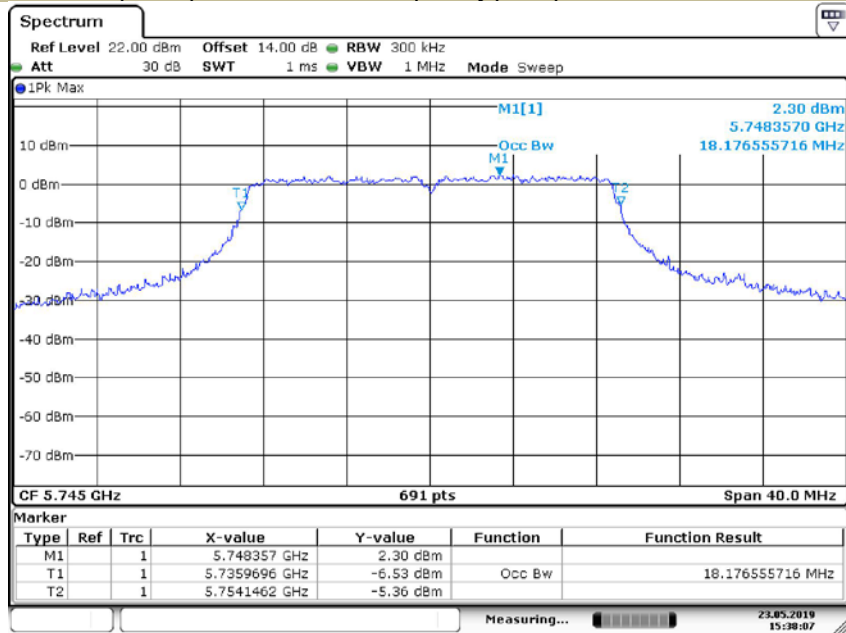

Date: 23.MAY.2019 15:38:07

99% Occupied Bandwidth
Test Model 802.11ac(HT20)


U-NII - 3
Frequency(MHz) 5785

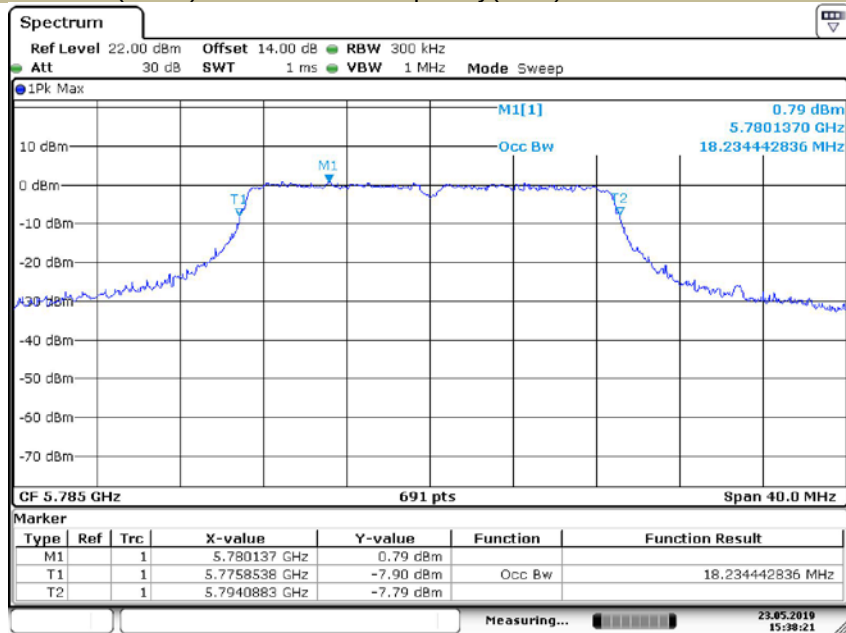

Date: 23.MAY.2019 15:38:21

99% Occupied Bandwidth
Test Model 802.11ac(HT20)


U-NII - 3
Frequency(MHz) 5825

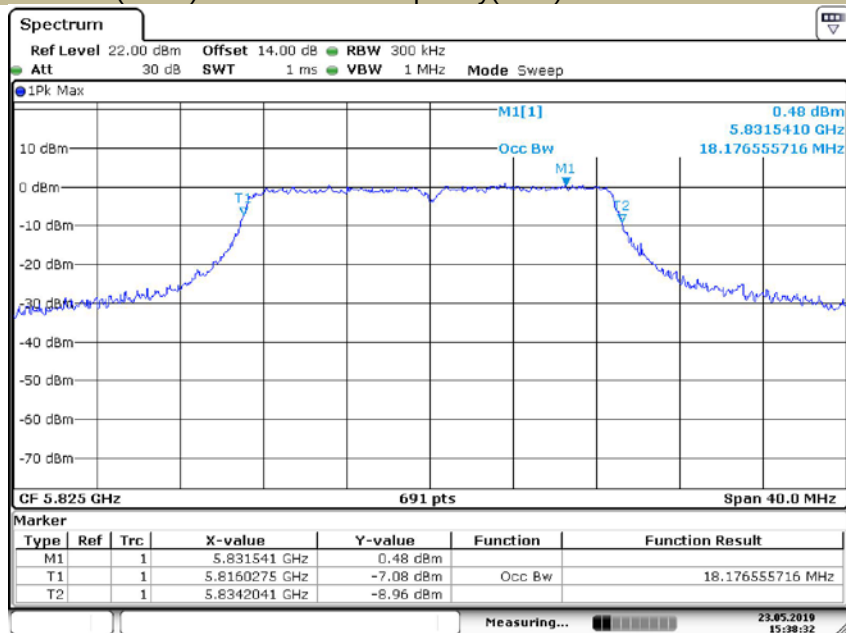

Date: 23.MAY.2019 15:38:33

99% Occupied Bandwidth
Test Model 802.11n-HT40


U-NII - 3
Frequency(MHz) 5755

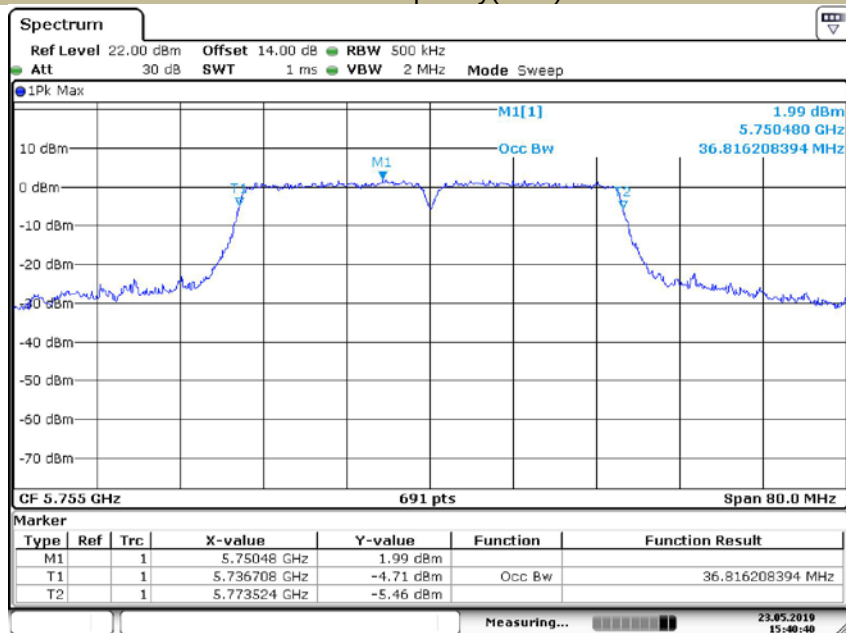

Date: 23.MAY.2019 15:40:40

99% Occupied Bandwidth
Test Model 802.11n-HT40


U-NII - 3
Frequency(MHz) 5795

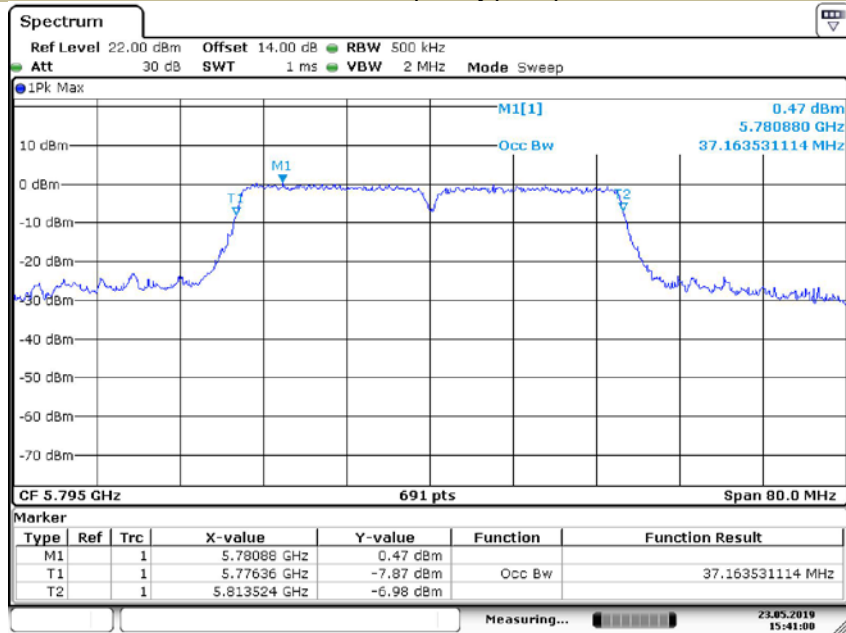

Date: 23.MAY.2019 15:40:59

99% Occupied Bandwidth
Test Model 802.11ac(HT40)


U-NII - 3
Frequency(MHz) 5755

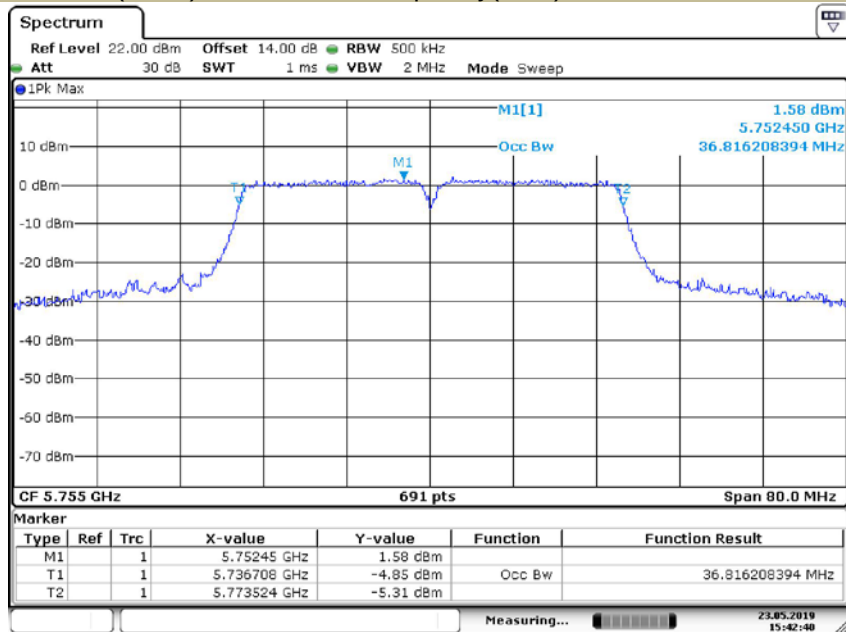

Date: 23.MAY.2019 15:42:40

99% Occupied Bandwidth
Test Model 802.11ac(HT40)


U-NII - 3
Frequency(MHz) 5795

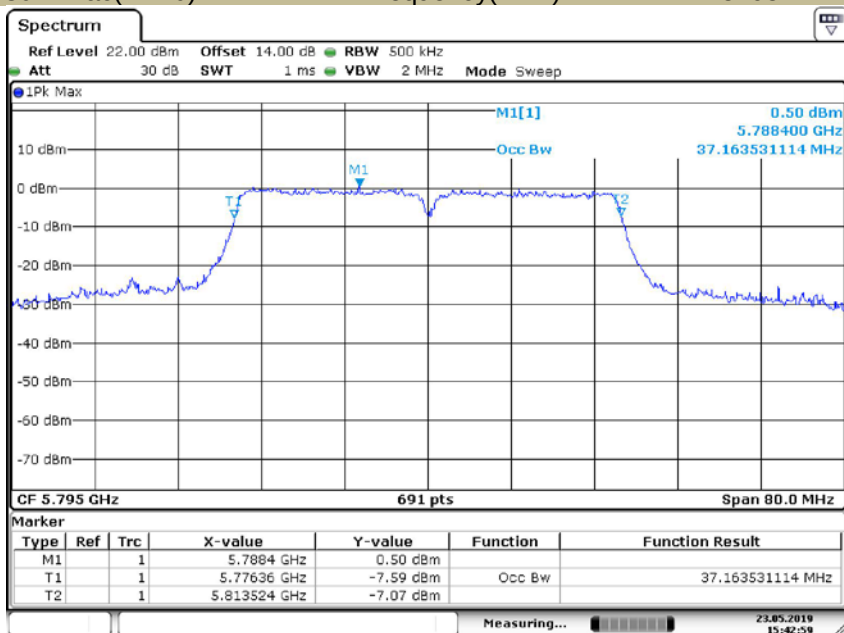

Date: 23.MAY.2019 15:42:59

99% Occupied Bandwidth
Test Model 802.11ac 80

U-NII - 3
Frequency(MHz) 5775

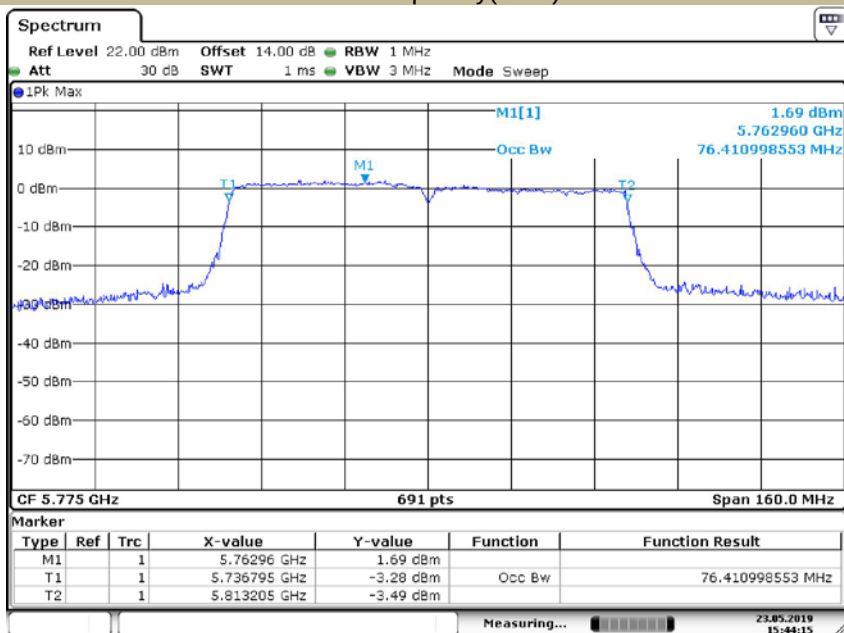

Date: 23.MAY.2019 15:44:15

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using

a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

For 1T1R-Antenna A

☒ 802.11a mode

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	13.31	24	Pass
	CH40	5200	14.23	24	Pass
	CH48	5240	14.69	24	Pass

☒ 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	13.38	24	Pass
	CH40	5200	14.04	24	Pass
	CH48	5240	14.61	24	Pass

☒ 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	13.24	24	Pass
	CH40	5200	14.12	24	Pass
	CH48	5240	14.63	24	Pass

☒ 802.11n-HT40

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	14.00	24	Pass
	CH46	5230	14.77	24	Pass

☒ 802.11 ac (HT40)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	14.01	24	Pass
	CH46	5230	14.80	24	Pass

☒ 802.11 ac (HT80)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH42	5210	13.64	24	Pass

☒ 802.11a mode

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	14.58	24	Pass
	CH56	5280	14.95	24	Pass
	CH64	5320	15.59	24	Pass

☒ 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	14.61	24	Pass
	CH56	5280	14.87	24	Pass
	CH64	5320	15.74	24	Pass

☒ 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	14.47	24	Pass
	CH56	5280	15.10	24	Pass
	CH64	5320	15.13	24	Pass

☒ 802.11n-HT40

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH54	5270	15.05	24	Pass
	CH62	5310	15.66	24	Pass

☒ 802.11 ac (HT40)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH54	5270	14.95	24	Pass
	CH62	5310	15.48	24	Pass

☒ 802.11 ac (HT80)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH58	5290	14.31	24	Pass

☒ 802.11a mode

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	11.29	30	Pass
	CH157	5785	9.69	30	Pass
	CH165	5825	9.27	30	Pass

☒ 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	11.28	30	Pass
	CH157	5785	9.70	30	Pass
	CH165	5825	9.28	30	Pass

☒ 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	11.27	30	Pass
	CH157	5785	9.72	30	Pass
	CH165	5825	9.27	30	Pass

☒ 802.11n-HT40

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH151	5755	11.27	30	Pass
	CH159	5795	9.34	30	Pass

☒ 802.11 ac (HT40)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH151	5755	11.29	30	Pass
	CH159	5795	9.33	30	Pass

☒ 802.11 ac (HT80)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH155	5775	9.71	30	Pass

For 1T1R-Antenna B

☒ 802.11a mode

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	15.30	24	Pass
	CH40	5200	15.13	24	Pass
	CH48	5240	16.12	24	Pass

☒ 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	14.41	24	Pass
	CH40	5200	15.93	24	Pass
	CH48	5240	16.18	24	Pass

☒ 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	15.11	24	Pass
	CH40	5200	15.80	24	Pass
	CH48	5240	16.02	24	Pass

☒ 802.11n-HT40

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	15.46	24	Pass
	CH46	5230	16.09	24	Pass

☒ 802.11 ac (HT40)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	15.38	24	Pass
	CH46	5230	15.87	24	Pass

☒ 802.11 ac (HT80)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH42	5210	14.74	24	Pass

☒ 802.11a mode

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	16.15	24	Pass
	CH56	5280	16.56	24	Pass
	CH64	5320	17.24	24	Pass

☒ 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	16.11	24	Pass
	CH56	5280	16.54	24	Pass
	CH64	5320	17.23	24	Pass

☒ 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	16.02	24	Pass
	CH56	5280	16.47	24	Pass
	CH64	5320	17.35	24	Pass

☒ 802.11n-HT40

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH54	5270	16.27	24	Pass
	CH62	5310	16.85	24	Pass

☒ 802.11 ac (HT40)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH54	5270	15.94	24	Pass
	CH62	5310	16.90	24	Pass

☒ 802.11 ac (HT80)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH58	5290	15.40	24	Pass

☒ 802.11a mode

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	13.72	30	Pass
	CH157	5785	12.23	30	Pass
	CH165	5825	12.09	30	Pass

☒ 802.11n-HT20

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	13.70	30	Pass
	CH157	5785	12.21	30	Pass
	CH165	5825	12.07	30	Pass

☒ 802.11 ac (HT20)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	13.74	30	Pass
	CH157	5785	12.20	30	Pass
	CH165	5825	12.06	30	Pass

☒ 802.11n-HT40

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH151	5755	13.85	30	Pass
	CH159	5795	11.98	30	Pass

☒ 802.11 ac (HT40)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH151	5755	13.87	30	Pass
	CH159	5795	11.97	30	Pass

☒ 802.11 ac (HT80)

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH155	5775	9.22	30	Pass

For 2T2R

☒ 802.11a mode-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	17.43	24	Pass
	CH40	5200	17.71	24	Pass
	CH48	5240	18.47	24	Pass

☒ 802.11n-HT20-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	16.94	24	Pass
	CH40	5200	18.10	24	Pass
	CH48	5240	18.48	24	Pass

☒ 802.11 ac (HT20) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH36	5180	17.29	24	Pass
	CH40	5200	18.05	24	Pass
	CH48	5240	18.39	24	Pass

☒ 802.11n-HT40-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	17.80	24	Pass
	CH46	5230	18.49	24	Pass

☒ 802.11 ac (HT40) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH38	5190	17.76	24	Pass
	CH46	5230	18.38	24	Pass

☒ 802.11 ac (HT80) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII - 1	CH42	5210	17.24	24	Pass

☒ 802.11a mode-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	18.45	24	Pass
	CH56	5280	18.84	24	Pass
	CH64	5320	19.50	24	Pass

☒ 802.11n-HT20-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	18.43	24	Pass
	CH56	5280	18.80	24	Pass
	CH64	5320	19.56	24	Pass

☒ 802.11 ac (HT20) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH52	5260	18.32	24	Pass
	CH56	5280	18.85	24	Pass
	CH64	5320	19.39	24	Pass

☒ 802.11n-HT40-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH54	5270	18.71	24	Pass
	CH62	5310	19.31	24	Pass

☒ 802.11 ac (HT40) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH54	5270	18.48	24	Pass
	CH62	5310	19.26	24	Pass

☒ 802.11 ac (HT80) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 2A	CH58	5290	17.90	24	Pass

☒ 802.11a mode-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	15.68	30	Pass
	CH157	5785	14.15	30	Pass
	CH165	5825	13.92	30	Pass

☒ 802.11n-HT20-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	15.67	30	Pass
	CH157	5785	14.14	30	Pass
	CH165	5825	13.91	30	Pass

☒ 802.11 ac (HT20) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH149	5745	15.69	30	Pass
	CH157	5785	14.14	30	Pass
	CH165	5825	13.90	30	Pass

☒ 802.11n-HT40-Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH151	5755	15.76	30	Pass
	CH159	5795	13.87	30	Pass

☒ 802.11 ac (HT40) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH151	5755	15.78	30	Pass
	CH159	5795	13.86	30	Pass

☒ 802.11 ac (HT80) -Total

Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)	Limit (dBm)	Verdict
U-NII – 3	CH155	5775	12.48	30	Pass

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections

5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.3.5 Test Results

For 1T1R-Antenna A

5150-5250MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	2.67	11
	5200	3.28	11
	5240	3.19	11
802.11n-HT20	5180	2.21	11
	5200	2.73	11
	5240	2.60	11
802.11ac(HT20)	5180	2.07	11
	5200	2.73	11
	5240	2.59	11
802.11n-HT40	5190	-0.08	11
	5230	-0.01	11
802.11ac(HT40)	5190	0.03	11
	5230	0.01	11
802.11ac(HT80)	5210	-3.03	11