


802.11a CH64

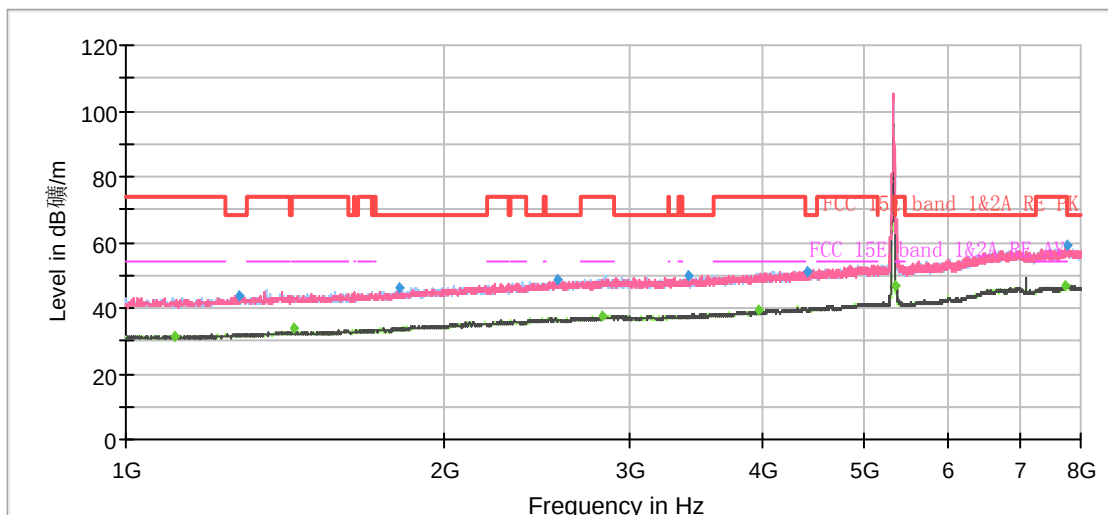


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1112.88	---	31.35	54.00	22.65	500.00	100.0	V	196.00	5
1278.25	43.89	---	68.20	24.31	500.00	100.0	V	79.00	6
1440.13	---	34.02	54.00	19.98	500.00	100.0	V	0.00	7
1812.00	46.33	---	68.20	21.87	500.00	100.0	H	354.00	9
2558.38	48.57	---	68.20	19.63	500.00	200.0	H	174.00	11
2820.88	---	37.53	54.00	16.47	500.00	100.0	H	351.00	11
3404.50	49.89	---	68.20	18.31	500.00	200.0	V	199.00	12
3962.75	---	39.14	54.00	14.86	500.00	100.0	V	187.00	13
4417.75	51.16	---	68.20	17.04	500.00	200.0	H	2.00	14
5350.50	---	46.51	54.00	7.49	500.00	200.0	V	0.00	15
7736.63	---	46.83	54.00	7.17	500.00	200.0	H	95.00	22
7775.13	58.87	---	68.20	9.33	500.00	200.0	V	350.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

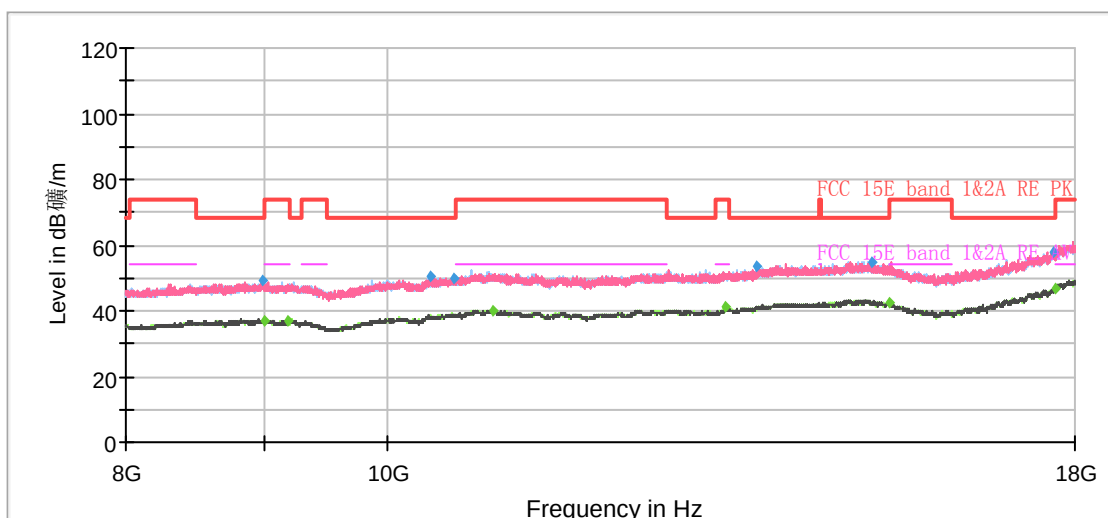


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8997.50	49.00	---	68.20	19.20	500.00	100.0	V	308.00	-2
9008.75	---	36.92	54.00	17.08	500.00	200.0	V	134.00	-2
9183.75	---	36.86	54.00	17.14	500.00	100.0	V	359.00	-2
10376.25	50.40	---	68.20	17.80	500.00	200.0	H	144.00	-1
10583.75	50.12	---	68.20	18.08	500.00	100.0	V	358.00	0
10951.25	---	40.23	54.00	13.77	500.00	100.0	H	101.00	0
13356.25	---	40.94	54.00	13.06	500.00	100.0	V	358.00	3
13715.00	53.39	---	68.20	14.81	500.00	200.0	H	324.00	4
15128.75	54.99	---	68.20	13.22	500.00	100.0	V	224.00	5
15352.50	---	42.58	54.00	11.42	500.00	100.0	H	87.00	4
17682.50	57.84	---	68.20	10.36	500.00	100.0	V	202.00	7
17711.25	---	46.82	54.00	7.18	500.00	100.0	V	194.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH100

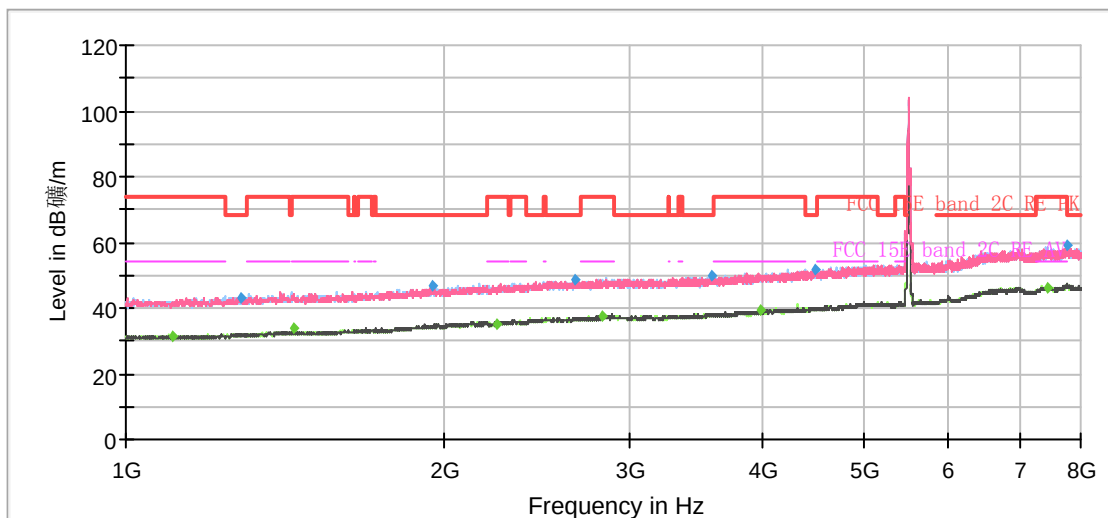


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1109.38	---	31.16	54.00	22.84	500.00	200.0	H	17.00	5
1284.38	43.32	---	68.20	24.88	500.00	200.0	V	0.00	6
1440.13	---	34.11	54.00	19.89	500.00	100.0	V	354.00	7
1951.13	46.63	---	68.20	21.57	500.00	200.0	H	39.00	9
2239.00	---	35.14	54.00	18.86	500.00	200.0	H	3.00	10
2662.50	48.73	---	68.20	19.47	500.00	200.0	V	5.00	11
2827.00	---	37.41	54.00	16.59	500.00	100.0	H	235.00	11
3580.38	49.92	---	68.20	18.28	500.00	200.0	V	84.00	12
3975.88	---	39.20	54.00	14.80	500.00	200.0	V	359.00	13
4482.50	51.41	---	68.20	16.79	500.00	100.0	H	316.00	14
7428.63	---	46.28	54.00	7.72	500.00	100.0	H	0.00	19
7776.88	58.83	---	68.20	9.37	500.00	200.0	V	147.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

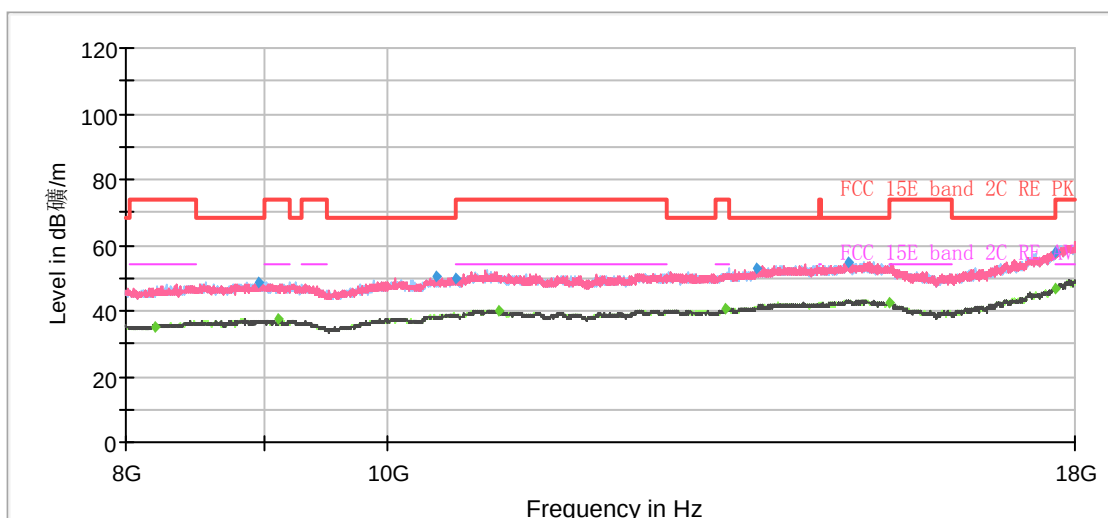


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8208.75	---	35.34	54.00	18.66	500.00	100.0	H	164.00	-3
8960.00	48.77	---	68.20	19.43	500.00	100.0	V	309.00	-2
9105.00	---	37.26	54.00	16.74	500.00	200.0	V	0.00	-2
10433.75	50.20	---	68.20	18.00	500.00	100.0	V	295.00	-1
10600.00	50.12	---	68.20	18.08	500.00	200.0	V	61.00	0
11000.00	---	40.29	54.00	13.71	500.00	100.0	V	0.00	0
13362.50	---	40.80	54.00	13.20	500.00	200.0	H	175.00	3
13716.25	52.64	---	68.20	15.56	500.00	100.0	H	10.00	4
14842.50	54.79	---	68.20	13.41	500.00	100.0	V	117.00	5
15362.50	---	42.59	54.00	11.41	500.00	200.0	H	354.00	4
17698.75	58.06	---	68.20	10.14	500.00	200.0	H	356.00	8
17716.25	---	46.80	54.00	7.20	500.00	100.0	H	7.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH104

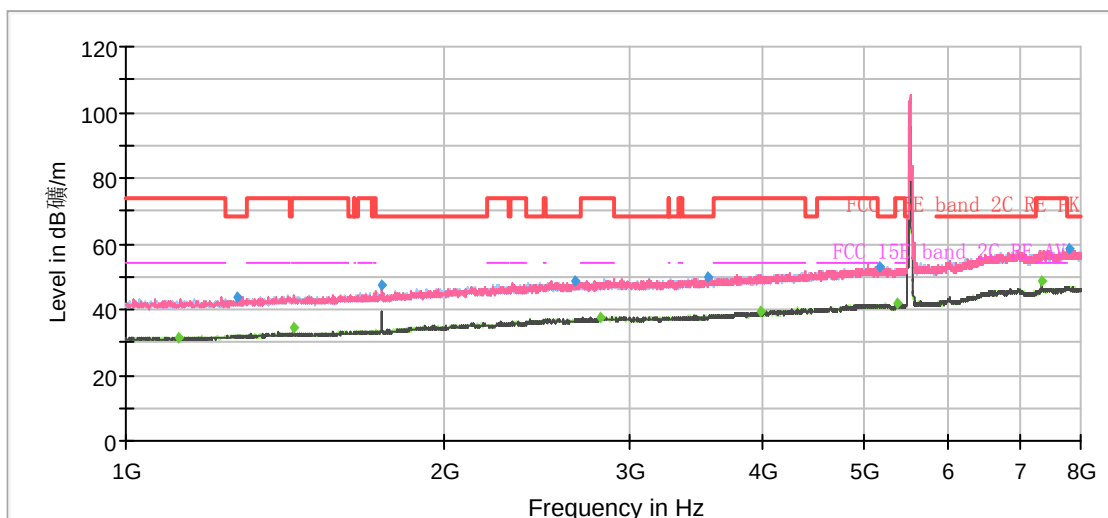


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1121.63	---	31.41	54.00	22.59	500.00	200.0	V	321.00	6
1276.50	43.83	---	68.20	24.37	500.00	200.0	H	148.00	6
1440.13	---	34.53	54.00	19.47	500.00	100.0	V	0.00	7
1746.38	47.37	---	68.20	20.83	500.00	200.0	V	166.00	8
2654.63	48.87	---	68.20	19.33	500.00	100.0	H	49.00	11
2812.13	---	37.73	54.00	16.27	500.00	200.0	V	245.00	11
3554.13	49.76	---	68.20	18.44	500.00	100.0	H	333.00	12
3982.88	---	39.19	54.00	14.81	500.00	100.0	H	181.00	13
5161.50	53.20	---	68.20	15.00	500.00	100.0	V	175.00	15
5367.13	---	41.86	54.00	12.14	500.00	200.0	V	121.00	15
7360.38	---	48.42	54.00	5.58	500.00	100.0	V	42.00	21
7800.50	58.63	---	68.20	9.57	500.00	200.0	V	157.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

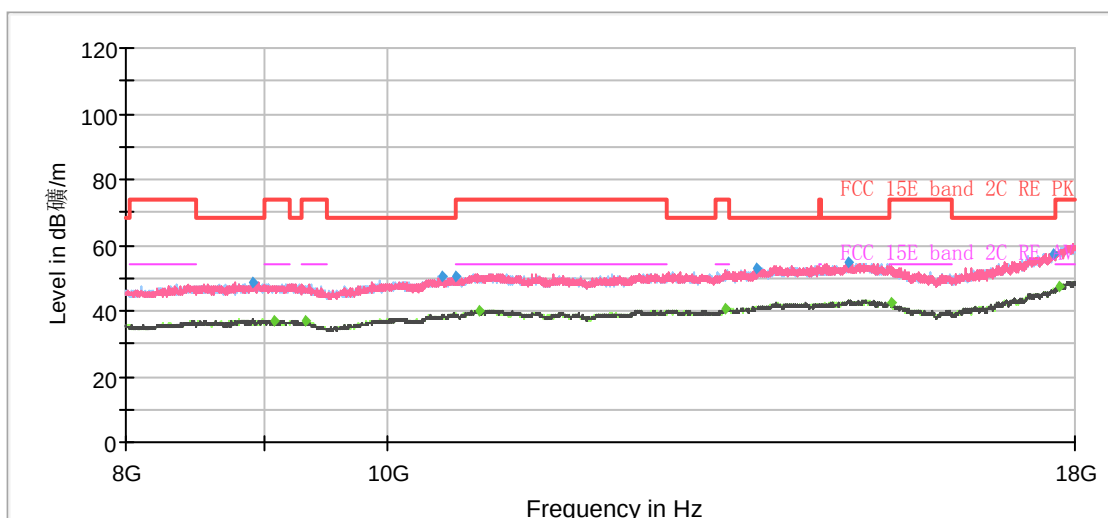


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8912.50	48.90	---	68.20	19.30	500.00	200.0	H	314.00	-3
9087.50	---	37.08	54.00	16.92	500.00	200.0	V	0.00	-2
9327.50	---	36.66	54.00	17.34	500.00	200.0	H	286.00	-2
10478.75	50.61	---	68.20	17.59	500.00	100.0	H	5.00	0
10598.75	50.22	---	68.20	17.98	500.00	200.0	V	244.00	0
10812.50	---	40.24	54.00	13.76	500.00	200.0	V	208.00	0
13357.50	---	40.84	54.00	13.16	500.00	100.0	V	138.00	3
13708.75	53.06	---	68.20	15.14	500.00	100.0	V	357.00	4
14823.75	54.63	---	68.20	13.57	500.00	200.0	H	342.00	5
15382.50	---	42.34	54.00	11.66	500.00	100.0	H	194.00	4
17668.75	57.41	---	68.20	10.79	500.00	200.0	H	358.00	7
17748.75	---	47.46	54.00	6.54	500.00	200.0	H	156.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH116

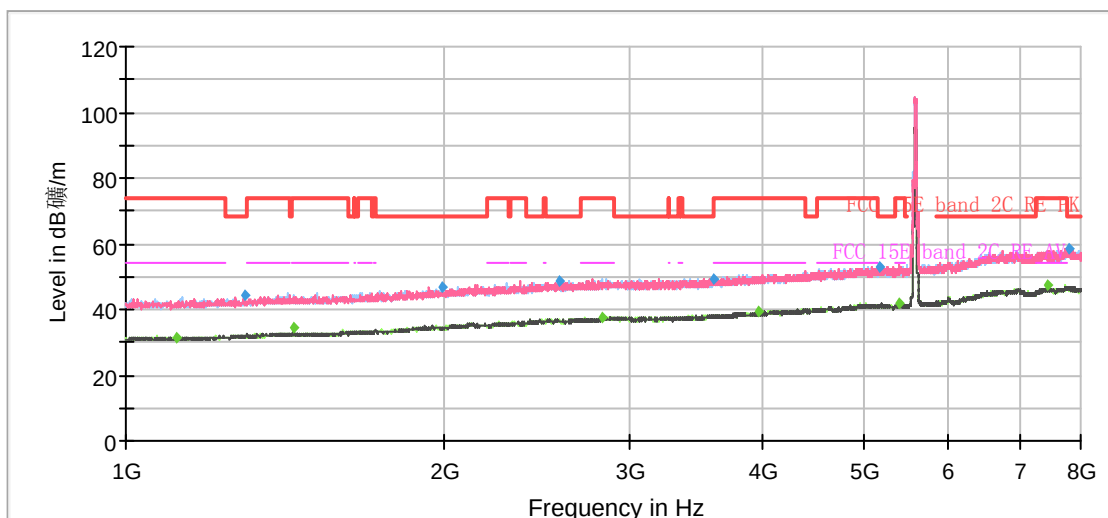


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1116.38	---	31.53	54.00	22.47	500.00	100.0	H	167.00	5
1295.75	44.02	---	68.20	24.18	500.00	200.0	H	0.00	6
1440.13	---	34.35	54.00	19.65	500.00	100.0	V	354.00	7
1994.88	46.75	---	68.20	21.45	500.00	100.0	H	345.00	9
2573.25	48.51	---	68.20	19.69	500.00	200.0	H	0.00	11
2817.38	---	37.47	54.00	16.53	500.00	200.0	H	8.00	11
3589.13	49.52	---	68.20	18.68	500.00	100.0	V	121.00	12
3966.25	---	39.22	54.00	14.78	500.00	100.0	V	40.00	13
5163.25	52.89	---	68.20	15.31	500.00	100.0	V	267.00	15
5378.50	---	41.83	54.00	12.17	500.00	100.0	H	325.00	15
7440.00	---	47.31	54.00	6.69	500.00	200.0	V	336.00	21
7810.13	58.20	---	68.20	10.00	500.00	100.0	V	49.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

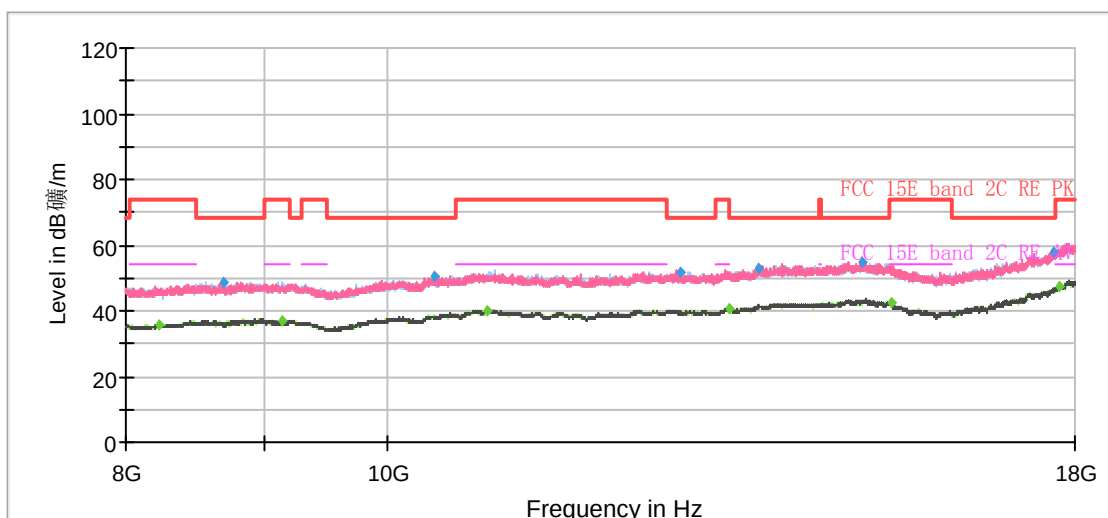


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8233.75	---	35.65	54.00	18.35	500.00	100.0	H	316.00	-3
8701.25	48.66	---	68.20	19.54	500.00	100.0	V	43.00	-3
9135.00	---	37.06	54.00	16.94	500.00	200.0	H	330.00	-2
10407.50	50.73	---	68.20	17.47	500.00	200.0	V	314.00	-1
10887.50	---	40.15	54.00	13.85	500.00	100.0	V	312.00	0
12856.25	51.61	---	68.20	16.59	500.00	100.0	H	211.00	2
13393.75	---	40.73	54.00	13.27	500.00	100.0	H	72.00	3
13728.75	52.92	---	68.20	15.28	500.00	200.0	V	146.00	4
15016.25	54.75	---	68.20	13.45	500.00	100.0	V	65.00	5
15396.25	---	42.52	54.00	11.48	500.00	100.0	H	86.00	4
17686.25	58.06	---	68.20	10.14	500.00	200.0	V	61.00	7
17748.75	---	47.41	54.00	6.59	500.00	200.0	H	244.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH136

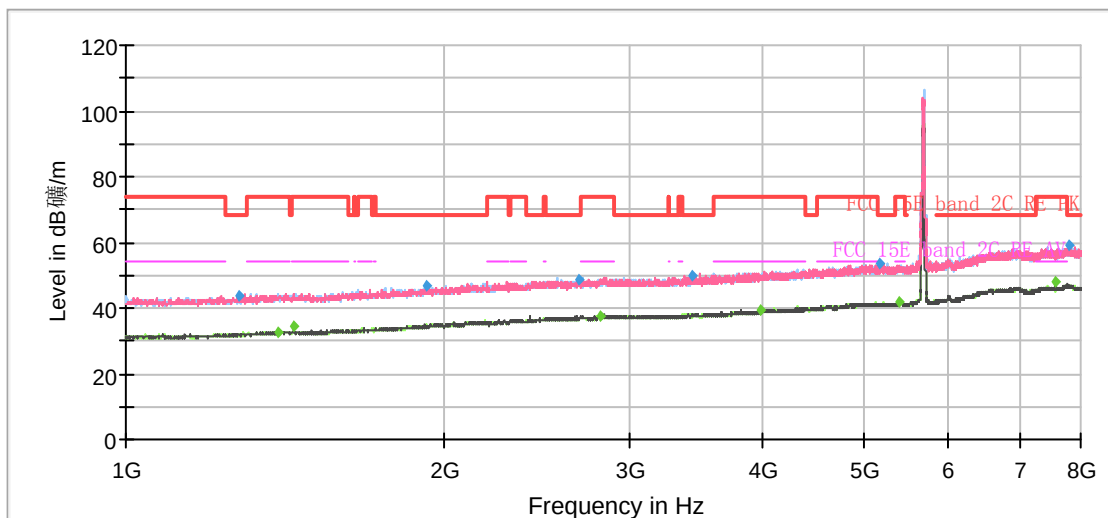


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1280.88	43.67	---	68.20	24.53	500.00	200.0	V	254.00	6
1393.75	---	32.89	54.00	21.11	500.00	100.0	H	358.00	7
1440.13	---	34.74	54.00	19.26	500.00	100.0	V	0.00	7
1923.13	46.59	---	68.20	21.61	500.00	200.0	V	0.00	9
2687.00	48.42	---	68.20	19.78	500.00	200.0	V	263.00	11
2806.00	---	37.43	54.00	16.57	500.00	200.0	V	192.00	11
3436.00	49.88	---	68.20	18.32	500.00	100.0	H	66.00	12
3989.00	---	39.08	54.00	14.92	500.00	100.0	H	331.00	13
5164.13	53.36	---	68.20	14.84	500.00	200.0	H	69.00	15
5380.25	---	42.12	54.00	11.88	500.00	100.0	V	69.00	15
7573.88	---	47.84	54.00	6.16	500.00	100.0	H	20.00	22
7814.50	59.14	---	68.20	9.06	500.00	100.0	H	1.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

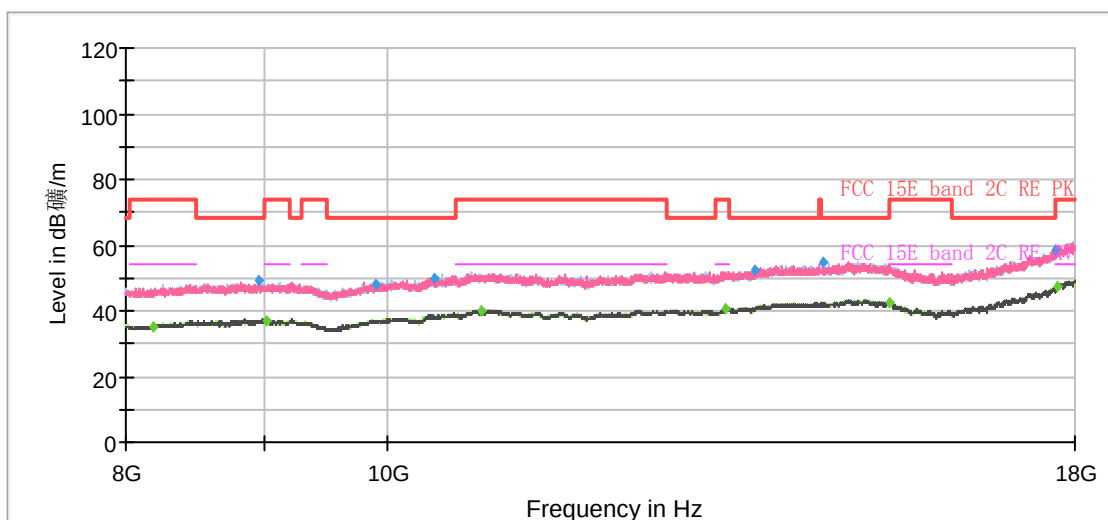


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8187.50	---	35.19	54.00	18.81	500.00	100.0	H	15.00	-3
8967.50	49.33	---	68.20	18.87	500.00	100.0	V	0.00	-2
9025.00	---	37.18	54.00	16.82	500.00	100.0	V	352.00	-2
9901.25	48.25	---	68.20	19.95	500.00	100.0	H	64.00	-1
10415.00	50.15	---	68.20	18.05	500.00	200.0	H	340.00	-1
10835.00	---	40.18	54.00	13.82	500.00	200.0	V	150.00	0
13362.50	---	40.72	54.00	13.28	500.00	100.0	H	78.00	3
13687.50	52.48	---	68.20	15.72	500.00	200.0	V	8.00	3
14523.75	54.67	---	68.20	13.53	500.00	200.0	H	261.00	5
15351.25	---	42.61	54.00	11.39	500.00	200.0	V	158.00	4
17690.00	58.26	---	68.20	9.94	500.00	100.0	H	325.00	7
17742.50	---	47.36	54.00	6.64	500.00	200.0	H	0.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH140

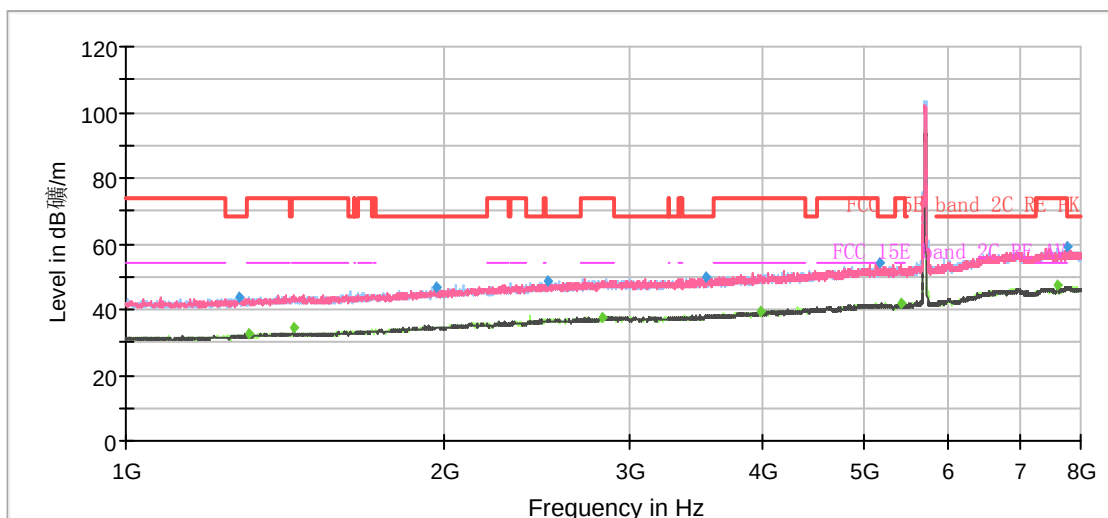


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1279.13	43.71	---	68.20	24.49	500.00	100.0	V	25.00	6
1308.00	---	32.80	54.00	21.20	500.00	100.0	H	276.00	6
1440.13	---	34.63	54.00	19.37	500.00	100.0	V	2.00	7
1965.13	46.66	---	68.20	21.54	500.00	100.0	H	347.00	9
2505.00	48.49	---	68.20	19.71	500.00	100.0	H	52.00	11
2821.75	---	37.45	54.00	16.55	500.00	100.0	V	140.00	11
3541.00	49.64	---	68.20	18.56	500.00	200.0	H	238.00	12
3982.00	---	39.35	54.00	14.65	500.00	100.0	H	359.00	13
5162.38	53.90	---	68.20	14.30	500.00	200.0	V	128.00	15
5399.50	---	41.84	54.00	12.16	500.00	200.0	V	348.00	15
7600.13	---	47.12	54.00	6.88	500.00	100.0	H	21.00	22
7762.88	58.93	---	68.20	9.27	500.00	200.0	H	167.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

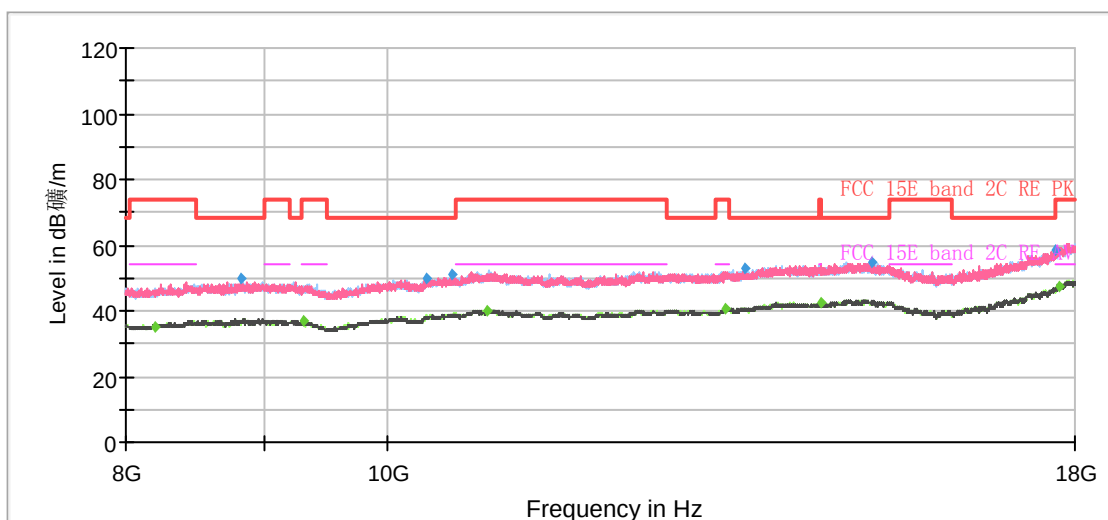


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8201.25	---	35.29	54.00	18.71	500.00	200.0	V	44.00	-3
8833.75	49.65	---	68.20	18.55	500.00	200.0	V	161.00	-3
9312.50	---	36.70	54.00	17.30	500.00	100.0	H	86.00	-2
10343.75	49.93	---	68.20	18.27	500.00	100.0	V	355.00	0
10572.50	50.90	---	68.20	17.30	500.00	100.0	H	333.00	0
10901.25	---	40.29	54.00	13.71	500.00	200.0	V	248.00	0
13361.25	---	40.87	54.00	13.13	500.00	200.0	V	44.00	3
13586.25	52.66	---	68.20	15.54	500.00	100.0	V	275.00	3
14491.25	---	42.47	54.00	11.53	500.00	100.0	V	136.00	5
15120.00	54.56	---	68.20	13.64	500.00	100.0	V	332.00	5
17697.50	58.25	---	68.20	9.95	500.00	200.0	H	276.00	8
17747.50	---	47.39	54.00	6.61	500.00	100.0	H	30.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH144

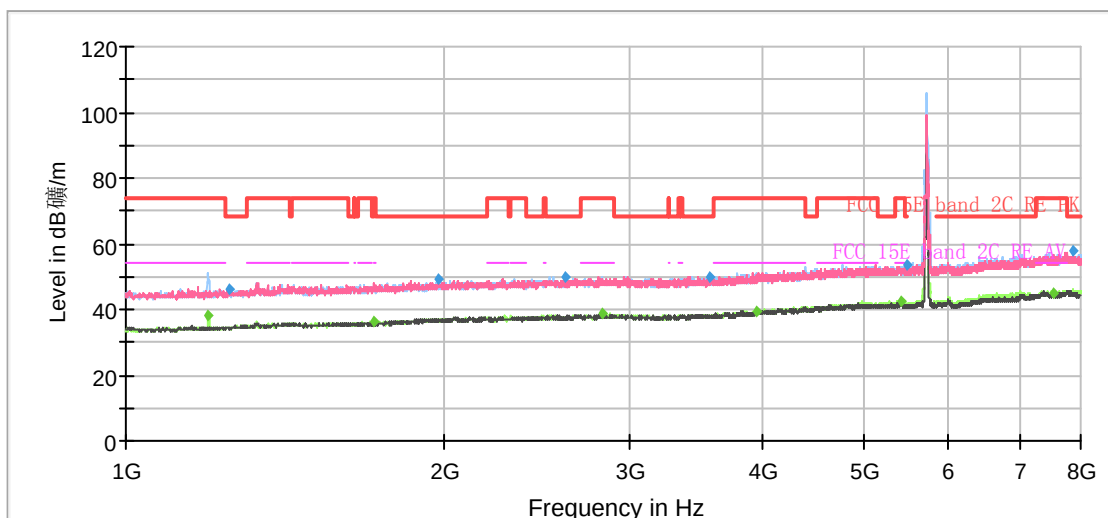


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1196.88	---	38.11	54.00	15.89	500.00	200.0	H	103.00	-9
1254.63	46.15	---	68.20	22.05	500.00	200.0	V	10.00	-8
1719.25	---	36.32	54.00	17.68	500.00	200.0	V	250.00	-6
1976.50	49.14	---	68.20	19.06	500.00	200.0	H	185.00	-5
2608.25	49.69	---	68.20	18.51	500.00	100.0	H	1.00	-4
2822.63	---	38.64	54.00	15.36	500.00	200.0	V	127.00	-3
3562.88	49.97	---	68.20	18.23	500.00	200.0	H	281.00	-3
3942.63	---	39.63	54.00	14.37	500.00	100.0	H	10.00	-2
5399.50	---	42.33	54.00	11.67	500.00	100.0	H	0.00	3
5467.75	53.63	---	68.20	14.57	500.00	100.0	H	0.00	3
7533.63	---	45.23	54.00	8.77	500.00	100.0	H	1.00	7
7853.88	57.70	---	68.20	10.50	500.00	100.0	V	282.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

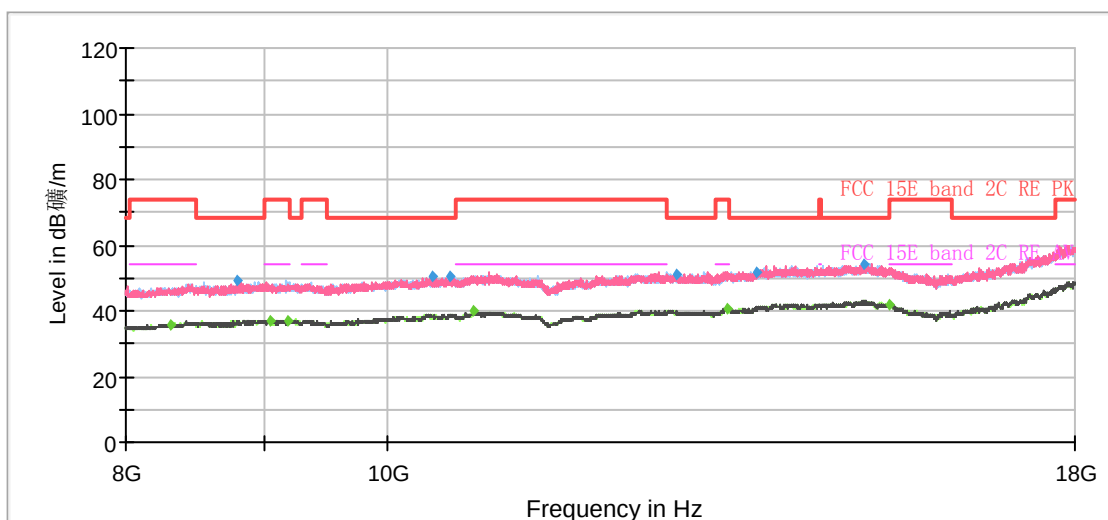


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8312.50	---	35.92	54.00	18.08	500.00	200.0	H	49.00	-3
8800.00	49.07	---	68.20	19.13	500.00	200.0	V	181.00	-3
9055.00	---	37.18	54.00	16.82	500.00	200.0	H	358.00	-2
9186.25	---	37.04	54.00	16.96	500.00	100.0	V	297.00	-2
10403.75	50.34	---	68.20	17.86	500.00	100.0	H	12.00	-1
10552.50	50.59	---	68.20	17.61	500.00	100.0	H	26.00	0
10772.50	---	39.73	54.00	14.27	500.00	100.0	V	206.00	0
12801.25	51.08	---	68.20	17.12	500.00	200.0	H	272.00	2
13385.00	---	40.77	54.00	13.23	500.00	200.0	V	2.00	3
13702.50	51.95	---	68.20	16.25	500.00	200.0	V	4.00	4
15031.25	54.24	---	68.20	13.96	500.00	200.0	H	257.00	5
15351.25	---	42.14	54.00	11.86	500.00	100.0	V	340.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH149

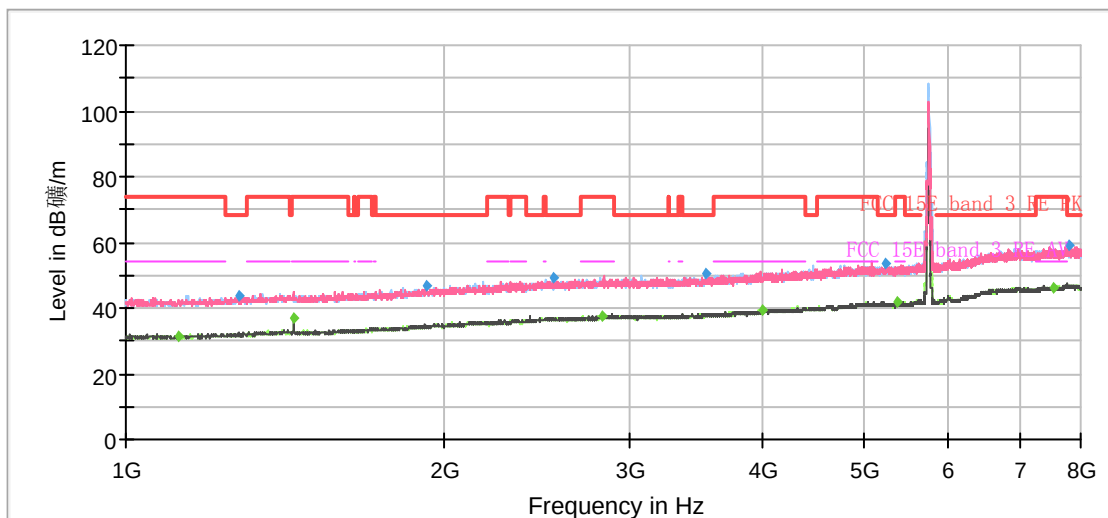


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1121.63	---	31.39	54.00	22.61	500.00	200.0	V	314.00	6
1280.00	43.89	---	68.20	24.31	500.00	100.0	H	0.00	6
1440.13	---	36.89	54.00	17.11	500.00	100.0	V	52.00	7
1926.63	46.63	---	68.20	21.57	500.00	100.0	V	157.00	9
2538.25	49.33	---	68.20	18.87	500.00	100.0	V	104.00	11
2824.38	---	37.77	54.00	16.23	500.00	200.0	V	30.00	11
3538.38	50.42	---	68.20	17.78	500.00	200.0	H	0.00	12
3997.75	---	39.29	54.00	14.71	500.00	100.0	H	328.00	13
5238.50	53.60	---	68.20	14.60	500.00	100.0	V	0.00	15
5375.00	---	41.84	54.00	12.16	500.00	100.0	H	249.00	15
7535.38	---	46.44	54.00	7.56	500.00	100.0	V	86.00	20
7797.00	58.84	---	68.20	9.36	500.00	100.0	H	214.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

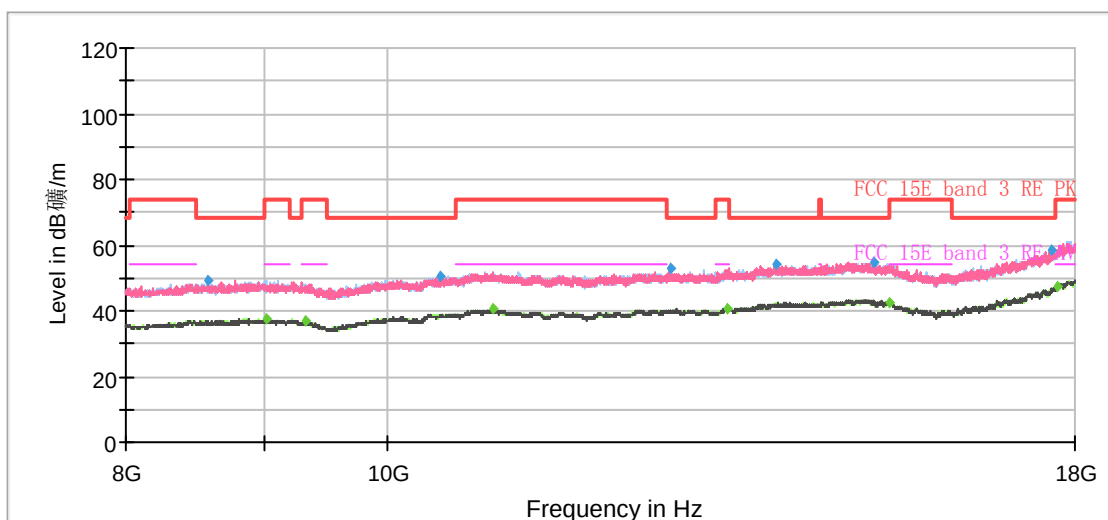


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8582.50	48.99	---	68.20	19.21	500.00	200.0	V	207.00	-3
9026.25	---	37.31	54.00	16.69	500.00	200.0	H	6.00	-2
9327.50	---	36.74	54.00	17.26	500.00	100.0	V	334.00	-2
10471.25	50.46	---	68.20	17.74	500.00	200.0	H	224.00	0
10948.75	---	40.47	54.00	13.53	500.00	100.0	V	169.00	0
12751.25	52.83	---	68.20	15.37	500.00	100.0	H	70.00	3
13381.25	---	40.76	54.00	13.24	500.00	200.0	V	124.00	3
13950.00	53.99	---	68.20	14.21	500.00	100.0	V	176.00	5
15162.50	54.54	---	68.20	13.66	500.00	200.0	V	309.00	5
15350.00	---	42.69	54.00	11.31	500.00	100.0	V	359.00	4
17638.75	58.43	---	68.20	9.77	500.00	100.0	V	299.00	7
17726.25	---	47.52	54.00	6.48	500.00	200.0	H	87.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

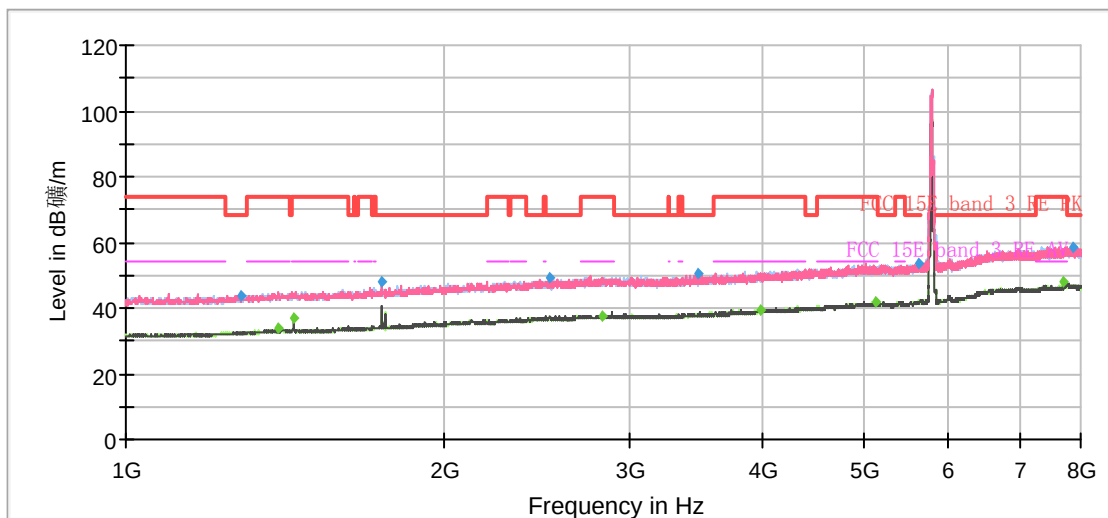


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1284.38	43.74	---	68.20	24.46	500.00	100.0	H	295.00	6
1394.63	---	33.63	54.00	20.37	500.00	100.0	V	45.00	7
1440.13	---	37.12	54.00	16.88	500.00	200.0	V	287.00	7
1746.38	47.83	---	68.20	20.37	500.00	200.0	V	140.00	8
2518.13	49.08	---	68.20	19.12	500.00	100.0	H	359.00	11
2827.88	---	37.80	54.00	16.20	500.00	200.0	V	294.00	11
3478.88	50.16	---	68.20	18.04	500.00	200.0	V	224.00	12
3975.88	---	39.36	54.00	14.64	500.00	100.0	H	302.00	13
5122.13	---	41.86	54.00	12.14	500.00	200.0	H	96.00	15
5622.63	53.70	---	68.20	14.50	500.00	100.0	V	175.00	16
7713.88	---	48.25	54.00	5.75	500.00	200.0	H	298.00	22
7861.75	58.46	---	68.20	9.74	500.00	100.0	V	0.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

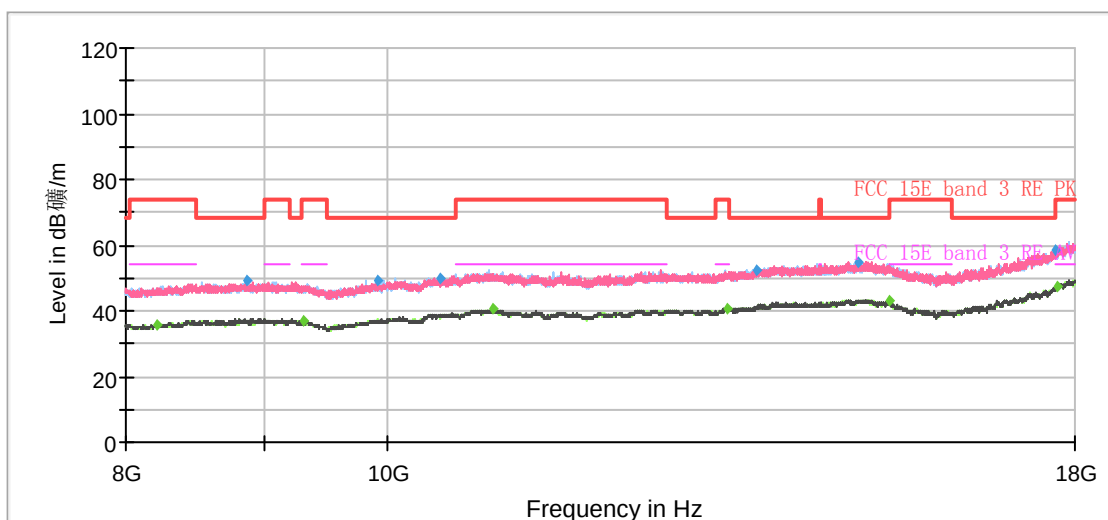


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8215.00	---	35.44	54.00	18.56	500.00	200.0	H	269.00	-3
8868.75	49.01	---	68.20	19.19	500.00	200.0	V	18.00	-3
9312.50	---	36.97	54.00	17.03	500.00	200.0	H	341.00	-2
9913.75	49.38	---	68.20	18.82	500.00	200.0	V	69.00	-1
10472.50	50.07	---	68.20	18.13	500.00	200.0	H	346.00	0
10952.50	---	40.54	54.00	13.46	500.00	100.0	V	0.00	0
13372.50	---	40.87	54.00	13.13	500.00	100.0	H	0.00	3
13711.25	52.56	---	68.20	15.64	500.00	100.0	H	46.00	4
14947.50	54.68	---	68.20	13.52	500.00	100.0	V	358.00	5
15350.00	---	43.29	54.00	10.71	500.00	100.0	H	31.00	4
17688.75	58.59	---	68.20	9.61	500.00	200.0	H	312.00	7
17743.75	---	47.28	54.00	6.72	500.00	200.0	H	327.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH165

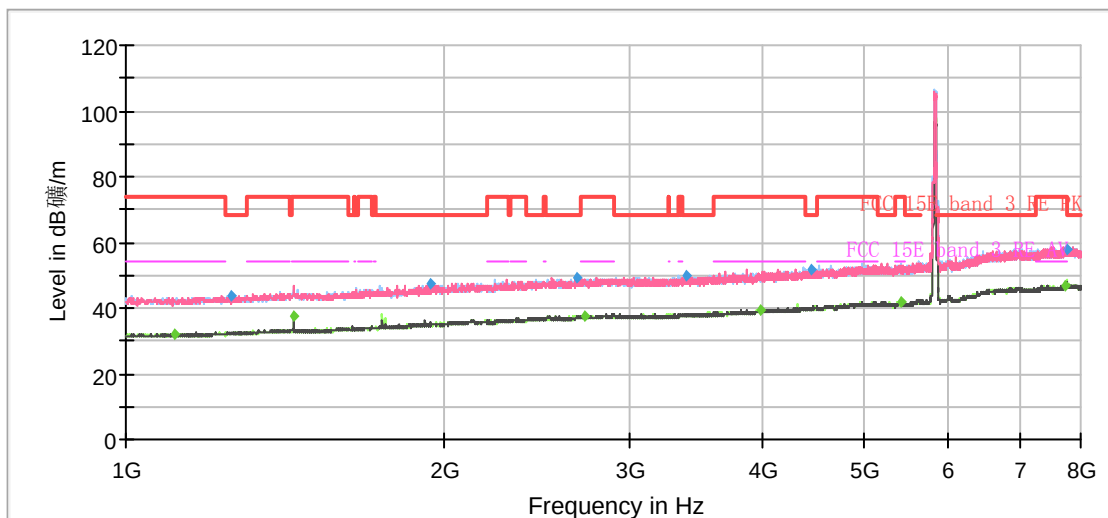


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1113.75	---	31.98	54.00	22.02	500.00	200.0	H	75.00	5
1258.13	43.97	---	68.20	24.23	500.00	200.0	V	236.00	6
1440.13	---	37.35	54.00	16.65	500.00	100.0	V	48.00	7
1938.88	47.08	---	68.20	21.12	500.00	100.0	H	231.00	9
2673.00	49.22	---	68.20	18.98	500.00	200.0	H	255.00	11
2721.13	---	37.72	54.00	16.28	500.00	200.0	H	290.00	11
3394.88	49.98	---	68.20	18.22	500.00	100.0	H	163.00	12
3984.63	---	39.45	54.00	14.55	500.00	200.0	H	248.00	13
4456.25	51.60	---	68.20	16.60	500.00	200.0	V	68.00	14
5398.63	---	41.83	54.00	12.17	500.00	200.0	H	50.00	15
7734.00	---	47.00	54.00	7.00	500.00	200.0	V	306.00	22
7755.00	58.03	---	68.20	10.18	500.00	200.0	V	106.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

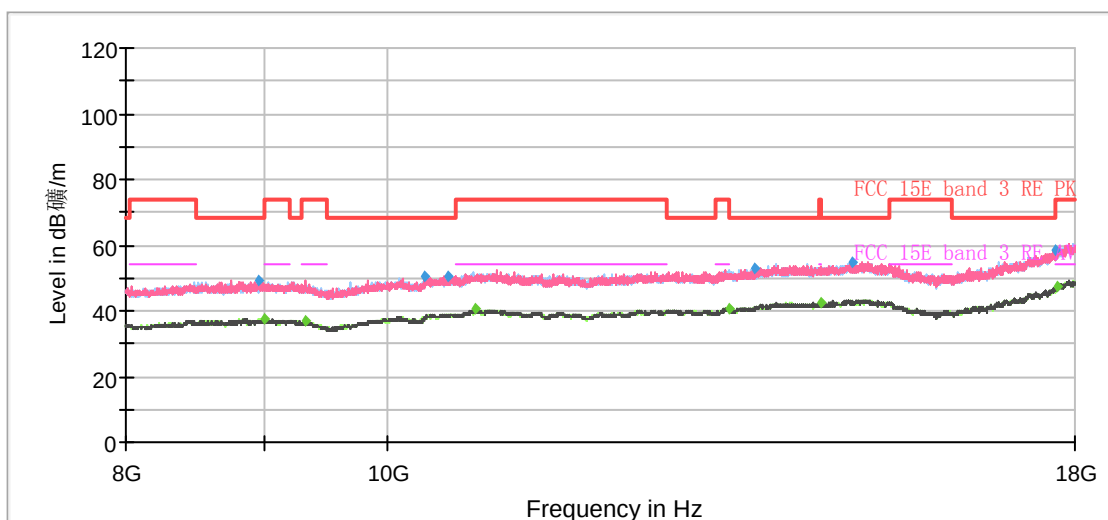


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8967.50	49.42	---	68.20	18.78	500.00	200.0	V	30.00	-2
9008.75	---	37.50	54.00	16.50	500.00	200.0	V	0.00	-2
9328.75	---	37.01	54.00	16.99	500.00	200.0	H	248.00	-2
10335.00	50.23	---	68.20	17.97	500.00	100.0	V	0.00	0
10543.75	50.23	---	68.20	17.97	500.00	200.0	H	277.00	0
10788.75	---	40.42	54.00	13.58	500.00	100.0	H	33.00	0
13387.50	---	40.74	54.00	13.26	500.00	200.0	V	5.00	3
13682.50	52.63	---	68.20	15.57	500.00	200.0	H	313.00	3
14500.00	---	42.61	54.00	11.39	500.00	100.0	H	324.00	5
14878.75	54.58	---	68.20	13.62	500.00	100.0	H	40.00	5
17693.75	58.71	---	68.20	9.49	500.00	100.0	H	0.00	8
17746.25	---	47.33	54.00	6.67	500.00	100.0	H	0.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH36

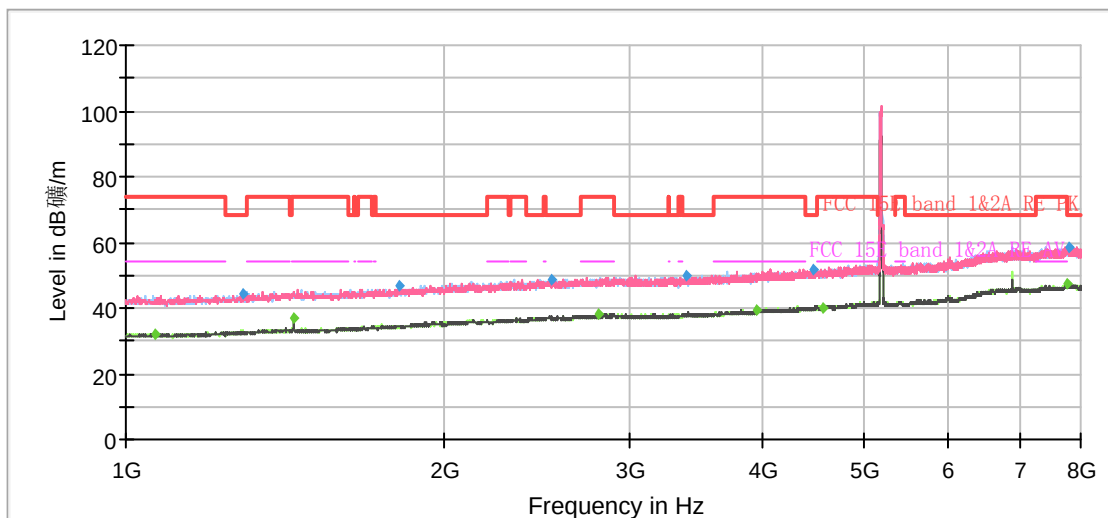


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1063.88	---	31.83	54.00	22.17	500.00	200.0	V	272.00	5
1290.50	44.22	---	68.20	23.98	500.00	100.0	V	10.00	6
1440.13	---	36.94	54.00	17.06	500.00	200.0	V	286.00	7
1812.00	46.80	---	68.20	21.40	500.00	200.0	H	6.00	9
2530.38	48.84	---	68.20	19.36	500.00	100.0	H	190.00	11
2801.63	---	37.85	54.00	16.15	500.00	100.0	H	0.00	11
3387.88	50.15	---	68.20	18.05	500.00	200.0	V	204.00	12
3943.50	---	39.43	54.00	14.57	500.00	200.0	H	12.00	13
4463.25	51.88	---	68.20	16.32	500.00	100.0	V	0.00	14
4556.88	---	40.15	54.00	13.85	500.00	100.0	V	49.00	14
7749.75	---	47.16	54.00	6.84	500.00	100.0	V	132.00	22
7799.63	58.68	---	68.20	9.52	500.00	200.0	H	134.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

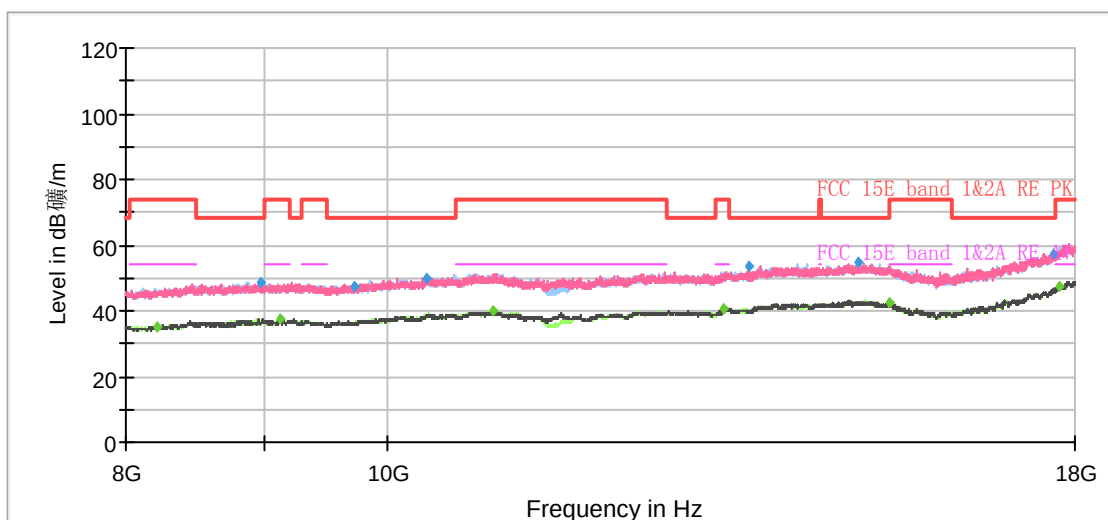


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8215.00	---	35.23	54.00	18.77	500.00	100.0	V	0.00	-3
8975.00	48.81	---	68.20	19.39	500.00	100.0	V	291.00	-2
9122.50	---	37.37	54.00	16.63	500.00	100.0	H	76.00	-2
9732.50	47.35	---	68.20	20.85	500.00	200.0	H	321.00	-2
10342.50	49.98	---	68.20	18.22	500.00	200.0	V	176.00	0
10951.25	---	39.79	54.00	14.21	500.00	100.0	V	341.00	0
13335.00	---	40.53	54.00	13.47	500.00	100.0	V	277.00	3
13621.25	53.30	---	68.20	14.90	500.00	200.0	V	16.00	3
14962.50	54.48	---	68.20	13.72	500.00	200.0	V	11.00	5
15368.75	---	42.41	54.00	11.59	500.00	100.0	V	358.00	4
17686.25	57.53	---	68.20	10.67	500.00	200.0	H	299.00	7
17752.50	---	47.28	54.00	6.72	500.00	100.0	H	128.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH40

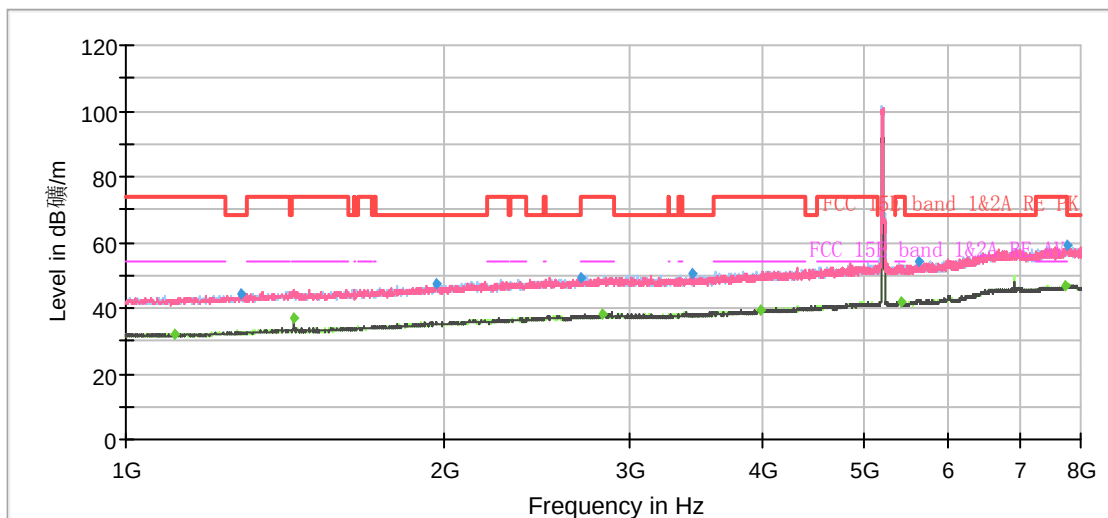


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1112.00	---	31.73	54.00	22.27	500.00	100.0	H	298.00	5
1283.50	44.22	---	68.20	23.98	500.00	200.0	H	4.00	6
1440.13	---	37.01	54.00	16.99	500.00	100.0	V	327.00	7
1967.75	47.19	---	68.20	21.01	500.00	100.0	V	226.00	9
2688.75	49.06	---	68.20	19.14	500.00	100.0	H	111.00	11
2826.13	---	37.88	54.00	16.12	500.00	100.0	V	98.00	11
3426.38	50.53	---	68.20	17.67	500.00	100.0	H	332.00	12
3982.00	---	39.60	54.00	14.40	500.00	200.0	H	1.00	13
5419.63	---	41.82	54.00	12.18	500.00	100.0	V	29.00	15
5631.38	53.88	---	68.20	14.32	500.00	200.0	V	278.00	16
7739.25	---	47.02	54.00	6.98	500.00	100.0	V	271.00	22
7752.38	58.91	---	68.20	9.29	500.00	200.0	V	344.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

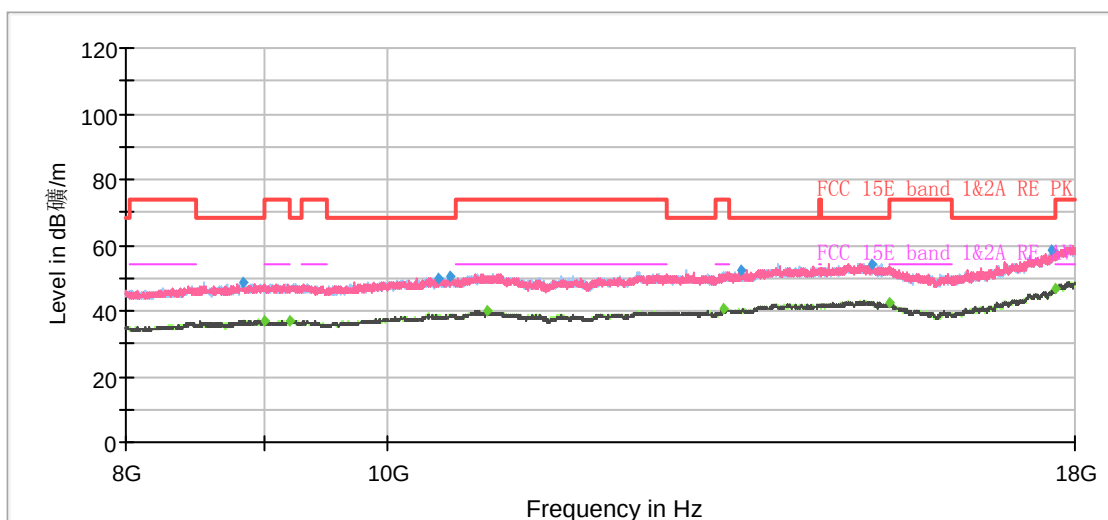


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8845.00	48.39	---	68.20	19.81	500.00	200.0	V	9.00	-3
9011.25	---	37.01	54.00	16.99	500.00	200.0	V	46.00	-2
9198.75	---	37.04	54.00	16.96	500.00	100.0	H	141.00	-2
10441.25	49.94	---	68.20	18.26	500.00	100.0	V	309.00	-1
10546.25	50.38	---	68.20	17.82	500.00	200.0	V	46.00	0
10901.25	---	39.91	54.00	14.09	500.00	100.0	V	323.00	0
13332.50	---	40.33	54.00	13.67	500.00	200.0	V	4.00	3
13535.00	52.38	---	68.20	15.82	500.00	100.0	H	25.00	3
15125.00	54.25	---	68.20	13.95	500.00	100.0	V	43.00	5
15363.75	---	42.31	54.00	11.69	500.00	100.0	V	359.00	4
17641.25	58.17	---	68.20	10.03	500.00	100.0	V	122.00	7
17711.25	---	46.71	54.00	7.29	500.00	100.0	H	32.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH48

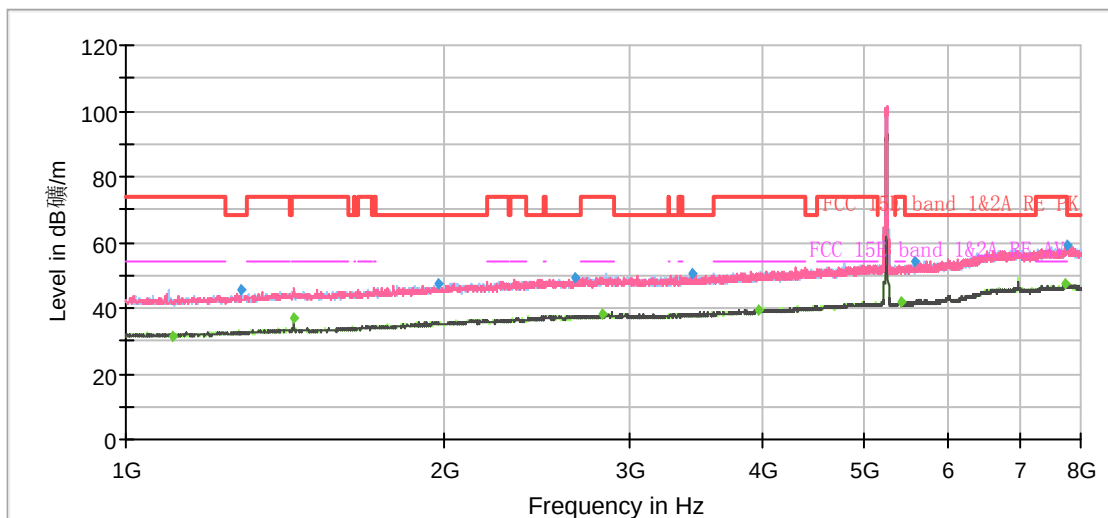


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1109.38	---	31.65	54.00	22.35	500.00	100.0	H	358.00	5
1287.88	45.74	---	68.20	22.46	500.00	200.0	H	10.00	6
1440.13	---	36.87	54.00	17.13	500.00	100.0	V	63.00	7
1973.88	47.26	---	68.20	20.94	500.00	100.0	H	179.00	9
2660.75	49.05	---	68.20	19.15	500.00	200.0	V	300.00	11
2826.13	---	38.12	54.00	15.88	500.00	100.0	H	303.00	11
3431.63	50.75	---	68.20	17.45	500.00	100.0	V	166.00	12
3967.13	---	39.35	54.00	14.65	500.00	100.0	H	246.00	13
5417.88	---	41.89	54.00	12.11	500.00	100.0	H	348.00	15
5582.38	53.86	---	68.20	14.34	500.00	200.0	H	0.00	16
7747.13	---	47.16	54.00	6.84	500.00	200.0	H	280.00	22
7771.63	59.34	---	68.20	8.86	500.00	100.0	V	348.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

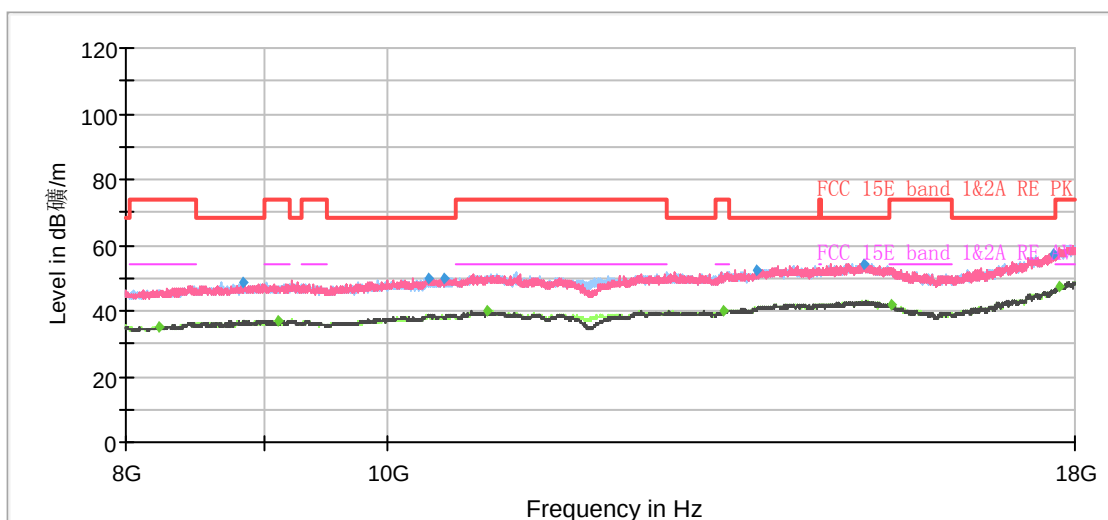


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8232.50	---	35.29	54.00	18.71	500.00	200.0	H	335.00	-3
8848.75	48.73	---	68.20	19.47	500.00	100.0	H	28.00	-3
9118.75	---	36.91	54.00	17.09	500.00	100.0	H	35.00	-2
10366.25	49.96	---	68.20	18.24	500.00	200.0	V	9.00	0
10500.00	49.84	---	68.20	18.36	500.00	100.0	H	113.00	0
10901.25	---	40.17	54.00	13.83	500.00	100.0	H	28.00	0
13338.75	---	40.26	54.00	13.74	500.00	100.0	H	91.00	3
13702.50	52.53	---	68.20	15.68	500.00	200.0	V	1.00	4
15023.75	54.32	---	68.20	13.88	500.00	100.0	H	200.00	5
15382.50	---	42.07	54.00	11.93	500.00	100.0	V	95.00	4
17677.50	57.45	---	68.20	10.75	500.00	200.0	H	94.00	7
17750.00	---	47.39	54.00	6.61	500.00	100.0	H	186.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH52

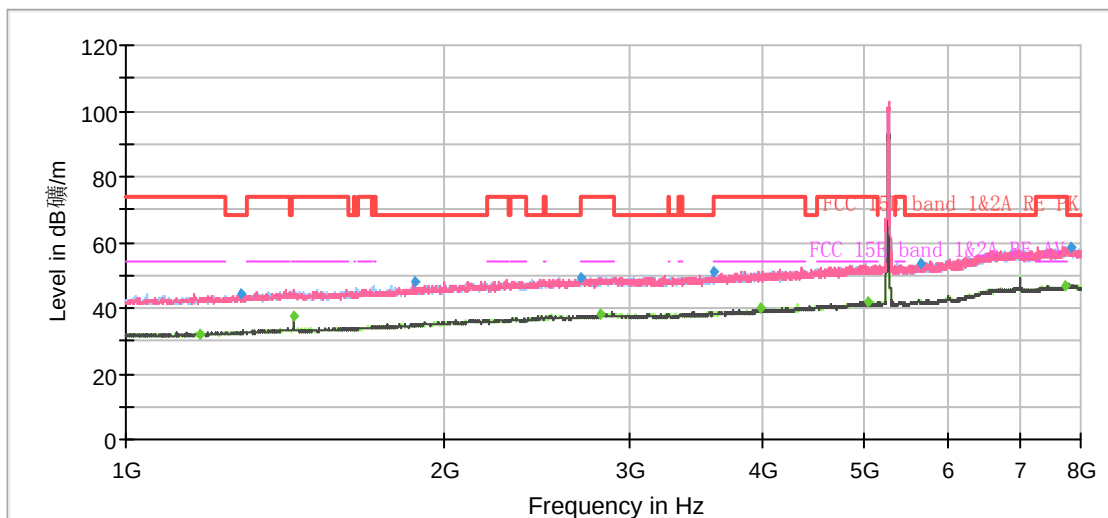


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1175.00	---	31.87	54.00	22.13	500.00	200.0	H	41.00	6
1287.88	44.25	---	68.20	23.95	500.00	200.0	V	232.00	6
1440.13	---	37.48	54.00	16.52	500.00	100.0	V	334.00	7
1874.13	48.29	---	68.20	19.91	500.00	100.0	V	49.00	9
2689.63	49.49	---	68.20	18.71	500.00	200.0	V	75.00	11
2806.88	---	38.08	54.00	15.92	500.00	200.0	V	246.00	11
3598.75	50.81	---	68.20	17.39	500.00	100.0	V	8.00	12
3982.88	---	39.86	54.00	14.14	500.00	200.0	H	20.00	13
5035.50	---	41.90	54.00	12.10	500.00	100.0	V	2.00	15
5643.63	53.55	---	68.20	14.65	500.00	100.0	V	22.00	16
7739.25	---	46.96	54.00	7.04	500.00	100.0	H	180.00	22
7837.25	58.45	---	68.20	9.75	500.00	100.0	H	349.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

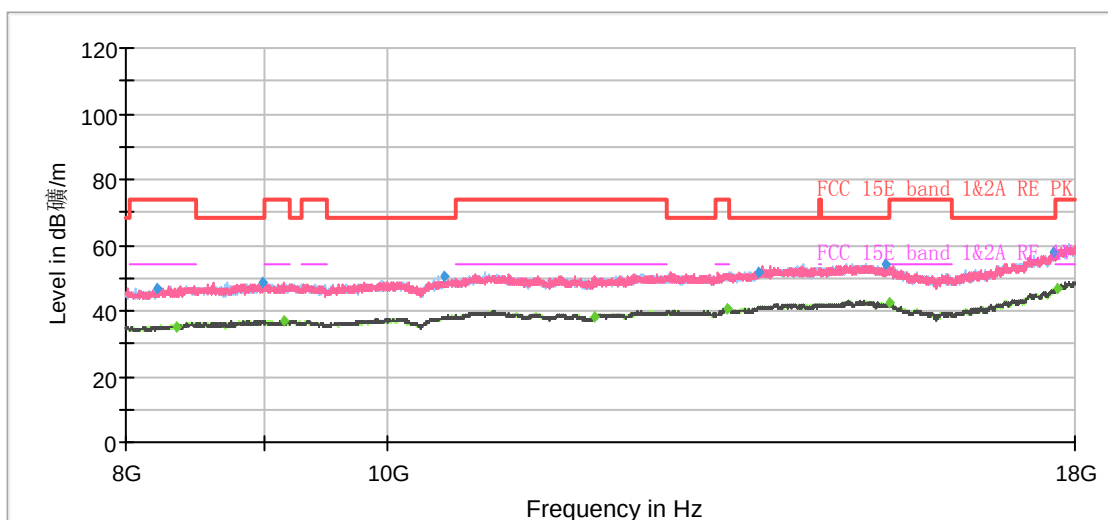


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8220.00	46.98	---	74.00	27.02	500.00	100.0	H	1.00	-3
8353.75	---	35.28	54.00	18.72	500.00	200.0	H	352.00	-3
8993.75	48.61	---	68.20	19.59	500.00	200.0	H	356.00	-2
9151.25	---	36.82	54.00	17.18	500.00	100.0	H	164.00	-2
10497.50	50.51	---	68.20	17.69	500.00	100.0	V	57.00	0
11938.75	---	37.97	54.00	16.03	500.00	100.0	H	149.00	1
13376.25	---	40.53	54.00	13.47	500.00	200.0	V	354.00	3
13735.00	51.94	---	68.20	16.26	500.00	100.0	V	192.00	4
15302.50	53.97	---	68.20	14.23	500.00	200.0	H	209.00	4
15352.50	---	42.38	54.00	11.62	500.00	100.0	V	214.00	4
17666.25	57.69	---	68.20	10.51	500.00	100.0	H	0.00	7
17722.50	---	46.72	54.00	7.28	500.00	200.0	H	308.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH60

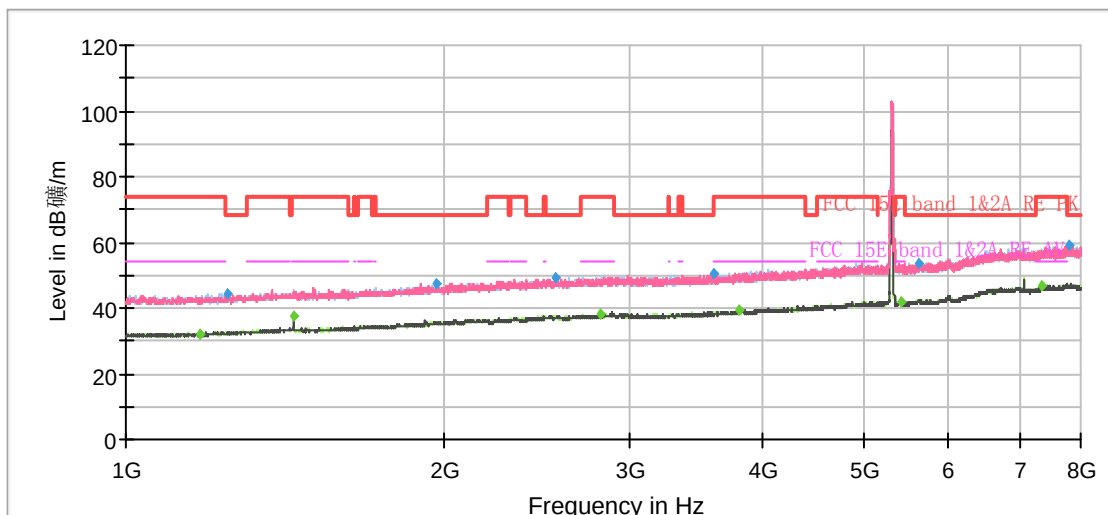


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1175.00	---	31.82	54.00	22.18	500.00	100.0	H	160.00	6
1245.88	44.31	---	68.20	23.89	500.00	200.0	V	0.00	6
1440.13	---	37.30	54.00	16.70	500.00	100.0	V	326.00	7
1968.63	47.55	---	68.20	20.65	500.00	200.0	V	349.00	9
2553.13	49.43	---	68.20	18.77	500.00	200.0	V	0.00	11
2808.63	---	38.28	54.00	15.72	500.00	100.0	V	7.00	11
3598.75	50.33	---	68.20	17.87	500.00	200.0	V	250.00	12
3793.88	---	39.45	54.00	14.55	500.00	200.0	H	222.00	13
5408.25	---	42.06	54.00	11.94	500.00	100.0	V	153.00	15
5631.38	53.79	---	68.20	14.41	500.00	200.0	H	341.00	16
7363.00	---	47.01	54.00	6.99	500.00	100.0	V	2.00	21
7801.38	58.81	---	68.20	9.39	500.00	200.0	H	167.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

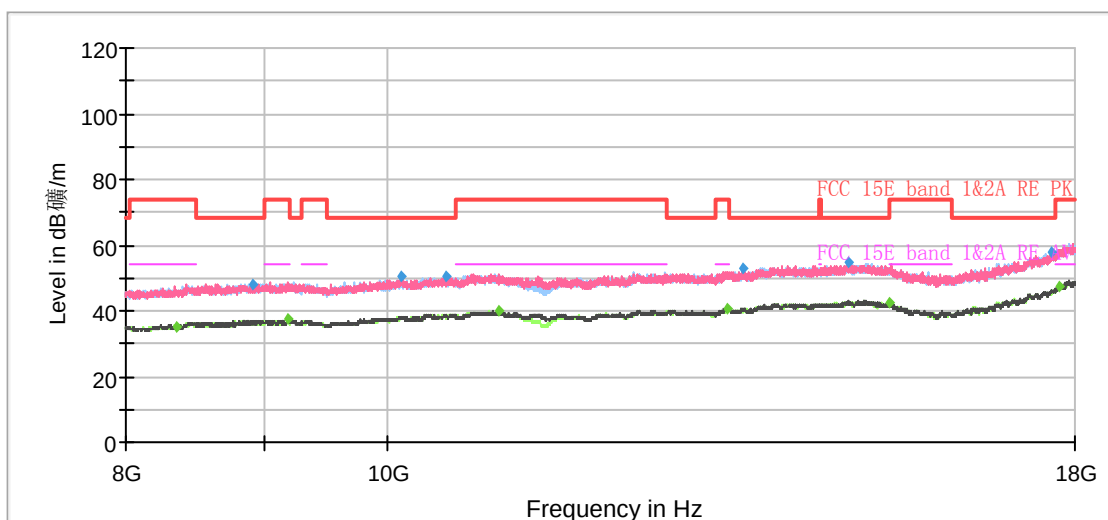


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8352.50	---	35.29	54.00	18.71	500.00	200.0	H	275.00	-3
8916.25	48.25	---	68.20	19.95	500.00	200.0	V	200.00	-3
9185.00	---	37.29	54.00	16.71	500.00	100.0	H	137.00	-2
10128.75	50.72	---	68.20	17.48	500.00	200.0	H	170.00	-1
10522.50	50.71	---	68.20	17.49	500.00	100.0	H	2.00	0
10995.00	---	39.74	54.00	14.26	500.00	100.0	H	199.00	0
13367.50	---	40.70	54.00	13.30	500.00	200.0	H	358.00	3
13543.75	52.66	---	68.20	15.54	500.00	200.0	V	2.00	3
14835.00	54.60	---	68.20	13.60	500.00	200.0	V	200.00	5
15363.75	---	42.17	54.00	11.83	500.00	100.0	H	10.00	4
17652.50	57.81	---	68.20	10.39	500.00	100.0	V	0.00	7
17762.50	---	47.28	54.00	6.72	500.00	200.0	H	206.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH64

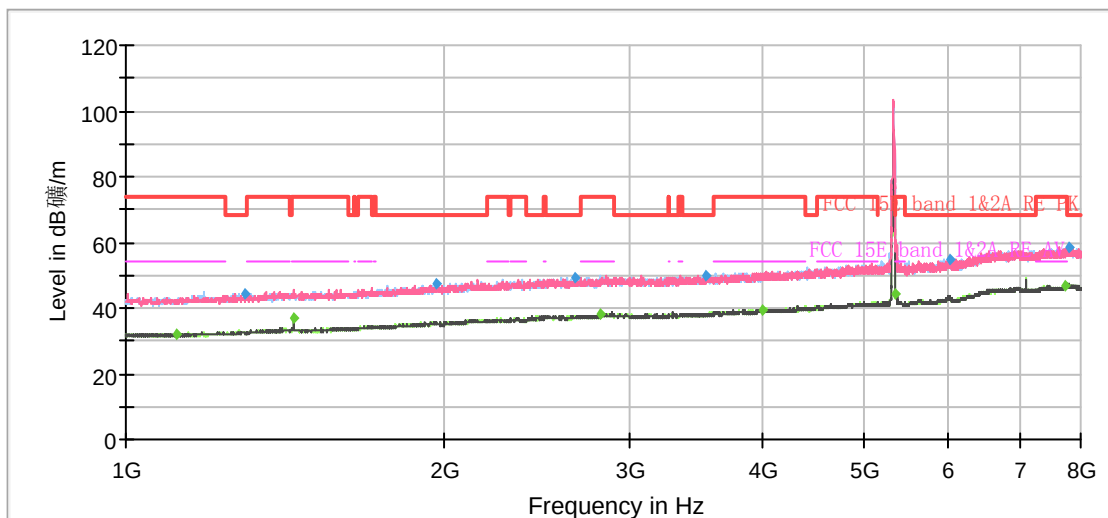


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1118.13	---	31.72	54.00	22.28	500.00	200.0	H	72.00	5
1297.50	44.44	---	68.20	23.76	500.00	200.0	H	127.00	6
1440.13	---	36.85	54.00	17.15	500.00	100.0	V	69.00	7
1967.75	47.23	---	68.20	20.97	500.00	100.0	H	299.00	9
2659.88	49.29	---	68.20	18.91	500.00	100.0	H	56.00	11
2806.00	---	38.11	54.00	15.89	500.00	100.0	H	180.00	11
3534.88	50.10	---	68.20	18.10	500.00	100.0	H	214.00	12
3994.25	---	39.69	54.00	14.31	500.00	100.0	V	138.00	13
5350.50	---	44.32	54.00	9.68	500.00	200.0	V	276.00	15
6005.88	54.73	---	68.20	13.47	500.00	200.0	V	173.00	18
7742.75	---	47.02	54.00	6.98	500.00	200.0	V	346.00	22
7785.63	58.53	---	68.20	9.67	500.00	200.0	V	200.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

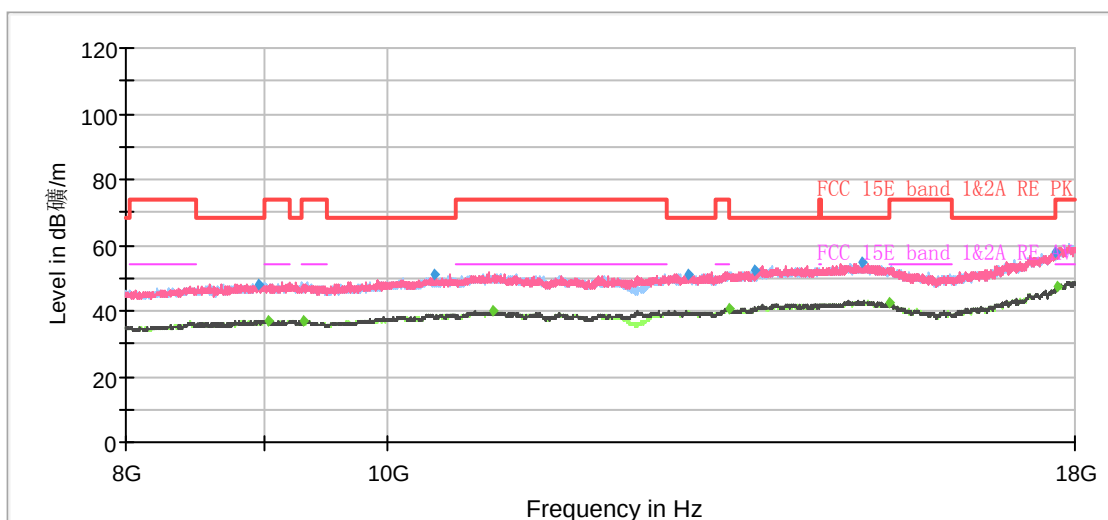


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8960.00	48.11	---	68.20	20.09	500.00	100.0	V	351.00	-2
9038.75	---	37.00	54.00	17.00	500.00	100.0	H	150.00	-2
9313.75	---	36.96	54.00	17.04	500.00	100.0	H	0.00	-2
10408.75	51.12	---	68.20	17.08	500.00	100.0	V	347.00	-1
10952.50	---	39.91	54.00	14.09	500.00	100.0	H	4.00	0
12941.25	50.82	---	68.20	17.38	500.00	100.0	V	99.00	2
13391.25	---	40.48	54.00	13.52	500.00	100.0	V	300.00	3
13695.00	52.24	---	68.20	15.96	500.00	100.0	V	198.00	4
14997.50	54.95	---	68.20	13.25	500.00	100.0	V	184.00	5
15358.75	---	42.29	54.00	11.71	500.00	200.0	H	128.00	4
17687.50	57.93	---	68.20	10.27	500.00	200.0	V	121.00	7
17743.75	---	47.31	54.00	6.69	500.00	100.0	H	214.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH100

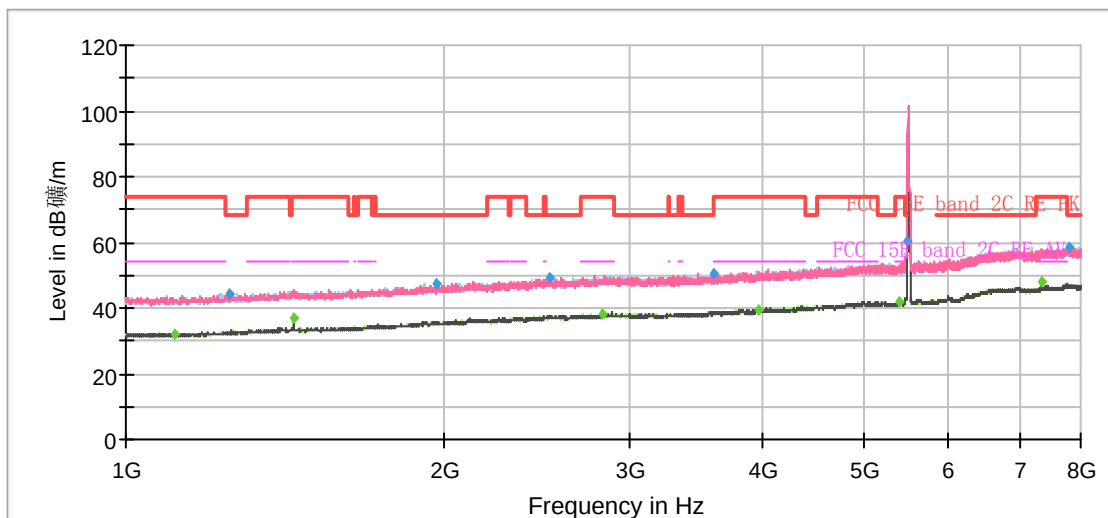


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1113.75	---	31.73	54.00	22.27	500.00	200.0	H	224.00	5
1253.75	44.25	---	68.20	23.95	500.00	200.0	V	204.00	6
1440.13	---	37.20	54.00	16.80	500.00	100.0	V	327.00	7
1968.63	47.30	---	68.20	20.90	500.00	200.0	V	262.00	9
2512.00	49.19	---	68.20	19.01	500.00	100.0	H	349.00	11
2827.88	---	38.02	54.00	15.98	500.00	200.0	H	19.00	11
3590.00	50.38	---	68.20	17.82	500.00	100.0	V	313.00	12
3969.75	---	39.62	54.00	14.38	500.00	100.0	H	20.00	13
5396.88	---	41.79	54.00	12.21	500.00	100.0	H	145.00	15
5469.50	60.45	---	68.20	7.75	500.00	200.0	H	7.00	15
7334.13	---	48.27	54.00	5.73	500.00	100.0	V	32.00	21
7782.13	58.71	---	68.20	9.49	500.00	200.0	H	10.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

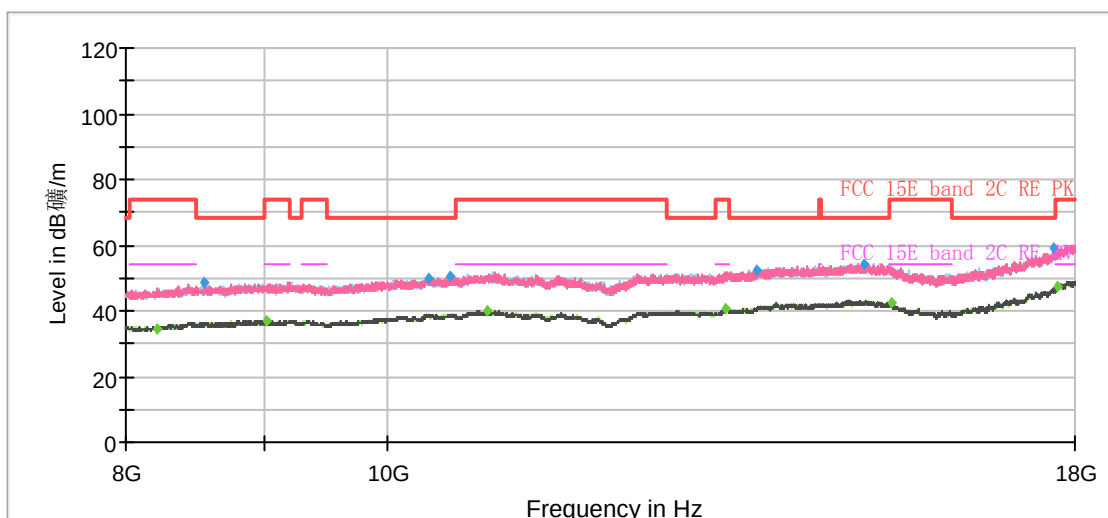


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8215.00	---	34.63	54.00	19.37	500.00	200.0	H	356.00	-3
8551.25	48.42	---	68.20	19.78	500.00	100.0	H	110.00	-3
9013.75	---	37.02	54.00	16.98	500.00	100.0	H	31.00	-2
10356.25	50.01	---	68.20	18.19	500.00	100.0	V	252.00	0
10545.00	50.37	---	68.20	17.83	500.00	200.0	V	2.00	0
10897.50	---	40.16	54.00	13.84	500.00	100.0	H	184.00	0
13356.25	---	40.65	54.00	13.35	500.00	100.0	V	116.00	3
13725.00	52.50	---	68.20	15.70	500.00	200.0	H	358.00	4
15035.00	54.43	---	68.20	13.77	500.00	200.0	H	270.00	5
15383.75	---	42.39	54.00	11.61	500.00	100.0	H	125.00	4
17685.00	58.86	---	68.20	9.34	500.00	100.0	V	245.00	7
17726.25	---	47.30	54.00	6.70	500.00	200.0	H	192.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH116

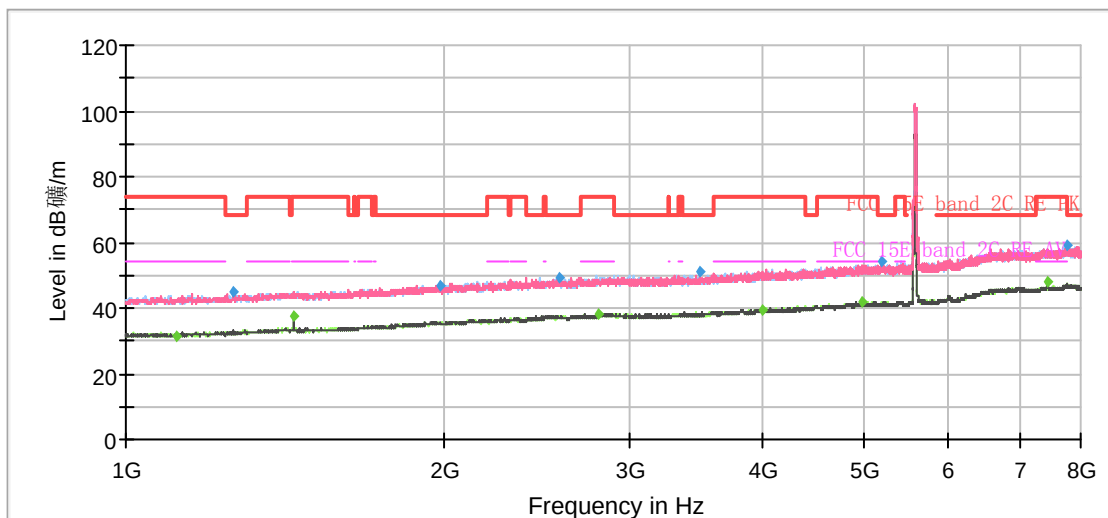


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1119.00	---	31.66	54.00	22.34	500.00	200.0	H	125.00	6
1265.13	44.98	---	68.20	23.22	500.00	200.0	V	238.00	6
1440.13	---	37.26	54.00	16.74	500.00	100.0	V	320.00	7
1979.13	47.01	---	68.20	21.19	500.00	100.0	V	3.00	9
2568.00	49.16	---	68.20	19.04	500.00	200.0	V	184.00	11
2803.38	---	38.17	54.00	15.83	500.00	100.0	H	354.00	11
3487.63	50.88	---	68.20	17.32	500.00	200.0	V	0.00	12
3999.50	---	39.54	54.00	14.46	500.00	200.0	H	6.00	13
4958.50	---	41.84	54.00	12.16	500.00	100.0	V	131.00	15
5186.88	54.03	---	68.20	14.17	500.00	200.0	H	0.00	15
7440.00	---	48.24	54.00	5.76	500.00	100.0	V	29.00	21
7774.25	59.00	---	68.20	9.20	500.00	100.0	V	12.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

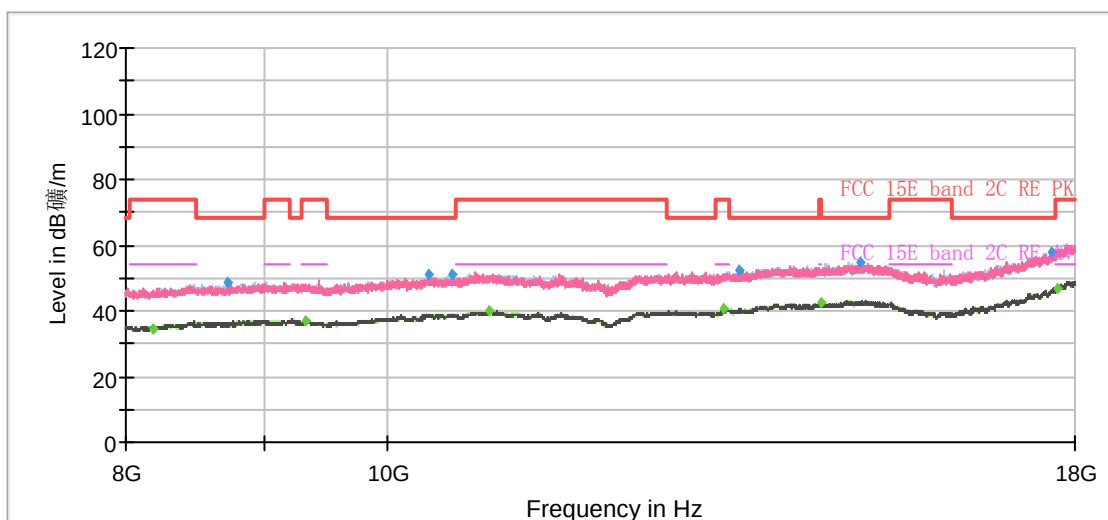


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8195.00	---	34.73	54.00	19.27	500.00	100.0	H	204.00	-3
8722.50	48.77	---	68.20	19.43	500.00	200.0	H	301.00	-3
9335.00	---	36.89	54.00	17.11	500.00	200.0	H	154.00	-2
10363.75	50.93	---	68.20	17.27	500.00	200.0	V	66.00	0
10573.75	51.07	---	68.20	17.13	500.00	200.0	H	329.00	0
10902.50	---	39.93	54.00	14.07	500.00	200.0	H	212.00	0
13331.25	---	40.40	54.00	13.60	500.00	100.0	V	124.00	3
13503.75	52.16	---	68.20	16.04	500.00	100.0	V	305.00	3
14483.75	---	42.35	54.00	11.65	500.00	200.0	H	358.00	5
14970.00	54.81	---	68.20	13.39	500.00	100.0	H	23.00	5
17636.25	57.93	---	68.20	10.27	500.00	100.0	V	358.00	7
17730.00	---	46.60	54.00	7.40	500.00	100.0	H	66.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH140

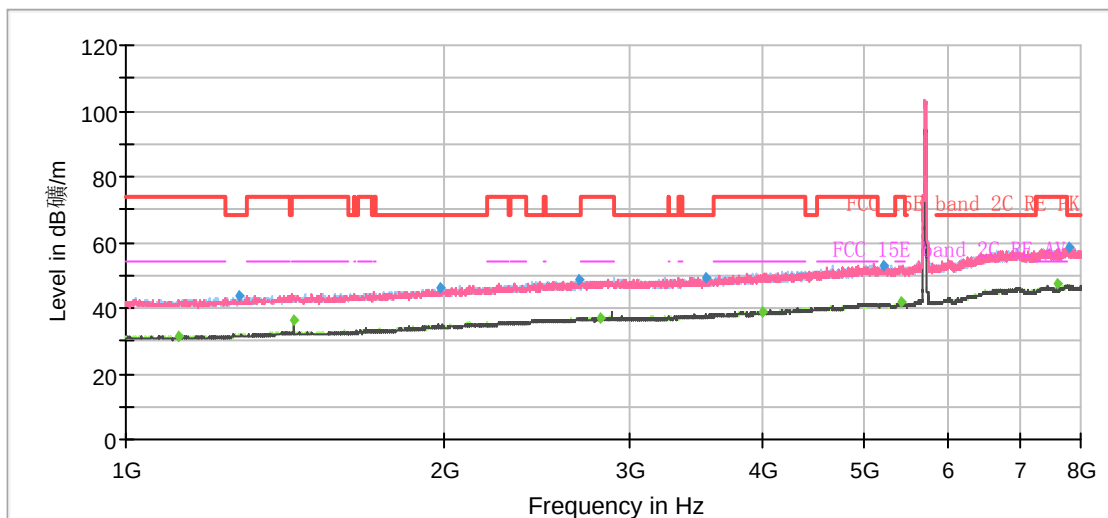


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1123.38	---	31.11	54.00	22.89	500.00	100.0	H	0.00	6
1281.75	43.40	---	68.20	24.80	500.00	100.0	V	357.00	6
1440.13	---	36.45	54.00	17.55	500.00	100.0	V	328.00	7
1981.75	46.25	---	68.20	21.95	500.00	200.0	H	207.00	9
2684.38	48.74	---	68.20	19.46	500.00	200.0	H	214.00	11
2806.00	---	37.17	54.00	16.83	500.00	100.0	H	244.00	11
3530.50	49.32	---	68.20	18.88	500.00	200.0	V	118.00	12
3999.50	---	39.03	54.00	14.97	500.00	200.0	H	262.00	13
5212.25	52.84	---	68.20	15.36	500.00	100.0	V	96.00	15
5409.13	---	41.73	54.00	12.27	500.00	200.0	H	268.00	15
7600.13	---	47.27	54.00	6.73	500.00	100.0	H	19.00	22
7788.25	58.49	---	68.20	9.71	500.00	200.0	H	302.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

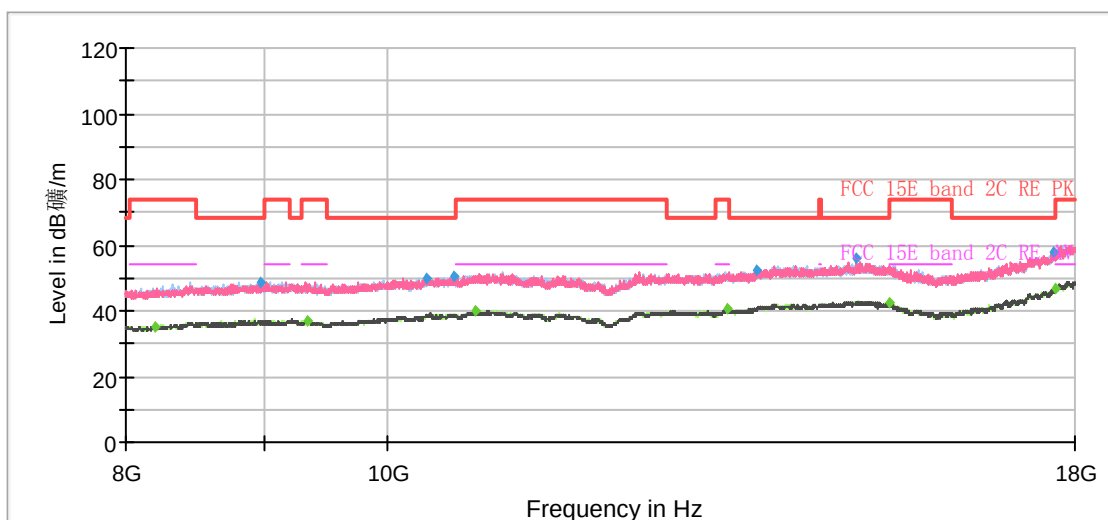


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8201.25	---	35.21	54.00	18.79	500.00	200.0	V	54.00	-3
8976.25	48.42	---	68.20	19.78	500.00	200.0	V	318.00	-2
9343.75	---	36.93	54.00	17.07	500.00	200.0	H	346.00	-2
10342.50	50.08	---	68.20	18.12	500.00	200.0	V	62.00	0
10585.00	50.28	---	68.20	17.92	500.00	100.0	H	245.00	0
10783.75	---	39.88	54.00	14.12	500.00	100.0	H	238.00	0
13377.50	---	40.73	54.00	13.27	500.00	100.0	H	26.00	3
13718.75	52.46	---	68.20	15.74	500.00	100.0	H	5.00	4
14936.25	56.11	---	68.20	12.09	500.00	100.0	V	338.00	5
15355.00	---	42.58	54.00	11.42	500.00	200.0	H	353.00	4
17672.50	57.63	---	68.20	10.57	500.00	100.0	V	296.00	7
17712.50	---	47.04	54.00	6.96	500.00	200.0	H	311.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH144

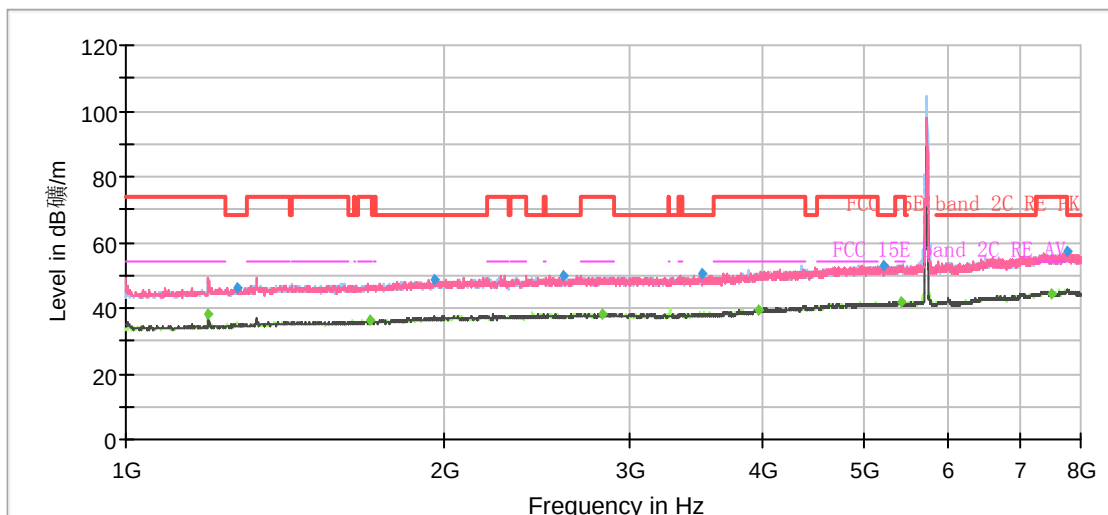


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1196.88	---	38.11	54.00	15.89	500.00	200.0	V	177.00	-9
1272.13	46.25	---	68.20	21.95	500.00	100.0	V	136.00	-8
1704.38	---	36.47	54.00	17.53	500.00	200.0	V	271.00	-6
1956.38	48.58	---	68.20	19.62	500.00	100.0	V	339.00	-5
2597.75	49.84	---	68.20	18.36	500.00	100.0	H	79.00	-4
2825.25	---	38.36	54.00	15.64	500.00	100.0	V	312.00	-3
3504.25	50.22	---	68.20	17.98	500.00	100.0	V	156.00	-3
3964.50	---	39.61	54.00	14.39	500.00	200.0	H	344.00	-1
5196.50	53.06	---	68.20	15.14	500.00	100.0	H	2.00	2
5400.38	---	42.00	54.00	12.00	500.00	200.0	V	112.00	3
7497.75	---	44.53	54.00	9.47	500.00	200.0	H	264.00	7
7772.50	57.04	---	68.20	11.16	500.00	100.0	H	52.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

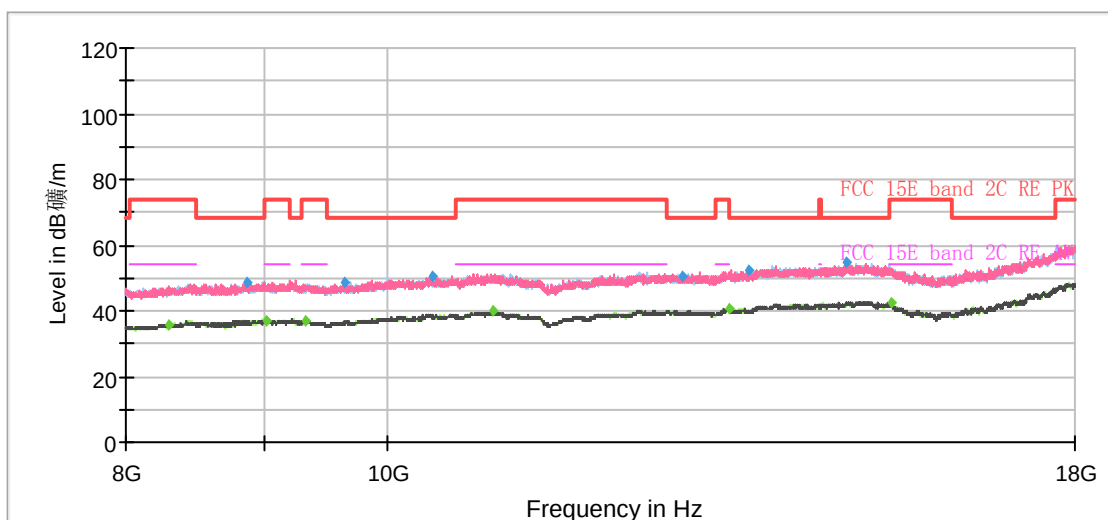


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8297.50	---	35.92	54.00	18.08	500.00	100.0	H	27.00	-3
8877.50	48.44	---	68.20	19.76	500.00	100.0	H	55.00	-3
9025.00	---	37.21	54.00	16.79	500.00	200.0	V	283.00	-2
9333.75	---	36.96	54.00	17.04	500.00	100.0	V	0.00	-2
9650.00	48.53	---	68.20	19.67	500.00	100.0	V	227.00	-2
10390.00	50.45	---	68.20	17.75	500.00	200.0	V	290.00	-1
10951.25	---	39.95	54.00	14.05	500.00	100.0	V	293.00	0
12862.50	50.52	---	68.20	17.68	500.00	200.0	H	359.00	2
13390.00	---	40.50	54.00	13.50	500.00	200.0	V	71.00	3
13631.25	52.20	---	68.20	16.00	500.00	100.0	V	170.00	3
14808.75	54.46	---	68.20	13.74	500.00	100.0	V	115.00	5
15375.00	---	42.35	54.00	11.65	500.00	200.0	V	21.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH149

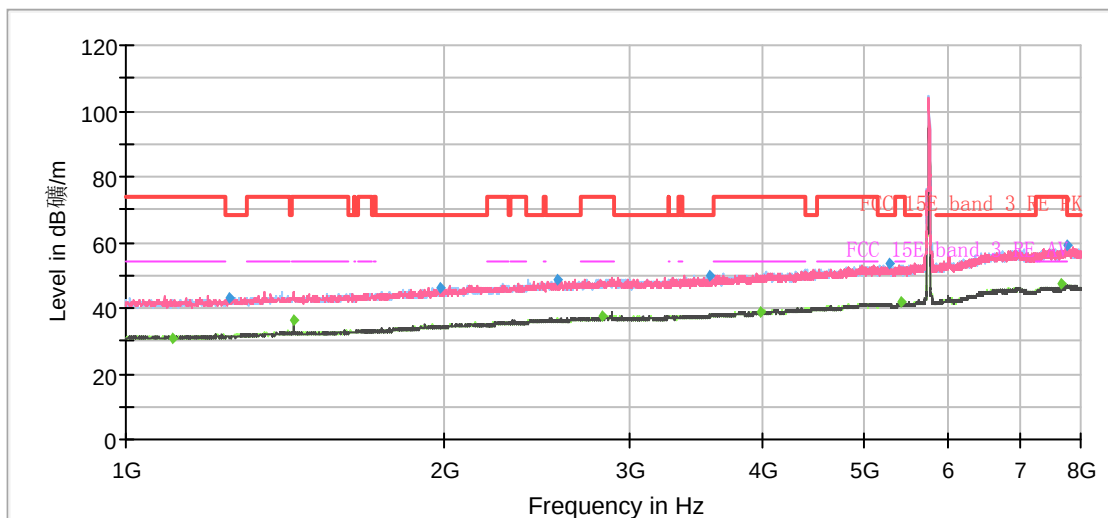


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1109.38	---	31.04	54.00	22.96	500.00	200.0	H	0.00	5
1254.63	43.28	---	68.20	24.92	500.00	100.0	V	0.00	6
1440.13	---	36.45	54.00	17.55	500.00	100.0	V	329.00	7
1980.88	46.07	---	68.20	22.13	500.00	100.0	V	294.00	9
2564.50	48.78	---	68.20	19.42	500.00	100.0	H	53.00	11
2822.63	---	37.27	54.00	16.73	500.00	100.0	H	60.00	11
3569.00	49.69	---	68.20	18.51	500.00	100.0	V	358.00	12
3990.75	---	39.04	54.00	14.96	500.00	200.0	H	338.00	13
5282.25	53.50	---	68.20	14.70	500.00	100.0	V	337.00	15
5400.38	---	41.93	54.00	12.07	500.00	200.0	V	65.00	15
7660.50	---	47.52	54.00	6.48	500.00	100.0	H	10.00	22
7780.38	58.84	---	68.20	9.36	500.00	100.0	V	118.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

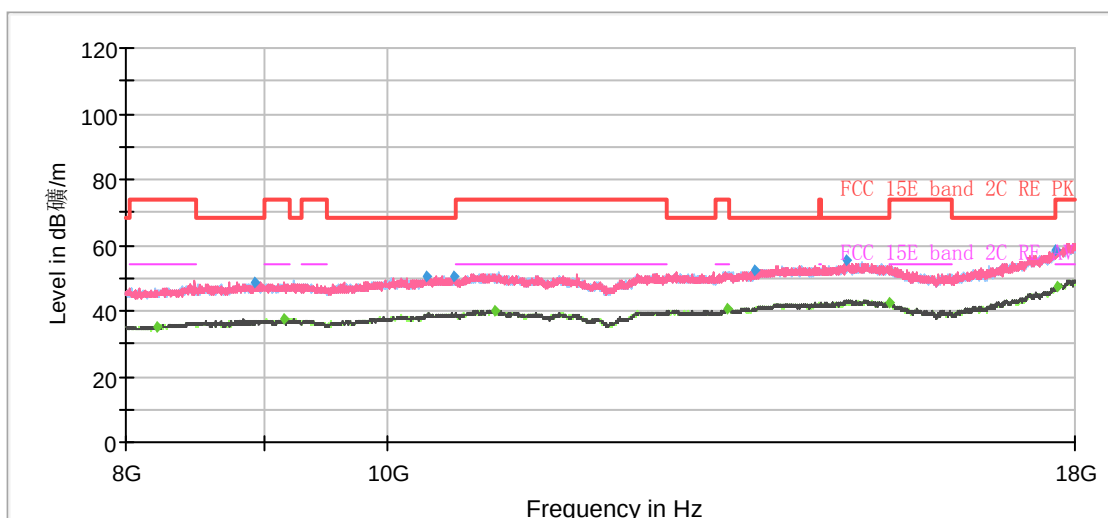


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8216.25	---	35.22	54.00	18.78	500.00	100.0	V	353.00	-3
8928.75	48.91	---	68.20	19.29	500.00	200.0	H	94.00	-2
9151.25	---	37.33	54.00	16.67	500.00	100.0	V	12.00	-2
10342.50	50.40	---	68.20	17.80	500.00	200.0	H	87.00	0
10582.50	50.51	---	68.20	17.69	500.00	100.0	H	287.00	0
10972.50	---	40.11	54.00	13.89	500.00	100.0	V	333.00	0
13377.50	---	40.67	54.00	13.33	500.00	200.0	V	3.00	3
13685.00	52.43	---	68.20	15.77	500.00	200.0	V	0.00	3
14801.25	55.35	---	68.20	12.85	500.00	100.0	V	0.00	5
15351.25	---	42.44	54.00	11.56	500.00	100.0	H	3.00	4
17696.25	58.19	---	68.20	10.01	500.00	200.0	H	354.00	8
17746.25	---	47.40	54.00	6.60	500.00	200.0	H	354.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH157

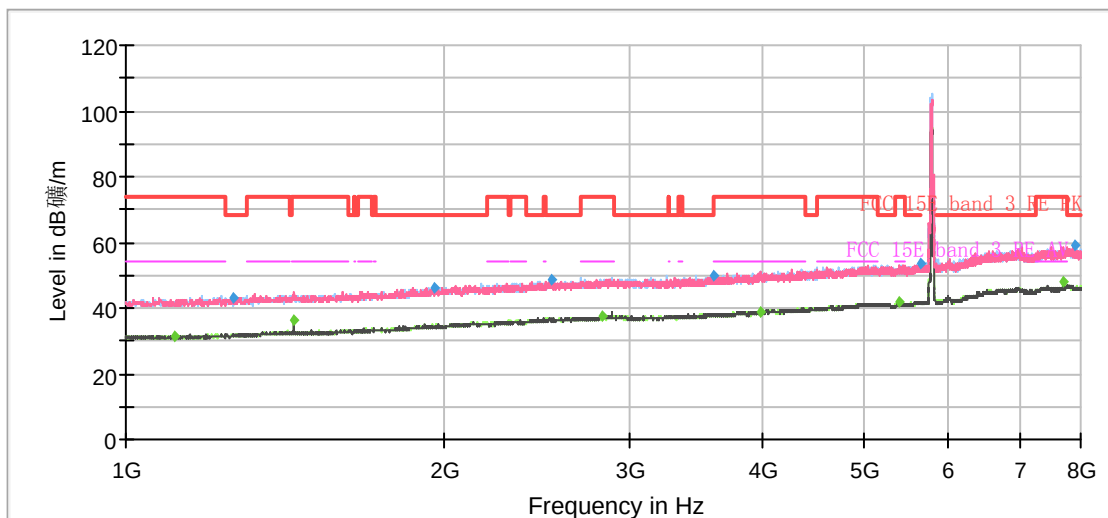


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1110.25	---	31.10	54.00	22.90	500.00	100.0	H	10.00	5
1263.38	43.25	---	68.20	24.95	500.00	100.0	H	1.00	6
1440.13	---	36.58	54.00	17.42	500.00	100.0	V	322.00	7
1956.38	46.42	---	68.20	21.78	500.00	100.0	H	1.00	9
2528.63	48.40	---	68.20	19.80	500.00	100.0	V	188.00	11
2827.88	---	37.34	54.00	16.66	500.00	200.0	V	28.00	11
3597.88	49.97	---	68.20	18.23	500.00	200.0	V	48.00	12
3985.50	---	39.00	54.00	15.00	500.00	200.0	H	121.00	13
5382.00	---	41.68	54.00	12.32	500.00	100.0	V	294.00	15
5634.00	53.75	---	68.20	14.45	500.00	100.0	V	0.00	16
7713.88	---	47.80	54.00	6.20	500.00	200.0	H	314.00	22
7892.38	58.88	---	68.20	9.32	500.00	200.0	V	0.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

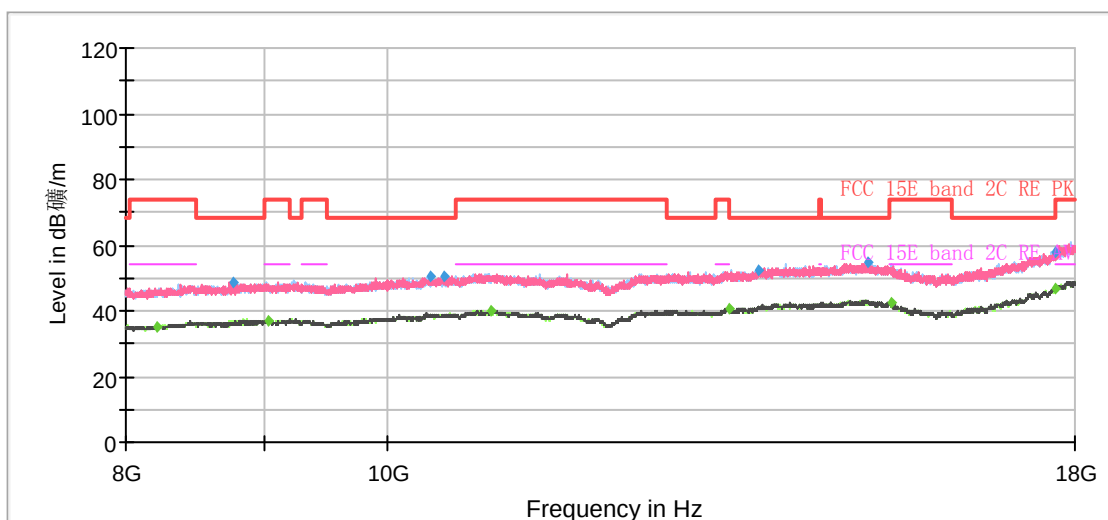


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8213.75	---	35.37	54.00	18.63	500.00	100.0	H	147.00	-3
8772.50	48.90	---	68.20	19.30	500.00	100.0	H	154.00	-3
9040.00	---	37.13	54.00	16.87	500.00	100.0	H	32.00	-2
10382.50	50.17	---	68.20	18.03	500.00	200.0	V	193.00	-1
10502.50	50.43	---	68.20	17.77	500.00	100.0	V	0.00	0
10931.25	---	39.99	54.00	14.01	500.00	200.0	H	99.00	0
13392.50	---	40.51	54.00	13.49	500.00	200.0	H	355.00	3
13732.50	52.52	---	68.20	15.68	500.00	200.0	H	357.00	4
15078.75	54.73	---	68.20	13.47	500.00	200.0	V	0.00	5
15387.50	---	42.34	54.00	11.66	500.00	100.0	V	358.00	4
17696.25	58.00	---	68.20	10.20	500.00	100.0	V	357.00	8
17716.25	---	46.82	54.00	7.18	500.00	100.0	V	6.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH165

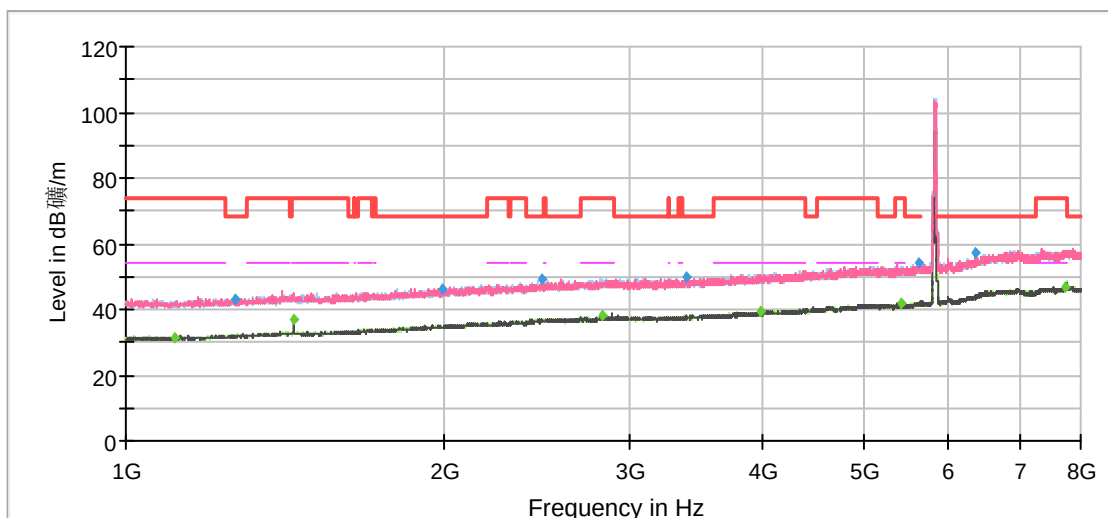


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1110.25	---	31.68	54.00	22.32	500.00	100.0	V	268.00	5
1267.75	43.19	---	68.20	25.01	500.00	100.0	H	3.00	6
1440.13	---	37.08	54.00	16.92	500.00	100.0	V	322.00	7
1987.88	46.39	---	68.20	21.81	500.00	100.0	H	4.00	9
2473.50	49.08	---	68.20	19.12	500.00	200.0	V	0.00	11
2816.50	---	37.94	54.00	16.06	500.00	200.0	V	83.00	11
3381.75	49.72	---	68.20	18.48	500.00	100.0	V	228.00	12
3979.38	---	39.14	54.00	14.86	500.00	200.0	H	357.00	13
5399.50	---	41.77	54.00	12.23	500.00	200.0	V	0.00	15
5619.13	54.08	---	68.20	14.12	500.00	100.0	V	0.00	16
6353.25	56.94	---	68.20	10.26	500.00	200.0	V	90.00	16
7747.13	---	46.99	54.00	7.01	500.00	200.0	V	130.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

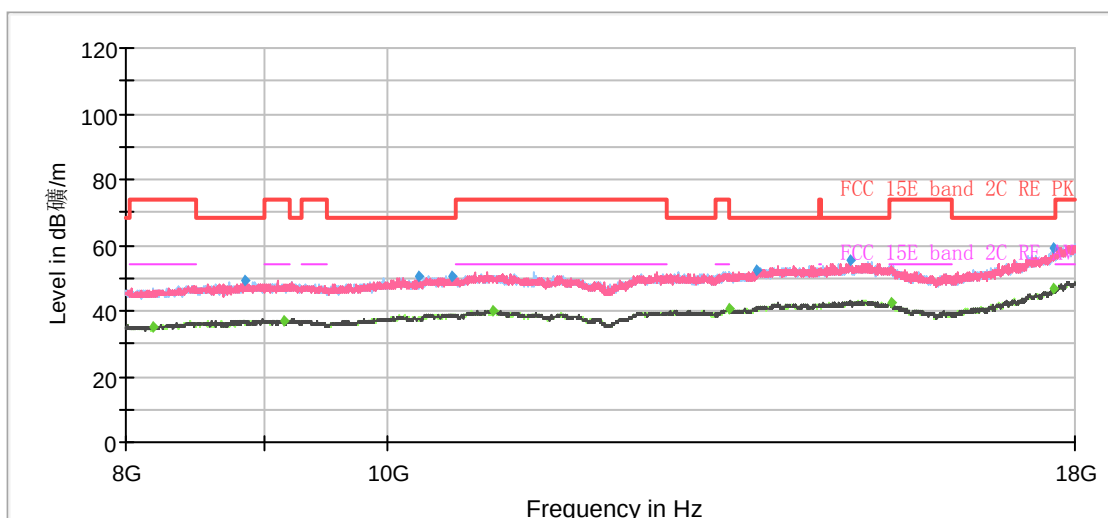


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8191.25	---	35.21	54.00	18.79	500.00	100.0	V	298.00	-3
8851.25	49.01	---	68.20	19.19	500.00	100.0	V	195.00	-3
9152.50	---	37.16	54.00	16.84	500.00	200.0	V	8.00	-2
10278.75	50.40	---	68.20	17.80	500.00	200.0	H	303.00	-1
10572.50	50.60	---	68.20	17.60	500.00	100.0	V	334.00	0
10946.25	---	40.02	54.00	13.98	500.00	200.0	V	63.00	0
13390.00	---	40.58	54.00	13.42	500.00	100.0	V	298.00	3
13713.75	52.17	---	68.20	16.03	500.00	200.0	V	3.00	4
14850.00	55.12	---	68.20	13.08	500.00	100.0	H	125.00	5
15381.25	---	42.34	54.00	11.66	500.00	100.0	V	0.00	4
17672.50	58.82	---	68.20	9.38	500.00	100.0	V	115.00	7
17706.25	---	46.70	54.00	7.30	500.00	100.0	V	188.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH38

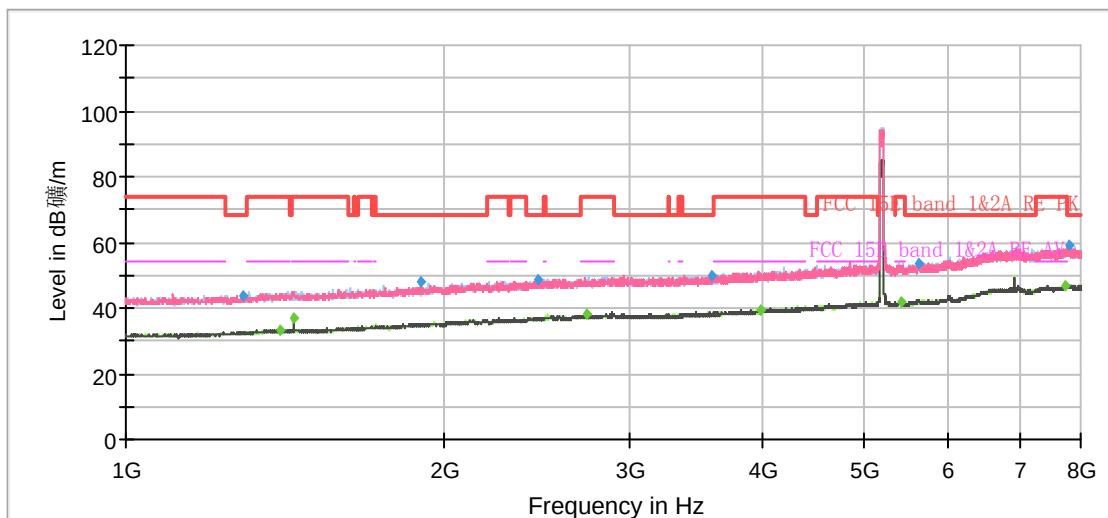


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1291.38	43.98	---	68.20	24.22	500.00	100.0	V	358.00	6
1396.38	---	33.36	54.00	20.64	500.00	100.0	V	277.00	7
1440.13	---	36.72	54.00	17.28	500.00	100.0	V	161.00	7
1903.88	47.84	---	68.20	20.36	500.00	100.0	V	230.00	9
2455.13	48.83	---	68.20	19.37	500.00	200.0	V	98.00	11
2729.00	---	37.98	54.00	16.02	500.00	200.0	H	249.00	11
3582.13	50.11	---	68.20	18.09	500.00	200.0	H	0.00	12
3986.38	---	39.35	54.00	14.65	500.00	100.0	V	348.00	13
5398.63	---	41.86	54.00	12.14	500.00	200.0	V	135.00	15
5613.00	53.52	---	68.20	14.68	500.00	100.0	V	311.00	16
7739.25	---	47.00	54.00	7.00	500.00	100.0	H	5.00	22
7793.50	58.96	---	68.20	9.24	500.00	200.0	H	297.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

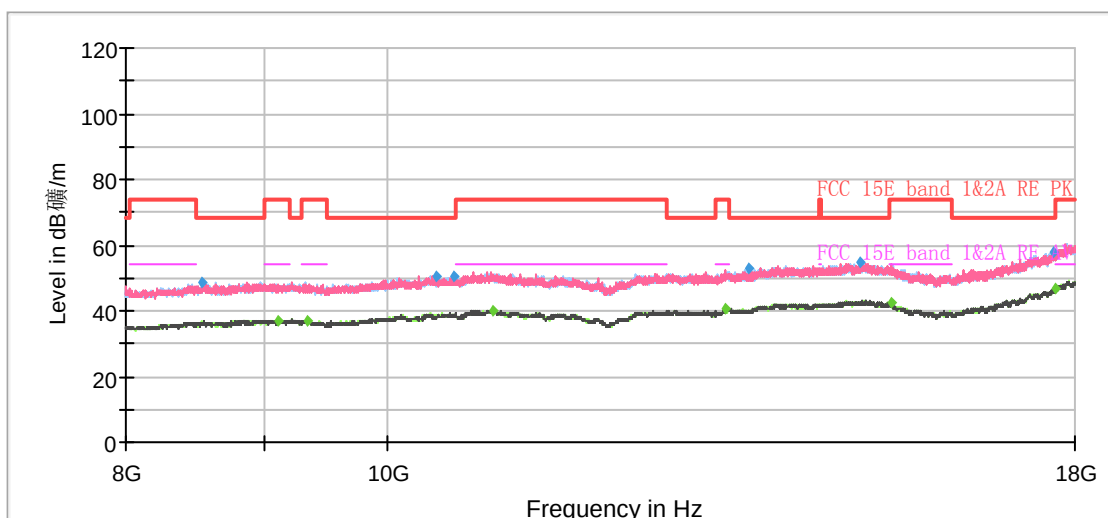


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8532.50	48.70	---	68.20	19.50	500.00	100.0	H	177.00	-3
9106.25	---	37.21	54.00	16.79	500.00	100.0	H	2.00	-2
9338.75	---	37.08	54.00	16.92	500.00	200.0	H	238.00	-2
10422.50	50.46	---	68.20	17.74	500.00	200.0	V	354.00	-1
10586.25	50.34	---	68.20	17.86	500.00	100.0	V	353.00	0
10951.25	---	40.20	54.00	13.80	500.00	200.0	V	87.00	0
13360.00	---	40.47	54.00	13.53	500.00	100.0	H	265.00	3
13633.75	52.63	---	68.20	15.57	500.00	200.0	H	210.00	3
14980.00	54.69	---	68.20	13.51	500.00	100.0	V	225.00	5
15380.00	---	42.27	54.00	11.73	500.00	100.0	V	36.00	4
17675.00	57.71	---	68.20	10.49	500.00	200.0	H	224.00	7
17705.25	---	47.05	54.00	6.95	500.00	200.0	H	260.00	9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

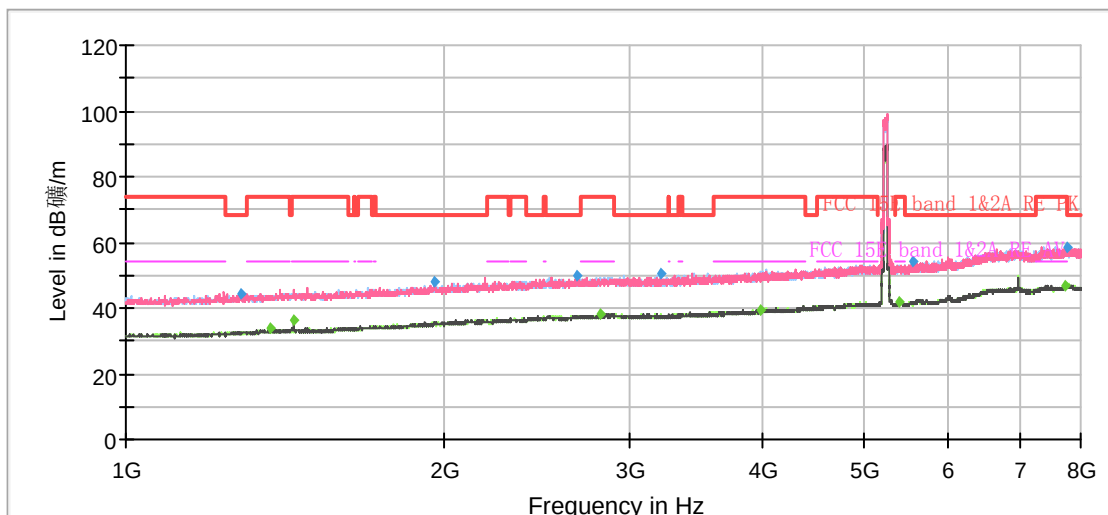


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1283.50	44.47	---	68.20	23.73	500.00	100.0	V	348.00	6
1371.00	---	33.56	54.00	20.44	500.00	200.0	H	246.00	7
1440.13	---	36.55	54.00	17.45	500.00	100.0	V	66.00	7
1956.38	47.81	---	68.20	20.39	500.00	100.0	V	357.00	9
2665.13	50.03	---	68.20	18.17	500.00	200.0	H	184.00	11
2813.00	---	38.27	54.00	15.73	500.00	100.0	V	331.00	11
3207.63	50.72	---	68.20	17.48	500.00	200.0	V	11.00	12
3987.25	---	39.56	54.00	14.44	500.00	200.0	V	0.00	13
5392.50	---	41.89	54.00	12.11	500.00	200.0	V	41.00	15
5559.63	54.02	---	68.20	14.18	500.00	200.0	V	148.00	15
7748.88	---	46.90	54.00	7.10	500.00	200.0	V	155.00	22
7759.38	58.40	---	68.20	9.80	500.00	200.0	V	74.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

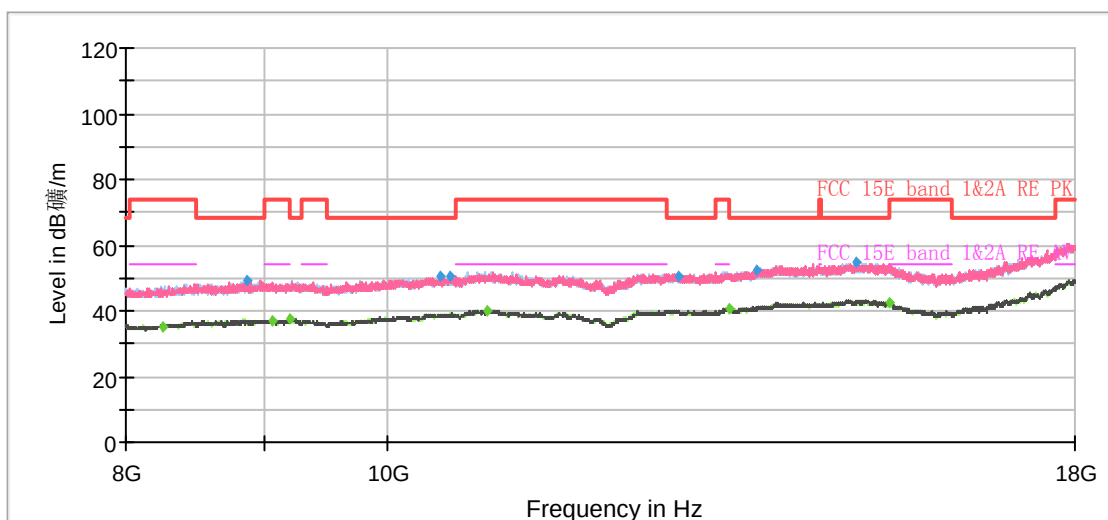


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8253.75	---	35.22	54.00	18.78	500.00	200.0	V	101.00	-3
8866.25	49.24	---	68.20	18.96	500.00	200.0	H	12.00	-3
9072.50	---	37.16	54.00	16.84	500.00	100.0	V	357.00	-2
9197.50	---	37.38	54.00	16.62	500.00	100.0	H	119.00	-2
10472.50	50.33	---	68.20	17.87	500.00	200.0	H	149.00	0
10552.50	50.75	---	68.20	17.45	500.00	100.0	H	1.00	0
10886.25	---	40.21	54.00	13.79	500.00	100.0	V	93.00	0
12820.00	50.68	---	68.20	17.52	500.00	100.0	V	344.00	2
13391.25	---	40.76	54.00	13.24	500.00	200.0	H	348.00	3
13718.75	52.11	---	68.20	16.09	500.00	100.0	H	112.00	4
14927.50	54.51	---	68.20	13.69	500.00	100.0	V	359.00	5
15368.75	---	42.38	54.00	11.62	500.00	100.0	H	154.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH54

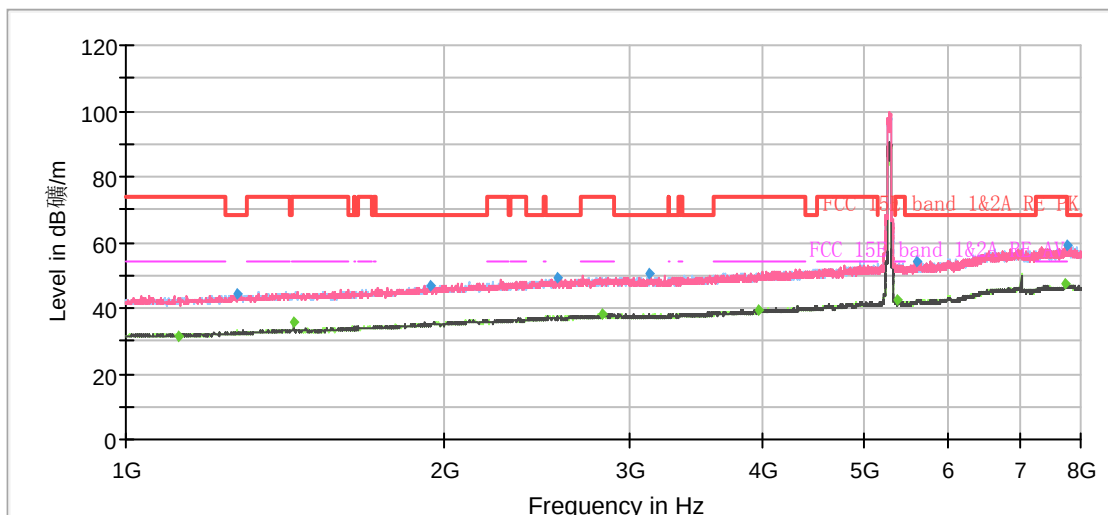


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1123.38	---	31.69	54.00	22.32	500.00	200.0	H	95.00	6
1275.63	44.40	---	68.20	23.80	500.00	100.0	V	261.00	6
1440.13	---	35.96	54.00	18.04	500.00	100.0	V	0.00	7
1938.00	46.85	---	68.20	21.35	500.00	100.0	V	82.00	9
2564.50	49.01	---	68.20	19.19	500.00	200.0	H	229.00	11
2820.00	---	38.01	54.00	15.99	500.00	200.0	H	348.00	11
3123.63	50.25	---	68.20	17.95	500.00	100.0	H	134.00	12
3965.38	---	39.59	54.00	14.42	500.00	200.0	H	115.00	13
5367.13	---	42.44	54.00	11.56	500.00	200.0	V	74.00	15
5601.63	54.42	---	68.20	13.78	500.00	100.0	V	146.00	16
7739.25	---	47.24	54.00	6.76	500.00	100.0	V	61.00	22
7752.38	59.00	---	68.20	9.20	500.00	100.0	H	2.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

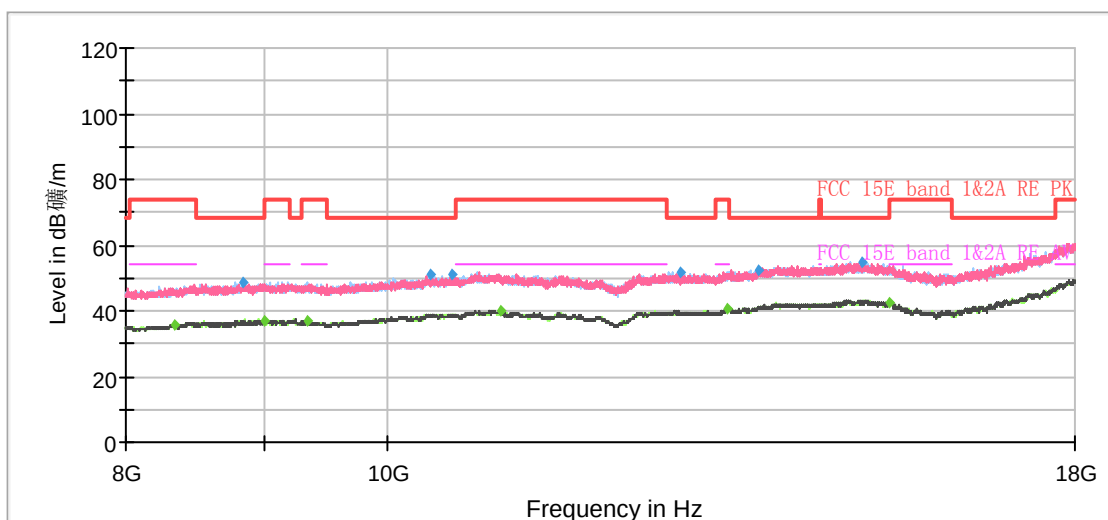


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8345.00	---	35.49	54.00	18.51	500.00	100.0	V	190.00	-3
8848.75	48.51	---	68.20	19.69	500.00	100.0	H	4.00	-3
9012.50	---	37.05	54.00	16.95	500.00	200.0	H	161.00	-2
9343.75	---	36.99	54.00	17.01	500.00	200.0	V	144.00	-2
10371.25	50.85	---	68.20	17.35	500.00	100.0	H	268.00	0
10565.00	51.12	---	68.20	17.08	500.00	200.0	H	232.00	0
11013.75	---	40.23	54.00	13.77	500.00	100.0	H	24.00	0
12855.00	51.69	---	68.20	16.51	500.00	200.0	H	268.00	2
13370.00	---	40.76	54.00	13.24	500.00	200.0	V	273.00	3
13727.50	52.46	---	68.20	15.74	500.00	100.0	H	216.00	4
15003.75	54.74	---	68.20	13.46	500.00	200.0	H	0.00	5
15365.00	---	42.43	54.00	11.57	500.00	100.0	V	290.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH62

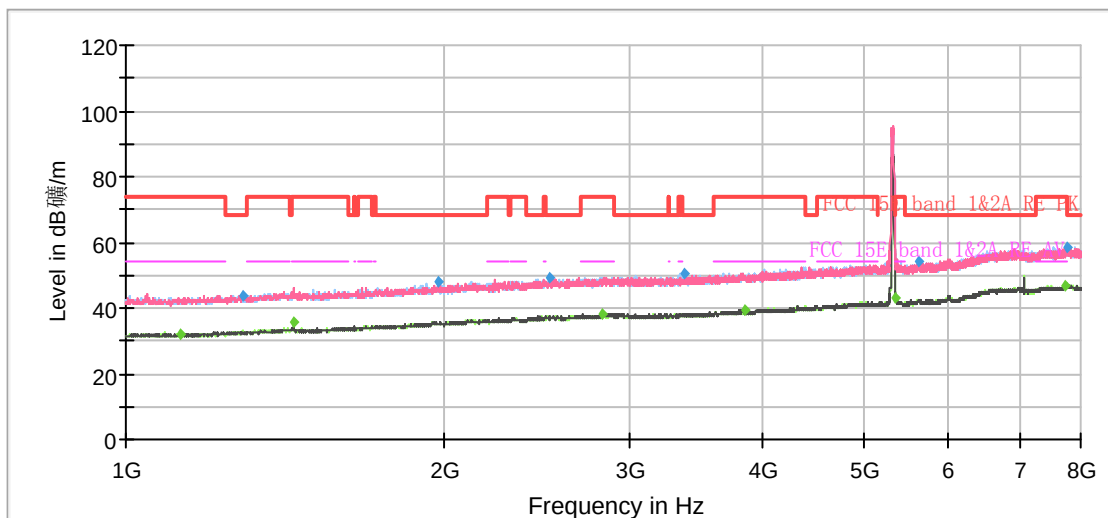


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1126.88	---	31.93	54.00	22.07	500.00	100.0	H	0.00	6
1289.63	43.92	---	68.20	24.28	500.00	200.0	V	79.00	6
1440.13	---	35.99	54.00	18.01	500.00	100.0	V	0.00	7
1977.38	47.96	---	68.20	20.24	500.00	100.0	V	0.00	9
2519.00	49.22	---	68.20	18.98	500.00	100.0	V	208.00	11
2824.38	---	38.27	54.00	15.73	500.00	200.0	H	356.00	11
3376.50	50.63	---	68.20	17.57	500.00	100.0	H	24.00	12
3848.13	---	39.64	54.00	14.36	500.00	200.0	V	0.00	13
5351.38	---	42.84	54.00	11.16	500.00	200.0	V	265.00	15
5631.38	53.89	---	68.20	14.31	500.00	200.0	H	213.00	16
7727.88	---	47.02	54.00	6.98	500.00	100.0	V	291.00	22
7768.13	58.47	---	68.20	9.73	500.00	200.0	H	273.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

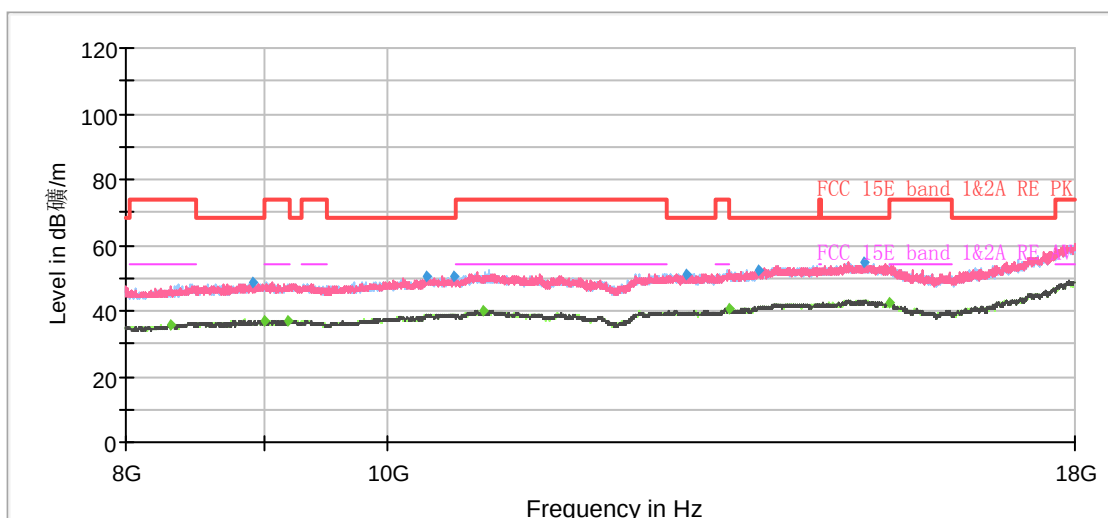


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8310.00	---	35.44	54.00	18.56	500.00	100.0	H	200.00	-3
8920.00	48.41	---	68.20	19.79	500.00	100.0	H	4.00	-2
9007.50	---	37.15	54.00	16.85	500.00	100.0	V	165.00	-2
9185.00	---	37.01	54.00	16.99	500.00	200.0	H	263.00	-2
10343.75	50.25	---	68.20	17.95	500.00	200.0	V	4.00	0
10593.75	50.42	---	68.20	17.78	500.00	200.0	V	177.00	0
10852.50	---	40.09	54.00	13.91	500.00	100.0	H	250.00	0
12921.25	50.95	---	68.20	17.25	500.00	200.0	H	0.00	2
13386.25	---	40.51	54.00	13.49	500.00	200.0	H	358.00	3
13727.50	52.31	---	68.20	15.89	500.00	200.0	V	359.00	4
15030.00	54.68	---	68.20	13.52	500.00	200.0	H	0.00	5
15351.25	---	42.52	54.00	11.49	500.00	200.0	H	171.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH102

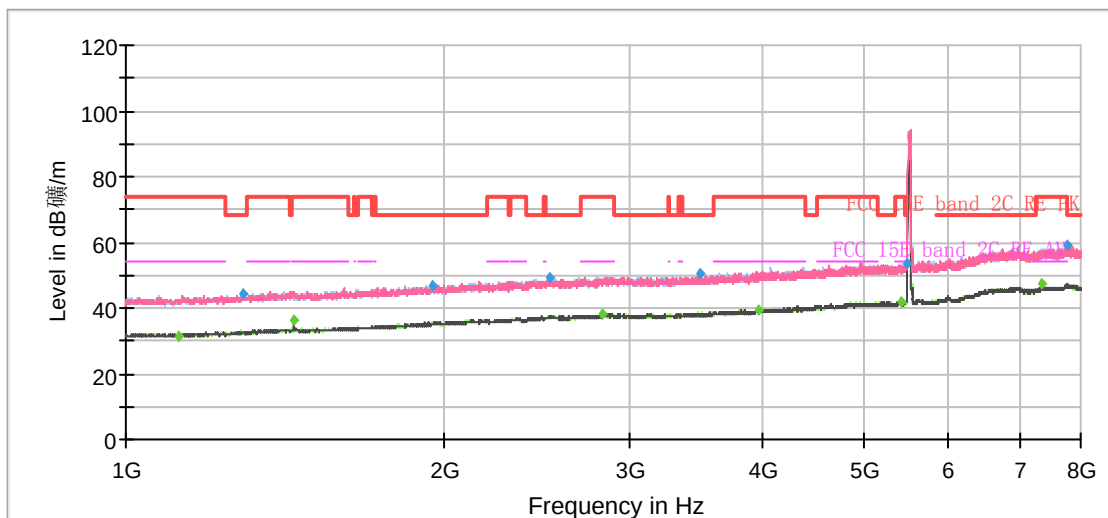


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1122.50	---	31.67	54.00	22.33	500.00	200.0	V	124.00	6
1289.63	44.46	---	68.20	23.74	500.00	100.0	V	332.00	6
1440.13	---	36.30	54.00	17.70	500.00	100.0	V	67.00	7
1952.88	47.07	---	68.20	21.13	500.00	200.0	V	84.00	9
2514.63	49.17	---	68.20	19.03	500.00	200.0	V	131.00	11
2823.50	---	37.93	54.00	16.07	500.00	200.0	H	155.00	11
3493.75	50.71	---	68.20	17.49	500.00	100.0	V	26.00	12
3966.25	---	39.51	54.00	14.49	500.00	100.0	V	244.00	13
5415.25	---	41.96	54.00	12.04	500.00	200.0	H	0.00	15
5469.50	53.69	---	68.20	14.51	500.00	200.0	H	39.00	15
7347.25	---	47.56	54.00	6.44	500.00	100.0	V	0.00	21
7781.25	59.08	---	68.20	9.12	500.00	100.0	H	1.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

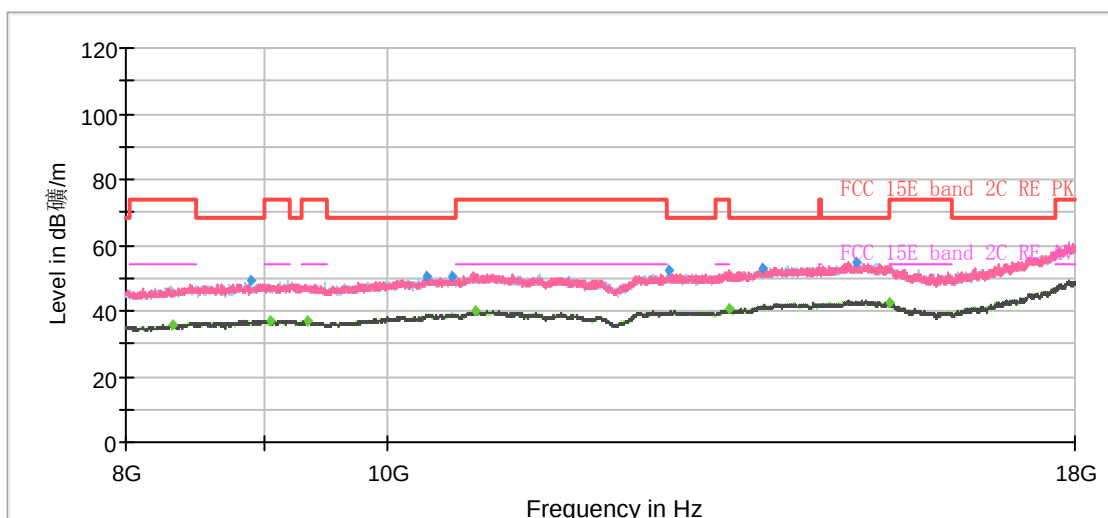


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8332.50	---	35.47	54.00	18.53	500.00	200.0	H	223.00	-3
8900.00	49.06	---	68.20	19.14	500.00	200.0	H	260.00	-3
9052.50	---	36.96	54.00	17.04	500.00	100.0	V	321.00	-2
9343.75	---	37.05	54.00	16.95	500.00	200.0	V	2.00	-2
10338.75	50.66	---	68.20	17.54	500.00	100.0	V	115.00	0
10578.75	50.47	---	68.20	17.73	500.00	100.0	V	50.00	0
10788.75	---	40.04	54.00	13.96	500.00	100.0	H	206.00	0
12721.25	52.53	---	68.20	15.67	500.00	200.0	H	260.00	3
13393.75	---	40.66	54.00	13.34	500.00	100.0	H	206.00	3
13787.50	52.78	---	68.20	15.42	500.00	200.0	V	20.00	4
14933.75	54.49	---	68.20	13.71	500.00	100.0	H	21.00	5
15363.75	---	42.69	54.00	11.31	500.00	100.0	V	78.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH118

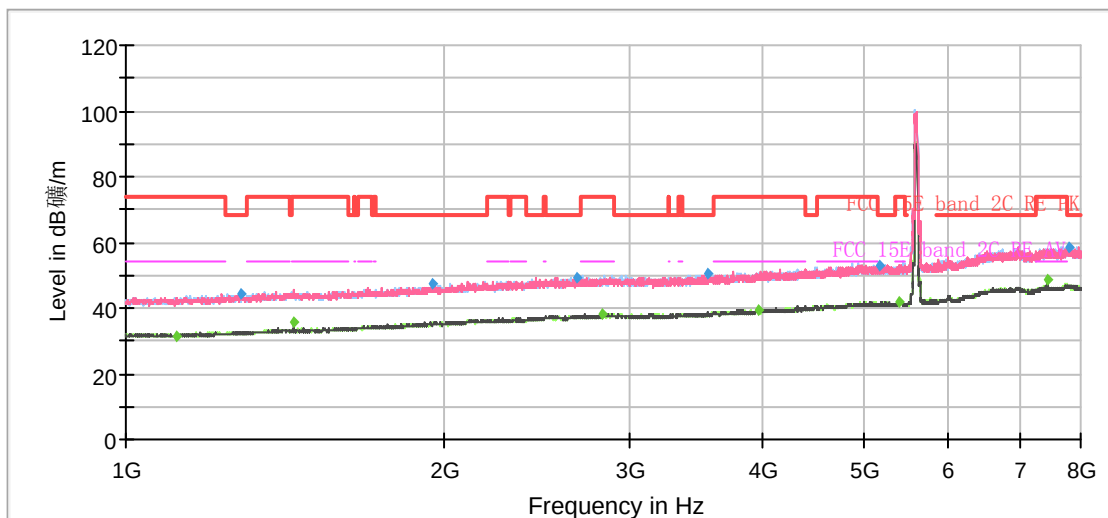


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1114.63	---	31.68	54.00	22.32	500.00	200.0	H	116.00	5
1284.38	44.31	---	68.20	23.89	500.00	200.0	H	278.00	6
1440.13	---	35.71	54.00	18.29	500.00	100.0	V	82.00	7
1947.63	47.23	---	68.20	20.97	500.00	100.0	H	18.00	9
2666.88	49.22	---	68.20	18.98	500.00	100.0	H	9.00	11
2824.38	---	38.09	54.00	15.91	500.00	200.0	V	51.00	11
3555.88	50.36	---	68.20	17.84	500.00	100.0	H	23.00	12
3964.50	---	39.66	54.00	14.34	500.00	100.0	H	142.00	13
5172.00	53.06	---	68.20	15.14	500.00	100.0	H	2.00	15
5382.88	---	41.82	54.00	12.18	500.00	200.0	H	0.00	15
7454.00	---	48.79	54.00	5.21	500.00	100.0	V	20.00	21
7785.63	58.45	---	68.20	9.75	500.00	100.0	V	353.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

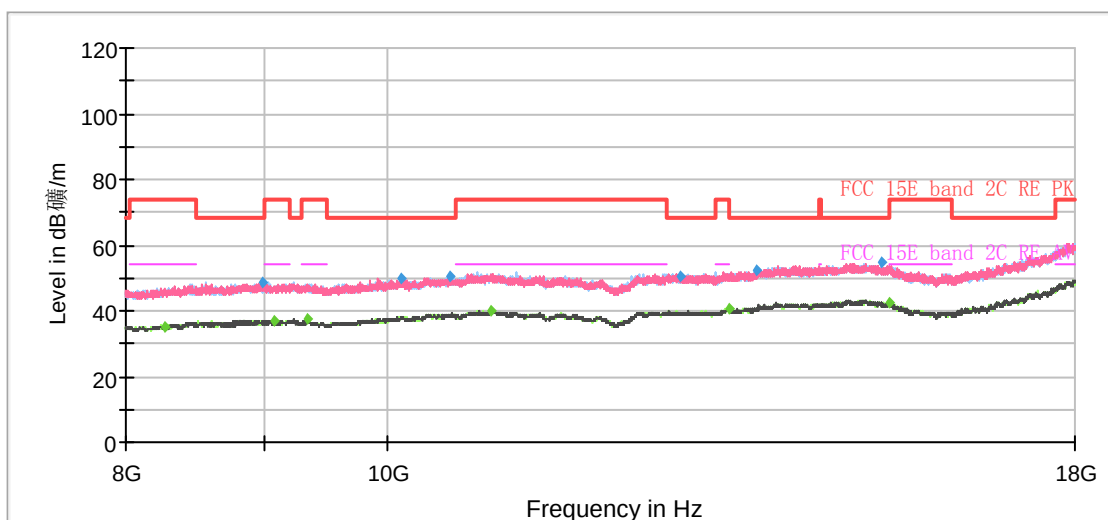


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8272.50	---	35.26	54.00	18.74	500.00	200.0	H	356.00	-3
8992.50	48.65	---	68.20	19.55	500.00	100.0	V	349.00	-2
9075.00	---	37.10	54.00	16.90	500.00	200.0	H	355.00	-2
9342.50	---	37.52	54.00	16.49	500.00	200.0	H	251.00	-2
10117.50	50.04	---	68.20	18.16	500.00	100.0	V	0.00	-1
10551.25	50.75	---	68.20	17.45	500.00	200.0	V	106.00	0
10927.50	---	39.87	54.00	14.13	500.00	100.0	V	253.00	0
12850.00	50.26	---	68.20	17.94	500.00	100.0	H	4.00	2
13388.75	---	40.42	54.00	13.58	500.00	100.0	H	3.00	3
13703.75	52.31	---	68.20	15.89	500.00	100.0	V	35.00	4
15257.50	54.50	---	68.20	13.70	500.00	200.0	H	0.00	4
15370.00	---	42.63	54.00	11.37	500.00	200.0	H	0.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH134

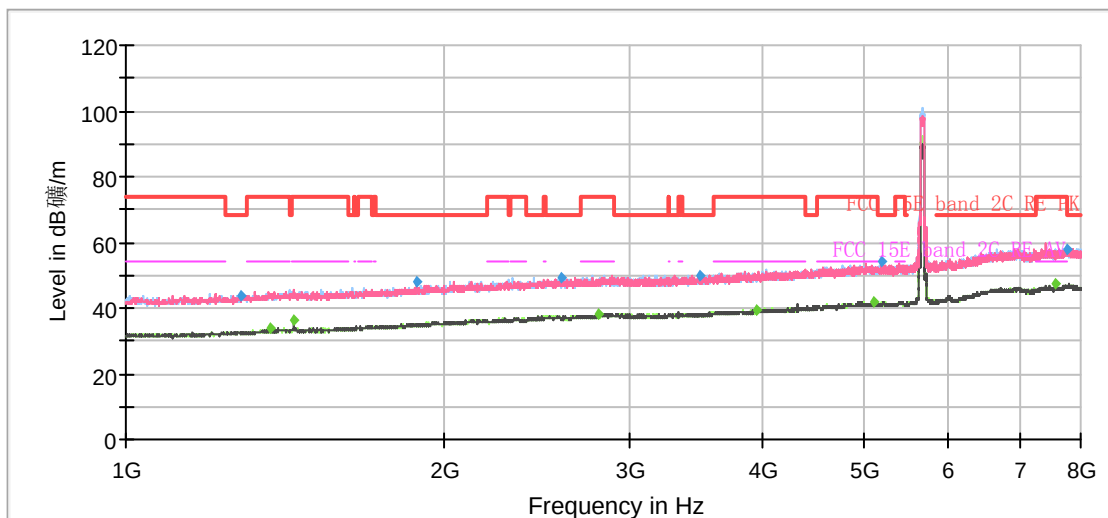


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1287.88	43.98	---	68.20	24.22	500.00	200.0	V	272.00	6
1370.13	---	33.71	54.00	20.29	500.00	100.0	V	183.00	7
1440.13	---	36.08	54.00	17.92	500.00	100.0	V	95.00	7
1887.25	47.75	---	68.20	20.46	500.00	200.0	V	0.00	9
2586.38	49.31	---	68.20	18.89	500.00	200.0	H	357.00	11
2800.75	---	38.03	54.00	15.97	500.00	200.0	V	10.00	11
3485.00	50.08	---	68.20	18.12	500.00	200.0	H	76.00	12
3946.13	---	39.63	54.00	14.37	500.00	100.0	H	170.00	13
5105.50	---	42.06	54.00	11.94	500.00	100.0	V	298.00	15
5194.75	54.18	---	68.20	14.02	500.00	100.0	V	81.00	15
7559.88	---	47.31	54.00	6.69	500.00	100.0	H	6.00	22
7755.88	58.14	---	68.20	10.06	500.00	200.0	H	334.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

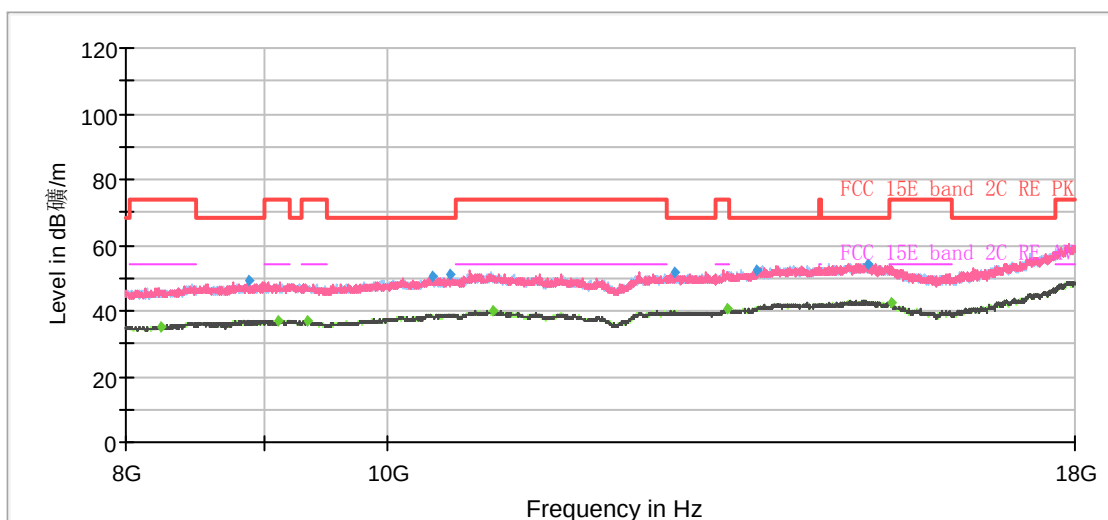


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8243.75	---	35.20	54.00	18.80	500.00	100.0	V	245.00	-3
8887.50	49.47	---	68.20	18.73	500.00	200.0	H	345.00	-3
9108.75	---	37.07	54.00	16.93	500.00	200.0	V	158.00	-2
9340.00	---	37.08	54.00	16.92	500.00	200.0	H	212.00	-2
10388.75	50.23	---	68.20	17.97	500.00	200.0	V	340.00	-1
10545.00	51.18	---	68.20	17.02	500.00	100.0	H	81.00	0
10950.00	---	40.02	54.00	13.98	500.00	200.0	V	108.00	0
12776.25	51.98	---	68.20	16.22	500.00	100.0	V	0.00	2
13376.25	---	40.36	54.00	13.64	500.00	100.0	V	344.00	3
13705.00	52.47	---	68.20	15.73	500.00	100.0	V	355.00	4
15077.50	54.35	---	68.20	13.85	500.00	100.0	V	252.00	5
15381.25	---	42.73	54.00	11.27	500.00	200.0	H	247.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH142

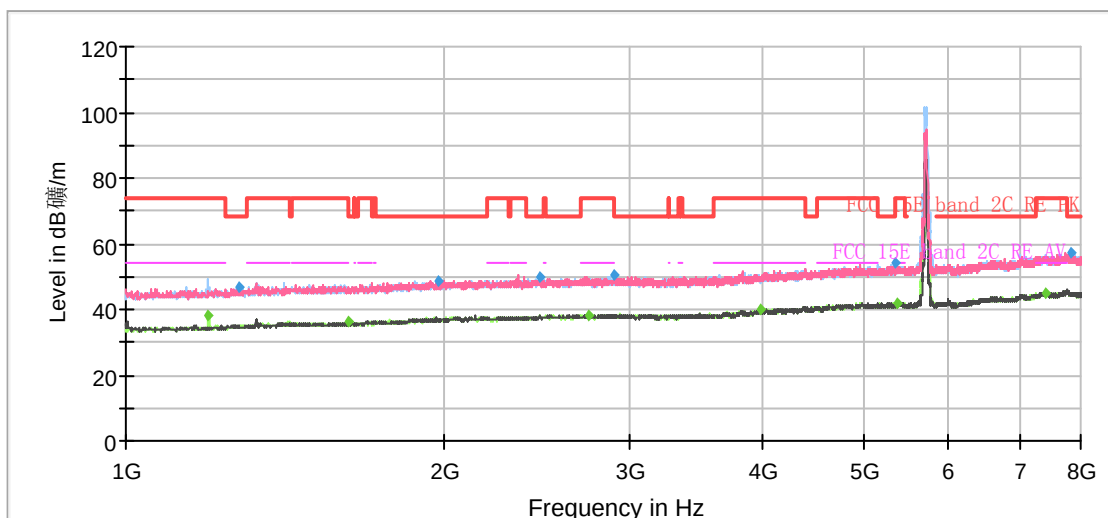


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1196.88	---	38.04	54.00	15.96	500.00	200.0	H	116.00	-9
1281.75	46.58	---	68.20	21.62	500.00	100.0	V	239.00	-8
1623.88	---	36.44	54.00	17.56	500.00	200.0	V	5.00	-6
1973.00	48.84	---	68.20	19.36	500.00	100.0	H	0.00	-5
2464.75	49.64	---	68.20	18.56	500.00	200.0	H	0.00	-4
2736.88	---	38.35	54.00	15.65	500.00	100.0	V	0.00	-4
2900.50	50.29	---	68.20	17.91	500.00	200.0	V	127.00	-3
3982.88	---	39.70	54.00	14.30	500.00	100.0	H	72.00	-1
5342.63	54.08	---	68.20	14.12	500.00	200.0	H	352.00	3
5372.38	---	42.07	54.00	11.93	500.00	200.0	H	204.00	3
7425.13	---	44.98	54.00	9.02	500.00	200.0	H	88.00	7
7845.13	57.15	---	68.20	11.05	500.00	100.0	V	0.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

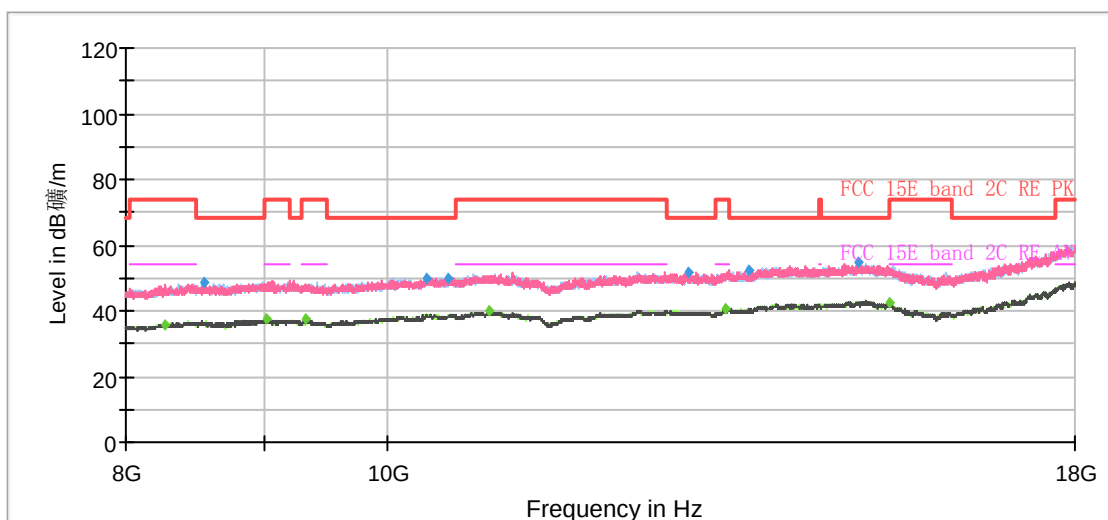


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8277.50	---	35.75	54.00	18.25	500.00	100.0	H	78.00	-3
8548.75	48.53	---	68.20	19.67	500.00	100.0	H	5.00	-3
9021.25	---	37.49	54.00	16.51	500.00	100.0	H	2.00	-2
9332.50	---	37.27	54.00	16.73	500.00	100.0	H	8.00	-2
10343.75	50.04	---	68.20	18.16	500.00	200.0	H	257.00	0
10538.75	50.14	---	68.20	18.06	500.00	200.0	H	235.00	0
10916.25	---	39.74	54.00	14.26	500.00	100.0	V	327.00	0
12941.25	51.76	---	68.20	16.44	500.00	100.0	V	100.00	2
13362.50	---	40.59	54.00	13.41	500.00	100.0	H	50.00	3
13615.00	52.37	---	68.20	15.83	500.00	100.0	V	242.00	3
14948.75	54.53	---	68.20	13.67	500.00	100.0	H	36.00	5
15357.50	---	42.16	54.00	11.84	500.00	100.0	V	358.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH151

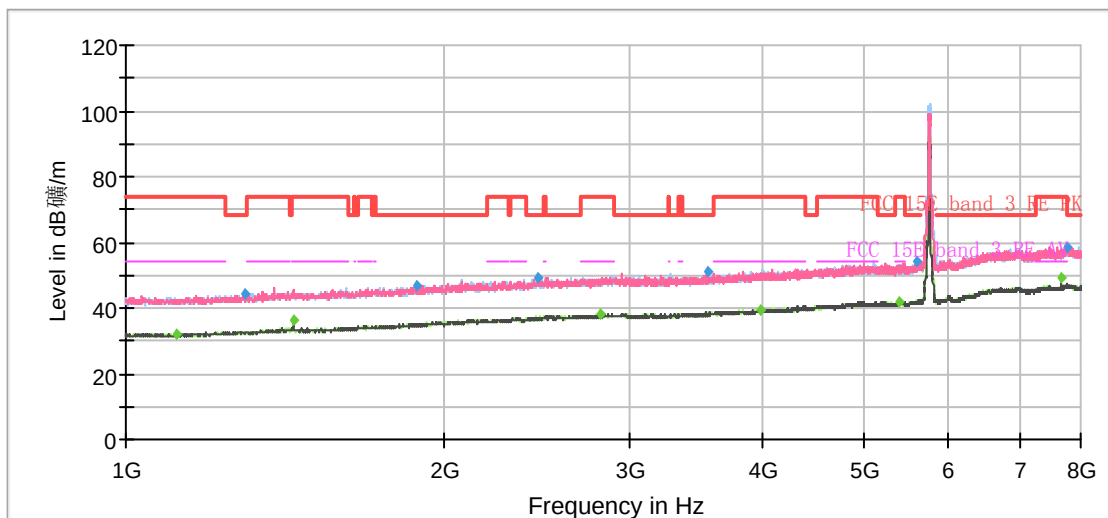


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1119.00	---	32.00	54.00	22.00	500.00	100.0	V	223.00	6
1297.50	44.09	---	68.20	24.11	500.00	200.0	H	294.00	6
1440.13	---	36.07	54.00	17.93	500.00	100.0	V	0.00	7
1883.75	46.84	---	68.20	21.36	500.00	200.0	H	353.00	9
2455.13	49.46	---	68.20	18.74	500.00	200.0	V	231.00	11
2805.13	---	37.98	54.00	16.02	500.00	100.0	H	93.00	11
3551.50	50.82	---	68.20	17.38	500.00	200.0	V	190.00	12
3982.88	---	39.49	54.00	14.51	500.00	200.0	H	294.00	13
5395.13	---	42.01	54.00	11.99	500.00	200.0	H	294.00	15
5603.38	53.85	---	68.20	14.35	500.00	100.0	H	354.00	16
7673.63	---	49.24	54.00	4.76	500.00	100.0	H	32.00	22
7769.00	58.60	---	68.20	9.60	500.00	100.0	V	0.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

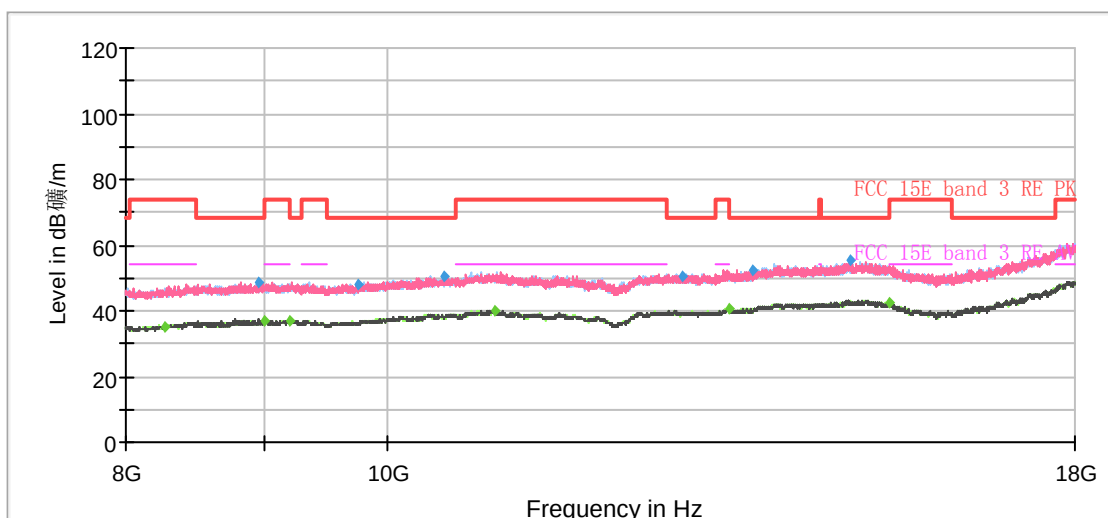


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8272.50	---	35.23	54.00	18.77	500.00	100.0	H	244.00	-3
8955.00	48.61	---	68.20	19.59	500.00	200.0	V	176.00	-2
9011.25	---	37.15	54.00	16.85	500.00	100.0	H	6.00	-2
9198.75	---	36.98	54.00	17.02	500.00	100.0	V	80.00	-2
9761.25	48.18	---	68.20	20.02	500.00	100.0	H	237.00	-2
10508.75	50.26	---	68.20	17.94	500.00	100.0	H	4.00	0
10963.75	---	40.19	54.00	13.81	500.00	200.0	V	279.00	0
12873.75	50.70	---	68.20	17.50	500.00	200.0	V	154.00	2
13396.25	---	40.56	54.00	13.44	500.00	200.0	H	59.00	3
13657.50	52.43	---	68.20	15.77	500.00	100.0	H	74.00	3
14845.00	55.15	---	68.20	13.05	500.00	100.0	V	101.00	5
15351.25	---	42.58	54.00	11.42	500.00	100.0	H	3.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH159

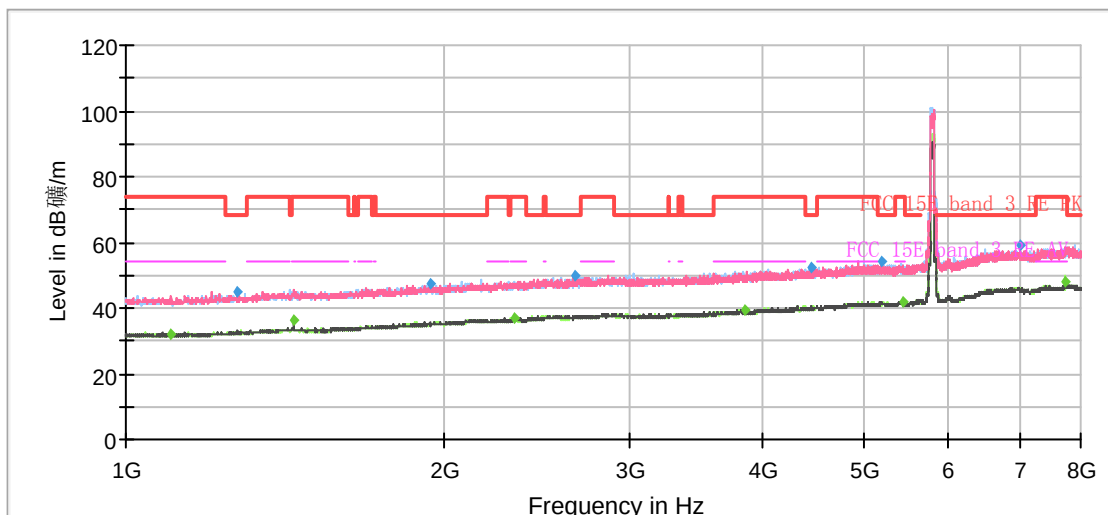


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1105.00	---	32.11	54.00	21.89	500.00	200.0	H	334.00	5
1276.50	44.80	---	68.20	23.40	500.00	100.0	V	75.00	6
1440.13	---	36.53	54.00	17.47	500.00	100.0	V	359.00	7
1938.00	47.09	---	68.20	21.11	500.00	200.0	V	214.00	9
2327.38	---	36.82	54.00	17.18	500.00	100.0	V	149.00	11
2664.25	49.59	---	68.20	18.61	500.00	100.0	H	288.00	11
3849.00	---	39.11	54.00	14.89	500.00	200.0	V	173.00	13
4439.63	52.28	---	68.20	15.92	500.00	200.0	V	0.00	14
5176.38	54.33	---	68.20	13.87	500.00	200.0	V	52.00	15
5428.38	---	41.92	54.00	12.08	500.00	200.0	V	146.00	15
7006.88	58.82	---	68.20	9.38	500.00	100.0	V	329.00	20
7727.00	---	48.21	54.00	5.79	500.00	100.0	V	316.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

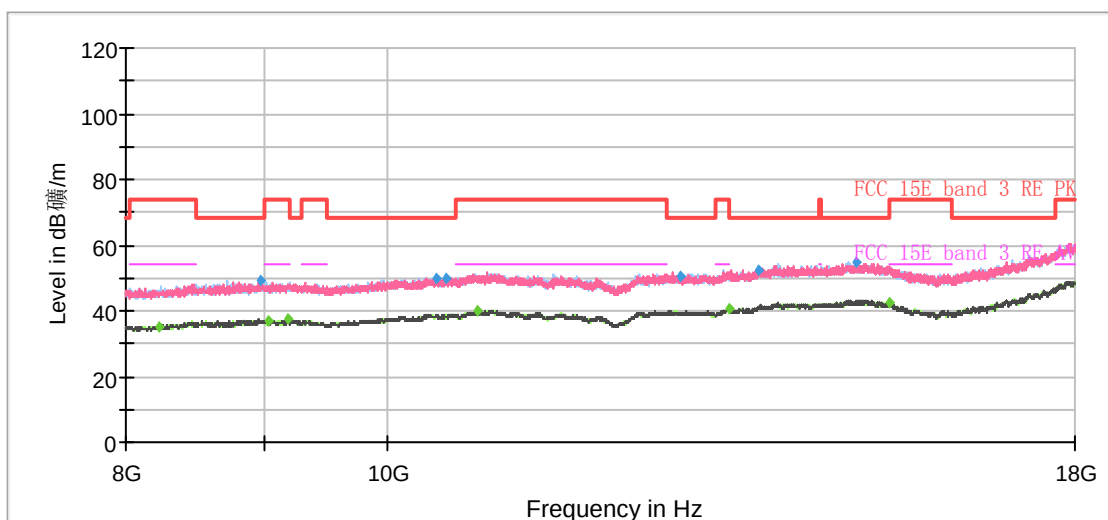


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8225.00	---	35.28	54.00	18.72	500.00	100.0	H	144.00	-3
8977.50	48.97	---	68.20	19.23	500.00	100.0	V	358.00	-2
9040.00	---	37.07	54.00	16.93	500.00	200.0	H	0.00	-2
9185.00	---	37.24	54.00	16.76	500.00	100.0	H	108.00	-2
10426.25	50.00	---	68.20	18.20	500.00	200.0	H	259.00	-1
10521.25	50.04	---	68.20	18.16	500.00	100.0	H	14.00	0
10803.75	---	40.15	54.00	13.85	500.00	100.0	H	14.00	0
12858.75	50.34	---	68.20	17.86	500.00	200.0	V	7.00	2
13390.00	---	40.47	54.00	13.53	500.00	200.0	V	1.00	3
13731.25	52.50	---	68.20	15.70	500.00	200.0	H	355.00	4
14943.75	54.75	---	68.20	13.45	500.00	200.0	H	0.00	5
15350.00	---	42.50	54.00	11.50	500.00	200.0	V	157.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11ac (VHT80) CH42

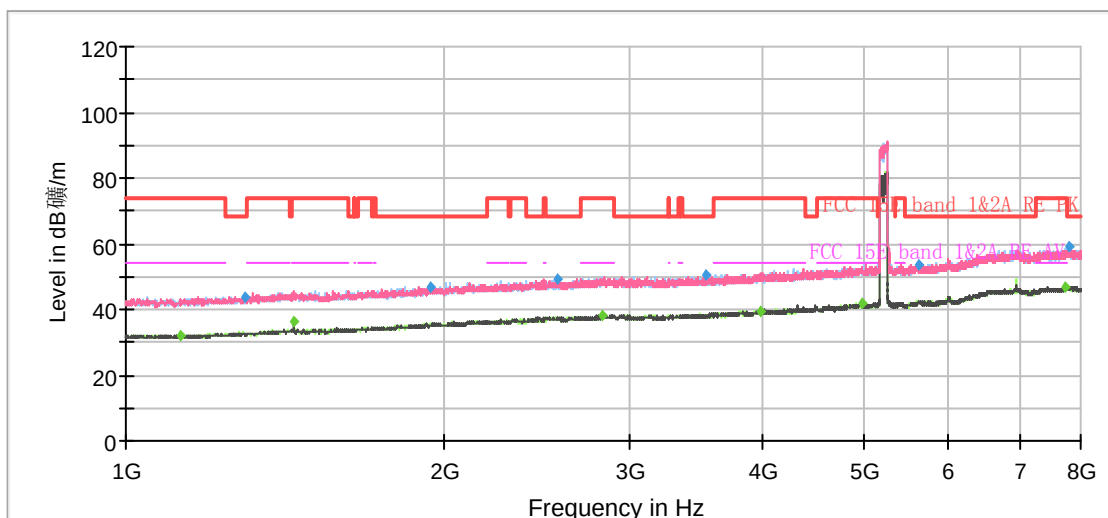


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1124.25	---	32.01	54.00	21.99	500.00	100.0	H	6.00	6
1294.88	43.87	---	68.20	24.33	500.00	100.0	V	266.00	6
1440.13	---	36.22	54.00	17.78	500.00	100.0	V	94.00	7
1944.13	47.05	---	68.20	21.15	500.00	100.0	V	349.00	9
2564.50	49.27	---	68.20	18.93	500.00	100.0	V	349.00	11
2826.13	---	38.19	54.00	15.81	500.00	200.0	H	293.00	11
3541.00	50.24	---	68.20	17.96	500.00	100.0	H	87.00	12
3983.75	---	39.57	54.00	14.43	500.00	100.0	H	15.00	13
4959.38	---	42.05	54.00	11.95	500.00	100.0	H	224.00	15
5619.13	53.69	---	68.20	14.51	500.00	200.0	V	334.00	16
7734.00	---	47.03	54.00	6.97	500.00	100.0	V	226.00	22
7804.00	58.88	---	68.20	9.32	500.00	200.0	H	355.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

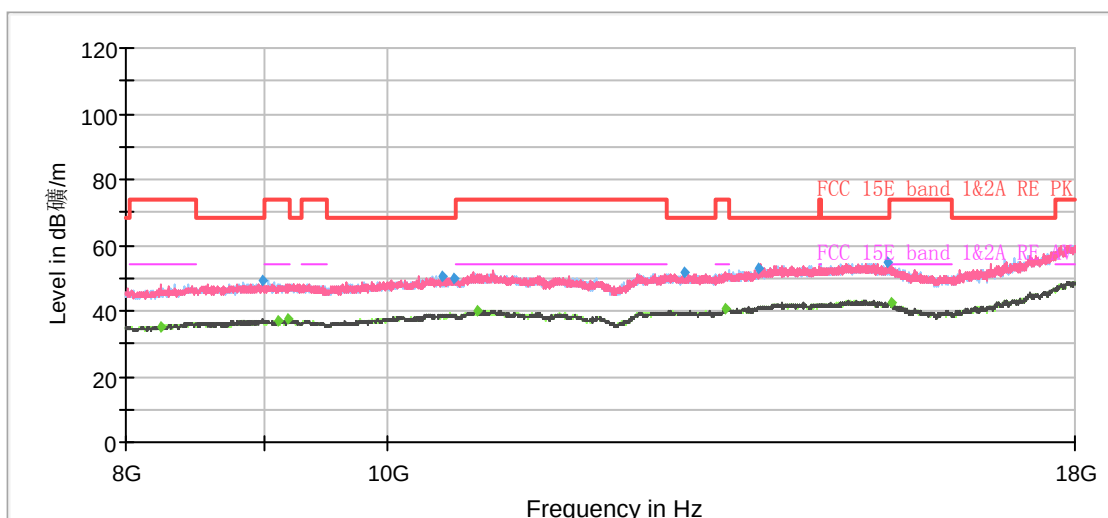


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8245.00	---	35.30	54.00	18.70	500.00	100.0	H	9.00	-3
8988.75	49.01	---	68.20	19.19	500.00	100.0	H	87.00	-2
9107.50	---	37.02	54.00	16.98	500.00	100.0	H	17.00	-2
9183.75	---	37.25	54.00	16.75	500.00	200.0	H	337.00	-2
10480.00	50.49	---	68.20	17.71	500.00	200.0	H	258.00	0
10592.50	50.10	---	68.20	18.10	500.00	200.0	H	359.00	0
10801.25	---	39.91	54.00	14.09	500.00	200.0	V	223.00	0
12891.25	51.44	---	68.20	16.76	500.00	200.0	V	188.00	2
13358.75	---	40.68	54.00	13.32	500.00	200.0	V	216.00	3
13733.75	52.97	---	68.20	15.23	500.00	200.0	V	50.00	4
15346.25	54.97	---	68.20	13.23	500.00	100.0	V	353.00	4
15381.25	---	42.39	54.00	11.61	500.00	200.0	H	343.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT80) CH58

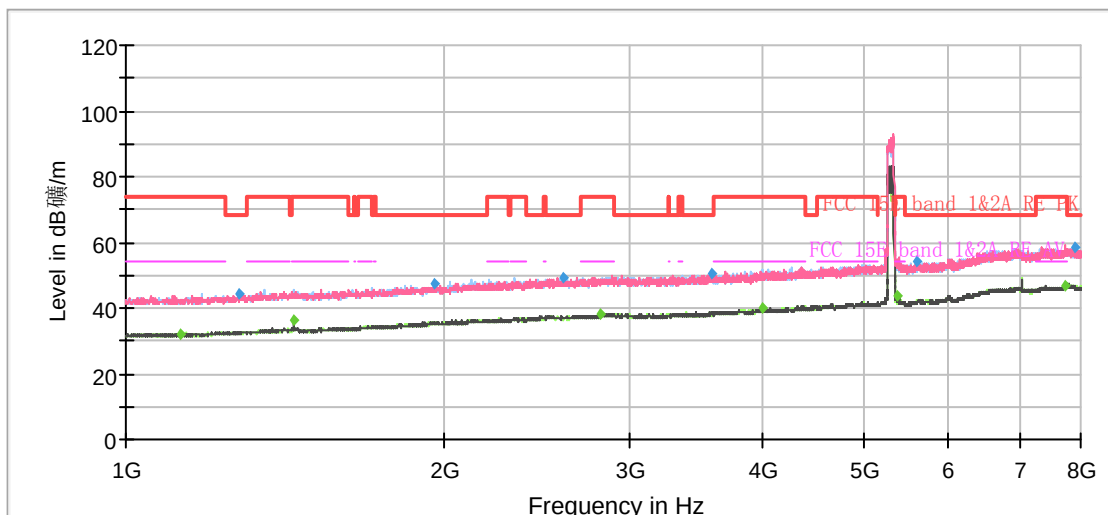


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1128.63	---	31.88	54.00	22.12	500.00	200.0	H	190.00	6
1278.25	44.07	---	68.20	24.13	500.00	200.0	H	277.00	6
1440.13	---	36.11	54.00	17.89	500.00	100.0	V	358.00	7
1959.00	47.17	---	68.20	21.03	500.00	200.0	H	330.00	9
2594.25	49.49	---	68.20	18.71	500.00	200.0	V	1.00	11
2805.13	---	37.99	54.00	16.01	500.00	100.0	V	219.00	11
3574.25	50.35	---	68.20	17.85	500.00	200.0	V	0.00	12
3995.13	---	39.79	54.00	14.21	500.00	100.0	H	34.00	13
5375.00	---	43.73	54.00	10.27	500.00	200.0	V	80.00	15
5592.88	54.00	---	68.20	14.20	500.00	200.0	V	11.00	16
7736.63	---	46.91	54.00	7.09	500.00	200.0	H	291.00	22
7888.88	58.52	---	68.20	9.68	500.00	200.0	V	16.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

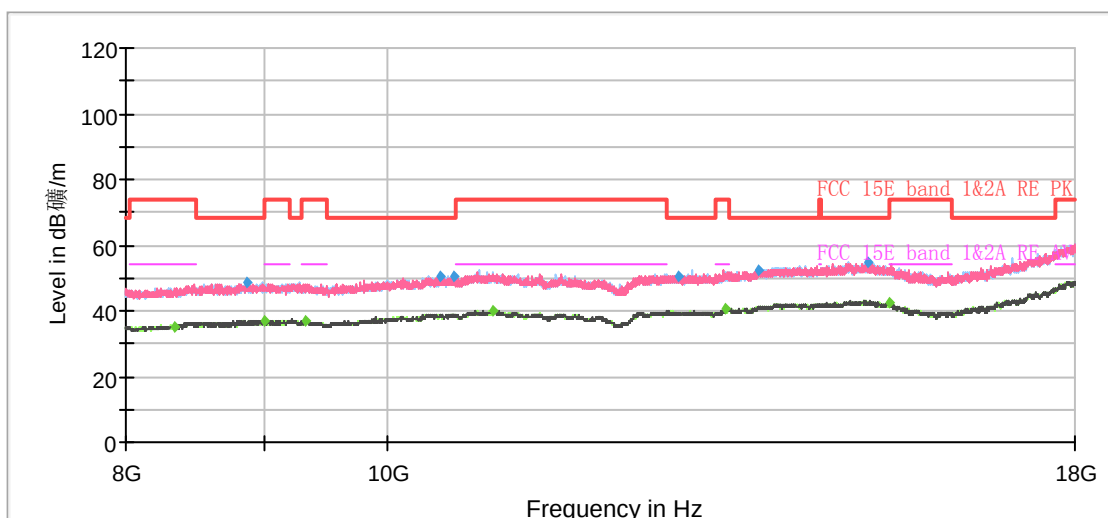


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8340.00	---	35.25	54.00	18.75	500.00	200.0	H	359.00	-3
8867.50	48.63	---	68.20	19.57	500.00	200.0	H	359.00	-3
9011.25	---	37.22	54.00	16.78	500.00	100.0	V	258.00	-2
9328.75	---	36.92	54.00	17.08	500.00	100.0	H	0.00	-2
10465.00	50.35	---	68.20	17.85	500.00	200.0	V	2.00	-1
10580.00	50.65	---	68.20	17.55	500.00	200.0	H	6.00	0
10953.75	---	40.12	54.00	13.88	500.00	100.0	H	127.00	0
12821.25	50.69	---	68.20	17.51	500.00	200.0	H	151.00	2
13345.00	---	40.60	54.00	13.40	500.00	100.0	V	230.00	3
13727.50	52.36	---	68.20	15.84	500.00	200.0	V	266.00	4
15078.75	54.56	---	68.20	13.64	500.00	200.0	V	105.00	5
15372.50	---	42.40	54.00	11.60	500.00	200.0	V	105.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT80) CH106

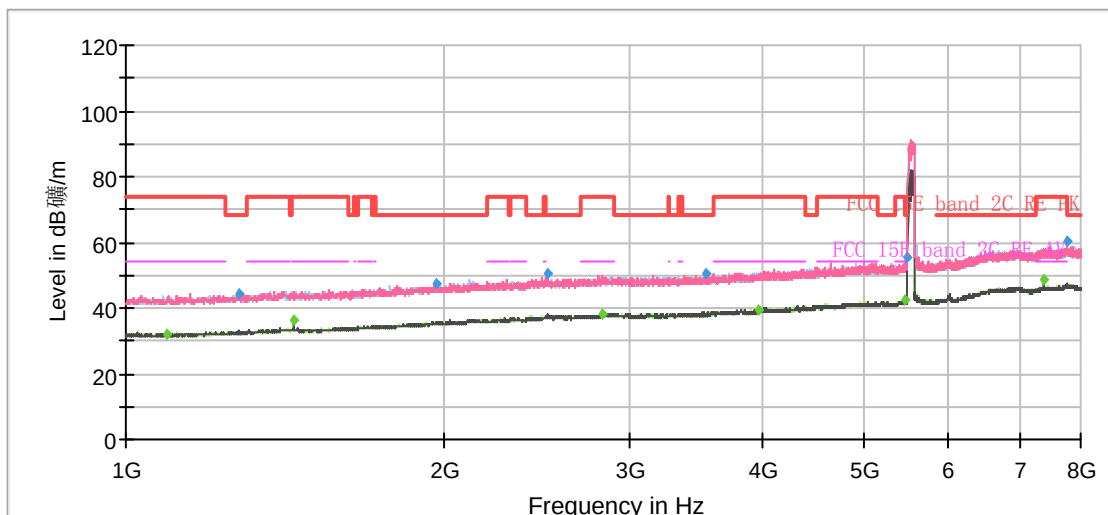


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1094.50	---	31.83	54.00	22.17	500.00	100.0	V	0.00	5
1281.75	44.49	---	68.20	23.71	500.00	200.0	V	3.00	6
1440.13	---	36.09	54.00	17.91	500.00	100.0	V	115.00	7
1967.75	47.17	---	68.20	21.03	500.00	100.0	V	204.00	9
2504.13	50.19	---	68.20	18.01	500.00	200.0	V	4.00	11
2824.38	---	37.94	54.00	16.06	500.00	200.0	V	126.00	11
3535.75	50.38	---	68.20	17.82	500.00	100.0	V	293.00	12
3968.88	---	39.47	54.00	14.53	500.00	200.0	V	106.00	13
5459.88	---	42.24	54.00	11.76	500.00	200.0	V	78.00	15
5468.63	55.29	---	68.20	12.91	500.00	200.0	V	9.00	15
7373.50	---	48.35	54.00	5.65	500.00	100.0	H	26.00	21
7755.88	60.15	---	68.20	8.05	500.00	200.0	H	261.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

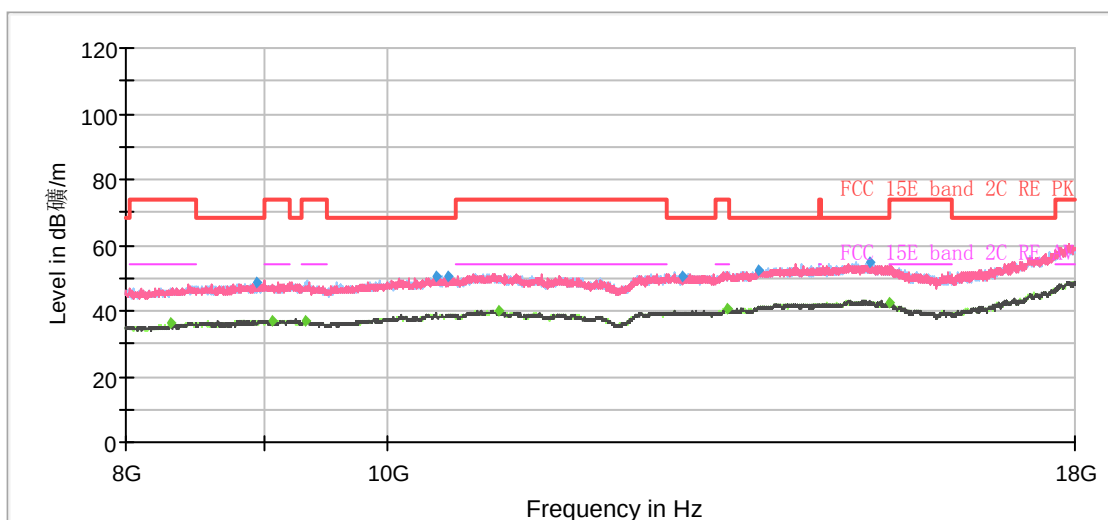


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8310.00	---	36.08	54.00	17.92	500.00	100.0	H	265.00	-3
8948.75	48.39	---	68.20	19.81	500.00	100.0	H	143.00	-2
9073.75	---	37.22	54.00	16.78	500.00	200.0	V	170.00	-2
9333.75	---	37.04	54.00	16.96	500.00	100.0	H	122.00	-2
10437.50	50.68	---	68.20	17.52	500.00	200.0	V	9.00	-1
10530.00	50.47	---	68.20	17.73	500.00	100.0	H	2.00	0
10997.50	---	39.87	54.00	14.13	500.00	100.0	V	282.00	0
12873.75	50.70	---	68.20	17.50	500.00	200.0	H	94.00	2
13373.75	---	40.54	54.00	13.46	500.00	200.0	H	0.00	3
13732.50	52.41	---	68.20	15.79	500.00	200.0	H	6.00	4
15113.75	55.06	---	68.20	13.14	500.00	200.0	H	247.00	5
15355.00	---	42.45	54.00	11.55	500.00	100.0	H	122.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11ac (VHT80) CH122

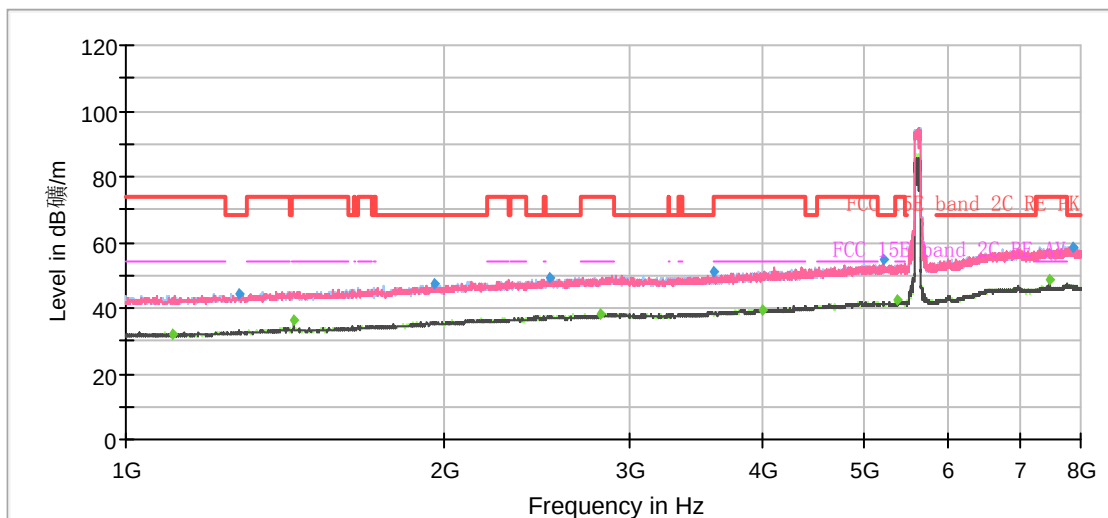


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1109.38	---	31.99	54.00	22.01	500.00	200.0	H	349.00	5
1281.75	44.26	---	68.20	23.94	500.00	200.0	V	155.00	6
1440.13	---	36.11	54.00	17.89	500.00	100.0	V	357.00	7
1955.50	47.13	---	68.20	21.07	500.00	100.0	V	357.00	9
2516.38	49.46	---	68.20	18.74	500.00	200.0	V	3.00	11
2813.88	---	38.16	54.00	15.84	500.00	200.0	H	278.00	11
3591.75	51.26	---	68.20	16.94	500.00	100.0	V	203.00	12
3996.00	---	39.55	54.00	14.45	500.00	100.0	V	237.00	13
5215.75	54.92	---	68.20	13.28	500.00	200.0	V	53.00	15
5375.00	---	42.24	54.00	11.76	500.00	100.0	V	357.00	15
7480.25	---	48.48	54.00	5.52	500.00	100.0	V	224.00	21
7879.25	58.66	---	68.20	9.54	500.00	100.0	V	0.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

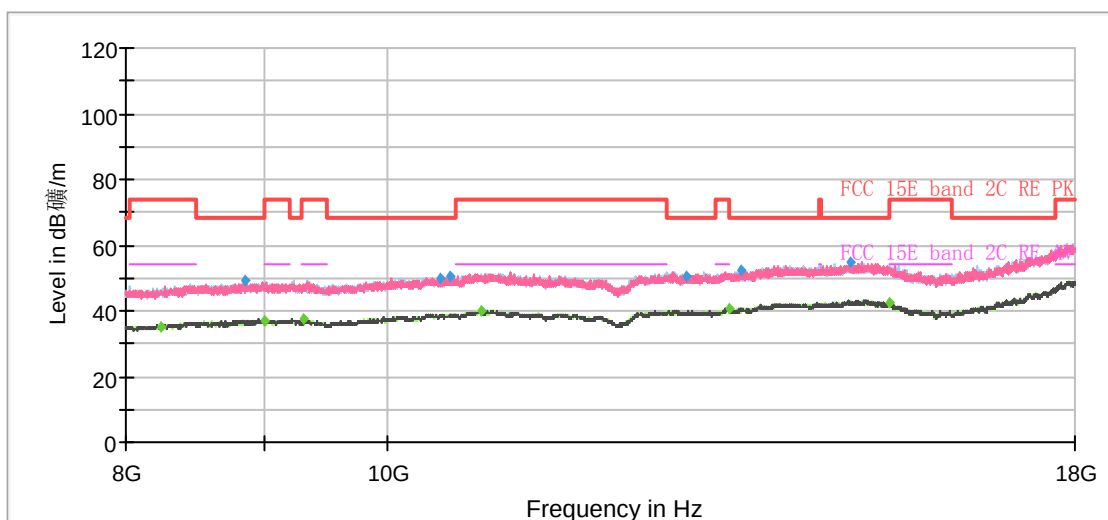


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8247.50	---	35.21	54.00	18.79	500.00	100.0	H	201.00	-3
8851.25	49.02	---	68.20	19.18	500.00	100.0	H	5.00	-3
9005.00	---	37.14	54.00	16.86	500.00	200.0	V	103.00	-2
9307.50	---	37.26	54.00	16.74	500.00	200.0	V	0.00	-2
10467.50	50.11	---	68.20	18.09	500.00	100.0	V	188.00	-1
10548.75	50.15	---	68.20	18.05	500.00	200.0	H	315.00	0
10833.75	---	40.15	54.00	13.85	500.00	100.0	V	323.00	0
12912.50	50.65	---	68.20	17.55	500.00	100.0	V	0.00	2
13396.25	---	40.59	54.00	13.41	500.00	200.0	H	0.00	3
13523.75	52.27	---	68.20	15.93	500.00	200.0	H	203.00	3
14857.50	55.07	---	68.20	13.13	500.00	200.0	V	220.00	5
15367.50	---	42.44	54.00	11.56	500.00	200.0	H	203.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11ac (VHT80) CH138

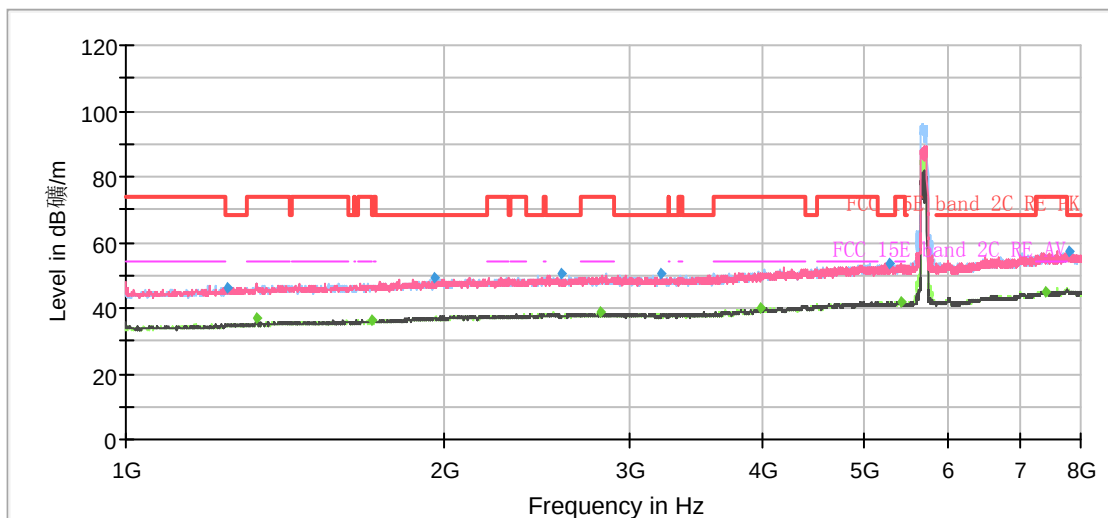


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1247.63	46.42	---	68.20	21.78	500.00	100.0	H	299.00	-8
1329.88	---	37.20	54.00	16.80	500.00	100.0	V	357.00	-8
1705.25	---	36.21	54.00	17.79	500.00	200.0	V	73.00	-6
1957.25	49.18	---	68.20	19.02	500.00	200.0	H	220.00	-5
2576.75	50.57	---	68.20	17.63	500.00	100.0	H	12.00	-4
2808.63	---	38.46	54.00	15.54	500.00	100.0	V	336.00	-3
3212.88	50.42	---	68.20	17.78	500.00	200.0	V	299.00	-3
3987.25	---	39.83	54.00	14.17	500.00	100.0	V	201.00	-1
5275.25	53.43	---	68.20	14.77	500.00	100.0	H	12.00	2
5410.88	---	41.92	54.00	12.08	500.00	200.0	H	357.00	3
7410.25	---	44.97	54.00	9.03	500.00	100.0	H	271.00	7
7789.13	57.00	---	68.20	11.20	500.00	200.0	V	169.00	7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

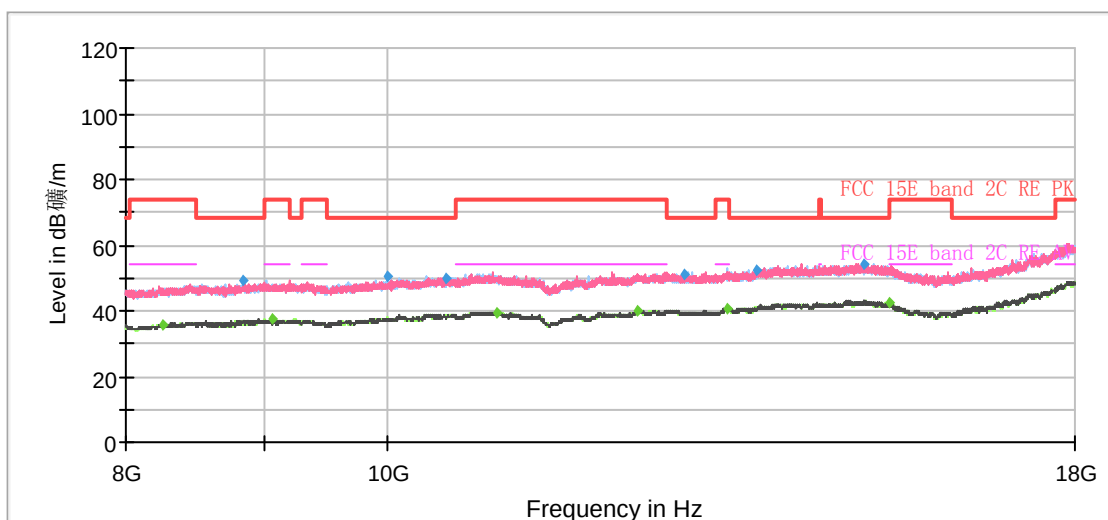


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8258.75	---	35.43	54.00	18.57	500.00	100.0	H	257.00	-3
8847.50	49.14	---	68.20	19.06	500.00	200.0	H	220.00	-3
9068.75	---	37.42	54.00	16.58	500.00	100.0	H	0.00	-2
10003.75	50.37	---	68.20	17.83	500.00	200.0	H	347.00	-1
10515.00	49.92	---	68.20	18.28	500.00	200.0	H	141.00	0
10981.25	---	39.67	54.00	14.33	500.00	100.0	H	142.00	0
12381.25	---	40.05	54.00	13.95	500.00	200.0	V	84.00	1
12882.50	51.35	---	68.20	16.85	500.00	100.0	H	150.00	2
13381.25	---	40.77	54.00	13.23	500.00	100.0	V	138.00	3
13722.50	52.41	---	68.20	15.79	500.00	200.0	V	287.00	4
15030.00	54.39	---	68.20	13.81	500.00	100.0	V	13.00	5
15350.00	---	42.36	54.00	11.64	500.00	100.0	V	138.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11ac (VHT80) CH155

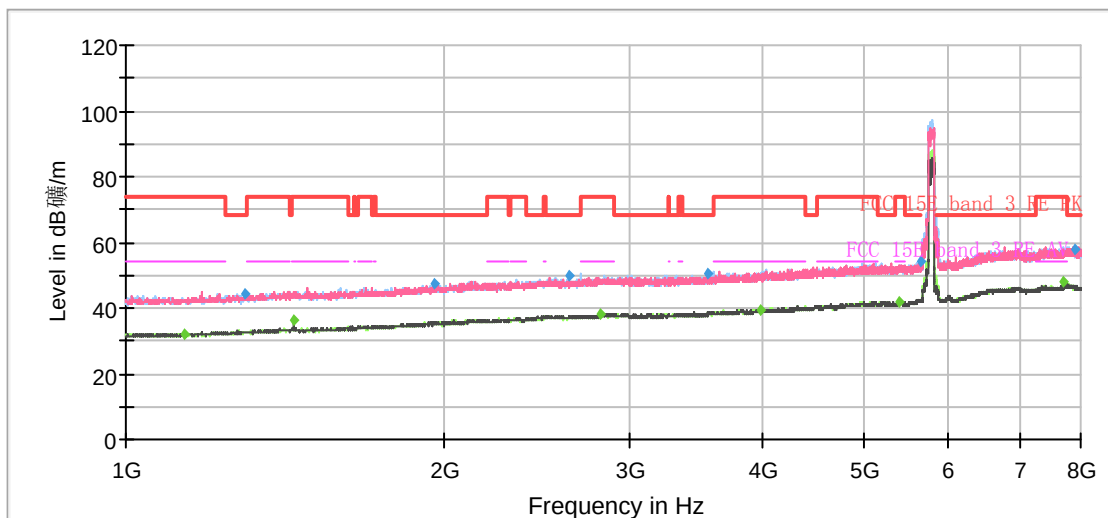


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1134.75	---	32.09	54.00	21.91	500.00	200.0	V	359.00	6
1298.38	44.29	---	68.20	23.91	500.00	100.0	V	46.00	6
1440.13	---	36.50	54.00	17.50	500.00	100.0	V	60.00	7
1954.63	47.41	---	68.20	20.79	500.00	200.0	V	245.00	9
2628.38	49.80	---	68.20	18.40	500.00	100.0	V	32.00	11
2806.00	---	37.98	54.00	16.02	500.00	100.0	V	10.00	11
3551.50	50.60	---	68.20	17.60	500.00	100.0	V	26.00	12
3982.88	---	39.61	54.00	14.39	500.00	200.0	H	279.00	13
5395.13	---	41.85	54.00	12.15	500.00	100.0	V	3.00	15
5634.00	53.91	---	68.20	14.29	500.00	100.0	H	102.00	16
7700.75	---	47.79	54.00	6.21	500.00	100.0	H	338.00	22
7909.88	57.83	---	68.20	10.37	500.00	200.0	H	36.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

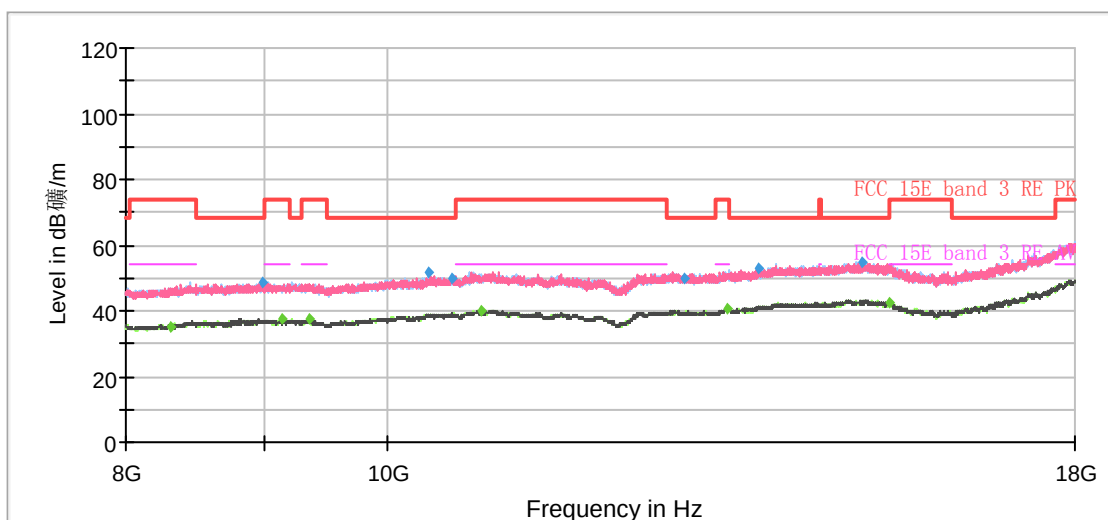

Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8308.75	---	35.27	54.00	18.73	500.00	100.0	H	9.00	-3
8992.50	48.64	---	68.20	19.56	500.00	100.0	V	272.00	-2
9148.75	---	37.23	54.00	16.77	500.00	100.0	V	350.00	-2
9362.50	---	37.27	54.00	16.73	500.00	100.0	V	300.00	-2
10357.50	51.86	---	68.20	16.34	500.00	100.0	H	303.00	0
10572.50	50.12	---	68.20	18.08	500.00	200.0	V	20.00	0
10835.00	---	40.06	54.00	13.94	500.00	200.0	H	28.00	0
12891.25	49.99	---	68.20	18.21	500.00	200.0	H	203.00	2
13381.25	---	40.65	54.00	13.35	500.00	100.0	V	146.00	3
13735.00	52.70	---	68.20	15.50	500.00	100.0	V	354.00	4
14997.50	54.82	---	68.20	13.38	500.00	200.0	V	6.00	5
15366.25	---	42.51	54.00	11.49	500.00	100.0	H	122.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels, 802.11n (HT40), Channel 151 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


A font (Level in dB μ V/)in the test plot =(level in dB μ V/m)

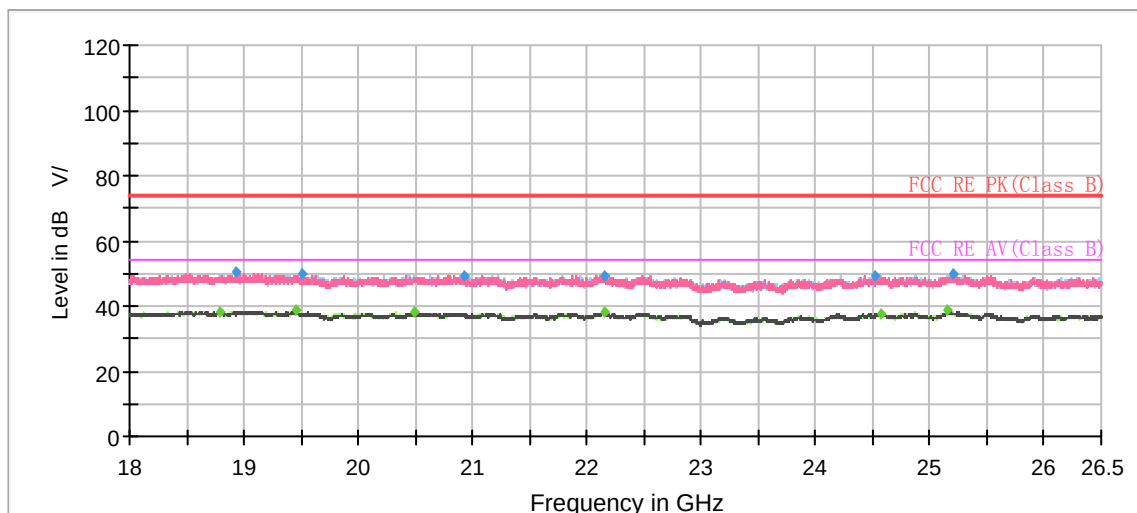

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
18784.13	---	38.42	54.00	15.58	500.00	100.0	H	253.00	-2
18922.25	50.22	---	74.00	23.78	500.00	100.0	V	265.00	-2
19447.13	---	38.65	54.00	15.35	500.00	100.0	H	190.00	-1
19502.38	49.68	---	74.00	24.32	500.00	200.0	V	10.00	-1
20485.19	---	37.95	54.00	16.05	500.00	200.0	H	318.00	0
20920.81	49.49	---	74.00	24.51	500.00	100.0	V	314.00	0
22146.94	---	38.35	54.00	15.65	500.00	100.0	H	35.00	1
22154.38	49.42	---	74.00	24.58	500.00	200.0	H	0.00	1
24511.00	49.21	---	74.00	24.79	500.00	100.0	V	255.00	3
24576.88	---	37.70	54.00	16.30	500.00	100.0	H	35.00	3
25157.00	---	38.62	54.00	15.38	500.00	100.0	H	94.00	3
25201.63	49.99	---	74.00	24.01	500.00	100.0	V	339.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

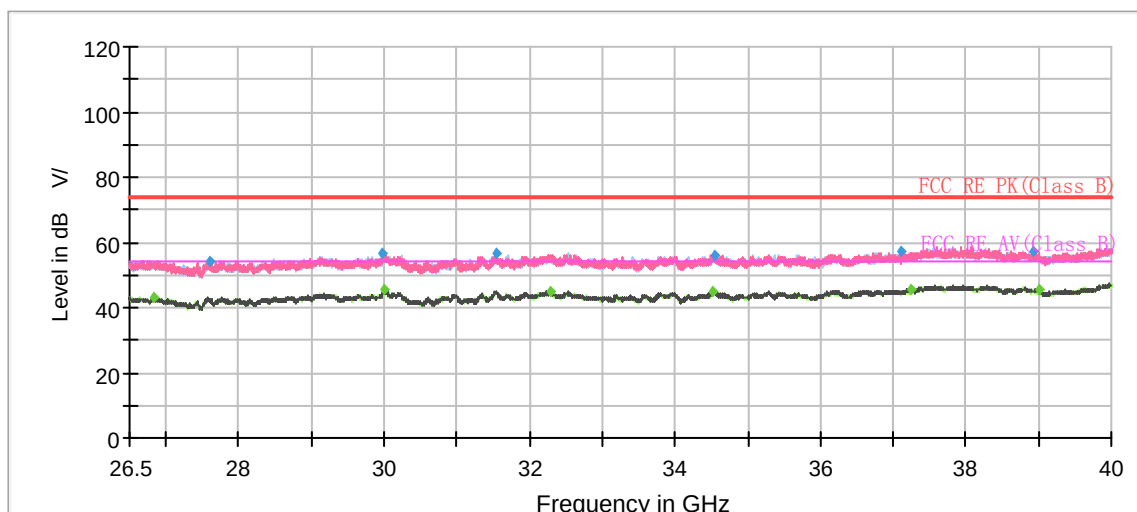

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
26834.13	---	43.22	54.00	10.78	500.00	100.0	V	1.00	7
27593.50	54.37	---	74.00	19.63	500.00	100.0	V	145.00	6
29971.19	56.48	---	74.00	17.52	500.00	100.0	V	0.00	7
30010.00	---	45.25	54.00	8.75	500.00	100.0	H	174.00	7
31528.75	56.40	---	74.00	17.60	500.00	100.0	V	189.00	8
32294.88	---	44.89	54.00	9.11	500.00	100.0	V	249.00	8
34527.44	---	44.96	54.00	9.04	500.00	100.0	V	243.00	8
34551.06	56.28	---	74.00	17.72	500.00	200.0	H	200.00	8
37119.44	57.46	---	74.00	16.54	500.00	100.0	H	10.00	10
37244.31	---	45.80	54.00	8.20	500.00	200.0	V	125.00	11
38933.50	57.28	---	74.00	16.72	500.00	200.0	V	11.00	10
38995.94	---	45.73	54.00	8.27	500.00	100.0	V	0.00	10

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.6. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

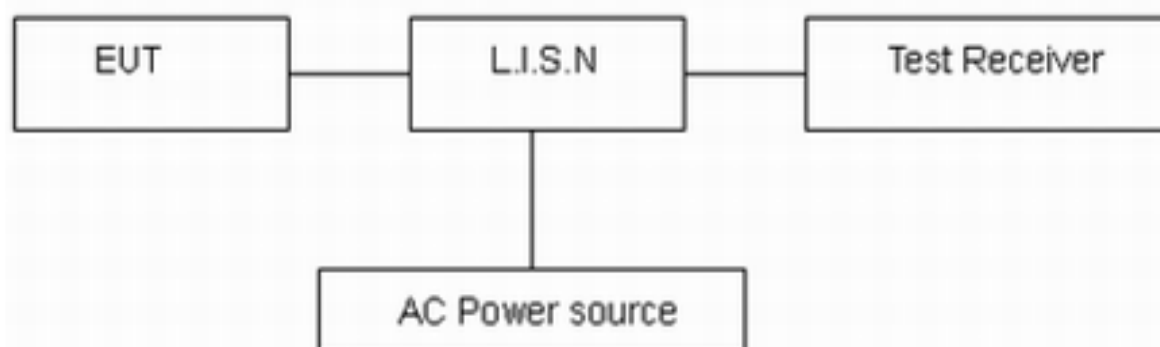

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11n (HT40), Channel 151 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

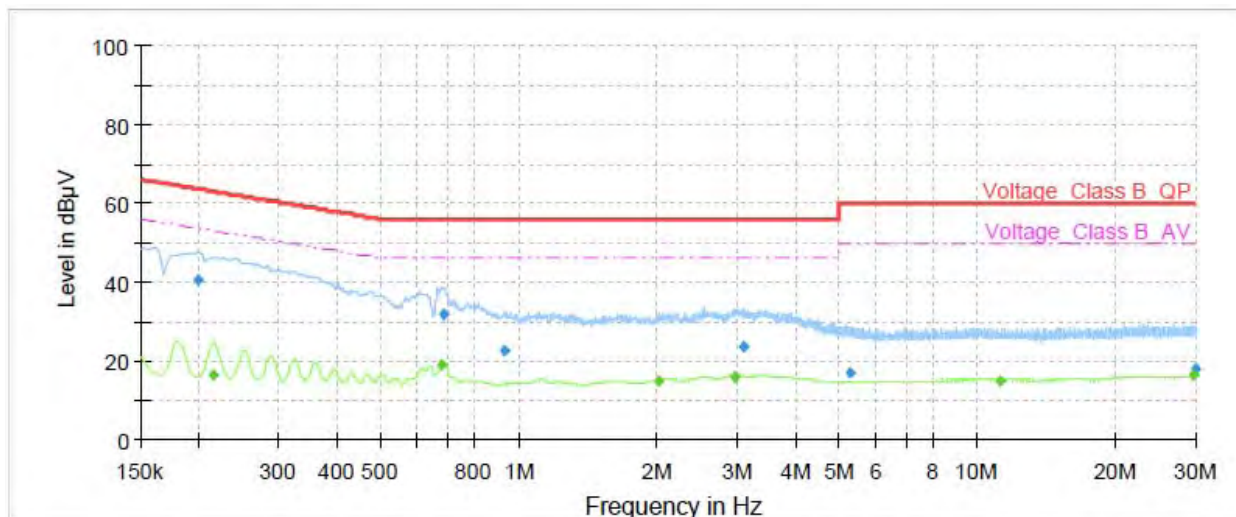

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.20	40.38	---	63.63	23.25	1000.00	9.000	L1	ON	21
0.22	---	16.29	53.00	36.71	1000.00	9.000	L1	ON	21
0.68	---	19.05	46.00	26.95	1000.00	9.000	L1	ON	20
0.69	31.71	---	56.00	24.29	1000.00	9.000	L1	ON	20
0.93	22.64	---	56.00	33.36	1000.00	9.000	L1	ON	20
2.02	---	14.75	46.00	31.25	1000.00	9.000	L1	ON	20
2.97	---	16.13	46.00	29.87	1000.00	9.000	L1	ON	19
3.10	23.51	---	56.00	32.49	1000.00	9.000	L1	ON	19
5.27	16.90	---	60.00	43.10	1000.00	9.000	L1	ON	19
11.20	---	14.98	50.00	35.02	1000.00	9.000	L1	ON	20
29.83	---	16.15	50.00	33.85	1000.00	9.000	L1	ON	20
29.96	17.76	---	60.00	42.24	1000.00	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

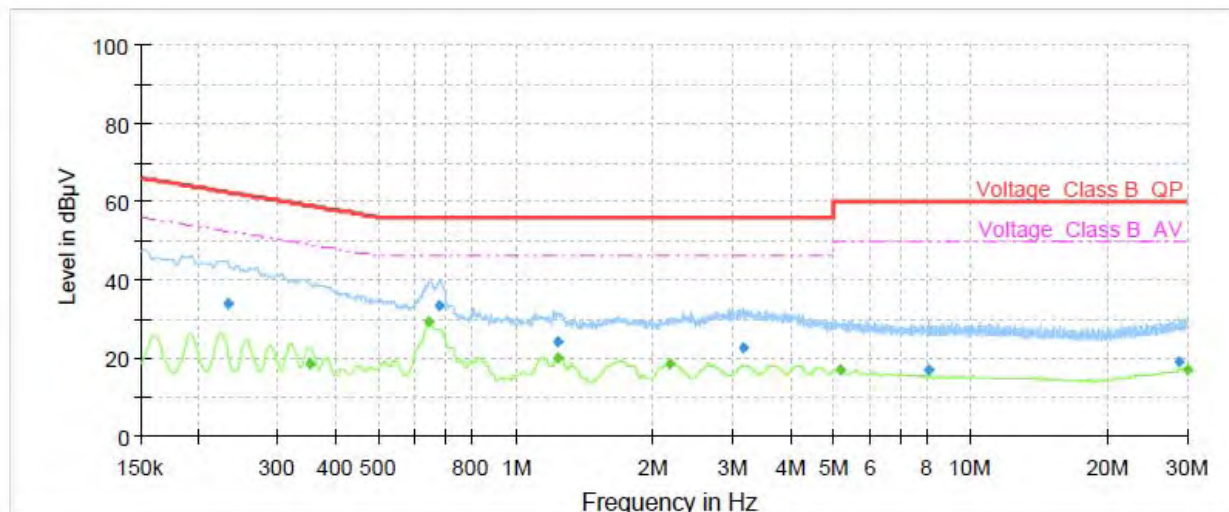

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.23	34.08	---	62.41	28.33	1000.00	9.000	N	ON	21
0.35	---	18.49	48.96	30.47	1000.00	9.000	N	ON	21
0.64	---	29.46	46.00	16.54	1000.00	9.000	N	ON	20
0.68	33.38	---	56.00	22.62	1000.00	9.000	N	ON	20
1.23	24.18	---	56.00	31.82	1000.00	9.000	N	ON	20
1.24	---	20.06	46.00	25.94	1000.00	9.000	N	ON	20
2.18	---	18.29	46.00	27.71	1000.00	9.000	N	ON	20
3.16	22.61	---	56.00	33.39	1000.00	9.000	N	ON	19
5.15	---	16.93	50.00	33.07	1000.00	9.000	N	ON	19
8.10	16.94	---	60.00	43.06	1000.00	9.000	N	ON	20
28.74	18.95	---	60.00	41.05	1000.00	9.000	N	ON	20
30.00	---	17.11	50.00	32.89	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



6. Main Test Instruments

Date of Testing: May 22, 2022 ~ June 7, 2022

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power sensor	R&S	OSP-B157W8	100924	2021-12-12	2022-12-11
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2021-12-12	2022-12-11
Radiated Emission					
EMI Test Receiver	R&S	ESCI7	100936	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV40	101297	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV30	100815	2021-12-12	2022-12-11
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Loop antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2021-07-26	2024-07-25
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	STEATITE	QSH-SL-26-40 -K-15	16779	2019-12-24	2022-12-23
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2020-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	102389	2021-06-04	2022-06-03
Software	R&S	EMC32	10.35.10	/	/

Date of Testing: June 23, 2022

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power sensor	R&S	OSP-B157W8	100924	2021-12-12	2022-12-11
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2021-12-12	2022-12-11

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.