



FCC

RF Test Report

Product Name: Smart Phone

Model Number: NAM-LX9

Report No.: SYBH(Z-RF)20210816008001-2001

FCC ID: 2ATEYNAM-LX9

Authorized	Name	Date
Prepared by: (Test Engineer)	Liu Xinmao	2021-09-28
Reviewed by: (Test Engineer)	Wen Hongyun	2021-09-28
Approved by: (Lab Manager)	He Hao	2021-09-28

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

Telephone: +86 769 23830808 Fax: +86 769 23837628

※ ※ Notice ※ ※

1. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named "Global Compliance and Testing Center of Huawei Technologies Co., Ltd", the both names have coexisted since 2009.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
9. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

MODIFICATION RECORD

No.	Report No	Modification Description
1	SYBH(Z-RF) 20210816008001-2001	First release.

DECLARATION

Type	Description
Multiple Models Applications	☒ The present report applies to single model.
	☐ The present report applies to several models. The practical measurements are performed with the model
	The present report only presents the worst test case of all modes, see relevant test results for detailed.

1 Table of contents

1	Table of contents	4
2	General Information.....	5
2.1	Test standard/s	5
2.2	Test Environment	5
2.3	Test Laboratories.....	6
2.4	Applicant and Manufacturer	6
2.5	Application details.....	6
3	Test Summary	7
3.1	Cellular Band (824-849 MHz paired with 869-894 MHz)	7
3.2	PCS Band (1850-1915 MHz paired with 1930-1995 MHz)	8
3.3	AWS Band (1710-1780 MHz paired with 2110-2180 MHz)	9
3.4	BRS&EBS Band (2496-2690 MHz paired with 2496-2690 MHz)	10
3.5	MBS Lower 700 MHz band (698-716MHz paired with 728-746 MHz)	12
3.6	Band (814-824 MHz paired with 859-869MHz)	13
4	Description of the Equipment under Test (EUT).....	14
4.1	General Description.....	14
4.2	EUT Identity	14
4.3	Technical Specification	16
5	General Test Conditions / Configurations	29
5.1	Test Modes.....	29
5.2	Test Frequency.....	30
5.3	DESCRIPTION OF TESTS.....	43
5.4	Test Setups.....	47
5.5	Test Conditions.....	50
6	Main Test Instruments.....	52
6.1	Current Test Project/Report.....	52
7	Measurement Uncertainty.....	53
8	Appendixes	54

2 General Information

2.1 Test standard/s

Applied Rules :	47 CFR FCC Part 02 47 CFR FCC Part 22 47 CFR FCC Part 24 47 CFR FCC Part 27 47 CFR FCC Part 90
Test Method :	FCC KDB 971168 D01 Power Meas License Digital Systems v03r01 ANSI C63.26

2.2 Test Environment

Temperature :	TN	15 to 30	°C during room temperature tests
Ambient Relative Humidity:	25 to 75 %		
Atmospheric Pressure:	Not applicable		
Power supply :	VL	3.6	V
	VN	3.87	V DC by Battery
	VH	4.45	V

NOTE: 1) VN= nominal voltage, VL= low extreme test voltage, VH= High extreme test voltage;

TN= normal temperature, TL= low extreme test temperature, TH= High extreme test temperature.

NOTE: 2) The values used in the test report may be stringent than the declared.

2.3 Test Laboratories

Test Location 1 :	RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.
Address of Test Location 1 :	No.2 New City Avenue, Songshan Lake Science & Technology Industry Park Dongguan, Guangdong, 523808, People's Republic of China
Temperature of Test Location 1 :	25°C
Relative humidity of Test Location 1 :	55 %

2.4 Applicant and Manufacturer

Company Name :	Huawei Device Co., Ltd.
Address :	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

2.5 Application details

2.5.1 Current Test Project/Report

Date of Receipt Sample:	2021-08-17
Start of test:	2021-08-18
End of test:	2021-09-28

3 Test Summary

3.1 Cellular Band (824-849 MHz paired with 869-894 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)	Testing location
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W.	Appendix A	Pass	Test Location 1
Peak-Average Ratio	---	Limit≤13 dB	Appendix B	Pass	Test Location 1
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass	Test Location 1
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass	Test Location 1
Band Edges Compliance	§2.1051, §22.917	FCC: ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block. Note 1): EBW is -26 dBc EBW.	Appendix E	Pass	Test Location 1
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/RefBW, from max(lowest internal frequency, 9 kHz) to min(10 * highest fundamental frequency, 40 GHz), after 1 MHz bands immediately outside and adjacent to the frequency block. (RefBW: ≥100 kHz for frequency below 1 GHz, and =1 MHz above 1 GHz)	Appendix F	Pass	Test Location 1
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/RefBW, from max(lowest internal frequency, 9 kHz) to min(10 * highest fundamental frequency, 40 GHz), after 1 MHz bands immediately outside and adjacent to the frequency block. (RefBW: ≥100 kHz for frequency below 1 GHz, and =1 MHz above 1 GHz)	Appendix G	Pass	Test Location 1
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm	Appendix H	Pass	Test Location 1

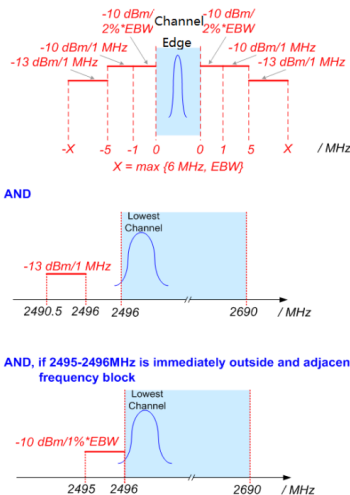

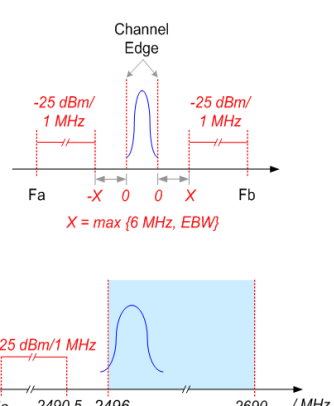

3.2 PCS Band (1850-1915 MHz paired with 1930-1995 MHz)



Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)	Testing location
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP $\leq$ 2 W	Appendix A	Pass	Test Location 1
Peak-Average Ratio	§2.1046, §24.232	Limit $\leq$ 13 dB	Appendix B	Pass	Test Location 1
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass	Test Location 1
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass	Test Location 1
Band Edges Compliance	§2.1051, §24.238	FCC: $\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block. Note 1): EBW is -26 dBc EBW.	Appendix E	Pass	Test Location 1
Spurious Emission at Antenna Terminals	§2.1051, §24.238	FCC: $\leq$ -13 dBm/1 MHz, from max(lowest internal frequency, 9 kHz) to min(10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency blocks.	Appendix F	Pass	Test Location 1
Field Strength of Spurious Radiation	§2.1053, §24.238	FCC: $\leq$ -13 dBm/1 MHz, from max(lowest internal frequency, 9 kHz) to min(10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency blocks.	Appendix G	Pass	Test Location 1
Frequency Stability	§2.1055, §24.235	FCC: Within authorized bands of operation/frequency block.	Appendix H	Pass	Test Location 1

3.3 AWS Band (1710-1780 MHz paired with 2110-2180 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)	Testing location
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP $\leq$ 1 W	Appendix A	Pass	Test Location 1
Peak-Average Ratio	§2.1046, §27.50(d)	Limits $\leq$ 13 dB	Appendix B	Pass	Test Location 1
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass	Test Location 1
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass	Test Location 1
Band Edges Compliance	§2.1051, §27.53(h)	FCC: $\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block. Note 1): EBW is -26 dBc EBW.	Appendix E	Pass	Test Location 1
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	FCC: $\leq$ -13 dBm/1 MHz, from max(lowest internal frequency, 9 kHz) to min(10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency ranges.	Appendix F	Pass	Test Location 1
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	FCC: $\leq$ -13 dBm/1 MHz, from max(lowest internal frequency, 9 kHz) to min(10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency ranges.	Appendix G	Pass	Test Location 1
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass	Test Location 1

3.4 BRS&EBS Band (2496-2690 MHz paired with 2496-2690 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)	Testing location
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP $\leq 2W$	Appendix A	Pass	Test Location 1
Peak-Average Ratio	§27.50(a)	Limit ≤ 13 dB	Appendix B	Pass	Test Location 1
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass	Test Location 1
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass	Test Location 1
Band Edges Compliance	§2.1051, §27.53(m4)	FCC:  AND AND, if 2495-2496MHz is immediately outside and adjacent to the frequency block  Note 1): EBW is -26 dBc EBW.	Appendix E	Pass	Test Location 1
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	FCC:  AND  Fa = max(lowest internal frequency, 9 kHz) Fb = min(10 * highest fundamental frequency, 40 GHz)	Appendix F	Pass	Test Location 1

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)	Testing location
		Note 1): EBW is -26 dBc EBW. Note 2): MeasFrom: max(lowest internal frequency, 9 kHz). Note 3): MeasTo: min(10 * highest fundamental frequency, 40 GHz).			
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	FCC:  AND  ----- Fa = max(lowest internal frequency, 9 kHz) Fb = min(10 * highest fundamental frequency, 40 GHz) Note 1): EBW is -26 dBc EBW. Note 2): MeasFrom: max(lowest internal frequency, 9 kHz). Note 3): MeasTo: min(10 * highest fundamental frequency, 40 GHz).	Appendix G	Pass	Test Location 1
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass	Test Location 1

3.5 MBS Lower 700 MHz band (698-716MHz paired with 728-746 MHz)

Test Item	FCC Rule No	Requirements	Test Result	Verdict(Note 1)	Testing location
Effective (Isotropic) Radiated Power Output Data	§27.50(c)	FCC: ERP ≤ 3 W.	Appendix A	Pass	Test Location 1
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Appendix B	Pass	Test Location 1
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	Pass	Test Location 1
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	Pass	Test Location 1
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/30 kHz, in 100 kHz bands immediately outside and adjacent to the frequency blocks.	Appendix	Pass	Test Location 1
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Appendix F	Pass	Test Location 1
Field Strength of Spurious Radiation	§2.1051, §27.53(g)	≤ -13 dBm/100 kHz.	Appendix G	Pass	Test Location 1
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Appendix H	Pass	Test Location 1

3.6 Band (814-824 MHz paired with 859-869MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Testing location
Transmitter Conducted Power Output	§2.1046, §90.635	< 100 W.	Appendix A	PASS	Test Location 1
Peak-Average Ratio	---	Limit≤13 dB	Appendix B	PASS	Test Location 1
Modulation Characteristics	§2.1047	Digital modulation	Appendix C	PASS	Test Location 1
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Appendix D	PASS	Test Location 1
Band Edges Compliance	§2.1051, §90.691	< $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	Appendix E	PASS	Test Location 1
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	Appendix F	PASS	Test Location 1
Field Strength of Spurious Radiation	§2.1053, §90.691	< $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	Appendix G	PASS	Test Location 1
Frequency Stability	§2.1055, §90.213	< ±2.5ppm.	Appendix H	PASS	Test Location 1

4 Description of the Equipment under Test (EUT)

4.1 General Description

NAM-LX9 is subscriber equipment in the GSM/WCDMA/LTE system. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS, Wi-Fi, NFC etc. Externally it provides earphone port (to provide voice service), and dual SIM/single SIM card interface. NAM-LX9 is dual/single SIM smart phone. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Note1: Only GSM850/PCS1900, UMTS frequency band II/IV/V, LTE frequency B2/B4/B5/B7/B12/B17/B38/B41/B66 and intra-band CA_7C/CA_38C/CA_41C test data include in this report.

4.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

4.2.1 Board

Board	Description	
Product Name :	Smart Phone	
Model name :	NAM-LX9	
SN :	Conducted	EJM0121716000118
	Radiated	EJM0121716000085
Software Version :	9.1.1.75M (C900E51R1P4) GPU Turbo	
Hardware Version :	HL1NTHM	

4.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	HW-110600E00	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600B00	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600U00	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600A00	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600E01	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600B01	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600U01	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600A01	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600E02	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600B02	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600U02	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Adapter	HW-110600A02	Huawei Device Co., Ltd.	Input voltage: 100-240VAC ~50/60Hz 1.8A Output voltage: 5Vdc/2A,10Vdc/4A,11Vdc/6A
Battery	HB476489EFW	Huawei Device Co., Ltd.	Rated capacity: 4200mAh Nominal Voltage:  +3.87V Charging Voltage:  +4.45V

4.3 Technical Specification

NOTE: For the detailed technical descriptions, see the applicant/manufacture's specifications or user manual.

4.3.1 General Technical Data

Characteristics	Description	
Operating Band for GSM	☒ GSM850:Uplink:824-849MHz,Downlink:869-894MHz ☒ PCS1900:Uplink:1850-1910MHz,Downlink:1930-1990MHz	
Operating Band for WCDMA	☒ BAND II: Uplink 1850-1910MHz,Downlink:1930-1990MHz ☒ BAND IV: Uplink 1710-1755MHz,Downlink:2110-2155MHz ☒ BAND V:Uplink:824-849MHz,Downlink:869-894MHz	
E-UTRA Operating Band for Single Carrier	☒ E-UTRA BAND 2: Uplink:1850-1910MHz,Downlink:1930-1990MHz ☒ E-UTRA BAND 4: Uplink:1710-1755MHz,Downlink:2110-2155MHz ☒ E-UTRA BAND 5:Uplink:824-849MHz,Downlink:869-894MHz ☒ E-UTRA BAND 7:Uplink:2500-2570MHz,Downlink:2620-2690MHz ☒ E-UTRA BAND 12:Uplink:699-716MHz,Downlink:729-746MHz ☒ E-UTRA BAND 17:Uplink:704-716MHz,Downlink:734-746MHz ☒ E-UTRA BAND 26:Uplink:814-849MHz,Downlink:859-894MHz ☒ E-UTRA BAND 38:Uplink:2570-2620MHz,Downlink:2570-2620MHz ☒ E-UTRA BAND 41:Uplink:2496-2690MHz,Downlink:2496-2690MHz ☒ E-UTRA BAND 66:Uplink:1710-1780MHz,Downlink:2110-2180MHz	
E-UTRA Operating Band for intra-band contiguous Carrier Aggregation (DL CA and UL CA)	☒ E-UTRA CA BAND CA_7C:Uplink:2500-2570MHz,Downlink:2620-2690MHz ☒ E-UTRA CA BAND CA_38C:Uplink:2570-2620MHz,Downlink:2570-2620MHz ☒ E-UTRA CA BAND CA_41C:Uplink:2496-2690MHz,Downlink:2496-2690MHz	
Power Supply	Power Supply Type:	☐ External DC mains, ☒ Battery, ☐ AC/DC Adapter, ☐ Powered over Ethernet (PoE). ☐ USB ☐ Other_____
	Input Rated Voltage	3.87V
	Operating Voltage Range	3.6V~4.45
Operating temperature Range	0°C~ +35°C	
Antenna Type	☒ Integral (permanent fixed antenna, which may be built-in, designed as an indispensable part of EUT) ☐ Dedicated (removable antenna supplied with EUT, designed as an indispensable part of EUT)	

4.3.2 Special Technical Data for GSM

Characteristics	Description	
Downlink Frequency (as UE Receiver)	GSM850	869 MHz~894 MHz
	PCS1900	1930 MHz~1990 MHz
Uplink Frequency (as UE Transmitter)	GSM850	824 MHz~849 MHz
	PCS1900	1850 MHz~1910 MHz
GPRS Class	GPRS Multi-slot class [12]	
EDGE Class	EDGE Multi-slot class [12]	
Type of Modulation	GMSK(GSM/GPRS/EGPRS), 8PSK(EGPRS)	
Channel separation	200 kHz	
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO	
UE Power Class for GSM	GSM850	Class 4
	PCS1900	Class 1
Gain	GSM850: -4.8 dBi (per antenna port, max) PCS1900: -2.2dBi (per antenna port, max)	
	Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.	
TX Maximum Output Power(ERP/EIRP)	GSM850(ERP): 25.30 GSM1900(EIRP): 27.73	
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	GSM850:	246KGXW, 251KG7W
	PCS1900:	245KGXW, 249KG7W

4.3.3 Special Technical Data for WCDMA

Characteristics	Description	
Downlink Frequency (as UE Receiver)	BAND II	1930 MHz~1990 MHz
	BAND IV	2110 MHz~2155 MHz
	BAND V	869 MHz~894 MHz
Uplink Frequency (as UE Transmitter)	BAND II	1850 MHz~1910 MHz
	BAND IV	1710 MHz ~1755 MHz
	BAND V	824 MHz ~849 MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM(only for HSPA+) ☐ 64QAM	
Channel separation:	200 kHz	
State the minimum channel spacing:	5 MHz	

Support Data Service	☒ HSDPA ☒ HSUPA ☐ DC-HSUPA ☐ UL-OLTD ☐ CL-OLTD
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for WCDMA	Class 3
Gain	BAND II : -2.2 dBi (per antenna port, max) BAND IV: -1.3 dBi (per antenna port, max) BAND V: -4.9 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(ERP/EIRP)	BAND II(EIRP) : 21.43dBm BAND IV(EIRP): 22.80 dBm BAND V(ERP): 17.37 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	BAND II: 4M16F9W
	BAND IV: 4M17F9W
	BAND V: 4M15F9W

4.3.4 Special Technical Data for LTE

4.3.4.1 BAND 2

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 2
Downlink Frequency (as UE Receiver)	F_{DL_low} : 1930 MHz F_{DL_high} : 1990 MHz
Uplink Frequency (as UE Transmitter)	F_{UL_low} : 1850 MHz F_{UL_high} : 1910 MHz
Channel Bandwidth	☒ 1.4MHz ☒ 3MHz ☒ 5MHz ☒ 10MHz ☒ 15MHz ☒ 20MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO

Characteristics	Description
	☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	-1.6 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	21.52 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M54G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M01G7D (10 MHz QPSK modulation), 9M01W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

4.3.4.2 BAND 4

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 4
Downlink Frequency (as UE Receiver)	F _{DL_low} : 2110 MHz F _{DL_high} : 2155 MHz
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 1710 MHz F _{UL_high} : 1755 MHz
Channel Bandwidth	☒ 1.4MHz ☒ 3MHz ☒ 5MHz ☒ 10MHz ☒ 15MHz ☒ 20MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3

Characteristics	Description
Gain	-0.6 dBi (per antenna port, max)
	Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	22.86 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	1M09G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M51G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M01G7D (10 MHz QPSK modulation), 9M01W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

4.3.4.3 BAND 5

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 5
Downlink Frequency (as UE Receiver)	F _{DL_low} : 869 MHz F _{DL_high} : 894 MHz
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 824 MHz F _{UL_high} : 849 MHz
Channel Bandwidth	☒ 1.4MHz ☒ 3MHz ☒ 5MHz ☒ 10MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	-4.6 dBi (per antenna port, max)
	Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(ERP)	17.23 dBm

Characteristics	Description
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M54G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M01G7D (10 MHz QPSK modulation), 9M01W7D (10 MHz 16QAM modulation)

4.3.4.4 BAND 7

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 7
Downlink Frequency (as UE Receiver)	F _{DL_low} : 2620 MHz F _{DL_high} : 2690 MHz
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 2500 MHz F _{UL_high} : 2570 MHz
Channel Bandwidth	☒ 5MHz ☒ 10MHz ☒ 15MHz ☒ 20MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	0.1 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	24.33 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	4M54G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M03G7D (10 MHz QPSK modulation), 9M02W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

Characteristics	Description
E-UTRA Operating Band	E-UTRA CA BAND CA_7C
Downlink Frequency (as UE Receiver)	F_{DL_low} : 2620 MHz F_{DL_high} : 2690 MHz
Uplink Frequency (as UE Transmitter)	F_{UL_low} : 2500 MHz F_{UL_high} : 2570 MHz
Channel Bandwidth	☒ 10+20 MHz ☒ 15+15 MHz ☒ 15+20 MHz ☒ 20+20 MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	0.1 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	22.92 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	29M1G7D (15 MHz+15 MHz QPSK modulation), 29M1W7D (15 MHz+15 MHz 16QAM modulation) 38M6G7D (20 MHz+20 MHz QPSK modulation), 38M4W7D (20 MHz+20 MHz 16QAM modulation)

4.3.4.5 BAND 12

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 12
Downlink Frequency (as UE Receiver)	F_{DL_low} : 729 MHz F_{DL_high} : 746 MHz
Uplink Frequency (as UE Transmitter)	F_{UL_low} : 699 MHz F_{UL_high} : 716 MHz
Channel Bandwidth	☒ 1.4MHz ☒ 3MHz ☒ 5MHz ☒ 10MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM

Characteristics	Description
	☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	-4.7 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(ERP)	17.34 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 8M99G7D (10 MHz QPSK modulation), 8M99W7D (10 MHz 16QAM modulation)

4.3.4.6 BAND 17

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 17
Downlink Frequency (as UE Receiver)	F_{DL_low} : 734 MHz F_{DL_high} : 746 MHz
Uplink Frequency (as UE Transmitter)	F_{UL_low} : 704 MHz F_{UL_high} : 716 MHz
Channel Bandwidth	☒ 5MHz ☒ 10MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	-4.7 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(ERP)	17.49 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied	4M52G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 8M99G7D (10 MHz QPSK modulation),

Characteristics	Description
bandwidths for each type of channel bandwidth configuration.)	9M00W7D (10 MHz 16QAM modulation)

4.3.4.7 BAND 26

Characteristics	Description				
E-UTRA Operating Band	E-UTRA BAND 26				
Downlink Frequency (as UE Receiver)	F _{DL_low} : 859 MHz F _{DL_high} : 894 MHz				
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 814 MHz F _{UL_high} : 849 MHz				
Channel Bandwidth	☒ 1.4MHz ☒ 3MHz ☒ 5MHz ☒ 10MHz ☒ 15MHz				
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM				
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO				
UE Power Class for LTE	Class 3				
Gain	-4.6 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.				
TX Maximum Output Power(ERP)	LTE BAND26(814-824):17.22 dBm LTE BAND26(824-849):17.17 dBm				
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	<table border="1"> <tr> <td>LTE BAND26: 814-824</td><td>1M10G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 8M99G7D (10 MHz QPSK modulation), 8M99W7D (10 MHz 16QAM modulation)</td></tr> <tr> <td>LTE BAND26: 824-849</td><td>1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation)</td></tr> </table>	LTE BAND26: 814-824	1M10G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 8M99G7D (10 MHz QPSK modulation), 8M99W7D (10 MHz 16QAM modulation)	LTE BAND26: 824-849	1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation)
LTE BAND26: 814-824	1M10G7D (1.4 MHz QPSK modulation), 1M09W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation) 8M99G7D (10 MHz QPSK modulation), 8M99W7D (10 MHz 16QAM modulation)				
LTE BAND26: 824-849	1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M71W7D (3 MHz 16QAM modulation) 4M55G7D (5 MHz QPSK modulation), 4M51W7D (5 MHz 16QAM modulation)				

Characteristics	Description
	8M99G7D (10 MHz QPSK modulation), 8M99W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation)

4.3.4.8 BAND 38

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 38
Downlink Frequency (as UE Receiver)	F _{DL_low} : 2570 MHz F _{DL_high} : 2620 MHz
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 2570 MHz F _{UL_high} : 2620 MHz
Channel Bandwidth	☒ 5MHz ☒ 10MHz ☒ 15MHz ☒ 20MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	0.2 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	24.26 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	4M54G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M06G7D (10 MHz QPSK modulation), 9M01W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

Characteristics	Description
E-UTRA Operating Band	E-UTRA CA BAND CA_38C
Downlink Frequency (as UE Receiver)	F _{DL_low} : 2570 MHz F _{DL_high} : 2620 MHz

Characteristics	Description
Uplink Frequency (as UE Transmitter)	F_{UL_low} : 2570 MHz F_{UL_high} : 2620 MHz
Channel Bandwidth	☒ 15+15 MHz ☒ 20+20 MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	0.2 dBi (per antenna port, max) Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	24.11 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	28M7G7D (15 MHz+15 MHz QPSK modulation), 28M8W7D (15 MHz+15 MHz 16QAM modulation) 38M4G7D (20 MHz+20 MHz QPSK modulation), 38M3W7D (20 MHz+20 MHz 16QAM modulation)

4.3.4.9 BAND 41

Characteristics	Description		
E-UTRA Operating Band	E-UTRA BAND 41		
Downlink Frequency (as UE Receiver)	<table> <tr> <td>FCC</td><td> F_{DL_low}: 2496 MHz F_{DL_high}: 2690 MHz </td></tr> </table>	FCC	F_{DL_low} : 2496 MHz F_{DL_high} : 2690 MHz
FCC	F_{DL_low} : 2496 MHz F_{DL_high} : 2690 MHz		
Uplink Frequency (as UE Transmitter)	<table> <tr> <td>FCC</td><td> F_{UL_low}: 2496 MHz F_{UL_high}: 2690 MHz </td></tr> </table>	FCC	F_{UL_low} : 2496 MHz F_{UL_high} : 2690 MHz
FCC	F_{UL_low} : 2496 MHz F_{UL_high} : 2690 MHz		
Channel Bandwidth	☒ 5MHz ☒ 10MHz ☒ 15MHz ☒ 20MHz		
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM		
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO		
UE Power Class for LTE	Class 3		
Gain	0.1 dBi (per antenna port, max)		

Characteristics	Description
	Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	24.02 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	4M52G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M05G7D (10 MHz QPSK modulation), 9M01W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

Characteristics	Description
E-UTRA Operating Band	E-UTRA CA BAND CA_41C
Downlink Frequency (as UE Receiver)	F _{DL_low} : 2496 MHz F _{DL_high} : 2690 MHz
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 2496 MHz F _{UL_high} : 2690 MHz
Channel Bandwidth	☒ 5MHz+20MHz ☒ 10MHz+20MHz ☒ 15MHz+15MHz ☒ 15MHz+20MHz ☒ 20MHz+20MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	0.1 dBi (per antenna port, max)
	Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	23.55 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	28M8G7D (15 MHz+15 MHz QPSK modulation), 28M9W7D (15 MHz+15 MHz 16QAM modulation) 38M3G7D (20 MHz+20 MHz QPSK modulation), 38M5W7D (20 MHz+20 MHz 16QAM modulation)

4.3.4.10 BAND 66

Characteristics	Description
E-UTRA Operating Band	E-UTRA BAND 66
Downlink Frequency (as UE Receiver)	F _{DL_low} : 2110 MHz F _{DL_high} : 2180 MHz
Uplink Frequency (as UE Transmitter)	F _{UL_low} : 1710 MHz F _{UL_high} : 1780 MHz
Channel Bandwidth	☒ 1.4MHz ☒ 3MHz ☒ 5MHz ☒ 10MHz ☒ 15MHz ☒ 20MHz
Type of Modulation for uplink	☒ QPSK ☒ 16QAM ☒ 64QAM
Smart Antenna(for uplink)	☐ MIMO ☒ Non MIMO
UE Power Class for LTE	Class 3
Gain	-0.6 dBi (per antenna port, max)
	Remark : When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.
TX Maximum Output Power(EIRP)	22.94 dBm
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	1M10G7D (1.4 MHz QPSK modulation), 1M10W7D (1.4 MHz 16QAM modulation) 2M71G7D (3 MHz QPSK modulation), 2M70W7D (3 MHz 16QAM modulation) 4M54G7D (5 MHz QPSK modulation), 4M52W7D (5 MHz 16QAM modulation) 9M03G7D (10 MHz QPSK modulation), 9M01W7D (10 MHz 16QAM modulation) 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation) 18M0G7D (20 MHz QPSK modulation), 18M0W7D (20 MHz 16QAM modulation)

5 General Test Conditions / Configurations

5.1 Test Modes

NOTE1: The test mode(s) are selected according to relevant radio technology specifications.

NOTE2: The modulation for WCDMA, HSUPA, HSDPA is the same, which is QPSK, and the WCDMA is the worst, so we test the WCDMA only.

NOTE3: The power of HSPA+ system with 16QAM modulation is lower than that of QPSK, so we did not test 16QAM modulation.

NOTE4: The power of LTE system 64QAM modulation is lower than that of 16QAM, so we did not test 64QAM modulation.

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EDGE, 8PSK modulation
UMTS/TM1	WCDMA system, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation

5.2 Test Frequency

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM850	TX	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6MHz	848.8MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2MHz	881.6MHz	893.8MHz
WCDMA850	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4MHz	846.6MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4MHz	881.4MHz	891.6MHz
Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM1900	TX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0MHz	1909.8MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz
WCDMA1900	TX	Channel 9262	Channel9400	Channel9538
		1852.4MHz	1880.0MHz	1907.6MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz
Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA1700	TX	Channel1312	Channel1413	Channel1513
		1712.4MHz	1732.6MHz	1752.6MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
	RX	Channel 1537	Channel 1638	Channel 1738
		2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX(1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX(3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX(5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX(10M)	Channel 18650	Channel 18900	Channel 19150
		1855 MHz	1880 MHz	1905 MHz
	TX(15M)	Channel 18675	Channel 18900	Channel 19125
		1857.5 MHz	1880 MHz	1902.5 MHz
	TX(20M)	Channel 18700	Channel 18900	Channel 19100
		1860 MHz	1880 MHz	1900 MHz
	RX(1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	RX(3M)	Channel 615	Channel 900	Channel 1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	RX(5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	RX(10M)	Channel 650	Channel 900	Channel 1150

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
		1935 MHz	1960 MHz	1985 MHz
	RX(15M)	Channel 675	Channel 900	Channel 1125
		1937.5 MHz	1960 MHz	1982.5 MHz
	RX(20M)	Channel 700	Channel 900	Channel 1100
		1940 MHz	1960 MHz	1980 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 4	TX(1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX(3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX(5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX(10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX(15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX(20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz
	RX(1.4M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5MHz	2152.5 MHz
	RX(3M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5MHz	2150 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	RX(5M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5MHz	2152.5 MHz
	RX(10M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5MHz	2150 MHz
	RX(15M)	Channel 2025	Channel 2175	Channel 2325
		2117.5 MHz	2132.5MHz	2147.5 MHz
	RX(20M)	Channel 2050	Channel 2175	Channel 2300
		2120 MHz	2132.5MHz	2145 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 66	TX(1.4M)	Channel 131979	Channel 132322	Channel 132665
		1710.7 MHz	1745 MHz	1779.3 MHz
	TX(3M)	Channel 131987	Channel 132322	Channel 132657
		1711.5 MHz	1745 MHz	1778.5 MHz
	TX(5M)	Channel 131997	Channel 132322	Channel 132647
		1712.5 MHz	1745 MHz	1777.5 MHz
	TX(10M)	Channel 132022	Channel 132322	Channel 132622
		1715 MHz	1745 MHz	1775MHz
	TX(15M)	Channel 132047	Channel 132322	Channel 132597
		1717.5 MHz	1745 MHz	1772.5 MHz
	TX(20M)	Channel 132072	Channel 132322	Channel 132572
		1720 MHz	1745 MHz	1770 MHz
	RX(1.4M)	Channel 66443	Channel 66786	Channel 67129

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
		2110.7 MHz	2145 MHz	2179.3 MHz
	RX(3M)	Channel 66451	Channel 66786	Channel 67121
		2111.5 MHz	2145 MHz	2178.3 MHz
	RX(5M)	Channel 66461	Channel 66786	Channel 67111
		2112.5 MHz	2145 MHz	2177.5 MHz
	RX(10M)	Channel 66486	Channel 66786	Channel 67086
		2115 MHz	2145 MHz	2175 MHz
	RX(15M)	Channel 66511	Channel 66786	Channel 67061
		2117.5 MHz	2145 MHz	2172.5 MHz
	RX(20M)	Channel 66536	Channel 66786	Channel 67036
		2120 MHz	2145 MHz	2170 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 5	TX(1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7 MHz	836.5 MHz	848.3 MHz
	TX(3M)	Channel 20415	Channel 20525	Channel 20635
		825.5 MHz	836.5 MHz	847.5 MHz
	TX(5M)	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	TX(10M)	Channel 20450	Channel 20525	Channel 20600
		829 MHz	836.5 MHz	844 MHz
	RX(1.4M)	Channel 2407	Channel 2525	Channel 2643
		869.7 MHz	881.5 MHz	893.3 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	RX (3M)	Channel 2415	Channel 2525	Channel 2635
		870.5 MHz	881.5 MHz	892.5 MHz
	RX(5M)	Channel 2425	Channel 2525	Channel 2625
		871.5 MHz	881.5 MHz	891.5 MHz
	RX (10M)	Channel 2450	Channel 2525	Channel 2600
		874 MHz	881.5 MHz	889 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 7	TX (5M)	Channel 20775	Channel 21100	Channel 21425
		2502.5 MHz	2535 MHz	2567.5 MHz
	TX (10M)	Channel 20800	Channel 21100	Channel 21400
		2505 MHz	2535 MHz	2565 MHz
	TX (15M)	Channel 20825	Channel 21100	Channel 21375
		2507.5 MHz	2535 MHz	2562.5 MHz
	TX (20M)	Channel 20850	Channel 21100	Channel 21350
		2510 MHz	2535 MHz	2560 MHz
	RX (5M)	Channel 2775	Channel 3100	Channel 3425
		2622.5 MHz	2655 MHz	2687.5 MHz
	RX (10M)	Channel 2800	Channel 3100	Channel 3400
		2625 MHz	2655 MHz	2685 MHz
	RX (15M)	Channel 2825	Channel 3100	Channel 3375
		2627.5 MHz	2655 MHz	2682.5 MHz
	RX (20M)	Channel 2850	Channel 3100	Channel 3350

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
		2630 MHz	2655 MHz	2680 MHz

Test frequencies for CA_7C											
Range	CC-Combo / NRB_agg [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	NUL	fUL [MHz]	NDL	fDL [MHz]	BW [RB]	NUL	fUL [MHz]	NDL	fDL [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1: Carriers in increasing frequency order.											

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX(1.4M)	Channel 23017	Channel 23095	Channel 23173
		699.7 MHz	707.5 MHz	715.3 MHz
	TX(3M)	Channel 23025	Channel 23095	Channel 23165
		700.5 MHz	707.5 MHz	714.5 MHz
	TX(5M)	Channel 23035	Channel 23095	Channel 23155

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
		701.5 MHz	707.5 MHz	713.5 MHz
	TX(10M)	Channel 23060	Channel 23095	Channel 23130
		704 MHz	707.5 MHz	711 MHz
	RX(1.4M)	Channel 5017	Channel 5095	Channel 5173
		729.7 MHz	737.5 MHz	745.3 MHz
	RX (3M)	Channel 5025	Channel 5095	Channel 5165
		730.5 MHz	737.5 MHz	744.5 MHz
	RX(5M)	Channel 5035	Channel 5095	Channel 5155
		731.5 MHz	737.5 MHz	743.5 MHz
	RX (10M)	Channel 5060	Channel 5095	Channel 5130
		734 MHz	737.5 MHz	741 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 17	TX (5M)	Channel 23755	Channel 23790	Channel 23825
		706.5 MHz	710 MHz	713.5 MHz
	TX (10M)	Channel 23780	Channel 23790	Channel 23800
		709 MHz	710 MHz	711 MHz
	RX (5M)	Channel 5755	Channel 5790	Channel 5825
		736.5 MHz	740 MHz	743.5 MHz
	RX (10M)	Channel 5780	Channel 5790	Channel 5800

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
LTE Band 26 (814 to 824 MHz)	TX (1.4M)	Channel 26697	Channel 26740	Channel 26783
		814.7 MHz	819 MHz	823.3 MHz
	TX (3M)	Channel 26705	Channel 26740	Channel 26775
		815.5 MHz	819 MHz	822.5 MHz
	TX (5M)	Channel 26715	Channel 26740	Channel 26765
		816.5 MHz	819 MHz	821.5 MHz
	TX (10M)	Channel 26740	Channel 26740	Channel 26740
		819 MHz	819 MHz	819 MHz
	RX (1.4M)	Channel 8697	Channel 8740	Channel 8783
		859.7 MHz	864 MHz	868.3 MHz
	RX (3M)	Channel 8705	Channel 8740	Channel 8765
		860.5 MHz	864 MHz	867.5 MHz
	RX (5M)	Channel 8715	Channel 8740	Channel 8765
		861.5 MHz	864 MHz	866.5 MHz
	RX (10M)	Channel 8740	Channel 8740	Channel 8740
		864 MHz	864 MHz	864 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
LTE Band 26 (824 to 849 MHz)	TX (1.4M)	Channel 26797	Channel 26915	Channel 27033
		824.7 MHz	836.5 MHz	848.3 MHz
	TX (3M)	Channel 26805	Channel 26915	Channel 27025
		825.5 MHz	836.5 MHz	847.5 MHz
	TX (5M)	Channel 26815	Channel 26915	Channel 27015

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
		826.5 MHz	836.5 MHz	846.5 MHz
	TX (10M)	Channel 26840	Channel 26915	Channel 26990
		829 MHz	836.5 MHz	844 MHz
	TX (15M)	Channel 26865	Channel 26915	Channel 26965
		831.5 MHz	836.5 MHz	841.5 MHz
	RX (1.4M)	Channel 8697	Channel 8915	Channel 9033
		859.7 MHz	881.5 MHz	893.3 MHz
	RX (3M)	Channel 8805	Channel 8915	Channel 9025
		860.5 MHz	881.5 MHz	892.5 MHz
	RX (5M)	Channel 8815	Channel 8915	Channel 9015
		871.5 MHz	881.5 MHz	891.5 MHz
	RX (10M)	Channel 8840	Channel 8915	Channel 8990
		874 MHz	881.5 MHz	889 MHz
	RX (15M)	Channel 8865	Channel 8915	Channel 8965
		876.5 MHz	881.5 MHz	886.5 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 38	TX(5M)	Channel 37775	Channel 38000	Channel 38225
		2572.5 MHz	2595 MHz	2617.5 MHz
	TX(10M)	Channel 37800	Channel 38000	Channel 38200
		2575 MHz	2595 MHz	2615 MHz
	TX(15M)	Channel 37825	Channel 38000	Channel 38175
		2577.5 MHz	2595 MHz	2612.5 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
	TX(20M)	Channel 37850	Channel 38000	Channel 38150
		2580 MHz	2595 MHz	2610 MHz
	RX(5M)	Channel 37775	Channel 38000	Channel 38225
		2572.5 MHz	2595 MHz	2617.5 MHz
	RX(10M)	Channel 37800	Channel 38000	Channel 38200
		2575 MHz	2595 MHz	2615 MHz
	RX(15M)	Channel 37825	Channel 38000	Channel 38175
		2577.5 MHz	2595 MHz	2612.5 MHz
	RX(20M)	Channel 37850	Channel 38000	Channel 38150
		2580 MHz	2595 MHz	2610 MHz

Test frequencies for CA_38C							
Range	CC-Combo / NRB_agg [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	NUL/DL	fUL/DL [MHz]	BW [RB]	NUL/DL	fUL/DL [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610

Note 1: Carriers in increasing frequency order.

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 41(2496-2690)	TX(5M)	Channel 39675	Channel 40620	Channel 41565
		2498.5 MHz	2593 MHz	2687.5 MHz
	TX(10M)	Channel 39700	Channel 40620	Channel 41540

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
		2501 MHz	2593 MHz	2685 MHz
	TX(15M)	Channel 39725	Channel 40620	Channel 41515
		2503.5 MHz	2593 MHz	2682.5 MHz
	TX(20M)	Channel 39750	Channel 40620	Channel 41490
		2506 MHz	2593 MHz	2680 MHz
	RX(5M)	Channel 39675	Channel 40620	Channel 41565
		2498.5 MHz	2593 MHz	2687.5 MHz
	RX(10M)	Channel 39700	Channel 40620	Channel 41540
		2501 MHz	2593 MHz	2685 MHz
	RX(15M)	Channel 39725	Channel 40620	Channel 41515
		2503.5 MHz	2593 MHz	2682.5 MHz
	RX(20M)	Channel 39750	Channel 40620	Channel 41490
		2506 MHz	2593 MHz	2680 MHz

Test frequencies for CA_41C(2496-2690)							
Range	CC-Combo / NRB_agg [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	NUL/DL	fUL/DL [MHz]	BW [RB]	NUL/DL	fUL/DL [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
		75	39728	2503.8	100	39899	2520.9
	75+100	100	39750	2506	75	39921	2523.1
		100	39750	2506	100	39948	2525.8
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+100	50	40526	2583.6	100	40670	2598
		100	40571	2588.1	50	40715	2602.5

Test frequencies for CA_41C(2496-2690)							
Range	CC-Combo /	CC1 Note1			CC2 Note1		
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
		100	40546	2585.6	75	40717	2602.7
	100+100	100	40521	2583.1	100	40719	2602.9
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
		100	41341	2665.1	75	41512	2682.2
	100+100	100	41292	2660.2	100	41490	2680
Note 1: Carriers in increasing frequency order.							

5.3 DESCRIPTION OF TESTS

5.3.1 Radiated Power and Radiated Spurious Emissions

Radiated spurious emissions are investigated indoors in a full-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-E-2016. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 150cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.

A half-wave dipole is then substituted in place of the EUT. For emissions above 3GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT.

The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power} [\text{Watts}])$.

Test Procedures Used

KDB 971168 D01 v03-Section 5

ANSI/TIA-603-E-2016-Section 2.2.17 / ANSI/TIA-603-E-2016-Section 2.2.12

Note: Reference test setup 3

5.3.2 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

Test Procedures Used

KDB 971168 D01 v03-Section 5.7.2

Test Settings

- 1、 The signal analyzer's CCDF measurement profile enabled
- 2、 Frequency= carrier center frequency
- 3、 Measurement BW > EBW of signal
- 4、 for continuous transmissions, set to 1ms
- 5、 Record the maximum PAPR level associated with a probability of 0.1%.

Note: Reference test setup 1

5.3.3 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Test Procedures Used

KDB 971168 D01 v03-Section 4.3

Test Settings

- 1、SET RBW=1-5% of OBW
- 2、SET VBW $\geq 3 \times$ RBW
- 3、Detector: Peak
- 4、Trace mode= max hold.
- 5、Sweep= auto couple
- 6、Steps 1-5 were repeated after it is stable

Note: Reference test setup 1.

5.3.4 Band Edge Compliance

The test complies with the requirements in clause 2 of the present report according to test procedures in KDB 971168 D01 v03-Section 6 with corresponding test settings.

Note: Reference test setup 1.

5.3.5 Spurious and Harmonic Emissions at Antenna Terminal

The test complies with the requirements in clause 2 of the present report according to test procedures in KDB 971168 D01 v03-Section 6 with corresponding test settings.

Note: Reference test setup 1.

5.3.6 Frequency Stability / Temperature Variation

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Procedures Used

ANSI/TIA-603-E-2016


Note: Reference test setup 2.

5.4 Test Setups


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Port	Until declared, all Transmitter tests are performed at TRX port of the EUT
Multiple RF Source	Other RF sources or functions of the EUT are disabled during testing for RF source.
Sensors and Antenna	Sensors and Antenna optimization function should be disabled during testing by software method to get the stable maximum power and avoid the influence of uncertain conditions

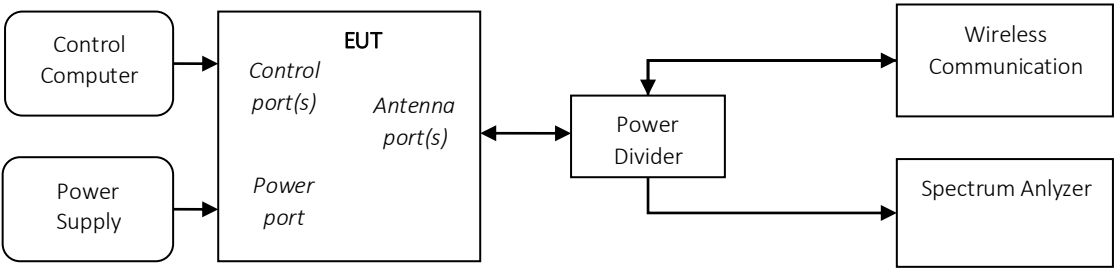5.4.2 Test Setup 1



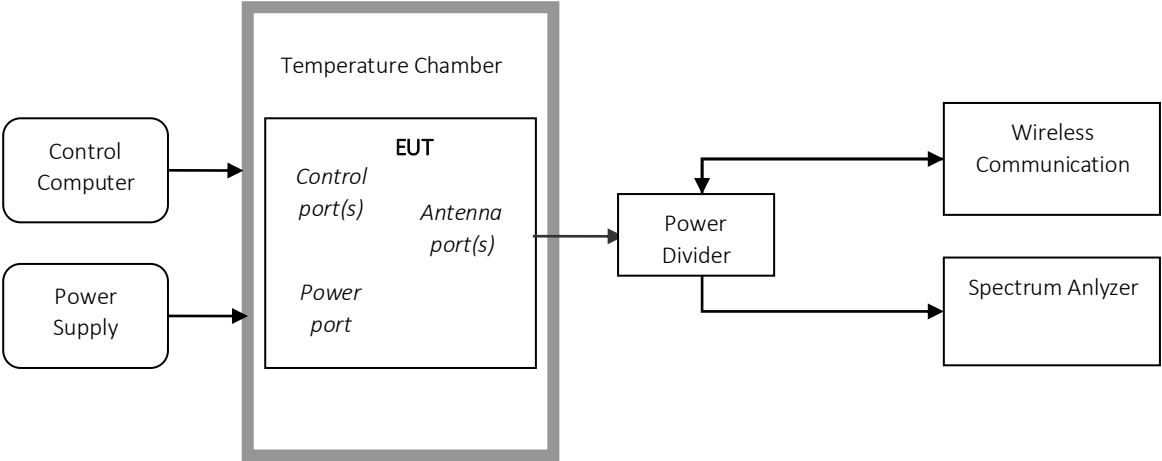
5.4.3 Test Setup 2




5.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) and Equivalent Isotropic Radiated Power(EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

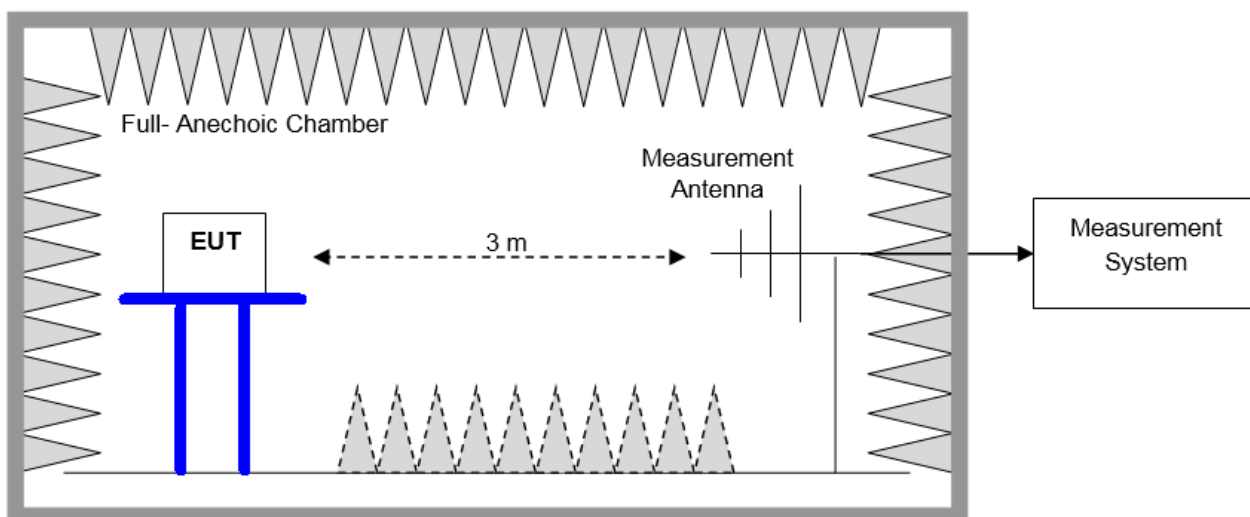5.4.4.1 Step 1: Pre-test



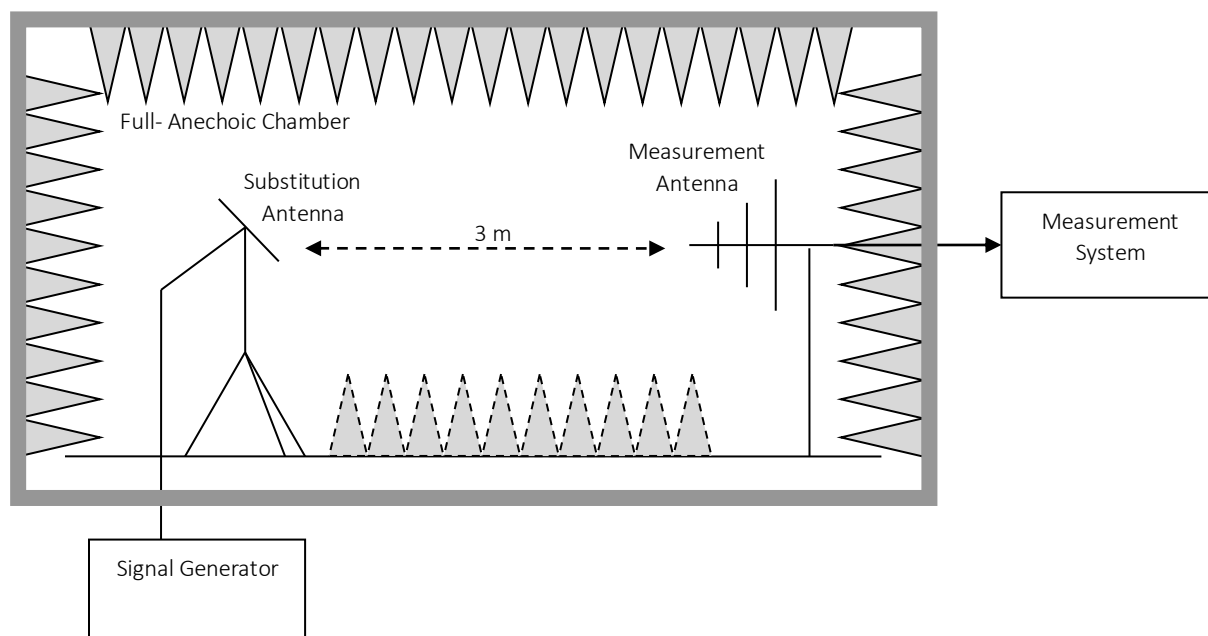5.4.4.2 Step 2: Substitution method to verify the maximum ERP/EIRP



5.5 Test Conditions

Test Case		Test Conditions	
Transmit Output Power Data	Average Power, Total	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
	Average Power, Spectral Density (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
Peak-to-Average Ratio (if required)		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Modulation Characteristics		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	M (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Bandwidth	Occupied Bandwidth	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
	Emission Bandwidth (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Band Edges Compliance		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Spurious Emission at Antenna Terminals		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)

Test Case	Test Conditions	
	Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Field Strength of Spurious Radiation	Test Env.	Ambient Climate & Rated Voltage
	Test Setup	Test Setup 3
	Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2 NOTE: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Frequency Stability	Test Env.	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
	Test Setup	Test Setup 2
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2

6 Main Test Instruments

6.1 Current Test Project/Report

Main Test Equipments(GSM/WCDMA/LTE test system)					
Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal-Due
Temperature Chamber	WEISS	WKL64	56246002940010	2020/11/02	2021/11/01
Universal Radio Communication Tester	R&S	CMW500	169834	2021/03/13	2022/03/12
Spectrum Analyzer	Keysight	N9040B	MY57212529	2020/11/09	2021/11/08

Main Test Equipments(RSE test system)					
Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal-Due
Universal Radio Communication Tester	R&S	CMU200	123299	2020/11/10	2021/11/09
Universal Radio Communication Tester	R&S	MT8821C	6261806783	2021/01/29	2022/01/28
Spectrum analyzer	R&S	FSW8	104470	2020/11/09	2021/11/08
Spectrum analyzer	R&S	FSW43	104070	2020/11/09	2021/11/08
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-1330	2020/08/10	2022/08/09
Double-Ridged Waveguide Horn Antenna (3G~18GHz)	SCHWARZBECK	BBHA 9120D	01932	2019/10/16	2021/10/15
Pyramidal Horn Antenna(18GHz-40GHz)	SCHWARZBECK	BBHA 9170	864	2019/10/29	2021/10/28
Software Information					
Test Item	Software Name		Manufacturer		Version
RSE	TS+		Tonscend		Ver2.1

Main Test Equipments(RE test system)					
Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal-Due
Test receiver	R&S	ESU26	100150	2020/11/06	2021/11/05
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2021/04/28	2022/04/27
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-1303	2020/08/10	2022/08/09
Trilog Broadband Antenna (1GHz~18GHz)	SCHWARZBECK	HF907	100391	2019/10/16	2021/10/15
Trilog Broadband Antenna (18GHz~40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170647	2019/10/29	2021/10/28
Software Information					

Test Item	Software Name	Manufacturer	Version
RE	EMC32	R&S	V9.25.0

7 Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmit Output Power Conducted	Power [dBm]	U = 0.38 dB
RF Power Density, Conducted	Power [dBm]	U = 0.66 dB
Bandwidth	Magnitude [kHz]	200kHz: U=9.06kHz 1.4MHz: U=9.48kHz 3MHz: U=10.86kHz 5MHz: U=13.84kHz 10MHz: U=22.32kHz 15MHz: U=31.9kHz 20MHz: U=41.78kHz
Band Edge Compliance	Disturbance Power [dBm]	U = 0.9 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	20MHz~3.6GHz: U=0.88dB 3.6GHz~8.4GHz: U=1.08dB 8.4GHz~13.6GHz: U=1.24dB 13.6GHz~22GHz: U=1.34dB 22GHz~26.5GHz: U=1.36dB
Field Strength of Spurious Radiation	ERP/EIRP [dBm]	For 3 m Chamber: U = 3.868 dB (9 kHz to 150 kHz) U = 3.782 dB (150 kHz to 30 MHz) U = 5.42 dB (30 MHz to 3GHz) U = 5.58 dB (3GHz to 18GHz) U = 5.08 dB (18GHz to 40GHz)
Frequency Stability	Frequency Accuracy [Hz]	800MHz: U=24.08Hz 900MHz: U=24.54Hz 1900MHz: U=34.7Hz 2100MHz: U=36.96Hz 2300MHz: U=39.24Hz 2500MHz: U=41.58Hz 2600MHz: U=42.74Hz

8 Appendixes

Appendix No.	Description
SYBH(Z-RF)20210816008001-2001-A	Appendix_for_GSM
SYBH(Z-RF)20210816008001-2001-B	Appendix_for_WCDMA
SYBH(Z-RF)20210816008001-2001-C	Appendix_for_LTE Band_2
SYBH(Z-RF)20210816008001-2001-D	Appendix_for_LTE Band_4
SYBH(Z-RF)20210816008001-2001-E	Appendix_for_LTE Band_5
SYBH(Z-RF)20210816008001-2001-F	Appendix_for_LTE Band_7
SYBH(Z-RF)20210816008001-2001-G	Appendix_for_LTE Band_12
SYBH(Z-RF)20210816008001-2001-H	Appendix_for_LTE Band_17
SYBH(Z-RF)20210816008001-2001-I	Appendix_for_LTE_Band_26(814-824)
SYBH(Z-RF)20210816008001-2001-J	Appendix_for_LTE_Band_26(824-849)
SYBH(Z-RF)20210816008001-2001-K	Appendix_for_LTE Band_38
SYBH(Z-RF)20210816008001-2001-L	Appendix_for_LTE_Band_41
SYBH(Z-RF)20210816008001-2001-M	Appendix_for_LTE_Band_66
SYBH(Z-RF)20210816008001-2001-N	Appendix_for_CA_Band_CA_7C
SYBH(Z-RF)20210816008001-2001-O	Appendix_for_CA_Band_CA_38C
SYBH(Z-RF)20210816008001-2001-P	Appendix_for_CA_Band_CA_41C

Appendix	Description
Appendix A	Effective (Isotropic) Radiated Power Output Data
Appendix B	Peak-Average Ratio
Appendix C	Modulation Characteristics
Appendix D	Bandwidth
Appendix E	Band Edges Compliance
Appendix F	Spurious Emission at Antenna Terminals
Appendix G	Field Strength of Spurious Radiation
Appendix H	Frequency Stability
Appendix I	Receiver Spurious Emissions

END