

Appendix A: Test Results of Classic Bluetooth

APPENDIX A: TEST RESULTS OF CLASSIC BLUETOOTH.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Test Result.....	2
Test Graphs.....	3
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	6
Test Result.....	6
Test Graphs.....	7
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	10
Test Result.....	10
Test Graphs.....	11
APPENDIX A.4: TEST RESULTS OF TIME OF OCCUPANCY.....	12
Test Result.....	12
Test Graphs.....	13
APPENDIX A.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	18
Test Result.....	18
Test Graphs.....	19
APPENDIX A.6: TEST RESULTS OF BAND EDGE MEASUREMENTS	20
Test Result.....	20
Test Graphs.....	21
APPENDIX A.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....	25
Test Result.....	25
Test Graphs.....	26
APPENDIX A.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	33
30MHz - 1GHz	33
1GHz - 18GHz.....	35
APPENDIX A.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	47

Appendix A.1: Test Results of 20dB Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.918	2401.541	2402.459	---	PASS
		2441	0.855	2440.538	2441.393	---	PASS
		2480	0.852	2479.538	2480.390	---	PASS
3DH5	Ant1	2402	1.269	2401.352	2402.621	---	PASS
		2441	1.326	2440.319	2441.645	---	PASS
		2480	1.278	2479.340	2480.618	---	PASS

Test Graphs









Appendix A.2: Test Results of 99% Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.83922	2401.5705	2402.4097	---	PASS
		2441	0.85471	2440.5604	2441.4151	---	PASS
		2480	0.84221	2479.5651	2480.4073	---	PASS
3DH5	Ant1	2402	1.1988	2401.3932	2402.5920	---	PASS
		2441	1.1951	2440.3899	2441.5850	---	PASS
		2480	1.2035	2479.3852	2480.5887	---	PASS

Test Graphs

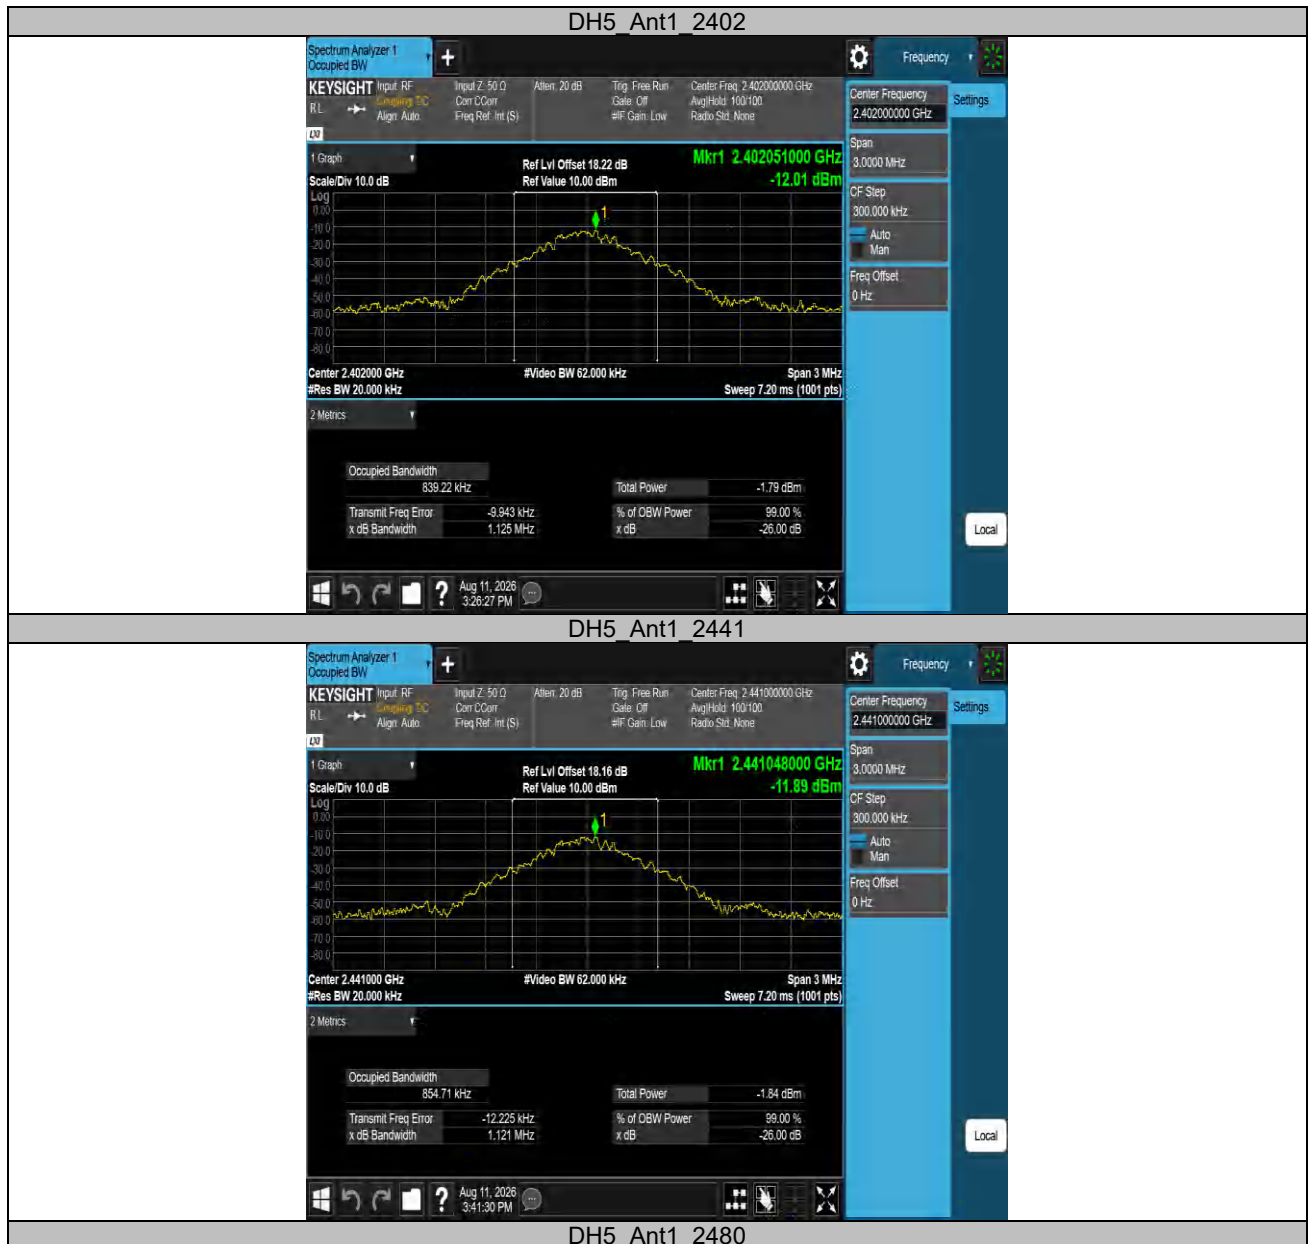

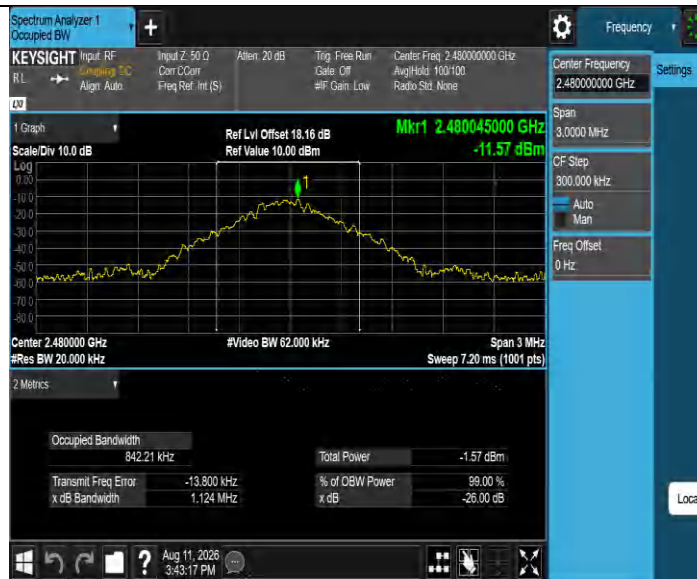

3DH5 Ant1 2402



3DH5 Ant1 2441





Appendix A.3: Test Results of Carrier Frequency Separation

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.168	≥ 0.918	PASS
3DH5	Ant1	Hop	1.032	≥ 0.884	PASS

Test Graphs




Appendix A.4: Test Results of Time of Occupancy


Test Result


Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.414	315	0.13	≤0.4	PASS
DH3	Ant1	Hop	1.669	168	0.28	≤0.4	PASS
DH5	Ant1	Hop	2.917	109	0.318	≤0.4	PASS
3DH1	Ant1	Hop	0.427	318	0.136	≤0.4	PASS
3DH3	Ant1	Hop	1.672	160	0.268	≤0.4	PASS
3DH5	Ant1	Hop	2.926	102	0.298	≤0.4	PASS


Test Graphs



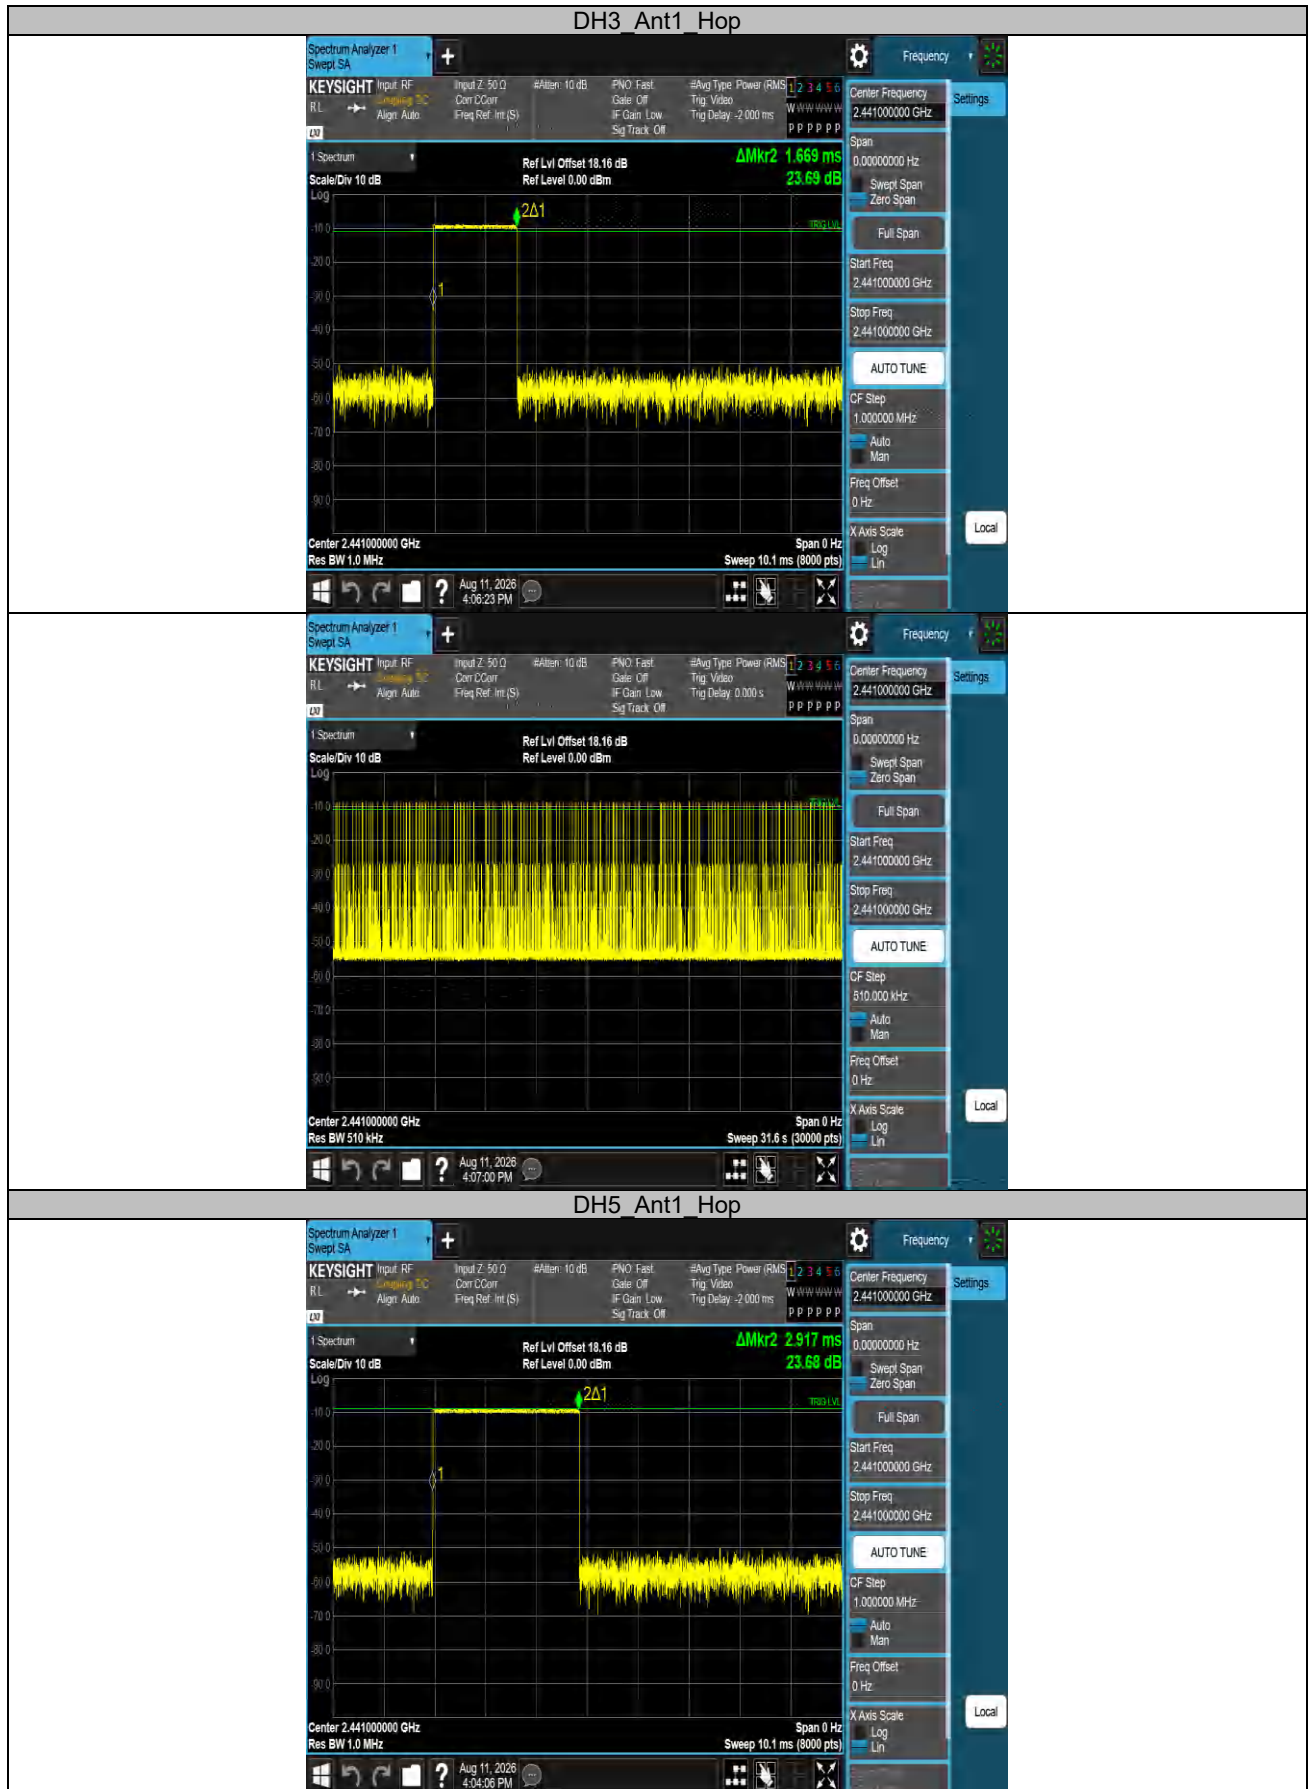

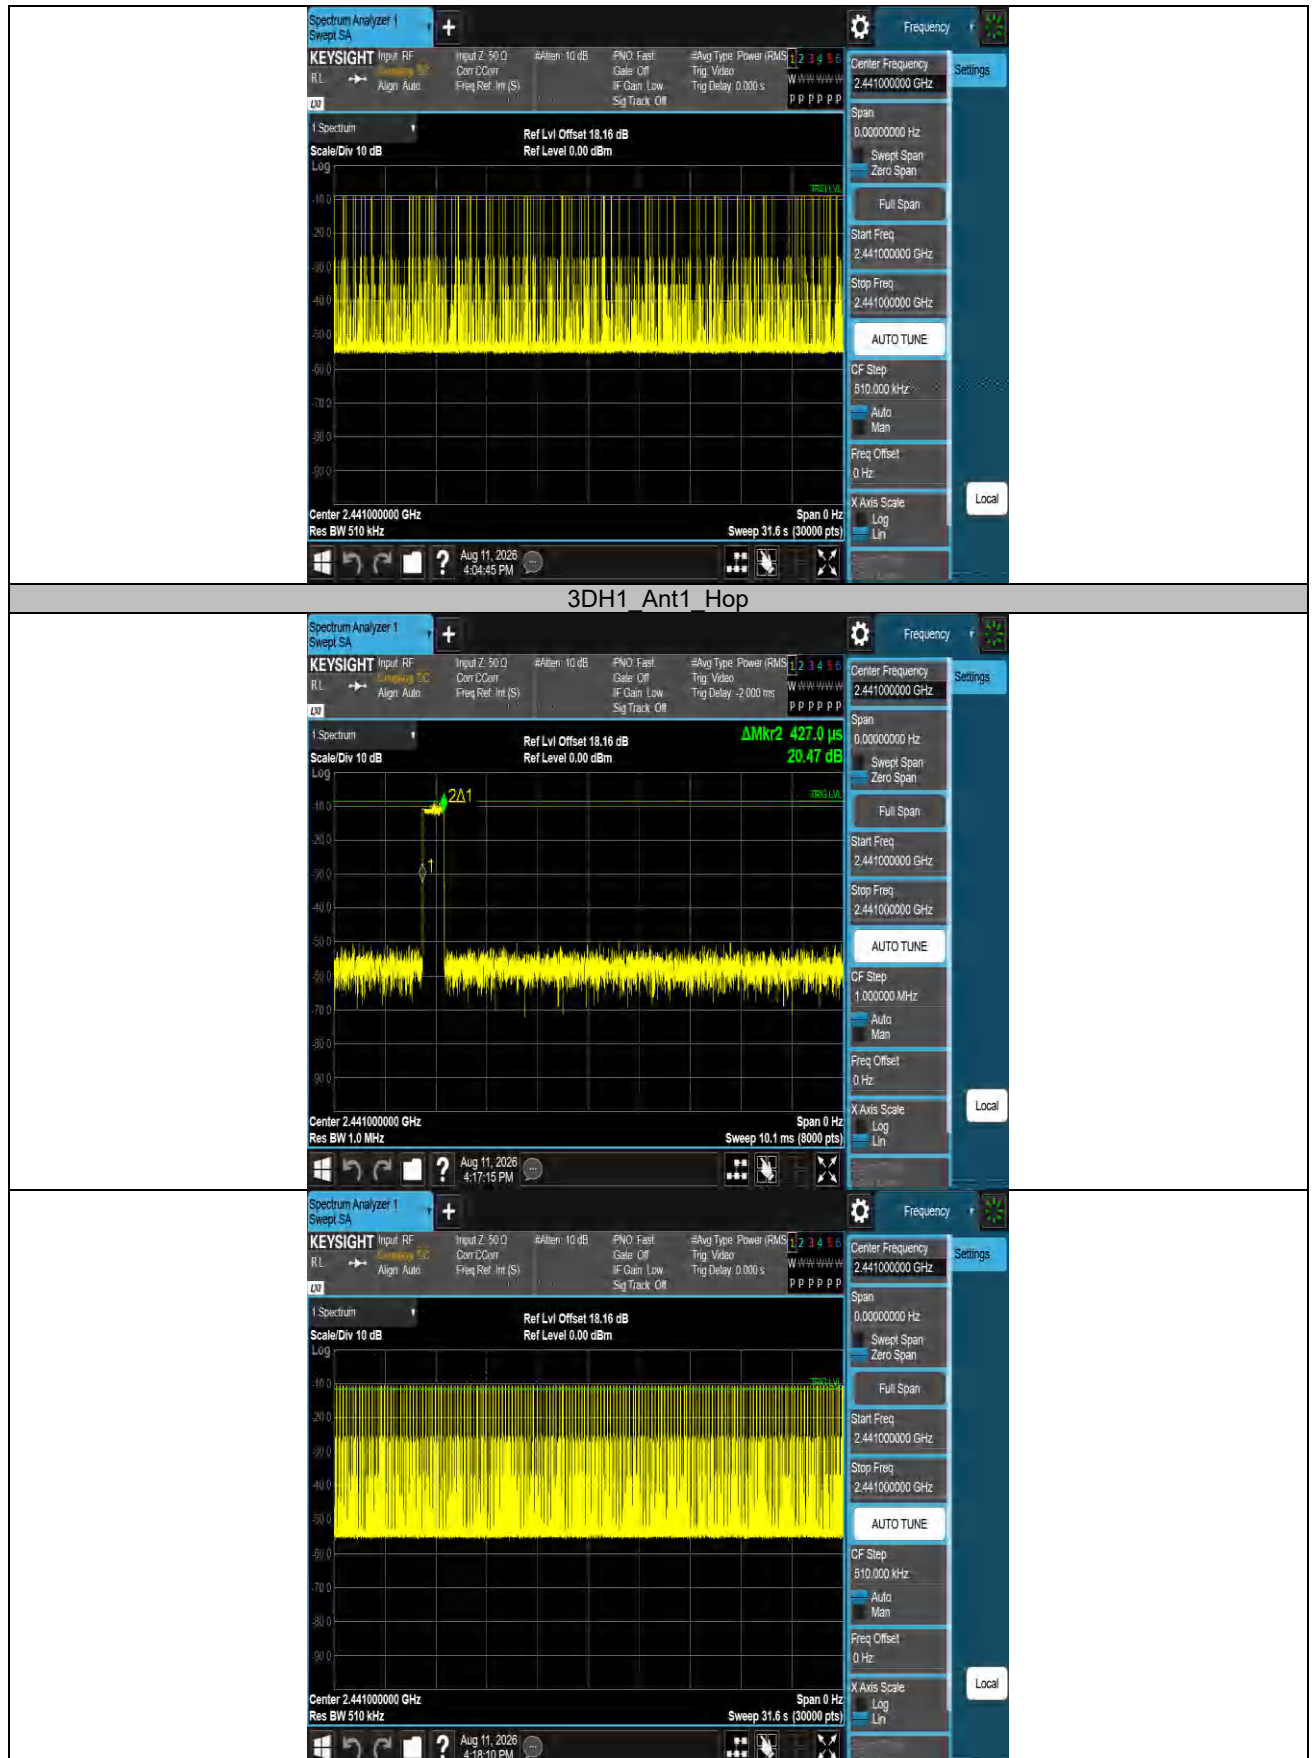

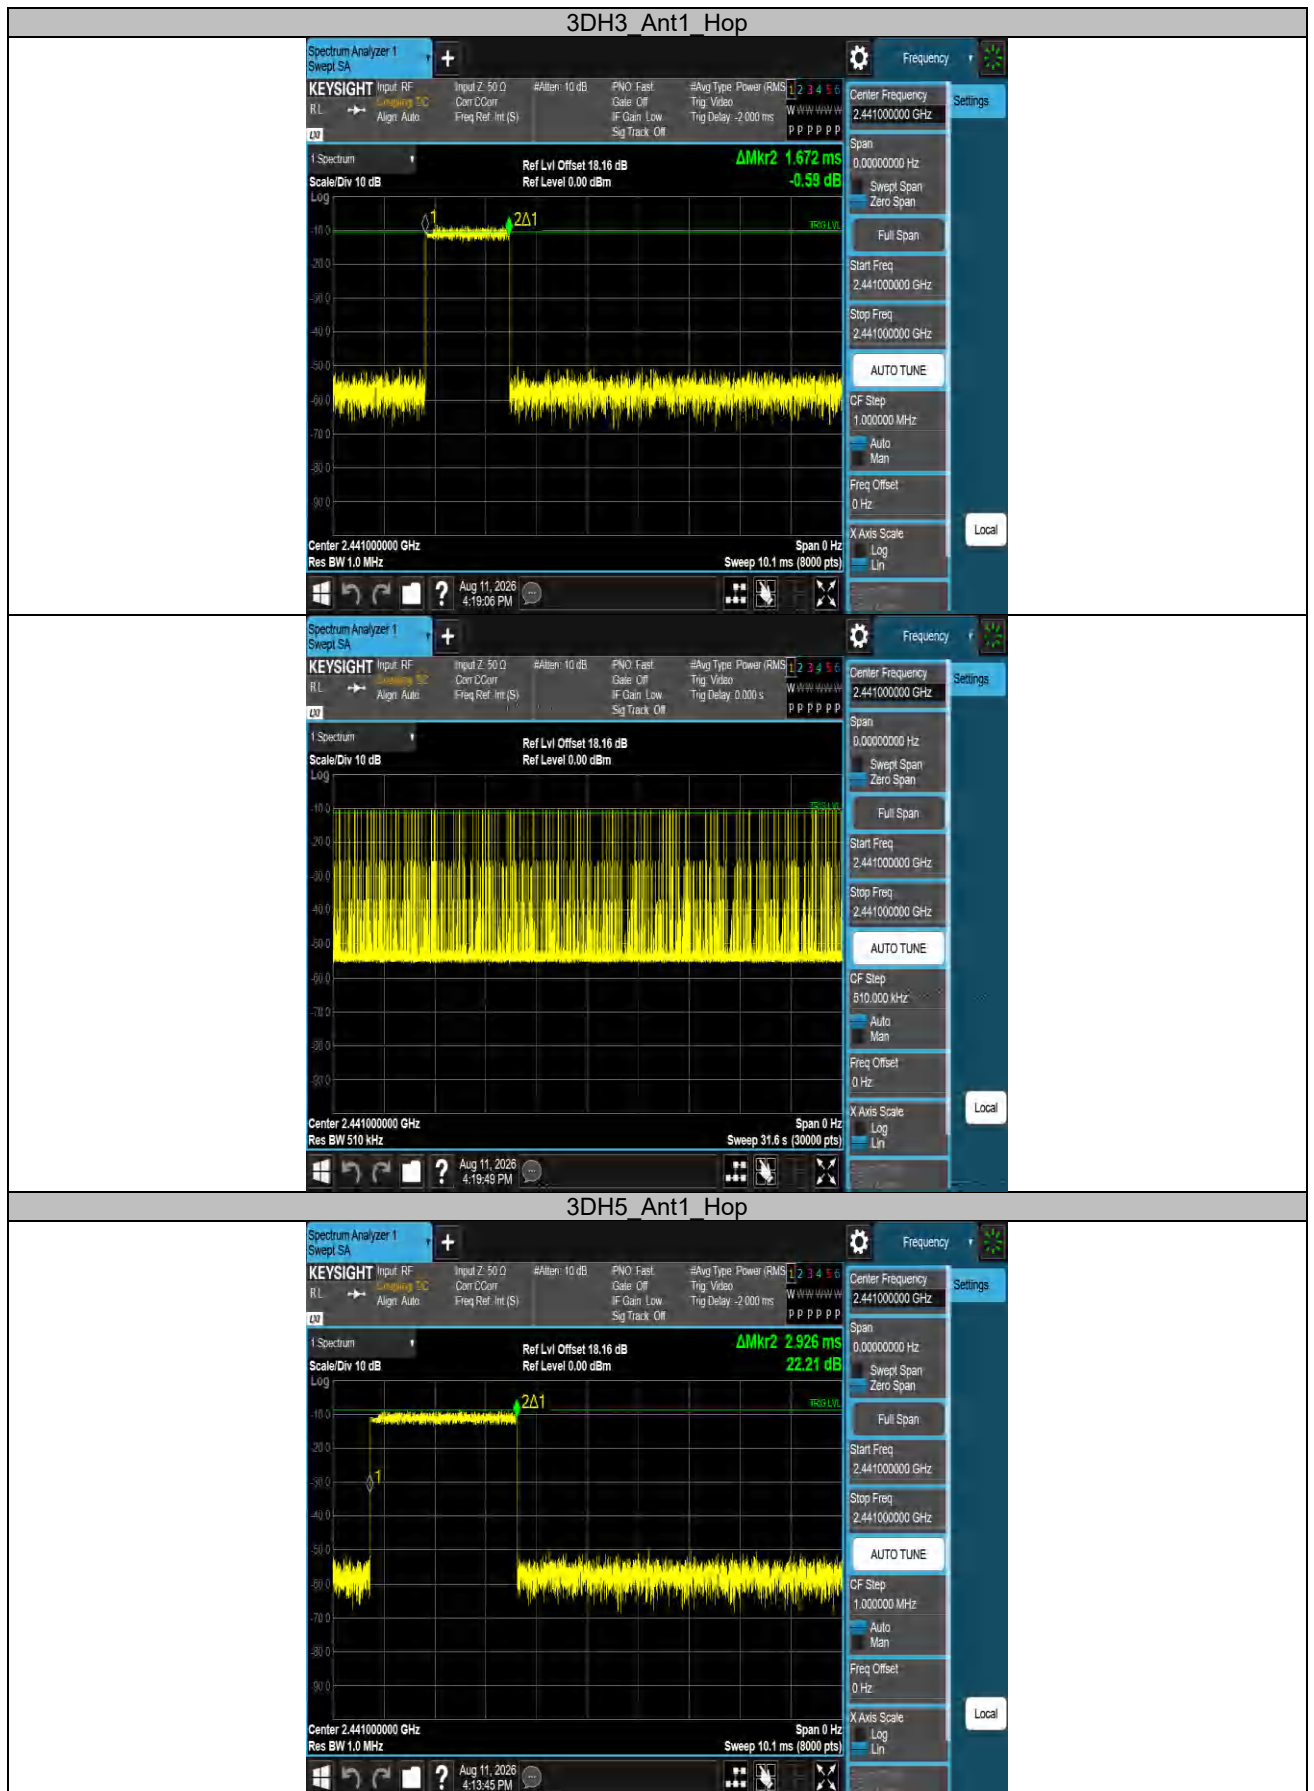

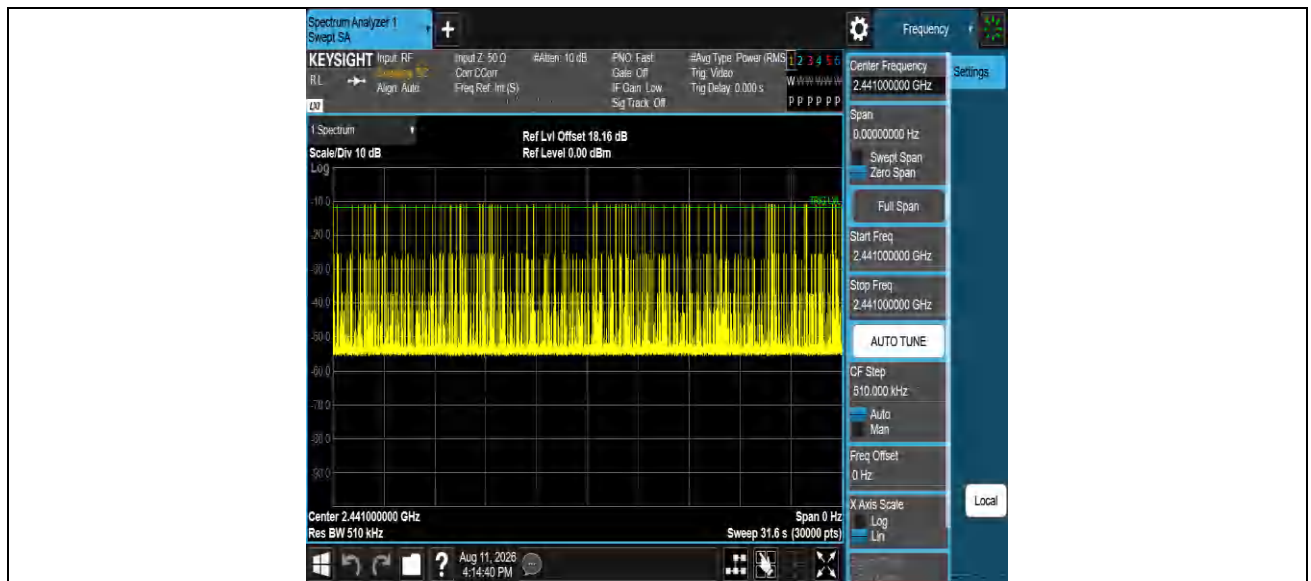

Appendix A.5: Test Results of Number of Hopping Frequency

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs





Appendix A.6: Test Results of Band Edge Measurements


Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-8.89	-42.07	≤-28.89	PASS
		High	2480	-9.08	-40.25	≤-29.08	PASS
3DH5	Ant1	Low	2402	-10.97	-41.44	≤-30.97	PASS
		High	2480	-10.65	-39.44	≤-30.65	PASS
DH5	Ant1	Hopping	2402	-8.87	-50.15	≤-28.87	PASS
		Hopping	2480	-8.94	-50.74	≤-28.94	PASS
3DH5	Ant1	Hopping	2402	-13.52	-49.23	≤-33.52	PASS
		Hopping	2480	-12.09	-51.31	≤-32.09	PASS

Test Graphs

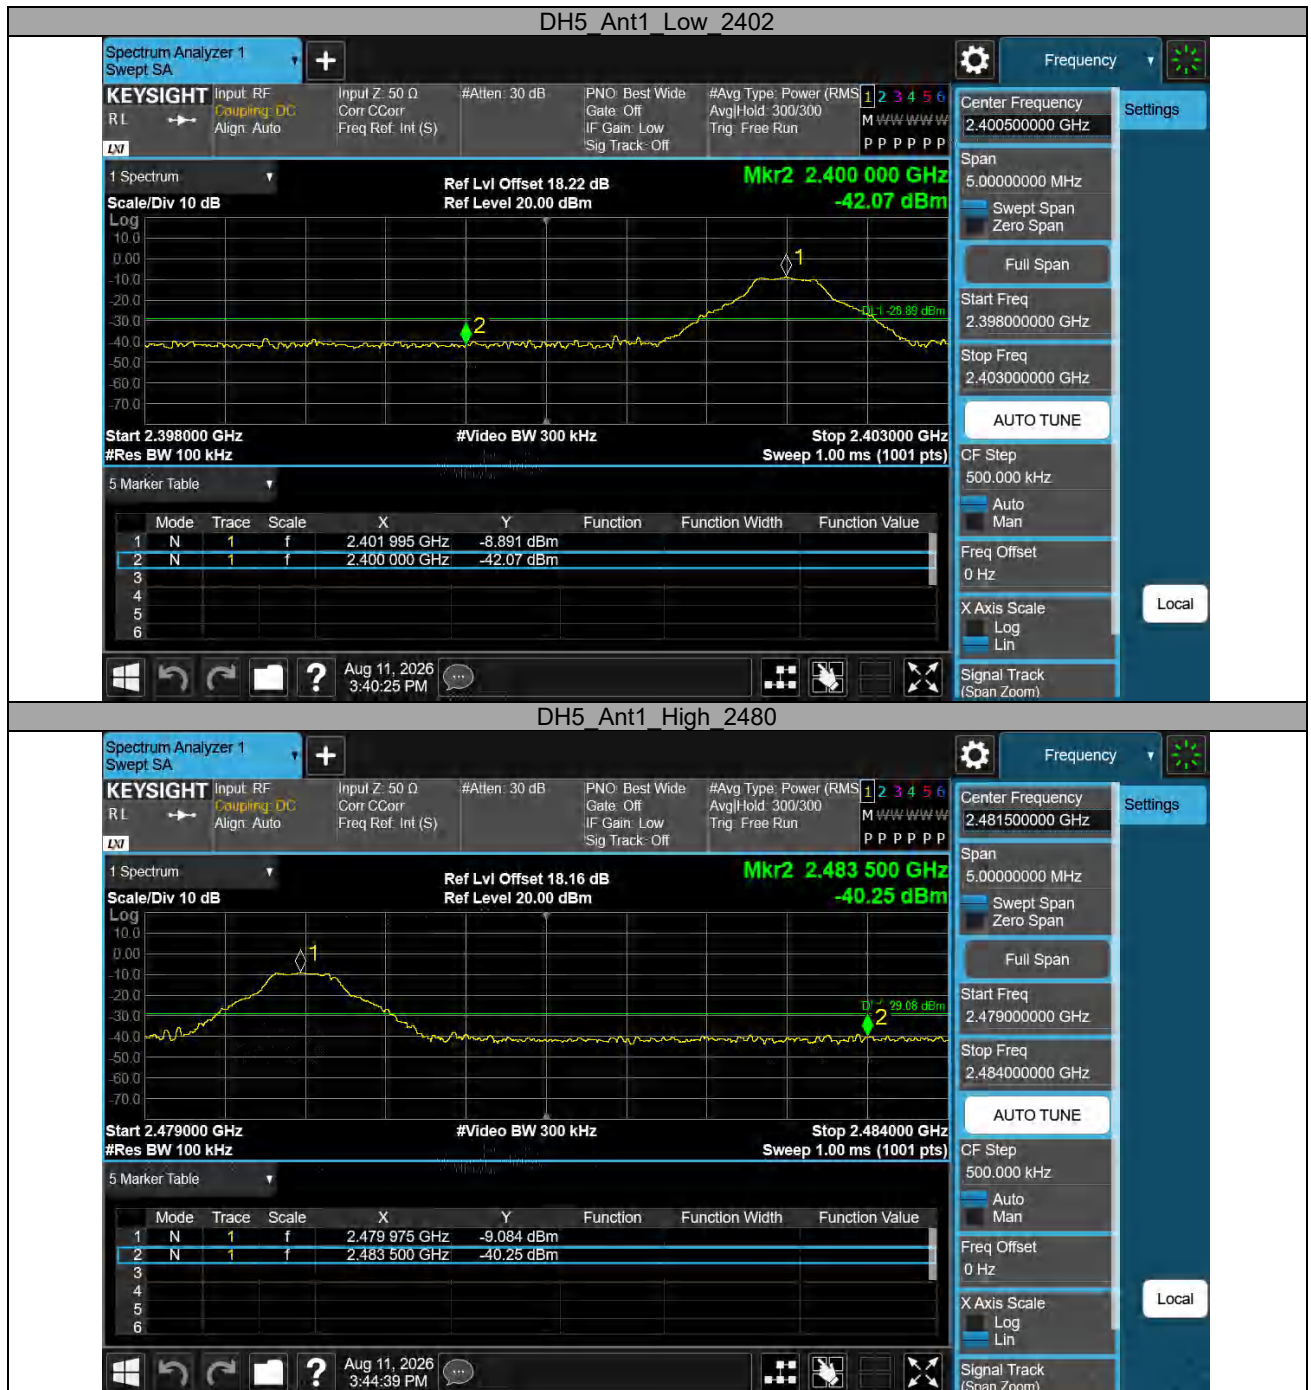

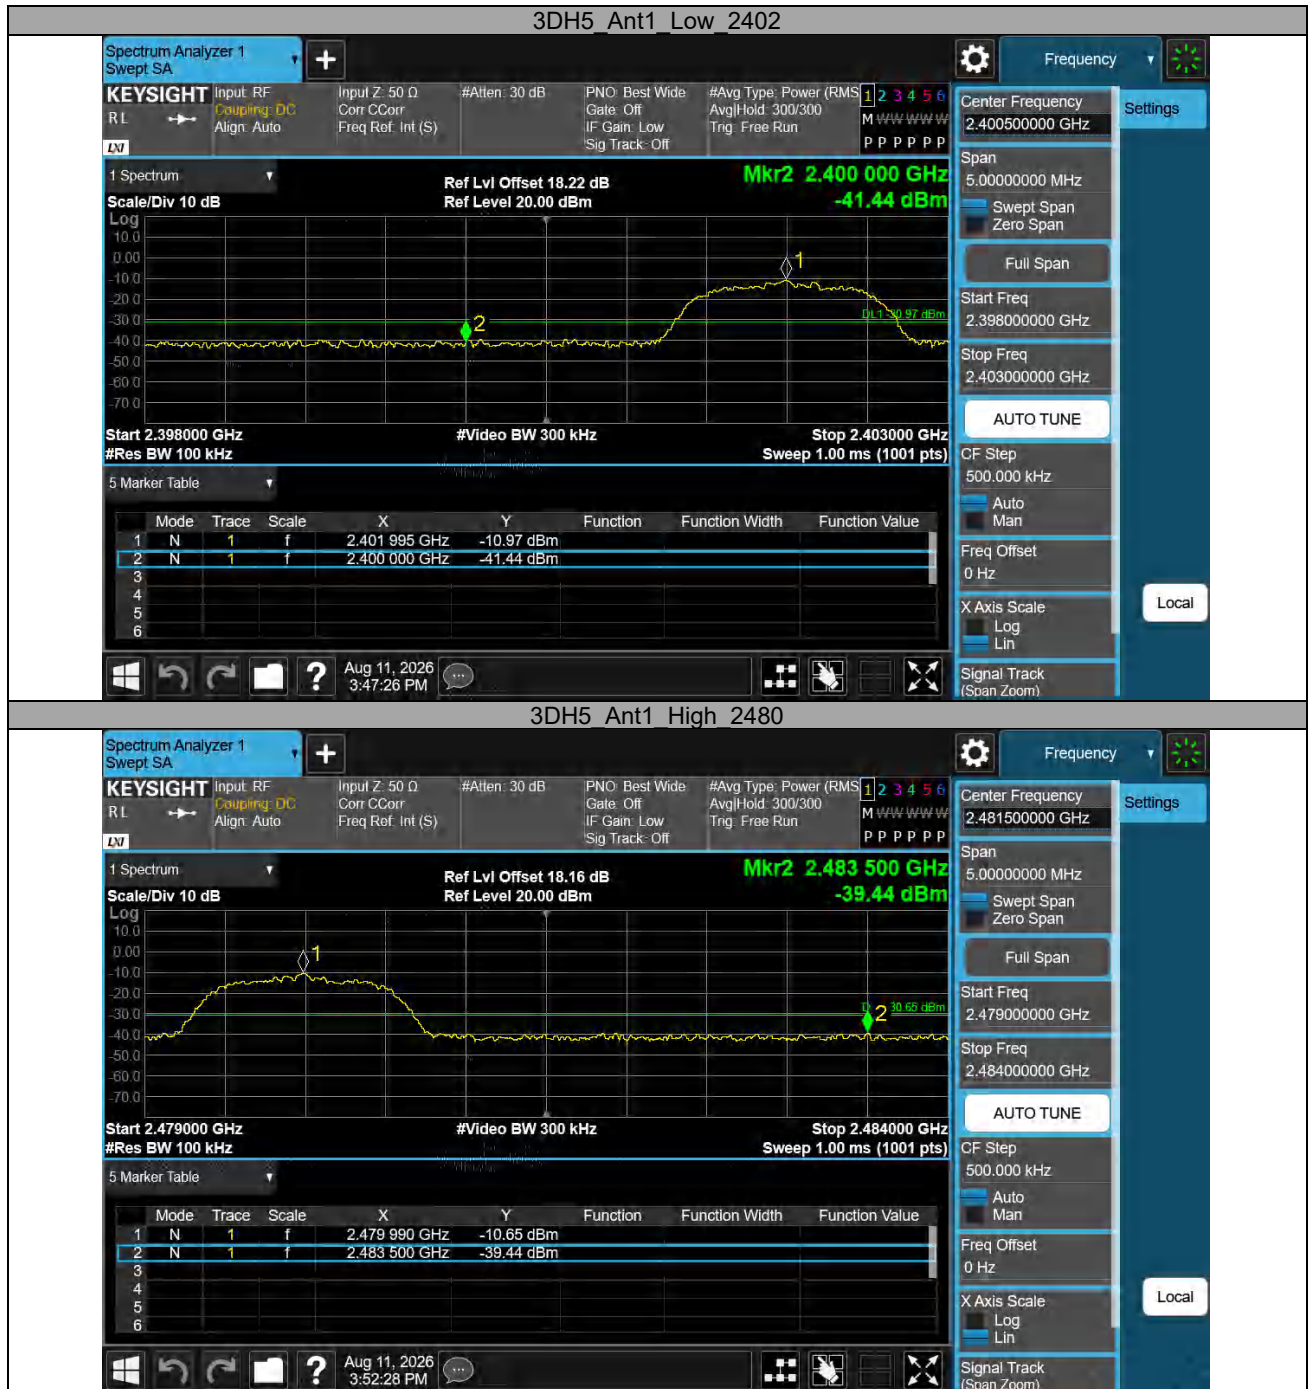

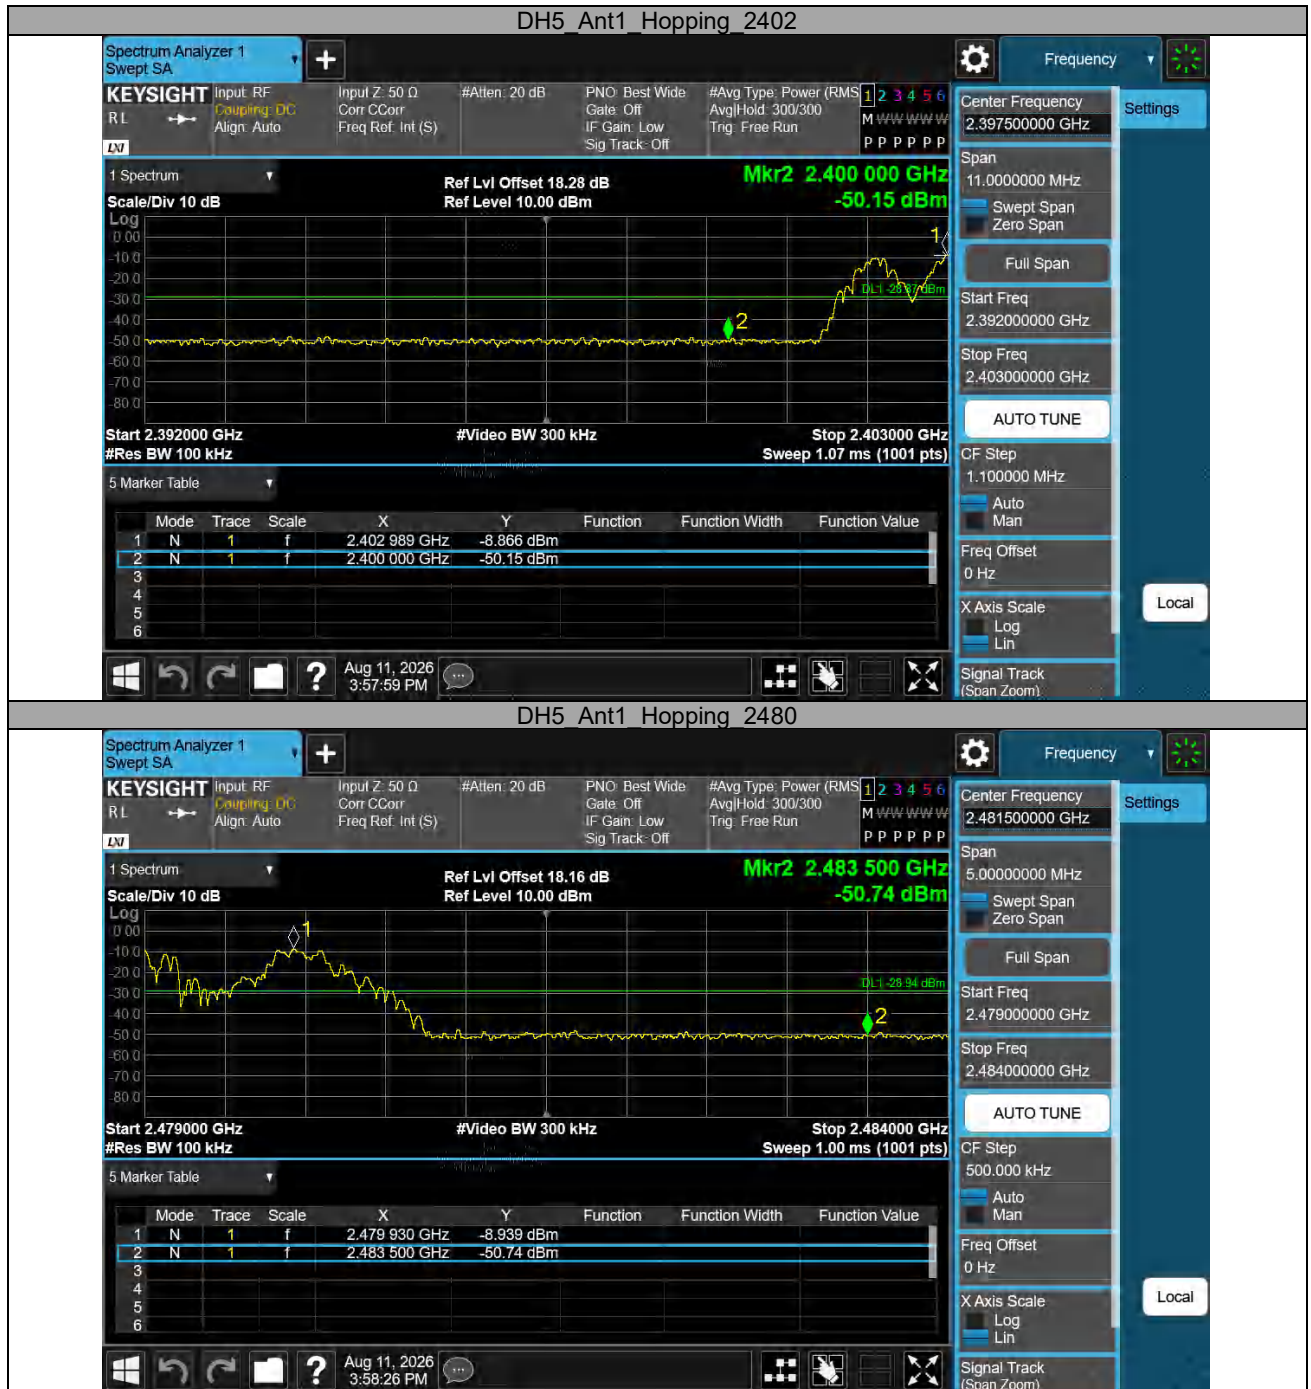

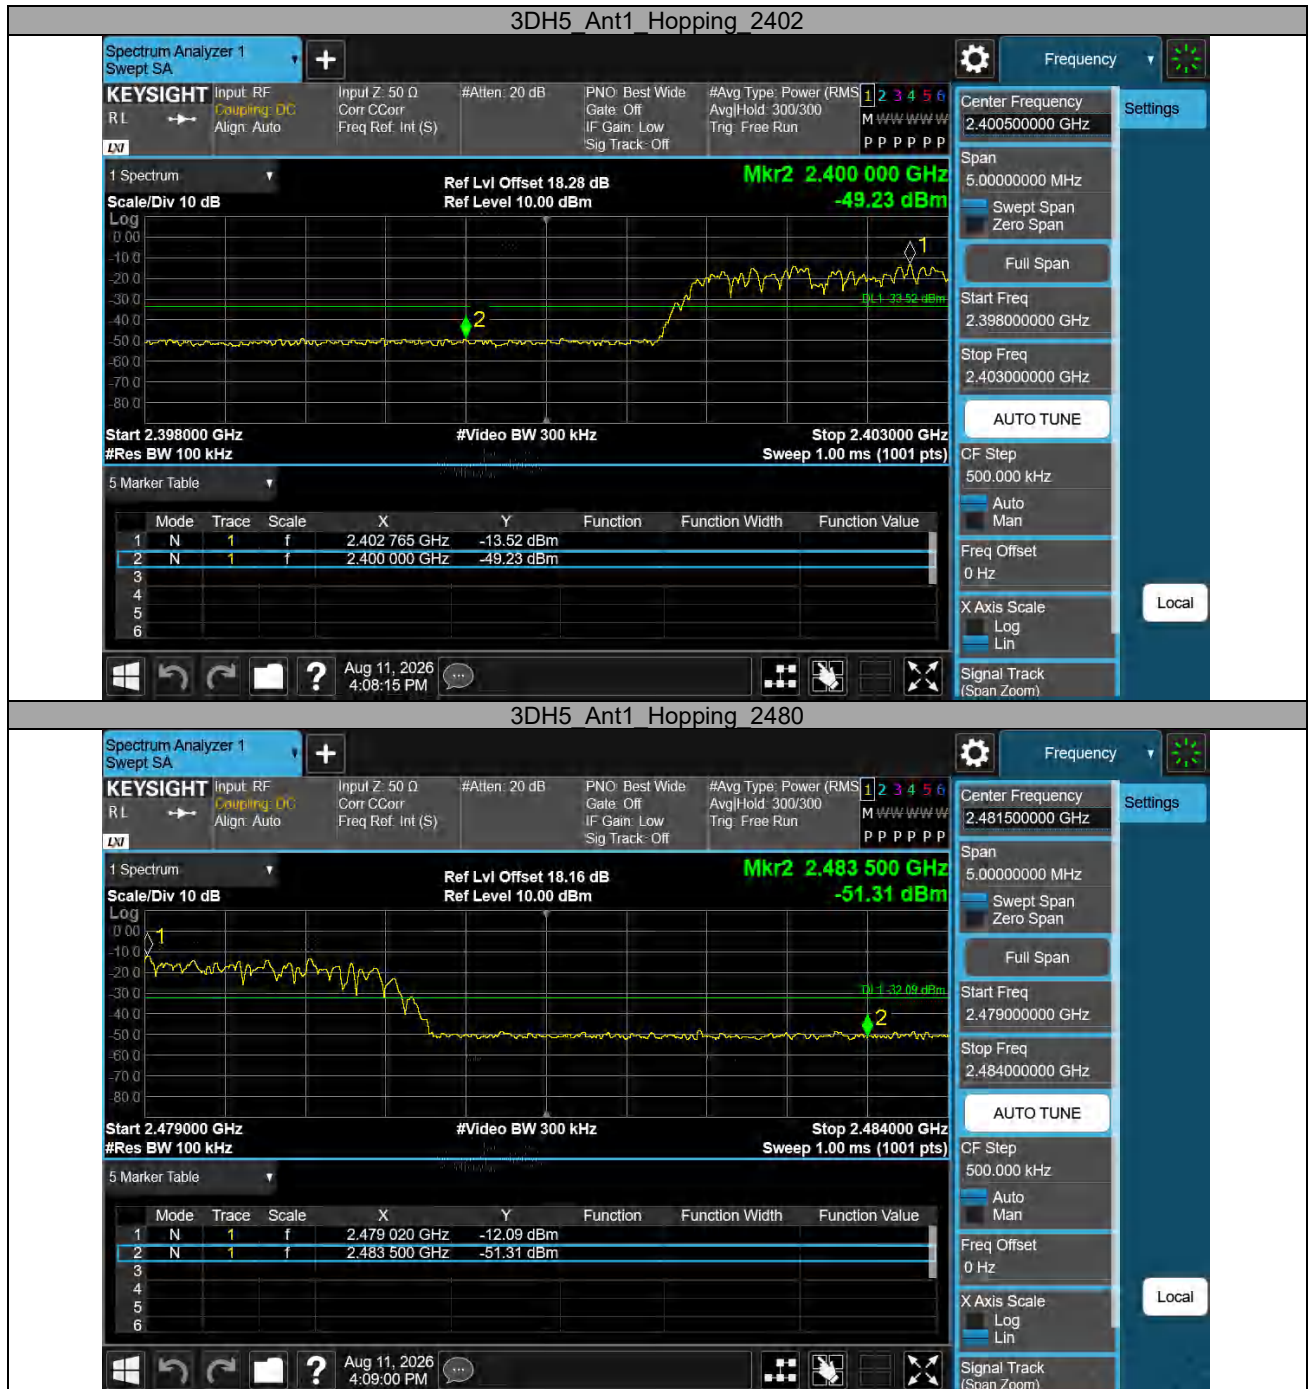



Appendix A.7: Test Results of Conducted Spurious Emission


Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-10.12	-10.12	---	PASS
			30~1000	-10.12	-41.48	≤-30.12	PASS
			1000~26500	-10.12	-42.55	≤-30.12	PASS
		2441	Reference	-9.86	-9.86	---	PASS
			30~1000	-9.86	-40.46	≤-29.86	PASS
			1000~26500	-9.86	-42.64	≤-29.86	PASS
		2480	Reference	-9.84	-9.84	---	PASS
			30~1000	-9.84	-40.39	≤-29.84	PASS
			1000~26500	-9.84	-42.85	≤-29.84	PASS
3DH5	Ant1	2402	Reference	-11.26	-11.26	---	PASS
			30~1000	-11.26	-41.29	≤-31.26	PASS
			1000~26500	-11.26	-42.45	≤-31.26	PASS
		2441	Reference	-11.16	-11.16	---	PASS
			30~1000	-11.16	-41.14	≤-31.16	PASS
			1000~26500	-11.16	-42.78	≤-31.16	PASS
		2480	Reference	-14.16	-14.16	---	PASS
			30~1000	-14.16	-41.01	≤-34.16	PASS
			1000~26500	-14.16	-42.97	≤-34.16	PASS


Test Graphs

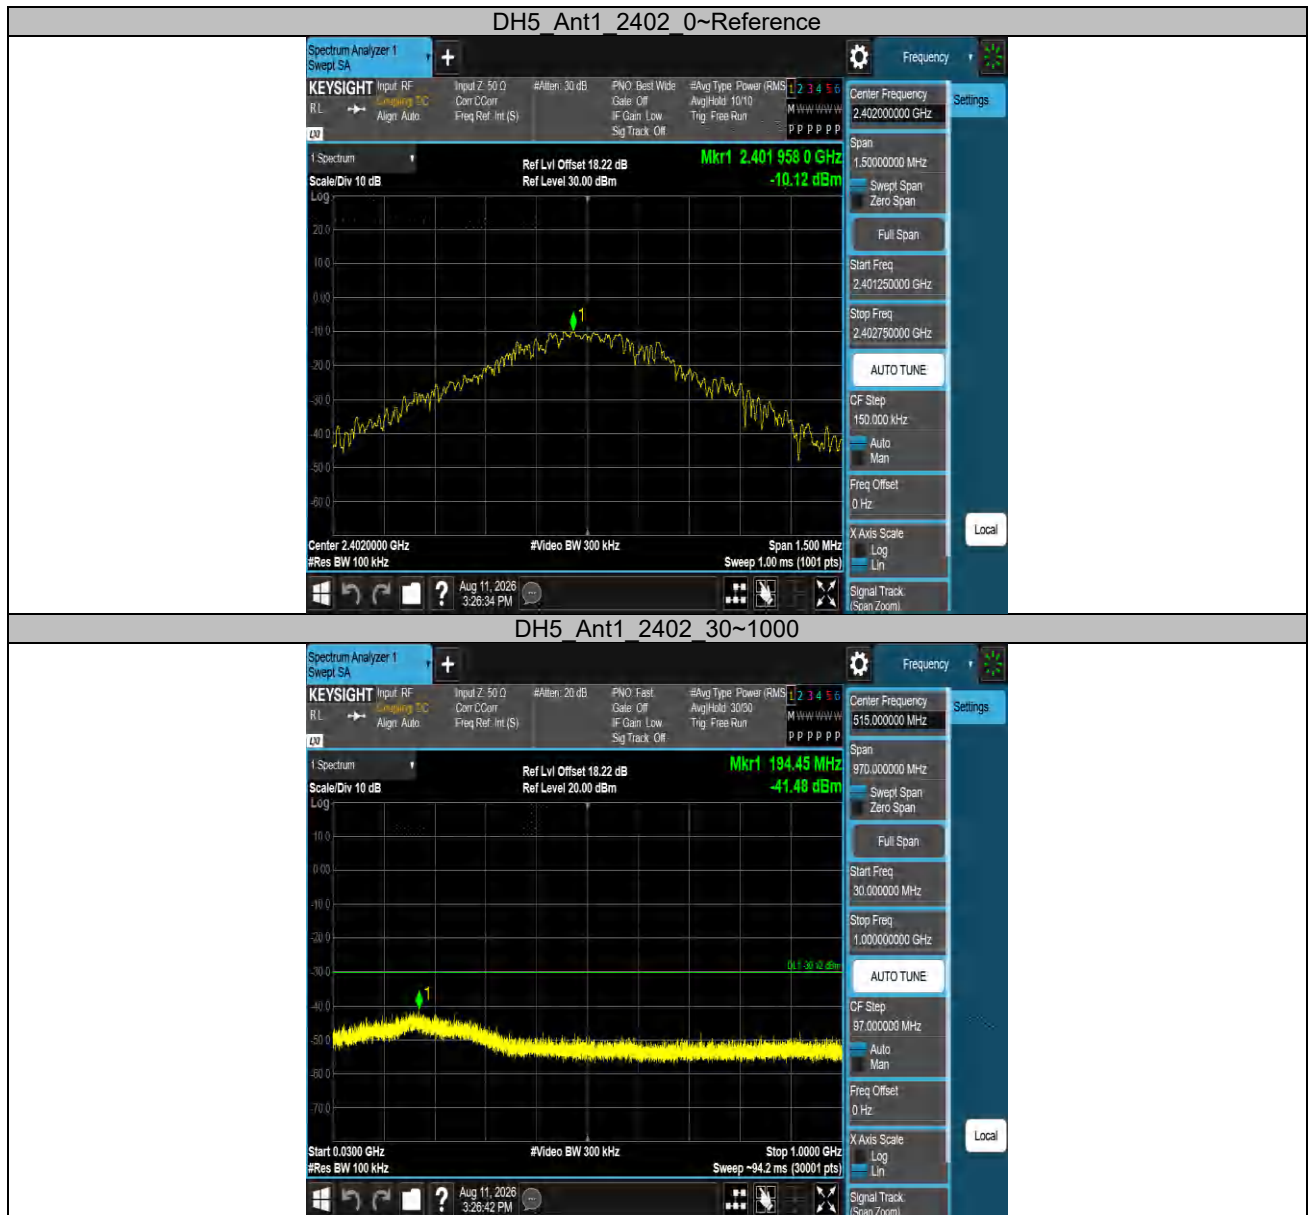


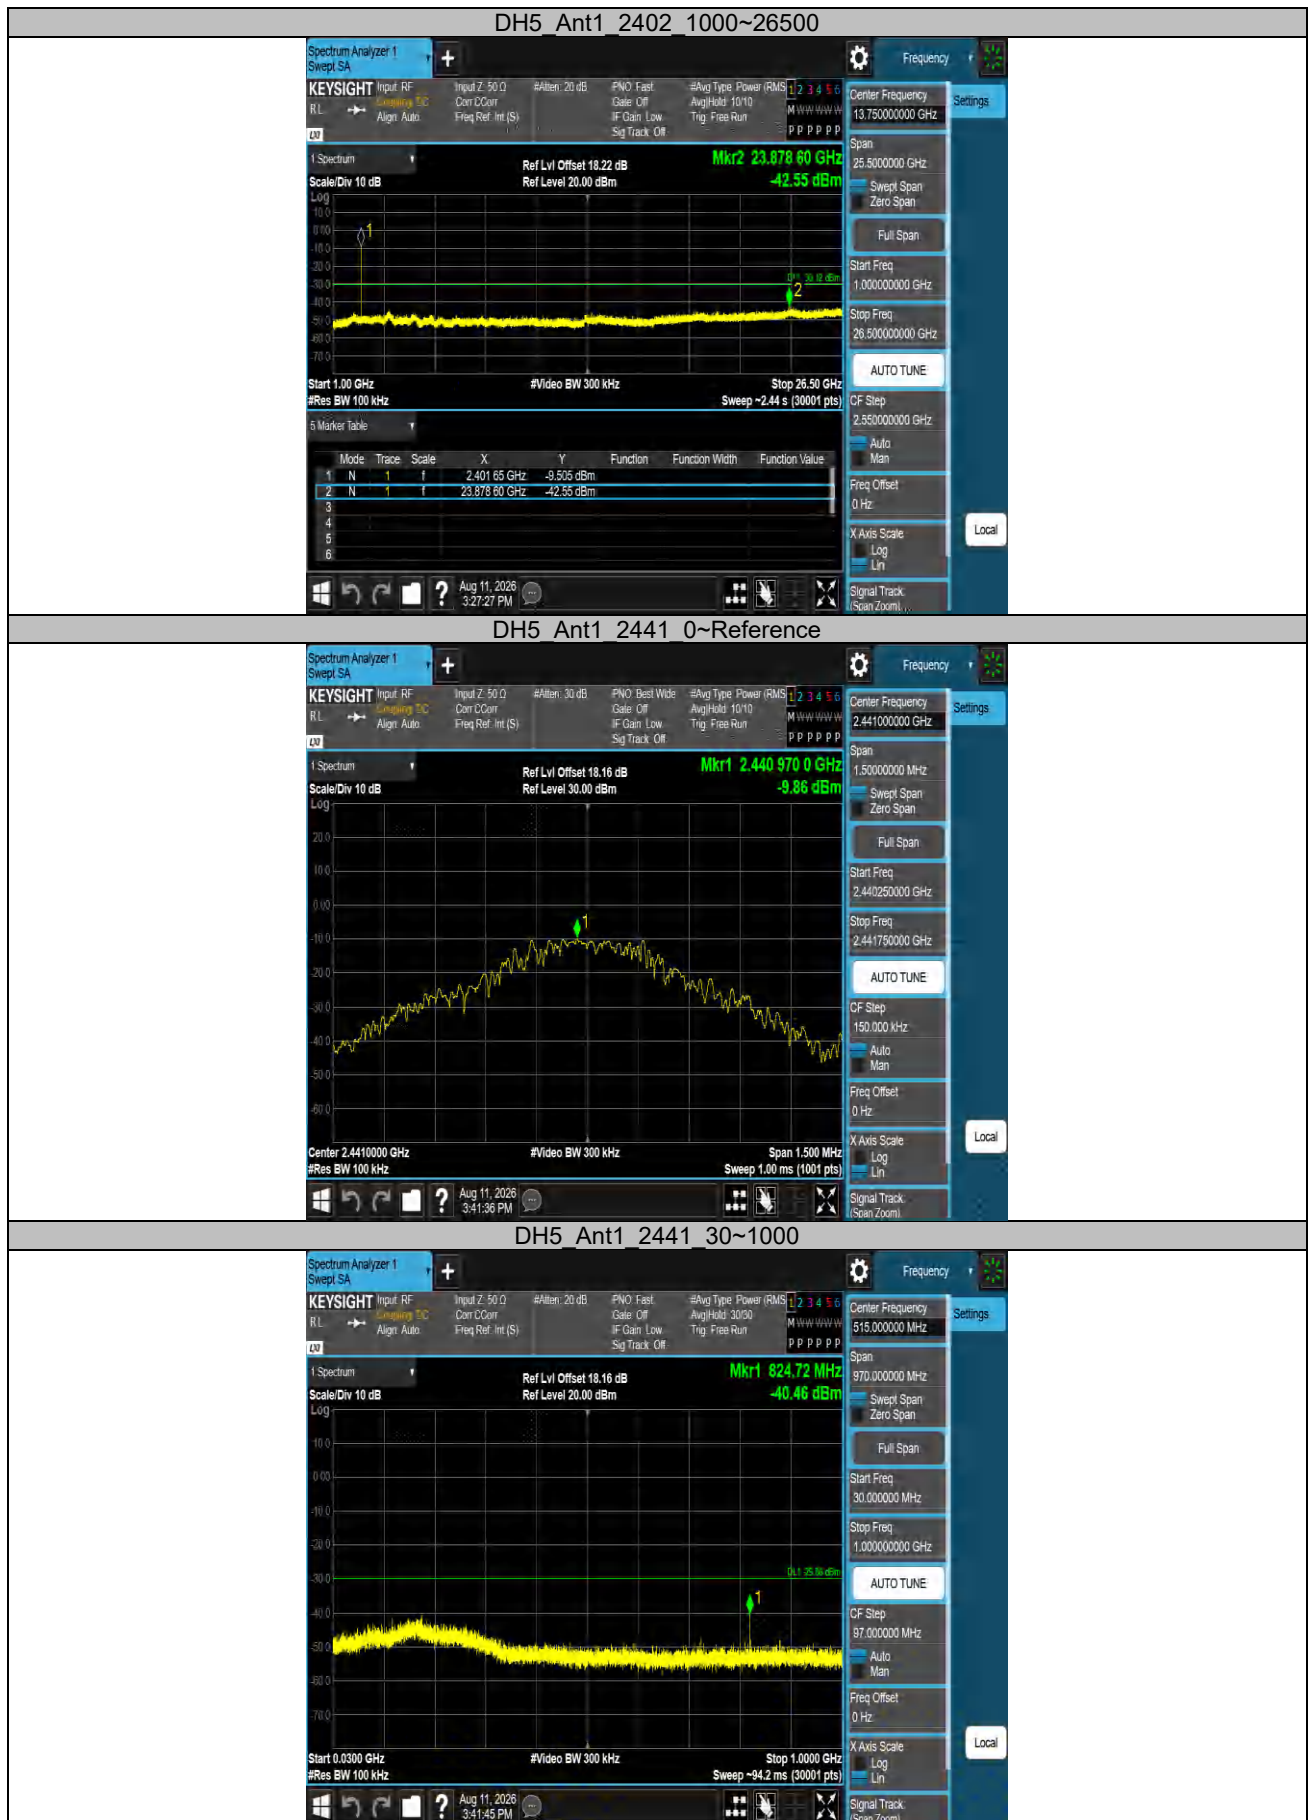

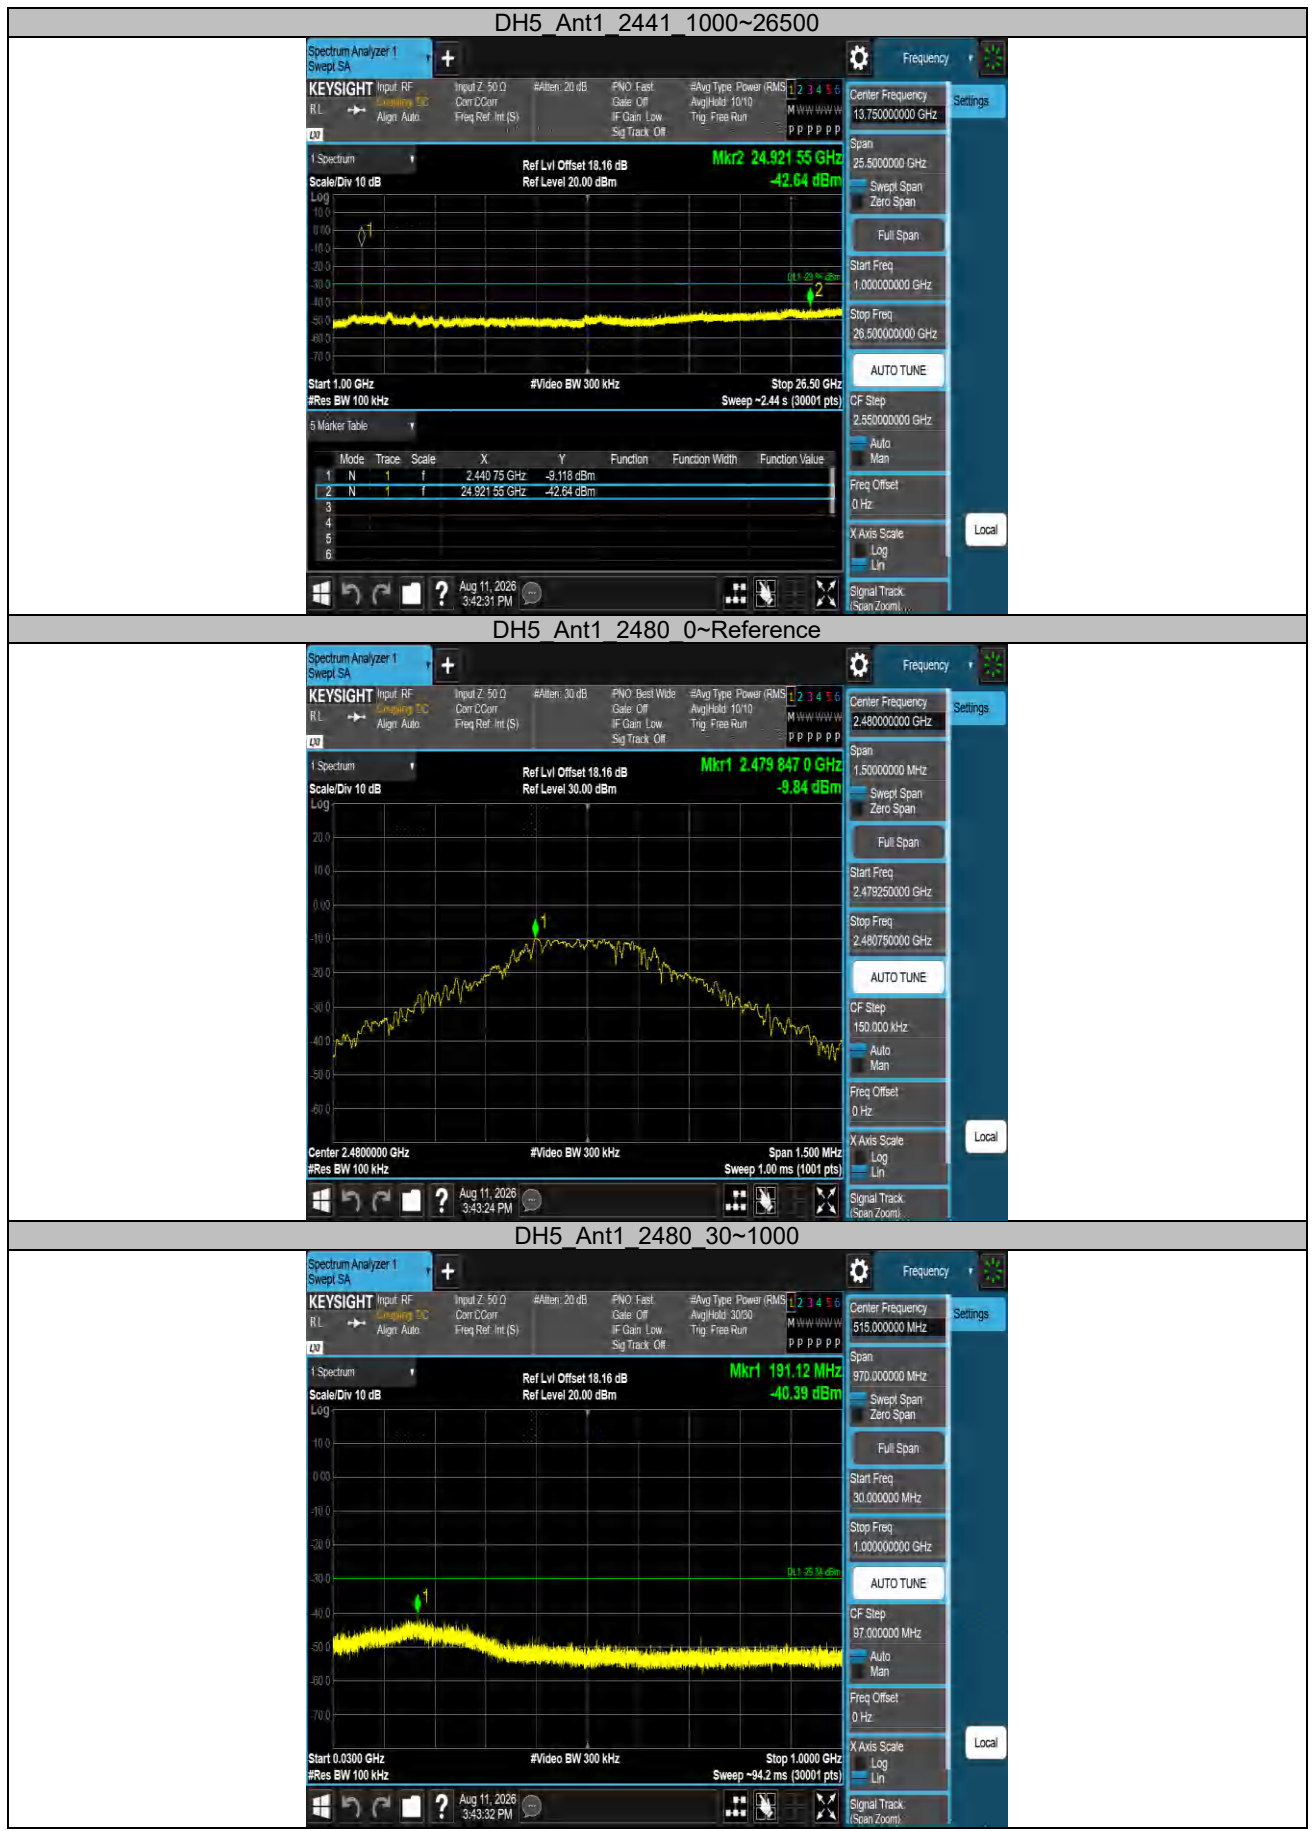



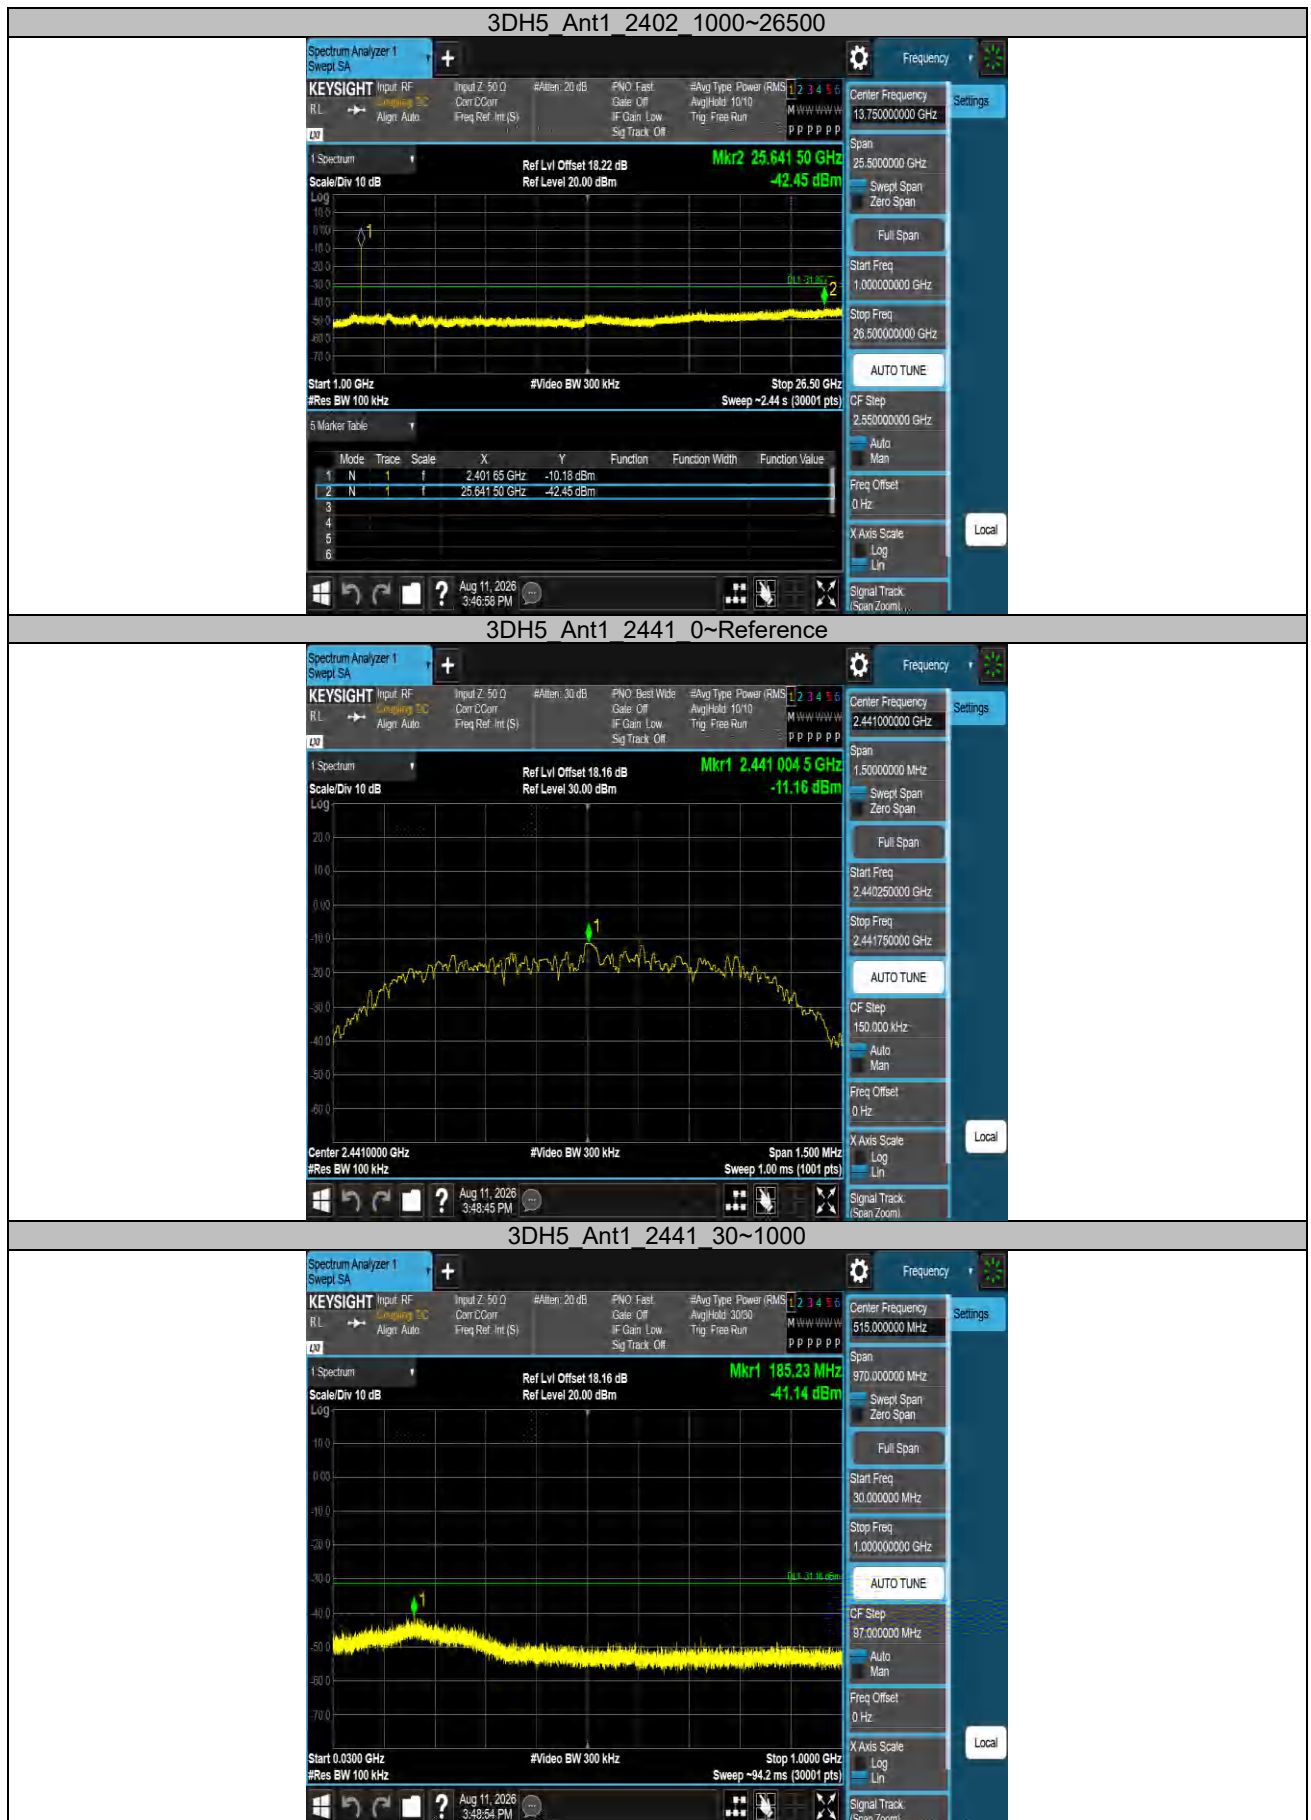

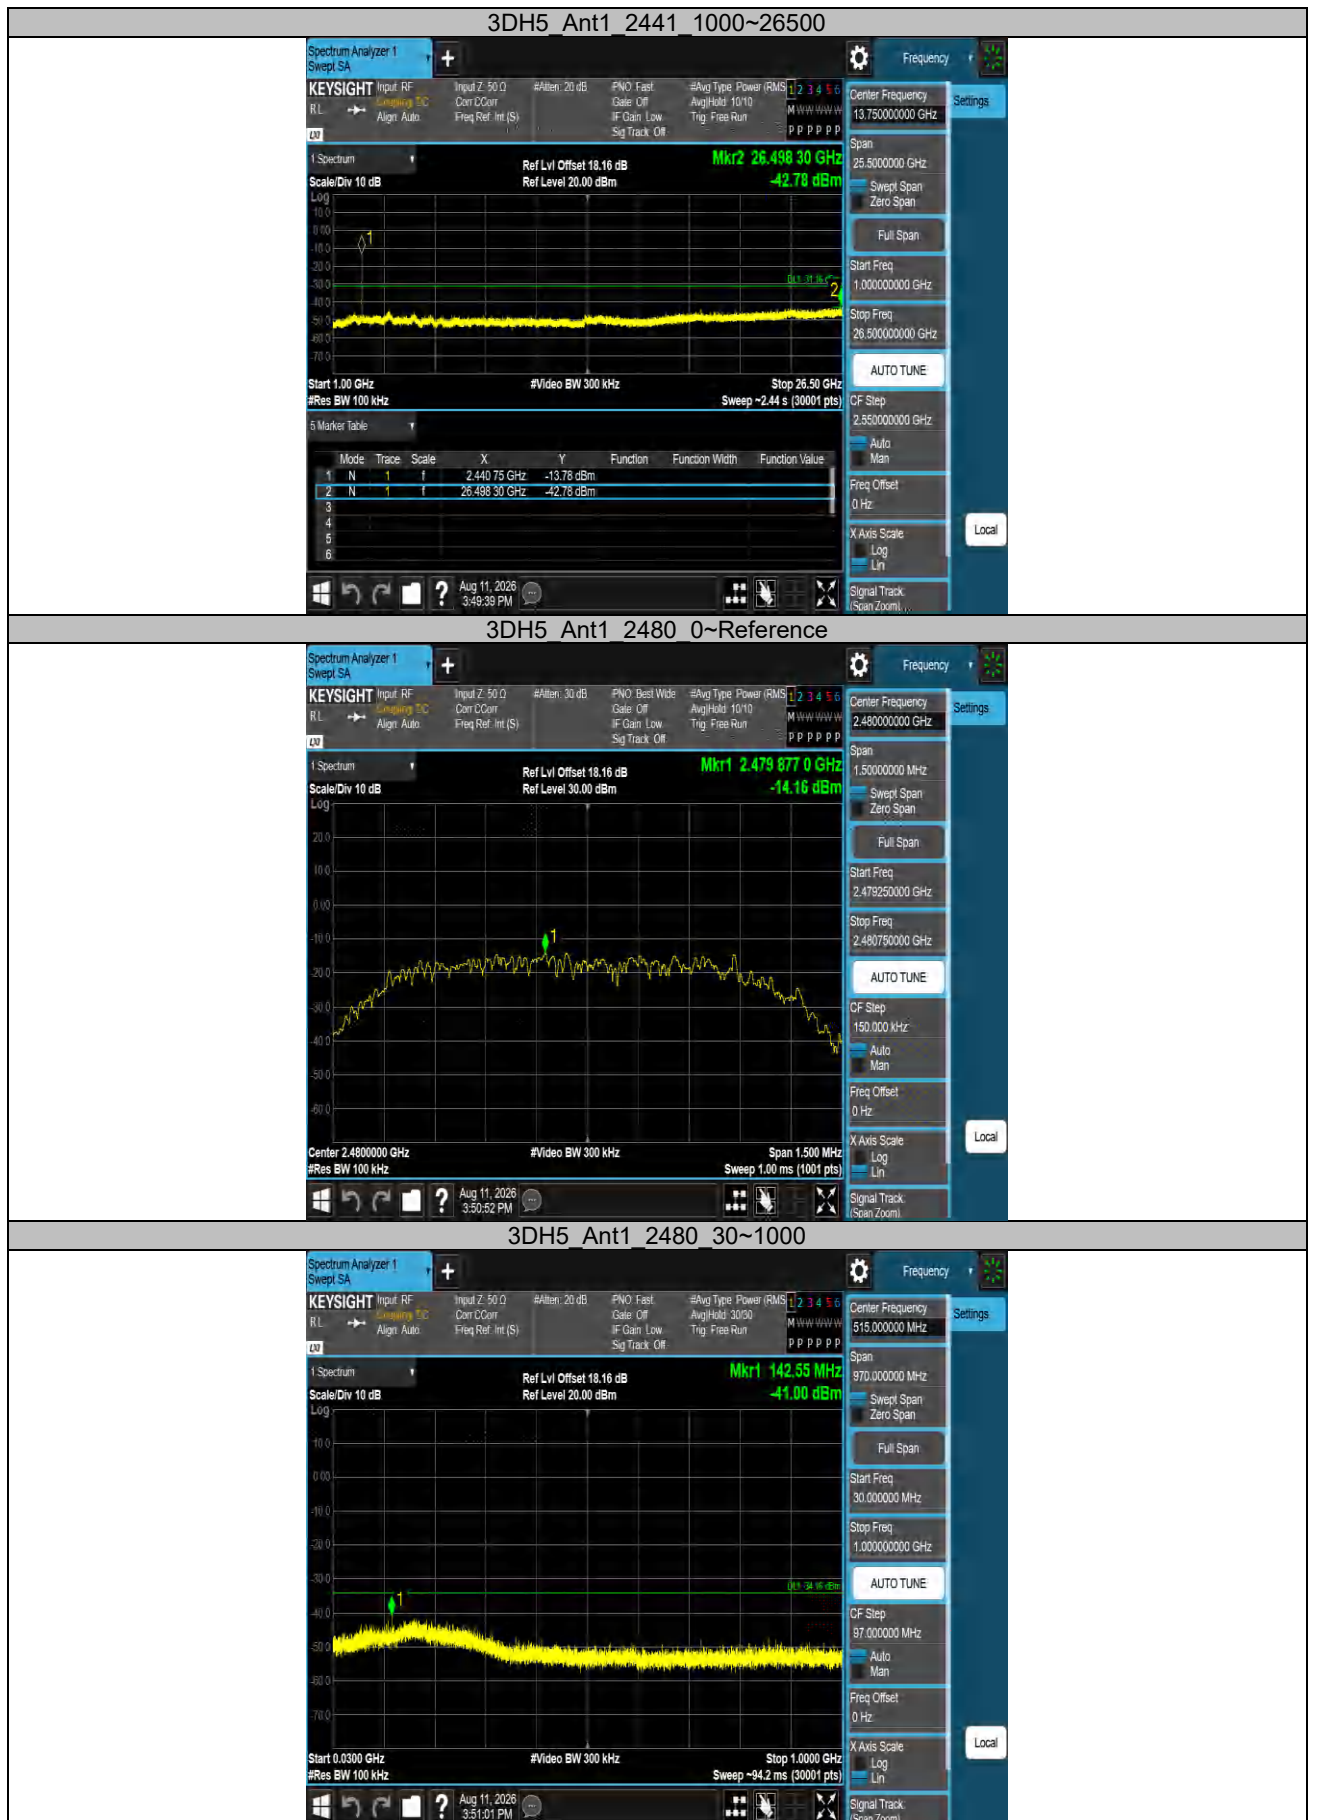



Appendix A.8: Test Results of Radiated Spurious Emissions

Note:


- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

Worst case:

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

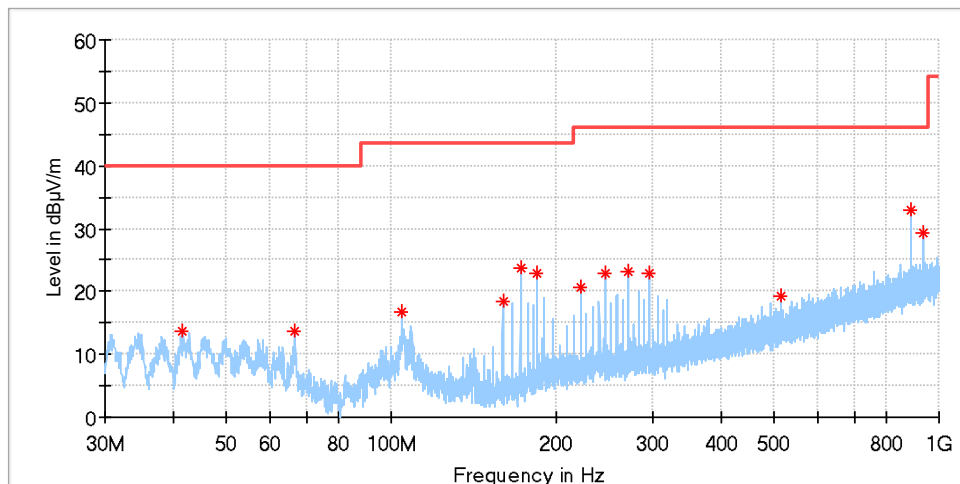

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.640000	13.70	40.00	26.30	100.0	H	0.0	-19.8
66.536667	13.60	40.00	26.40	100.0	H	353.0	-20.8
104.205000	16.65	43.50	26.85	100.0	H	314.0	-18.9
159.710556	18.30	43.50	25.20	100.0	H	0.0	-21.8
171.997222	23.63	43.50	19.87	100.0	H	0.0	-21.2
184.283889	22.82	43.50	20.68	100.0	H	0.0	-20.2
221.143889	20.73	46.00	25.27	100.0	H	163.0	-18.6
245.771111	23.00	46.00	23.00	100.0	H	172.0	-17.5
270.344444	23.17	46.00	22.83	100.0	H	163.0	-16.9
294.917778	22.78	46.00	23.22	100.0	H	188.0	-16.4
516.077778	19.17	46.00	26.83	100.0	H	0.0	-11.6
890.982778	32.86	46.00	13.14	100.0	H	298.0	-4.9
936.950000	29.36	46.00	16.64	100.0	H	204.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

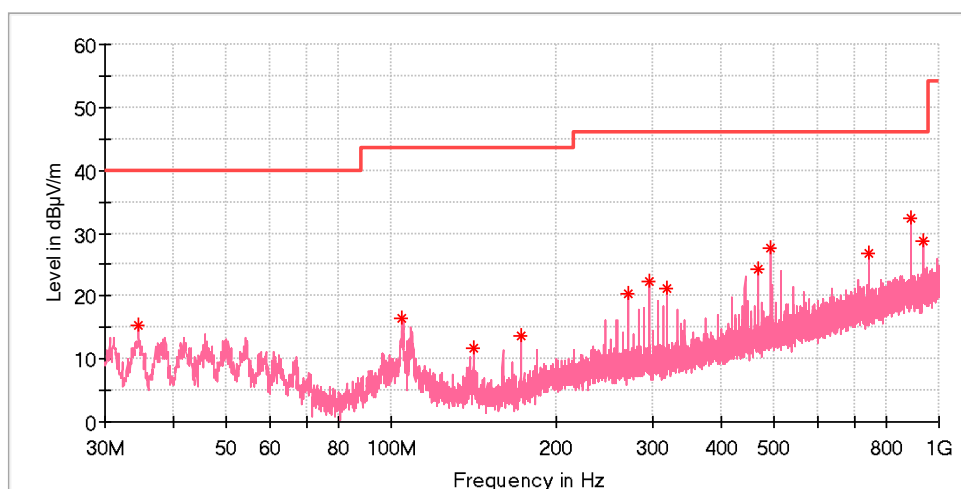

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.580556	15.24	40.00	24.76	100.0	V	70.0	-22.1
104.636111	16.43	43.50	27.08	100.0	V	103.0	-18.9
141.172778	11.60	43.50	31.90	100.0	V	309.0	-22.4
171.997222	13.60	43.50	29.90	100.0	V	110.0	-21.2
270.344444	20.40	46.00	25.60	100.0	V	157.0	-16.9
294.917778	22.34	46.00	23.66	100.0	V	150.0	-16.4
319.491111	21.33	46.00	24.67	100.0	V	181.0	-15.7
466.931111	24.25	46.00	21.75	100.0	V	0.0	-12.4
491.504444	27.58	46.00	18.42	100.0	V	189.0	-12.0
742.465000	26.81	46.00	19.19	100.0	V	53.0	-7.2
890.982778	32.35	46.00	13.65	100.0	V	333.0	-4.9
938.458889	28.70	46.00	17.30	100.0	V	325.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

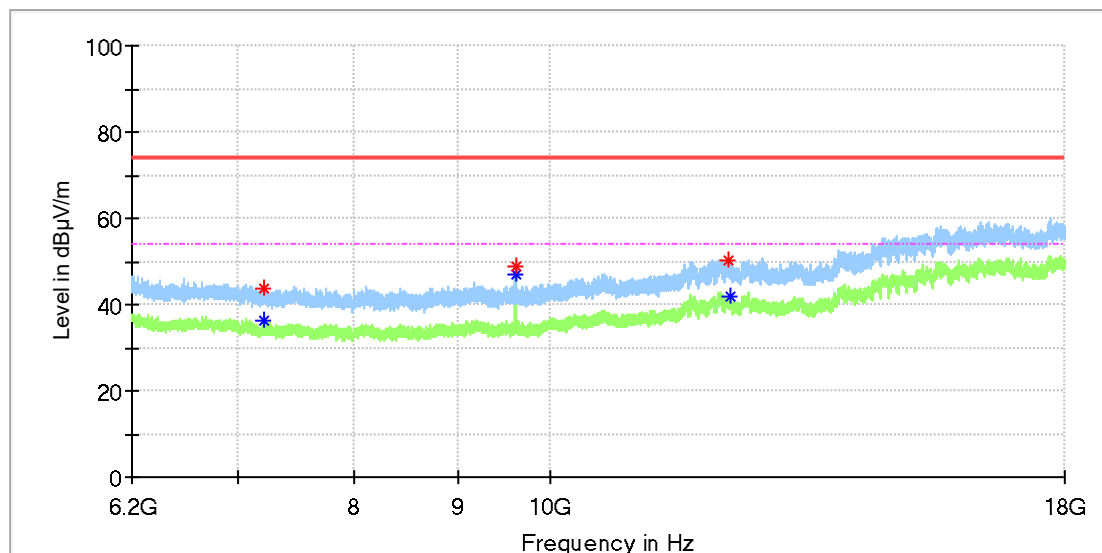

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
7205.950000	---	36.14	54.00	17.86	150.0	H	240.0	8.8
7210.375000	43.86	---	74.00	30.14	150.0	H	159.0	8.7
9607.741667	---	46.80	54.00	7.20	150.0	H	327.0	10.4
9607.741667	48.81	---	74.00	25.19	150.0	H	327.0	10.4
12270.116667	50.46	---	74.00	23.54	150.0	H	295.0	16.1
12289.291667	---	41.91	54.00	12.09	150.0	H	317.0	16.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

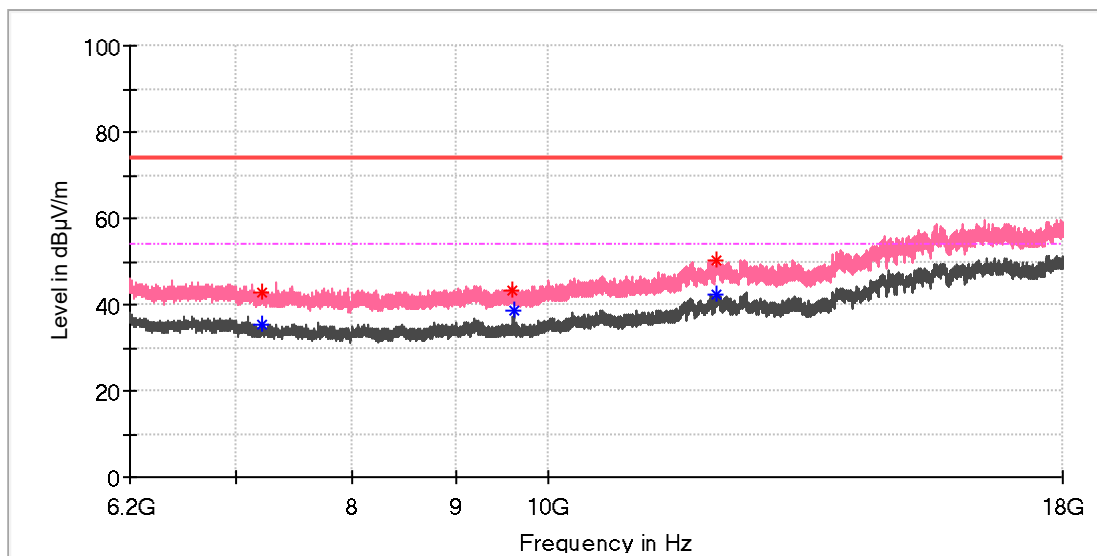

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
7203.491667	42.98	---	74.00	31.02	150.0	V	85.0	8.8
7203.983333	---	35.43	54.00	18.57	150.0	V	63.0	8.8
9607.250000	43.20	---	74.00	30.80	150.0	V	119.0	10.4
9608.233333	---	38.83	54.00	15.17	150.0	V	304.0	10.4
12122.616667	---	42.17	54.00	11.83	150.0	V	174.0	16.0
12129.008333	50.09	---	74.00	23.91	150.0	V	53.0	16.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name: ME WIRELESS HEADPHONES
Model: EBA2-265008A
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27240160/A004303795-002
Test Voltage: Battery
Remark: Temp 23.2°C Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

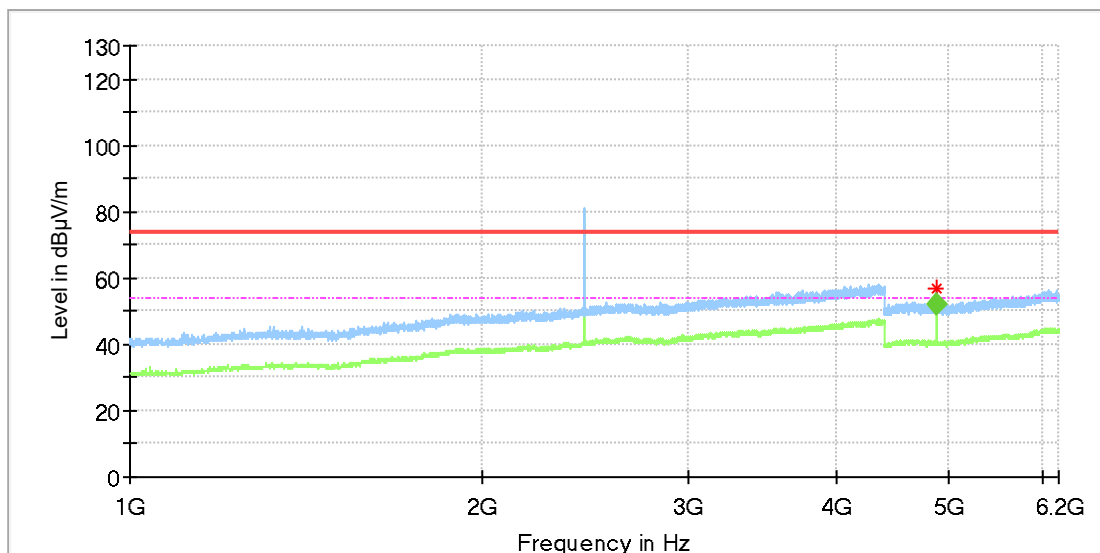

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	56.61	---	74.00	17.39	150.0	H	282.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.836111	---	51.97	54.00	2.03	150.0	H	282.0	13.3

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

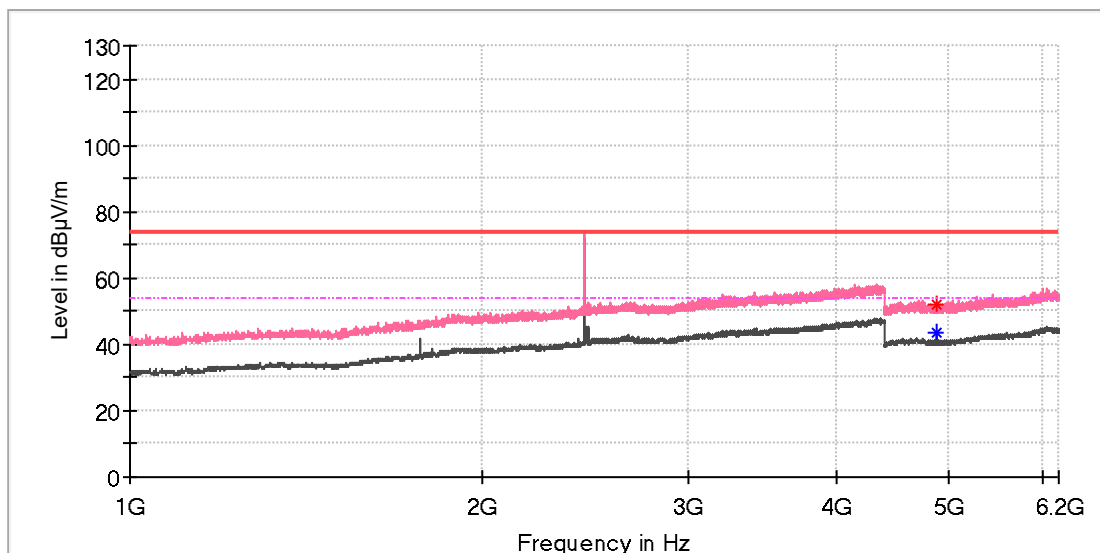

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.500000	---	43.36	54.00	10.64	150.0	V	308.0	13.3
4882.000000	52.13	---	74.00	21.87	150.0	V	317.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

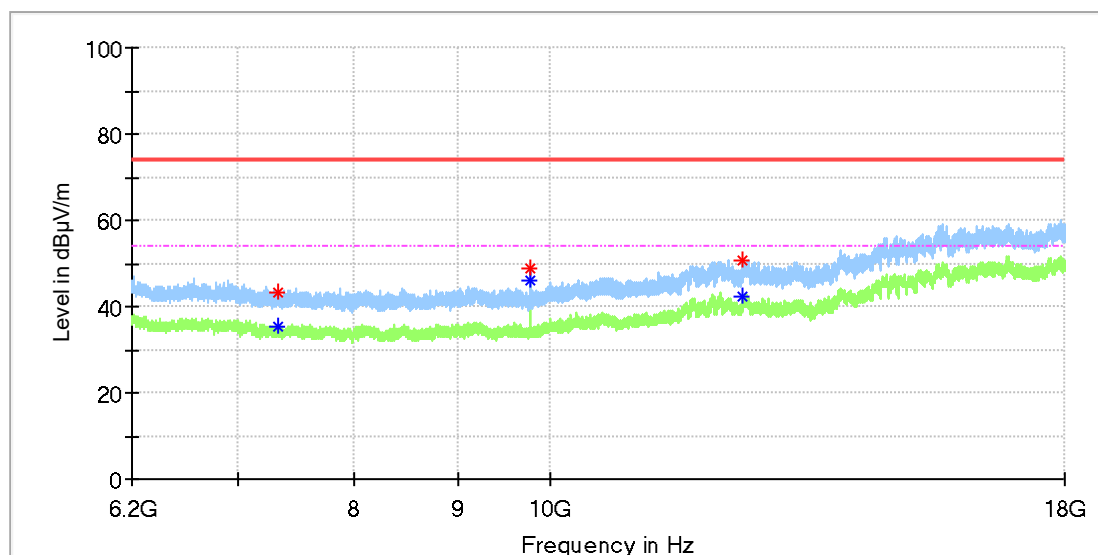

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7321.491667	43.48	---	74.00	30.52	150.0	H	209.0	8.2
7323.458333	---	35.50	54.00	18.50	150.0	H	342.0	8.2
9764.091667	48.81	---	74.00	25.19	150.0	H	4.0	10.4
9764.091667	---	46.11	54.00	7.89	150.0	H	4.0	10.4
12454.983333	50.48	---	74.00	23.52	150.0	H	310.0	16.2
12456.950000	---	42.46	54.00	11.54	150.0	H	220.0	16.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.0	100.0	100.0	100.0	100.0	100.0		100.0	100.0

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

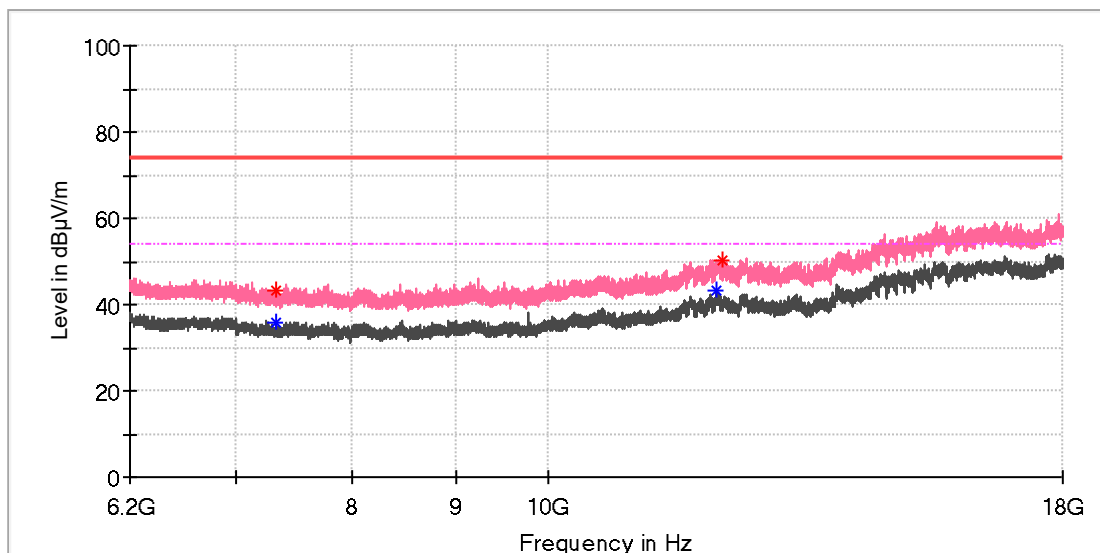

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7330.833333	---	35.92	54.00	18.08	150.0	V	261.0	8.1
7330.833333	43.24	---	74.00	30.76	150.0	V	261.0	8.1
12129.008333	---	43.10	54.00	10.90	150.0	V	62.0	16.2
12199.316667	50.45	---	74.00	23.55	150.0	V	150.0	15.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_High channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

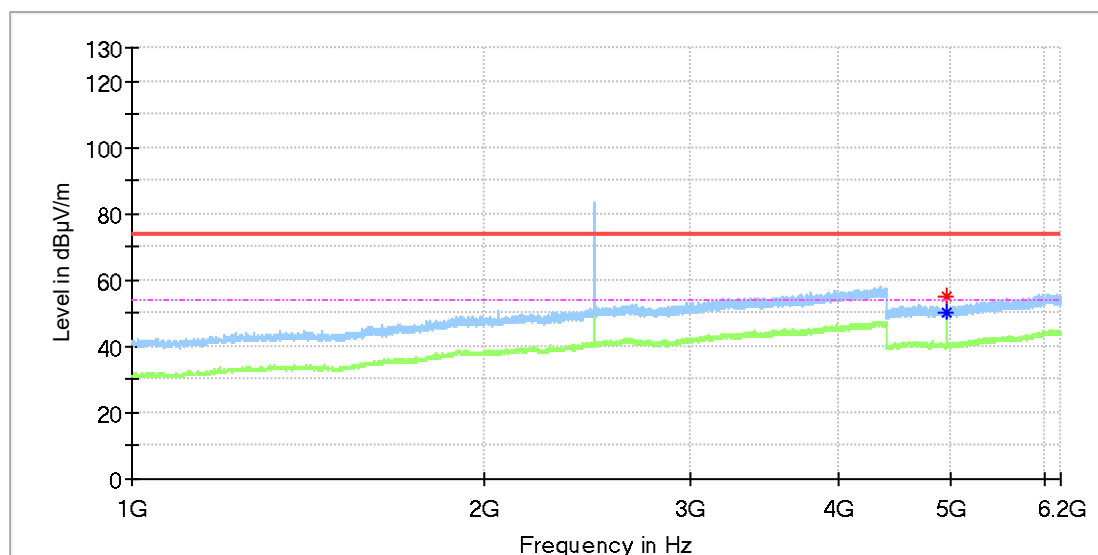


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	---	50.07	54.00	3.93	150.0	H	228.0	13.3
4960.000000	55.25	---	74.00	18.75	150.0	H	228.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.0	100.0	100.0	100.0	100.0	100.0		100.0	


EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_High channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin



EUT Information

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_High channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

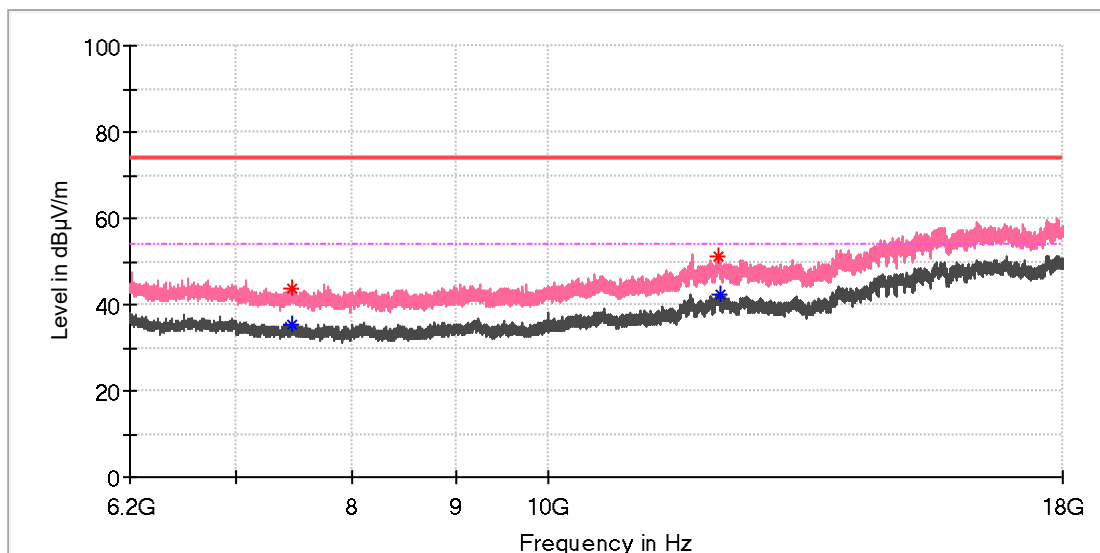

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7461.616667	---	35.12	54.00	18.88	150.0	V	197.0	8.6
7463.091667	43.93	---	74.00	30.07	150.0	V	0.0	8.6
12155.066667	51.19	---	74.00	22.81	150.0	V	340.0	16.5
12160.966667	---	42.37	54.00	11.63	150.0	V	291.0	16.2


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

Appendix A.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

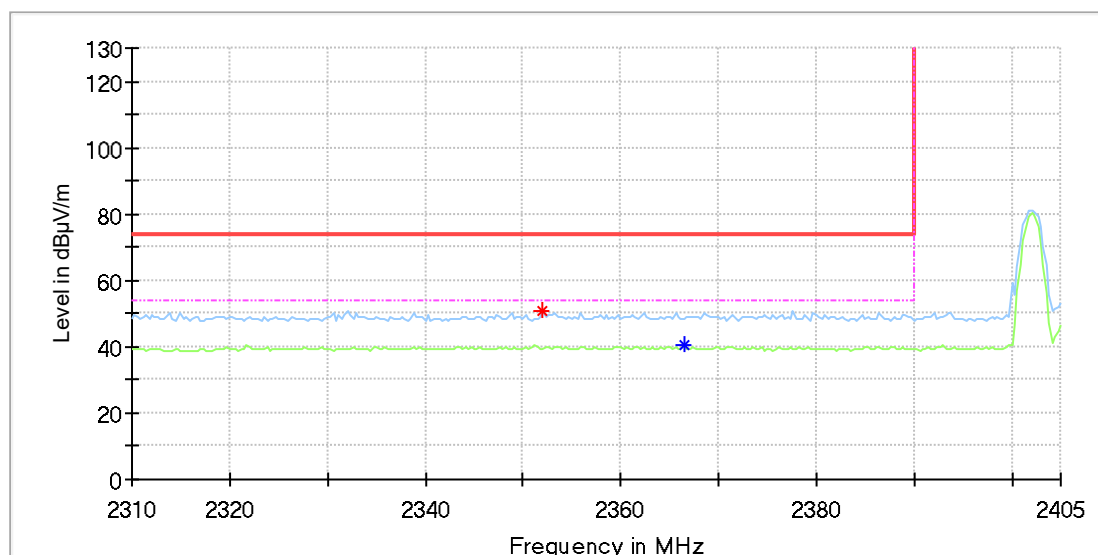

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.058824	51.07	---	74.00	22.93	150.0	H	300.0	8.5
2366.470588	---	40.55	54.00	13.45	150.0	H	291.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

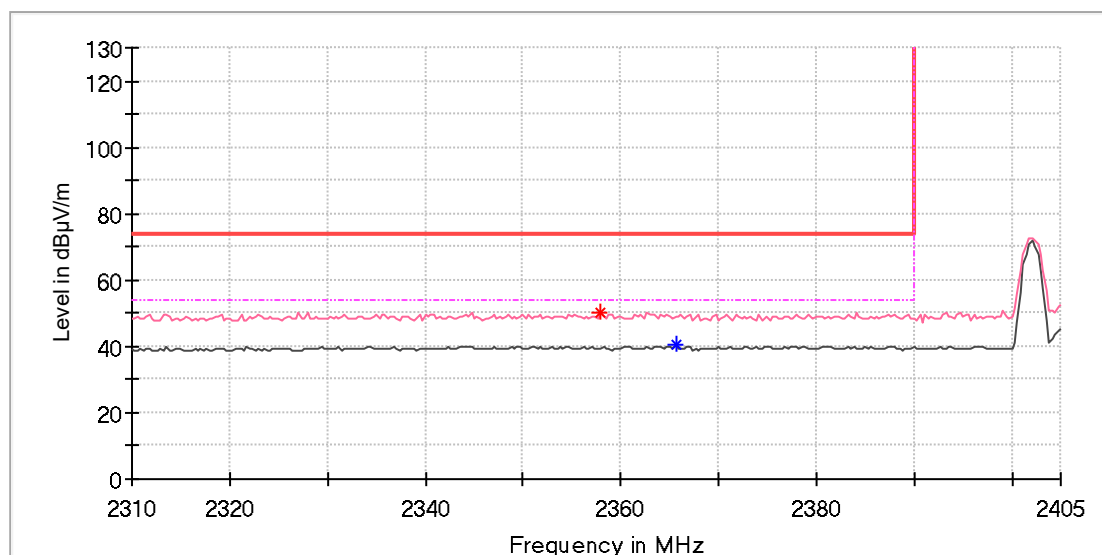

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2357.941177	50.16	---	74.00	23.84	150.0	V	87.0	8.5
2365.588235	---	40.58	54.00	13.42	150.0	V	309.0	8.5


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

EUT Information

EUT Name:	ME WIRELESS HEADPHONES
Model:	EBA2-265008A
Test Mode:	BR DH5_High channel
Order No/Sample No:	27240160/A004303795-002
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

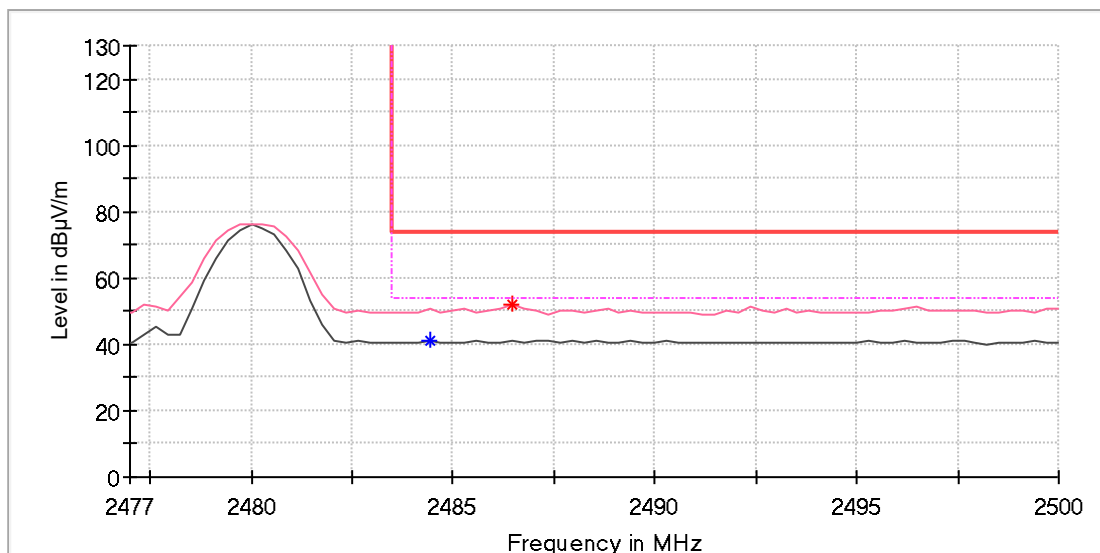

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.411765	---	41.18	54.00	12.82	150.0	V	275.0	9.0
2486.470588	52.03	---	74.00	21.97	150.0	V	171.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	