

Prüfbericht-Nr.: Test report no.:	CN25FX3K 002	Auftrags-Nr.: Order no.:	168578895	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2025-10-14	
Auftraggeber: Client:	SRP Companies 1401 17th Street, Suite 700 Denver, CO 80202, USA			
Prüfgegenstand: Test item:	Wireless magnetic Power bank			
Bezeichnung / Typ-Nr.: Identification / Type no.:	H202508-C-001Y			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR Title 47 FCC Part 15: Subpart C Section 15.215 CFR Title 47 FCC Part 15: Subpart C Section 15.207 CFR Title 47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2025-10-24	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A004110764-007 ~ 009			
Prüfzeitraum: Testing period:	2025-10-31 - 2025-11-05			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	<u>X Hardy</u> Suo		genehmigt von: authorized by:	<u>X Jonath</u> an Li
Datum: Date:	2026-01-07		Ausstellungsdatum: Issue date:	2026-01-07
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2ATF5-H71105 Factory: HANK ELECTRONICS VIETNAM COMPANY LIMITED Lot 74B/75A, No. 55, Road 11, VSIP Bac Ninh Industrial, Urban and Service Park, Dai Dong Commune, Tien Du District, Bac Ninh Province, Vietnam.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25FX3K 002
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25FX3K 002
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY.....	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES.....	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS	9
4	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS.....	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	12
5.1.1	<i>Antenna Requirement.....</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth.....</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics.....</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2025-09-23	2026-09-22
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2025-09-22	2026-09-21
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2025-09-22	2026-09-21
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2025-09-22	2026-09-21
Amplifier	R&S	SCU-18F	180070	2025-09-22	2026-09-21
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2026-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2026-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2026-02-09
Artificial Mains Network	R&S	ENV216	102333	2026-07-18
Shield Cable(9k-30MHz)	N/A	N/A	N/A	2025-12-20
EMC32 Test Software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	$\pm 2.08 \%$
All emissions, radiated	$\pm 4.17 \text{ dB}$
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.24 \text{ dB} / \pm 3.24 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Wireless magnetic Power bank which supports wireless charging (WPT) function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Wireless magnetic Power bank
Type Designation:	H202508-C-001Y
FCC ID:	2ATF5-H71105
Operating Voltage:	Type-C Input: 5Vdc, 3A / 9Vdc, 2.22A / 12Vdc, 1.67A Type-C Output: 5Vdc, 3A / 9Vdc, 2.22A / 12Vdc, 1.67A
Testing Voltage	AC 120V / 60Hz, Full Battery
Technical Specification of WPT	
Frequency Range:	110 – 205 kHz
Type of Modulation:	FSK
Antenna Type:	Induction coil
Antenna Number:	1
Wireless output power:	5W / 7.5W / 10W / 15W

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

3.3 Independent Operation Modes

The basic operation modes are:

- A. Wireless charging (5W)
- B. Wireless Charging (10W)
- C. Wireless Charging (15W)
- D. On, Standby mode

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

Prüfbericht - Nr.: CN25FX3K 002
Test Report No.:

Seite 9 von 16
Page 9 of 16

3.5 Submitted Documents

- Application Form
- Operation Description
- User Manual
- FCC/IC Label and Location Info

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2020.

According to clause 3.1, all tests were performed on model *H202508-C-001Y* in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
AC/DC Adapter	Xiaomi	MDY-14-EU	N/A
Wireless charge Load	YBZ	YBZ-MPP25	N/A
Cell Phone	Apple	iPhone 16Plus	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

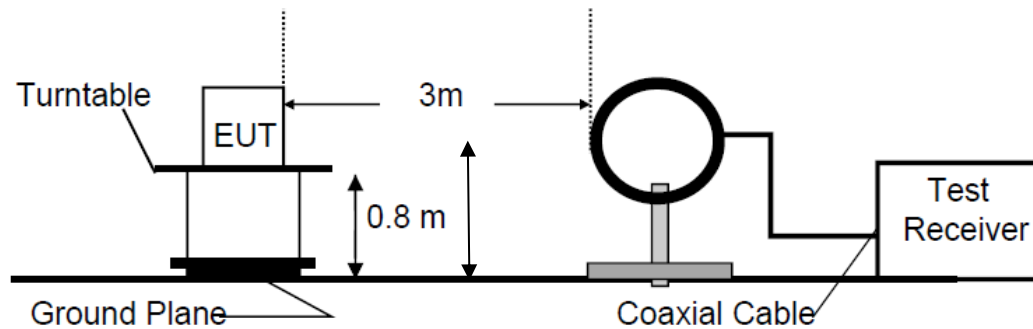


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


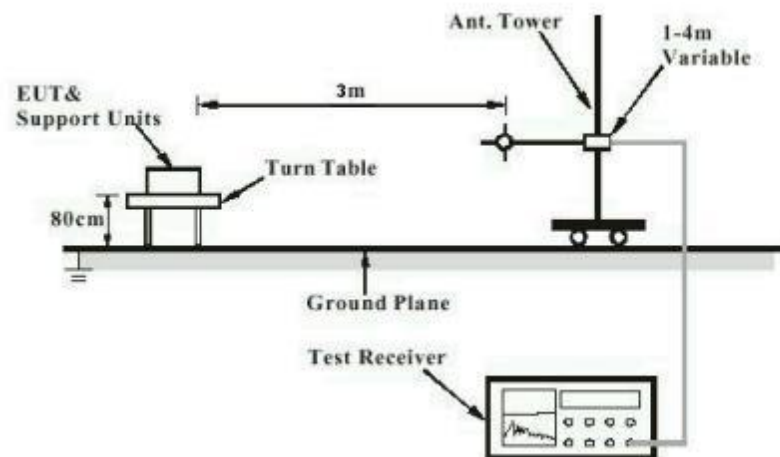


Diagram of Measurement Configuration for Mains Conduction Measurement

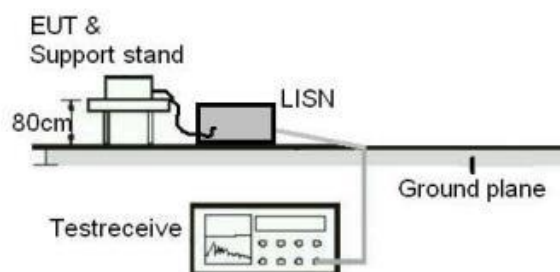

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.203
the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25FX3K 002

Test Report No.:

Seite 13 von 16

Page 13 of 16

5.1.2 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.215(c)
Basic standard	: ANSI C63.10:2020
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-11-05
Input voltage	: Full Battery
Operation mode	: A, B, C
Ambient temperature	: 22 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25FX3K 002

Test Report No.:

Seite 14 von 16

Page 14 of 16

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.209 & 15.205
Basic standard	: ANSI C63.10:2020
Limits	: Refer to 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2025-11-06
Input voltage	: Full Battery
Operation mode	: A, B, C, D
Ambient temperature	: 23 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN25FX3K 002

Test Report No.:

Seite 15 von 16

Page 15 of 16

5.1.4 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10:2020
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2025-10-31
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Ambient temperature	: 24.9 °C
Relative humidity	: 50.4 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20dB BANDWIDTH	2
<i>Wireless charging (5W).....</i>	<i>2</i>
<i>Wireless charging (10W).....</i>	<i>2</i>
<i>Wireless charging (15W).....</i>	<i>3</i>
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS.....	4
<i>Wireless charging (5W).....</i>	<i>4</i>
<i>Wireless charging (10W).....</i>	<i>15</i>
<i>Wireless charging (15W).....</i>	<i>26</i>
<i>Standby mode.....</i>	<i>37</i>
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	42

Appendix A.1: Test Results of 20dB Bandwidth


Wireless charging (5W)

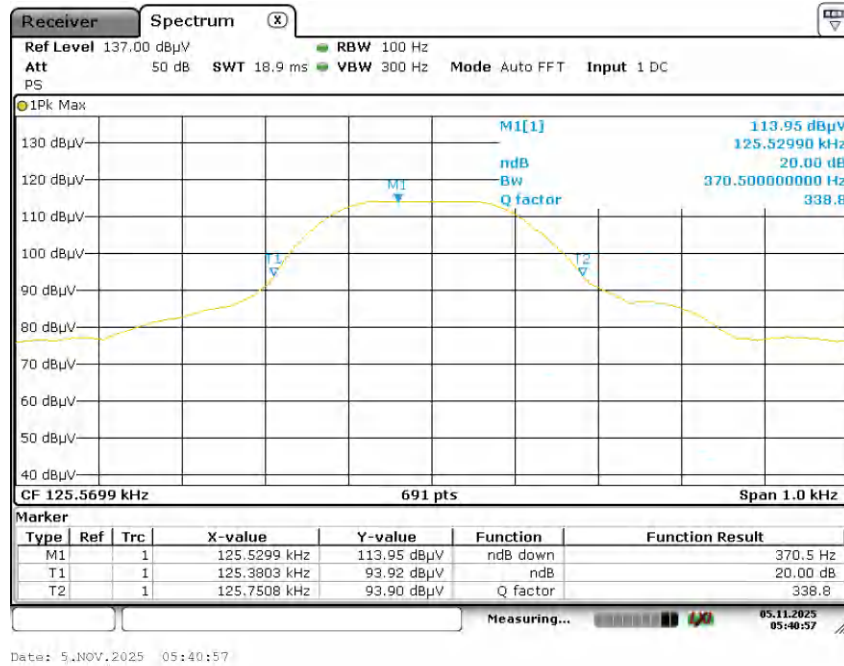

Wireless charging (10W)

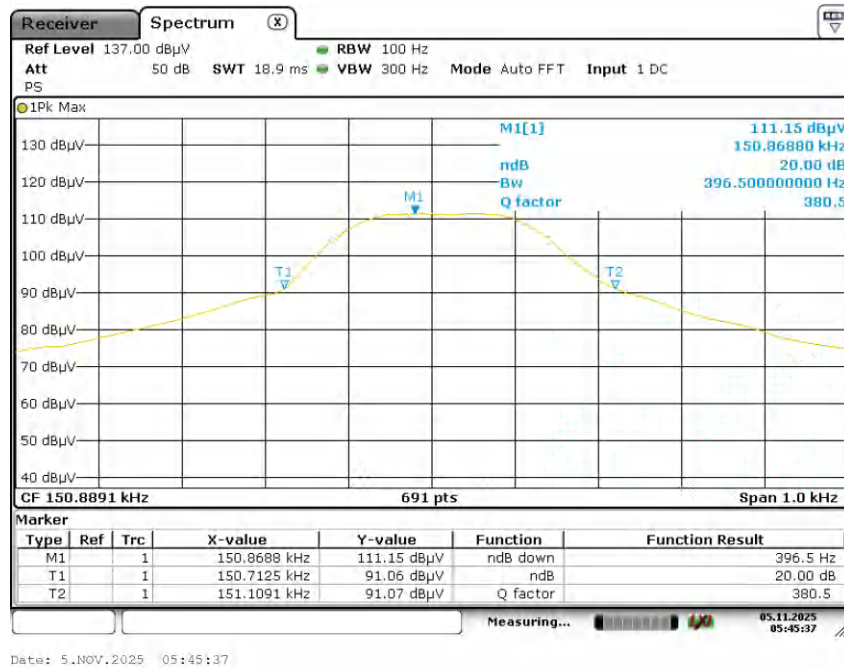

Wireless charging (15W)

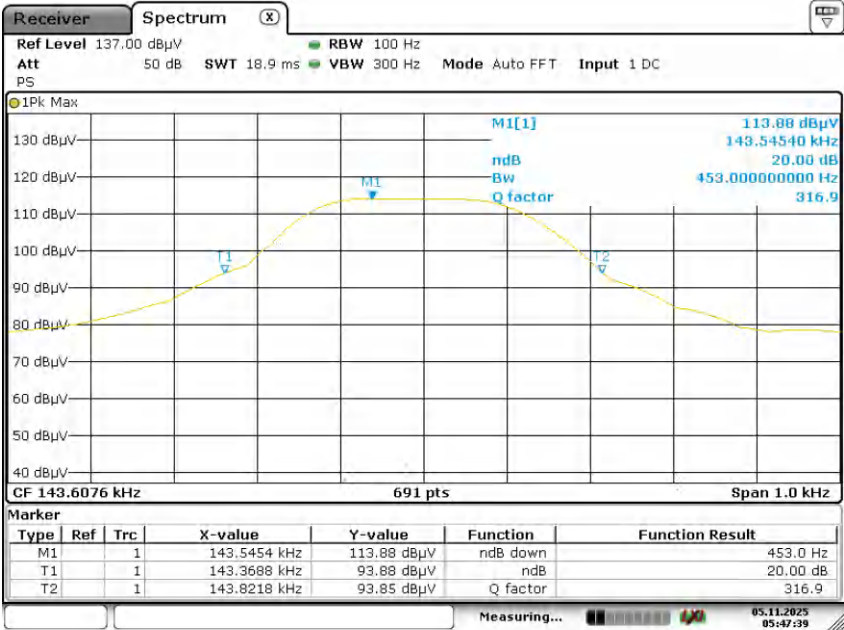

Date: 5.NOV.2025 05:47:39


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless charging (5W)

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

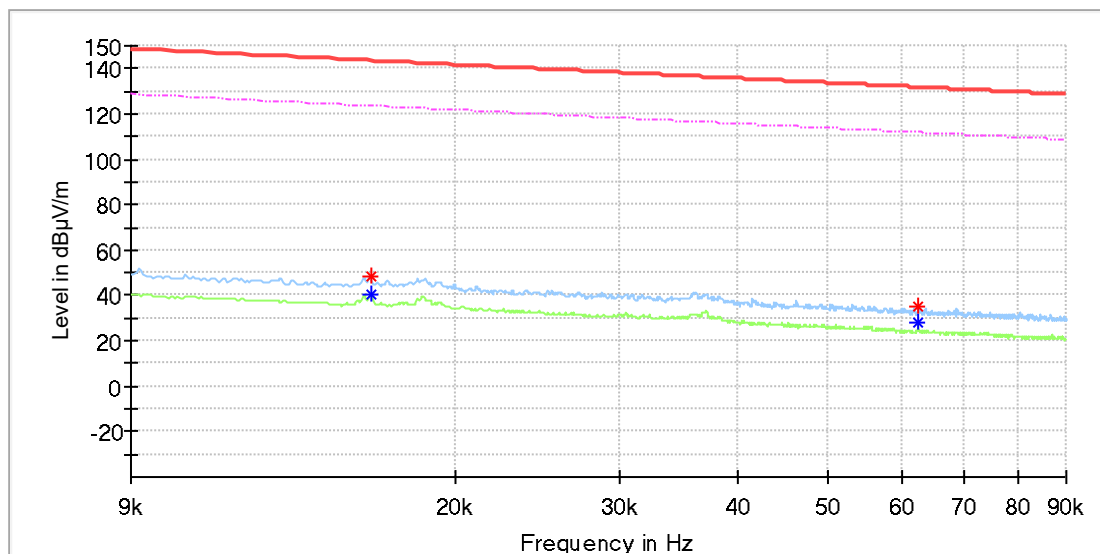


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.016232	48.48	—	143.38	94.90	100.0	X	51.0	20.0
0.016232	—	40.75	123.38	82.63	100.0	X	51.0	20.0
0.062518	35.14	—	131.67	96.53	100.0	X	125.0	20.0
0.062518	—	28.16	111.67	83.51	100.0	X	125.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

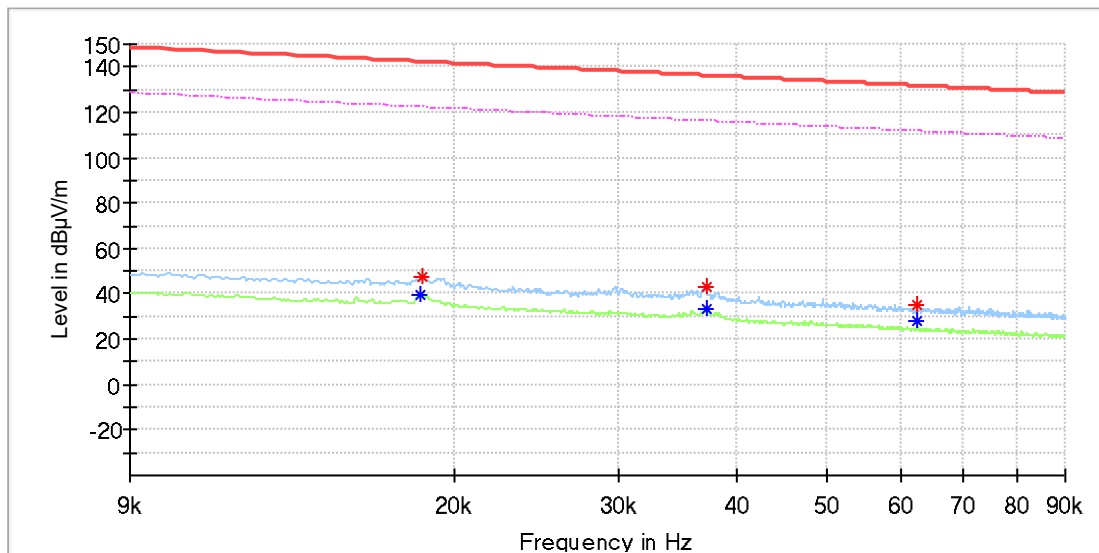


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	—	39.82	122.28	82.46	100.0	Y	73.0	20.0
0.018489	47.11	—	142.25	95.14	100.0	Y	73.0	20.0
0.037176	42.99	—	136.19	93.20	100.0	Y	333.0	20.0
0.037176	—	33.66	116.19	82.53	100.0	Y	333.0	20.0
0.062460	35.09	—	131.68	96.59	100.0	Y	248.0	20.0
0.062518	—	28.14	111.67	83.53	100.0	Y	248.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

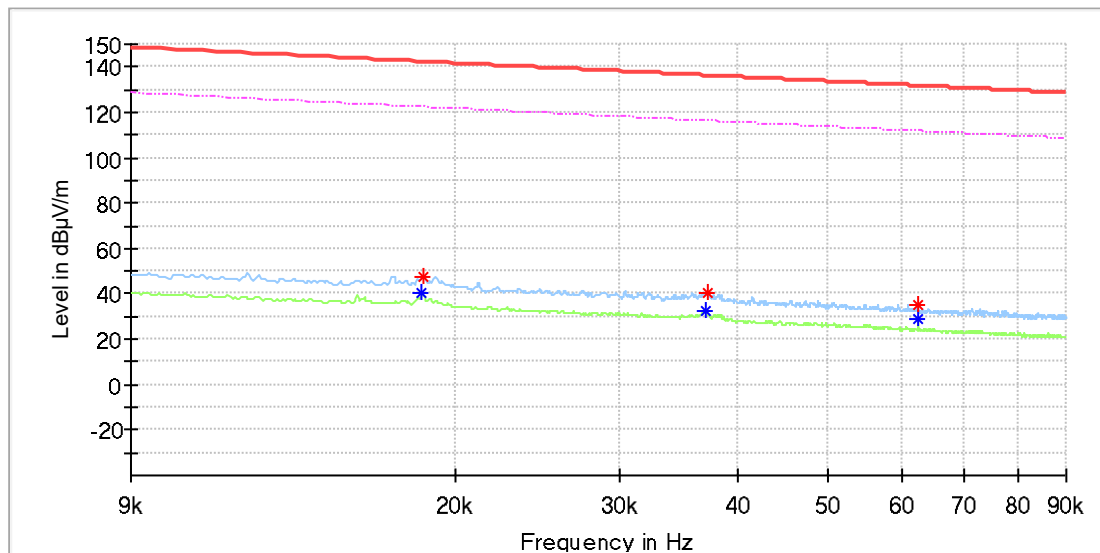


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	—	39.99	122.28	82.29	100.0	Z	299.0	20.0
0.018489	47.20	—	142.25	95.05	100.0	Z	299.0	20.0
0.037119	—	32.42	116.20	83.78	100.0	Z	99.0	20.0
0.037234	40.42	—	136.17	95.75	100.0	Z	255.0	20.0
0.062518	—	28.50	111.67	83.17	100.0	Z	0.0	20.0
0.062576	34.72	—	131.67	96.95	100.0	Z	0.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

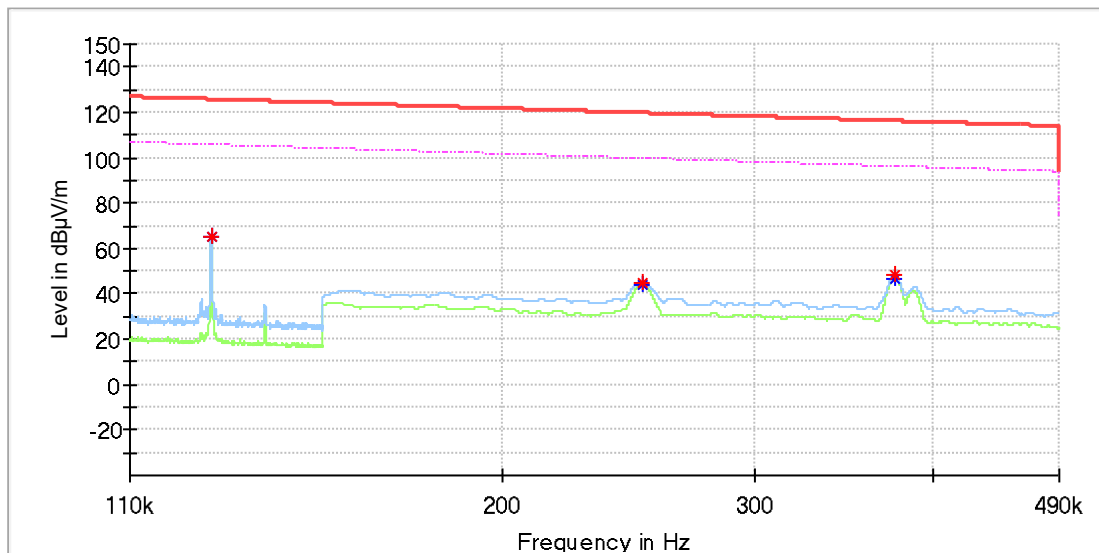


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125372	—	65.24	105.63	40.39	100.0	X	113.0	20.0
0.125372	65.55	—	125.63	60.09	100.0	X	113.0	20.0
0.250600	—	43.80	99.62	55.82	100.0	X	130.0	20.0
0.251000	45.14	—	119.61	74.47	100.0	X	130.0	20.0
0.376100	48.29	—	116.10	67.80	100.0	X	116.0	20.0
0.376350	—	46.76	96.09	49.33	100.0	X	116.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

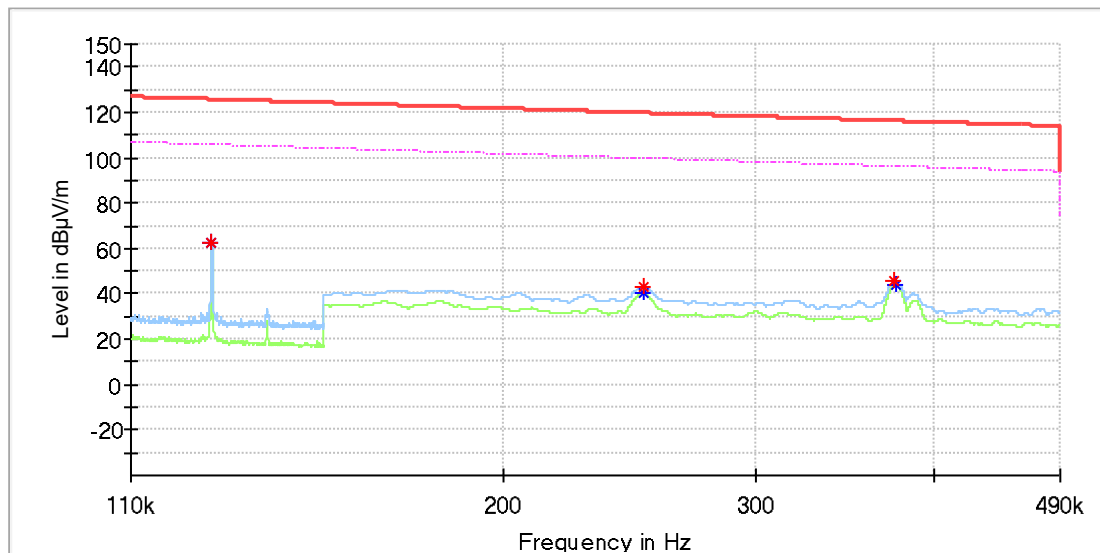


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125257	62.84	---	125.64	62.81	100.0	Y	224.0	20.0
0.125257	---	62.44	105.64	43.20	100.0	Y	224.0	20.0
0.250600	---	40.39	99.62	59.23	100.0	Y	258.0	20.0
0.250950	42.96	---	119.61	76.65	100.0	Y	258.0	20.0
0.375650	45.51	---	116.11	70.60	100.0	Y	197.0	20.0
0.376000	---	44.26	96.10	51.84	100.0	Y	197.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

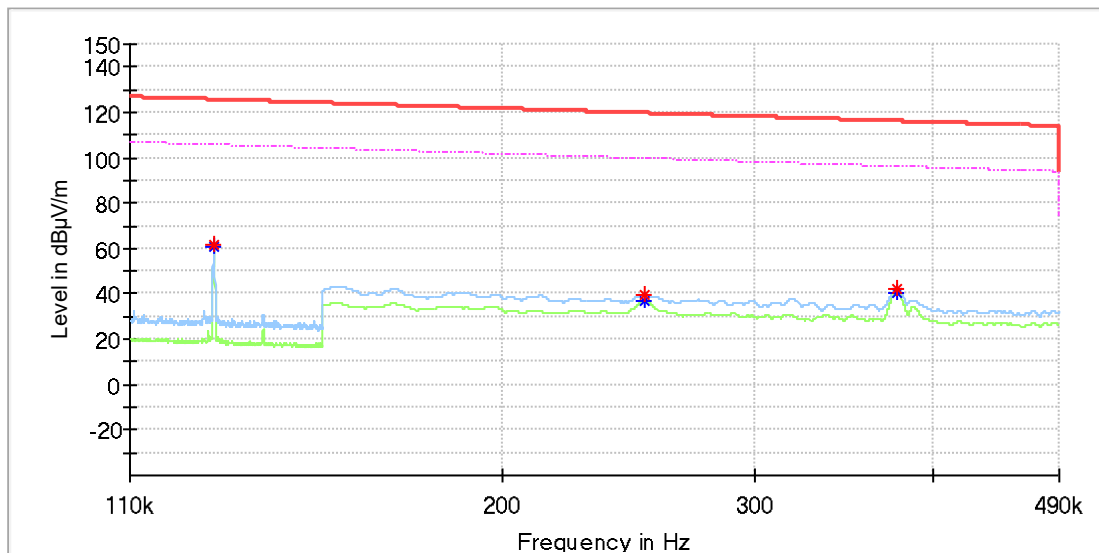


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125914	61.31	—	125.60	64.29	100.0	Z	117.0	20.0
0.125914	—	61.15	105.60	44.45	100.0	Z	117.0	20.0
0.251600	39.31	—	119.59	80.28	100.0	Z	159.0	20.0
0.251700	—	37.12	99.58	62.46	100.0	Z	159.0	20.0
0.377300	42.35	—	116.07	73.72	100.0	Z	131.0	20.0
0.377300	—	40.47	96.07	55.60	100.0	Z	131.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

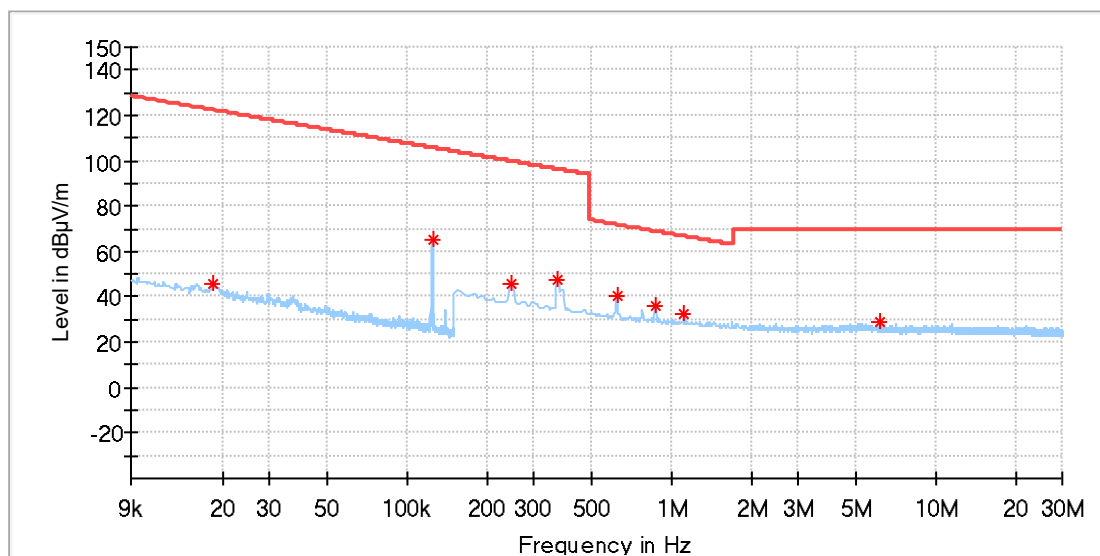

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	45.82	122.26	76.44	100.0	X	60.0	19.9
0.124318	65.49	105.71	40.22	100.0	X	123.0	19.9
0.246574	45.66	99.76	54.10	100.0	X	118.0	19.9
0.369485	47.83	96.25	48.43	100.0	X	132.0	19.9
0.619699	40.19	71.77	31.58	100.0	X	135.0	19.9
0.865522	35.95	68.87	32.92	100.0	X	316.0	19.9
1.115735	32.18	66.67	34.49	100.0	X	135.0	19.9
6.137559	28.68	69.50	40.82	100.0	X	306.0	20.1

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

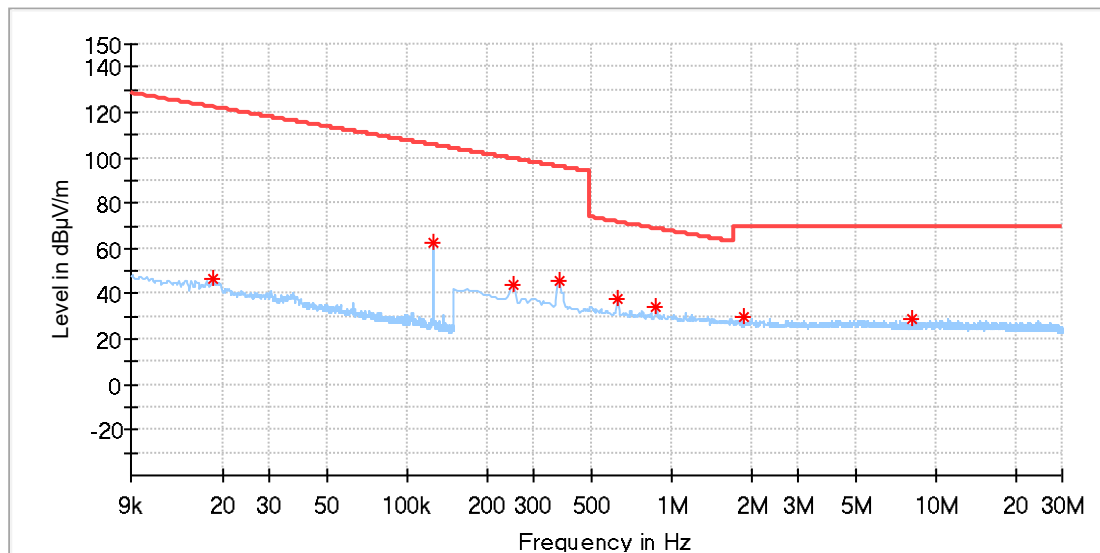

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018266	46.26	122.36	76.10	100.0	Y	226.0	19.9
0.125325	62.60	105.64	43.04	100.0	Y	218.0	19.9
0.250963	43.79	99.61	55.82	100.0	Y	62.0	19.9
0.373875	46.16	96.15	49.99	100.0	Y	228.0	19.9
0.624088	37.86	71.71	33.84	100.0	Y	225.0	19.9
0.874302	34.11	68.79	34.67	100.0	Y	243.0	19.9
1.879544	29.39	69.50	40.11	100.0	Y	268.0	20.0
8.139265	29.11	69.50	40.39	100.0	Y	173.0	20.1

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

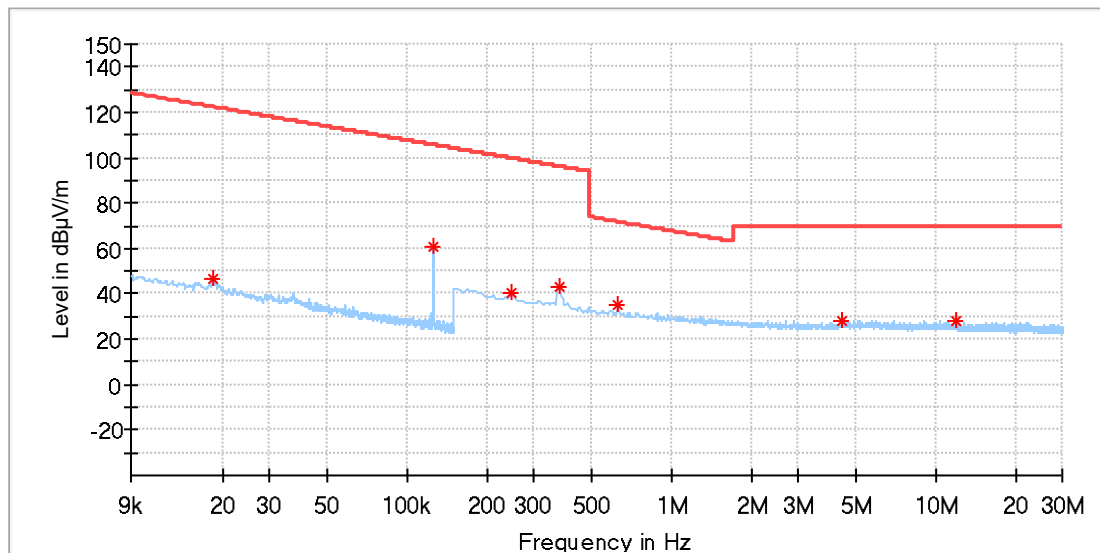

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	46.64	122.26	75.62	100.0	Z	0.0	19.9
0.125728	61.10	105.61	44.51	100.0	Z	127.0	19.9
0.246574	40.22	99.76	59.54	100.0	Z	183.0	19.9
0.373875	43.33	96.15	52.82	100.0	Z	115.0	19.9
0.624088	35.31	71.71	36.40	100.0	Z	137.0	19.9
4.421184	28.42	69.50	41.08	100.0	Z	226.0	20.1
11.896853	27.86	69.50	41.64	100.0	Z	122.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--		--	--

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

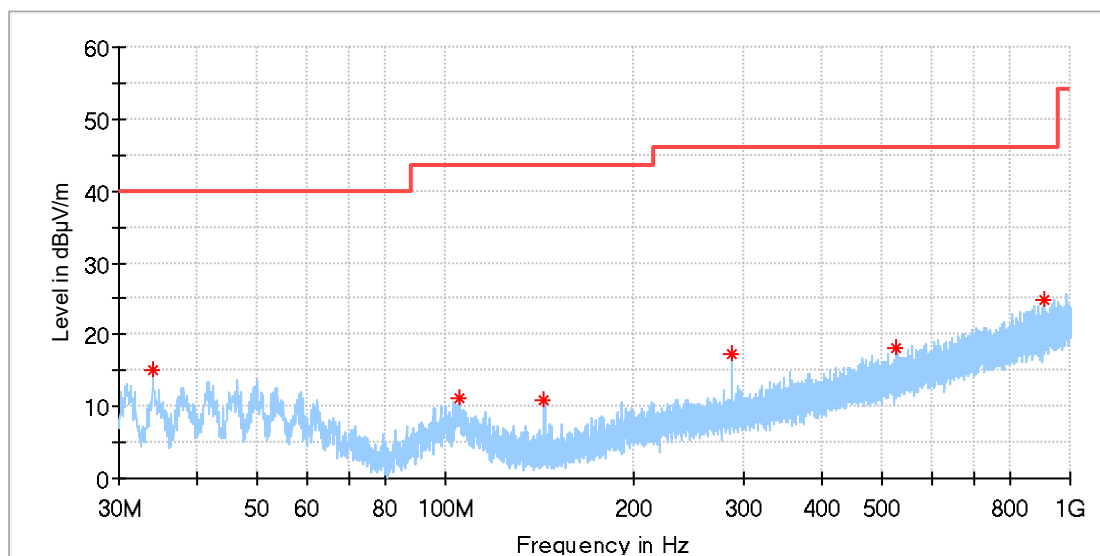

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.029231	15.05	40.00	24.95	100.0	H	53.0	-22.3
105.286923	11.16	43.50	32.34	100.0	H	80.0	-18.9
144.012308	10.95	43.50	32.55	100.0	H	339.0	-22.4
288.057308	17.33	46.00	28.67	100.0	H	124.0	-16.6
525.259615	18.23	46.00	27.77	100.0	H	5.0	-11.3
909.790000	24.75	46.00	21.25	100.0	H	268.0	-4.7

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

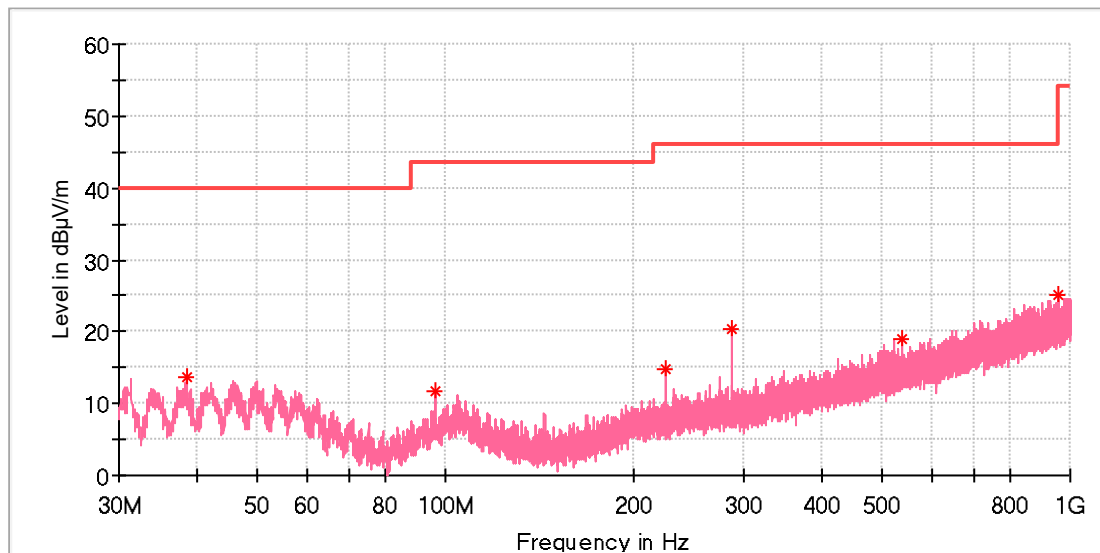

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.431539	13.73	40.00	26.27	100.0	V	116.0	-20.7
96.258462	11.74	43.50	31.76	100.0	V	0.0	-19.7
224.820769	14.67	46.00	31.33	100.0	V	77.0	-18.4
288.020000	20.50	46.00	25.50	100.0	V	204.0	-16.6
537.421923	19.03	46.00	26.97	100.0	V	60.0	-11.1
956.387308	25.09	46.00	20.91	100.0	V	161.0	-4.2


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging (10W)

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

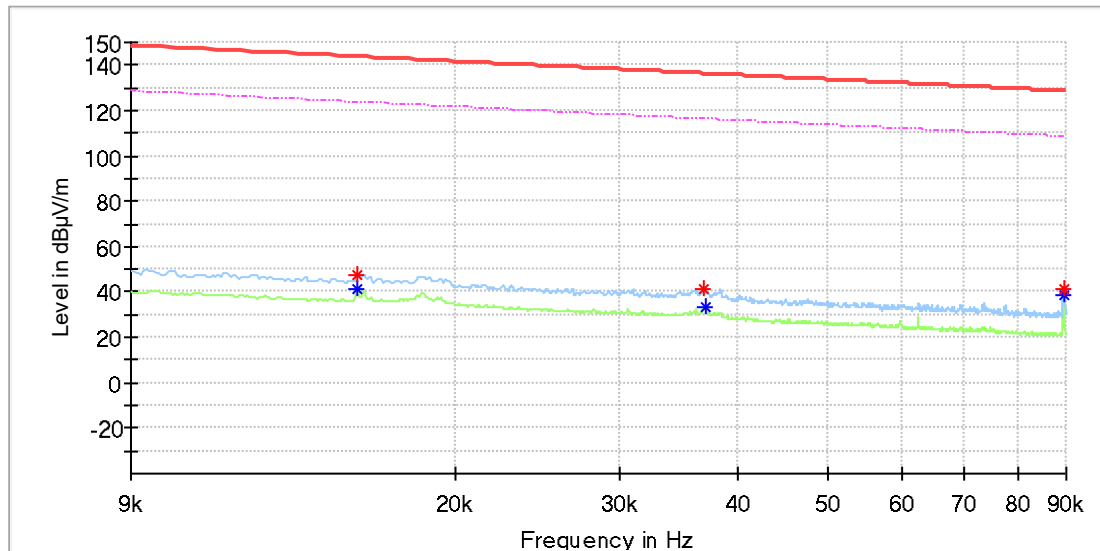


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015711	47.34	—	143.66	96.32	100.0	X	279.0	20.0
0.015711	—	41.45	123.66	82.21	100.0	X	279.0	20.0
0.036887	41.10	—	136.25	95.16	100.0	X	290.0	20.0
0.037003	—	33.21	116.23	83.02	100.0	X	342.0	20.0
0.089421	—	38.93	108.57	69.64	100.0	X	279.0	20.0
0.089479	41.55	—	128.56	87.02	100.0	X	279.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

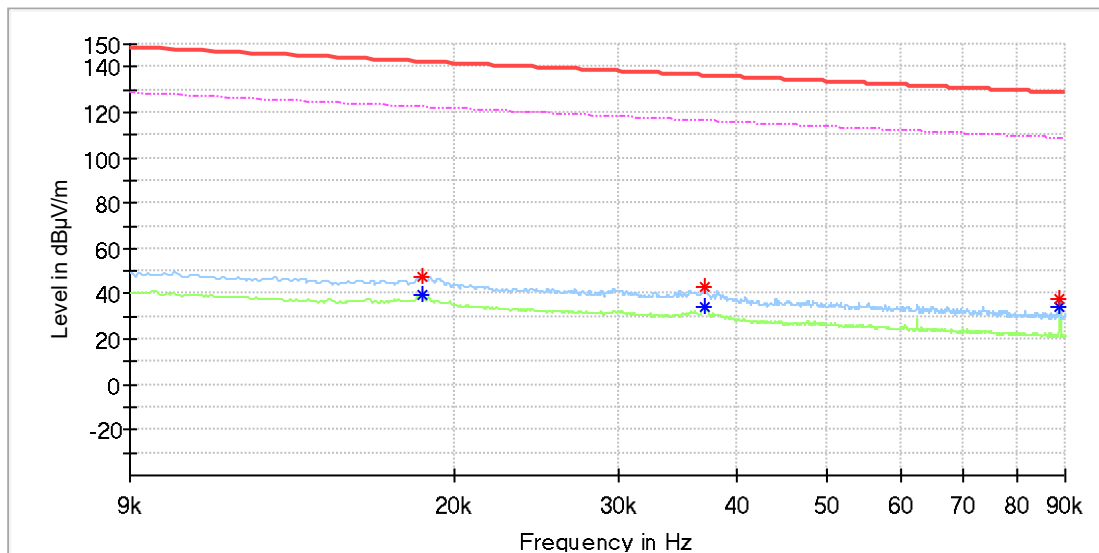


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	47.28	—	142.25	94.97	100.0	Y	111.0	20.0
0.018489	—	39.38	122.25	82.87	100.0	Y	111.0	20.0
0.037003	—	34.66	116.23	81.57	100.0	Y	196.0	20.0
0.037061	42.68	—	136.21	93.54	100.0	Y	196.0	20.0
0.088669	37.88	—	128.64	90.76	100.0	Y	18.0	20.0
0.088785	—	34.51	108.63	74.11	100.0	Y	37.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

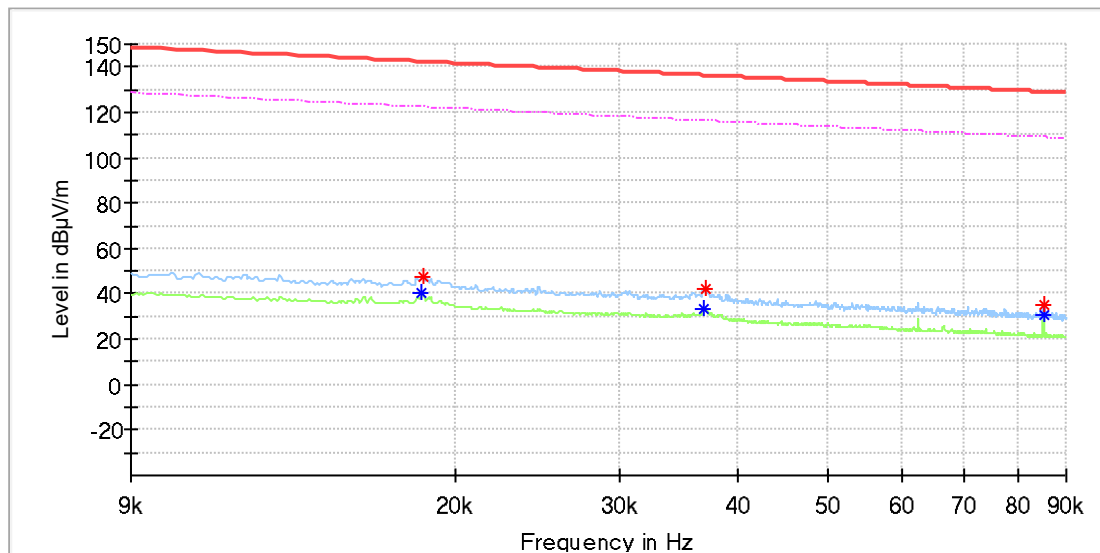


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	—	40.04	122.28	82.23	100.0	Z	3.0	20.0
0.018489	47.19	—	142.25	95.06	100.0	Z	3.0	20.0
0.036887	—	33.08	116.25	83.18	100.0	Z	294.0	20.0
0.037003	41.83	—	136.23	94.40	100.0	Z	149.0	20.0
0.085082	—	30.27	109.00	78.73	100.0	Z	276.0	20.0
0.085082	35.43	—	129.00	93.57	100.0	Z	276.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

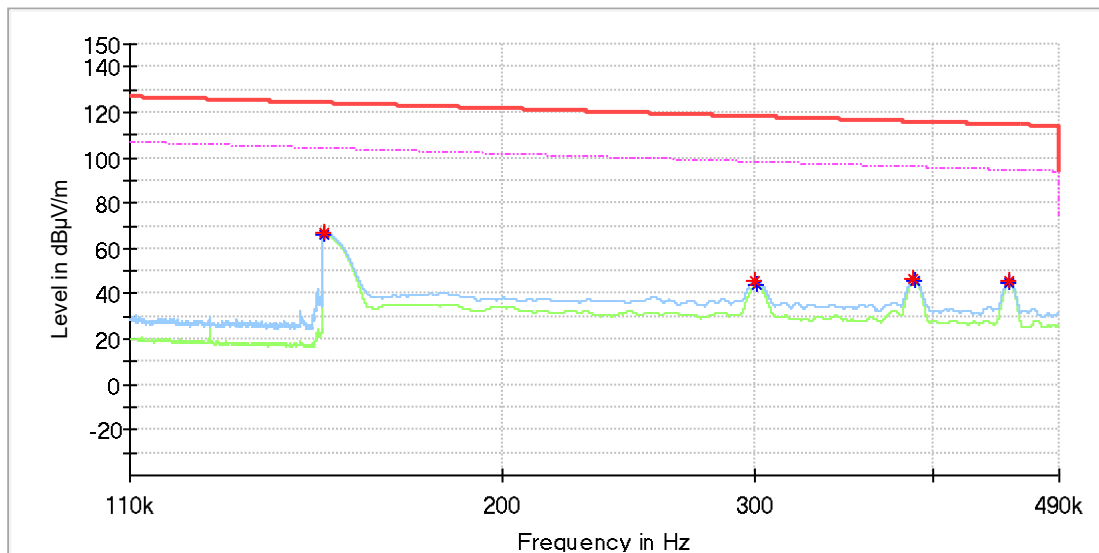


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.150350	66.68	—	124.06	57.37	100.0	X	111.0	20.0
0.150400	—	65.88	104.05	38.17	100.0	X	111.0	20.0
0.300500	45.38	—	118.05	72.67	100.0	X	342.0	20.0
0.301550	—	43.84	98.01	54.18	100.0	X	335.0	20.0
0.387850	46.39	—	115.83	69.44	100.0	X	48.0	20.0
0.388200	—	45.50	95.82	50.32	100.0	X	48.0	20.0
0.452100	45.47	—	114.50	69.03	100.0	X	118.0	20.0
0.452300	—	44.61	94.50	49.88	100.0	X	118.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

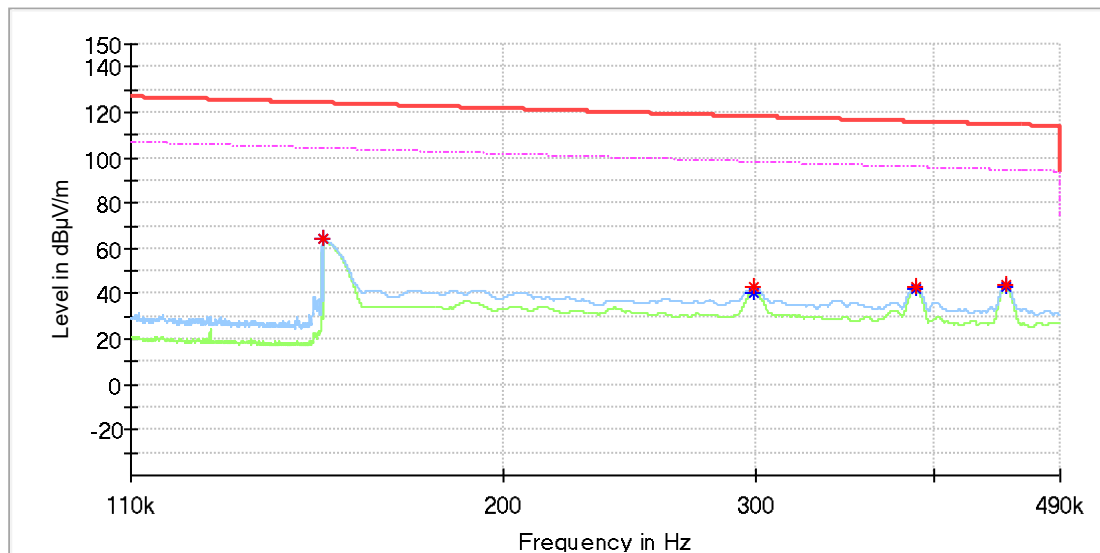


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.149686	64.65	—	124.10	59.44	100.0	Y	232.0	20.0
0.149686	—	63.96	104.10	40.13	100.0	Y	232.0	20.0
0.299300	—	40.70	98.08	57.38	100.0	Y	78.0	20.0
0.299750	42.64	—	118.07	75.43	100.0	Y	78.0	20.0
0.388100	—	42.26	95.82	53.57	100.0	Y	311.0	20.0
0.388600	43.31	—	115.81	72.50	100.0	Y	311.0	20.0
0.448750	43.97	—	114.56	70.59	100.0	Y	217.0	20.0
0.449100	—	43.13	94.56	51.43	100.0	Y	217.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

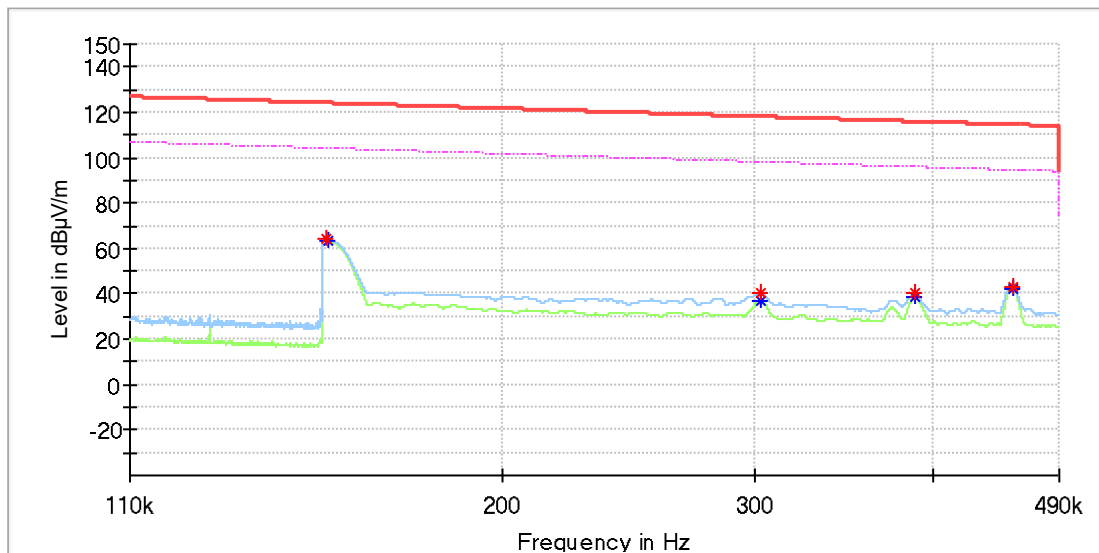


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.151050	64.06	—	124.02	59.96	100.0	Z	112.0	20.0
0.151100	—	63.55	104.01	40.46	100.0	Z	112.0	20.0
0.302950	—	36.65	97.97	61.33	100.0	Z	173.0	20.0
0.303650	40.02	—	117.95	77.93	100.0	Z	173.0	20.0
0.388550	—	38.70	95.81	57.11	100.0	Z	40.0	20.0
0.388800	40.08	—	115.81	75.72	100.0	Z	40.0	20.0
0.454300	—	42.53	94.46	51.93	100.0	Z	137.0	20.0
0.454450	43.40	—	114.45	71.05	100.0	Z	137.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

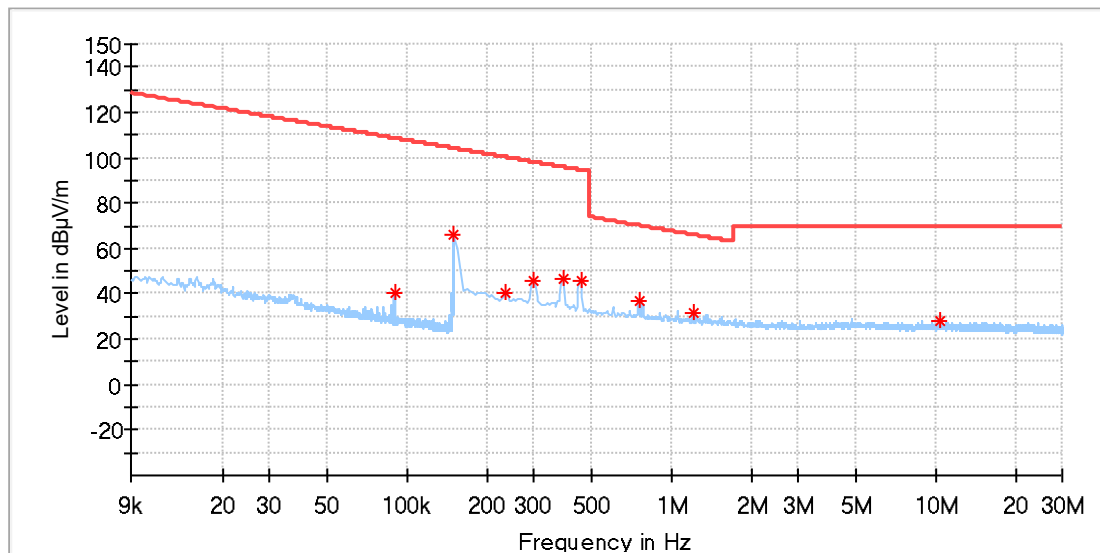

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.089370	40.83	108.57	67.75	100.0	X	274.0	19.9
0.149396	66.19	104.11	37.92	100.0	X	97.0	19.9
0.233405	40.63	100.24	59.61	100.0	X	164.0	19.9
0.299250	45.66	98.08	52.42	100.0	X	157.0	19.9
0.387044	46.87	95.85	48.98	100.0	X	31.0	19.9
0.452890	45.43	94.48	49.06	100.0	X	103.0	19.9
0.751390	37.17	70.10	32.92	100.0	X	96.0	19.9
1.203530	31.90	66.02	34.11	100.0	X	114.0	19.9
10.277052	28.25	69.50	41.25	100.0	X	357.0	20.2

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

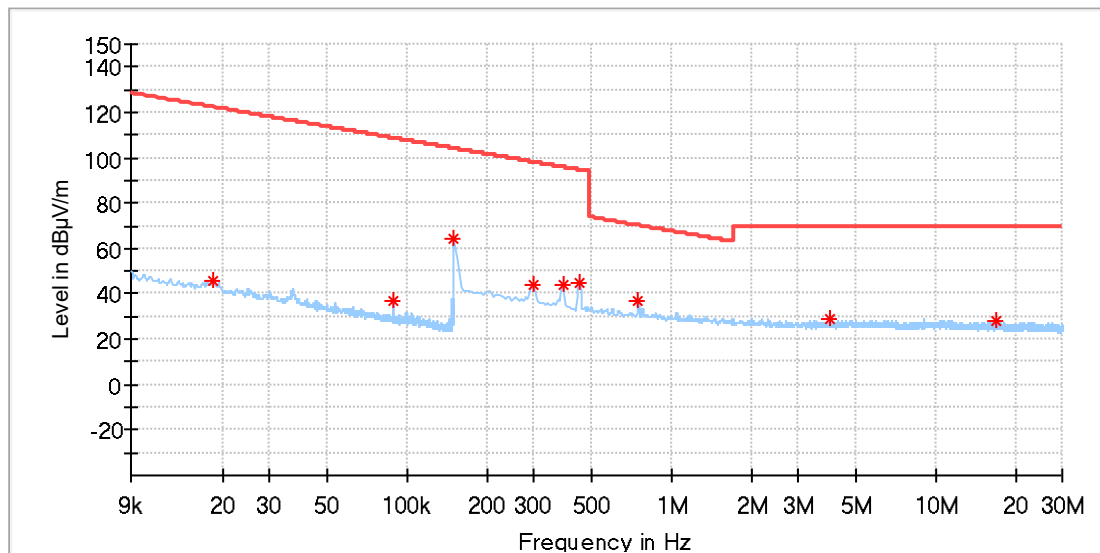

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	45.88	122.26	76.38	100.0	Y	201.0	19.9
0.088464	37.26	108.66	71.40	100.0	Y	183.0	19.9
0.149899	64.31	104.08	39.77	100.0	Y	241.0	19.9
0.299250	44.23	98.08	53.85	100.0	Y	246.0	19.9
0.387044	43.55	95.85	52.30	100.0	Y	109.0	19.9
0.448500	44.41	94.57	50.16	100.0	Y	221.0	19.9
0.747000	36.54	70.15	33.61	100.0	Y	242.0	19.9
3.990993	28.76	69.50	40.74	100.0	Y	235.0	20.1
16.927456	28.12	69.50	41.38	100.0	Y	239.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

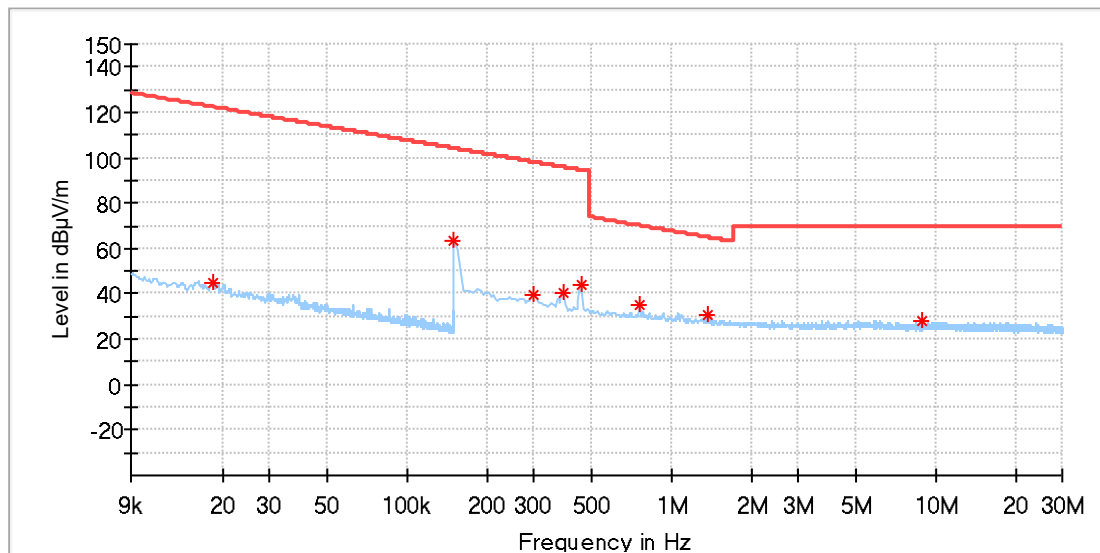

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	45.08	122.26	77.18	100.0	Z	248.0	19.9
0.150000	63.71	104.08	40.37	100.0	Z	157.0	19.9
0.299250	39.55	98.08	58.53	100.0	Z	168.0	19.9
0.387044	40.80	95.85	55.05	100.0	Z	27.0	19.9
0.452890	43.75	94.48	50.73	100.0	Z	143.0	19.9
0.755780	35.08	70.05	34.97	100.0	Z	111.0	19.9
1.361559	30.40	64.95	34.54	100.0	Z	168.0	19.9
8.859177	28.06	69.50	41.44	100.0	Z	59.0	20.2

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

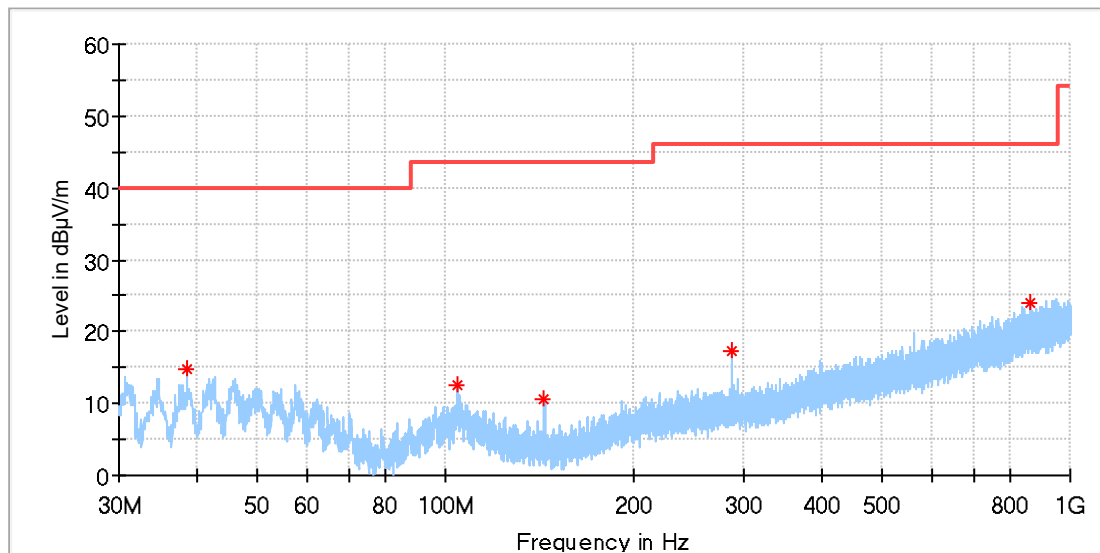

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.506154	14.75	40.00	25.25	100.0	H	95.0	-20.6
104.727308	12.56	43.50	30.94	100.0	H	41.0	-18.9
144.012308	10.71	43.50	32.79	100.0	H	140.0	-22.4
288.057308	17.20	46.00	28.80	100.0	H	112.0	-16.6
860.320000	24.14	46.00	21.86	100.0	H	317.0	-5.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

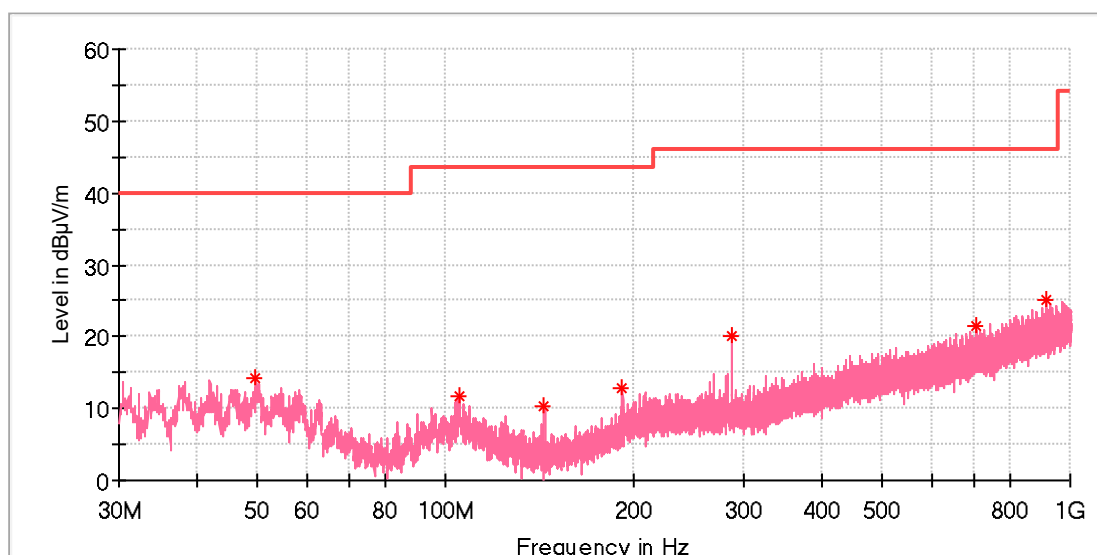

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.735769	14.33	40.00	25.67	100.0	V	160.0	-18.4
105.286923	11.69	43.50	31.81	100.0	V	211.0	-18.9
144.012308	10.25	43.50	33.25	100.0	V	228.0	-22.4
192.027308	12.93	43.50	30.57	100.0	V	127.0	-19.5
288.057308	20.05	46.00	25.95	100.0	V	185.0	-16.6
707.022692	21.59	46.00	24.41	100.0	V	202.0	-7.8
913.893846	25.13	46.00	20.87	100.0	V	127.0	-4.7


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--	--	--	--

Wireless charging (15W)

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

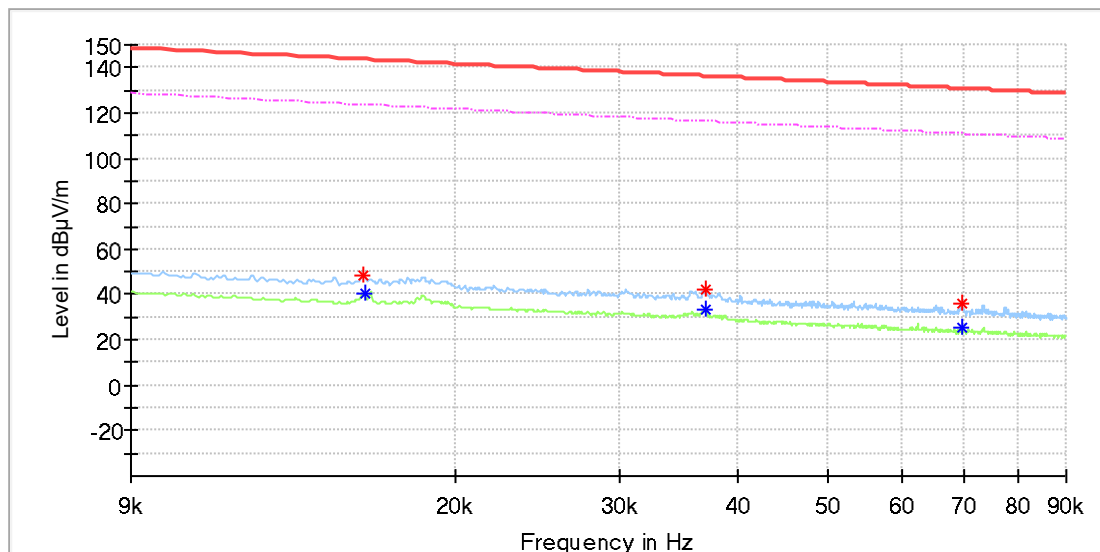


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015943	48.25	—	143.54	95.29	100.0	X	264.0	20.0
0.016001	—	40.70	123.51	82.81	100.0	X	46.0	20.0
0.037061	41.93	—	136.21	94.28	100.0	X	6.0	20.0
0.037061	—	33.26	116.21	82.95	100.0	X	6.0	20.0
0.069519	35.95	—	130.75	94.81	100.0	X	170.0	20.0
0.069519	—	24.99	110.75	85.76	100.0	X	170.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

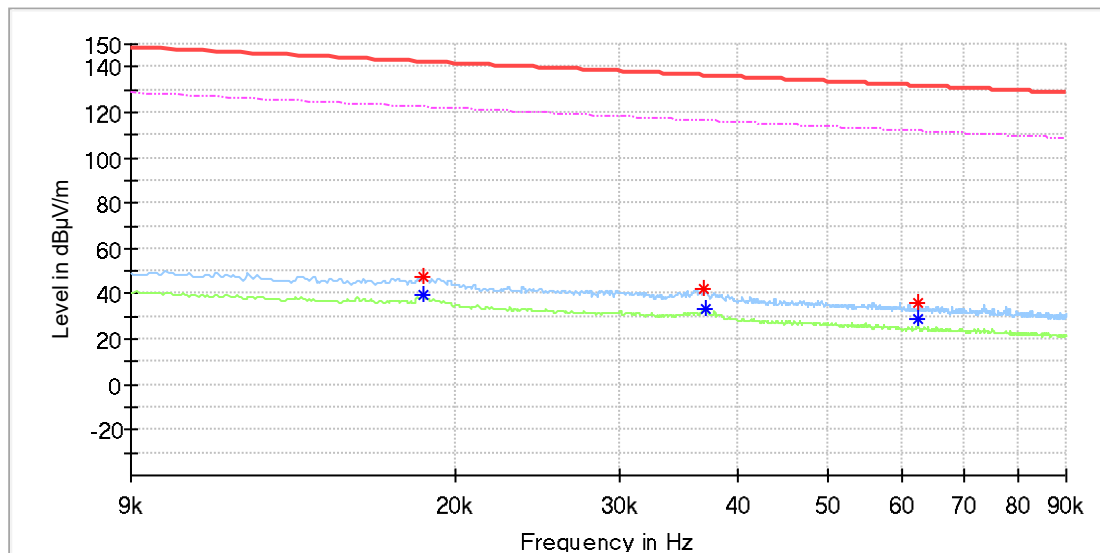


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018489	47.09	—	142.25	95.16	100.0	Y	162.0	20.0
0.018489	—	39.70	122.25	82.55	100.0	Y	162.0	20.0
0.036887	41.88	—	136.25	94.37	100.0	Y	185.0	20.0
0.037119	—	33.48	116.20	82.72	100.0	Y	254.0	20.0
0.062460	35.65	—	131.68	96.03	100.0	Y	307.0	20.0
0.062518	—	28.66	111.67	83.01	100.0	Y	0.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

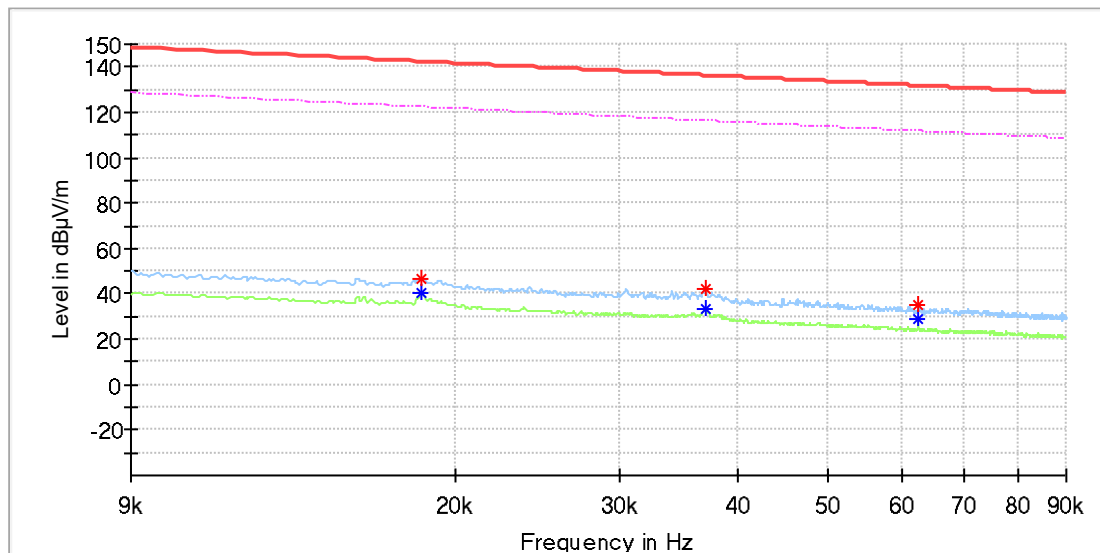


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018431	47.03	—	142.28	95.25	100.0	Z	162.0	20.0
0.018431	—	40.02	122.28	82.26	100.0	Z	162.0	20.0
0.037003	42.37	—	136.23	93.86	100.0	Z	298.0	20.0
0.037061	—	33.10	116.21	83.11	100.0	Z	298.0	20.0
0.062460	35.40	—	131.68	96.28	100.0	Z	220.0	20.0
0.062518	—	29.04	111.67	82.64	100.0	Z	220.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

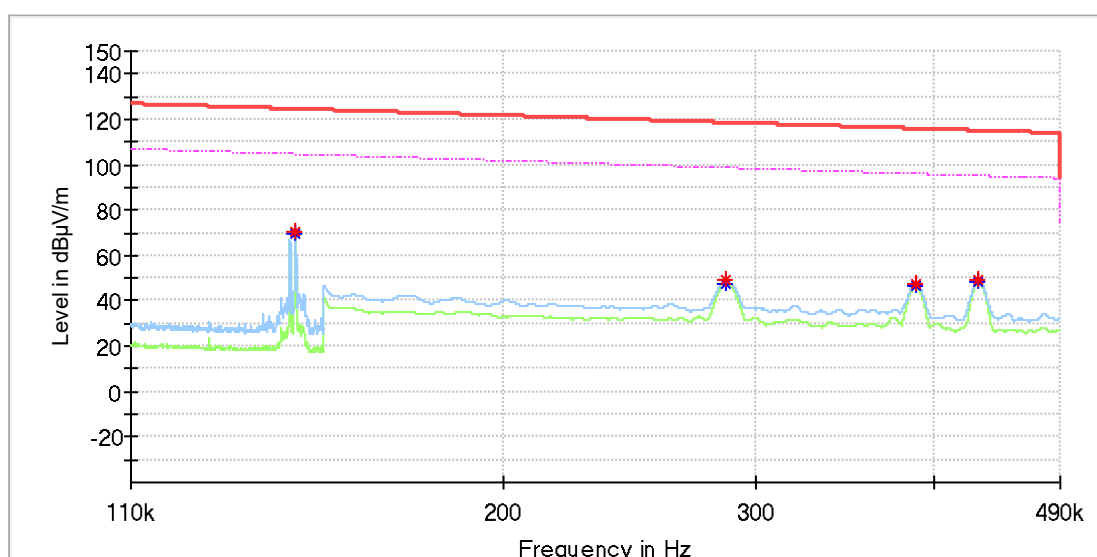


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.143314	—	69.68	104.47	34.79	100.0	X	139.0	20.0
0.143314	70.19	—	124.47	54.28	100.0	X	139.0	20.0
0.286200	48.93	—	118.47	69.54	100.0	X	346.0	20.0
0.286650	—	47.60	98.45	50.85	100.0	X	346.0	20.0
0.388250	47.45	—	115.82	68.37	100.0	X	17.0	20.0
0.388400	—	46.45	95.82	49.37	100.0	X	17.0	20.0
0.429650	49.01	—	114.94	65.93	100.0	X	145.0	20.0
0.429850	—	48.51	94.94	46.43	100.0	X	145.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

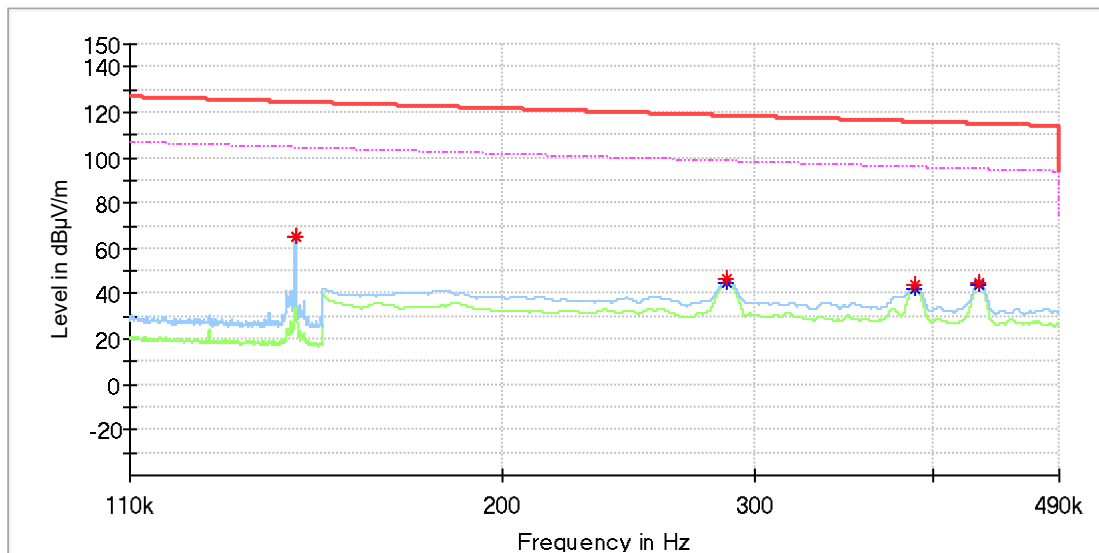


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.143543	65.57	—	124.46	58.89	100.0	Y	229.0	20.0
0.143571	—	64.88	104.46	39.57	100.0	Y	224.0	20.0
0.287250	46.25	—	118.44	72.19	100.0	Y	241.0	20.0
0.287400	—	44.55	98.43	53.88	100.0	Y	241.0	20.0
0.388300	43.64	—	115.82	72.18	100.0	Y	126.0	20.0
0.388400	—	42.33	95.82	53.49	100.0	Y	126.0	20.0
0.430750	44.88	—	114.92	70.03	100.0	Y	234.0	20.0
0.430750	—	44.12	94.92	50.79	100.0	Y	234.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

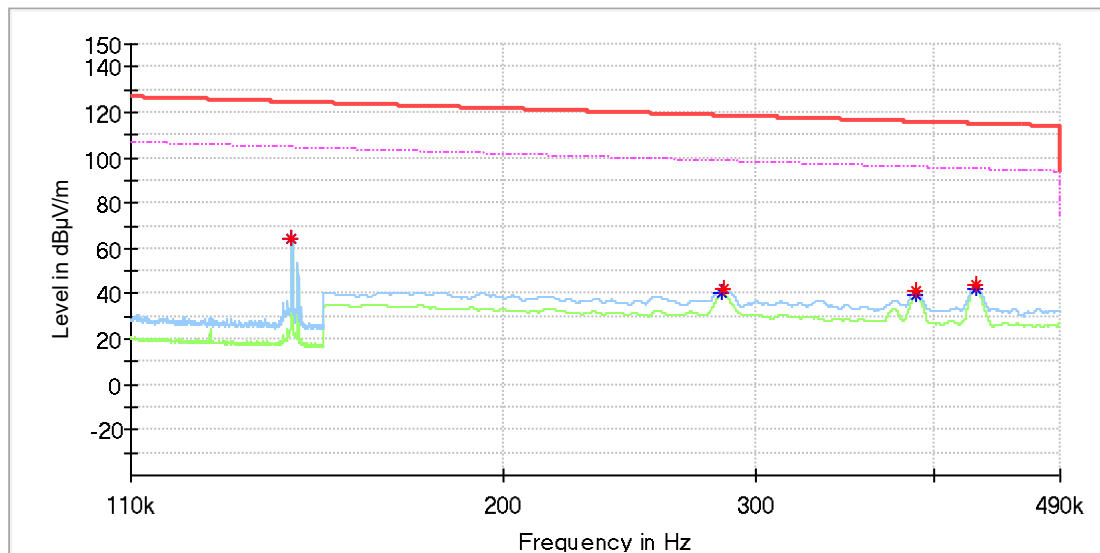


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.142514	—	63.89	104.52	40.63	100.0	Z	148.0	20.0
0.142514	64.31	—	124.52	60.21	100.0	Z	148.0	20.0
0.284800	—	40.02	98.51	58.49	100.0	Z	140.0	20.0
0.285650	42.30	—	118.49	76.19	100.0	Z	140.0	20.0
0.388400	41.51	—	115.82	74.30	100.0	Z	50.0	20.0
0.388800	—	39.15	95.81	56.66	100.0	Z	50.0	20.0
0.427600	—	42.47	94.98	52.51	100.0	Z	144.0	20.0
0.427850	43.52	—	114.98	71.46	100.0	Z	144.0	20.0

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

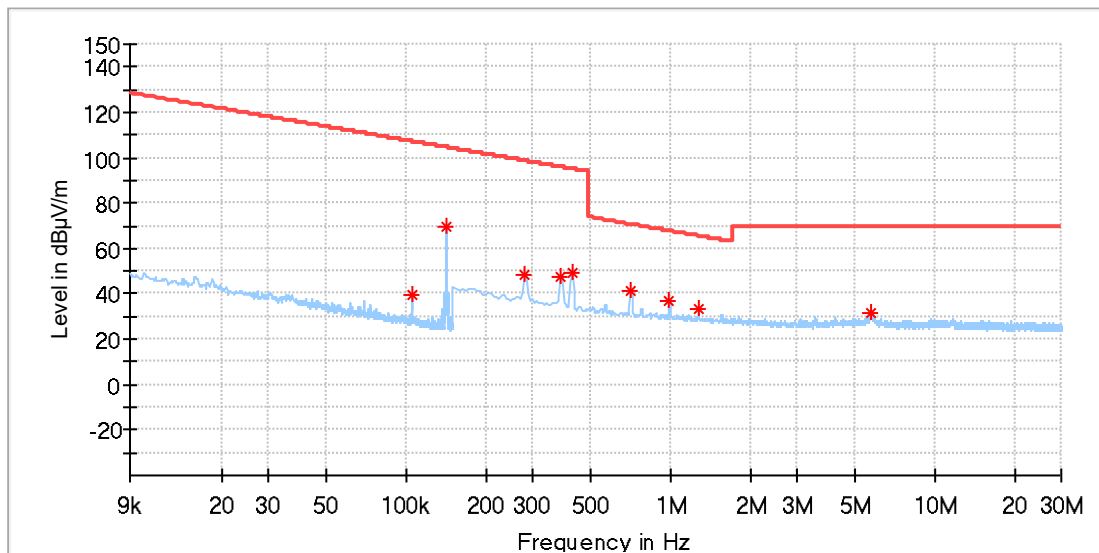

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.104779	39.54	107.19	67.65	100.0	X	258.0	19.9
0.141842	69.80	104.56	34.76	100.0	X	142.0	19.9
0.281691	48.73	98.61	49.88	100.0	X	178.0	19.9
0.382655	47.10	95.95	48.84	100.0	X	29.0	19.9
0.422162	49.46	95.09	45.63	100.0	X	142.0	19.9
0.707493	41.46	70.62	29.16	100.0	X	146.0	19.9
0.988434	36.77	67.72	30.96	100.0	X	138.0	19.9
1.273765	33.57	65.53	31.95	100.0	X	153.0	19.9
5.760044	31.64	69.50	37.86	100.0	X	307.0	20.1

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

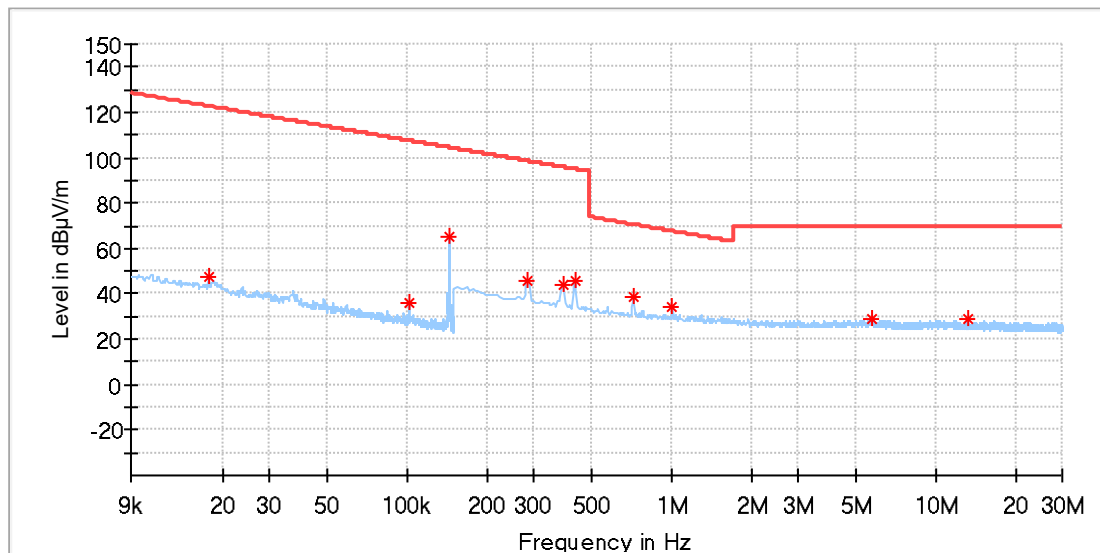

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.017762	47.19	122.60	75.40	100.0	Y	216.0	19.9
0.101355	36.35	107.48	71.13	100.0	Y	0.0	19.9
0.143554	65.21	104.46	39.25	100.0	Y	239.0	19.9
0.286081	45.87	98.47	52.60	100.0	Y	245.0	19.9
0.387044	43.75	95.85	52.10	100.0	Y	313.0	19.9
0.430941	45.34	94.92	49.58	100.0	Y	238.0	19.9
0.716272	38.69	70.51	31.82	100.0	Y	209.0	19.9
1.001603	34.45	67.61	33.16	100.0	Y	29.0	19.9
5.689809	28.74	69.50	40.76	100.0	Y	342.0	20.1
13.292780	28.91	69.50	40.59	100.0	Y	317.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

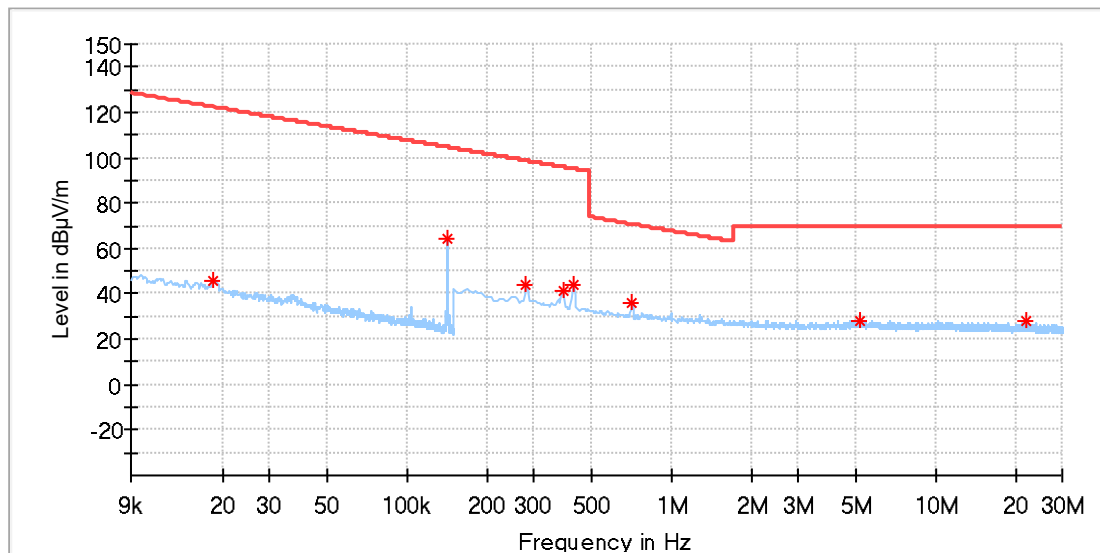

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	45.73	122.26	76.53	100.0	Z	272.0	19.9
0.142245	64.04	104.54	40.50	100.0	Z	131.0	19.9
0.281691	43.54	98.61	55.07	100.0	Z	142.0	19.9
0.387044	41.31	95.85	54.54	100.0	Z	34.0	19.9
0.426552	43.75	95.00	51.25	100.0	Z	145.0	19.9
0.707493	35.62	70.62	35.00	100.0	Z	142.0	19.9
5.136706	27.69	69.50	41.81	100.0	Z	326.0	20.1
21.826368	27.99	69.50	41.51	100.0	Z	337.0	20.4

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

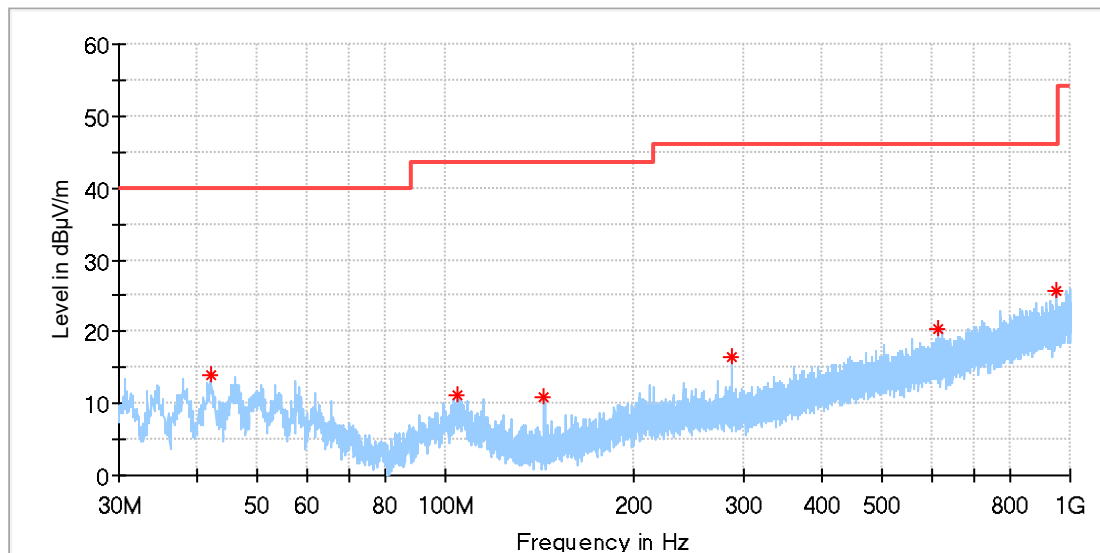

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.975769	13.93	40.00	26.07	100.0	H	338.0	-19.7
104.727308	11.04	43.50	32.46	100.0	H	43.0	-18.9
144.012308	10.77	43.50	32.73	100.0	H	320.0	-22.4
288.020000	16.46	46.00	29.54	100.0	H	128.0	-16.6
614.275769	20.23	46.00	25.77	100.0	H	243.0	-9.4
950.231539	25.65	46.00	20.35	100.0	H	95.0	-4.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Charging
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

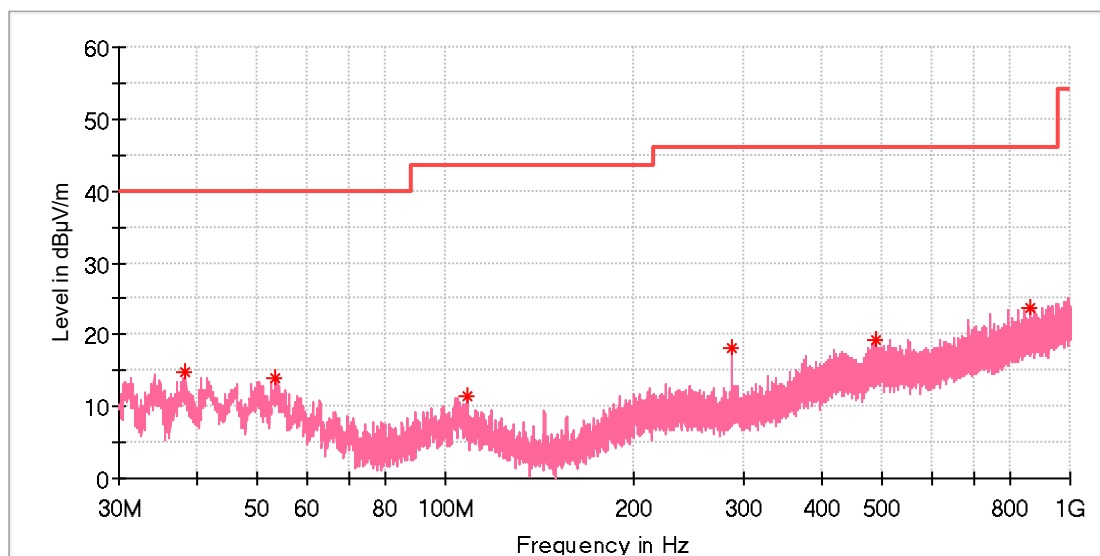

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.319615	14.77	40.00	25.23	100.0	V	61.0	-20.7
53.317308	13.97	40.00	26.03	100.0	V	251.0	-18.5
108.271539	11.37	43.50	32.13	100.0	V	43.0	-19.1
288.057308	18.05	46.00	27.95	100.0	V	129.0	-16.6
487.840000	19.26	46.00	26.74	100.0	V	191.0	-12.0
860.469231	23.76	46.00	22.24	100.0	V	201.0	-5.3


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby mode

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Standby
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

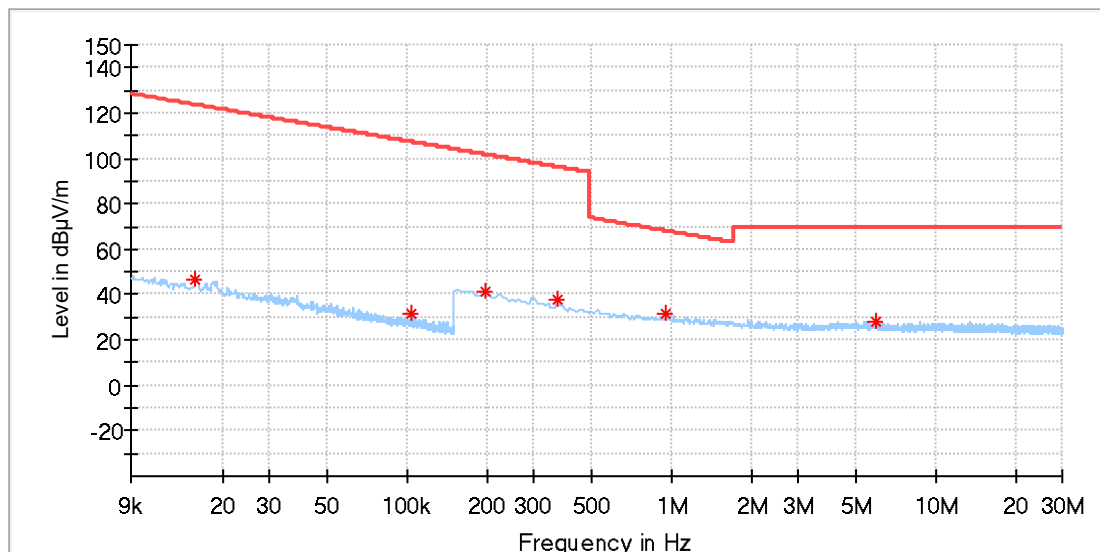

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015849	46.71	123.59	76.87	100.0	X	321.0	19.9
0.103772	31.84	107.28	75.44	100.0	X	210.0	19.9
0.198287	40.87	101.65	60.79	100.0	X	217.0	19.8
0.369485	37.82	96.25	58.44	100.0	X	149.0	19.9
0.953316	31.21	68.04	36.83	100.0	X	239.0	19.9
5.940022	28.33	69.50	41.17	100.0	X	16.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Standby
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

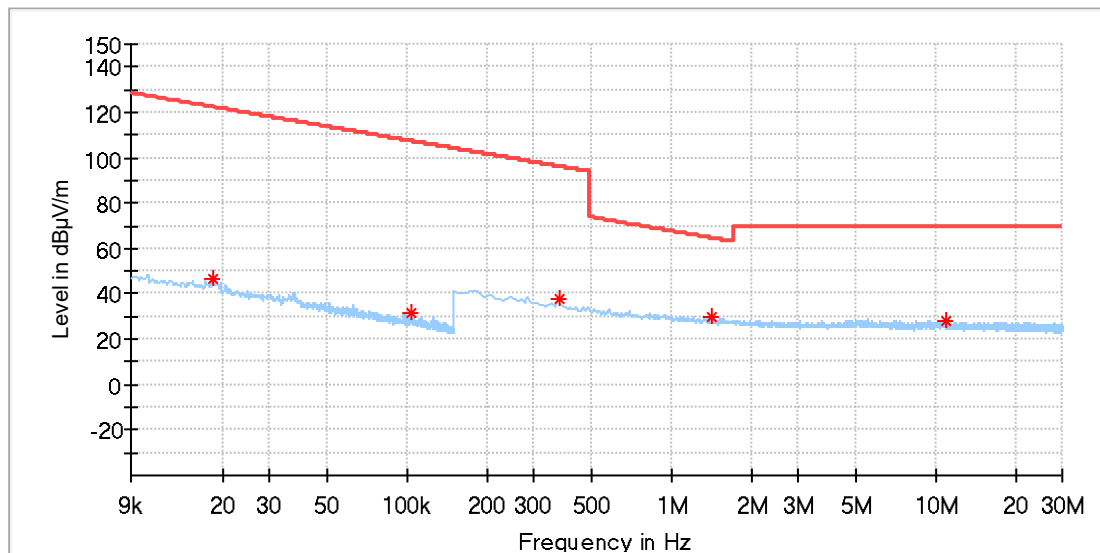

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	46.37	122.26	75.89	100.0	Y	222.0	19.9
0.104074	31.56	107.25	75.69	100.0	Y	94.0	19.9
0.373875	37.59	96.15	58.56	100.0	Y	0.0	19.9
1.414235	29.47	64.62	35.15	100.0	Y	234.0	19.9
10.812596	27.83	69.50	41.67	100.0	Y	41.0	20.2

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Standby
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

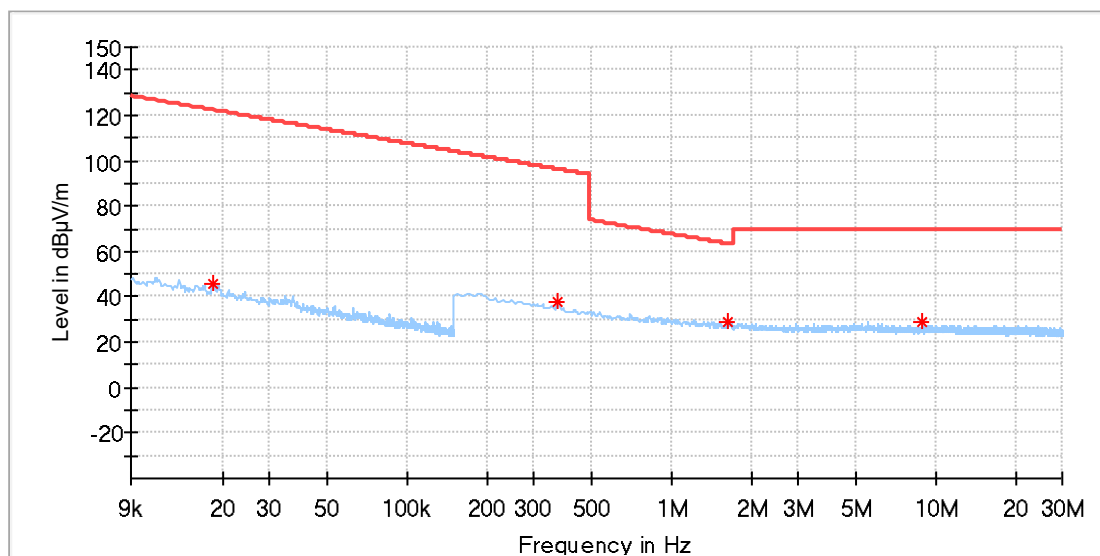

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	46.14	122.26	76.12	100.0	Z	83.0	19.9
0.369485	38.02	96.25	58.23	100.0	Z	340.0	19.9
1.638110	29.15	63.35	34.20	100.0	Z	242.0	20.0
8.810890	28.72	69.50	40.78	100.0	Z	91.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--	--	--	--

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Standby
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

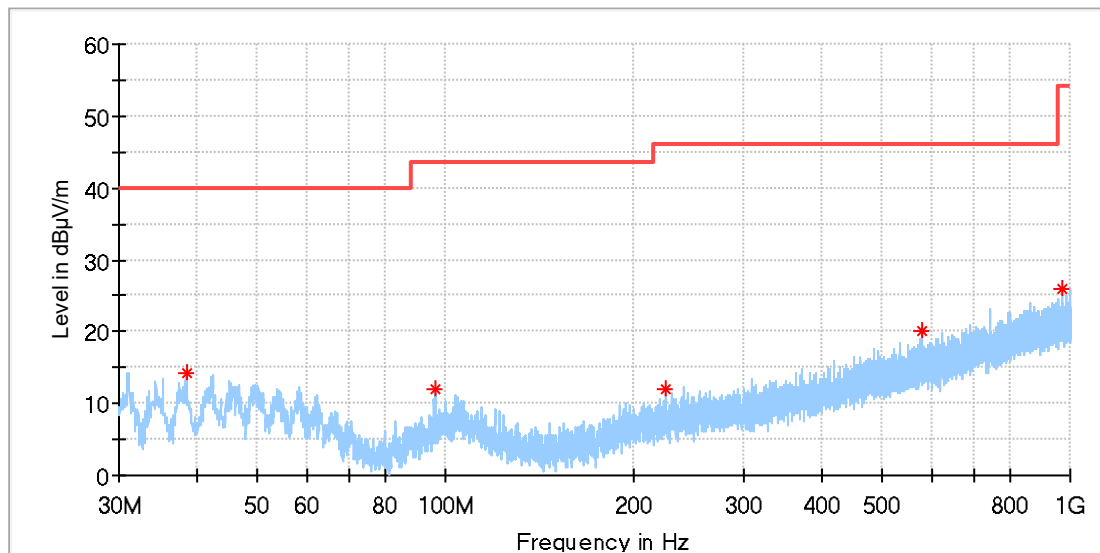

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.468846	14.22	40.00	25.78	100.0	H	325.0	-20.7
96.370385	11.88	43.50	31.62	100.0	H	264.0	-19.6
224.783462	12.12	46.00	33.88	100.0	H	214.0	-18.4
579.579615	20.11	46.00	25.89	100.0	H	195.0	-10.1
971.944615	25.82	54.00	28.18	100.0	H	342.0	-4.0

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Wireless Charging
Model:	H202508-C-001Y
Test Mode:	Standby
Order No/Sample No:	168578893/A004110764-008
Test Voltage::	Battery
Remark:	Temp 23 Humi:54%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

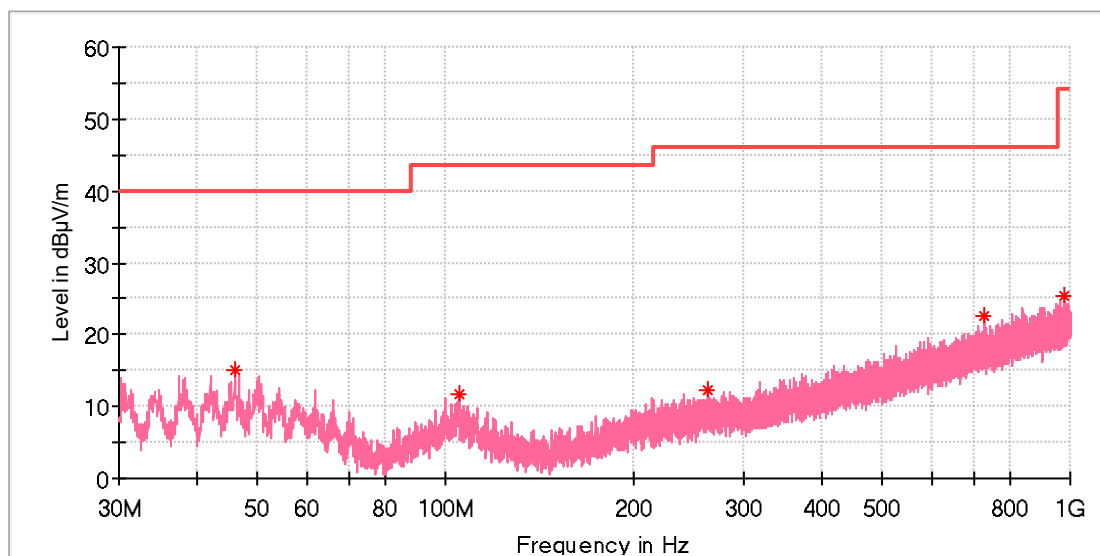

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.079615	14.99	40.00	25.01	100.0	V	70.0	-18.8
105.100385	11.70	43.50	31.80	100.0	V	97.0	-18.9
262.091154	12.19	46.00	33.81	100.0	V	275.0	-17.1
728.810385	22.57	46.00	23.43	100.0	V	293.0	-7.4
980.450769	25.35	54.00	28.65	100.0	V	0.0	-3.8


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Wireless charging
Order Number:	168578893
Model:	H202508-C-001Y
Test Mode:	Wireless Charging + Power bank cable charging
Test Voltage:	AC 120V/ 60Hz
Test Standard:	FCC PART 15
Test By:/Review By:	Leon Zhu / Murphy Chen
Tem./Hum./Pressure:	24.9°C/50.4%/101kPa
Remark:	SR 3

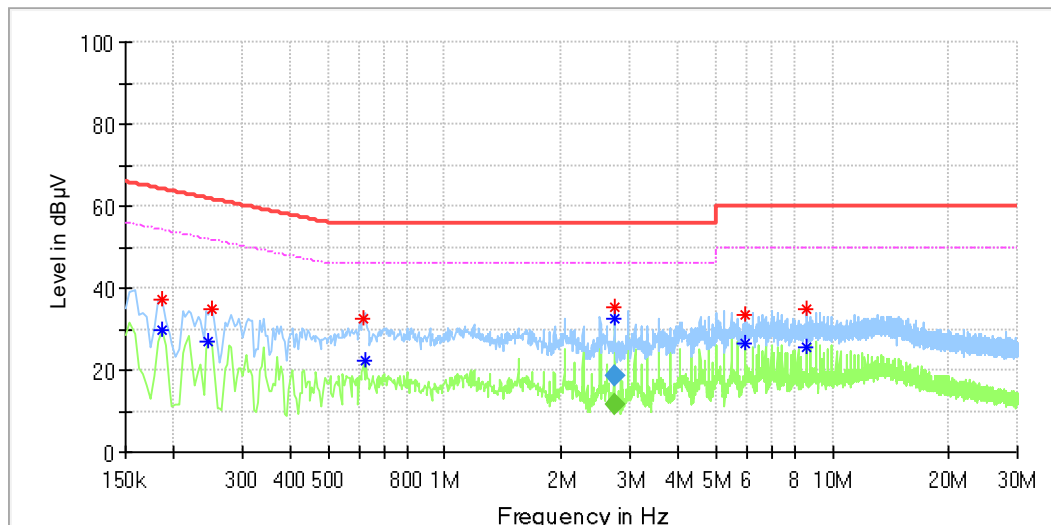

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.186	---	30.0	54.21	24.23	L1	9.7
0.186	37.4	---	64.21	26.81	L1	9.7
0.246	---	27.2	51.89	24.70	L1	9.7
0.250	34.9	---	61.76	26.87	L1	9.7
0.614	32.8	---	56.00	23.21	L1	9.6
0.626	---	22.4	46.00	23.60	L1	9.7
2.734	35.5	---	56.00	20.46	L1	9.6
2.734	---	32.4	46.00	13.65	L1	9.6
5.938	33.6	---	60.00	26.43	L1	9.8
5.942	---	26.6	50.00	23.38	L1	9.8
8.554	---	25.4	50.00	24.63	L1	9.9
8.554	34.7	---	60.00	25.33	L1	9.9


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
2.734	---	11.5	46.00	34.50	1000.0	9.0	L1	9.6
2.734	18.5	---	56.00	37.54	1000.0	9.0	L1	9.6

EUT Information

EUT Name: Wireless charging
 Order Number: 168578893
 Model: H202508-C-001Y
 Test Mode: Wireless Charging + Power bank cable charging

Test Voltage: AC 120V/ 60Hz
 Test Standard: FCC PART 15
 Test By./Review By: Leon Zhu / Murphy Chen
 Tem./Hum./Pressure: 24.9°C/50.4%/101kPa
 Remark: SR 3

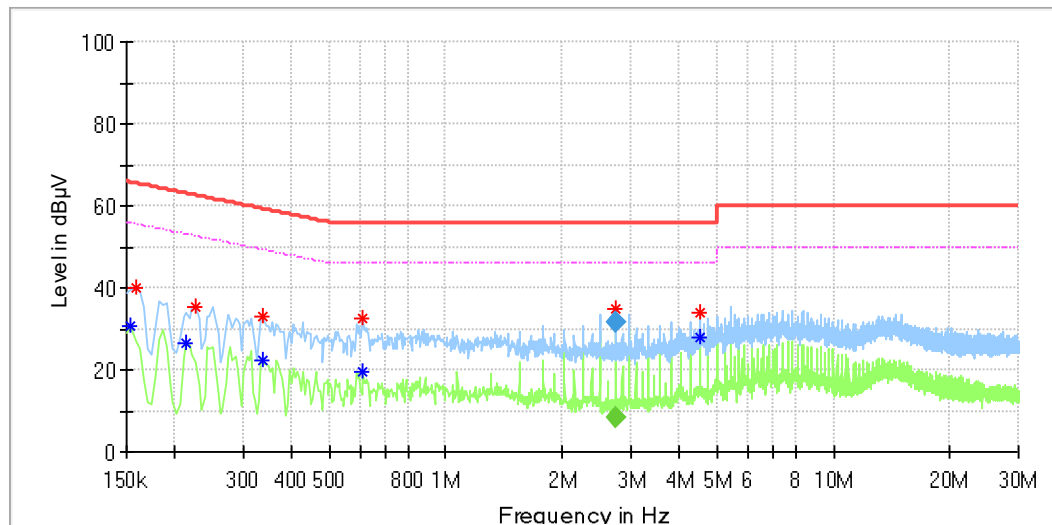

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154	---	30.8	55.78	25.02	N	9.8
0.158	39.8	---	65.57	25.72	N	9.8
0.214	---	26.5	53.05	26.52	N	9.9
0.226	35.5	---	62.60	27.09	N	9.9
0.338	---	22.4	49.25	26.88	N	9.9
0.338	32.8	---	59.25	26.46	N	9.9
0.610	---	19.8	46.00	26.23	N	9.9
0.610	32.6	---	56.00	23.43	N	9.9
2.734	---	31.7	46.00	14.29	N	9.8
2.738	34.7	---	56.00	21.33	N	9.8
4.518	---	27.9	46.00	18.11	N	9.7
4.518	34.2	---	56.00	21.82	N	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
2.734	---	8.4	46.00	37.58	1000.0	9.0	N	9.8
2.738	31.4	---	56.00	24.59	1000.0	9.0	N	9.8