TEST REPORT

Applicant:	Shenzhen Haosung Technology Co., Ltd
Address of Applicant:	3rd floor, A block, Shunxing industrial park, No. 139 Zhongxing Road, Bantian street, Longgang District, Shenzhen, China
Manufacturer:	Shenzhen Haosung Technology Co., Ltd
Address of Manufacturer:	3rd floor, A block, Shunxing industrial park, No. 139 Zhongxing Road, Bantian street, Longgang District, Shenzhen, China

Equipment Under Test (EUT)

Product Name:	Tablet PC
Model No.:	MEGA, MEGA1, MEGA2, MEGA6, MEGA8, MEGA9, MEGA10, OR706, OR708, OR77, OR79, OR89, OR99, OR101, OR709, Delta, Delta-S, Speed -I, Speed-II, Speed-III
FCC ID:	2ATFJ-MEGA
Applicable standards:	FCC CFR Title 47 Part 15 Subpart B
Date of sample receipt:	May 09, 2019
Date of Test:	May 10-20, 2019
Date of report issued:	May 21, 2019
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	*May 21, 2019*	*Original*

Prepared By: Bill. Yuan ***Date:*** *May 21, 2019*

Project Engineer

Check By: Robinson Lo ***Date:*** *May 21, 2019*

Reviewer

3 Contents

1 COVER PAGE 1

2 VERSION 2

3 CONTENTS 3

4 TEST SUMMARY 4

5 GENERAL INFORMATION 5

5.1 GENERAL DESCRIPTION OF EUT 5
5.2 TEST MODE AND TEST VOLTAGE 5
5.3 DESCRIPTION OF SUPPORT UNITS 6
5.4 DEVIATION FROM STANDARDS 6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS 6
5.6 TEST FACILITY 6
5.7 TEST LOCATION 6

6 TEST INSTRUMENTS LIST 7

7 TEST RESULTS AND MEASUREMENT DATA 9

7.1 RADIATED EMISSION 9
7.2 CONDUCTED EMISSIONS 15

8 TEST SETUP PHOTO 18

9 EUT CONSTRUCTIONAL DETAILS 18

4 Test Summary

Test Item	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission	FCC Part15.107	ANSI C63.4	Class B	PASS
Radiated Emissions #	FCC Part15.109	ANSI C63.4	Class B	PASS

Remarks:

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *# Refer to FCC Part 15.33 (b)(1) conditional testing procedure :*

The highest frequency generated or used in the EUT	*Test frequency range of Radiated emission*
<108MHz	*30MHz ~ 1GHz*
108MHz ~ 500MHz	*30MHz ~ 2GHz*
500MHz ~ 1GHz	*30MHz ~ 5GHz*
>1GHz	*30MHz ~ 5th harmonic of the highest frequency or 40 GHz, whichever is lower.*

Note: the EUT Internal clock frequency above 108MHz.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz ~ 200MHz	± 3.92dB	(1)
Radiated Emission	200MHz~1000 MHz	± 4.10dB	(1)
Radiated Emission	1GHz ~ 6GHz	± 5.34dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.44dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Name:	Tablet PC
Model No.:	MEGA, MEGA1, MEGA2, MEGA6, MEGA8, MEGA9, MEGA10, OR706, OR708, OR77, OR79, OR89, OR99, OR101, OR709, Delta, Delta-S, Speed -I, Speed-II, Speed-III
Test Model No:	MEGA
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are system version, product appearance and model name for commercial purpose.	
Serial No.:	001MEGA
Hardware Version:	TJ-708V1.1 20161111
Software Version:	OS 20161111
Test sample(s) ID:	GTS201905000070-2
Sample(s) Status:	Normal sample
Power Supply:	Lithium ion Polymer Battery: DC 3.7V, 3000mAh

5.2 Test mode and Test voltage

Test mode:	
PC mode	Keep the EUT in exchanging data mode.
REC mode	Keep the EUT in recording image status
TF card playing mode	Keep the EUT in TF card playing mode.
Test voltage	
AC 120V and DC 3.7V	

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
DELTA	Adapter	YD-BA0500200US	N/A
Lenovo	Notebook PC	E40-80	N/A
SanDisk	TF card	16GB	N/A
YISHE	KEYBOARD	YS-MA75	N/A
YISHE	MOUSE	YS-MA75USB	N/A
Canon	Printer	IP1600	GTS222

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

● **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2.

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

The test was performed at:

Global United Technology Services Co., Ltd.
Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102
Tel: 0755-27798480
Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 20 2018	Oct. 19 2019
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 20 2018	Oct. 19 2019
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 20 2018	Oct. 19 2019
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 27 2018	June. 26 2019

Conducted Emission						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	June. 27 2018	June. 26 2019
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019

7 Test Results and Measurement Data

7.1 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109
Test Method:	ANSI C63.4:2014
Test Frequency Range:	30MHz to 25000MHz
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver setup:

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

Test setup:

For radiated emissions from 30MHz to1GHz

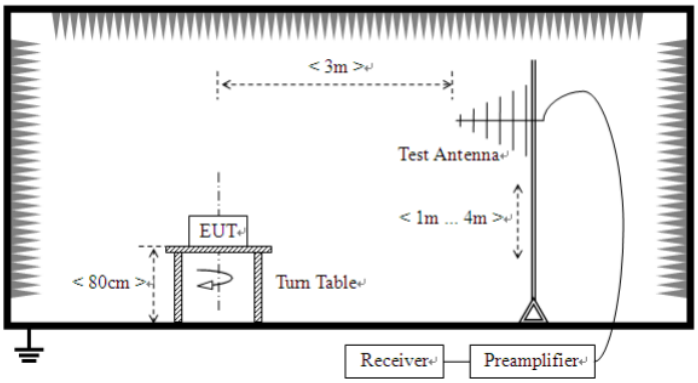

For radiated emissions above 1GHz

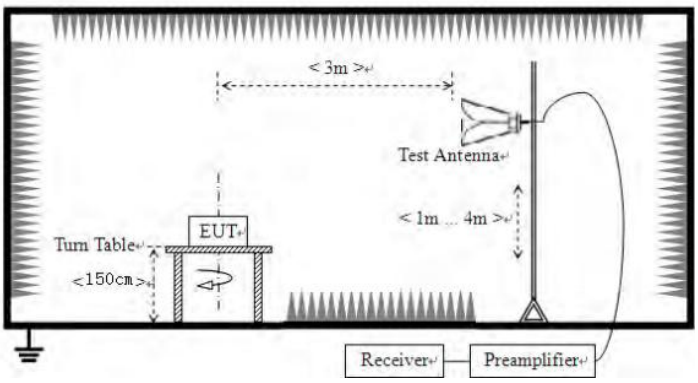

Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.2 for details, only show the worst case.					
Test results:	Pass					

Measurement Data

Below 1GHz

Test mode:	PC mode	Antenna Polarity:	Horizontal

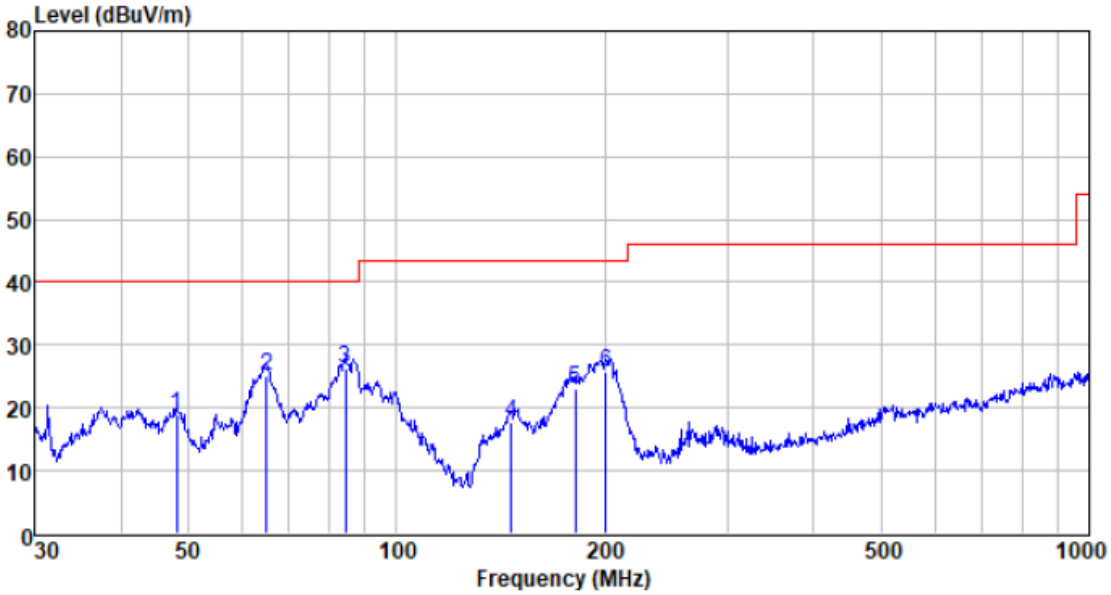

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
48.163	41.86	12.28	0.75	36.09	18.80	40.00	-21.20	QP
64.887	51.26	9.34	0.90	36.38	25.12	40.00	-14.88	QP
84.405	52.84	8.92	1.07	36.59	26.24	40.00	-13.76	QP
146.374	45.55	7.53	1.55	37.06	17.57	43.50	-25.93	QP
181.283	49.51	9.07	1.75	37.24	23.09	43.50	-20.41	QP
200.688	50.75	10.44	1.84	37.33	25.70	43.50	-17.80	QP

Test mode:	PC mode	Antenna Polarity:	Vertical

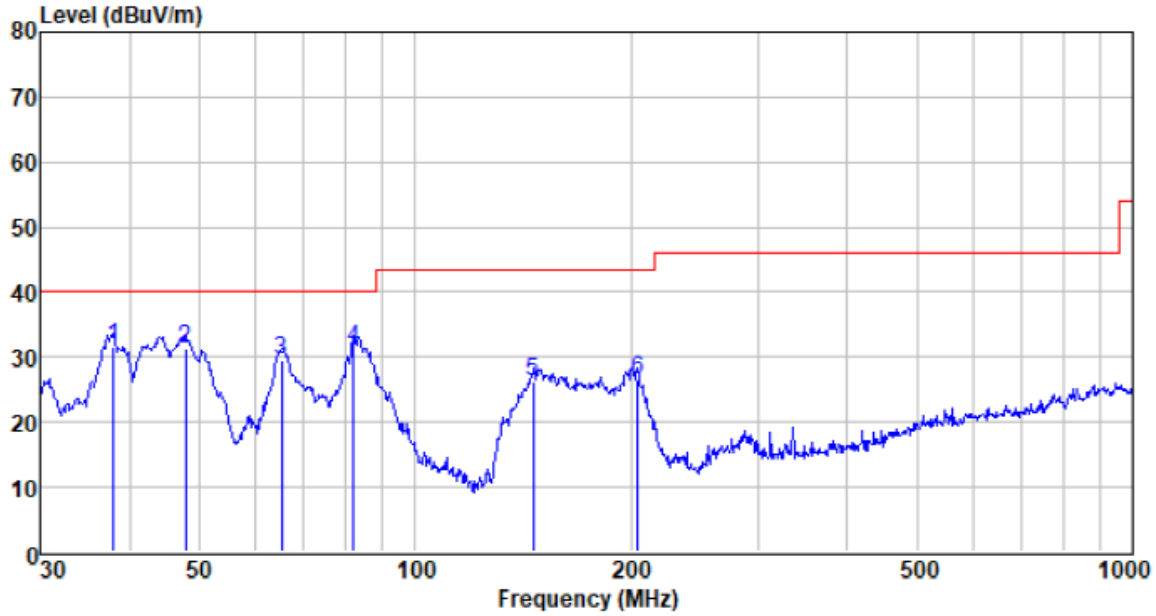

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
37.945	54.77	11.86	0.64	35.54	31.73	40.00	-8.27	QP
47.826	54.36	12.28	0.75	36.08	31.31	40.00	-8.69	QP
65.114	55.55	9.34	0.90	36.39	29.40	40.00	-10.60	QP
82.071	58.71	8.16	1.05	36.57	31.35	40.00	-8.65	QP
145.861	54.22	7.51	1.54	37.05	26.22	43.50	-17.28	QP
204.238	51.36	10.58	1.86	37.33	26.47	43.50	-17.03	QP

Above 1GHz

Test mode:	PC mode	Antenna Polarity:	Horizontal

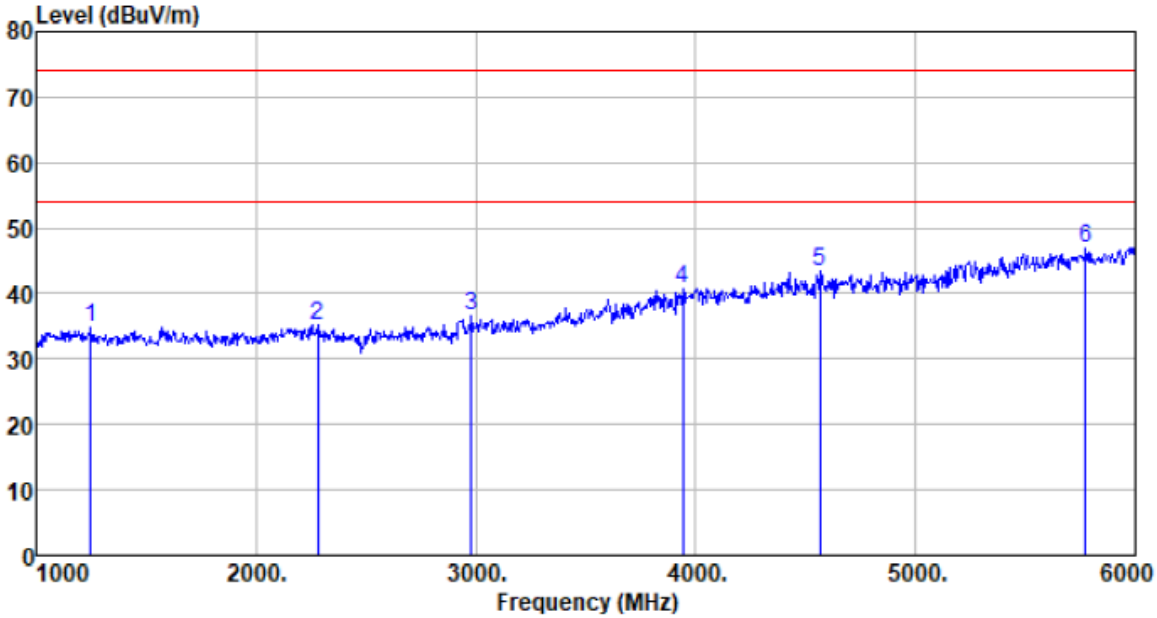

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1250.000	41.22	24.90	4.59	35.89	34.82	74.00	-39.18	Peak
2280.000	38.83	27.13	6.14	36.93	35.17	74.00	-38.83	Peak
2980.000	38.14	28.56	7.20	37.39	36.51	74.00	-37.49	Peak
3940.000	40.17	29.44	8.65	37.49	40.77	74.00	-33.23	Peak
4565.000	40.81	30.92	9.18	37.56	43.35	74.00	-30.65	Peak
5775.000	41.20	32.26	10.12	36.73	46.85	74.00	-27.15	Peak

Test mode:	PC mode	Antenna Polarity:	Vertical

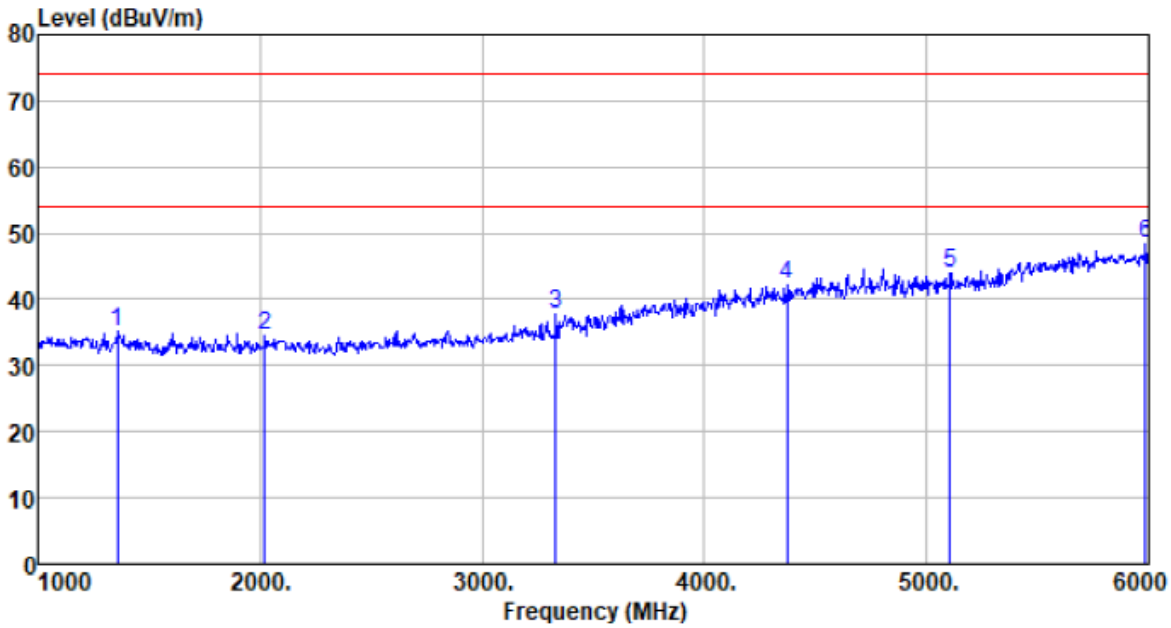

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1360.000	41.21	25.16	4.75	36.03	35.09	74.00	-38.91	Peak
2020.000	39.10	26.45	5.74	36.72	34.57	74.00	-39.43	Peak
3330.000	39.12	28.40	7.72	37.44	37.80	74.00	-36.20	Peak
4370.000	40.22	30.49	9.03	37.54	42.20	74.00	-31.80	Peak
5105.000	40.24	31.68	9.58	37.47	44.03	74.00	-29.97	Peak
5985.000	41.99	32.76	10.28	36.52	48.51	74.00	-25.49	Peak

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
For above 6GHz，no emission found.

7.2 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107
Test Method:	ANSI C63.4:2014
Test Frequency Range:	150kHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9kHz, VBW=30kHz
Limit:	

Frequency range (MHz)	Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
0.5-30	60	50

Test setup:

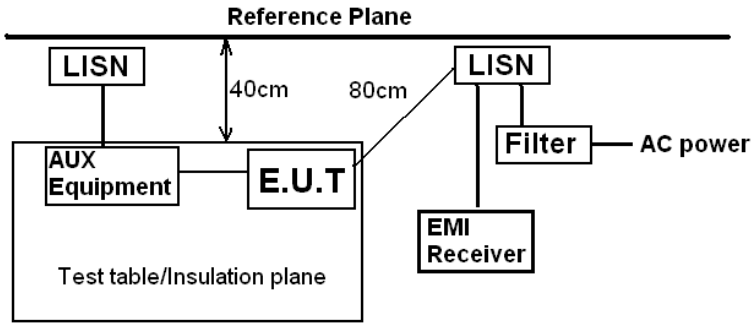

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.2 for details, only show the worst case.					
Test results:	Pass					

Measurement Data

Test mode:	REC mode	Phase Polarity:	Line

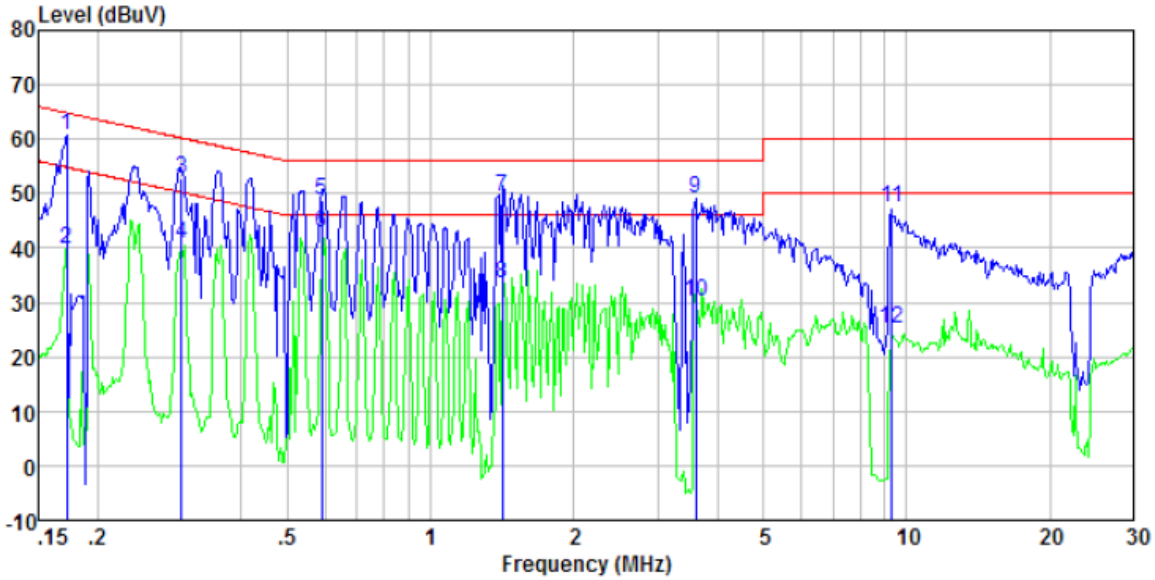

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.17	60.27	0.40	0.09	60.76	64.86	-4.10	QP
0.17	39.27	0.40	0.09	39.76	54.86	-15.10	Average
0.30	52.38	0.40	0.10	52.88	60.24	-7.36	QP
0.30	40.38	0.40	0.10	40.88	50.24	-9.36	Average
0.59	48.48	0.29	0.12	48.89	56.00	-7.11	QP
0.59	42.48	0.29	0.12	42.89	46.00	-3.11	Average
1.42	49.08	0.20	0.16	49.44	56.00	-6.56	QP
1.42	33.08	0.20	0.16	33.44	46.00	-12.56	Average
3.60	48.70	0.20	0.18	49.08	56.00	-6.92	QP
3.60	29.70	0.20	0.18	30.08	46.00	-15.92	Average
9.30	46.89	0.20	0.20	47.29	60.00	-12.71	QP
9.30	24.89	0.20	0.20	25.29	50.00	-24.71	Average

Test mode:	REC mode	Phase Polarity:	Neutral

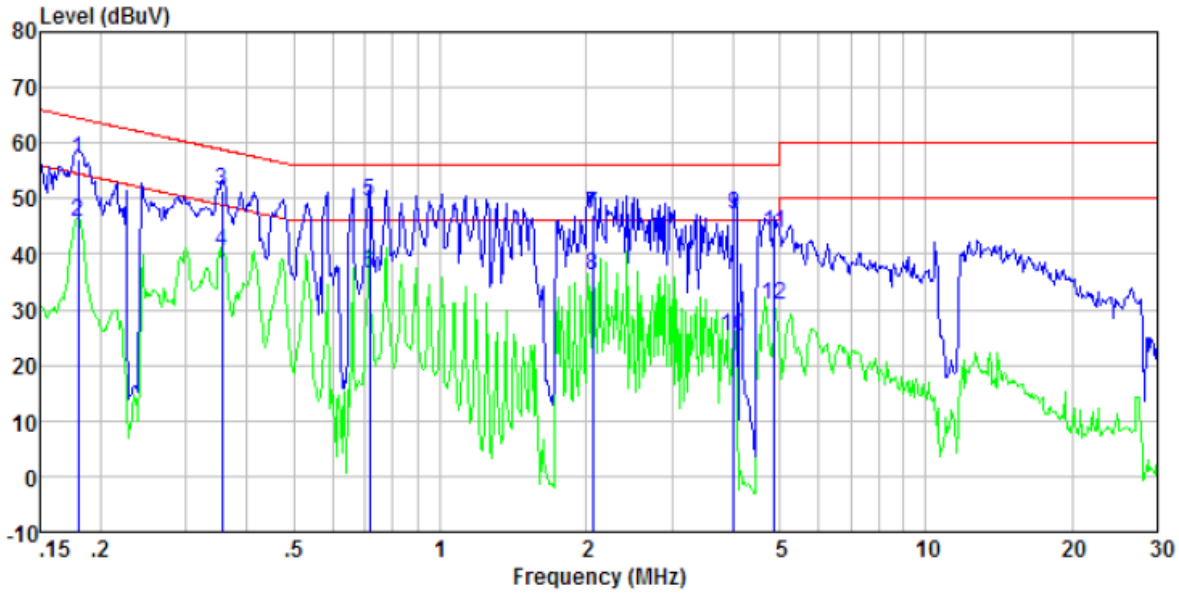

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.18	56.42	0.40	0.10	56.92	64.50	-7.58	QP
0.18	45.42	0.40	0.10	45.92	54.50	-8.58	Average
0.36	50.87	0.37	0.10	51.34	58.83	-7.49	QP
0.36	39.87	0.37	0.10	40.34	48.83	-8.49	Average
0.72	49.18	0.26	0.13	49.57	56.00	-6.43	QP
0.72	36.18	0.26	0.13	36.57	46.00	-9.43	Average
2.07	46.84	0.20	0.18	47.22	56.00	-8.78	QP
2.07	35.84	0.20	0.18	36.22	46.00	-9.78	Average
4.03	46.83	0.20	0.18	47.21	56.00	-8.79	QP
4.03	24.83	0.20	0.18	25.21	46.00	-20.79	Average
4.87	43.38	0.20	0.17	43.75	56.00	-12.25	QP
4.87	30.38	0.20	0.17	30.75	46.00	-15.25	Average

Notes:
1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

------End------