



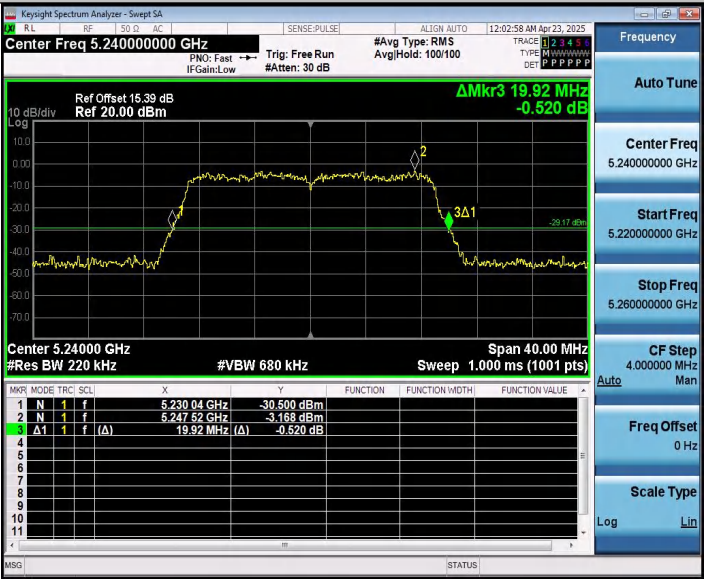
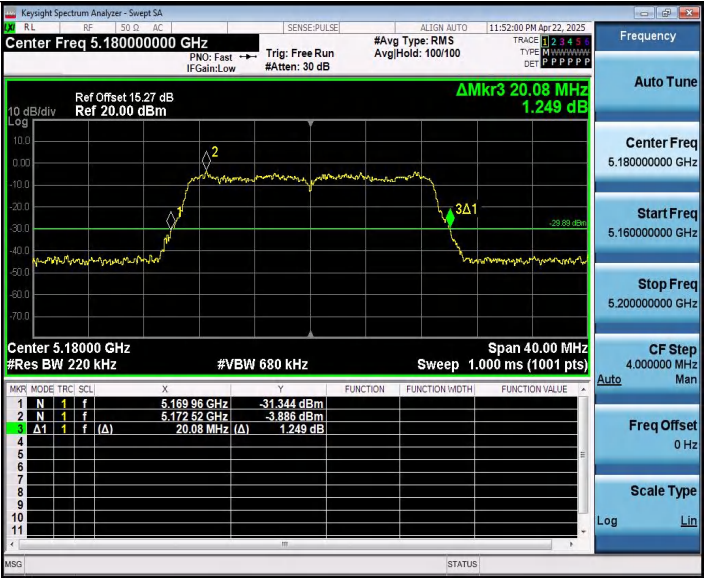


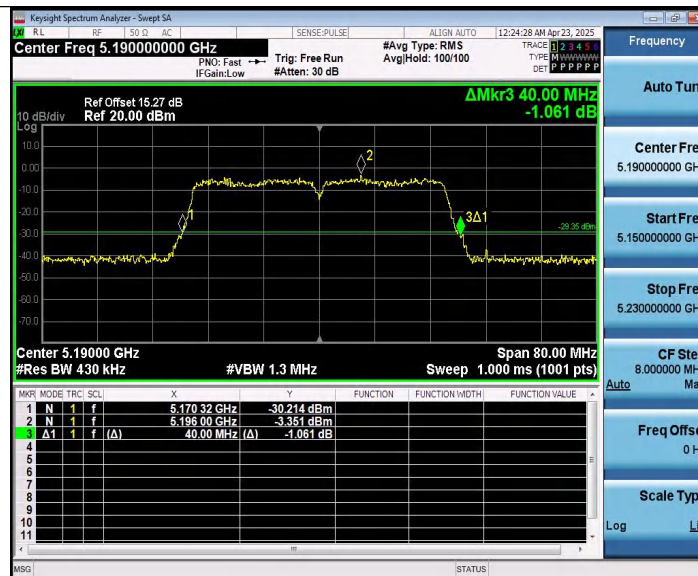

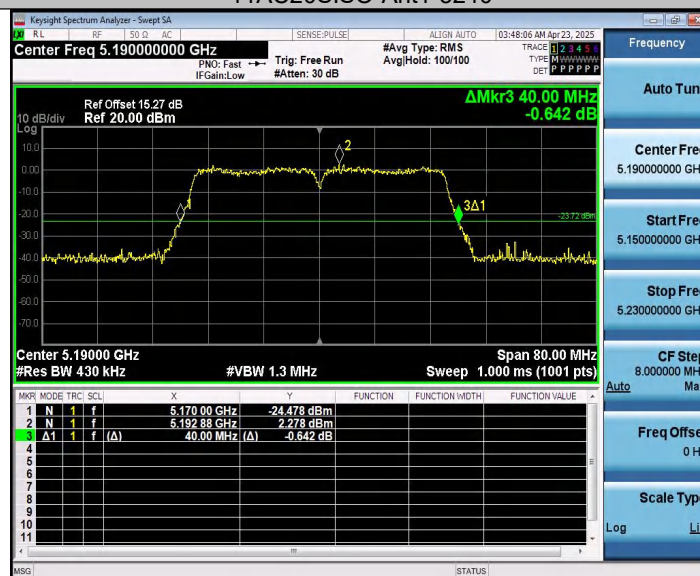

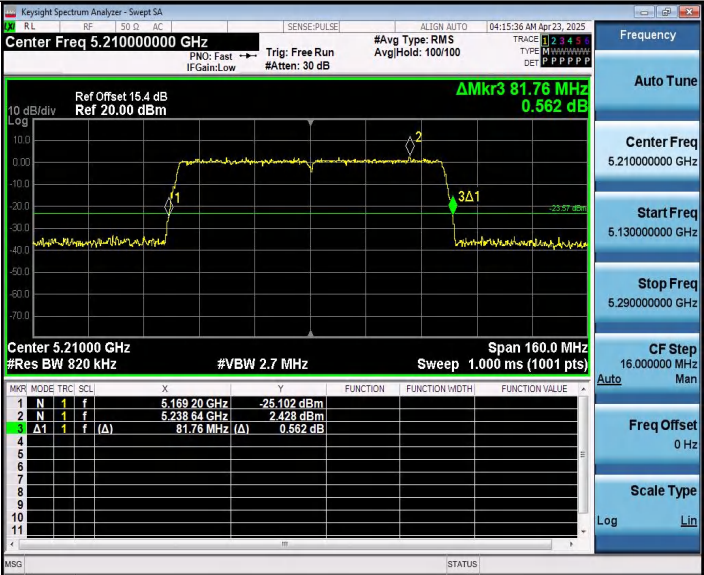

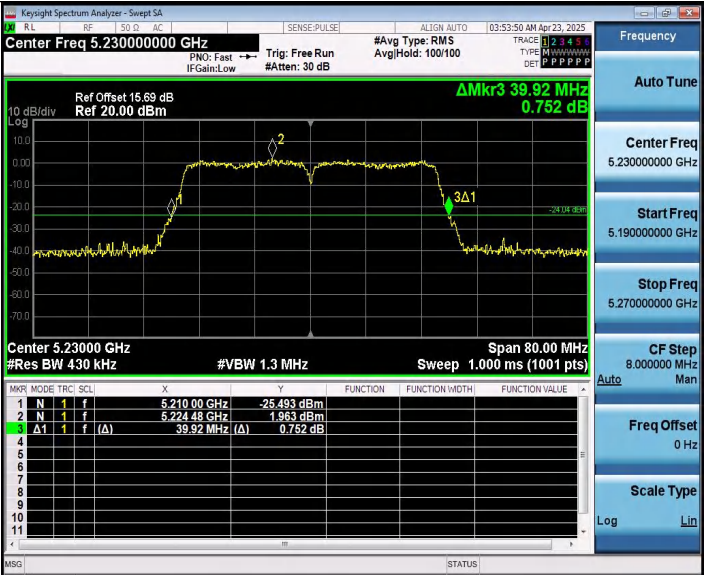

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test Configuration




Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.360	≥500KHz	Pass
		157	16.320		
		165	16.360		
802.11n(HT20)	U-NII 3	149	17.560		
		157	17.560		
		165	17.560		
802.11n(HT40)	U-NII 3	151	35.360		
		159	35.200		
802.11ac(VHT20)	U-NII 3	149	17.400		
		157	17.280		
		165	17.560		
802.11ac(VHT40)	U-NII 3	151	35.520		
		159	35.200		
802.11ac(VHT80)	U-NII 3	155	76.160		

Test plot as follows:

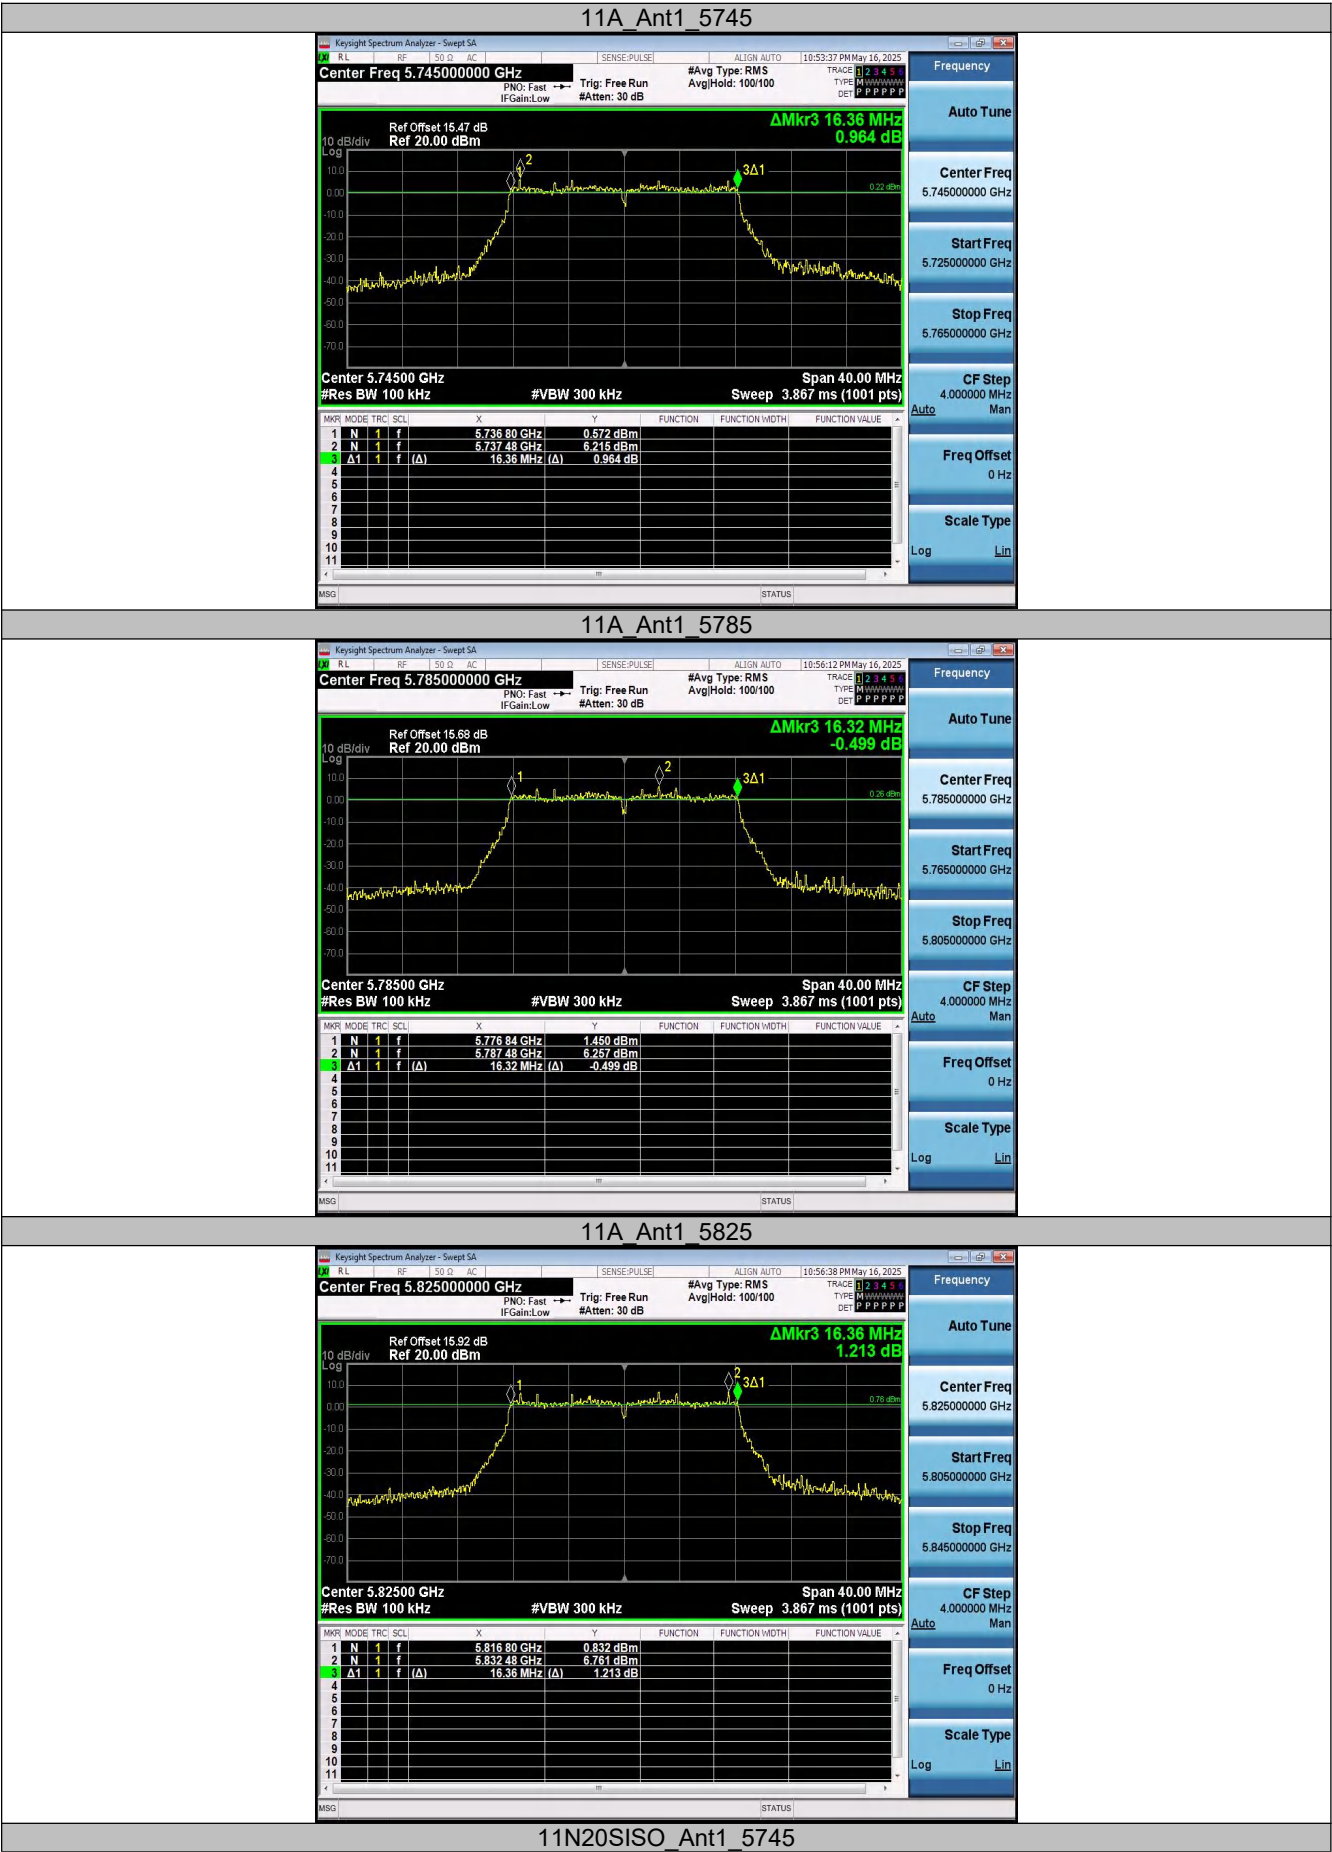


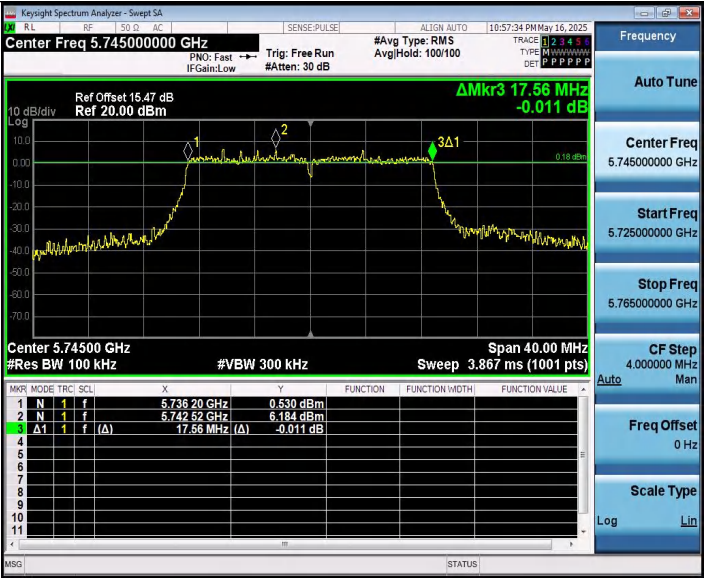




11N20SISO Ant1 5785

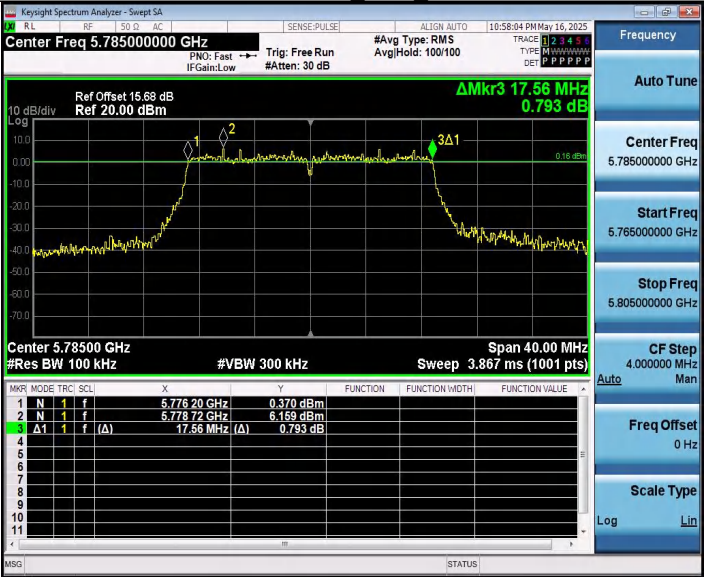


11N20SISO Ant1 5825

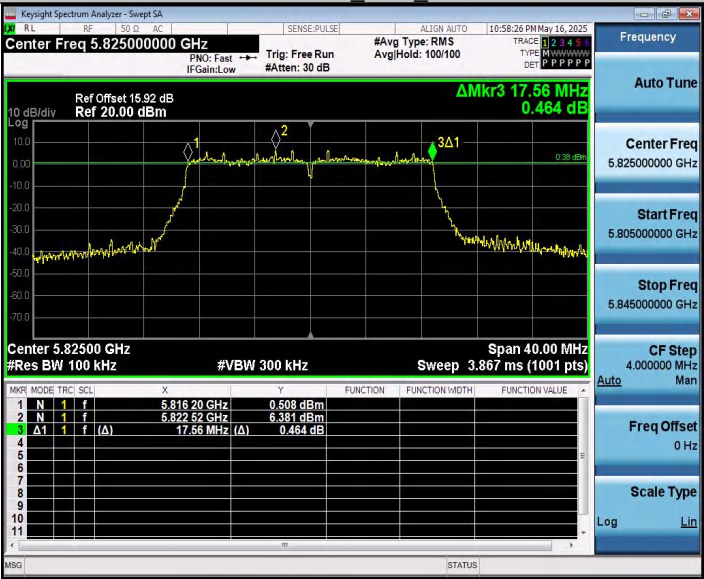


11N40SISO Ant1 5755

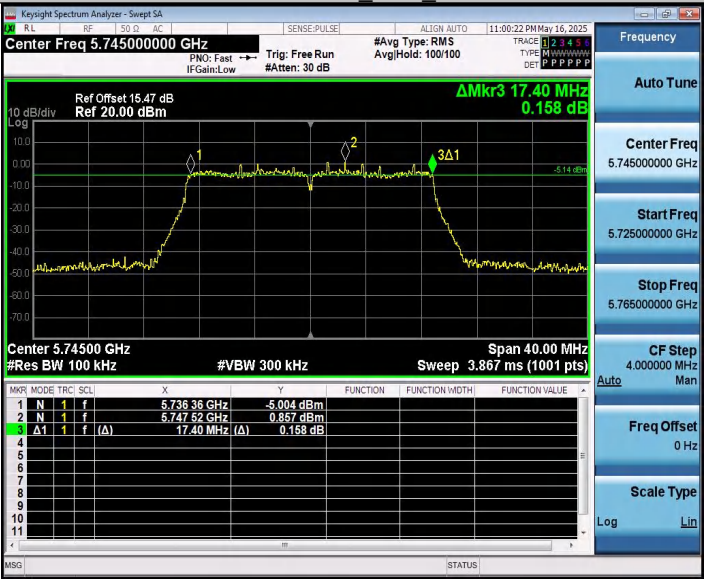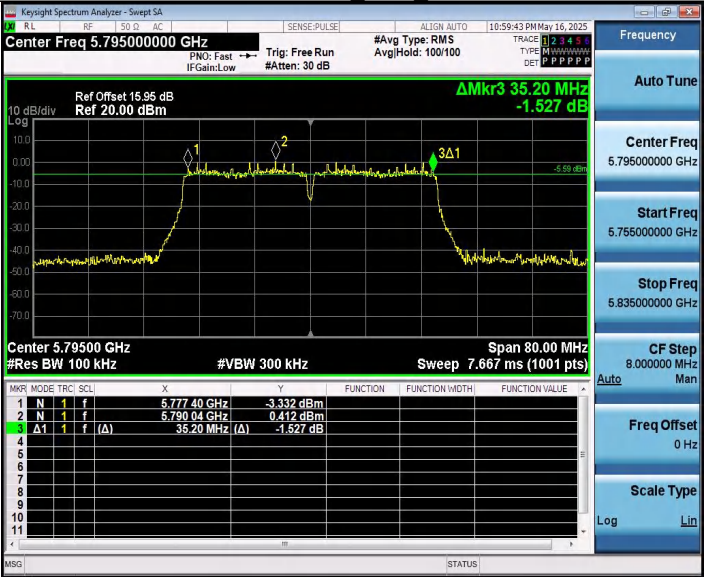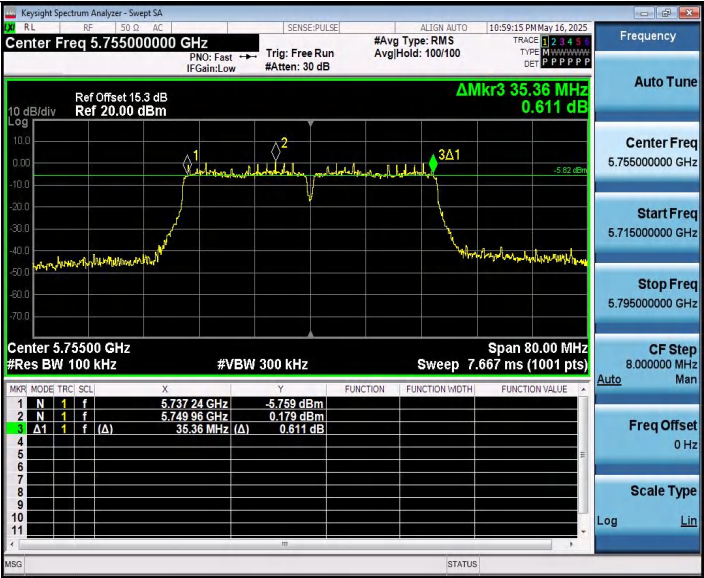


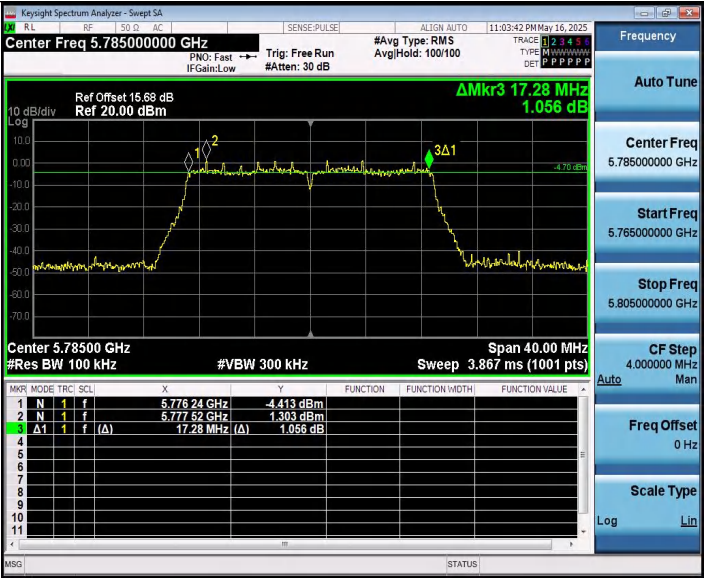



11AC20SISO Ant1 5825

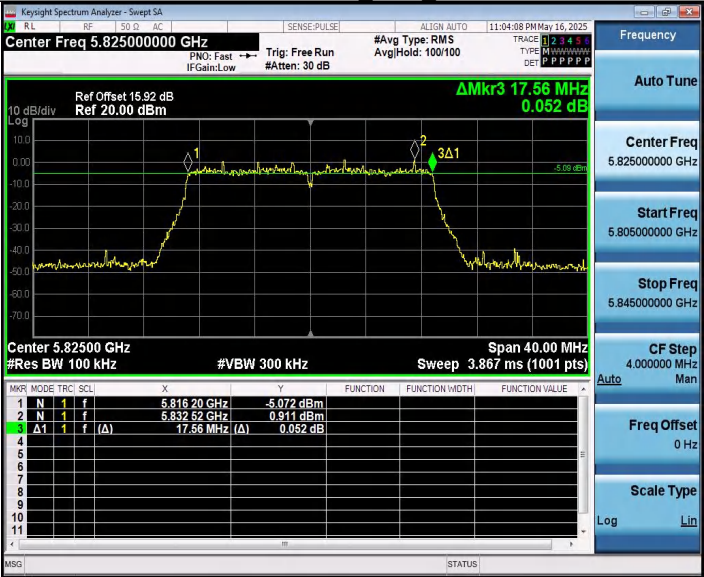

11AC40SISO Ant1 5755

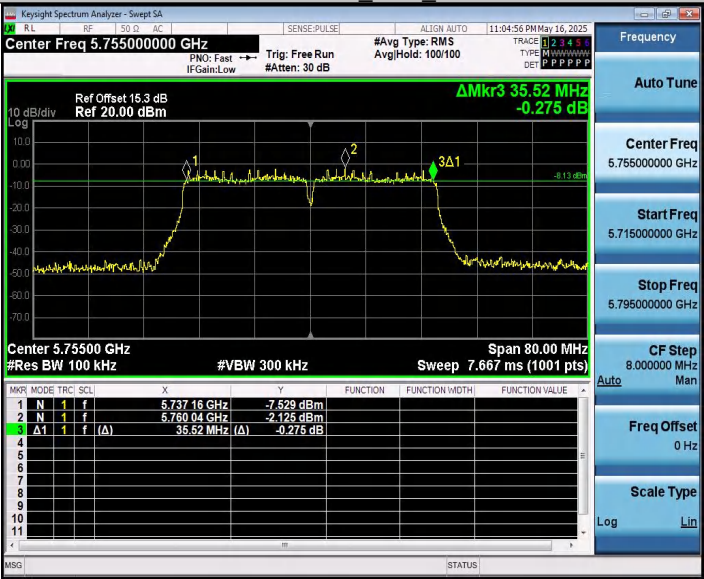

11AC40SISO Ant1 5795

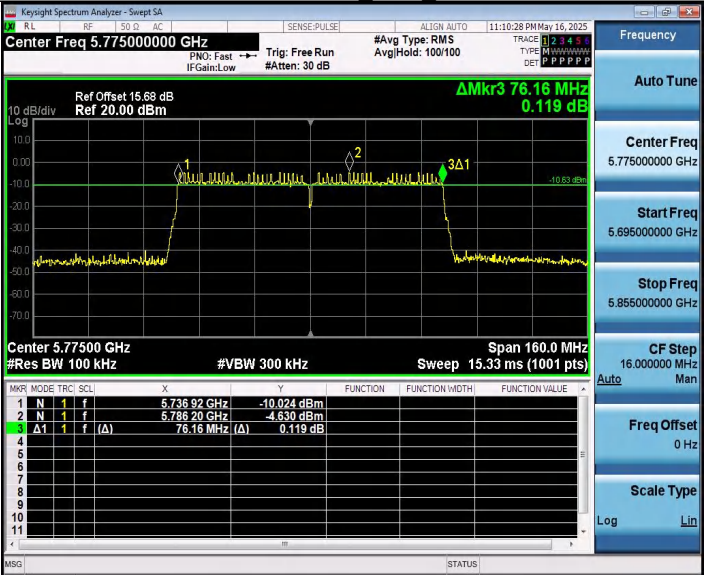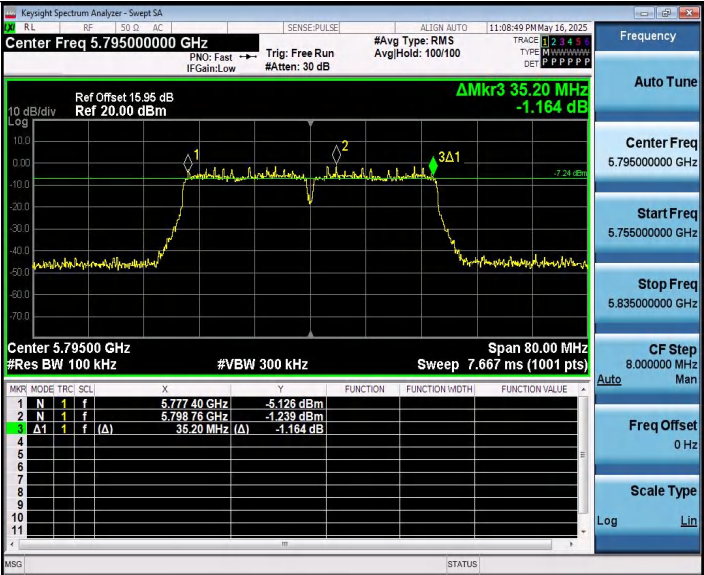


4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

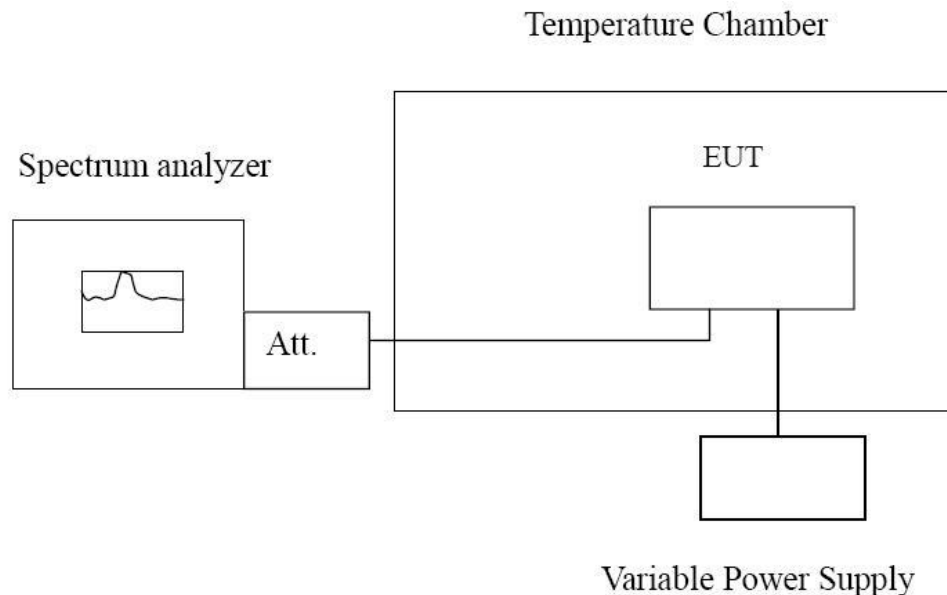

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
24.0	-30	161.85	0.03125	Within the band of operation	Pass
	-20	158.38	0.03058		
	-10	175.58	0.03390		
	0	134.05	0.02588		
	10	153.38	0.02961		
	20	163.82	0.03163		
	30	134.40	0.02595		
	40	135.38	0.02614		
	50	137.58	0.02656		
26.4	25	136.06	0.02627	Within the band of operation	Pass
21.6	25	146.26	0.02824		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
24.0	-30	134.07	0.02334	Within the band of operation	Pass
	-20	144.04	0.02507		
	-10	155.05	0.02699		
	0	178.47	0.03107		
	10	120.73	0.02101		
	20	174.21	0.03032		
	30	132.85	0.02312		
	40	160.89	0.02801		
	50	165.24	0.02876		
26.4	25	150.33	0.02617	Within the band of operation	Pass
21.6	25	116.22	0.02023		

4.8 Automatically Discontinue Transmission

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.407(c):

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Test Result:

Declared by applicants that the device will automatically discontinue transmission in case of either absence of information to transmit or operational failure.

4.9 Band edge for RF Conducted Emissions

Limit

1) For transmitters operating in the 5.15 – 5.25 GHz band: All emissions outside of the 5.15 – 5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.

2) For transmitters operating solely in the 5.725 – 5.850 GHz band.

All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold.


Test Configuration




Test Results

Test plot as follows:


11A_Ant1_Low_5180

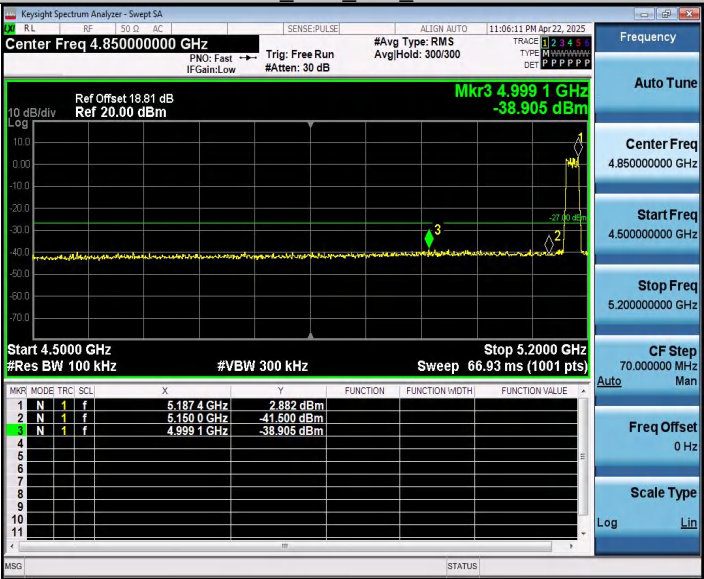


11A_Ant1_High_5240

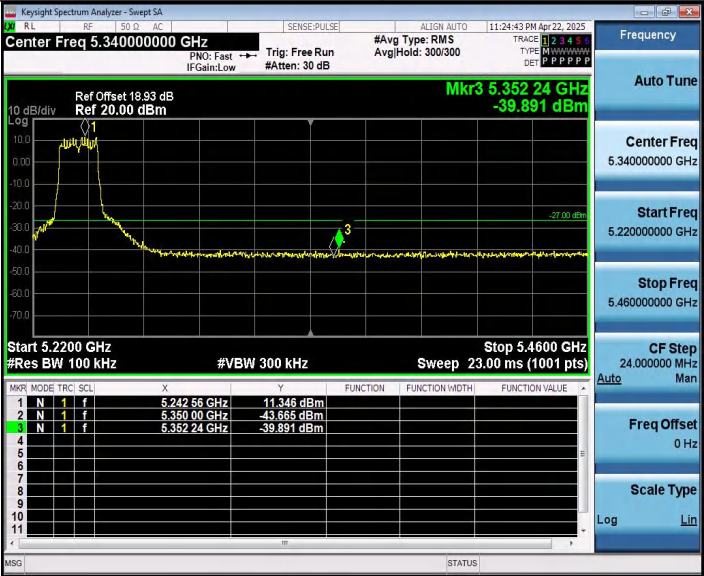


11N20SISO_Ant1_Low_5180

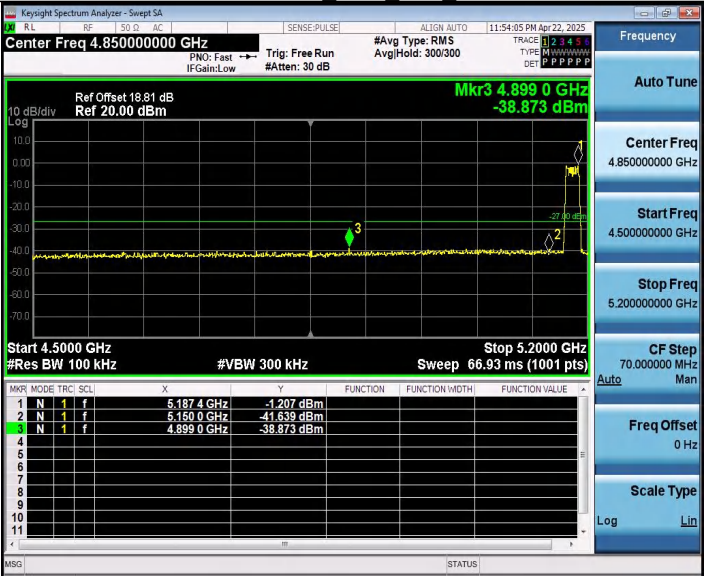


11N20SISO_Ant1_High_5240

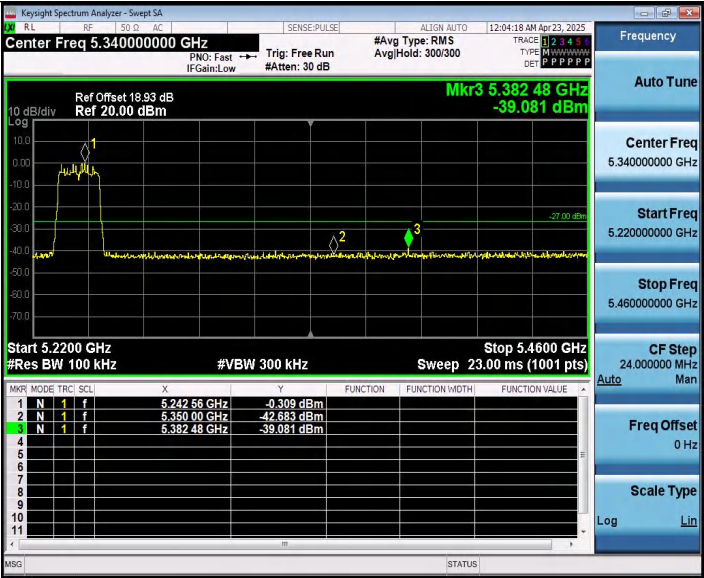


11N40SISO Ant1 Low 5190

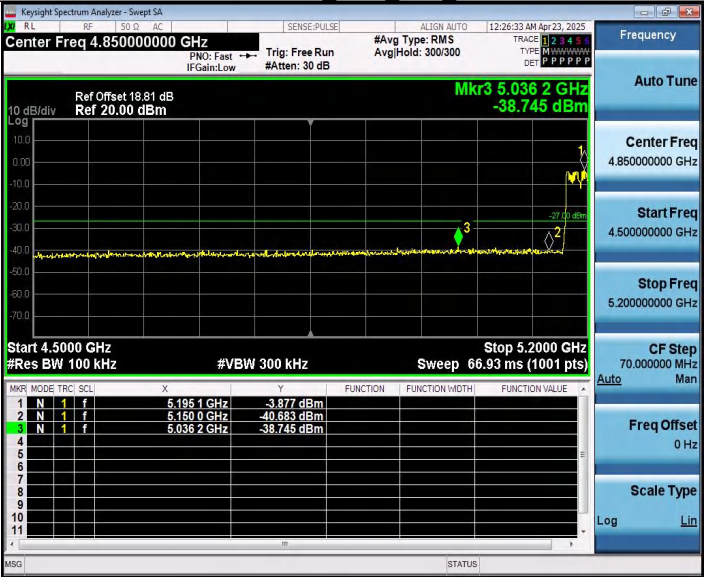


11N40SISO Ant1 High 5230

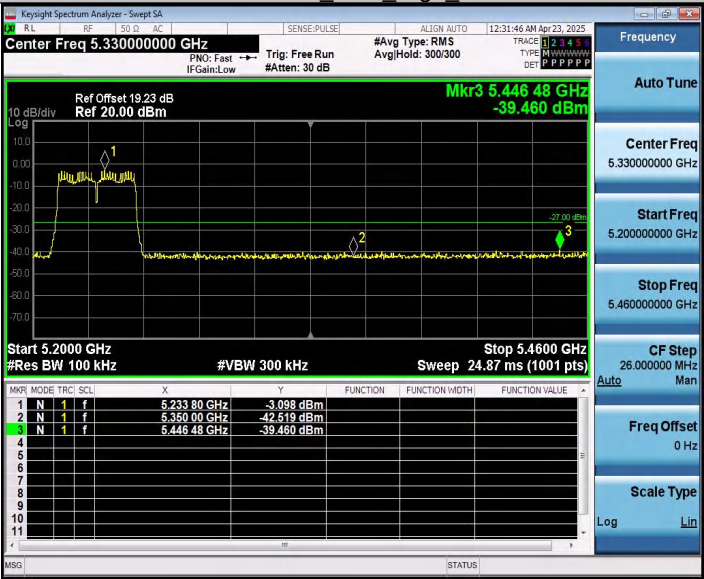


11AC20SISO Ant1 Low 5180

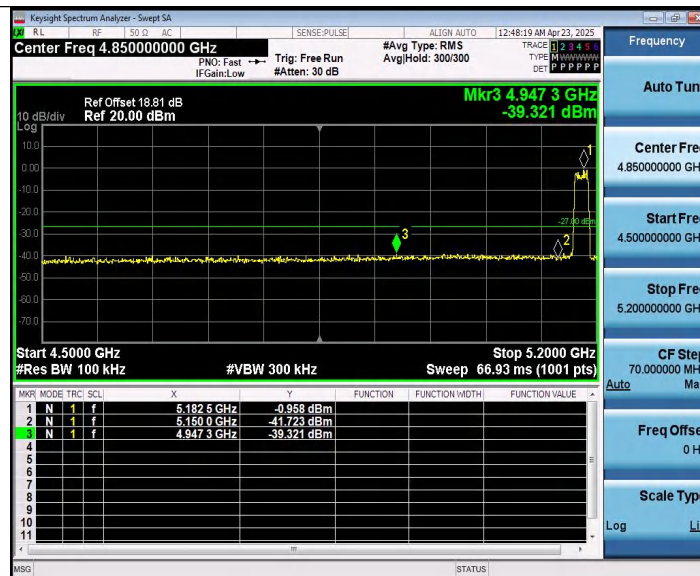


11AC20SISO Ant1 High 5240

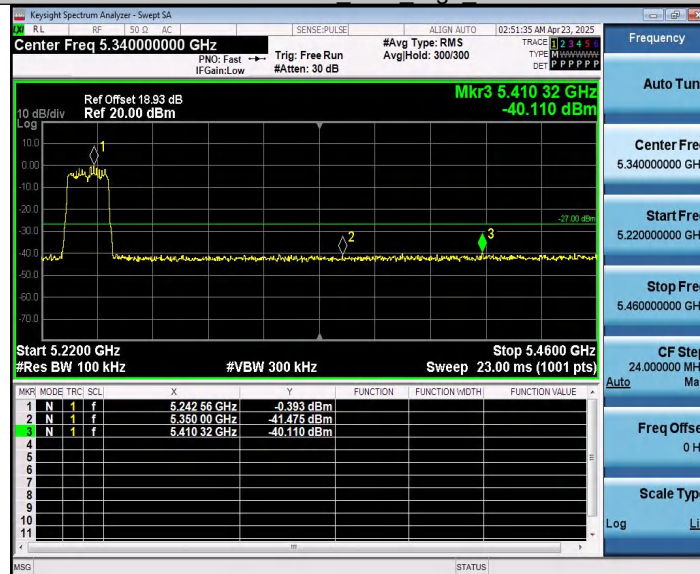


11AC40SISO Ant1 Low 5190

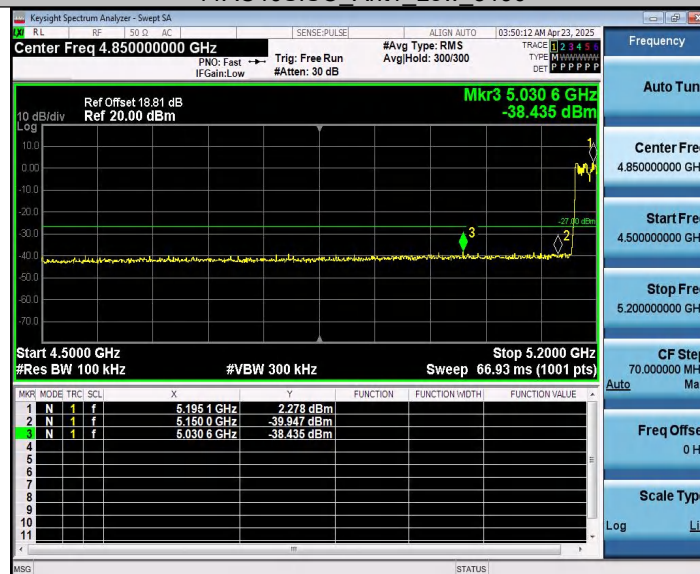


11AC40SISO Ant1 High 5230

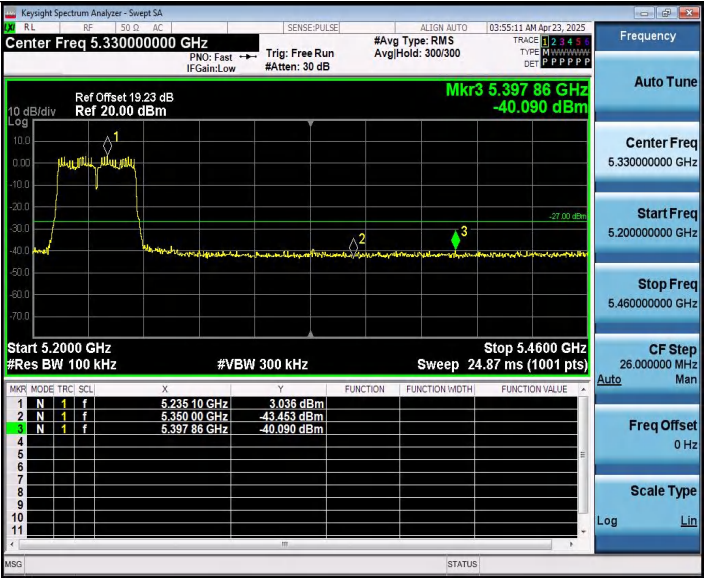


11AC80SISO Ant1 Low 5210

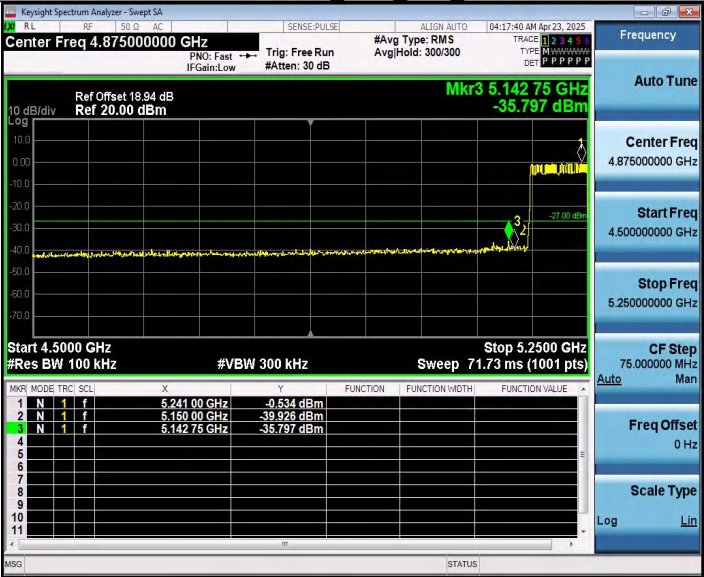


11AC80SISO Ant1 High 5210

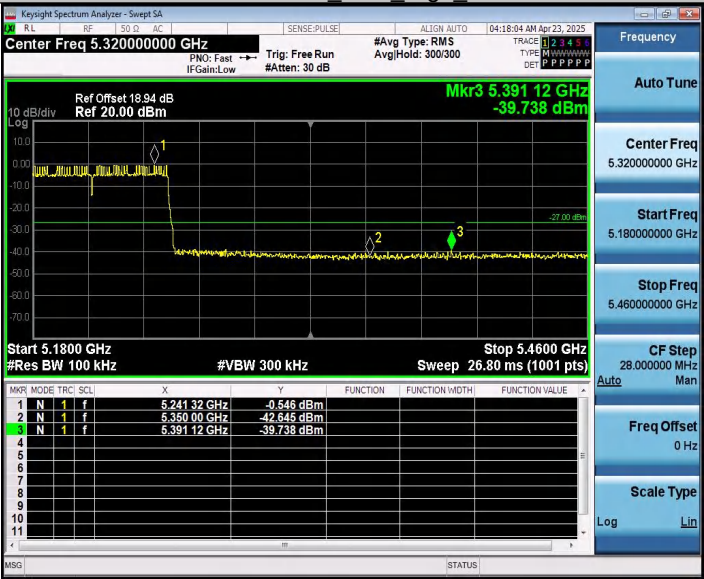




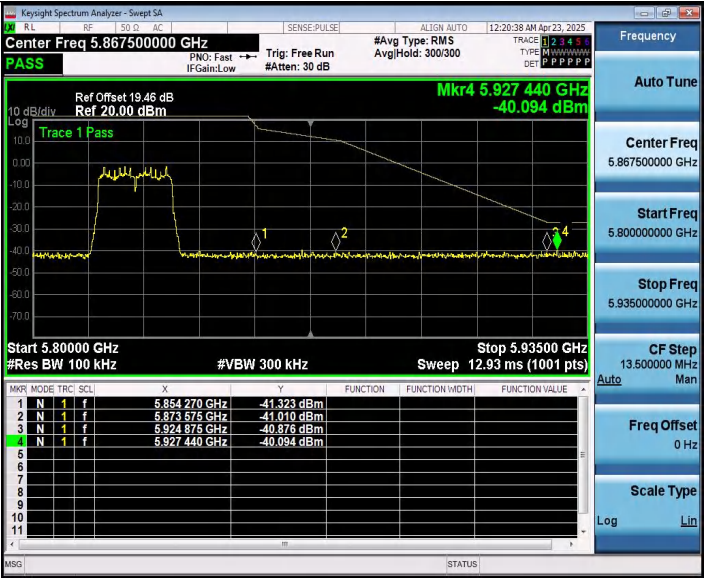


11N40SISO Ant1 Low 5755

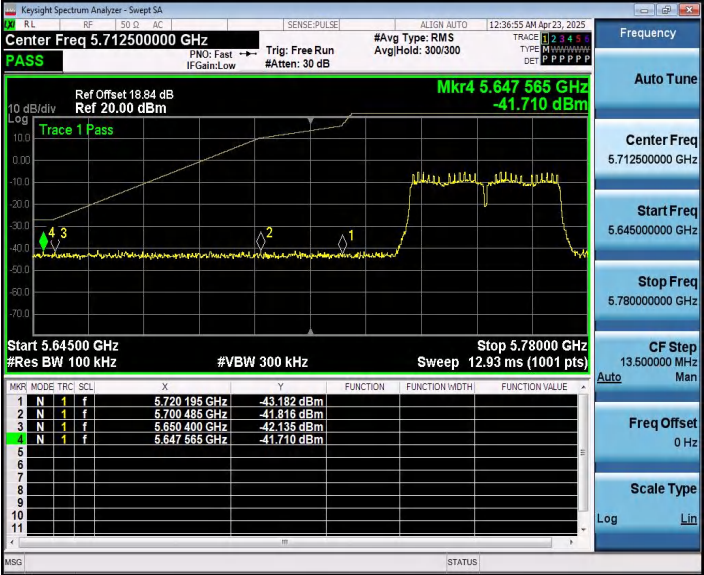


11N40SISO Ant1 High 5795

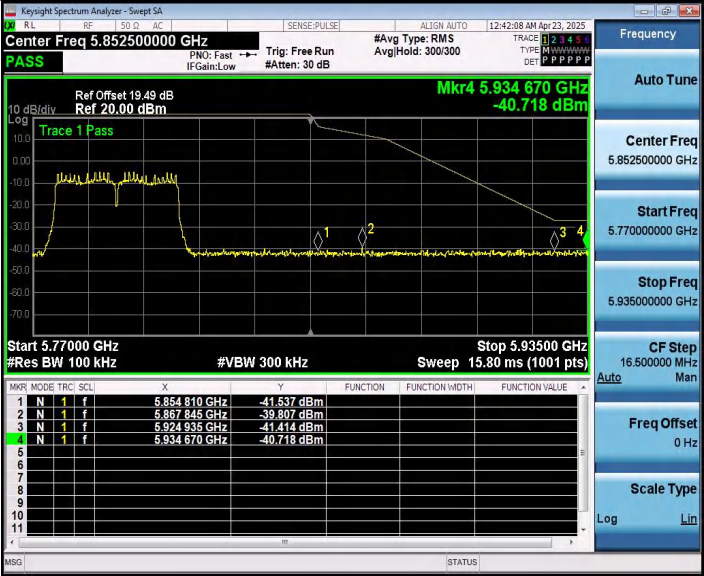

11AC20SISO Ant1 Low 5745

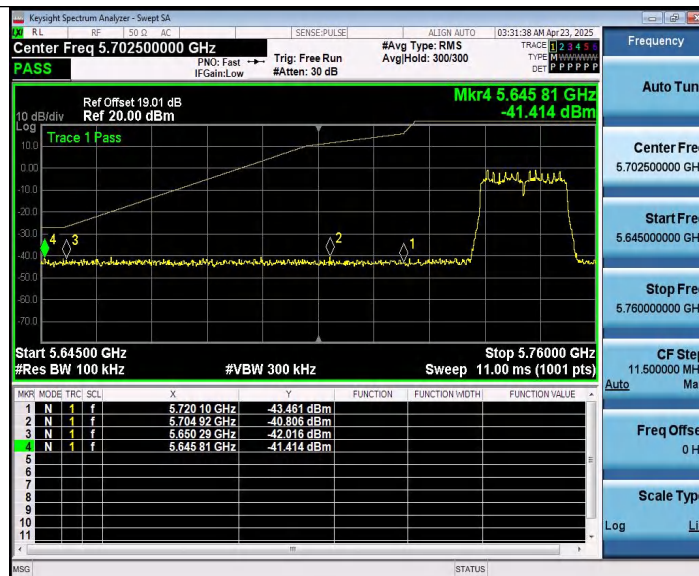


11AC20SISO Ant1 High 5825

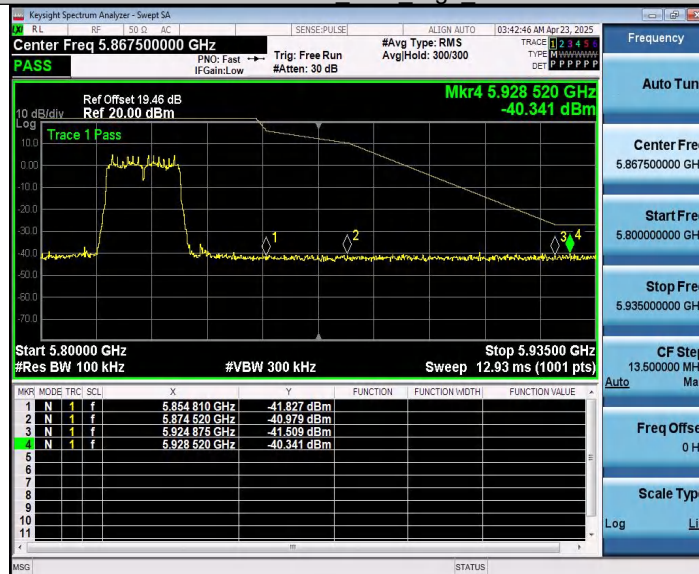


11AC40SISO Ant1 Low 5755




11AC40SISO Ant1 High 5795

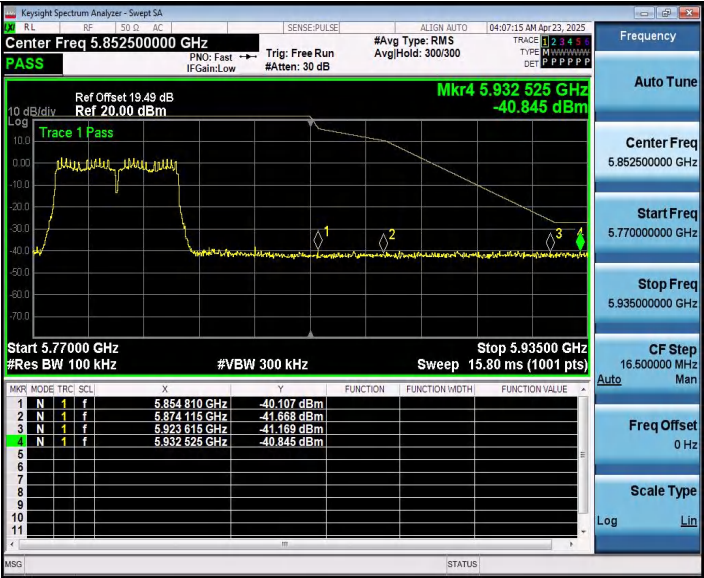



11AC80SISO Ant1 Low 5775

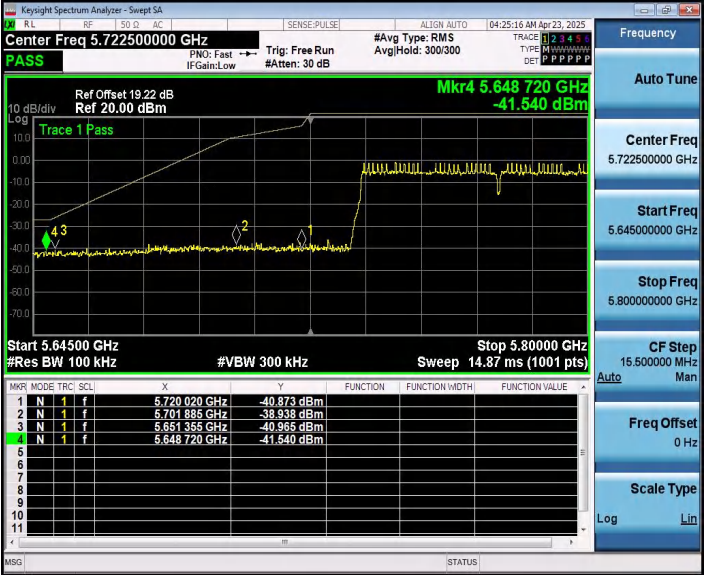

11AC80SISO Ant1 High 5775

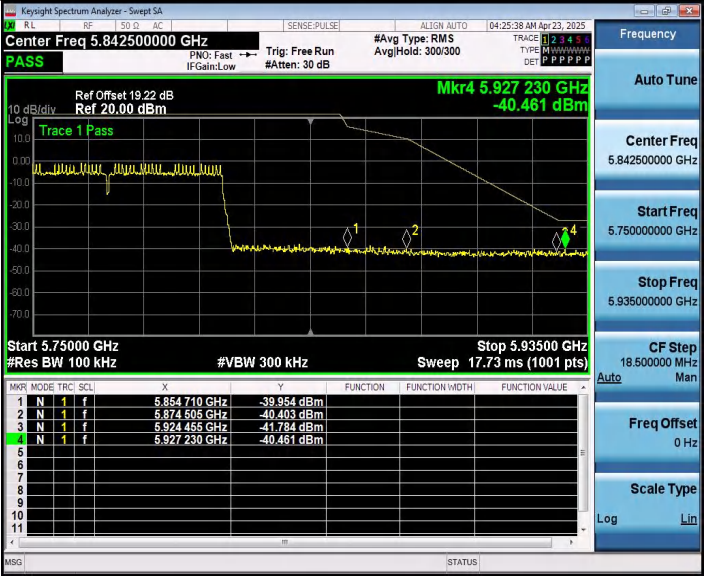

5 Test Setup Photos of the EUT

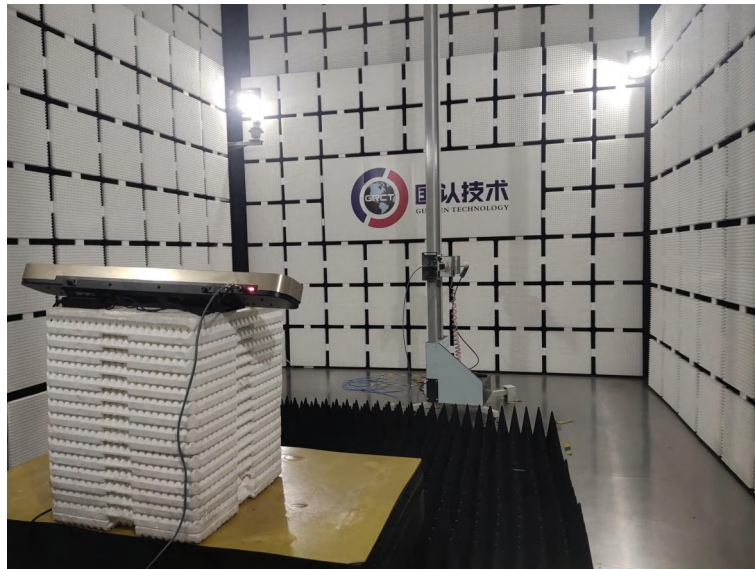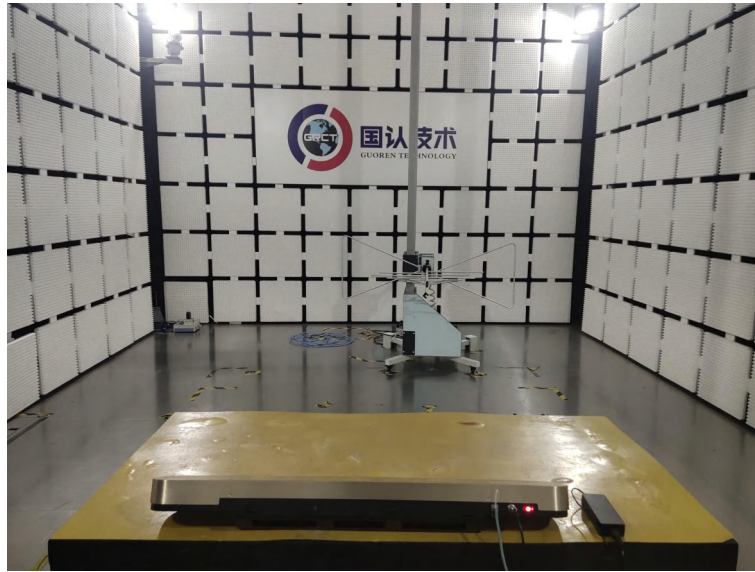

6 Photos of the EUT

Reference to the test report No. GRCTR250402010-01.

***** End of Report *****