

RF TEST REPORT

FCC ID: 2ATI2-RIGEL3PRO

Test Report No.....: RF260120744-02-003

Product(s) Name.....: Overhead golf launch monitor

Model(s).....: Rigel3 Pro, Rigel3 Plus, Rigel3 Lite, Rigel2 Pro, Rigel2 Lite

Trade Mark.....: GOLFJOY

Applicant.....: SHENZHEN GREENJOY TECHNOLOGY CO.,LTD

Address.....: 2606, UnitA, Building11, Shenzhen Bay Technology and Science
Eco-Park, Nanshan, Shenzhen, China

Receipt Date.....: 2026.01.16

Test Date.....: 2026.01.18 ~ 2026.03.26

Issued Date.....: 2026.03.27

Standards.....: 47 CFR FCC Part 15, Subpart C(Section 15.247)

ANSI C63.10:2020

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Lemon He	Black Ding	Tim Zhang	
Lemon He	Black Ding	Tim Zhang	

Table of Contents

REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 PARAMETERS OF TEST SOFTWARE	9
2.4 SUPPORT UNITS	9
3 . AC POWER LINE CONDUCTED EMISSIONS	10
3.1 LIMIT	10
3.2 TEST PROCEDURE	10
3.3 DEVIATION FROM TEST STANDARD	10
3.4 TEST SETUP	11
3.5 EUT OPERATING CONDITIONS	11
3.6 TEST RESULTS	11
4 . RADIATED EMISSIONS	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	13
4.3 DEVIATION FROM TEST STANDARD	14
4.4 TEST SETUP	14
4.5 EUT OPERATING CONDITIONS	15
4.6 TEST RESULT - 9 KHZ TO 30 MHZ	15
4.7 TEST RESULT - 30 MHZ TO 1000 MHZ	15
4.8 TEST RESULT - ABOVE 1000 MHZ	15
5 . BANDWIDTH	16
5.1 LIMIT	16
5.2 TEST PROCEDURE	16
5.3 DEVIATION FROM STANDARD	16
5.4 TEST SETUP	16
5.5 EUT OPERATION CONDITIONS	16
5.6 TEST RESULTS	16
6 . MAXIMUM OUTPUT POWER	17
6.1 LIMIT	17
6.2 TEST PROCEDURE	17

6.3 DEVIATION FROM STANDARD	17
6.4 TEST SETUP	17
6.5 EUT OPERATION CONDITIONS	17
6.6 TEST RESULTS	17
7 . CONDUCTED SPURIOUS EMISSION	18
7.1 LIMIT	18
7.2 TEST PROCEDURE	18
7.3 DEVIATION FROM STANDARD	18
7.4 TEST SETUP	18
7.5 EUT OPERATION CONDITIONS	18
7.6 TEST RESULTS	18
8 . POWER SPECTRAL DENSITY	19
8.1 LIMIT	19
8.2 TEST PROCEDURE	19
8.3 DEVIATION FROM STANDARD	19
8.4 TEST SETUP	19
8.5 EUT OPERATION CONDITIONS	19
8.6 TEST RESULTS	19
9 . MEASUREMENT INSTRUMENTS LIST	20
10 . ANTENNA REQUIREMENT	21
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	22
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	27
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	28
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	33
APPENDIX E - BANDWIDTH	44
APPENDIX F - MAXIMUM OUTPUT POWER	51
APPENDIX G - CONDUCTED SPURIOUS EMISSION	55
APPENDIX H - POWER SPECTRAL DENSITY	64

REPORT ISSUED HISTORY

Original Report Issue Date: 2026.03.27

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
FCC Designation Number	CN1340
CAB identifier	CN0145
A2LA Certificate Number	6823.01

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±102kHz
Power Spectral Density	±0.243dB
Conducted Spurious Emission	±0.743dB
RF power conducted	±1.328dB
Conducted emission(9kHz~30MHz) AC main	±2.68dB
Radiated emission(9kHz~30MHz)	±3.50dB
Radiated emission (30MHz~1GHz)	±4.20dB
Radiated emission (1GHz~18GHz)	±5.10dB
Radiated emission (18GHz~40GHz)	±5.26dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24.6°C	49%	AC 120V/60Hz	Keith Huang
Radiated Emissions-9 kHz to 30 MHz	23.9°C	50%	AC 120V/60Hz	Keith Huang
Radiated Emissions-30 MHz to 1000 MHz	23.9°C	50%	AC 120V/60Hz	Keith Huang
Radiated Emissions-Above 1000 MHz	23.9°C	50%	DC 24V	Keith Huang
Bandwidth	23.4°C	48%	DC 24V	Lemon He
Maximum Output Power	23.4°C	48%	DC 24V	Lemon He
Conducted Spurious Emission	23.4°C	48%	DC 24V	Lemon He
Power Spectral Density	23.4°C	48%	DC 24V	Lemon He

Note: Adapter supply voltage AC 120V/60Hz.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Sample No.	POC260120744-S001, POC260120744-S002
Product name	Overhead golf launch monitor
Model name	Rigel3 Pro, Rigel3 Plus, Rigel3 Lite, Rigel2 Pro, Rigel2 Lite
Test model	Rigel3 Pro, Rigel3 Plus
Model difference	Rigel3 Plus is based on Rigel3 Pro, but it has removed the AI acceleration card circuit board, Rigel3 Lite, Rigel2 Pro, Rigel2 Lite and Rigel3 Plus only the model name is different.
Trade Mark	GOLFJOY
Power supply	DC 24V from adapter
Adapter information	Model name: GM95-240375-F Input: 100-240V~, 50-60Hz, 2.5A Output: 24.0V == 3.75A; 90.0W
Operate temperature	-10℃~45℃
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps
Max. Output Power	0.72dBm (0.001W)
Antenna gain	1.12dBi
Antenna type	Integrated Antenna

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_1Mbps Channel 19

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 3	TX Mode_1Mbps Channel 19

Radiated emissions test – Below 1GHz	
Final Test Mode	Description
Mode 3	TX Mode_1Mbps Channel 19

Radiated emissions test – Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Note:

- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~18GHz and 18GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the TX Mode_1Mbps Channel 19 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	adb.exe		
Frequency (MHz)	2402	2440	2480
1Mbps	Default	Default	Default
2Mbps	Default	Default	Default

2.4 SUPPORT UNITS

No.	Equipment	Model	Manufacturer	Series No
1	PC	M4500T	Thinkpad	M032004854IT

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

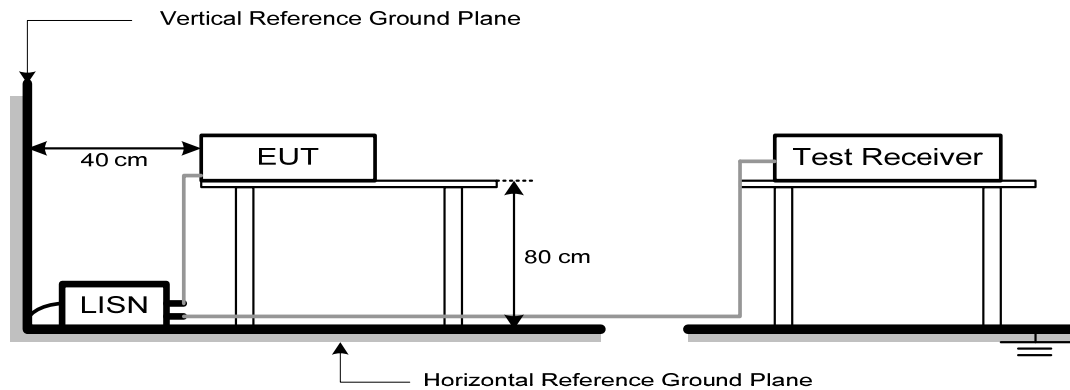

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

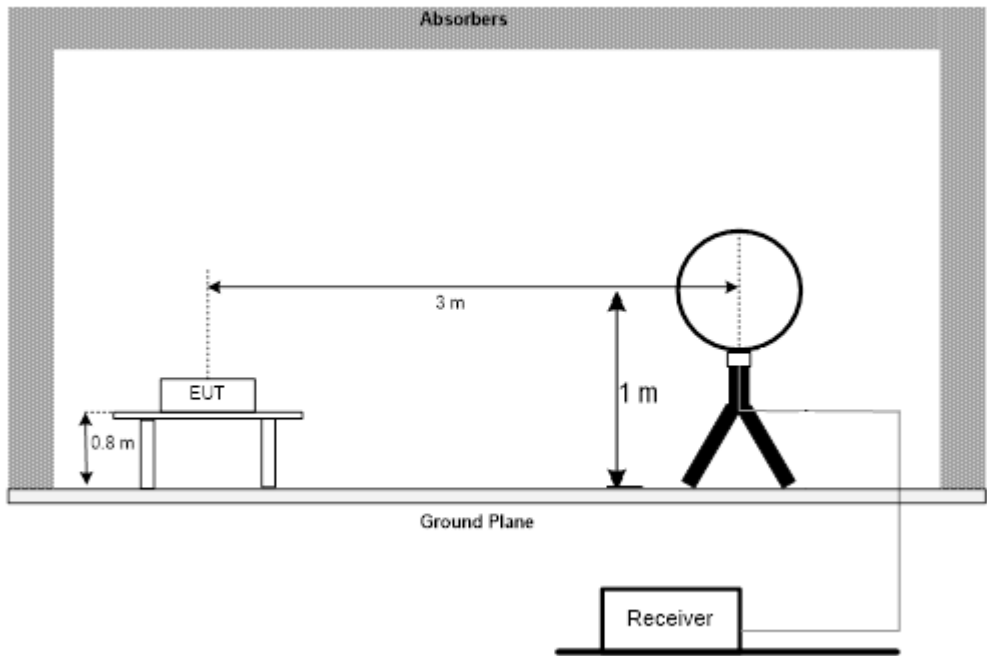

30 MHz to 1 GHz

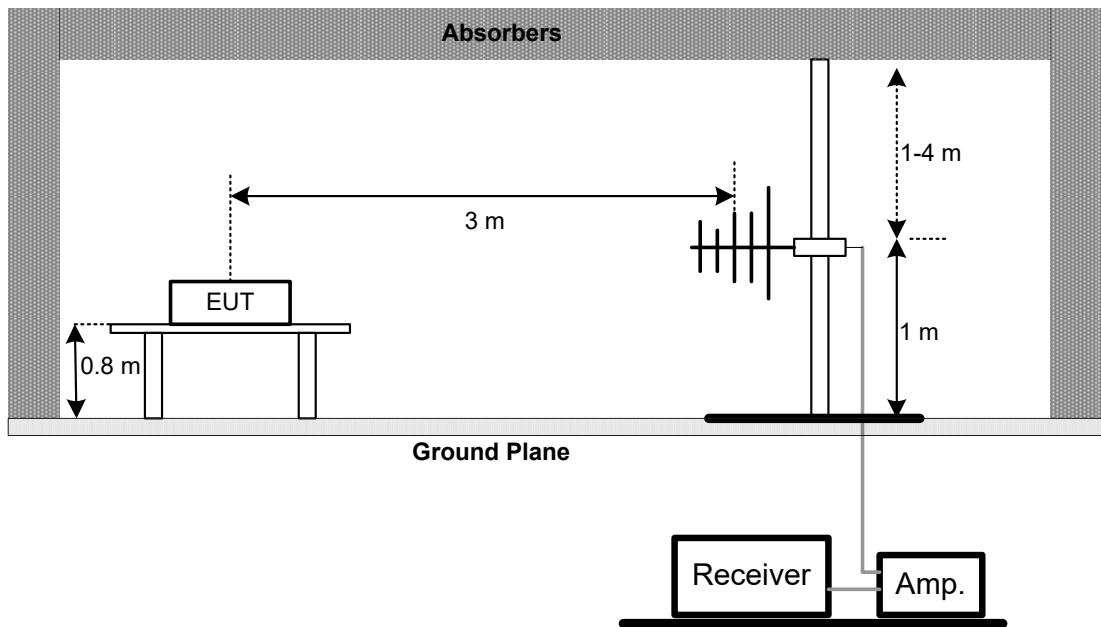

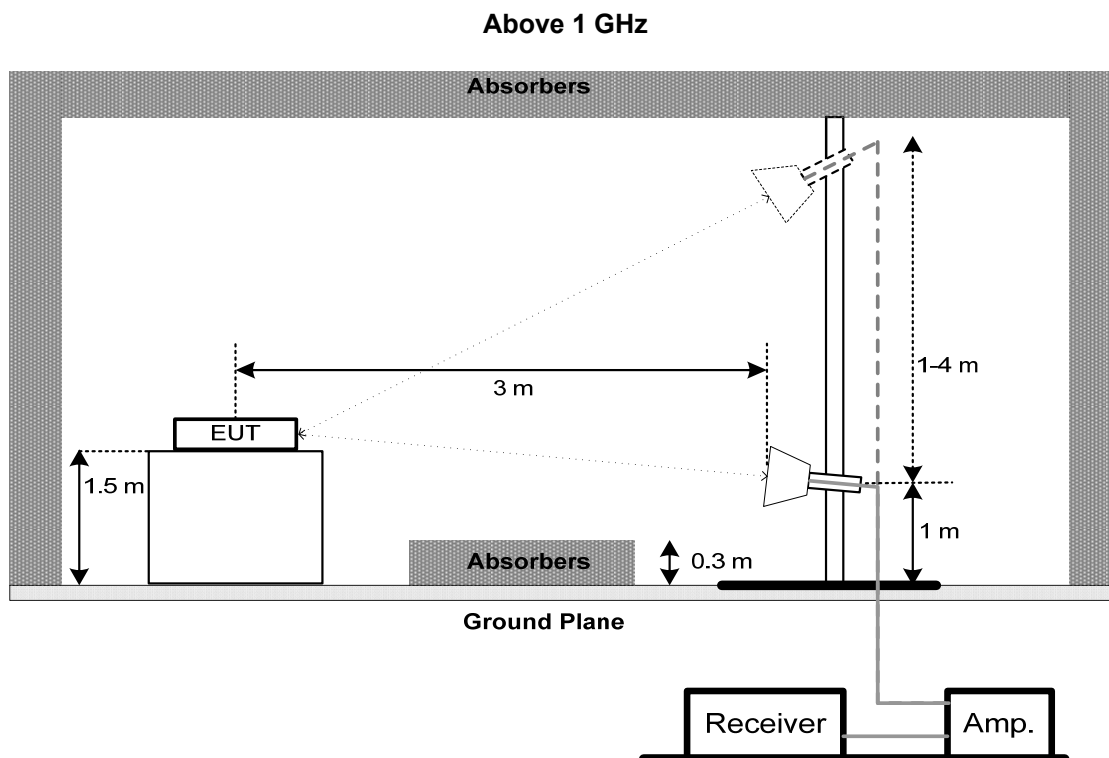

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the Tonscend test system and antenna output port as shown in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	$>$ Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	1% to 5% of the OBW
VBW	approximately three times RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

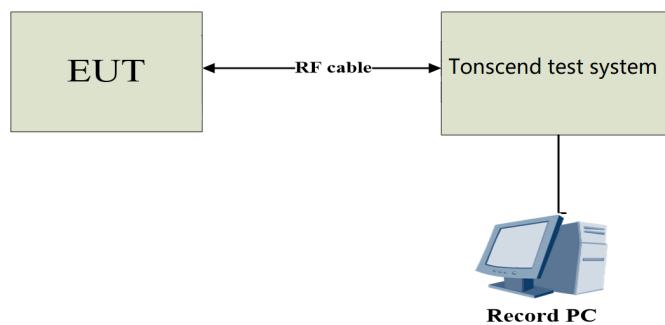

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

6.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	2 MHz
VBW	6 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

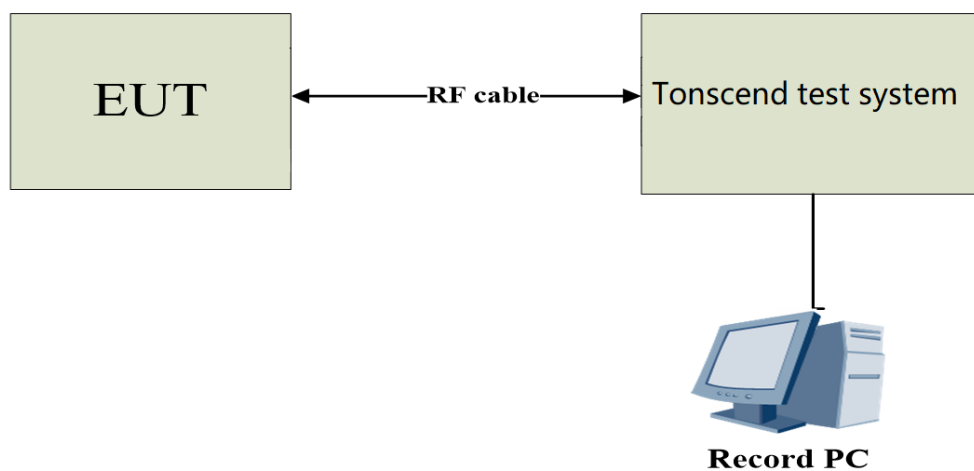

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE


- a. The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

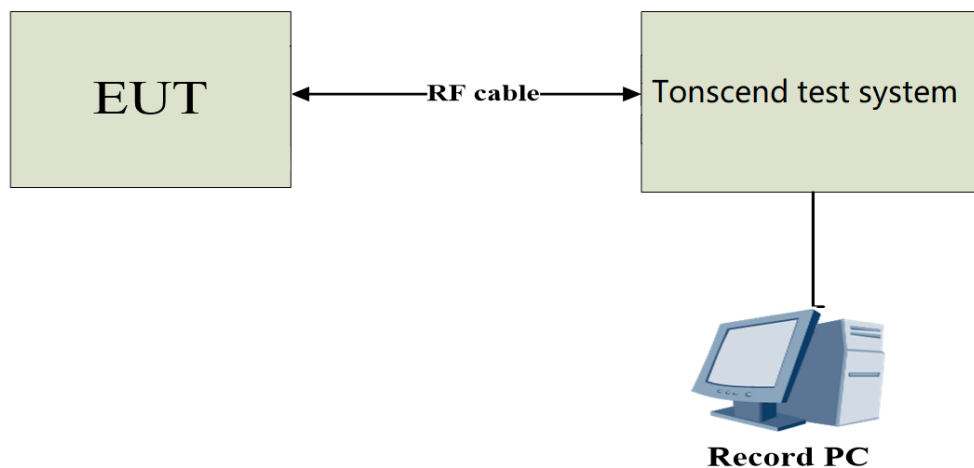

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	1.5 times DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

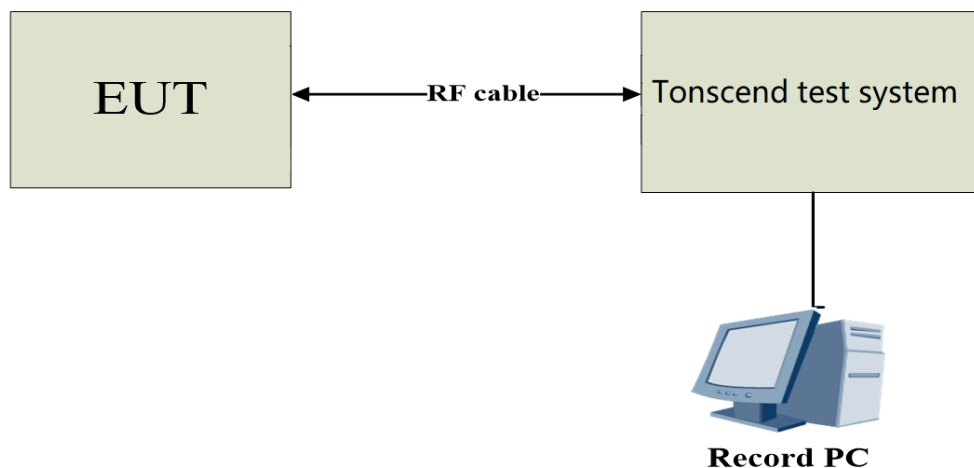

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
Radiated Emission							
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2026/2/27	2027/2/26
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2028/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2026/2/27	2027/2/26
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2026/2/27	2027/2/26
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2028/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2025/4/15	2026/4/14
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2026/2/27	2027/2/26
10	Filter	dsusoft	ZBSF6-C5170-5330-544	07227557	/	N/A	N/A
11	Filter	dsusoft	ZBSF6-C5495-5705-1309	07227558	/	N/A	N/A
12	Filter	dsusoft	ZBSF6-C5745-5830-1310	07227559	/	N/A	N/A
13	Filter	dsusoft	ZBSF6-C2400-2483.5-543	07227559	/	N/A	N/A
14	10dB attenuator	dsusoft	10dB	/	/	N/A	N/A
15	Filter	dsusoft	ZBSF6-C3000-18000-174	07227597	/	N/A	N/A
16	Filter	dsusoft	ZBSF6-C6500-18000-547	07227595	/	N/A	N/A
17	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2026/2/27	2027/2/26
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2026/2/27	2027/2/26
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2026/2/27	2027/2/26
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2026/2/27	2027/2/26
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2026/2/27	2027/2/26
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2025/4/15	2026/4/14
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Keysight	N9010A	MY51440158	JLE087	2025/9/15	2026/9/14
2	MXA Signal Analyzer	Agilent	N9020A	MY52220022	JLE090	2026/1/19	2027/1/18
3	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2026/2/27	2027/2/26
4	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2026/2/27	2027/2/26
5	VXG Signal Generator	Keysight	N5182B	MY59100855	JLE068	2025/4/15	2026/4/14
6	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	JLE052	2026/2/27	2027/2/26
7	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K50-116064-Dt	JLE054	2026/2/27	2027/2/26
8	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				

10. ANTENNA REQUIREMENT

Test standard: FCC part 15.203

According to the manufacturer declared, the EUT has one Integrated antenna, the antenna gain is 1.12dBi and the antenna connector is designed with permanent attachment.


Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_1Mbps Channel 19	Phase	Line
-----------	--------------------------	-------	------

Conducted Emission Measurement

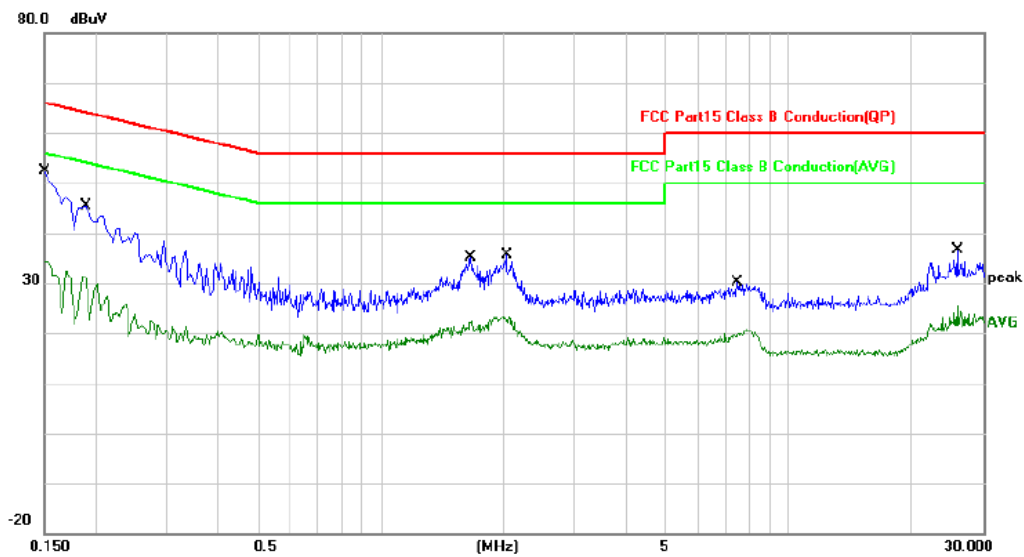


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	27.58	19.52	47.10	66.00	-18.90	QP	
2		0.1500	11.36	19.52	30.88	56.00	-25.12	AVG	
3		0.1900	21.94	19.51	41.45	64.04	-22.59	QP	
4		0.1900	7.23	19.51	26.74	54.04	-27.30	AVG	
5		1.6700	9.41	19.62	29.03	56.00	-26.97	QP	
6		1.6700	1.46	19.62	21.08	46.00	-24.92	AVG	
7		2.0340	8.88	19.66	28.54	56.00	-27.46	QP	
8		2.0340	2.60	19.66	22.26	46.00	-23.74	AVG	
9		7.5020	3.15	20.09	23.24	60.00	-36.76	QP	
10		7.5020	-1.63	20.09	18.46	50.00	-31.54	AVG	
11		25.9100	9.01	21.07	30.08	60.00	-29.92	QP	
12		25.9100	5.32	21.07	26.39	50.00	-23.61	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 19	Phase	Neutral
-----------	--------------------------	-------	---------

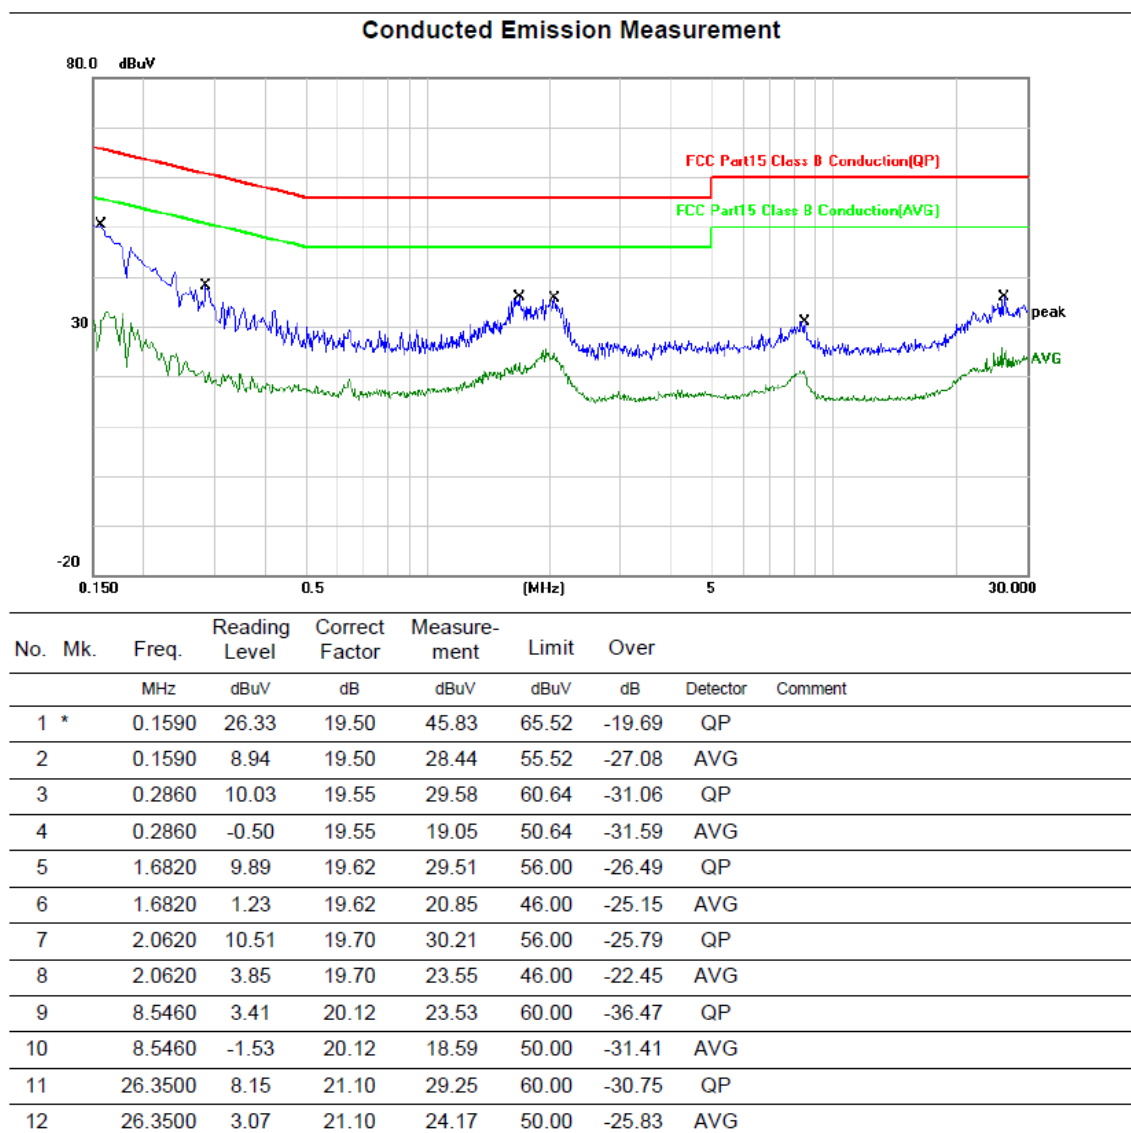


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

For Rigel3 Plus


Test Mode	TX Mode_1Mbps Channel 19	Phase	Line
-----------	--------------------------	-------	------

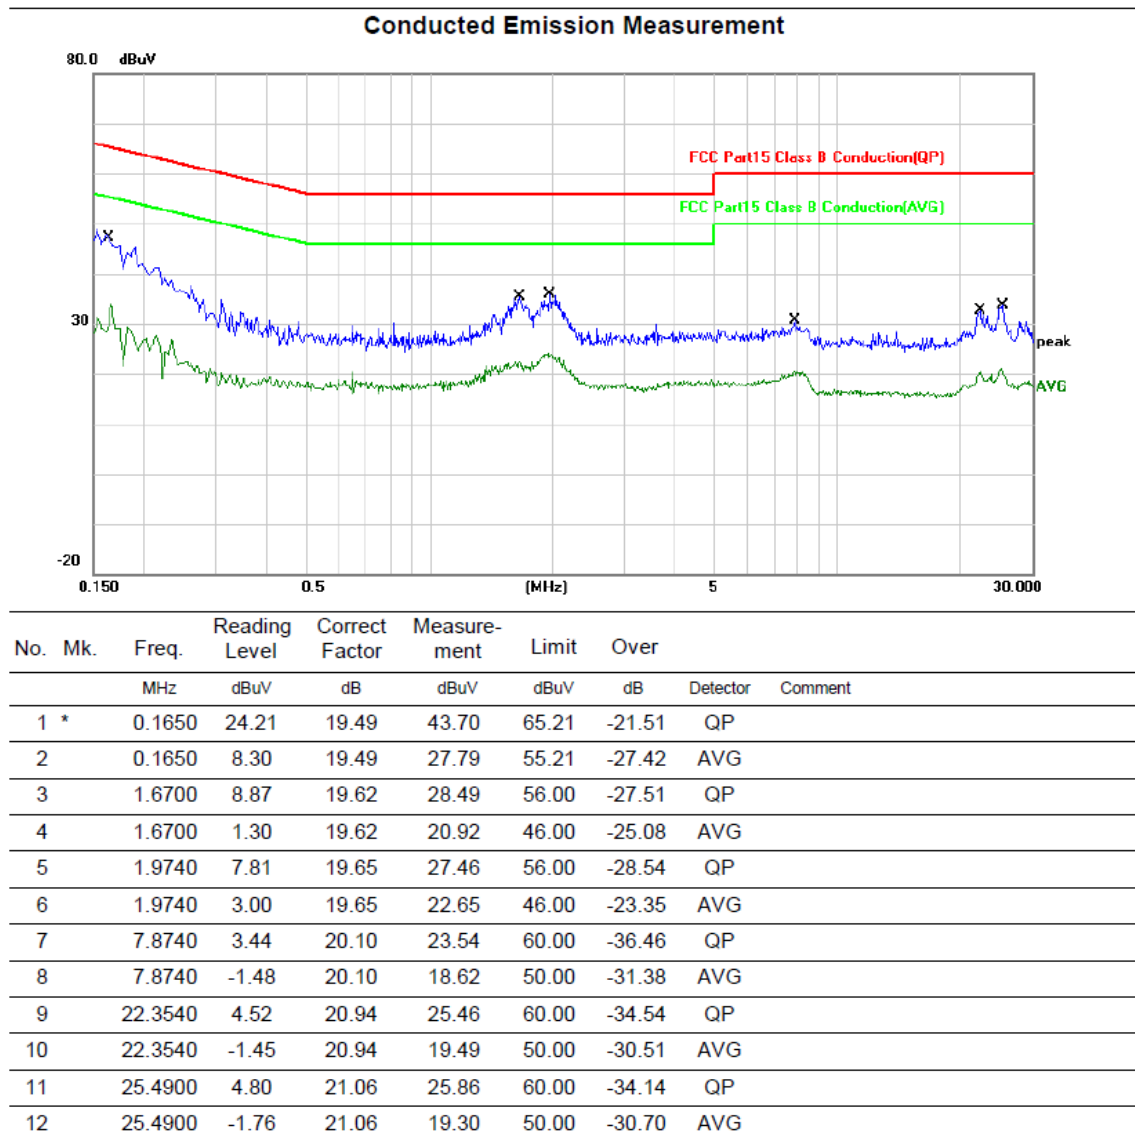

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 19	Phase	Neutral
-----------	--------------------------	-------	---------

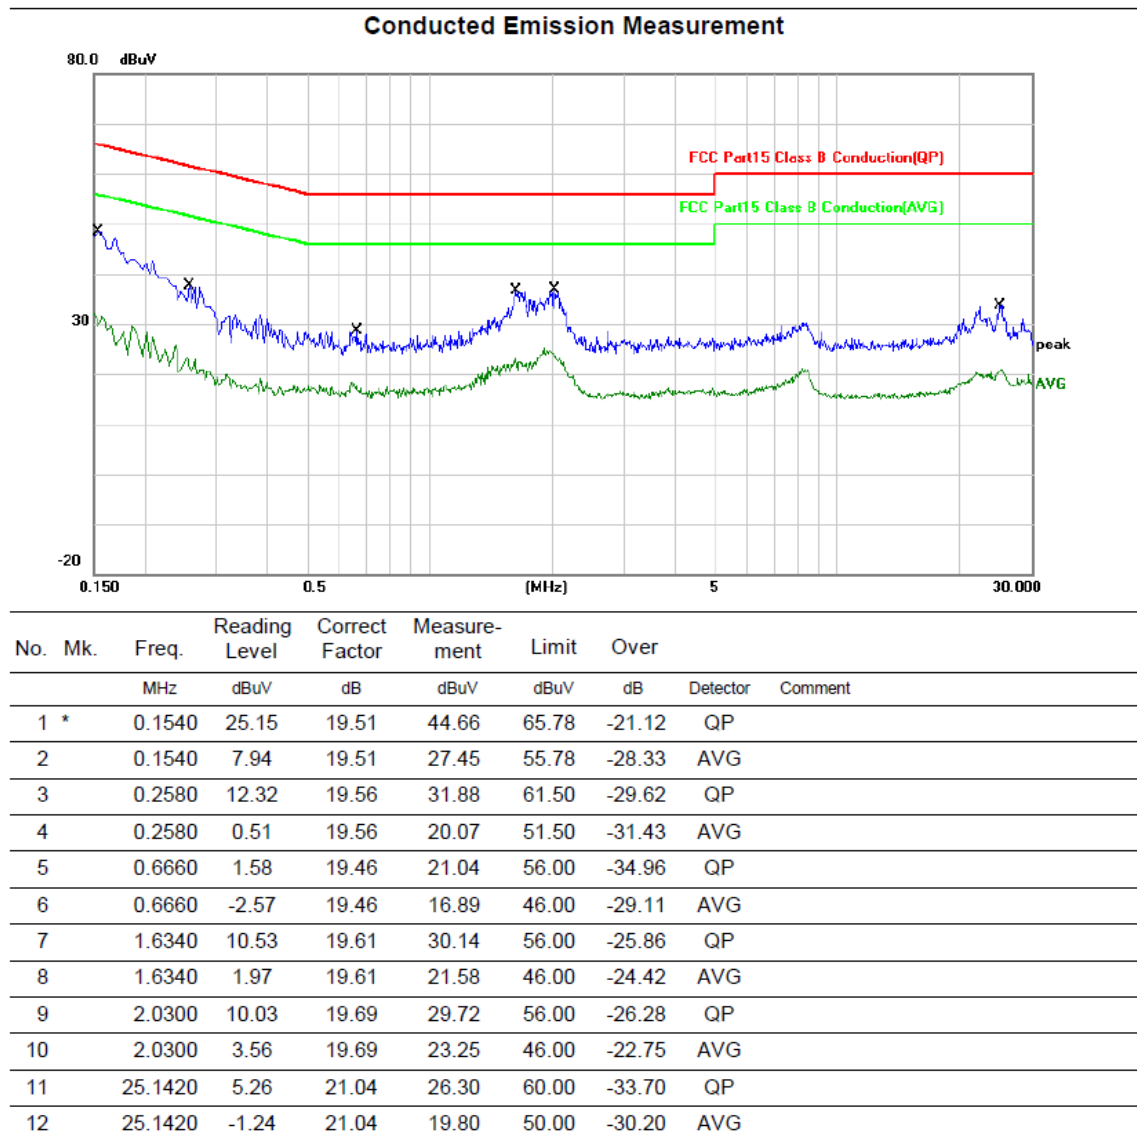

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Radiated emission: 9KHz-30MHz


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

For Rigel3 Pro

Test Mode	TX Mode_1Mbps Channel 19	Polarization	Vertical
-----------	--------------------------	--------------	----------

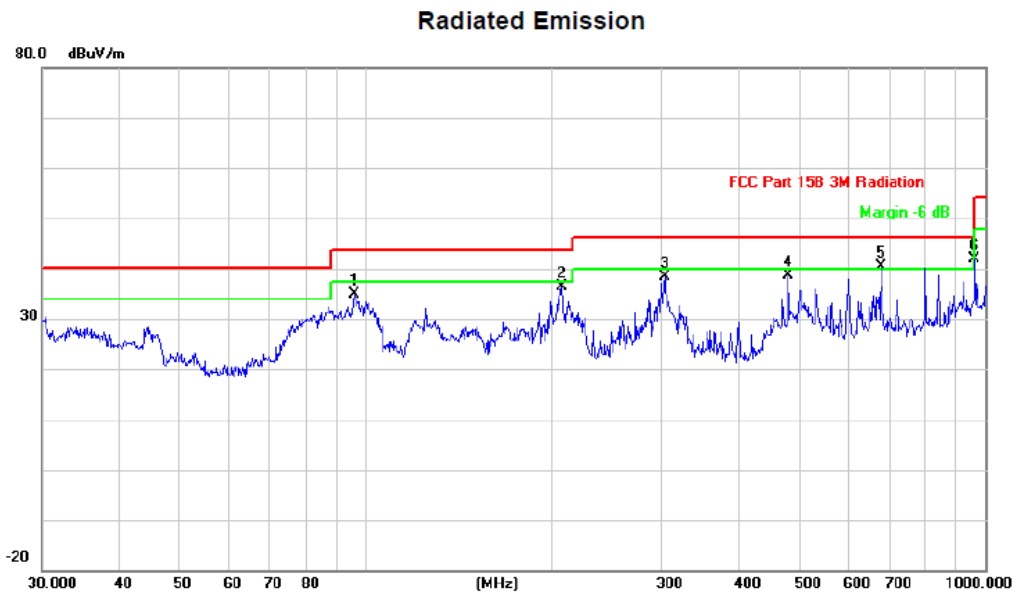


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1		95.7622	49.29	-14.38	34.91	43.50	-8.59
2		207.1225	48.94	-12.63	36.31	43.50	-7.19
3		303.5437	48.08	-9.63	38.45	46.00	-7.55
4		480.5276	45.10	-6.48	38.62	46.00	-7.38
5	*	679.9600	42.54	-2.18	40.36	46.00	-5.64
6		962.1621	39.58	2.25	41.83	54.00	-12.17

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 19	Polarization	Horizontal
-----------	--------------------------	--------------	------------

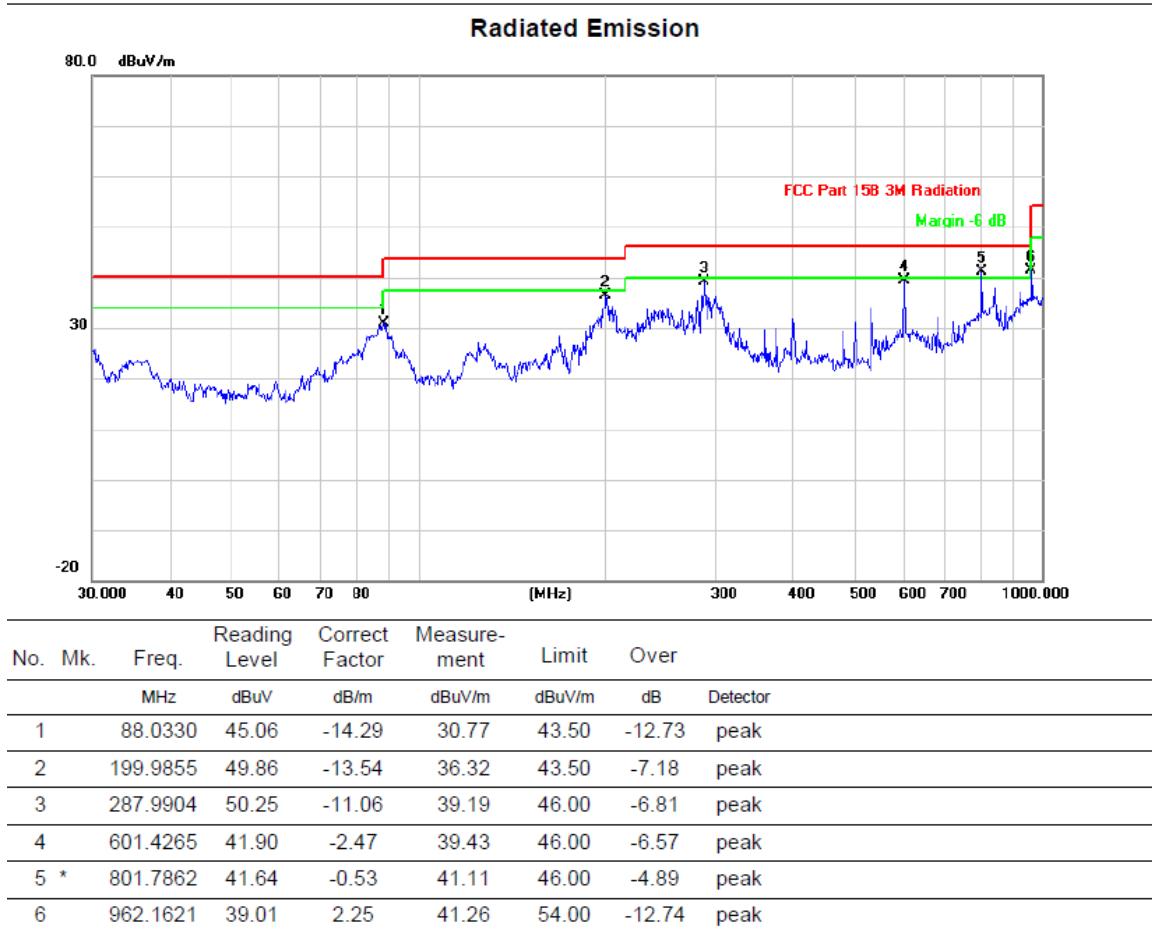


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

For Rigel3 Plus

Test Mode	TX Mode_1Mbps Channel 19	Polarization	Vertical
-----------	--------------------------	--------------	----------

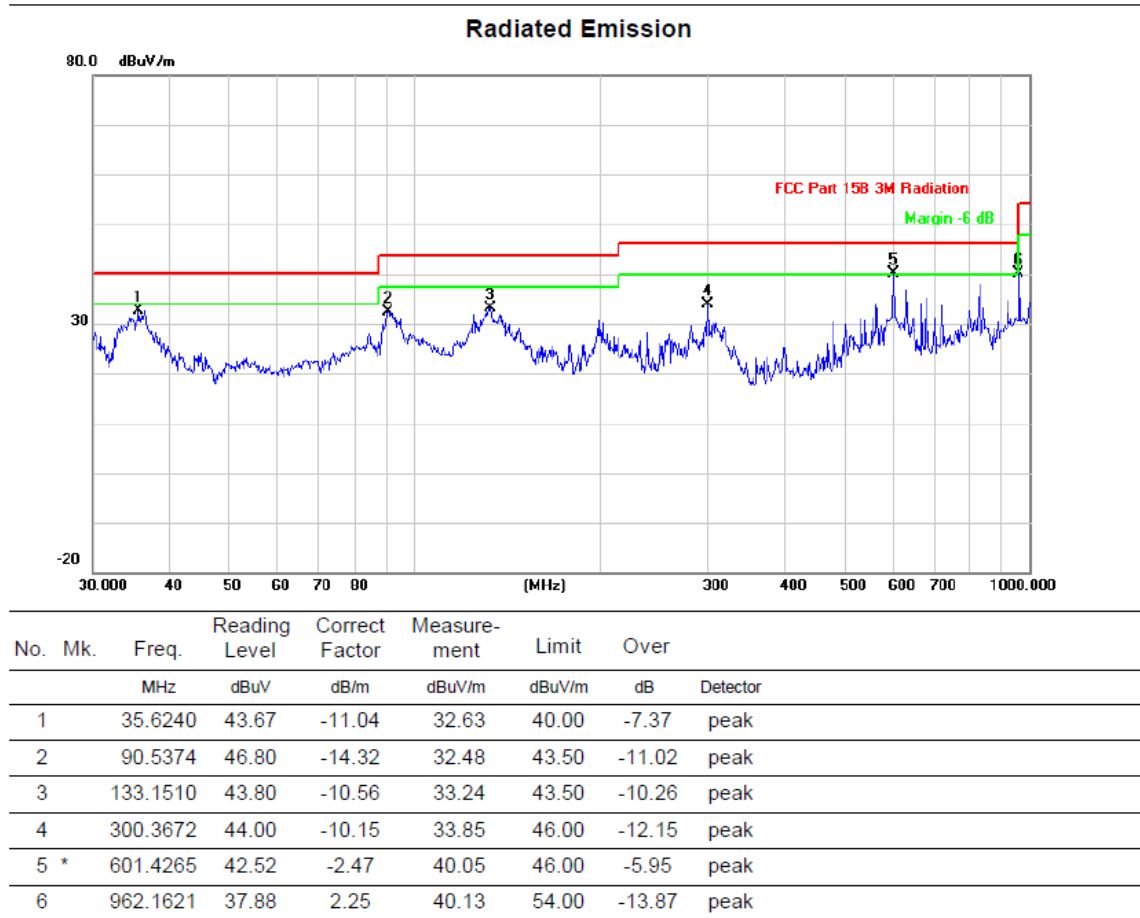


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 19	Polarization	Horizontal
-----------	--------------------------	--------------	------------

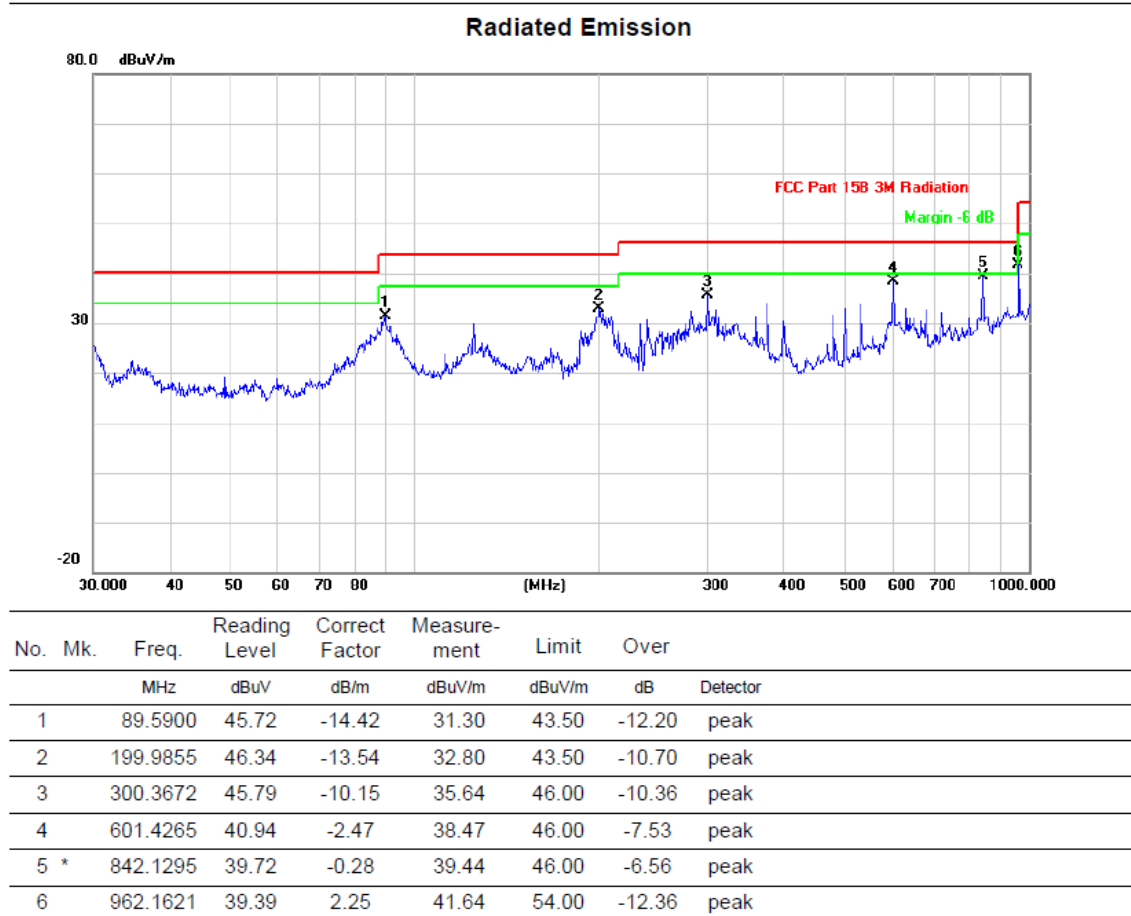


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ


Test Mode	TX 2402 MHz_1Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

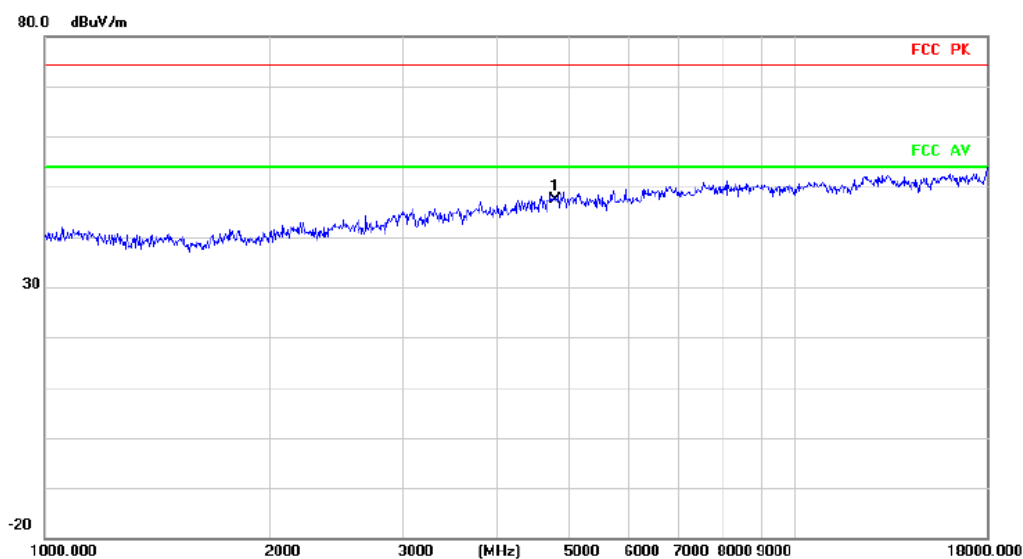

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4804.000	50.88	-3.46	47.42	74.00	-26.58	peak		


Radiated Emission

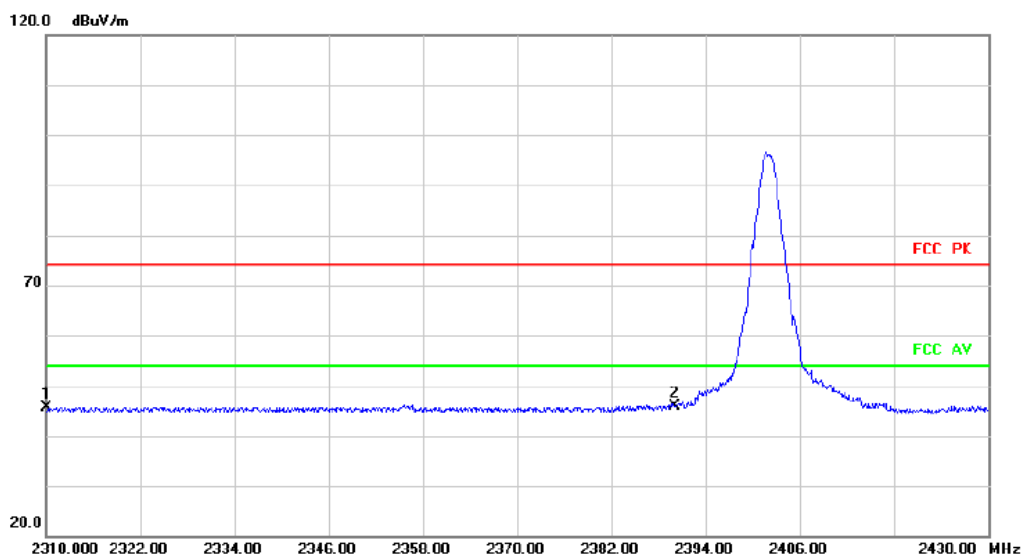

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	58.25	-12.53	45.72	74.00	-28.28	peak		
2	*	2390.000	58.21	-12.27	45.94	74.00	-28.06	peak		


Test Mode	TX 2402 MHz_1Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

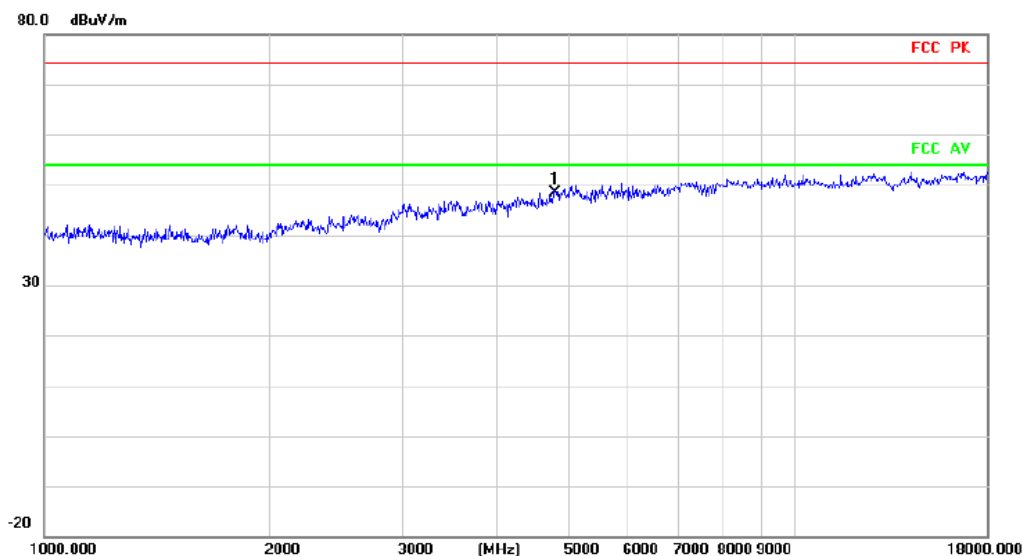


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4804.000	51.72	-3.46	48.26	74.00	-25.74	peak			

Radiated Emission

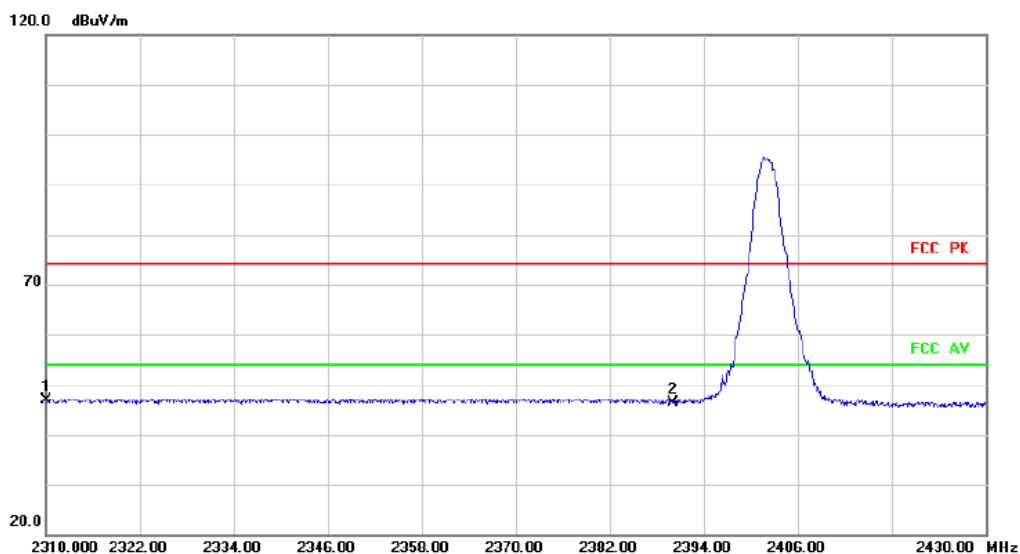


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2310.000	59.31	-12.53	46.78	74.00	-27.22	peak			
2		2390.000	58.61	-12.27	46.34	74.00	-27.66	peak			

Test Mode	TX 2440 MHz_1Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

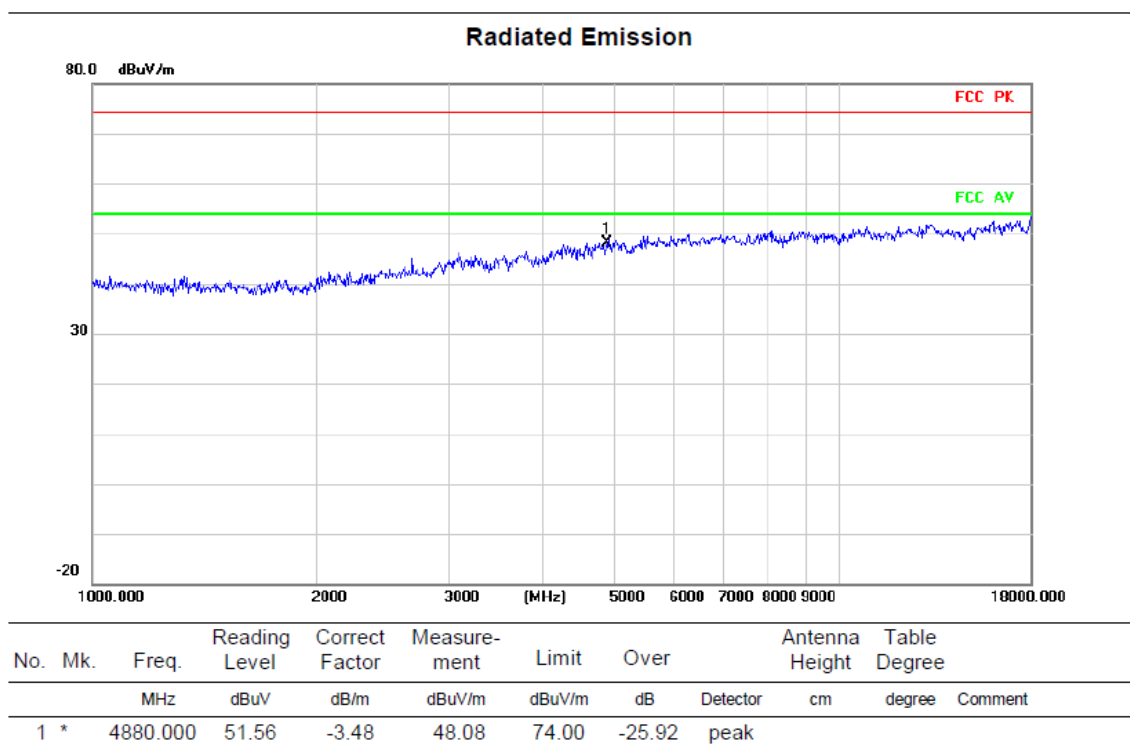


Test Mode	TX 2440 MHz_1Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

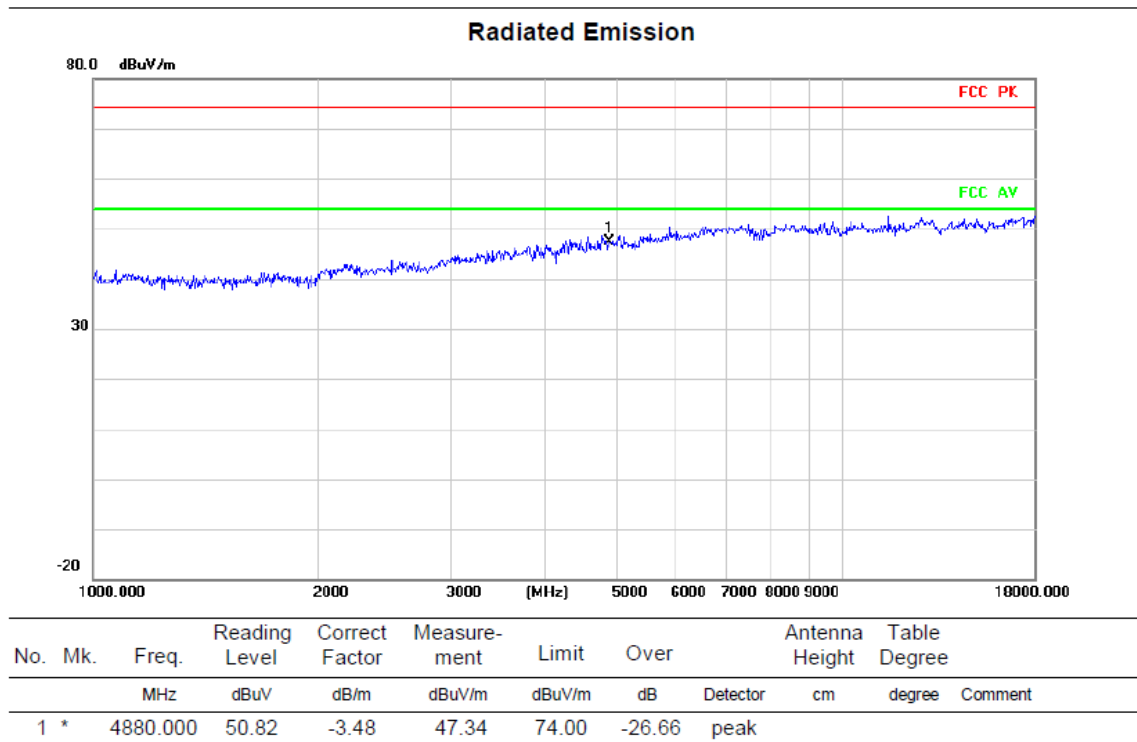


Test Mode	TX 2480 MHz_1Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

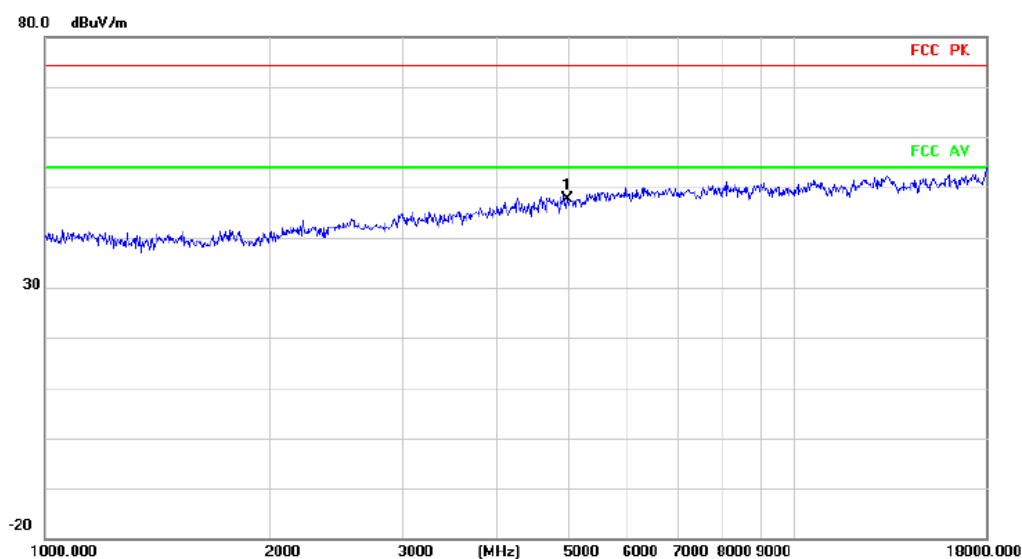

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4960.000	51.15	-3.41	47.74	74.00	-26.26	peak		


Radiated Emission

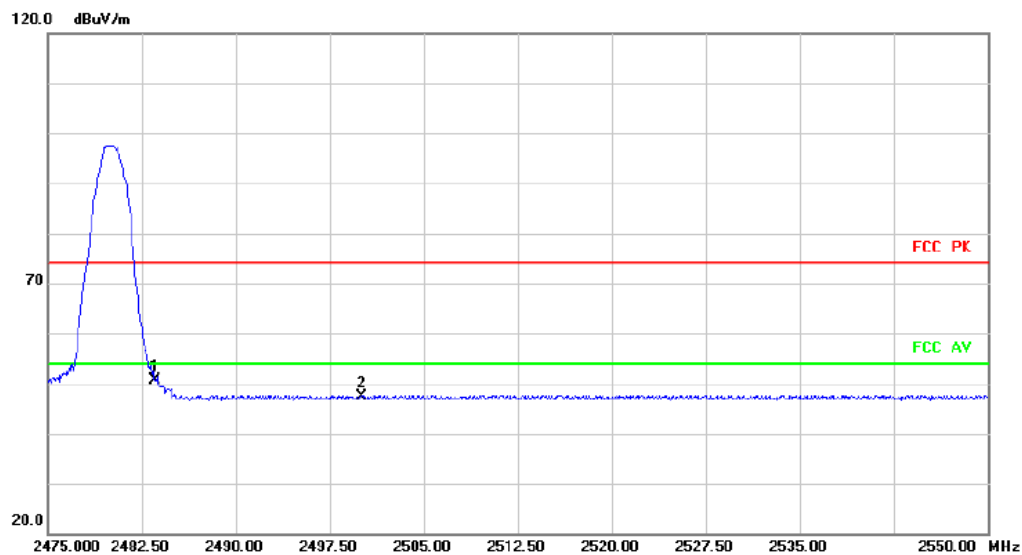

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	62.09	-11.38	50.71	74.00	-23.29	peak		
2		2500.000	58.57	-11.17	47.40	74.00	-26.60	peak		


Test Mode	TX 2480 MHz_1Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

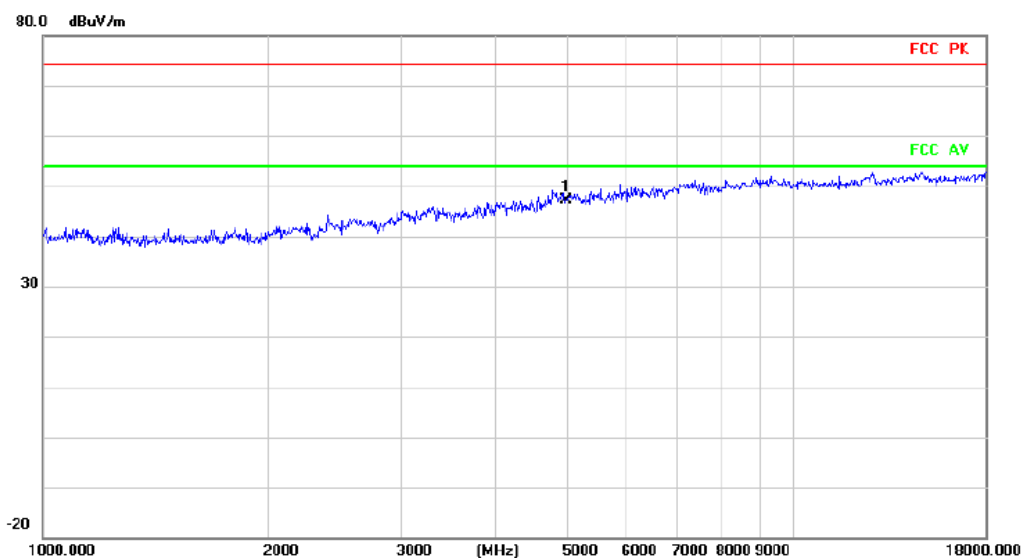

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4960.000	50.56	-3.41	47.15	74.00	-26.85	peak		


Radiated Emission

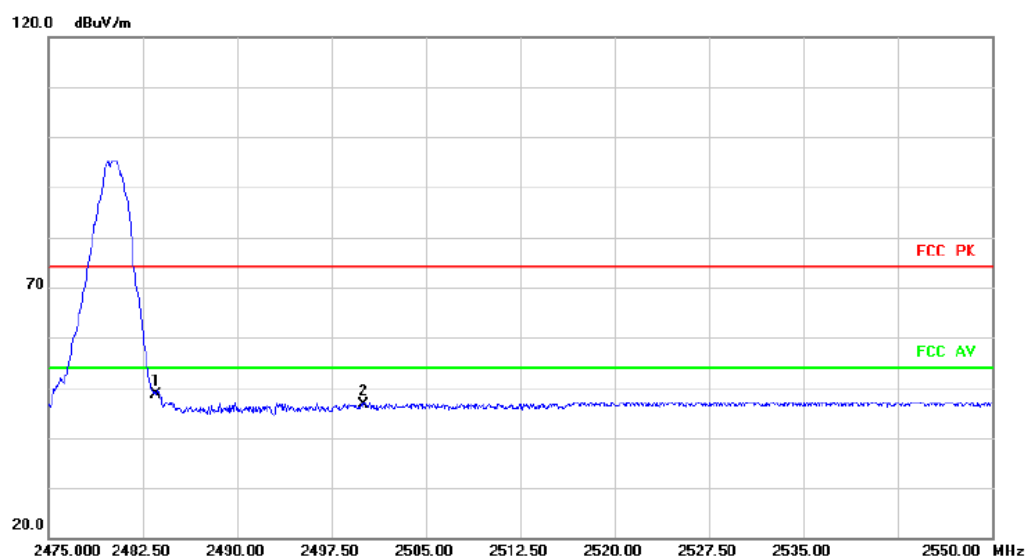

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.500	60.00	-11.38	48.62	74.00	-25.38	peak		
2		2500.000	57.92	-11.17	46.75	74.00	-27.25	peak		


Test Mode	TX 2402 MHz_2Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

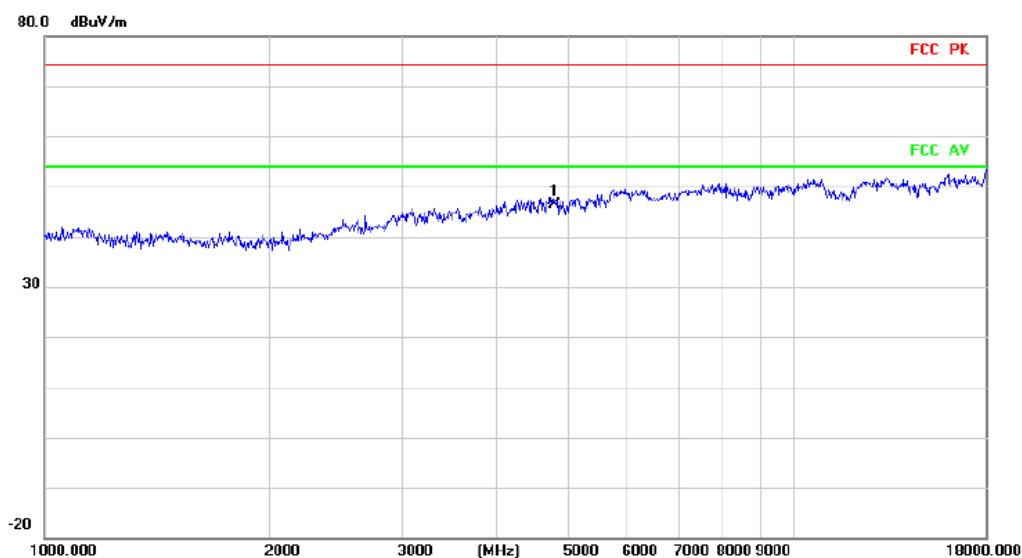

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4804.000	49.88	-3.46	46.42	74.00	-27.58	peak		


Radiated Emission

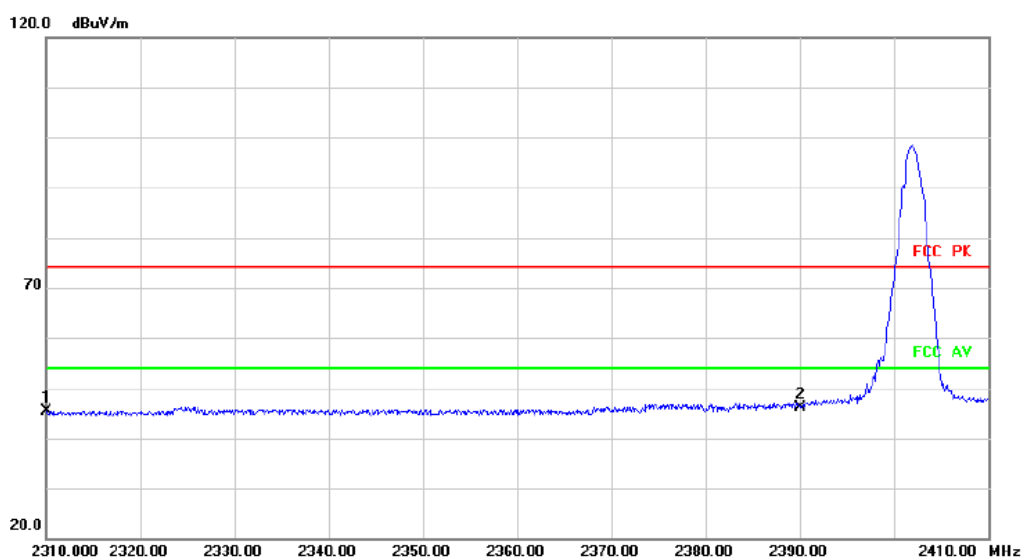

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	57.84	-12.53	45.31	74.00	-28.69	peak		
2	*	2390.000	58.48	-12.27	46.21	74.00	-27.79	peak		


Test Mode	TX 2402 MHz_2Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

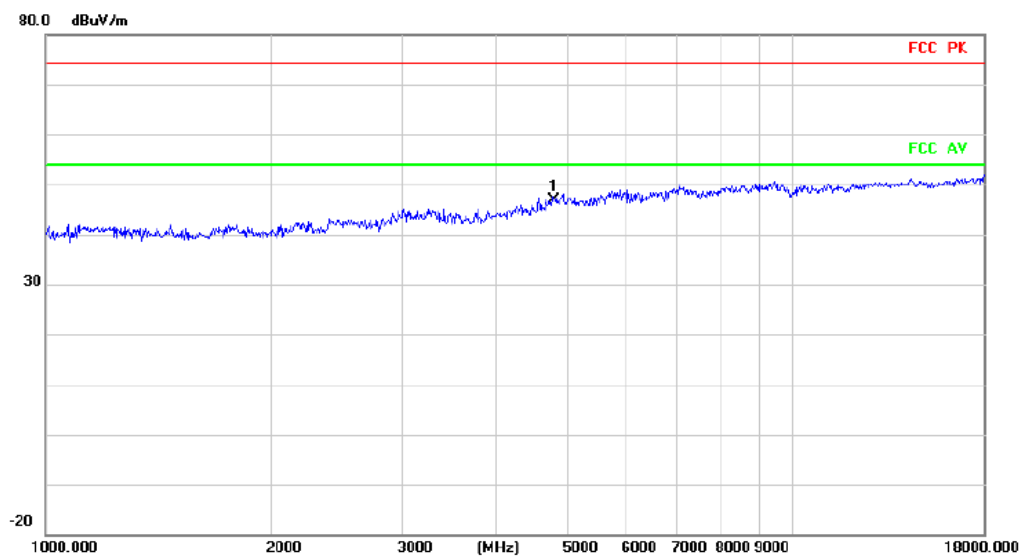


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4804.000	50.22	-3.46	46.76	74.00	-27.24	peak			

Radiated Emission

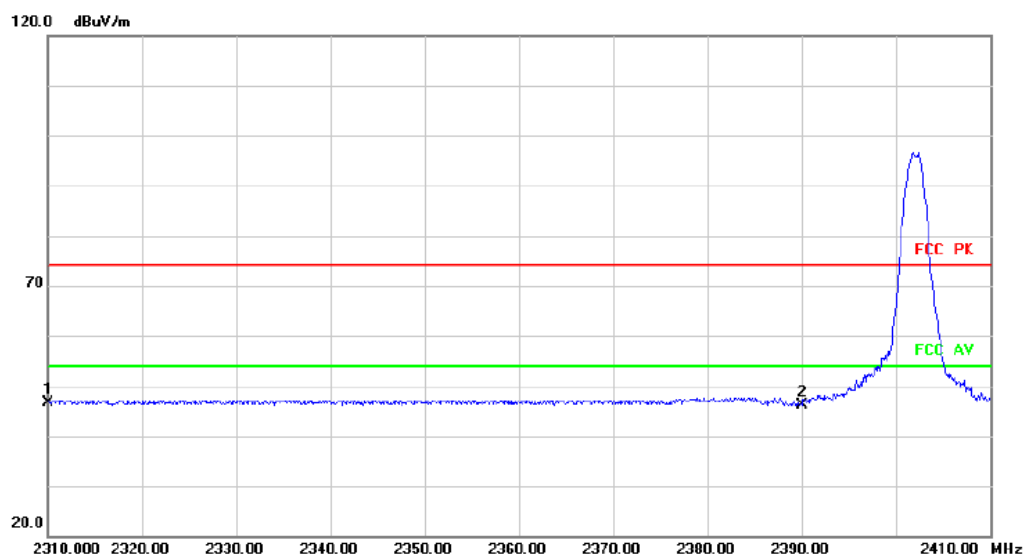


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2310.000	59.16	-12.53	46.63	74.00	-27.37	peak			
2		2390.000	58.32	-12.27	46.05	74.00	-27.95	peak			

Test Mode	TX 2440 MHz_2Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

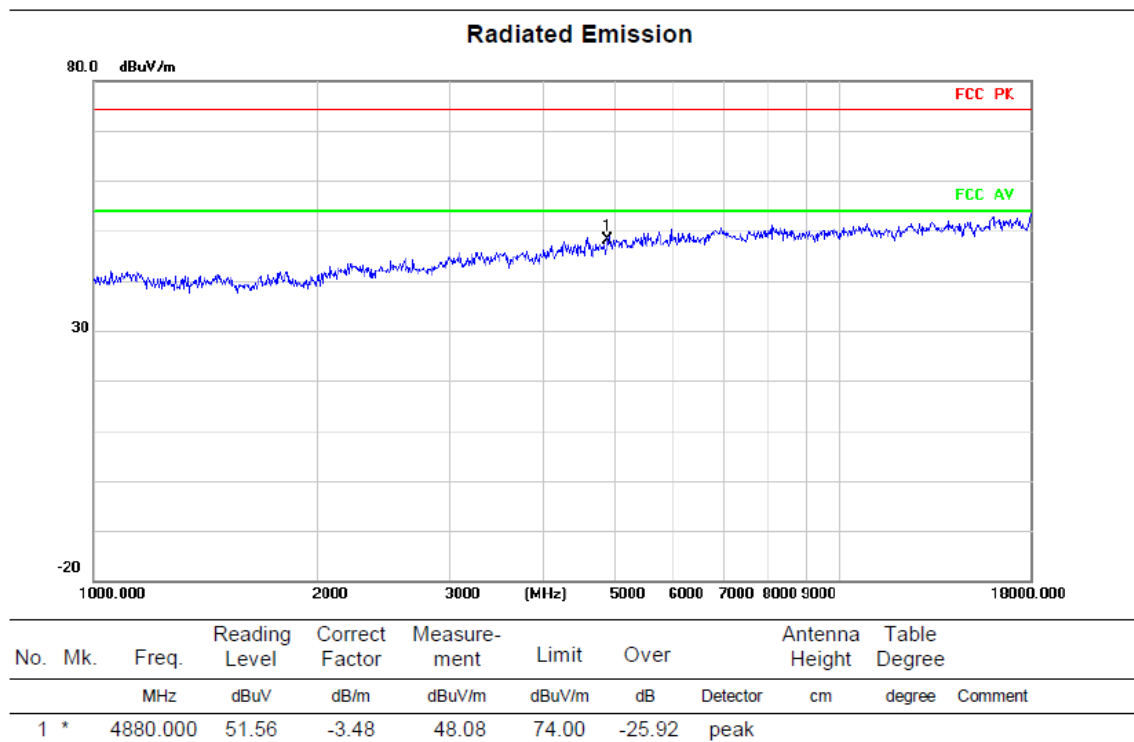


Test Mode	TX 2440 MHz_2Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

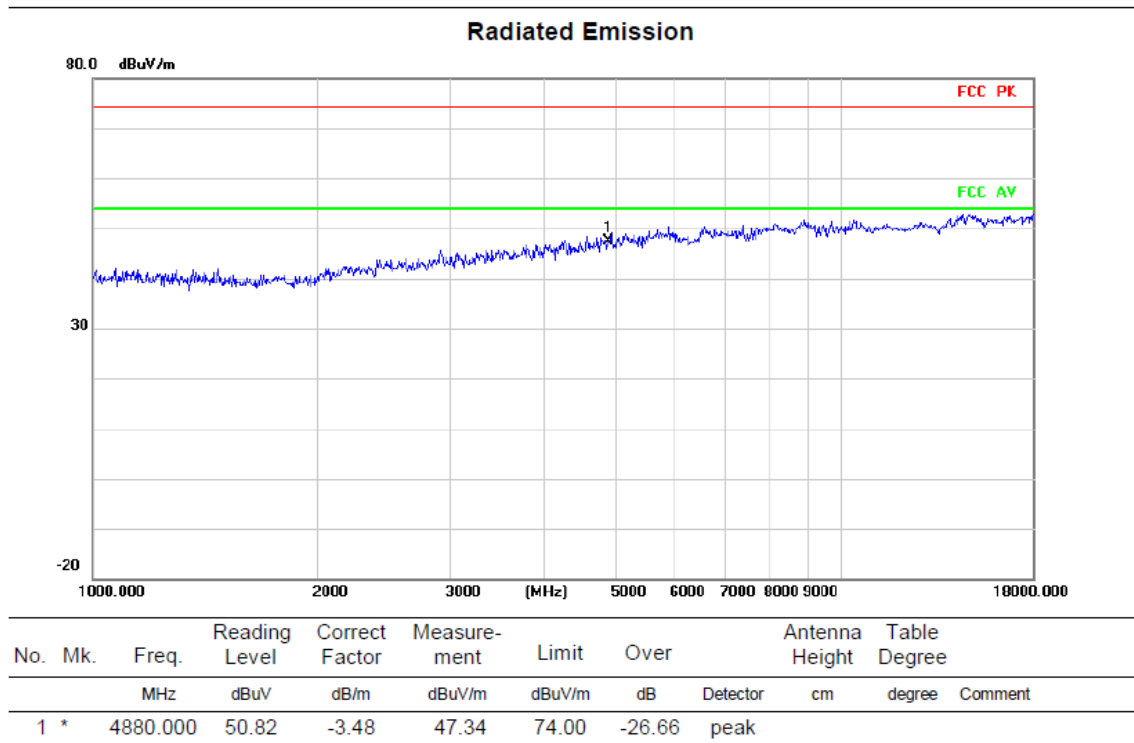


Test Mode	TX 2480 MHz_2Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

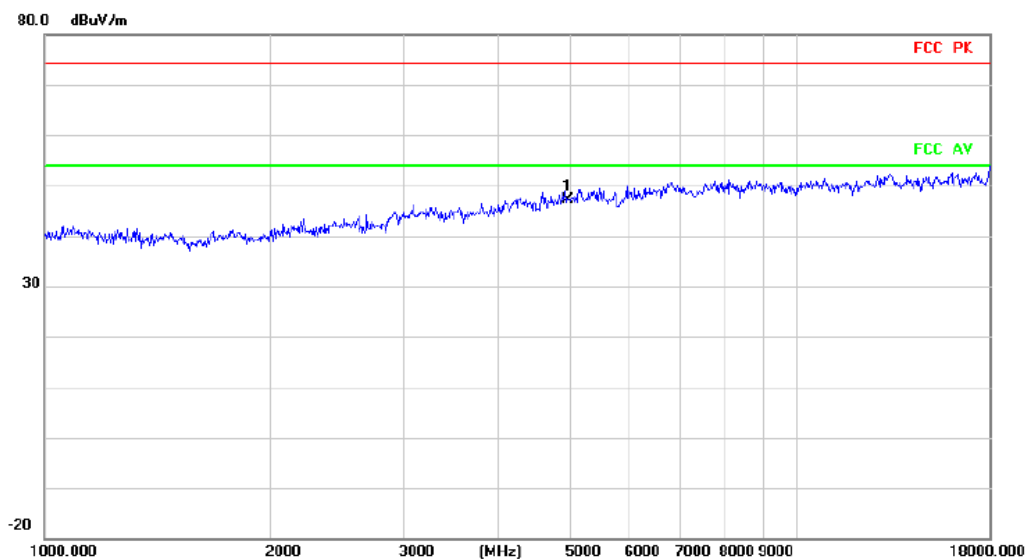



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4960.000	50.65	-3.41	47.24	74.00	-26.76	peak		

Radiated Emission

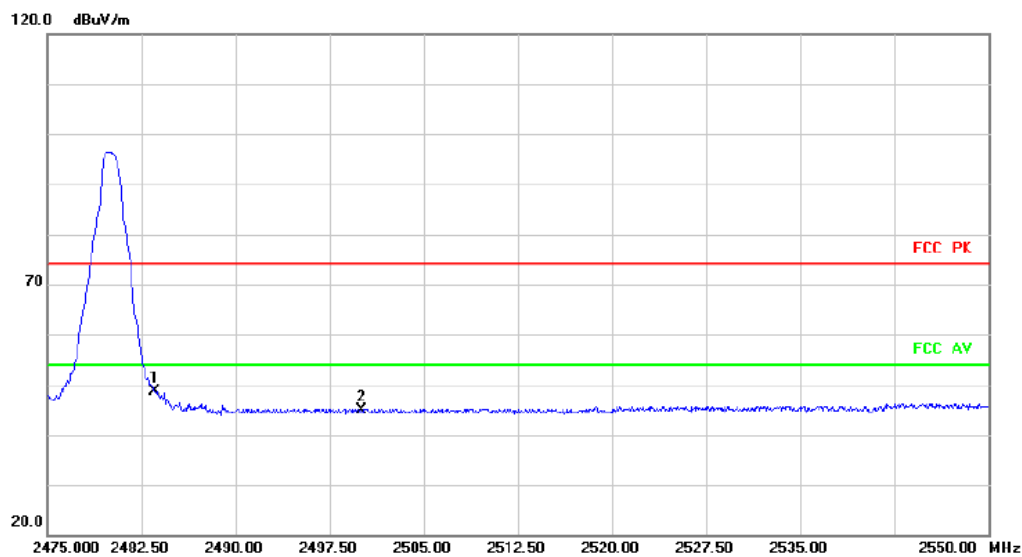

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	59.96	-11.38	48.58	74.00	-25.42	peak		
2		2500.000	56.03	-11.17	44.86	74.00	-29.14	peak		

Test Mode	TX 2480 MHz_2Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

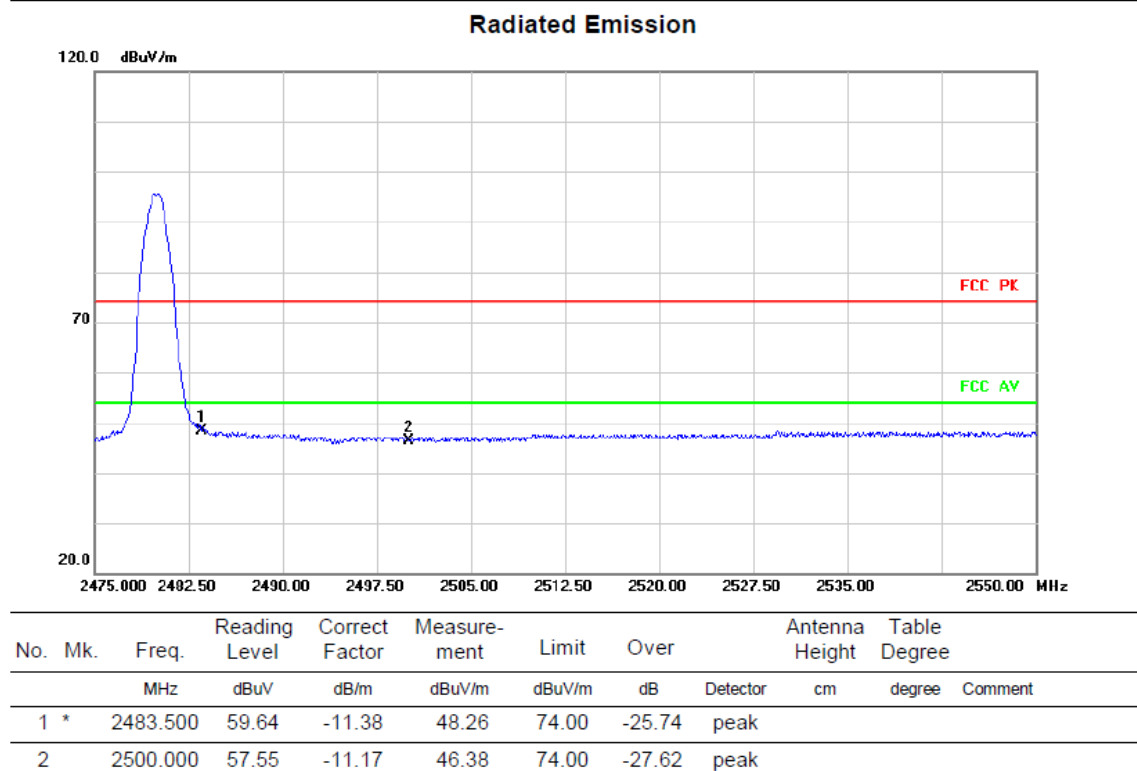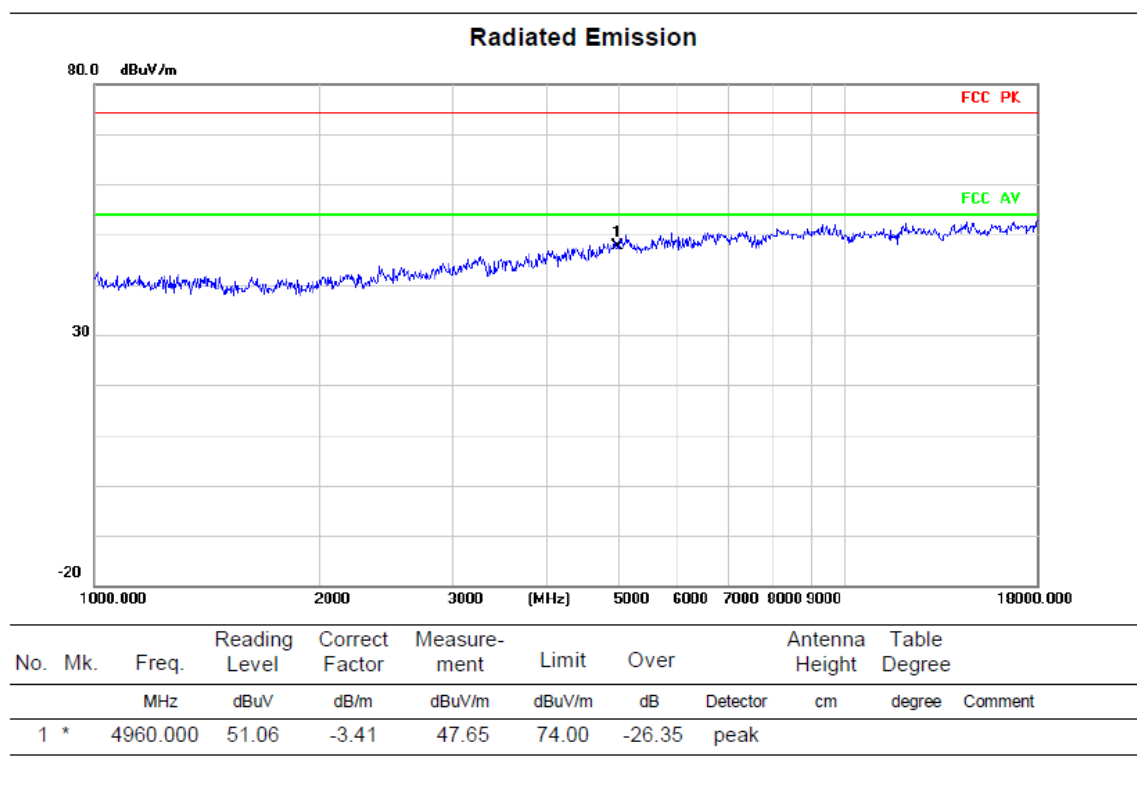

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

DTS Bandwidth


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.688	2401.656	2402.344	0.5	PASS
BLE_1M	Ant1	2440	0.700	2439.644	2440.344	0.5	PASS
BLE_1M	Ant1	2480	0.720	2479.628	2480.348	0.5	PASS
BLE_2M	Ant1	2402	1.256	2401.332	2402.588	0.5	PASS
BLE_2M	Ant1	2440	1.156	2439.420	2440.576	0.5	PASS
BLE_2M	Ant1	2480	1.136	2479.420	2480.556	0.5	PASS

Test Graphs


BLE 1M Ant1 2402

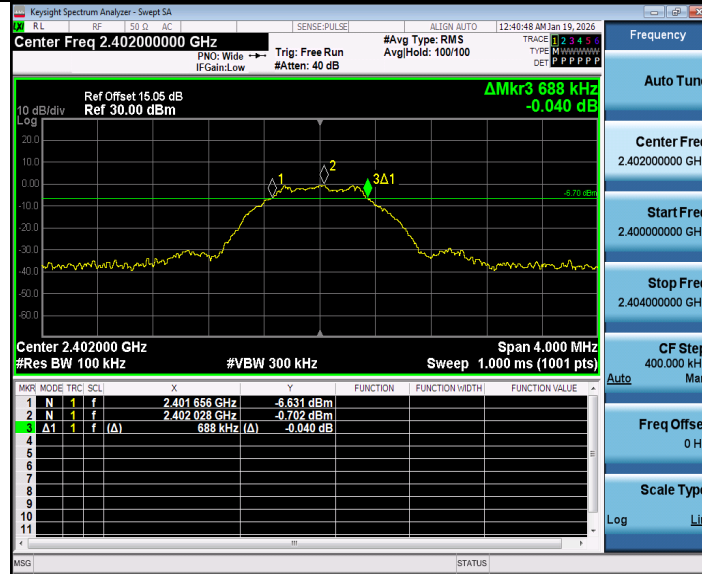

BLE 1M Ant1 2440

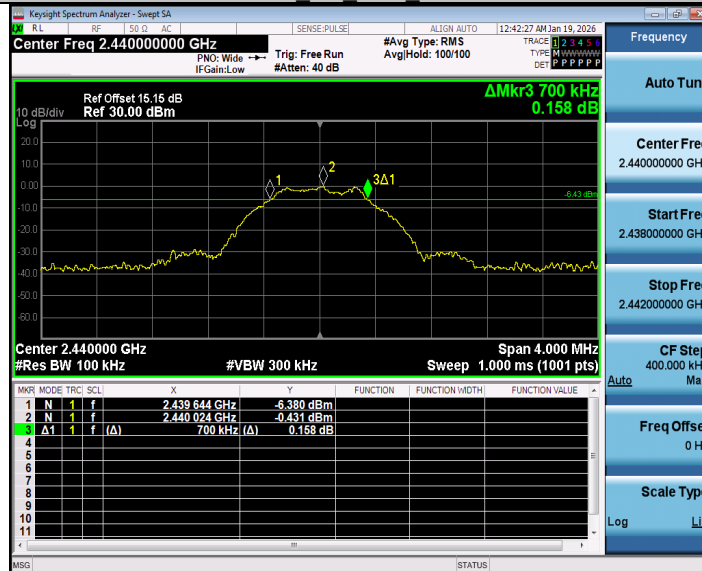

BLE 1M Ant1 2480

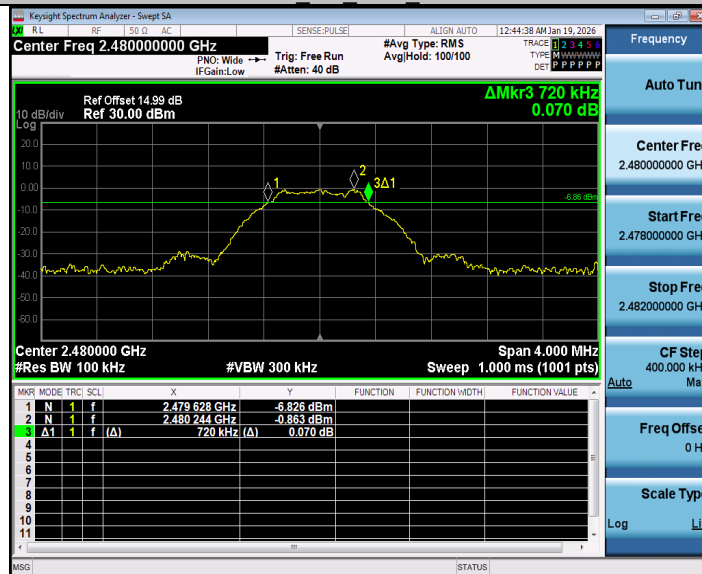

BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480



Occupied Channel Bandwidth

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0476	2401.4852	2402.5328	---	---
BLE_1M	Ant1	2440	1.0503	2439.4805	2440.5308	---	---
BLE_1M	Ant1	2480	1.0435	2479.4822	2480.5257	---	---
BLE_2M	Ant1	2402	2.0766	2400.9753	2403.0519	---	---
BLE_2M	Ant1	2440	2.0841	2438.9701	2441.0542	---	---
BLE_2M	Ant1	2480	2.0835	2478.9790	2481.0625	---	---

Test Graphs





BLE 2M Ant1 2440




BLE 2M Ant1 2480



APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0.54	≤30	PASS
		2440	0.72	≤30	PASS
		2480	0.56	≤30	PASS
BLE_2M	Ant1	2402	0.54	≤30	PASS
		2440	0.69	≤30	PASS
		2480	0.66	≤30	PASS

Test Graphs

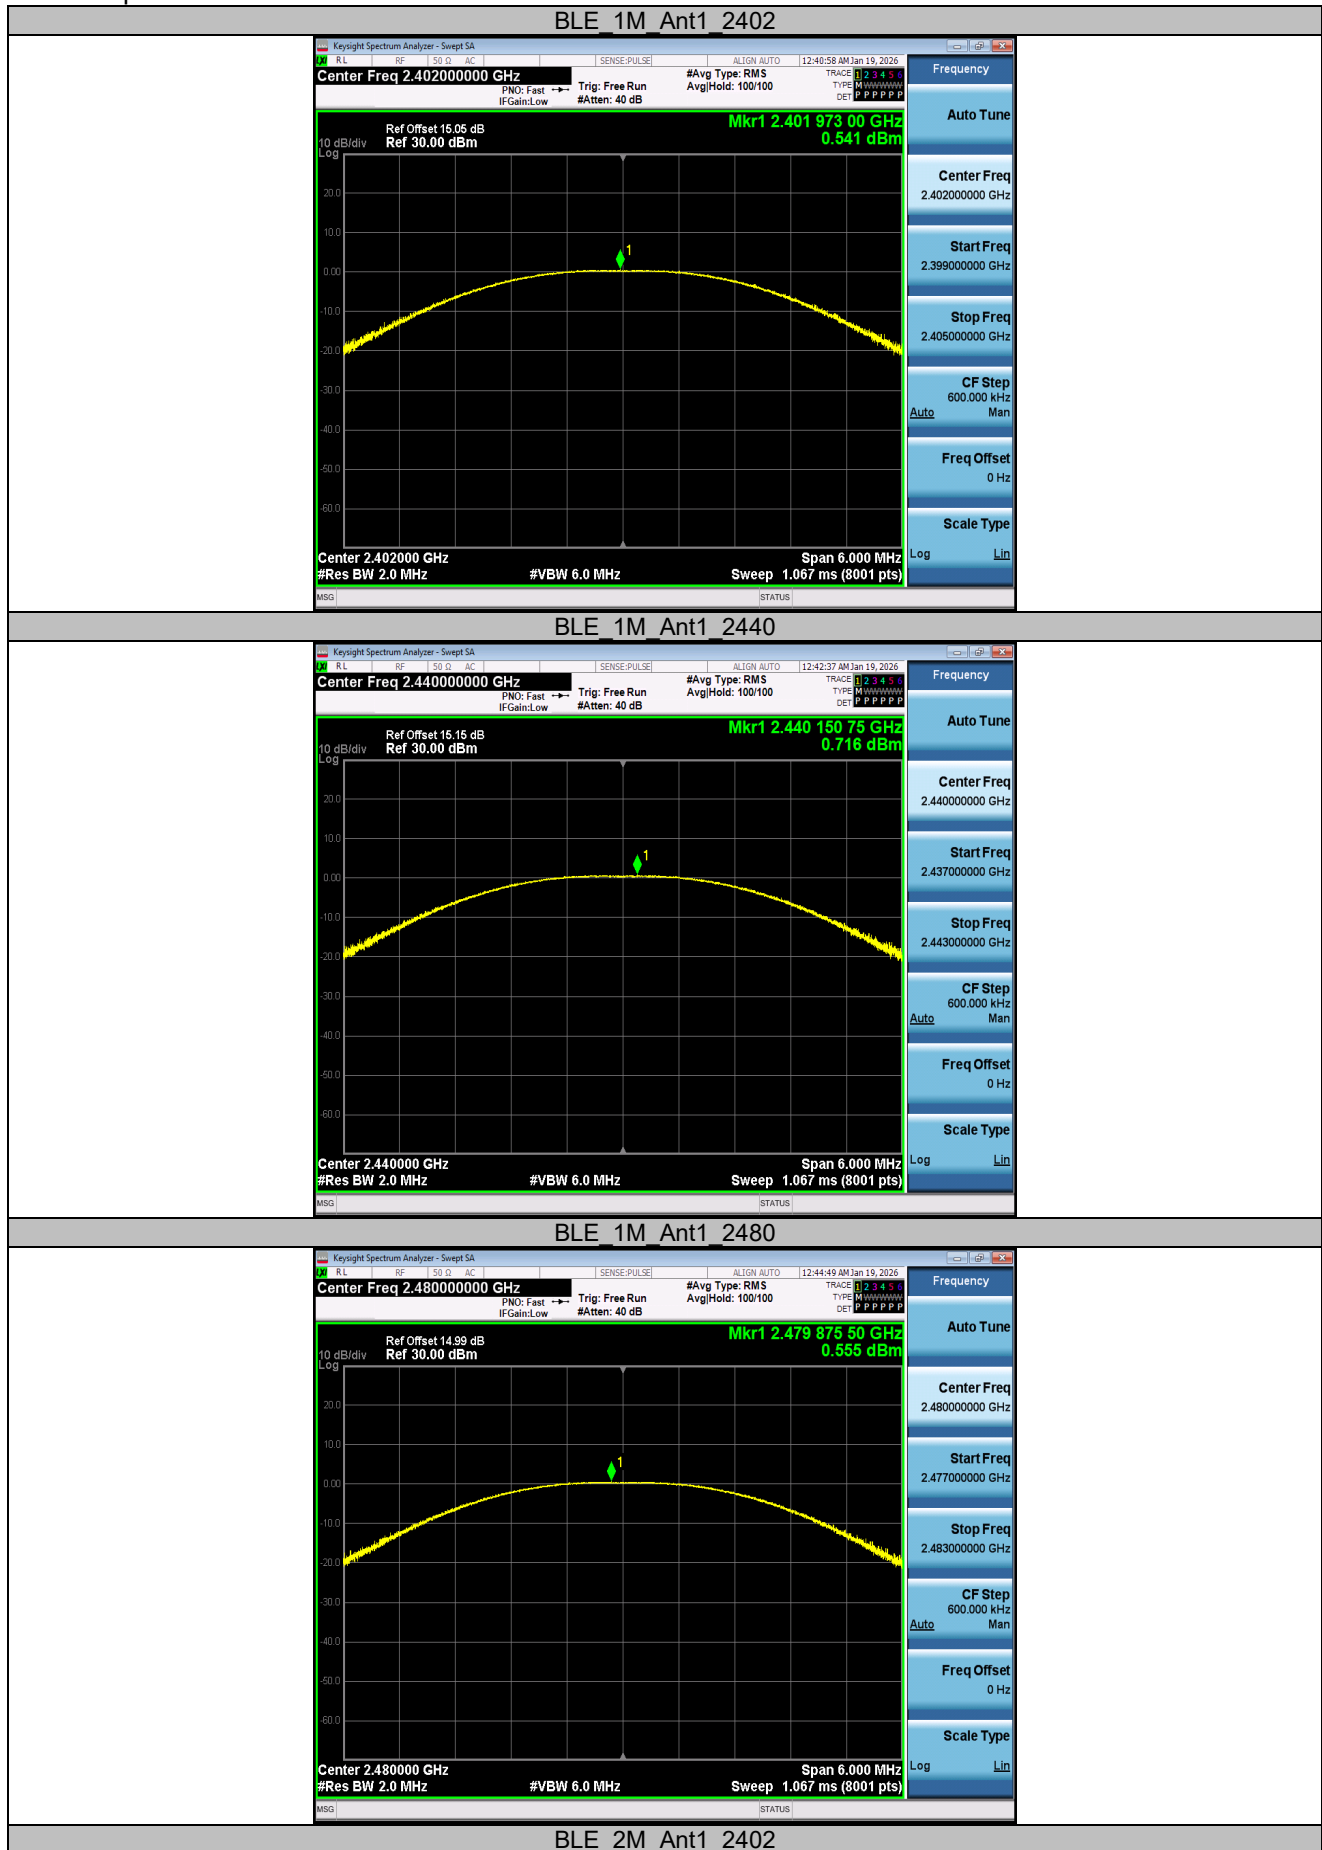




BLE 2M Ant1 2440




BLE 2M Ant1 2480

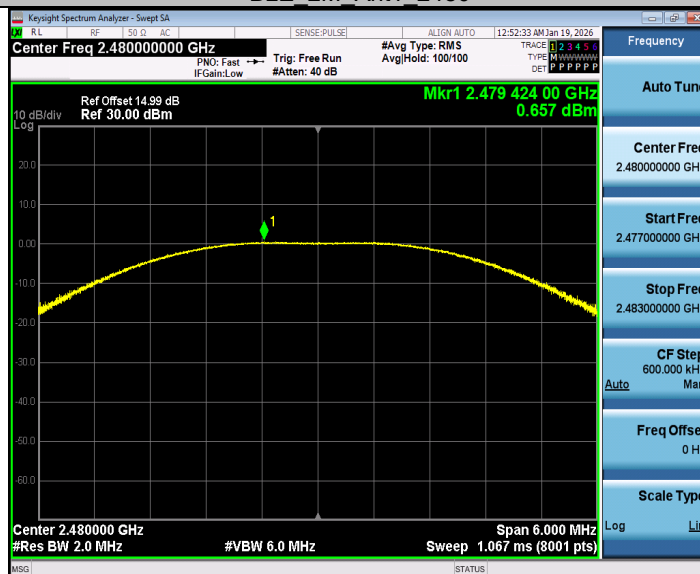


APPENDIX G - CONDUCTED SPURIOUS EMISSION

Conducted Spurious Emission

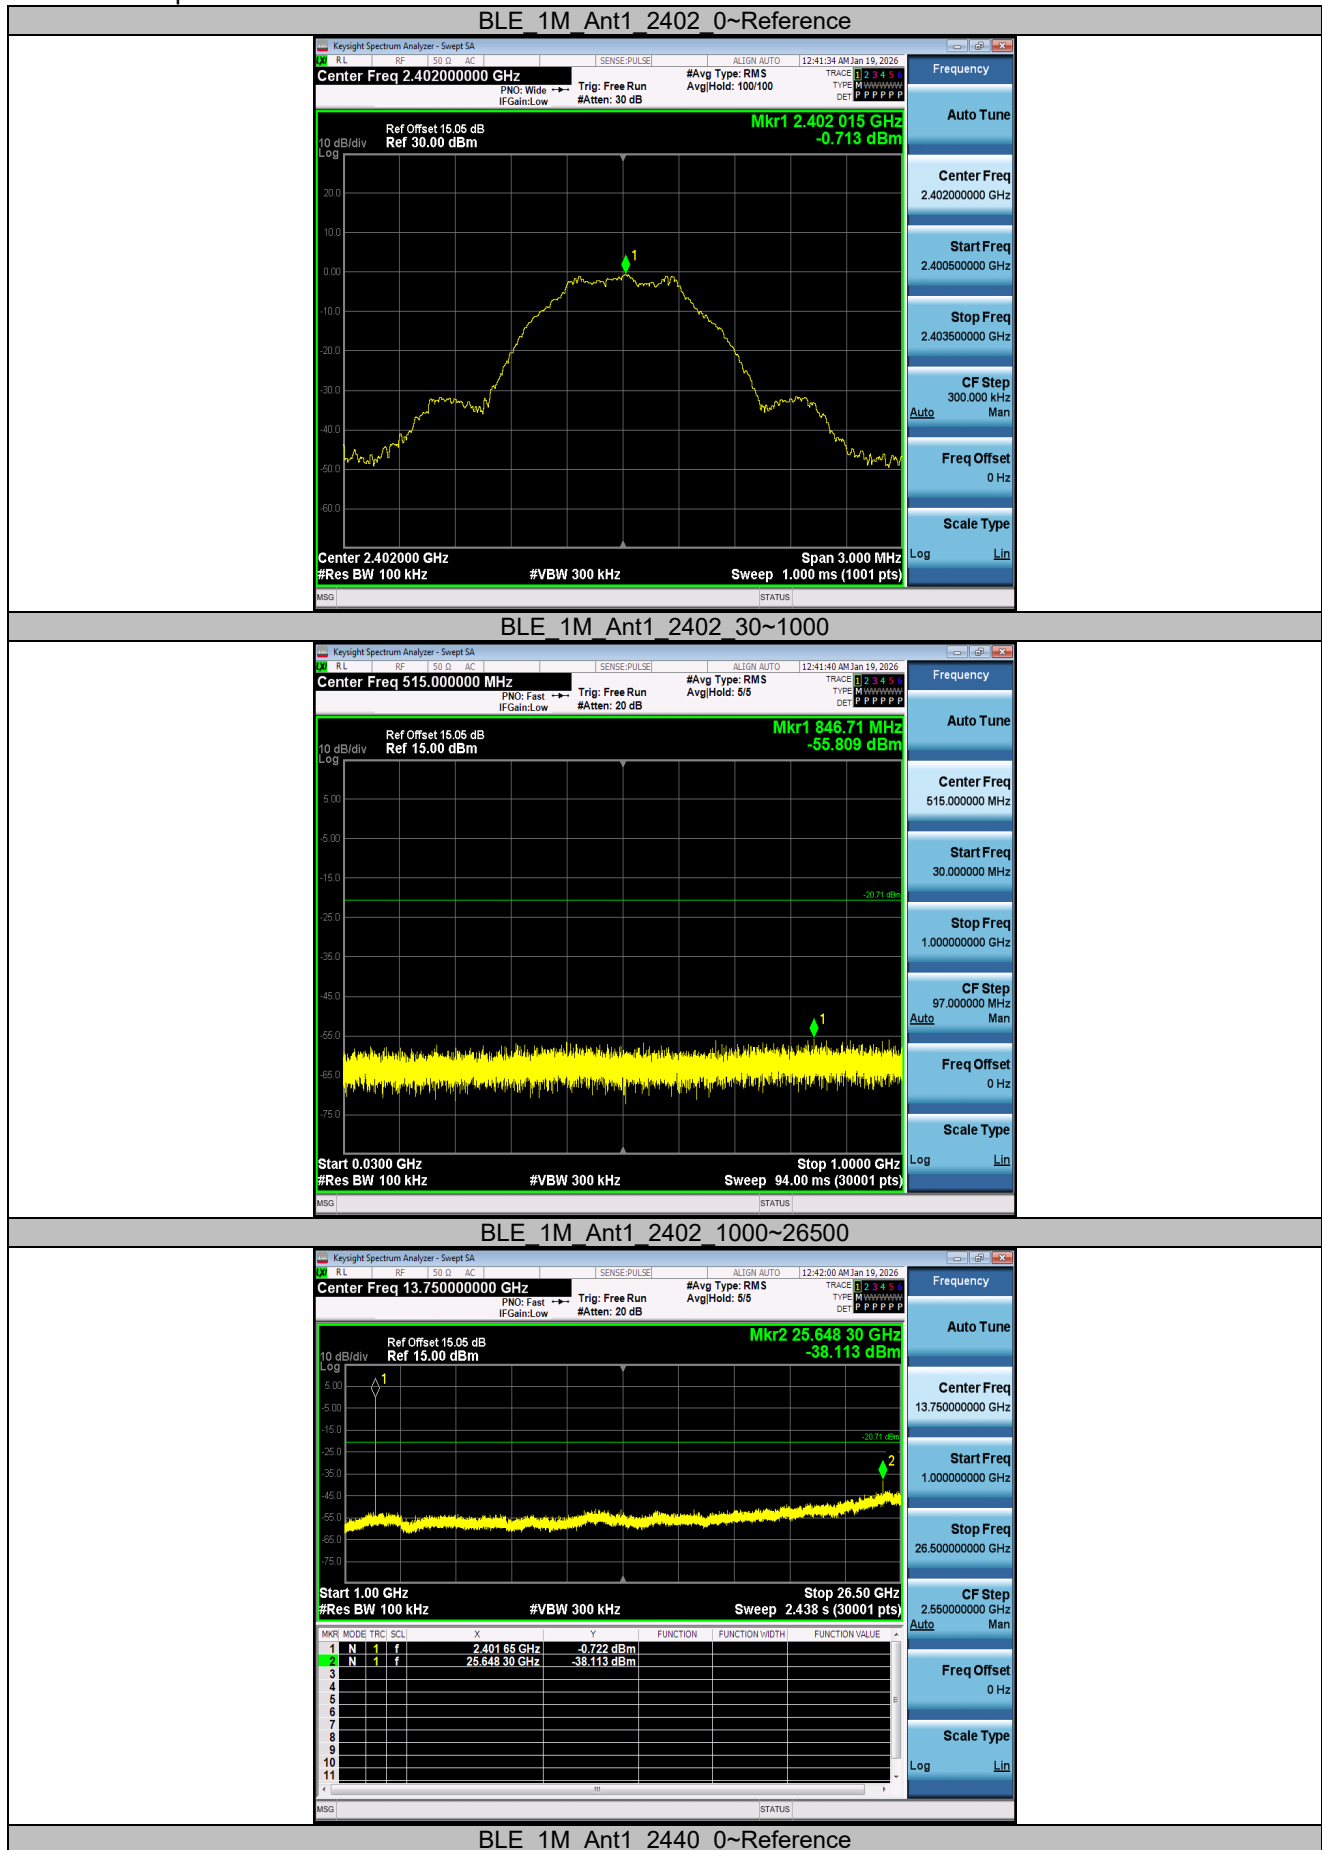




BLE_1M_Ant1_2440_30~1000

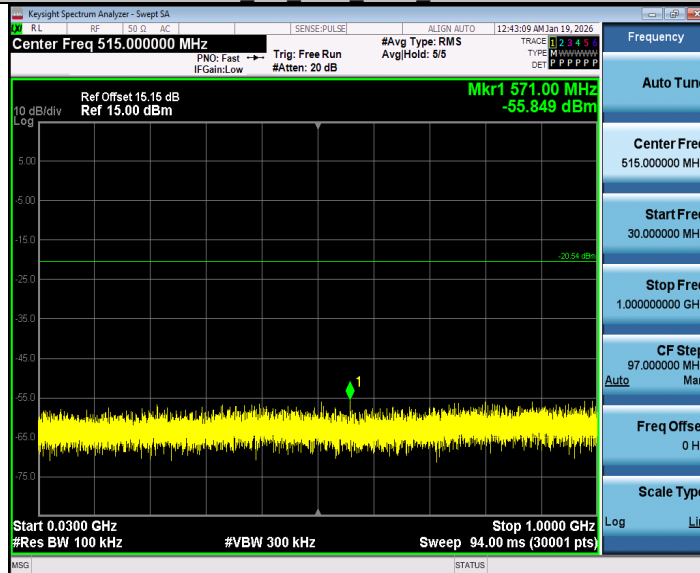


BLE_1M_Ant1_2440_1000~26500

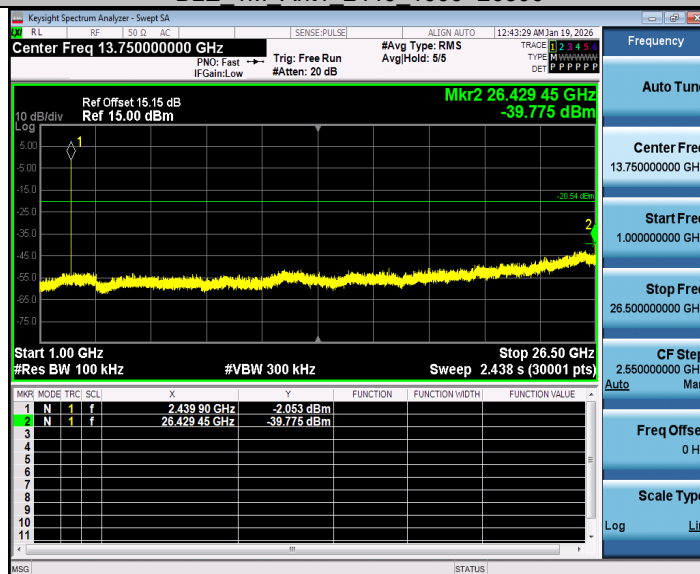


BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

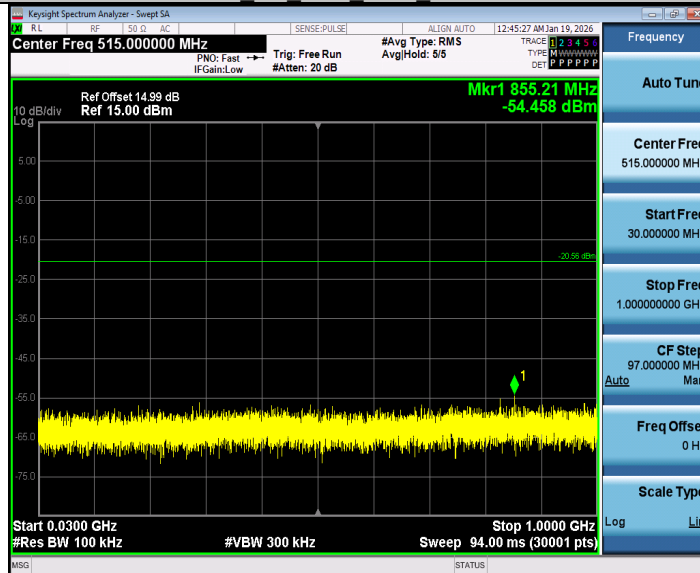


BLE_1M_Ant1_2480_1000~26500

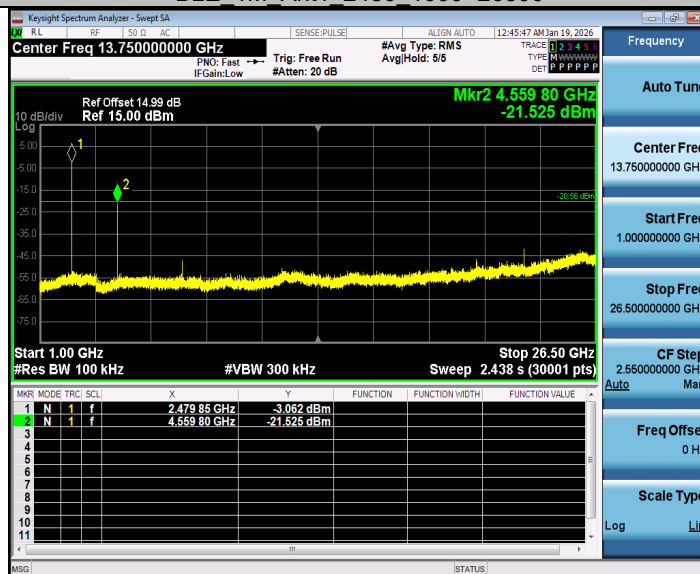


BLE_2M_Ant1_2402_0~Reference



BLE_2M_Ant1_2402_30~1000

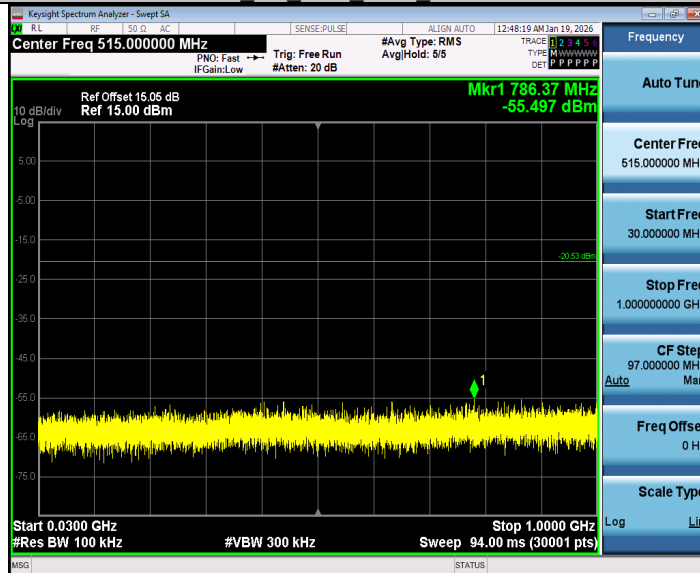


BLE_2M_Ant1_2402_1000~26500

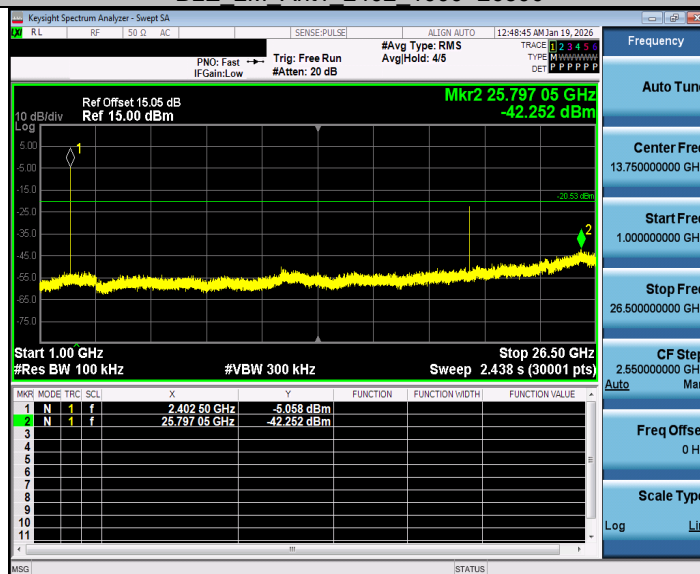


BLE_2M_Ant1_2440_0~Reference



BLE_2M_Ant1_2440_30~1000

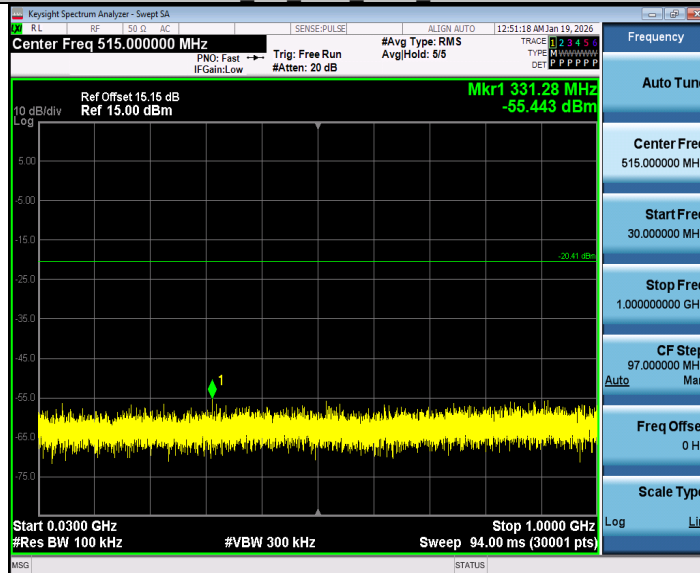


BLE_2M_Ant1_2440_1000~26500

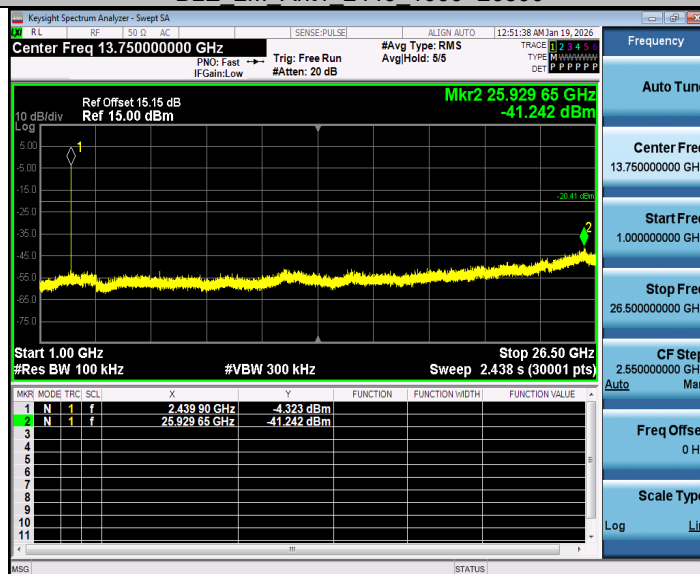


BLE_2M_Ant1_2480_0~Reference




BLE 2M_Ant1_2480_30~1000

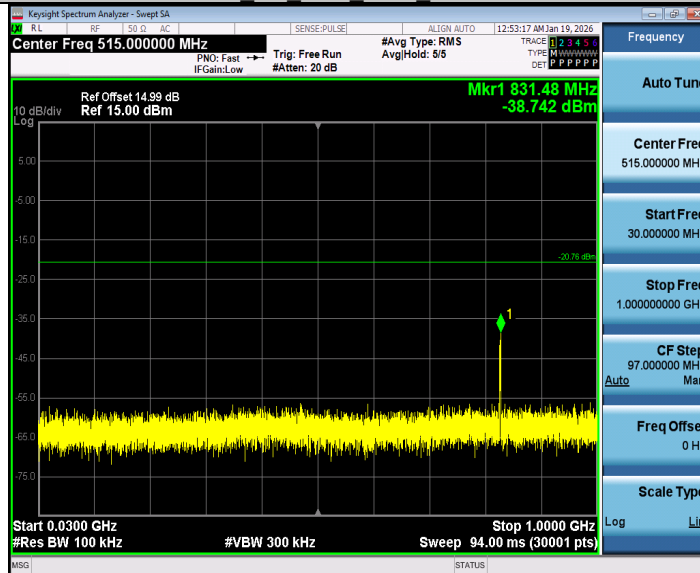

BLE 2M_Ant1_2480_1000~26500

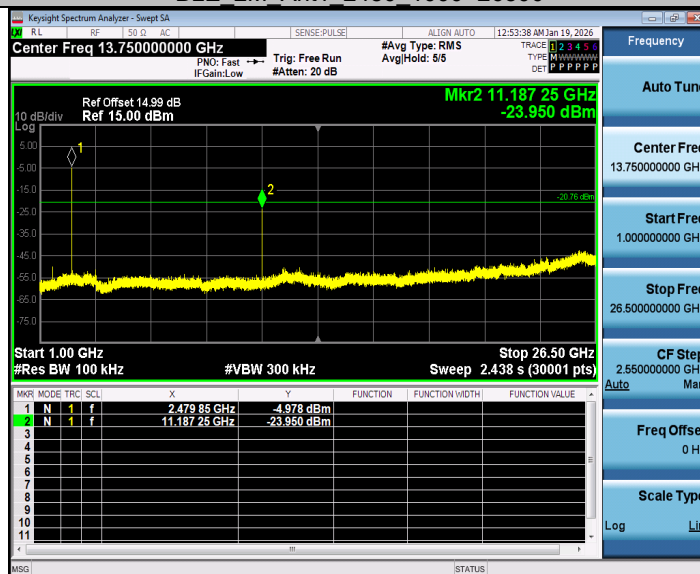

Band edge measurements

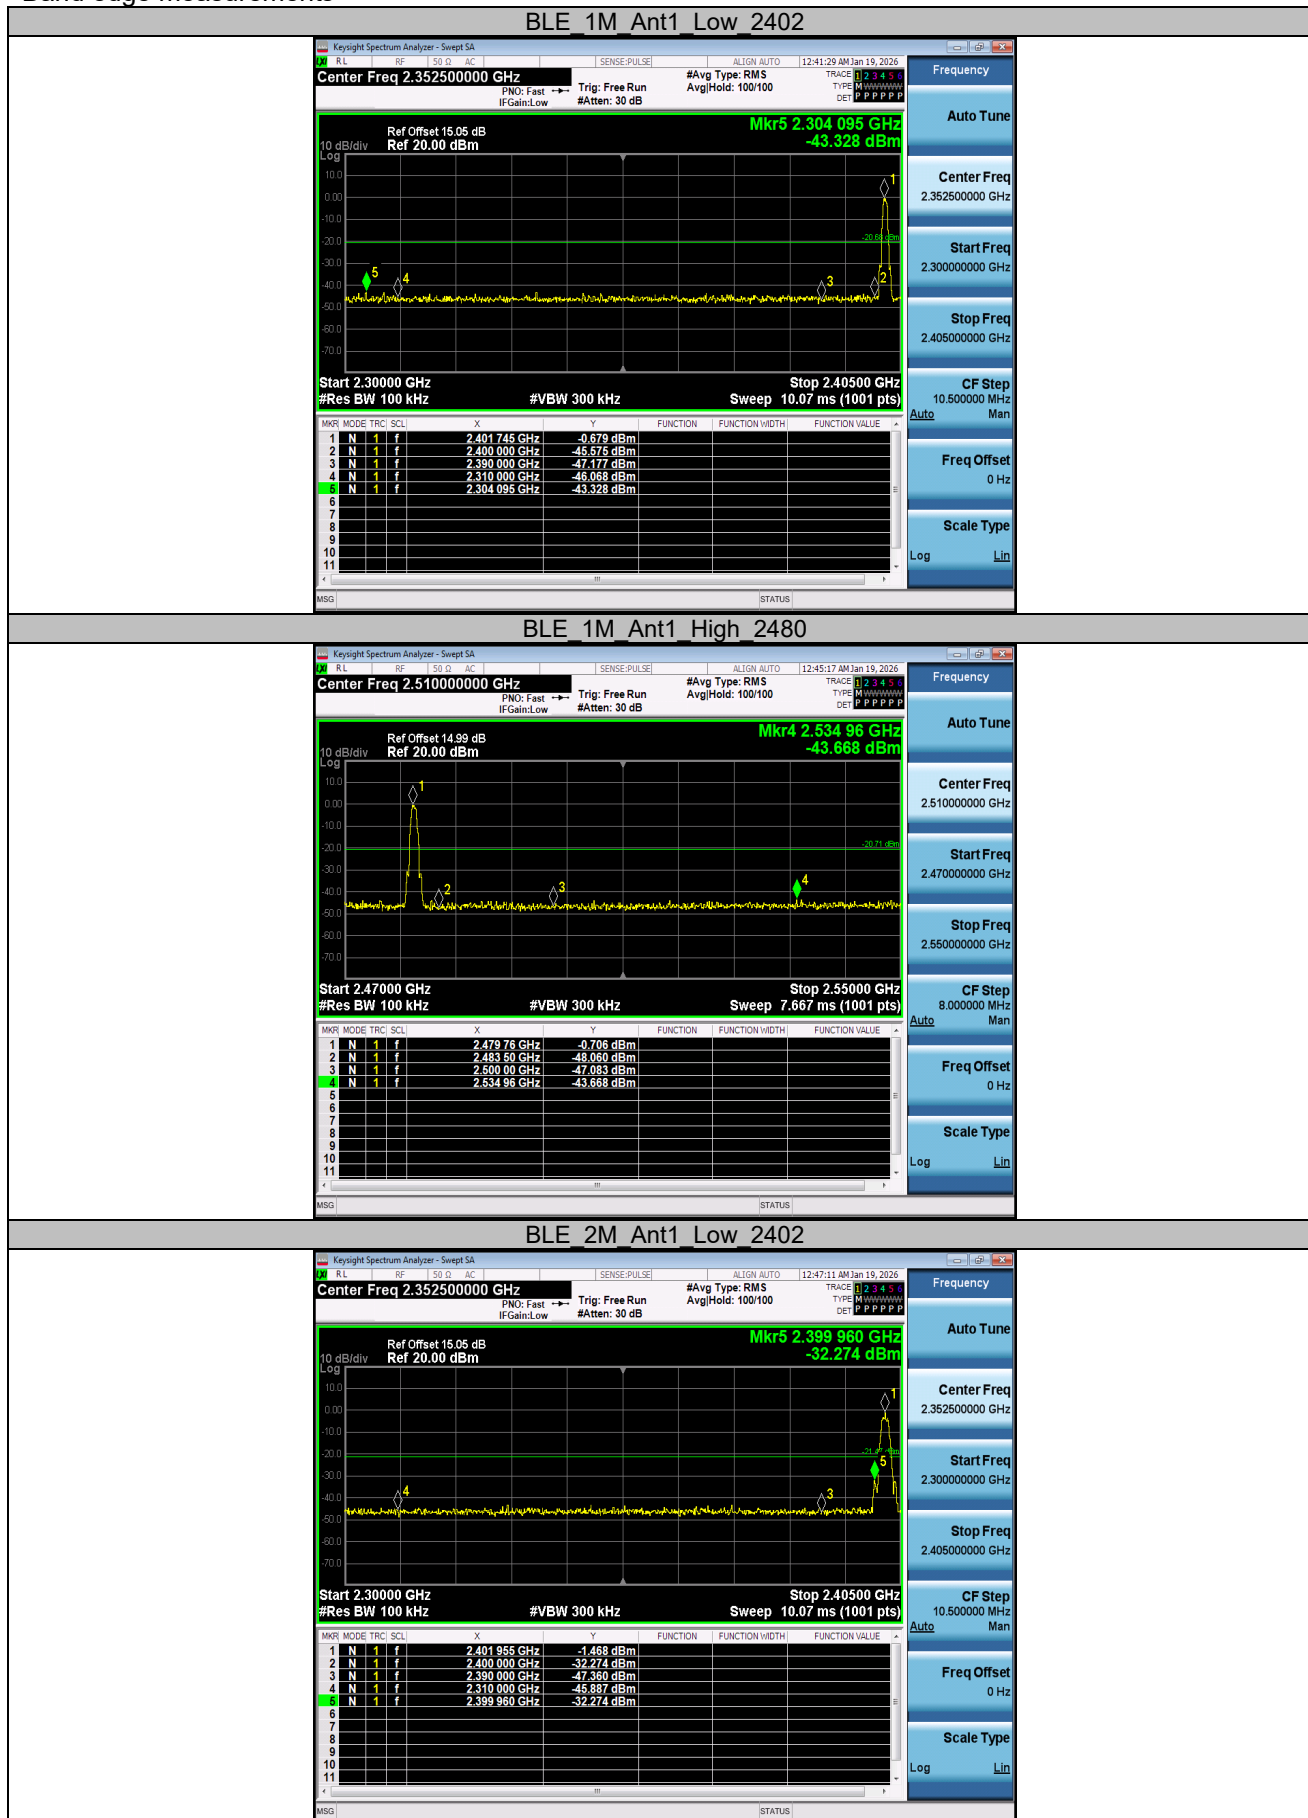
BLE 1M Ant1 High 2480

Frequency

Auto Tune

Center Freq 2.510000000 GHz

Start Freq 2.470000000 GHz

Stop Freq 2.550000000 GHz

CF Step 8.000000 MHz

Freq Offset 0 Hz

Scale Type Log

BLE 2M Ant1 Low 2402

Frequency

Auto Tune

Center Freq 2.352500000 GHz

Start Freq 2.300000000 GHz

Stop Freq 2.405000000 GHz

CF Step 10.500000 MHz


Freq Offset 0 Hz




Scale Type Log

APPENDIX H - POWER SPECTRAL DENSITY

Test Mode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.57	≤8.00	PASS
		2440	-15.45	≤8.00	PASS
		2480	-15.50	≤8.00	PASS
BLE_2M	Ant1	2402	-18.42	≤8.00	PASS
		2440	-18.23	≤8.00	PASS
		2480	-18.30	≤8.00	PASS

Test Graphs

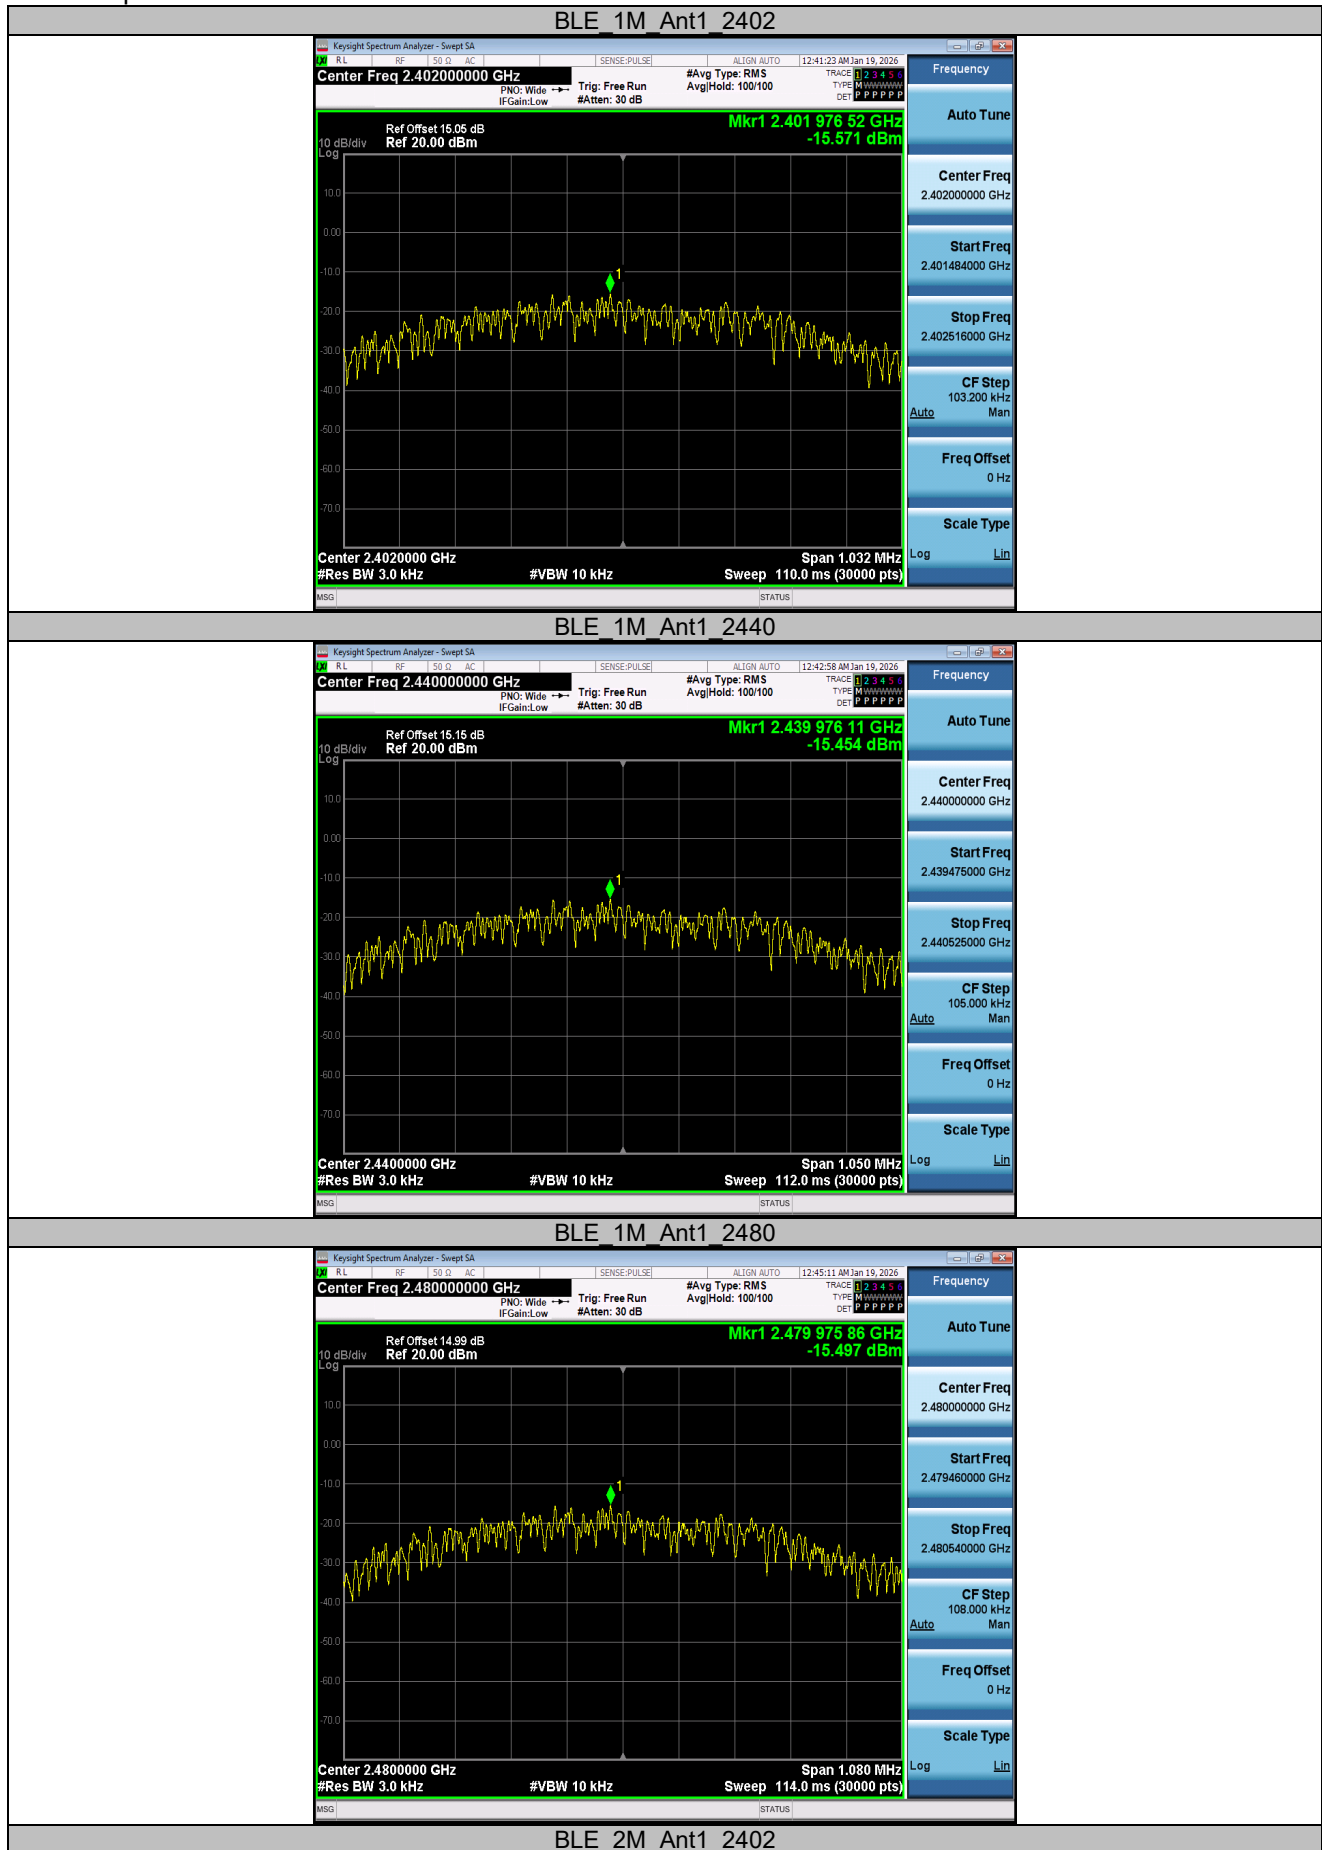

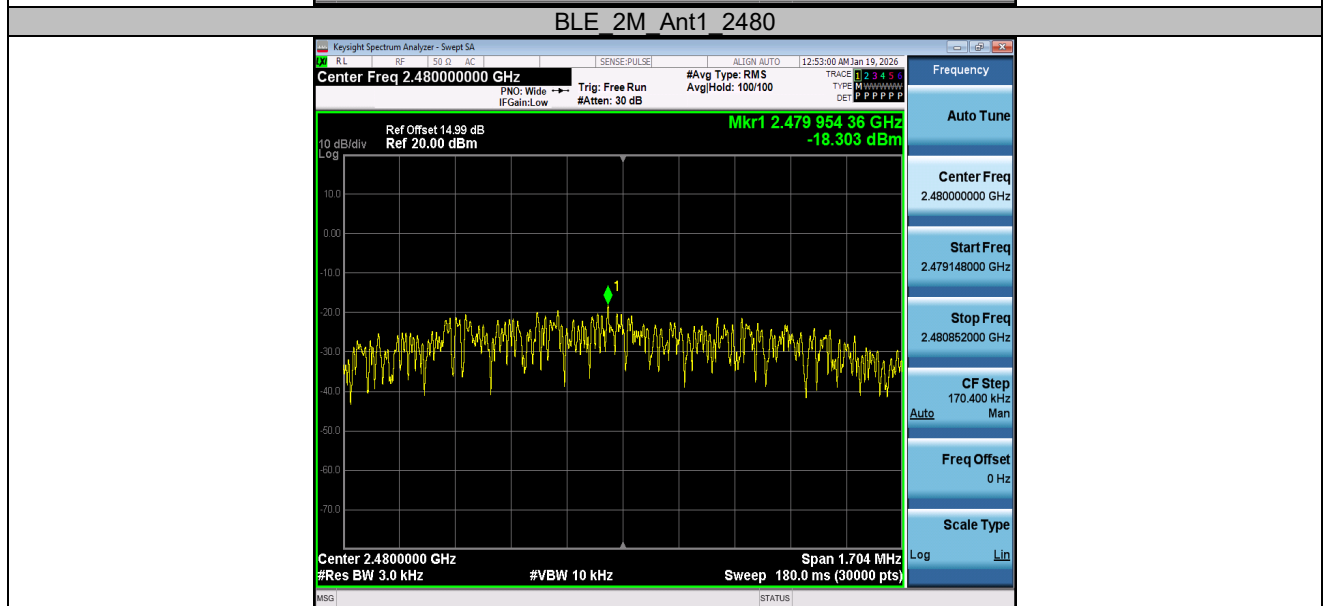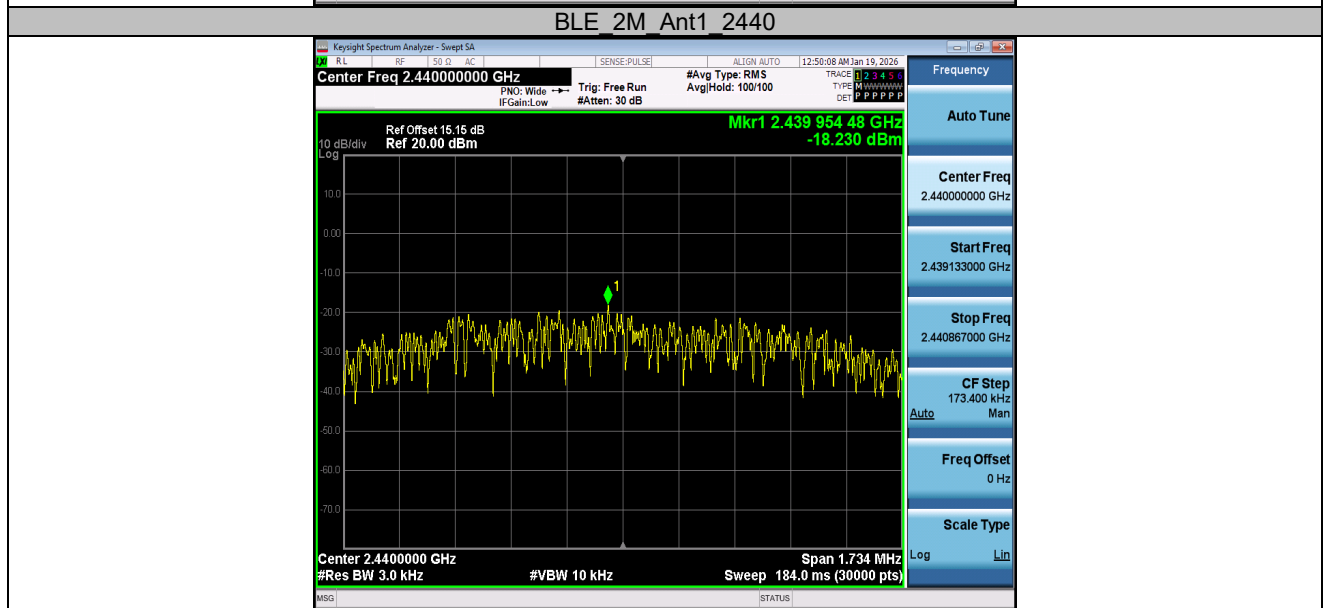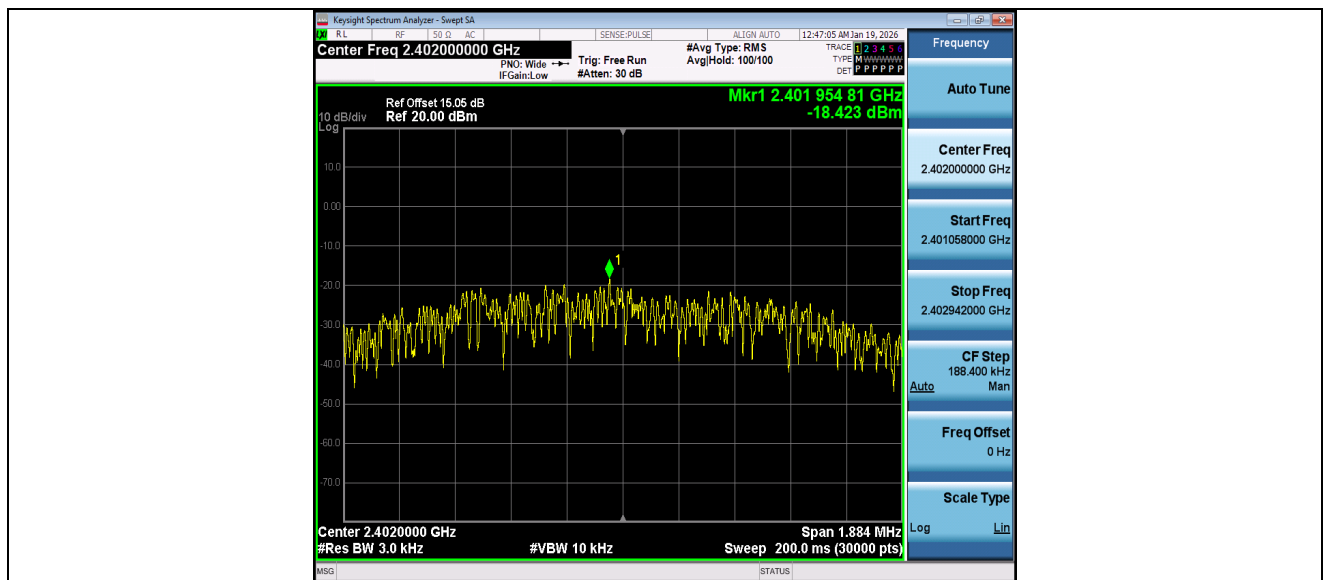

Statement

1. The report is invalid without the official seal or special seal of Shenzhen Haiyun Standard Technical Co., Ltd. (hereinafter referred to as the unit).
2. The report is invalid without the signature of the approver.
3. The report is invalid if altered arbitrarily.
4. The report shall not be partially copied without the written approval of the unit.
5. The reported test results are only valid for the tested samples.
6. If there is any objection to the test report, it shall be submitted to the test unit within 15 days from the date of receiving the report, and the overdue shall not be accepted.

Shenzhen Haiyun Standard Technical Co., Ltd.

Address: Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China

End of Test Report