



**FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

Sutro Hub + Charger

MODEL NUMBER: SHC-1

FCC ID:2ATKG-RAD78235

IC: 25070-RAD78235

REPORT NUMBER: 4788967474-2

ISSUE DATE: June 27, 2019

Prepared for

**Sutro Connect Inc.
181 2nd St. San Francisco, CA 94105, US**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road,
Song Shan Lake Hi-Tech Development Zone, Dongguan, People's Republic of China
Tel: +86 769-22038881
Fax: +86 769 33244054
Website: www.ul.com**



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	06/27/2019	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6db DTS Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.1 (a)	PASS
2	Peak Conducted Power	FCC 15.247 (b) (3) RSS-247 Clause 5.1 (b)	PASS
3	Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	PASS
4	Conducted Band edge And Spurious emission	FCC 15.247 (d) RSS-247 Clause 5.5	PASS
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	PASS
6	Conducted Emission Test For AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	PASS
7	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	PASS



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. CHANNEL LIST	8
5.4. TEST CHANNEL CONFIGURATION.....	8
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	8
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.7. TEST ENVIRONMENT	9
5.8. DESCRIPTION OF TEST SETUP.....	10
6. MEASURING INSTRUMENT AND SOFTWARE USED	11
7. ANTENNA PORT TEST RESULTS	12
7.1. ON TIME AND DUTY CYCLE.....	12
7.2. 6 dB DTS BANDWIDTH AND 99% BANDWIDTH.....	14
7.3. PEAK CONDUCTED OUTPUT POWER.....	16
7.4. POWER SPECTRAL DENSITY	17
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	19
8. RADIATED TEST RESULTS.....	22
8.1. RESTRICTED BANDEDGE	28
8.2. SPURIOUS EMISSIONS (1~10GHz)	30
8.3. SPURIOUS EMISSIONS 30M ~ 1 GHz	32
8.4. SPURIOUS EMISSIONS BELOW 30M.....	34
9. AC POWER LINE CONDUCTED EMISSIONS	37
10. ANTENNA REQUIREMENTS	40



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Sutro Connect Inc.
Address: 181 2nd St. San Francisco, CA 94105, US

Manufacturer Information

Company Name: Sutro Connect Inc.
Address: 181 2nd St. San Francisco, CA 94105, US

EUT Description

Product Name Sutro Hub + Charger
Model Name SHC-1
Sample Status Normal
Sample Received date May 20, 2019
Date Tested May 28 ~ June 26, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 DTS Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISSED RSS-247 Issue 2 and ISSED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISSED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	---

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.04dB(1-6GHz)
	5.30dB (6GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	Sutro Hub + Charger		
Model Name	SHC-1		
Product Description	Operation Frequency	915 MHz	
	Modulation Type		2FSK
Rated Input	DC 12V		

5.2. MAXIMUM OUTPUT POWER

Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)	EIRP (dBm)
2FSK	915	1[1]	11.78	14.16

5.3. CHANNEL LIST

Channel	Frequency (MHz)
1	915

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
2FSK	CH 1	915MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 915MHz Band		
Test Software		/
Modulation Type	Transmit Antenna Number	Test Channel
		CH 1
2FSK	1	Default



5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	915	FPCB	2.38

Test Mode	Transmit and Receive Mode	Description
2FSK	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage:	VL	/
	VN	DC 12V
	VH	/

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature



5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/

ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	Power Adapter	/	NT-120300D1	Input: AC 100~240V, 50/60Hz Output: DC 12V, 3A

TEST SETUP

The EUT can work in an engineer mode.

SETUP DIAGRAM FOR TEST





6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.10,2018	Dec.10,2019
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.10,2018	Dec.10,2019
☒	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Conducted disturbance		Farad	EZ-EMC		Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.10,2018	Dec.10,2019
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
☒	Preamplifier	HP	8447D	2944A09099	Dec.10,2018	Dec.10,2019
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.10,2018	Dec.10,2019
☒	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.10,2018	Dec.10,2019
☒	Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1

Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.10,2018	Dec.10,2019
☒	Power Meter	Keysight	N1911A	MY55416024	Dec.10,2018	Dec.10,2019
☒	Power Sensor	Keysight	U2021XA	MY5100022	Dec.10,2018	Dec.10,2019



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

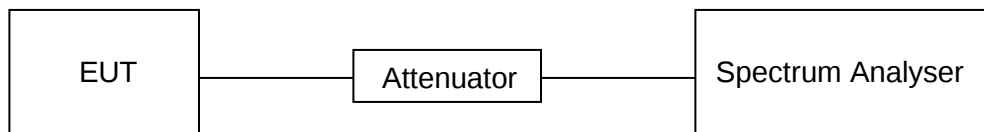


RESULTS

On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (KHz)
100	100	1	100	0	1

Note: Duty Cycle Correction Factor= $10\log(1/x)$.
Where: x is Duty Cycle (Linear)
Where: T is On Time (transmit duration)

ON TIME AND DUTY CYCLE MID CH

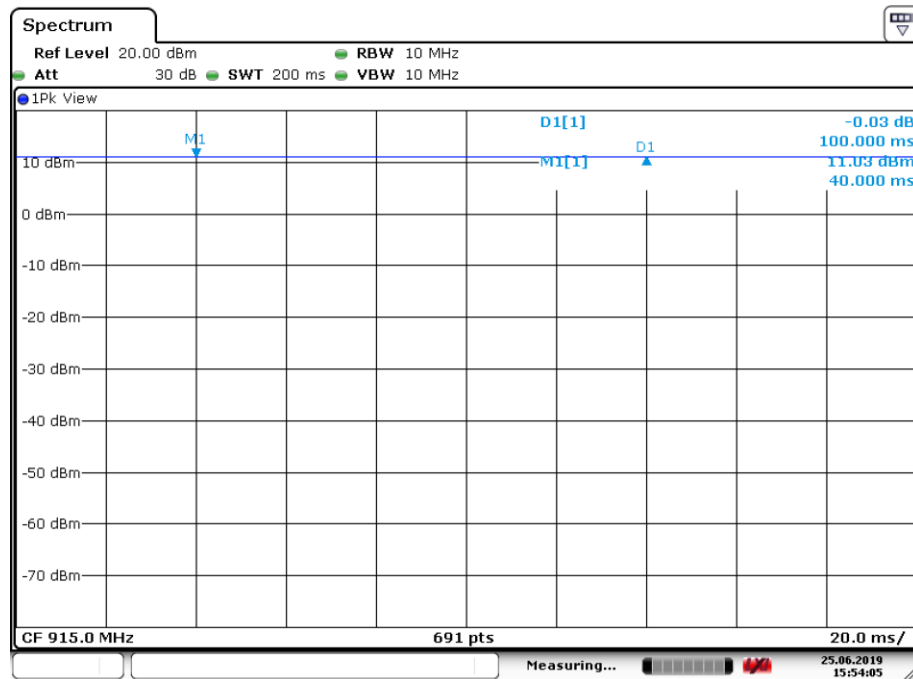

Date: 25.JUN.2019 15:54:06

7.2. 6 dB DTS BANDWIDTH AND 99% BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)f ISED RSS-247 5.2 (a)	6dB Bandwidth	$\geq 500\text{KHz}$	915
ISED RSS-Gen Clause 6.7	99% Occupied Bandwidth	For reporting purposes only.	915


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100K For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

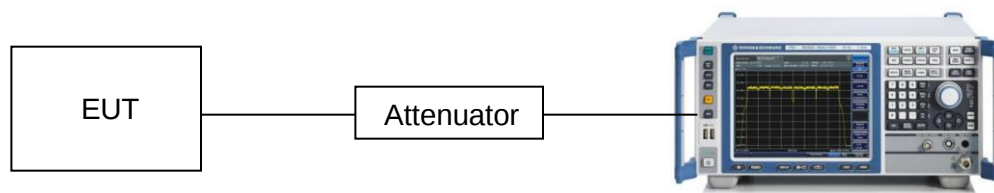





RESULTS

6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (kHz)	Result
0.5658	0.71598	≥500	Pass

6 dB BANDWIDTH

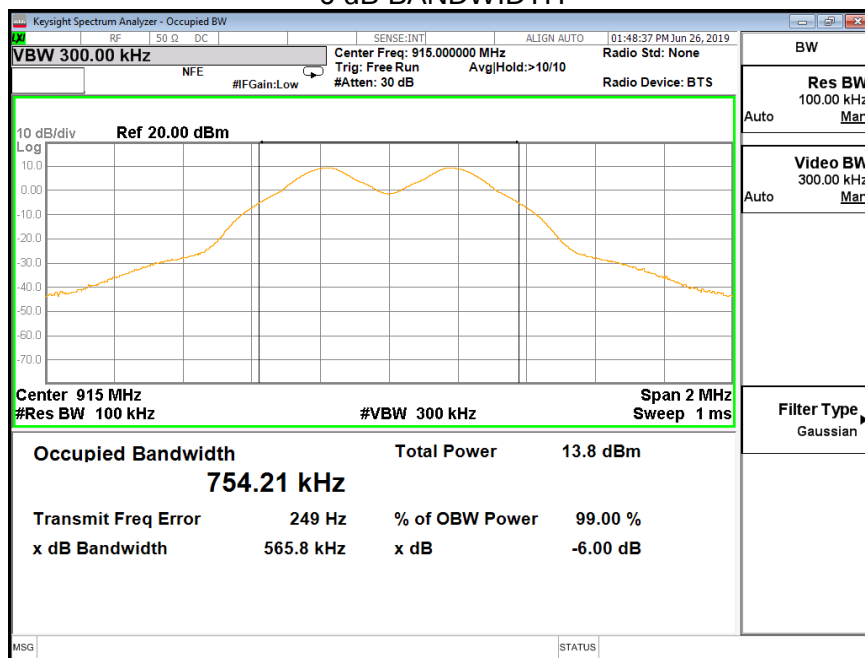

99% BANDWIDTH

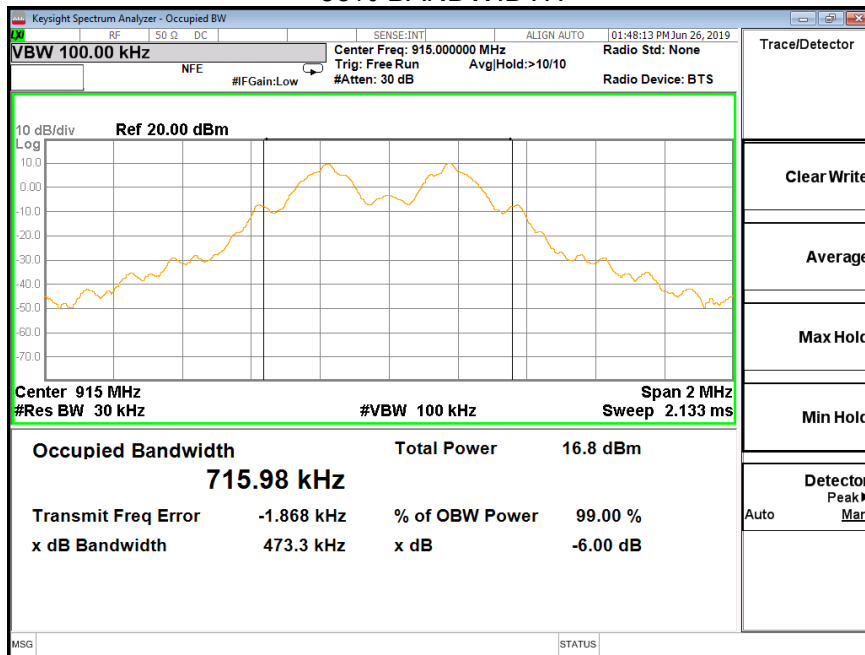



7.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Output Power	1 watt or 30dBm	915

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.

TEST SETUP



RESULTS

Frequency	Maximum Conducted Output Power (PK)	EIRP	LIMIT
(MHz)	(dBm)	(dBm)	dBm
915	11.78	14.16	30

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	915

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


TEST SETUP

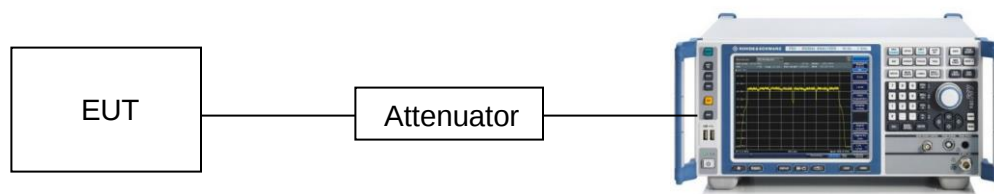



RESULTS

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
915 MHz	0.82	8	PASS

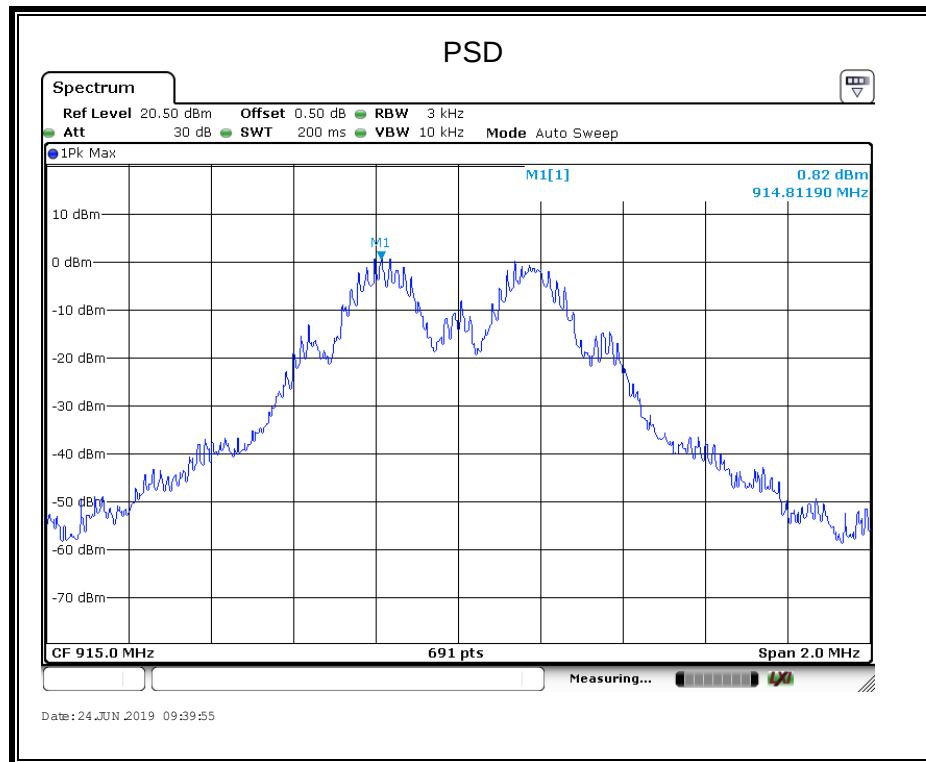

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100KHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100KHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.



Use the peak marker function to determine the maximum amplitude level.


TEST SETUP

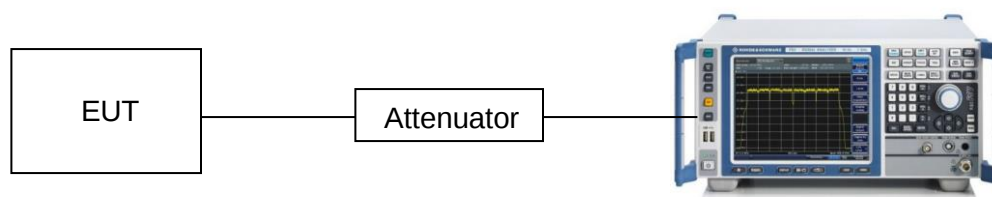



RESULTS

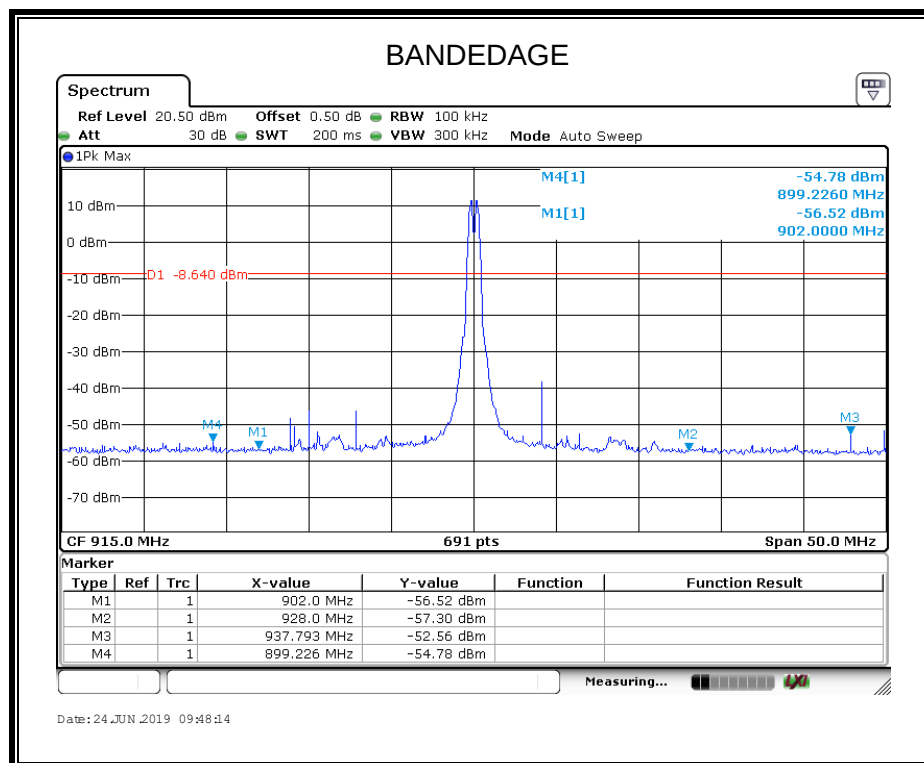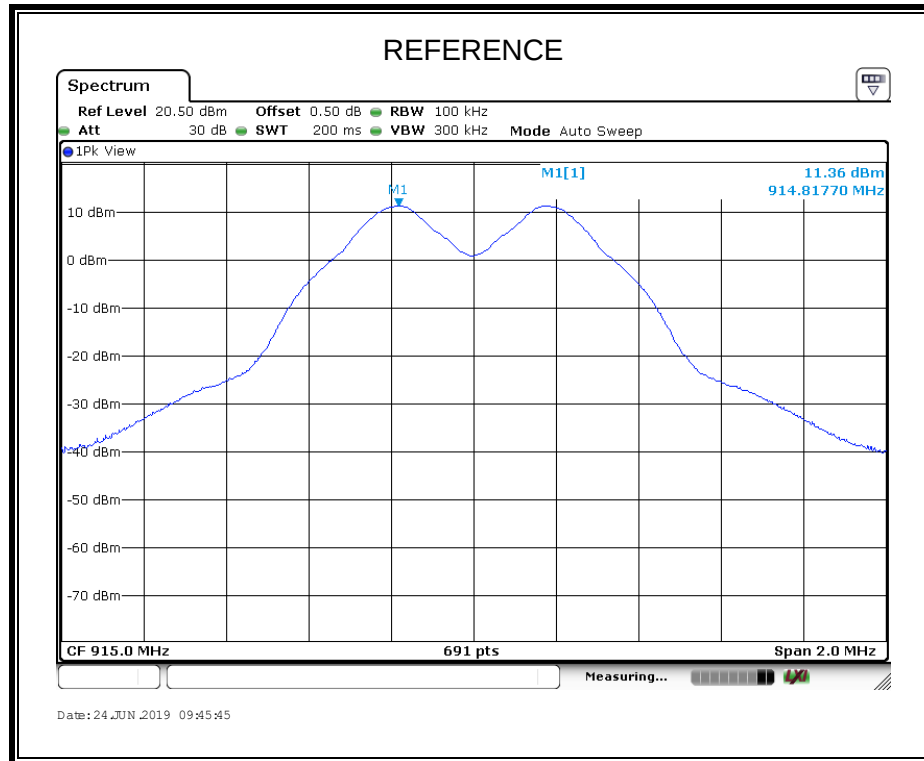

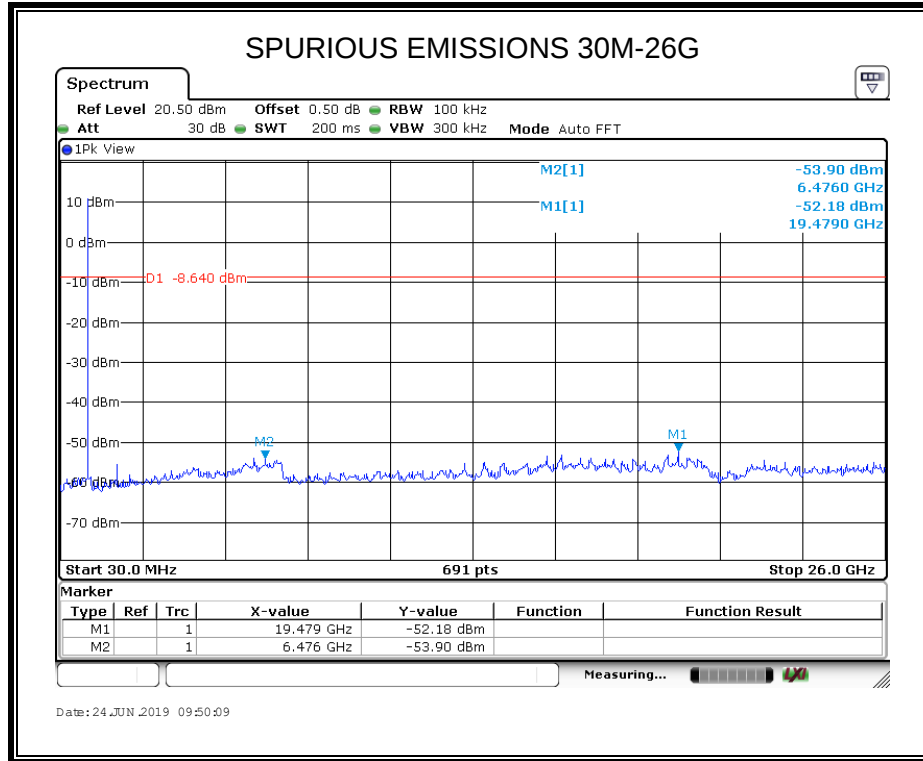



8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to ISED RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54



Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

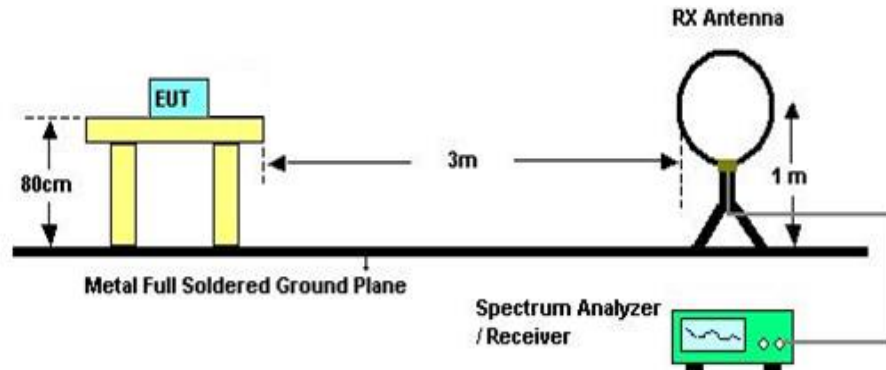


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G and above 30MHz

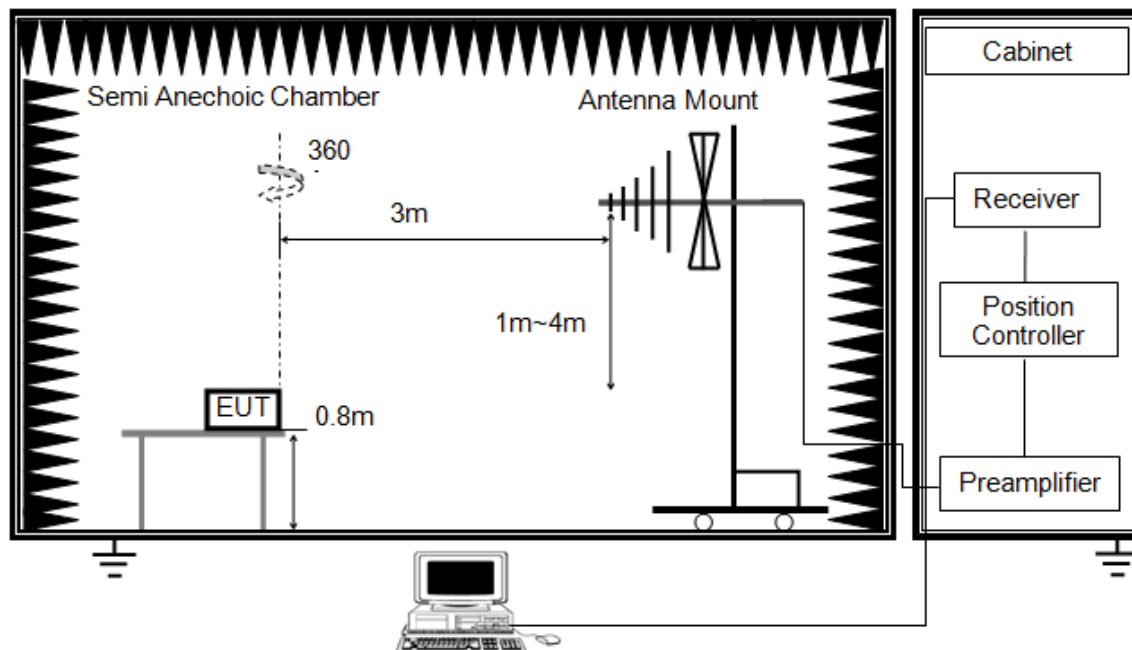


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1G

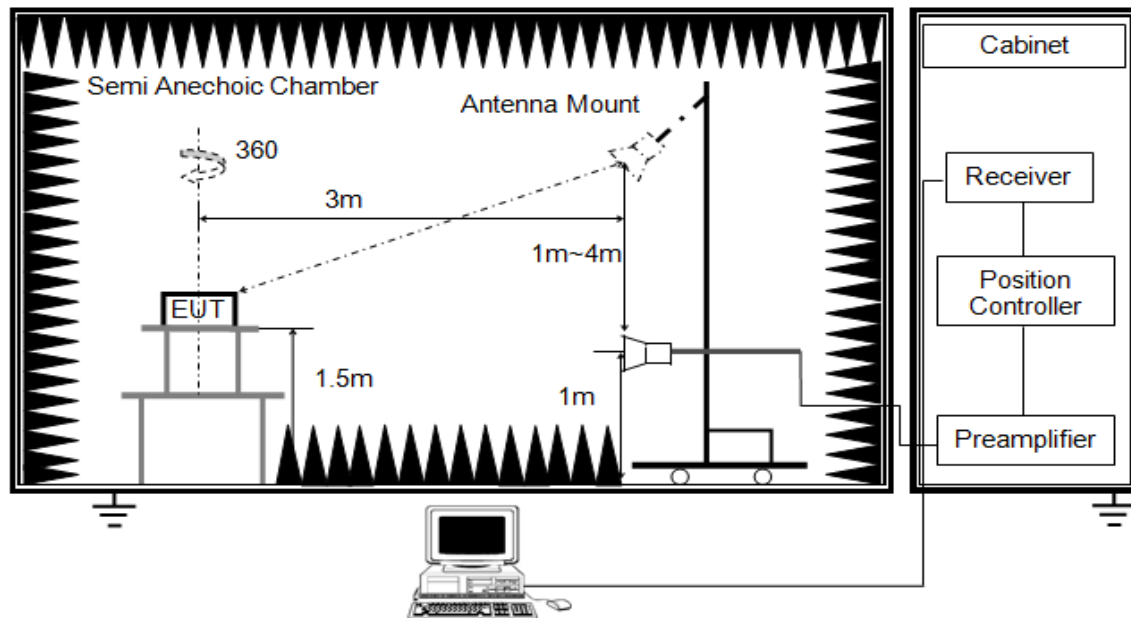


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector. For the Duty Cycle and Correction Factor please refer to clause 8.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

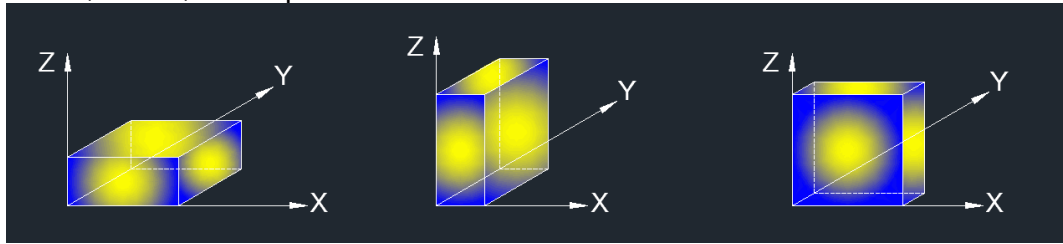


Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



8.1. RESTRICTED BANDEGE


RESTRICTED BANDEGE (HORIZONTAL)

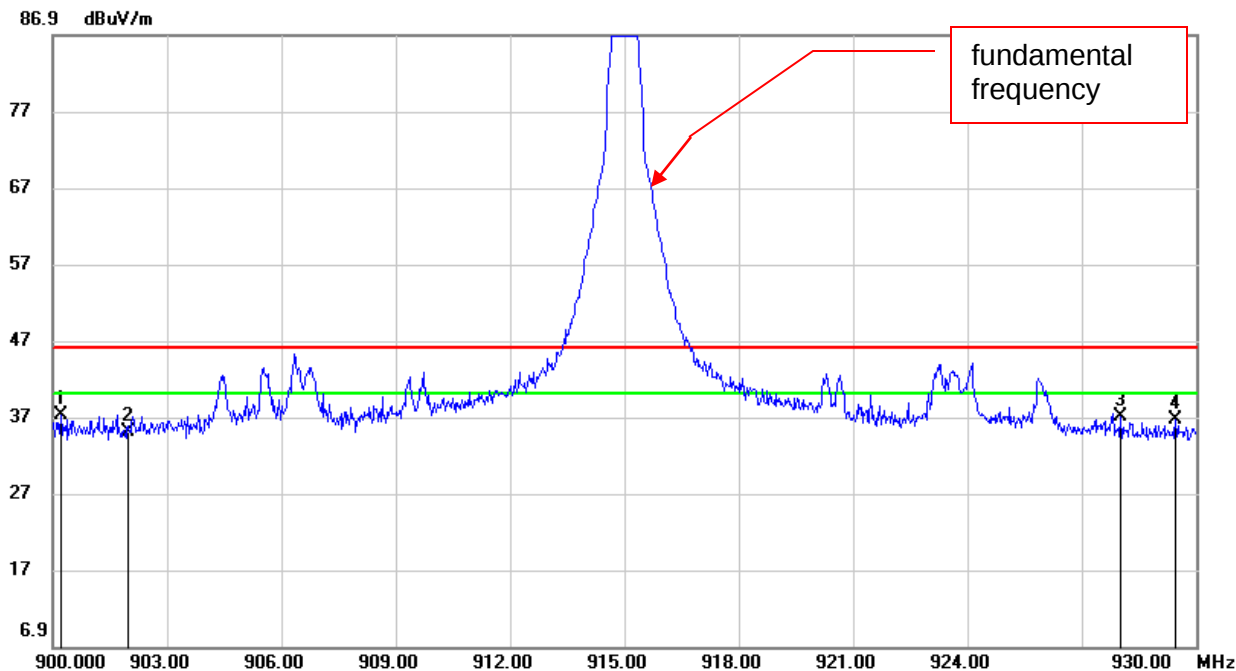

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	900.2100	41.33	-4.11	37.22	46.00	-8.78	peak
2	902.0000	39.05	-4.08	34.97	46.00	-11.03	peak
3	928.0000	40.62	-3.69	36.93	46.00	-9.07	peak
4	929.4600	40.31	-3.67	36.64	46.00	-9.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (VERTICAL)

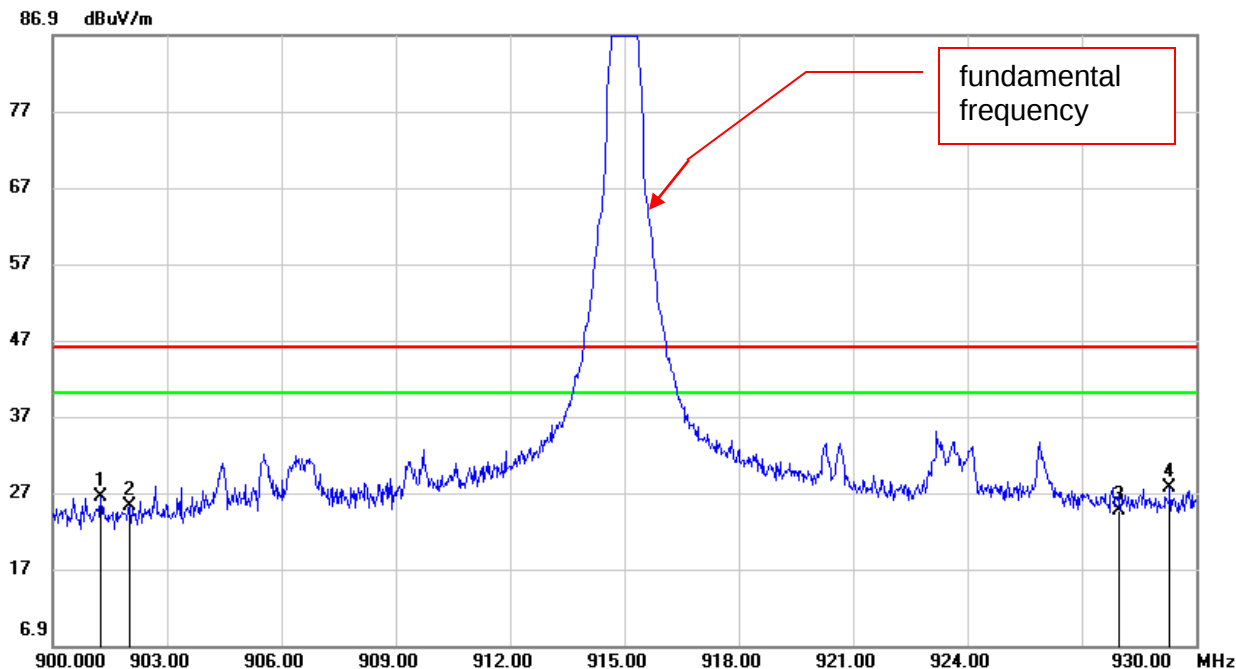


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	901.2600	30.54	-4.10	26.44	46.00	-19.56	peak
2	902.0000	29.26	-4.08	25.18	46.00	-20.82	peak
3	928.0000	28.37	-3.69	24.68	46.00	-21.32	peak
4	929.3100	31.31	-3.68	27.63	46.00	-18.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission will be recorder, if it complies with the limit, the other emissions deemed to comply with the limit.



8.2. SPURIOUS EMISSIONS (1~10GHz)

HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL 1-10GHz)

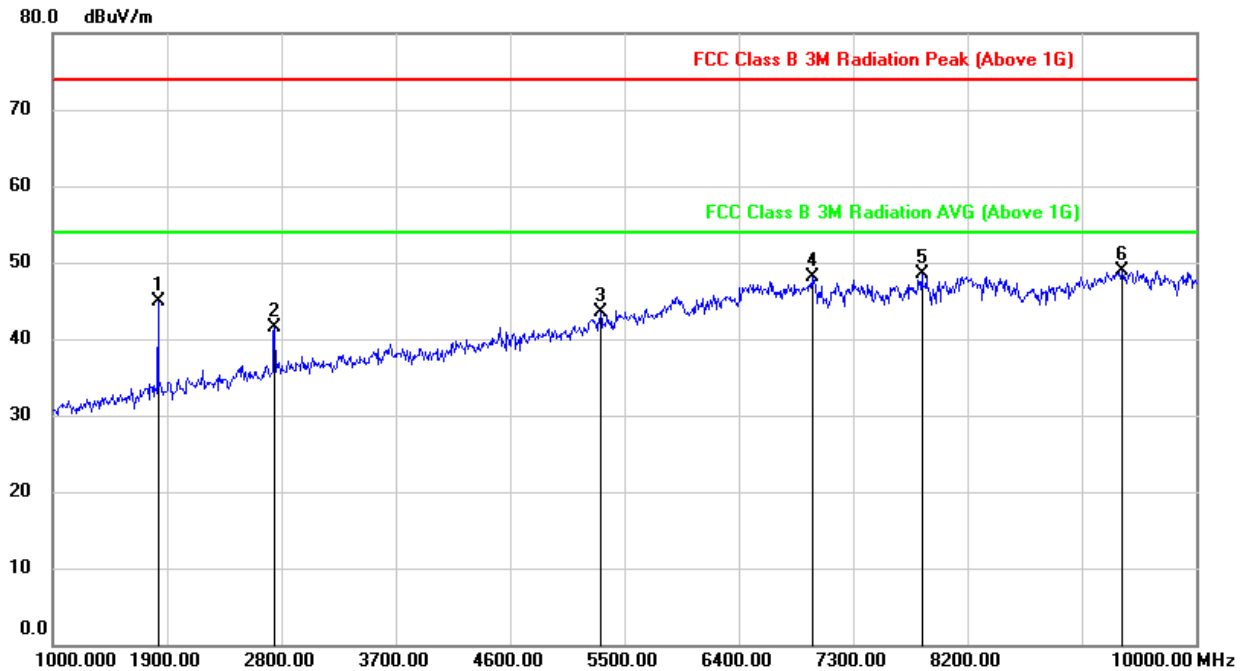


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1828.000	55.71	-10.88	44.83	74.00	-29.17	peak
2	2746.000	49.11	-7.59	41.52	74.00	-32.48	peak
3	5311.000	42.41	1.00	43.41	74.00	-30.59	peak
4	6976.000	41.81	6.39	48.20	74.00	-25.80	peak
5	7840.000	40.09	8.35	48.44	74.00	-25.56	peak
6	9415.000	38.66	10.27	48.93	74.00	-25.07	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS (VERTICAL 1-10GHz)

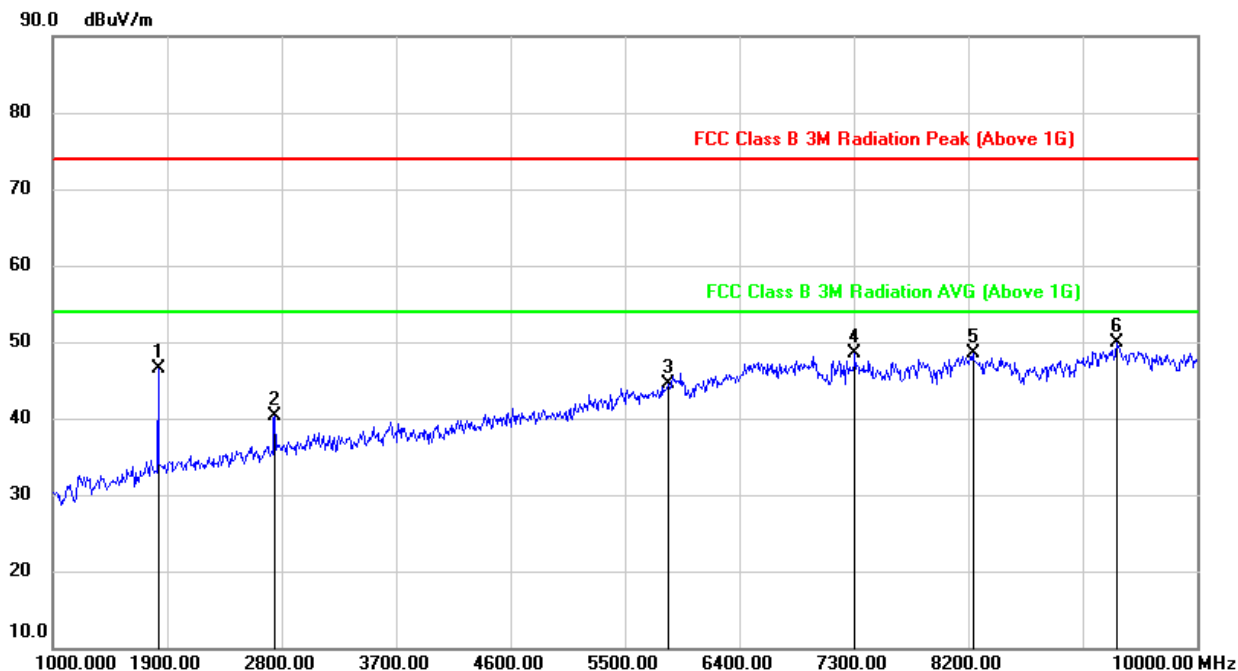


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	1828.000	57.44	-10.88	46.56	74.00	-27.44	peak
2	2746.000	47.85	-7.59	40.26	74.00	-33.74	peak
3	5842.000	40.73	3.73	44.46	74.00	-29.54	peak
4	7309.000	41.57	6.91	48.48	74.00	-25.52	peak
5	8236.000	39.56	9.03	48.59	74.00	-25.41	peak
6	9370.000	39.79	10.10	49.89	74.00	-24.11	peak

Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.



8.3. SPURIOUS EMISSIONS 30M ~ 1 GHz

SPURIOUS EMISSIONS (WORST-CASE CONFIGURATION, HORIZONTAL)

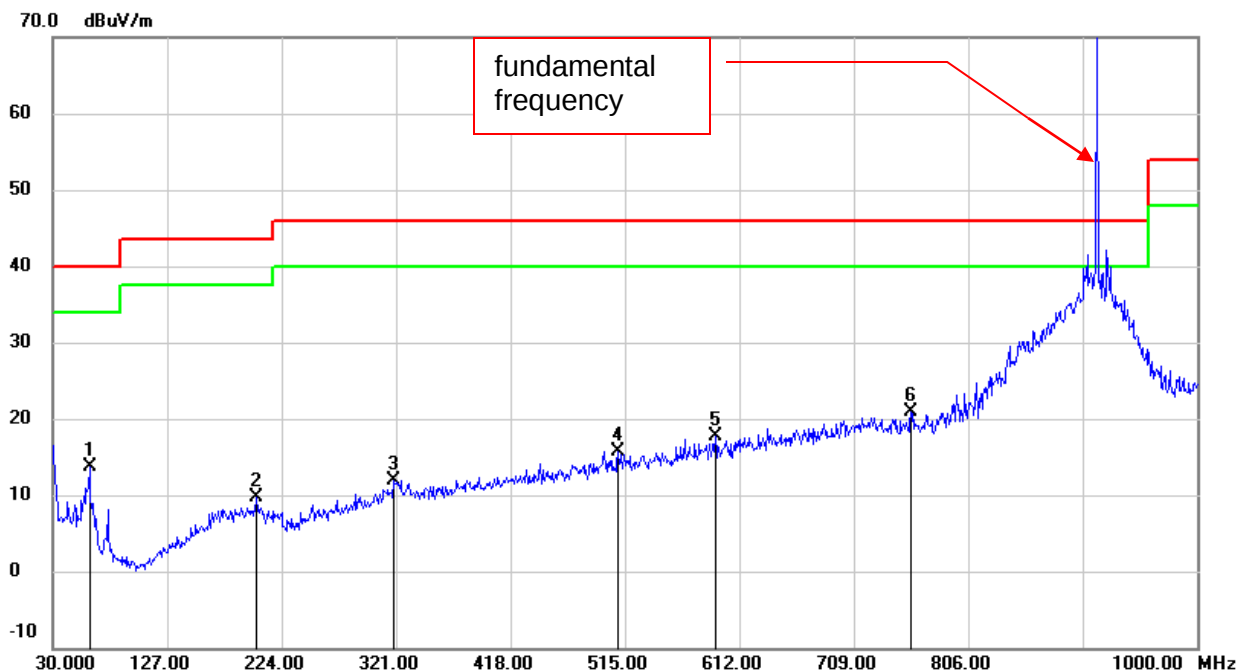


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	61.0400	33.21	-19.51	13.70	40.00	-26.30	QP
2	202.6600	25.83	-16.05	9.78	43.50	-33.72	QP
3	319.0600	25.52	-13.64	11.88	46.00	-34.12	QP
4	509.1800	25.97	-10.22	15.75	46.00	-30.25	QP
5	591.6300	26.32	-8.62	17.70	46.00	-28.30	QP
6	757.5000	26.71	-5.81	20.90	46.00	-25.10	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (WORST-CASE CONFIGURATION, VERTICAL)

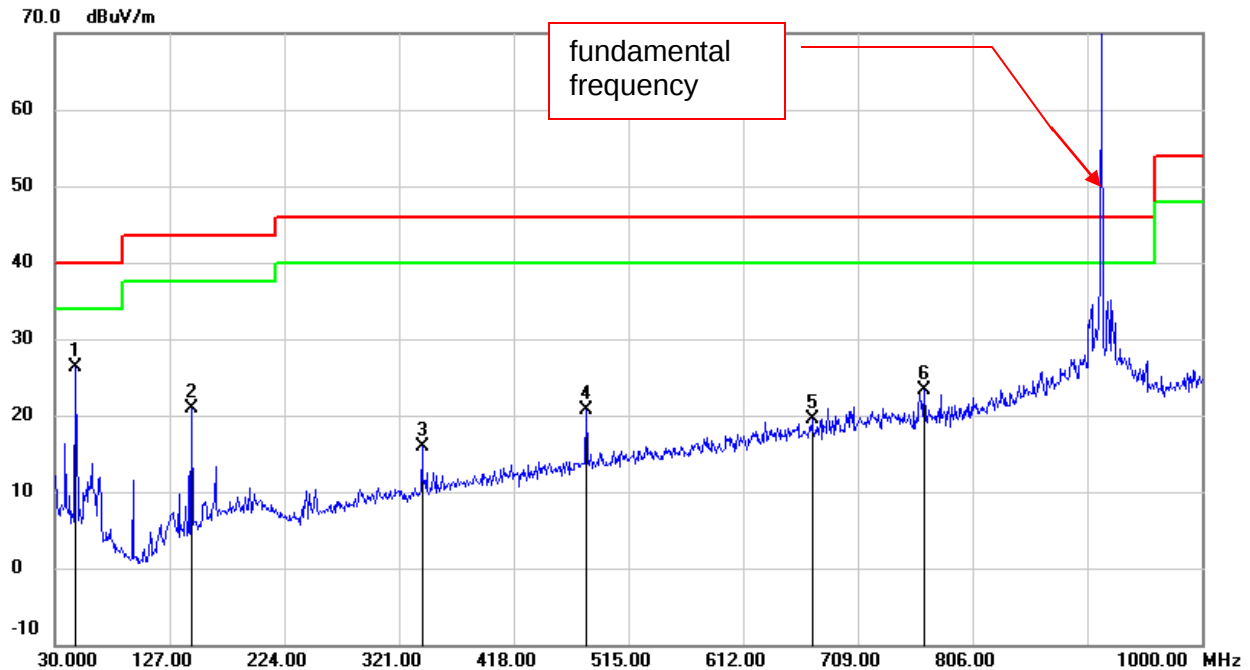


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	44.65	-18.26	26.39	40.00	-13.61	QP
2	145.4299	39.51	-18.70	20.81	43.50	-22.69	QP
3	340.4000	29.30	-13.36	15.94	46.00	-30.06	QP
4	479.1100	31.48	-10.86	20.62	46.00	-25.38	QP
5	670.2000	26.62	-7.20	19.42	46.00	-26.58	QP
6	765.2600	29.09	-5.77	23.32	46.00	-22.68	QP

- Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

8.4. SPURIOUS EMISSIONS BELOW 30M

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

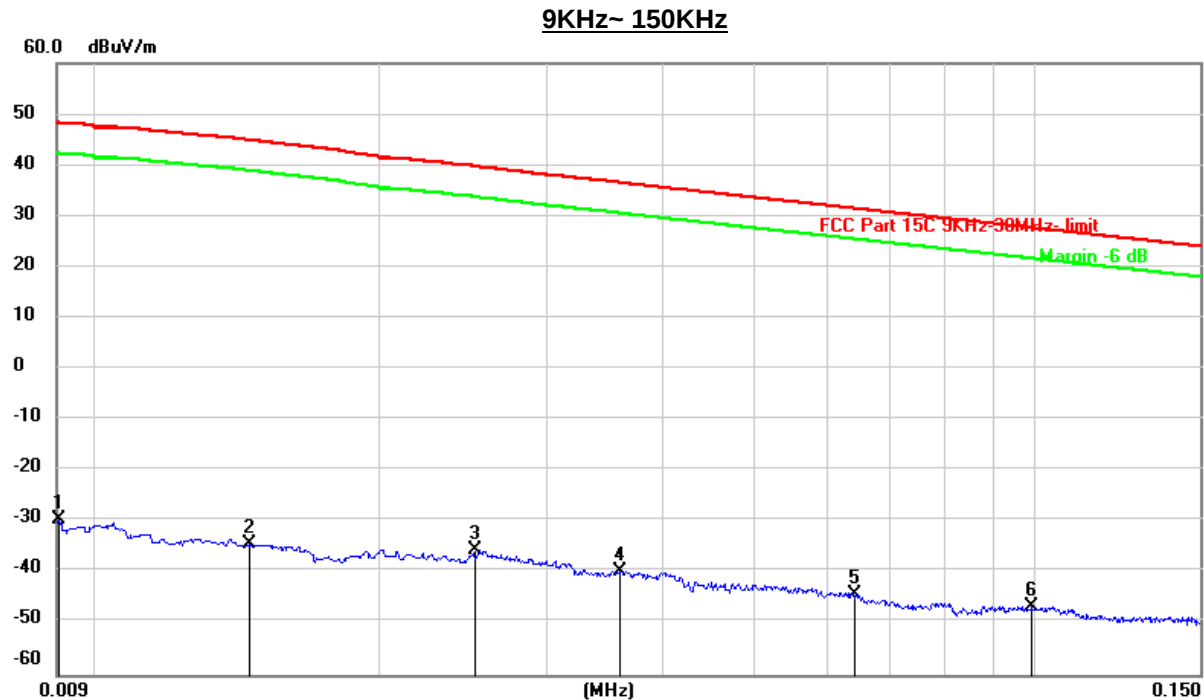


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.0091	71.79	-101.33	-29.54	48.29	-77.83	peak
2	0.0145	67.05	-101.38	-34.33	44.89	-79.22	peak
3	0.0252	65.82	-101.37	-35.55	39.75	-75.30	peak
4	0.0359	61.72	-101.42	-39.70	36.59	-76.29	peak
5	0.0641	57.21	-101.54	-44.33	31.49	-75.82	peak
6	0.0994	55.20	-101.80	-46.60	27.66	-74.26	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

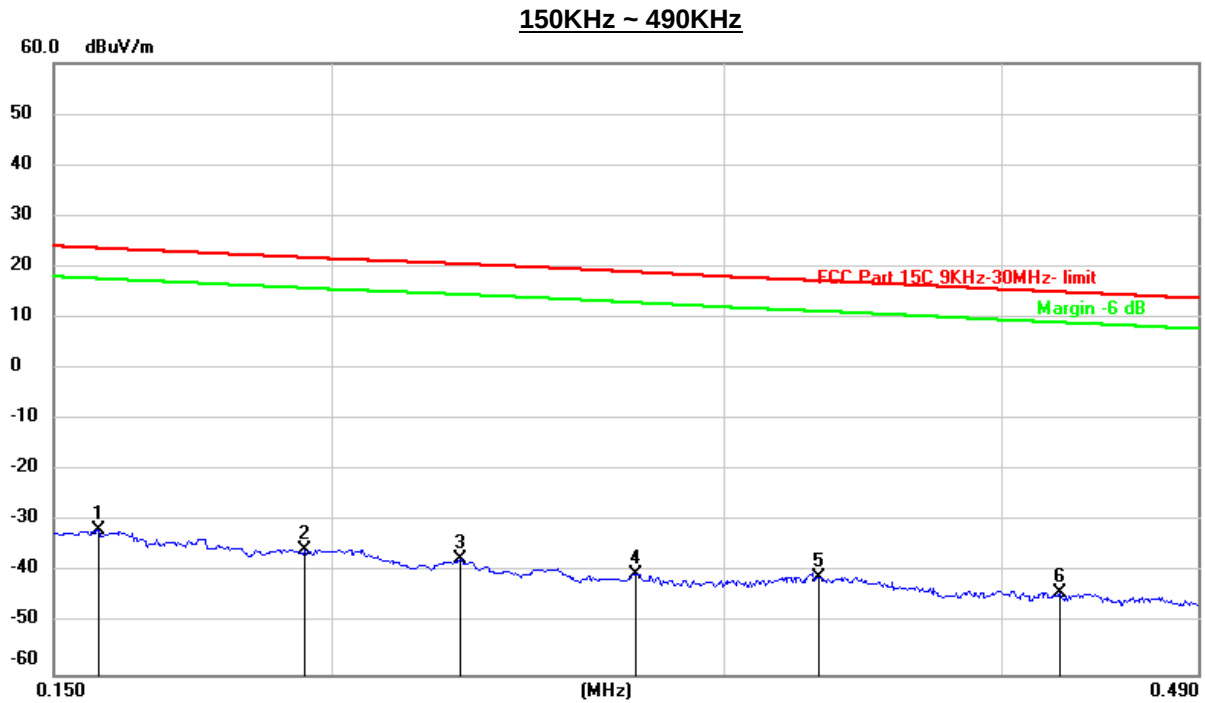


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1570	70.03	-101.65	-31.62	23.69	-55.31	peak
2	0.1945	66.19	-101.70	-35.51	21.83	-57.34	peak
3	0.2285	64.40	-101.77	-37.37	20.58	-57.95	peak
4	0.2736	61.58	-101.83	-40.25	18.99	-59.24	peak
5	0.3311	60.98	-101.88	-40.90	17.28	-58.18	peak
6	0.4247	58.08	-101.99	-43.91	15.08	-58.99	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



490KHz~ 30MHz

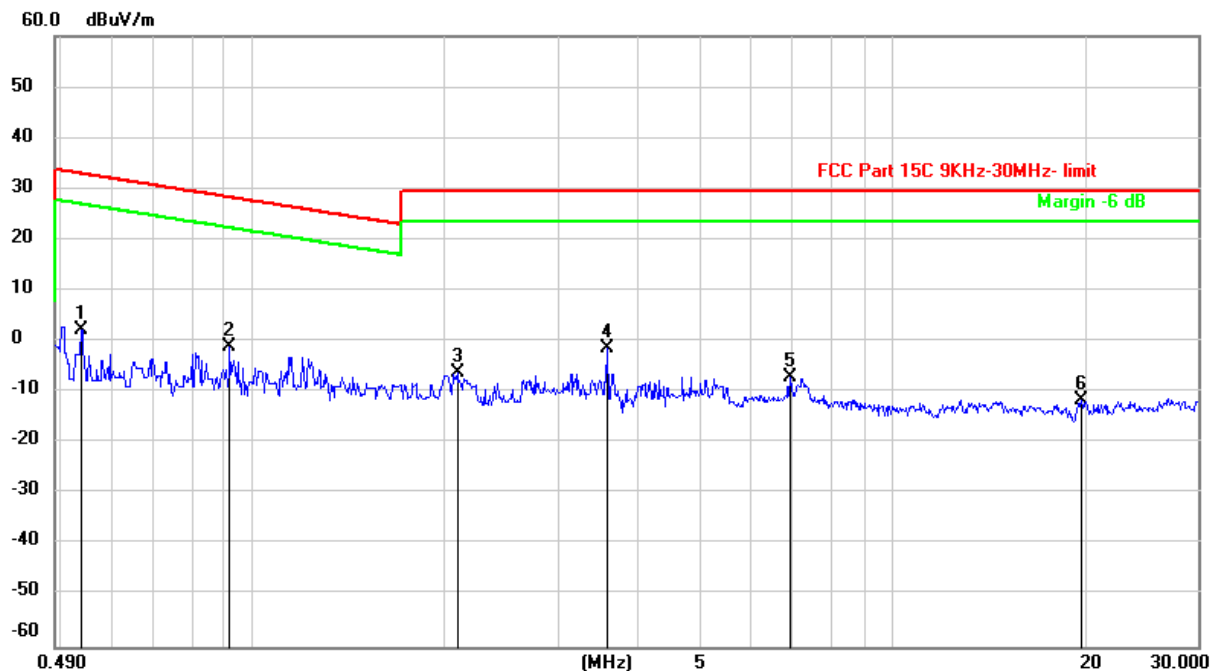

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5383	64.44	-62.08	2.36	33.03	-30.67	peak
2	0.9193	61.04	-62.22	-1.18	28.34	-29.52	peak
3	2.0853	55.57	-61.80	-6.23	29.54	-35.77	peak
4	3.5886	60.19	-61.43	-1.24	29.54	-30.78	peak
5	6.9230	54.13	-61.22	-7.09	29.54	-36.63	peak
6	19.7895	49.42	-60.84	-11.42	29.54	-40.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

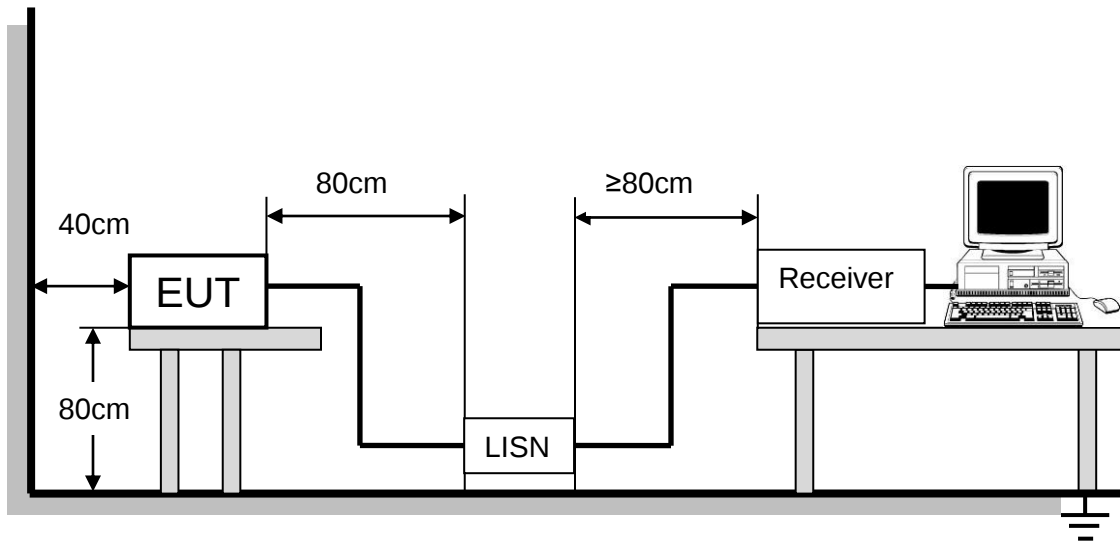


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.



LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

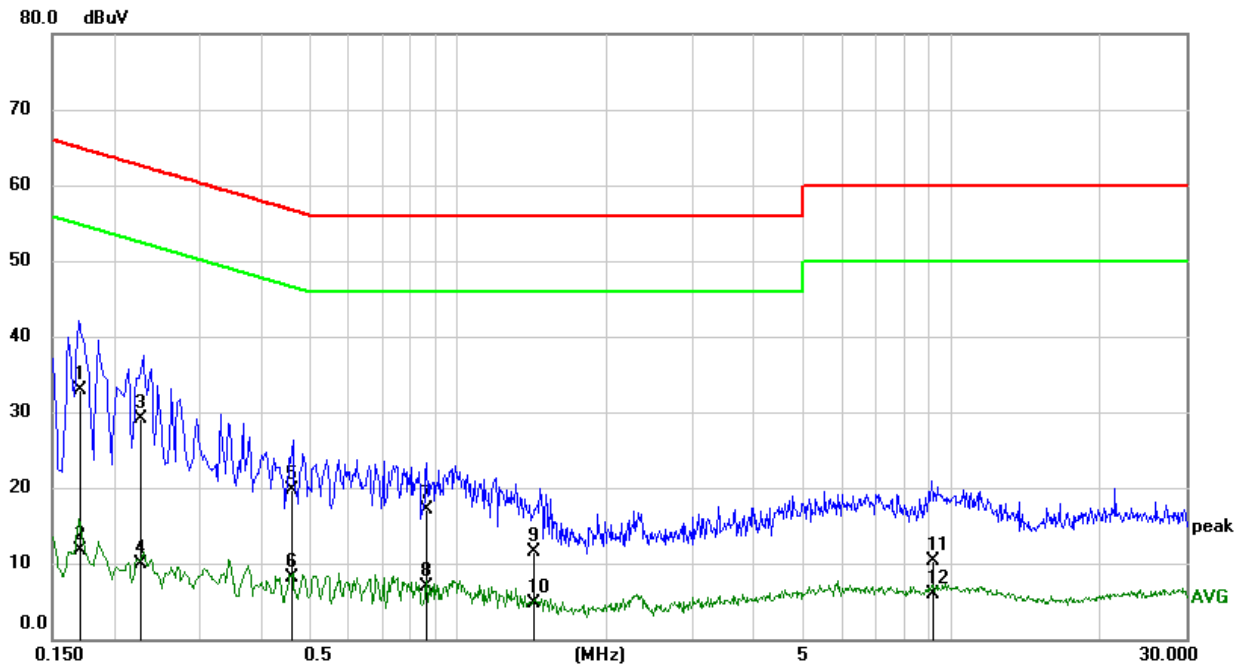


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1703	23.23	9.61	32.84	64.95	-32.11	QP
2	0.1703	2.09	9.61	11.70	54.95	-43.25	AVG
3	0.2261	19.42	9.60	29.02	62.59	-33.57	QP
4	0.2261	0.40	9.60	10.00	52.59	-42.59	AVG
5	0.4581	10.01	9.60	19.61	56.73	-37.12	QP
6	0.4581	-1.41	9.60	8.19	46.73	-38.54	AVG
7	0.8599	7.59	9.60	17.19	56.00	-38.81	QP
8	0.8599	-2.73	9.60	6.87	46.00	-39.13	AVG
9	1.4230	1.97	9.61	11.58	56.00	-44.42	QP
10	1.4230	-4.91	9.61	4.70	46.00	-41.30	AVG
11	9.1996	0.54	9.73	10.27	60.00	-49.73	QP
12	9.1996	-3.73	9.73	6.00	50.00	-44.00	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

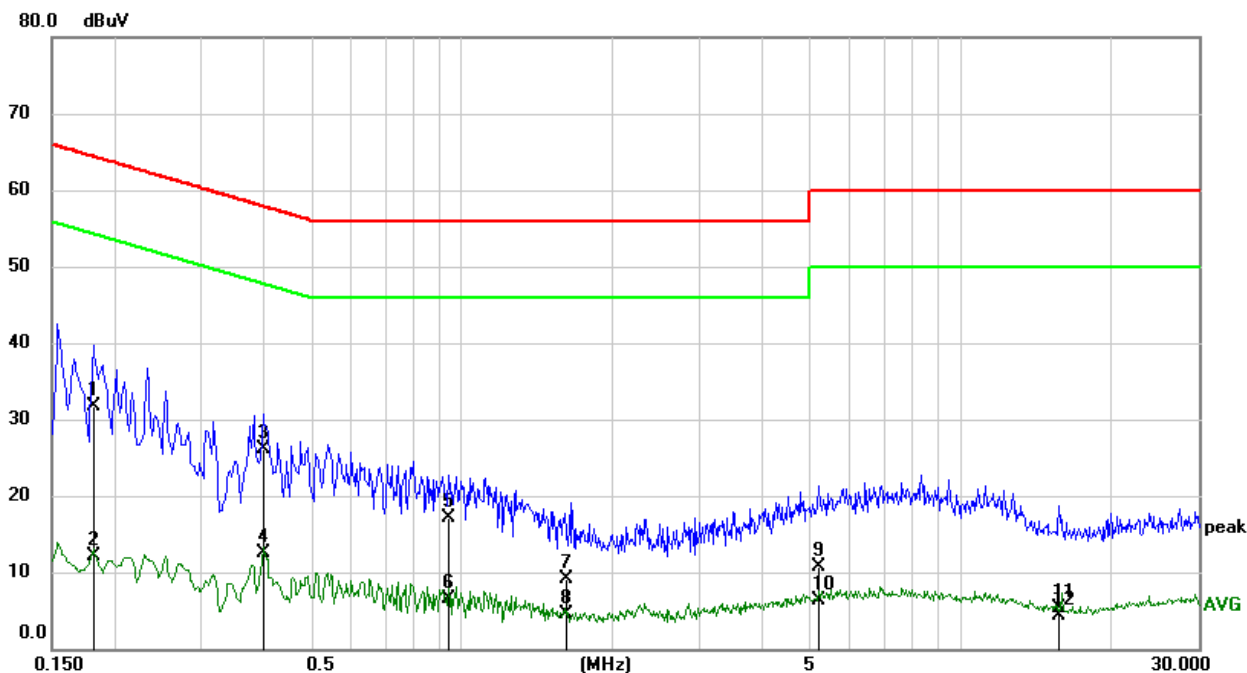

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1813	22.13	9.60	31.73	64.43	-32.70	QP
2	0.1813	2.46	9.60	12.06	54.43	-42.37	AVG
3	0.4004	16.55	9.60	26.15	57.85	-31.70	QP
4	0.4004	2.85	9.60	12.45	47.85	-35.40	AVG
5	0.9367	7.54	9.60	17.14	56.00	-38.86	QP
6	0.9367	-3.11	9.60	6.49	46.00	-39.51	AVG
7	1.6162	-0.49	9.62	9.13	56.00	-46.87	QP
8	1.6162	-5.11	9.62	4.51	46.00	-41.49	AVG
9	5.2234	1.10	9.67	10.77	60.00	-49.23	QP
10	5.2234	-3.46	9.67	6.21	50.00	-43.79	AVG
11	15.7807	-4.60	9.94	5.34	60.00	-54.66	QP
12	15.7807	-5.69	9.94	4.25	50.00	-45.75	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT