

Project No.: TM-2307000518P
Report No.: TMWK2307002626KR

FCC ID: 2ATKN-UG03

Page: 1 / 47
Rev.: 00

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Product name	EZYPRO ECG Monitoring System
Brand Name	EZYPRO
Model	UG03
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:



Shawn Wu
Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMWK2307002626KR

Page: 2 / 47

Rev.: 00

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 10, 2024	Initial Issue	ALL	Peggy Tsai

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION	4
1.2	EUT CHANNEL INFORMATION	5
1.3	ANTENNA INFORMATION	5
1.4	MEASUREMENT UNCERTAINTY.....	6
1.5	FACILITIES AND TEST LOCATION	7
1.6	INSTRUMENT CALIBRATION	8
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	9
1.8	TEST METHODOLOGY AND APPLIED STANDARDS	9
2.	TEST SUMMARY	10
3.	DESCRIPTION OF TEST MODES.....	11
3.1	THE WORST MODE OF OPERATING CONDITION	11
3.2	THE WORST MODE OF MEASUREMENT	12
3.3	EUT DUTY CYCLE	13
4.	TEST RESULT	14
4.1	AC POWER LINE CONDUCTED EMISSION	14
4.2	6DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)	19
4.3	OUTPUT POWER MEASUREMENT	23
4.4	POWER SPECTRAL DENSITY	25
4.5	CONDUCTED BAND EDGE AND SPURIOUS EMISSION	28
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION	32
APPENDIX 1 - PHOTOGRAPHS OF EUT		

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	Sigknow Biomedical Co., Ltd. 6F., No.760, Sec. 4, Bade Rd., Songshan Dist., Taipei City, 105 Taiwan
Manufacturer	Sigknow Biomedical Co., Ltd. 6F., No.760, Sec. 4, Bade Rd., Songshan Dist., Taipei City, 105 Taiwan
Equipment	EZYPRO ECG Monitoring System
Model No.	UG03
Model Discrepancy	N/A
Trade Name	EZYPRO
Received Date	July 27, 2023
Date of Test	July 28 ~ August 2, 2023
Power Supply	Adaptor I/P: 100-240Vac, 50/60Hz, 0.2A; O/P: 5Vdc, 1200mA, 6W DC5V, 0.5A (DC power port) DC 3.8V, 520mAh (Lithium battery)
HW Version	V2.2
SW Version	031R00100
RF Module	Microchip / BM71

Remark:

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	GFSK for BLE 1 Mbps
Number of channels	40 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☐ FPCB ☒ Chip ☐ Dipole ☐ Coils
Antenna Gain	Gain: 0.1 dBi
Antenna connector	N/A

Notes:

1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203.

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	± 2.213 dB
Channel Bandwidth	± 2.7 %
RF output power (Power Meter + Power sensor)	± 0.243 dB
Power Spectral density	± 2.739 dB
Conducted Bandedge	± 2.739 dB
Conducted Spurious Emission	± 2.742 dB
Radiated Emission_9kHz-30MHz	± 3.115 dB
Radiated Emission_30MHz-200MHz	± 4.071 dB
Radiated Emission_200MHz-1GHz	± 4.419 dB
Radiated Emission_1GHz-6GHz	± 5.023 dB
Radiated Emission_6GHz-18GHz	± 5.068 dB
Radiated Emission_18GHz-26GHz	± 3.349 dB
Radiated Emission_26GHz-40GHz	± 3.229 dB

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

Report No.: TMWK2307002626KR

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at

AC Powerline Conducted Emission and Conducted:

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.

Radiated emission 9kHz to 40GHz:

☐ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan.

☒ No. 12, Ln. 116, Wugong 3rd Rd., Wugu Dist., New Taipei City, Taiwan 24803

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Tony Chao	-
Radiation	Czerny Lin	-
RF Conducted	David Li	-

Remark: The lab has been recognized as the FCC accredited lab. under the KDB 974614 D01 and is listed in the FCC pubic Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Sensor	Anritsu	MA2490A	32910	2023-04-24	2024-04-23
EXA Signal Analyzer	Keysight	N9010B	MY55460167	2022-09-07	2023-09-06
Power Meter	Anritsu	ML2487A	6K00003260	2023-04-24	2024-04-23
Software	Radio Test Software Ver. 21				

Wugu 966 Chamber D					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Antenna	SHWARZBECK	VULB 9168	1277	2023-01-13	2024-01-12
Pre-Amplifier	EMCI	EMC118A45SE	980820	2022-12-23	2023-12-22
Pre-Amplifier	EMCI	EMC330N	980853	2022-12-23	2023-12-22
Coaxial Cable	EMC	EMC101G-KM-K M-9000	220407+211228 +230205	2023-03-21	2024-03-20
EXA Signal Analyzer	Agilent	N9010A	MY52220817	2023-03-09	2024-03-08
Coaxial Cable	EMC	EMCCFD400	211212+211222 +211020	2023-03-21	2024-03-20
High Pass Filter	TITAN	T04H300018000 70S01	211215-7-1	2023-02-02	2024-02-01
Thermo-Hygro Meter	EDSDS	EDS-A49	966D1	2023-05-11	2024-05-10
Pre-Amplifier	EMCI	EMC184045SE	980872	2023-01-03	2024-01-02
Horn Antenna	RF SPIN	DRH18-E	210301A18ES	2023-02-03	2024-02-02
Horn Antenna	SHWARZBECK	BBHA 9170	1134	2022-12-30	2023-12-29
Loop Antenna	SCHWARZBECK	FMZB 1513-60	1513-60-028	2022-12-27	2023-12-26
Software	e3 V9-210616c				

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
EMI Test Receiver	R&S	ESCI	100064	2023-06-07	2024-06-06
LISN	TESEQ	LN2-16N	22012	2023-03-08	2024-03-07
Cable	EMCI	CFD300-NL	CERF	2023-06-27	2024-06-26
Software	EZ-EMC(CCS-3A1-CE-WUGU)				

Remark:

- Each piece of equipment is scheduled for calibration once a year.
- N.C.R. = No Calibration Required.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC
1	SWITCHING POWER SUPPLY	GOE	GS2U-006-050-A	N/A	N/A	N/A

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(E)	Lenovo	T460	N/A	N/A
2	NB	Lenovo	IBM 7663	N/A	N/A

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247 and KDB 558074.

2. TEST SUMMARY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Band Edge	Pass
15.247(d)	4.5	Conducted Spurious Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	BLE Mode (1Mbps)
Test Channel Frequencies	1.Lowest Channel : 2402MHz 2.Middle Channel : 2440MHz 3.Highest Channel : 2480MHz

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by System Mode 2: EUT power by Adapter
Worst Mode	☒ Mode 1 ☒ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT Power by System
Worst Mode	☒ Mode 1
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☒ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT Power by System
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3

Remark:

1. The worst mode was record in this test report.
2. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.
3. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(Z-Plane) were recorded in this report

Report No.: TMWK2307002626KR

3.3 EUT DUTY CYCLE


Temperature: 24.9°C

Test date: July 28, 2023

Humidity: 53% RH

Tested by: David Li

Duty Cycle				
Configuration	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) = 10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
BLE 1M	65.60	1.83	2.44	3.00

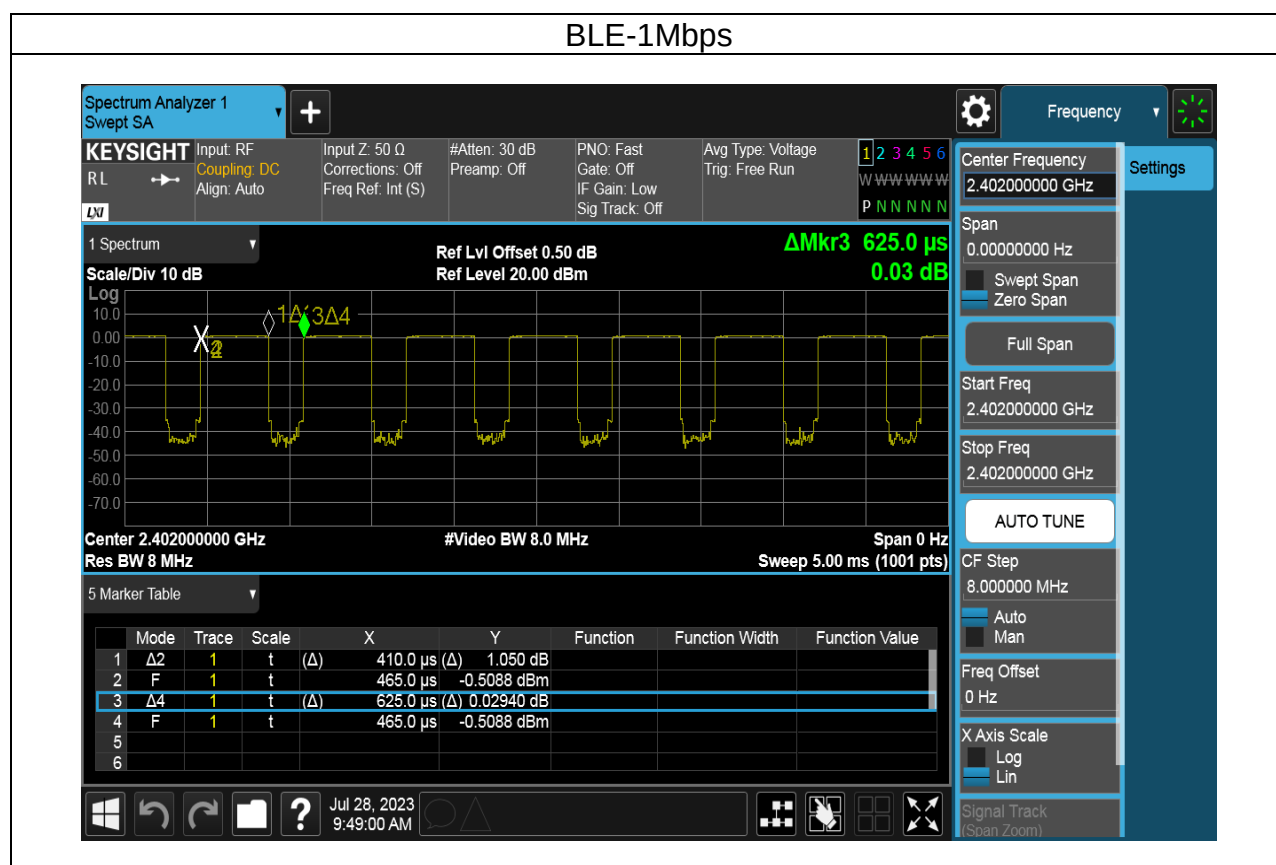

Report No.: TMWK2307002626KR

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed above horizontal ground plane and 0.4m above vertical ground plane
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

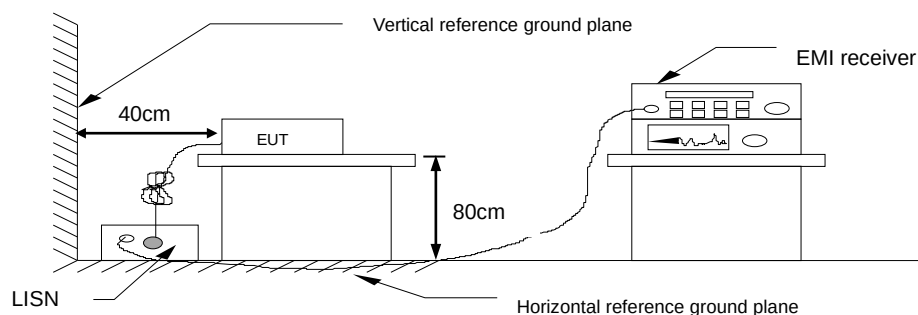


4.1.4 Test Result

Pass.

Report No.: TMWK2307002626KR

Test Data


Test Mode:	BLE 1M	Temp/Hum	25.6(°C)/ 56%RH
Phase:	Line	Test Date	August 2, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao
Test Mode:	Mode 1		

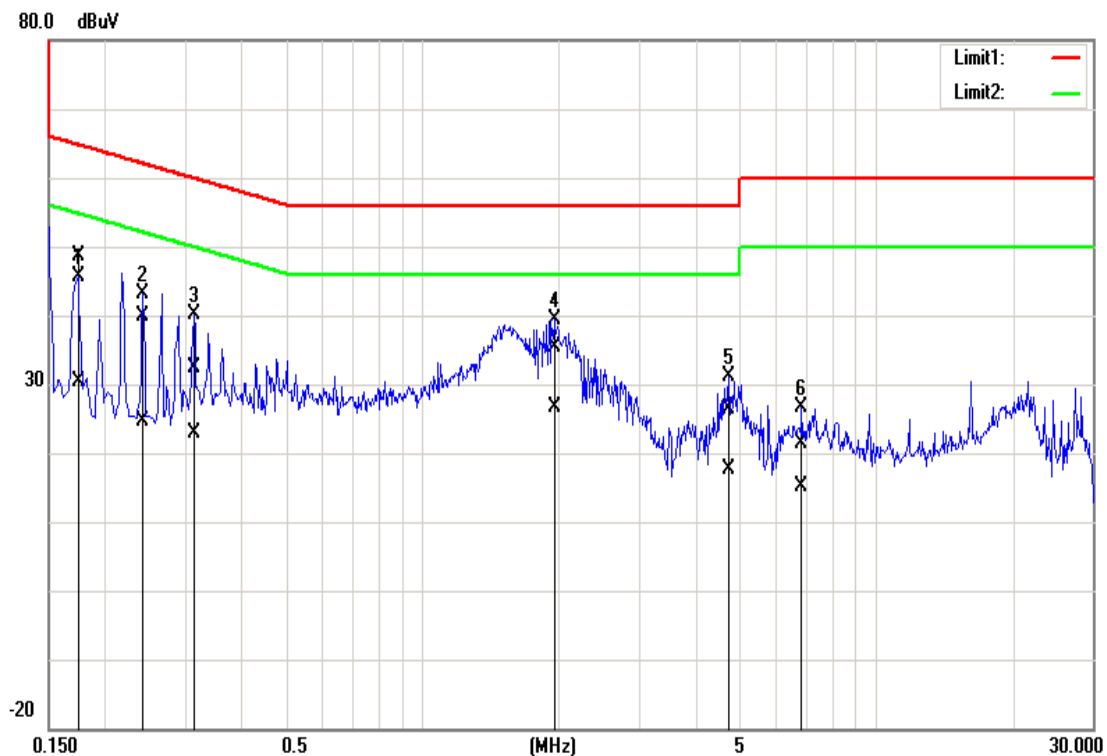

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1740	48.42	30.17	0.15	48.57	30.32	64.77	54.77	-16.20	-24.45	Pass
0.2420	39.67	24.36	0.15	39.82	24.51	62.03	52.03	-22.21	-27.52	Pass
0.3140	32.21	22.74	0.15	32.36	22.89	59.86	49.86	-27.50	-26.97	Pass
1.9500	35.25	26.42	0.22	35.47	26.64	56.00	46.00	-20.53	-19.36	Pass
4.7460	26.14	17.39	0.27	26.41	17.66	56.00	46.00	-29.59	-28.34	Pass
6.8620	20.97	14.91	0.30	21.27	15.21	60.00	50.00	-38.73	-34.79	Pass

Note: Correction factor = LISN loss + Cable loss.


Test Mode:	BLE 1M	Temp/Hum	25.6(°C)/ 56%RH
Phase:	Neutral	Test Date	August 2, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao
Test Mode:	Mode 1		

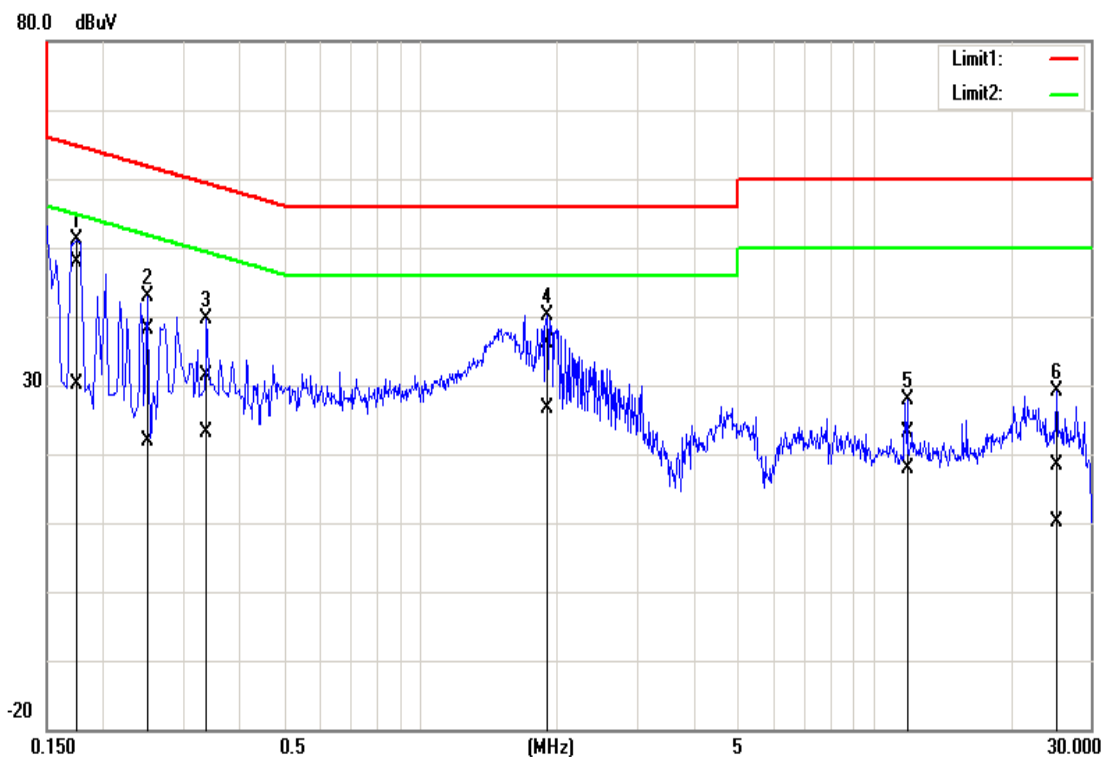

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1740	47.74	29.99	0.19	47.93	30.18	64.77	54.77	-16.84	-24.59	Pass
0.2500	37.93	21.73	0.19	38.12	21.92	61.76	51.76	-23.64	-29.84	Pass
0.3380	31.30	23.03	0.19	31.49	23.22	59.25	49.25	-27.76	-26.03	Pass
1.9060	35.89	26.36	0.26	36.15	26.62	56.00	46.00	-19.85	-19.38	Pass
11.8260	22.82	17.37	0.41	23.23	17.78	60.00	50.00	-36.77	-32.22	Pass
25.1940	17.69	9.61	0.57	18.26	10.18	60.00	50.00	-41.74	-39.82	Pass

Note: Correction factor = LISN loss + Cable loss.


Test Mode:	BLE 1M	Temp/Hum	25.6(°C)/ 56%RH
Phase:	Line	Test Date	August 2, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao
Test Mode:	Mode 2		

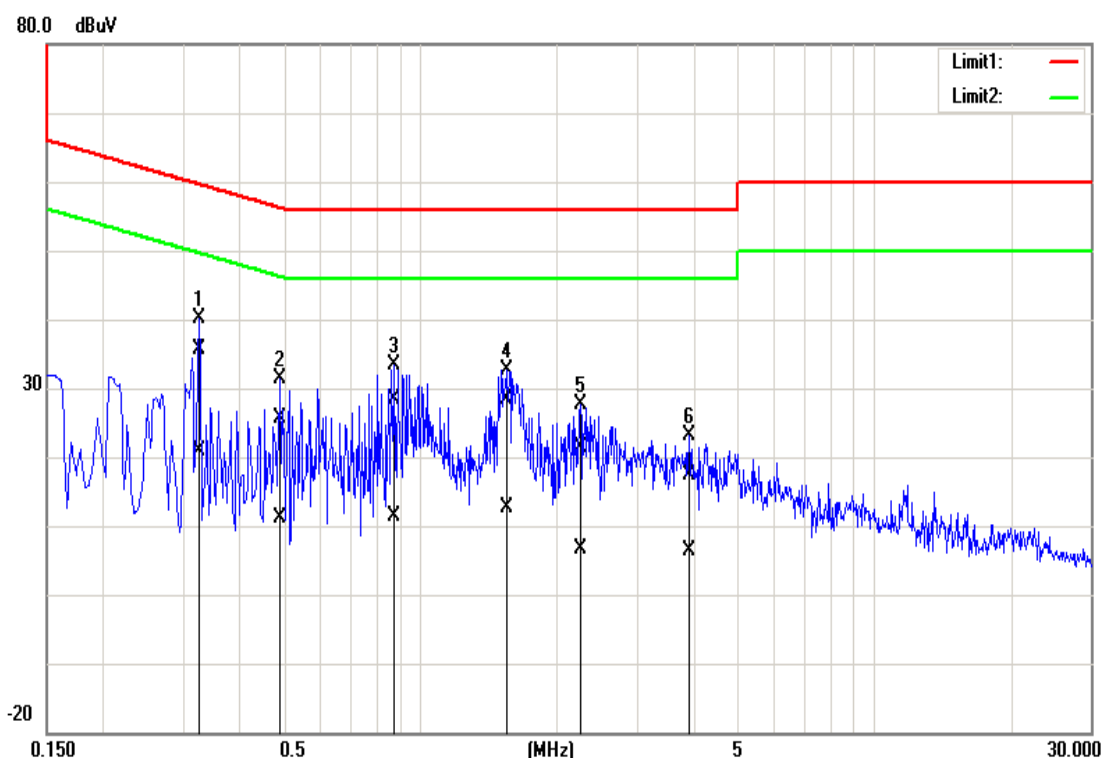

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.3260	35.37	20.61	0.15	35.52	20.76	59.55	49.55	-24.03	-28.79	Pass
0.4900	25.39	10.96	0.15	25.54	11.11	56.17	46.17	-30.63	-35.06	Pass
0.8780	28.16	11.22	0.16	28.32	11.38	56.00	46.00	-27.68	-34.62	Pass
1.5500	28.08	12.56	0.19	28.27	12.75	56.00	46.00	-27.73	-33.25	Pass
2.2500	21.18	6.48	0.22	21.40	6.70	56.00	46.00	-34.60	-39.30	Pass
3.9140	17.17	6.23	0.26	17.43	6.49	56.00	46.00	-38.57	-39.51	Pass

Note: Correction factor = LISN loss + Cable loss.

Test Mode:	BLE 1M	Temp/Hum	25.6(°C)/ 56%RH
Phase:	Neutral	Test Date	August 2, 2023
Test Voltage:	120Vac, 60Hz	Test Engineer	Tony Chao
Test Mode:	Mode 2		

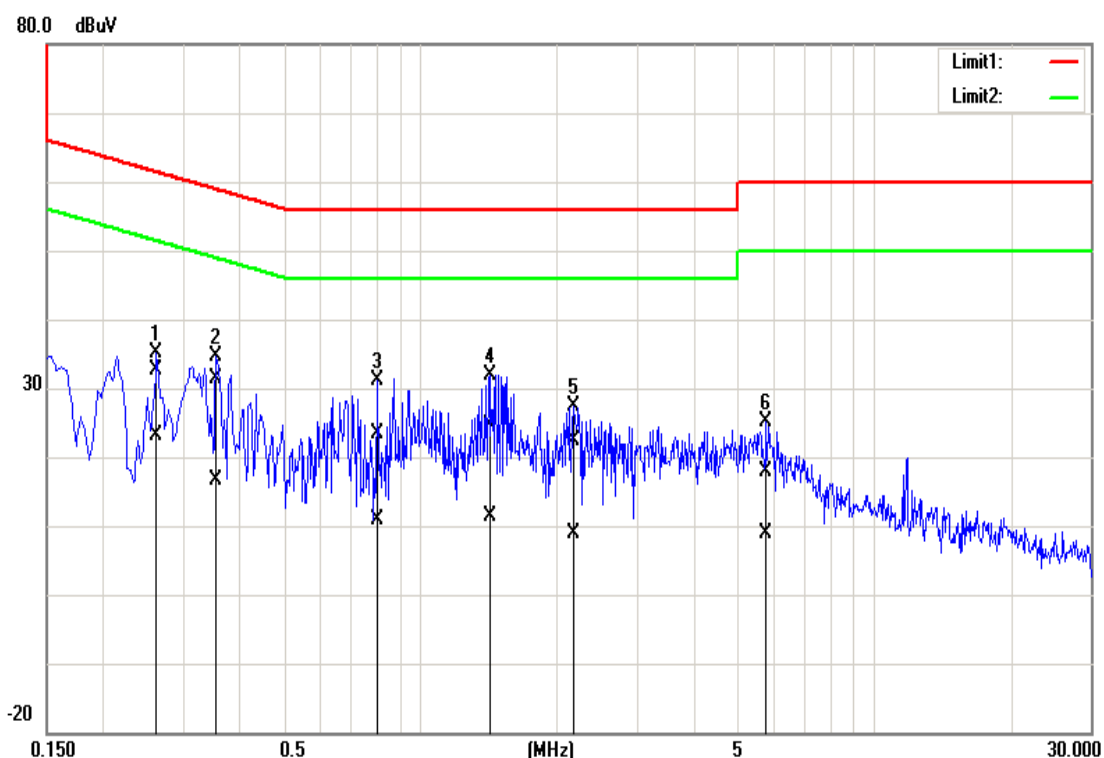

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.2620	32.44	22.88	0.19	32.63	23.07	61.37	51.37	-28.74	-28.30	Pass
0.3540	31.13	16.38	0.19	31.32	16.57	58.87	48.87	-27.55	-32.30	Pass
0.8020	23.10	10.74	0.21	23.31	10.95	56.00	46.00	-32.69	-35.05	Pass
1.4220	24.38	11.14	0.23	24.61	11.37	56.00	46.00	-31.39	-34.63	Pass
2.1780	22.04	8.74	0.26	22.30	9.00	56.00	46.00	-33.70	-37.00	Pass
5.7860	17.56	8.63	0.33	17.89	8.96	60.00	50.00	-42.11	-41.04	Pass

Note: Correction factor = LISN loss + Cable loss.

Report No.: TMWK2307002626KR

4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

4.2.1 Test Limit

According to §15.247(a)(2)

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as ANSI C63.10: 2013,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. SA set RBW = 100KHz, VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

4.2.3 Test Setup

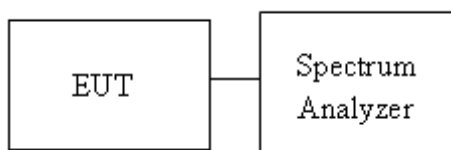

4.2.4 Test Result

Temperature: 24.9°C

Test date: July 28, 2023

Humidity: 53% RH

Tested by: David Li


Test mode: BLE-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (kHz)	6dB limit (kHz)
Low	2402	1.0769	0.6903	≥500
Mid	2440	1.074	0.688	
High	2480	1.0707	0.6866	

Test Data


6dB BANDWIDTH

BLE-1Mbps mode


Low CH

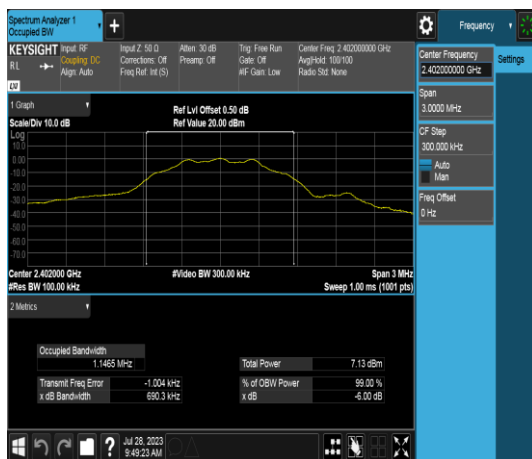

Mid CH

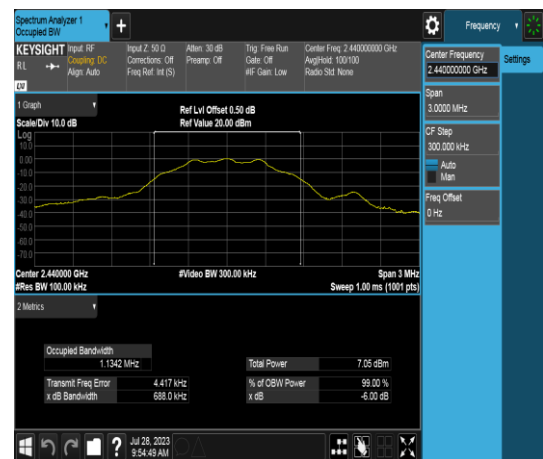


High CH

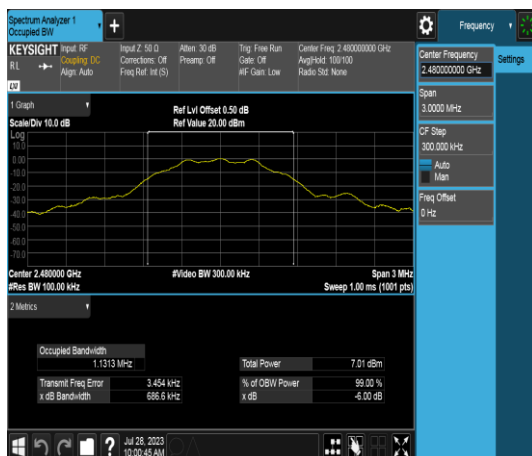

Test Data

BANDWIDTH (99%)

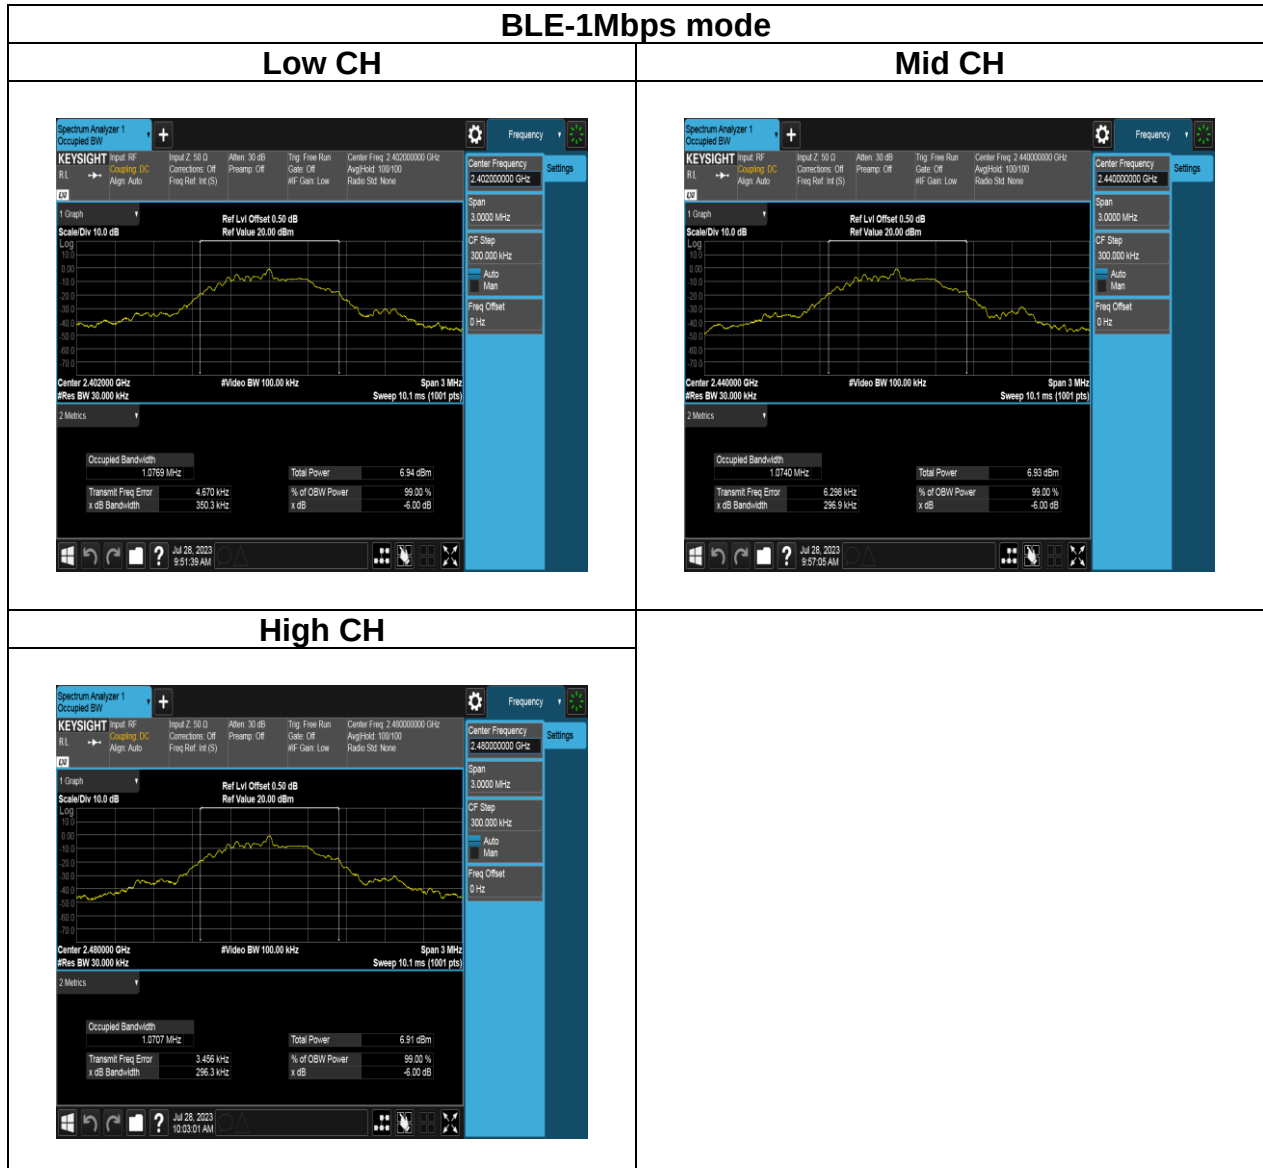

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)(3)

Peak output power :

FCC

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement,

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] ☐ Point-to-point operation
-------	---


Average output power : For reporting purposes only.

4.3.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup



Report No.: TMWK2307002626KR

4.3.4 Test Result

Temperature: 24.9°C

Test date: July 28, 2023

Humidity: 53% RH

Tested by: David Li

Peak output power :

BLE 1M mode:

CH	Frequency (MHz)	Power set	Peak Output Power (dBm)	Required Limit (dBm)
Low	2402	default	1.24	30
Mid	2440	default	1.09	30
High	2480	default	0.86	30

Average output power :

BLE 1M mode:

CH	Frequency (MHz)	Power set	Avg. Output Power (dBm)	Required Limit (dBm)
Low	2402	default	0.87	30
Mid	2440	default	0.80	30
High	2480	default	0.70	30

Note:

Measured by power meter, cable loss + Duty cycle factor has been offsetted to the power meter for Avg. power and cable loss has been offsetted for Peak power measurement.

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

4.4.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup



4.4.4 Test Result

Temperature: 24.9°C

Test date: July 28, 2023

Humidity: 53% RH

Tested by: David Li


BLE 1M mode

Frequency (MHz)	RF Power Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2402	-13.280	8	PASS
2440	-13.110	8	PASS
2480	-12.910	8	PASS


Test Data

BLE-1Mbps mode


Low CH

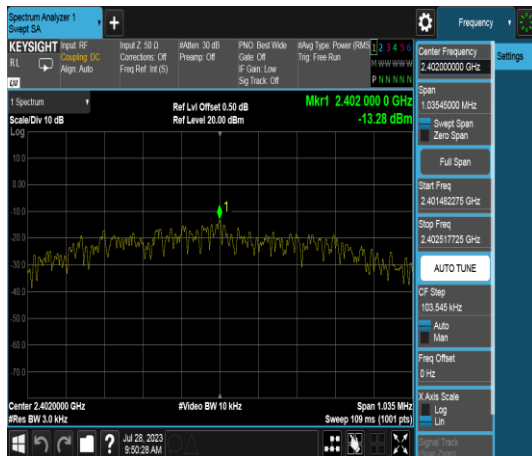

Mid CH

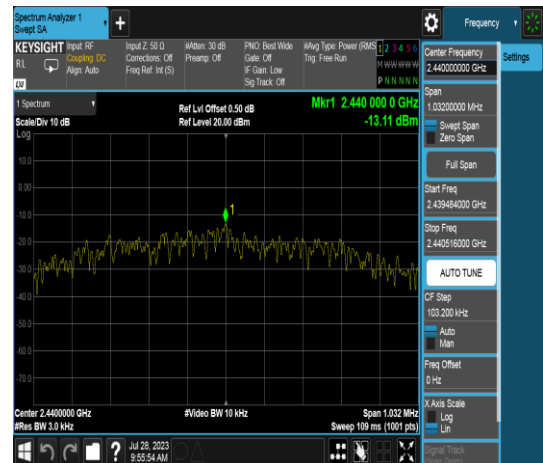

High CH

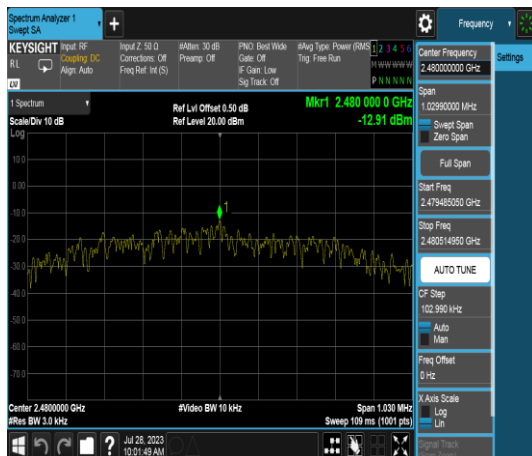

4.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.247(d)

FCC: In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

4.5.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

4.5.3 Test Setup



Report No.: TMWK2307002626KR

4.5.4 Test Result

Test Data

Temperature: 24.9°C

Test date: July 28, 2023

Humidity: 53% RH

Tested by: David Li

BLE-1Mbps mode Low CH

Reference Level



Band Edge




Spurious Emission 30MHz-25GHz



BLE-1Mbps mode Mid CH

Reference Level

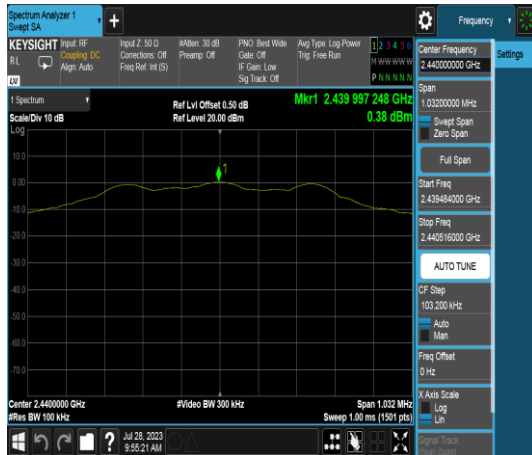


Spurious Emission 30MHz-25GHz



BLE-1Mbps mode High CH

Reference Level

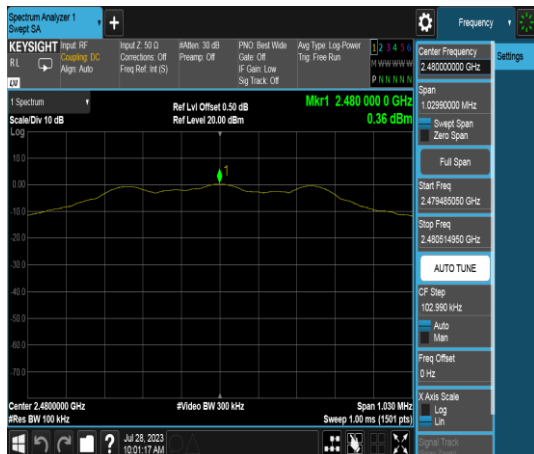

Band Edge



Spurious Emission 30MHz-25GHz



4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.6.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

3. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - *If Duty Cycle $\geq$ 98%, VBW=10Hz.
 - *If Duty Cycle < 98%, VBW=1/T.


4. Data result

Actual FS=Spectrum Reading Level+Factor


Margin=Actual FS- Limit

4.6.3 Test Setup


9kHz ~ 30MHz

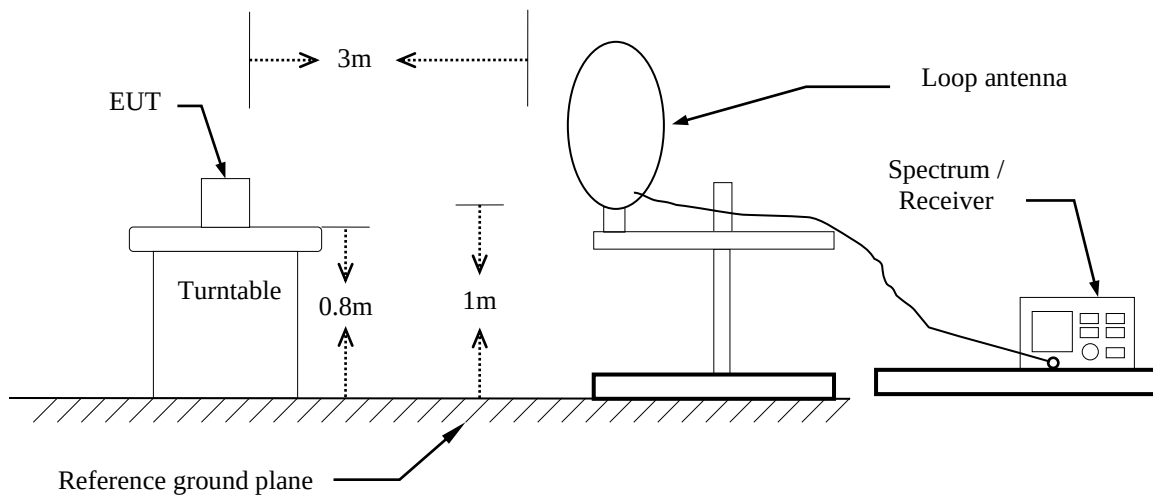

30MHz ~ 1GHz

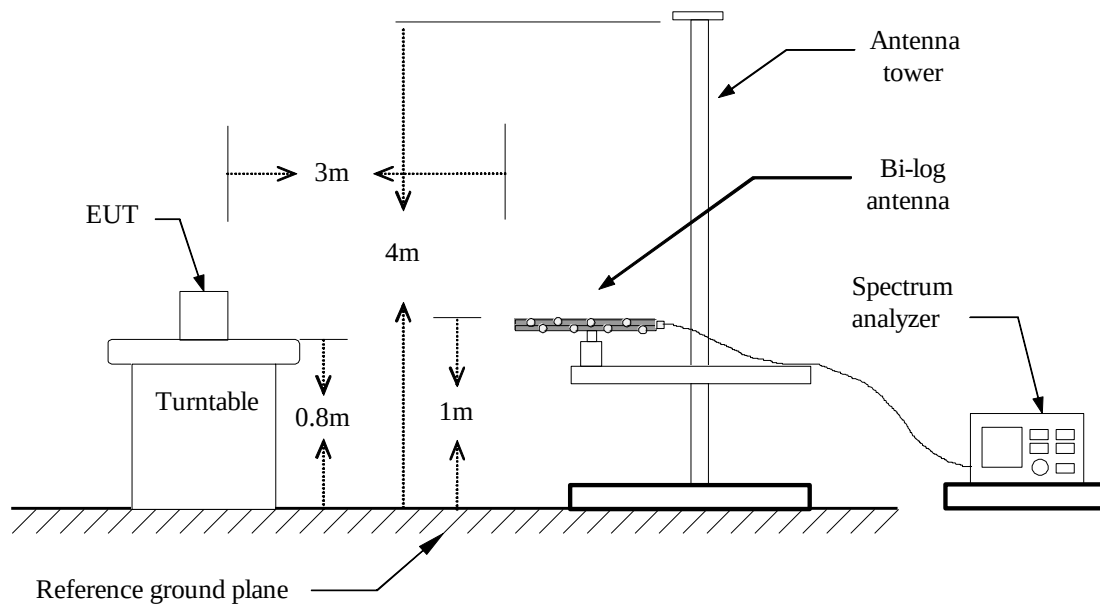


Above 1 GHz

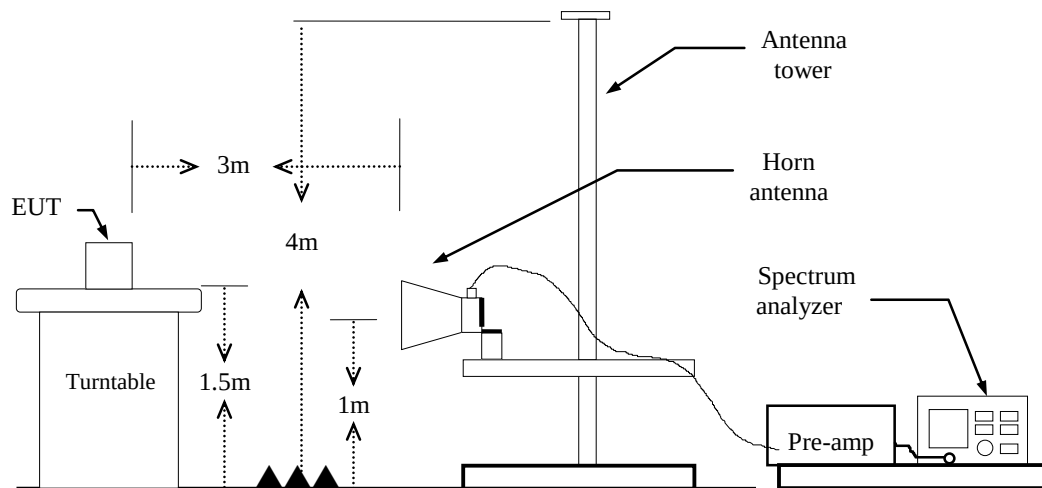

4.6.4 Test Result


Band Edge Test Data

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Band Edge	Test Date	July 31, 2023
Polarize	Vertical	Test Engineer	Czerny.Lin
Detector	Peak / Average		

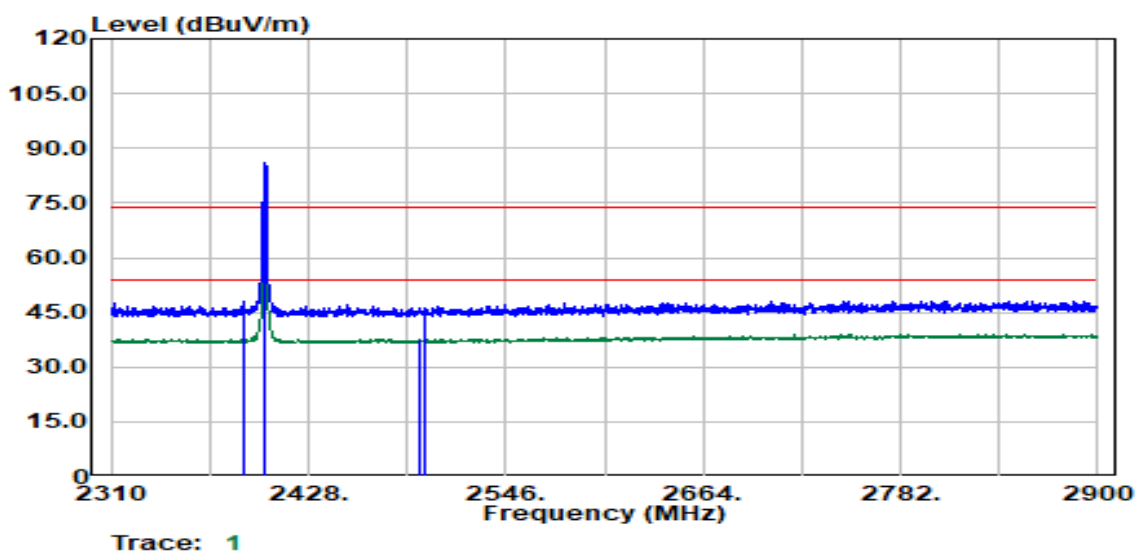


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2389.53	Peak	43.24	4.80	48.04	74.00	-25.96
2389.78	Average	32.80	4.80	37.61	54.00	-16.39
2402.00	Peak	81.49	4.51	86.00	--	--
2402.00	Average	80.89	4.51	85.40	--	--
2495.08	Average	33.11	4.60	37.71	54.00	-16.29
2497.58	Peak	41.61	4.63	46.24	74.00	-27.76

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Band Edge	Test Date	July 31, 2023
Polarize	Horizontal	Test Engineer	Czerny.Lin
Detector	Peak / Average		

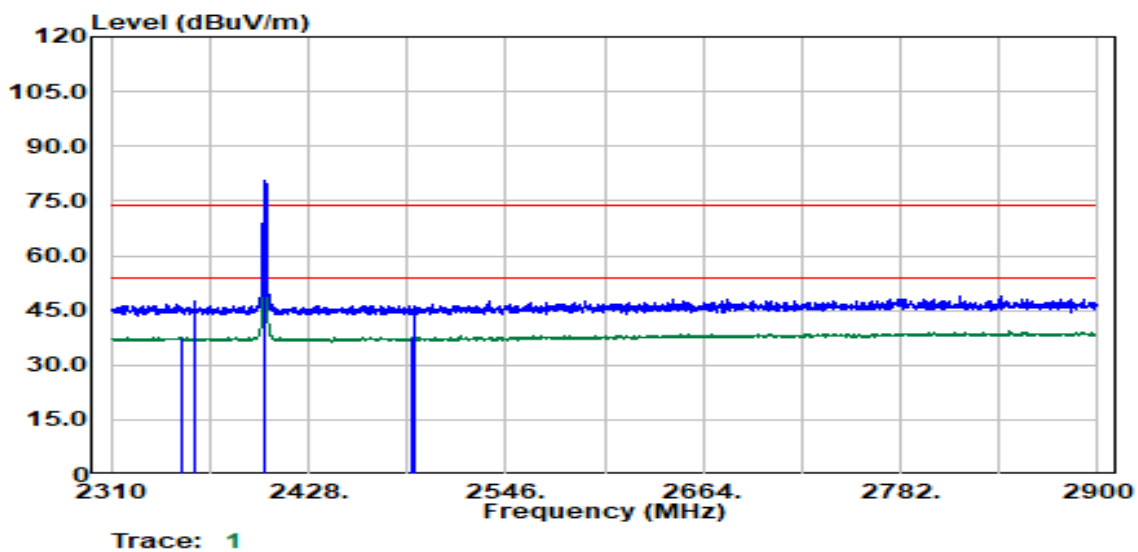


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2352.77	Average	32.93	4.85	37.79	54.00	-16.21
2359.52	Peak	42.78	4.79	47.57	74.00	-26.43
2402.00	Peak	76.12	4.51	80.63	--	--
2402.00	Average	75.47	4.51	79.98	--	--
2489.83	Average	32.94	4.55	37.49	54.00	-16.51
2490.83	Peak	41.57	4.56	46.12	74.00	-27.88

Test Mode:	BLE-1Mbps High CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Band Edge	Test Date	July 31, 2023
Polarize	Vertical	Test Engineer	Czerny.Lin
Detector	Peak / Average		

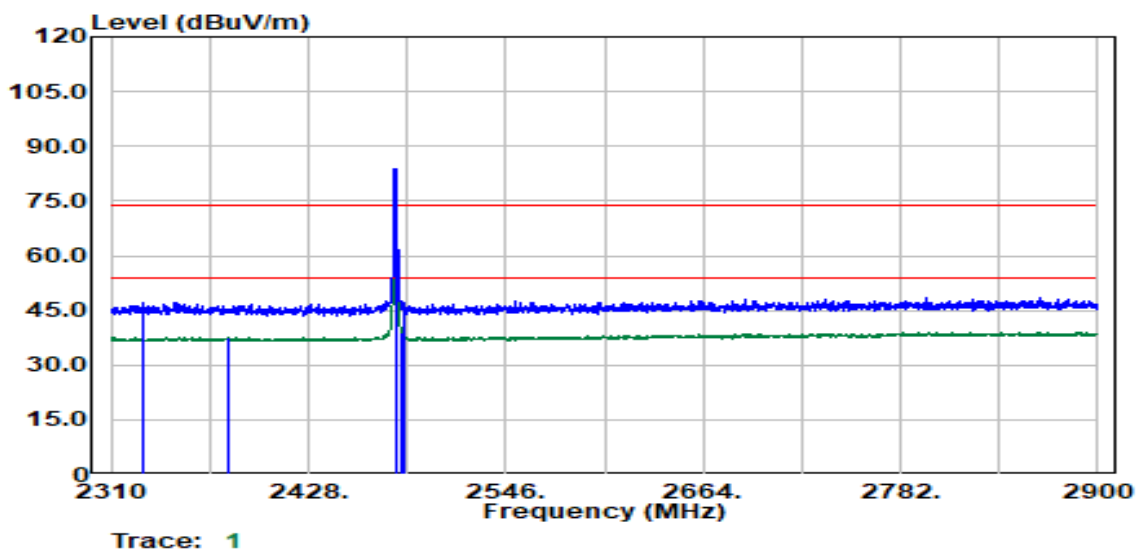

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2329.76	Peak	42.46	4.66	47.12	74.00	-26.88
2379.53	Average	32.91	4.79	37.70	54.00	-16.30
2480.00	Peak	79.26	4.65	83.91	--	--
2480.00	Average	78.63	4.65	83.28	--	--
2483.57	Average	34.45	4.61	39.06	54.00	-14.94
2484.57	Peak	42.47	4.60	47.07	74.00	-26.93


Test Mode:	BLE-1Mbps High CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Band Edge	Test Date	July 31, 2023
Polarize	Horizontal	Test Engineer	Czerny.Lin
Detector	Peak / Average		

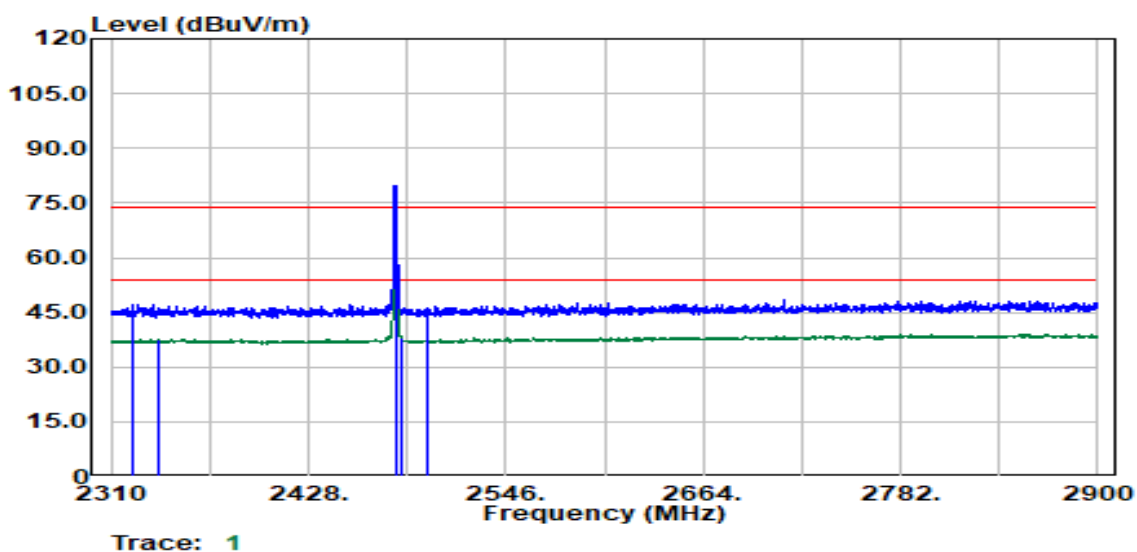

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
2323.01	Peak	42.39	4.66	47.05	74.00	-26.95
2337.76	Average	32.91	4.75	37.65	54.00	-16.35
2480.00	Peak	75.02	4.65	79.67	--	--
2480.00	Average	74.33	4.65	78.98	--	--
2483.57	Average	33.42	4.61	38.04	54.00	-15.96
2499.08	Peak	41.39	4.64	46.03	74.00	-27.97

Below 1G Test Data


Test Mode:	BLE-1Mbps Low CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	30MHz-1GHz	Test Date	July 31, 2023
Polarize	Vertical	Test Engineer	Czerny.Lin
Detector	Peak		

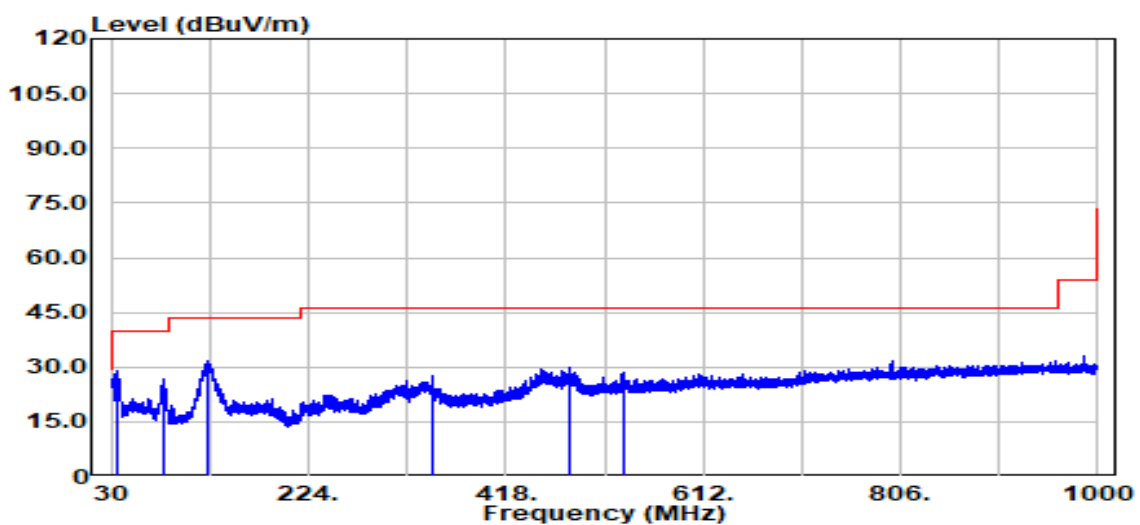

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
36.89	Peak	42.57	-13.81	28.76	40.00	-11.24
81.12	Peak	44.65	-18.08	26.57	40.00	-13.43
124.48	Peak	46.92	-15.07	31.85	43.50	-11.65
345.64	Peak	38.61	-11.18	27.43	46.00	-18.57
479.98	Peak	37.64	-7.82	29.82	46.00	-16.18
533.24	Peak	35.15	-6.84	28.31	46.00	-17.69

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	30MHz-1GHz	Test Date	July 31, 2023
Polarize	Horizontal	Test Engineer	Czerny.Lin
Detector	Peak		

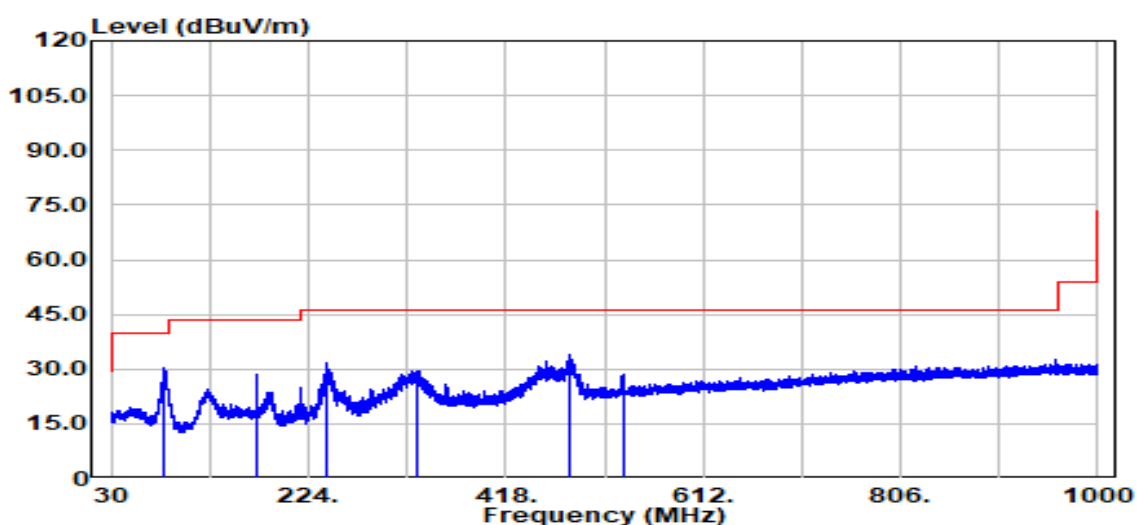


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
82.57	Peak	48.75	-18.27	30.48	40.00	-9.52
174.34	Peak	42.35	-13.82	28.53	43.50	-14.97
242.33	Peak	45.81	-14.14	31.67	46.00	-14.33
329.83	Peak	40.71	-11.37	29.34	46.00	-16.66
479.98	Peak	41.74	-7.82	33.92	46.00	-12.08
533.14	Peak	35.28	-6.84	28.44	46.00	-17.56

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1G Test Data

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Harmonic	Test Date	July 31, 2023
Polarize	Vertical	Test Engineer	Czerny.Lin
Detector	Peak / Average		

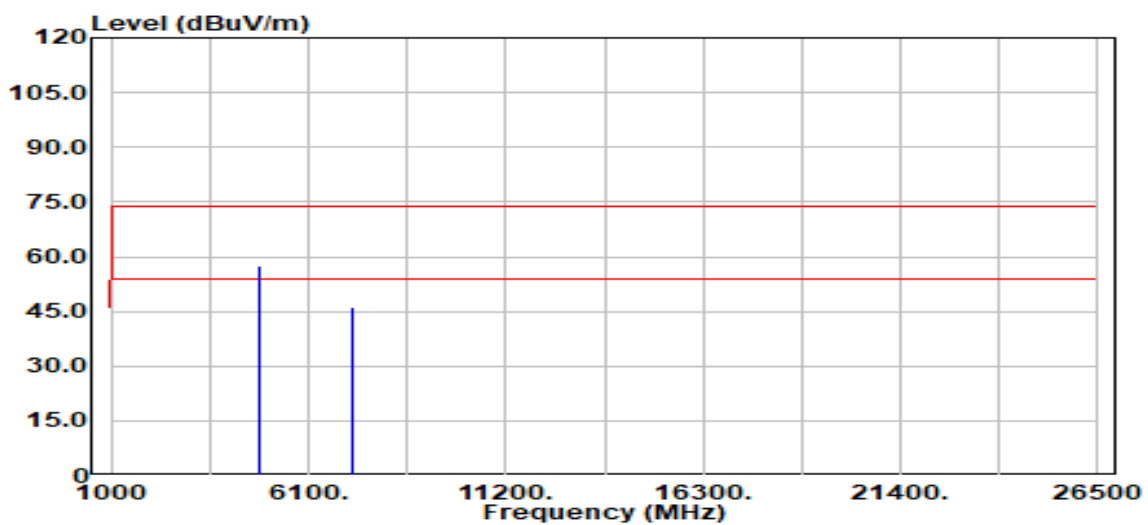


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4804.00	Peak	56.96	0.38	57.34	74.00	-16.66
4804.00	Average	51.86	0.38	52.25	54.00	-1.75
7206.00	Peak	41.06	5.33	46.39	74.00	-27.61
7206.00	Average	31.92	5.33	37.25	54.00	-16.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Harmonic	Test Date	July 31, 2023
Polarize	Horizontal	Test Engineer	Czerny.Lin
Detector	Peak / Average		

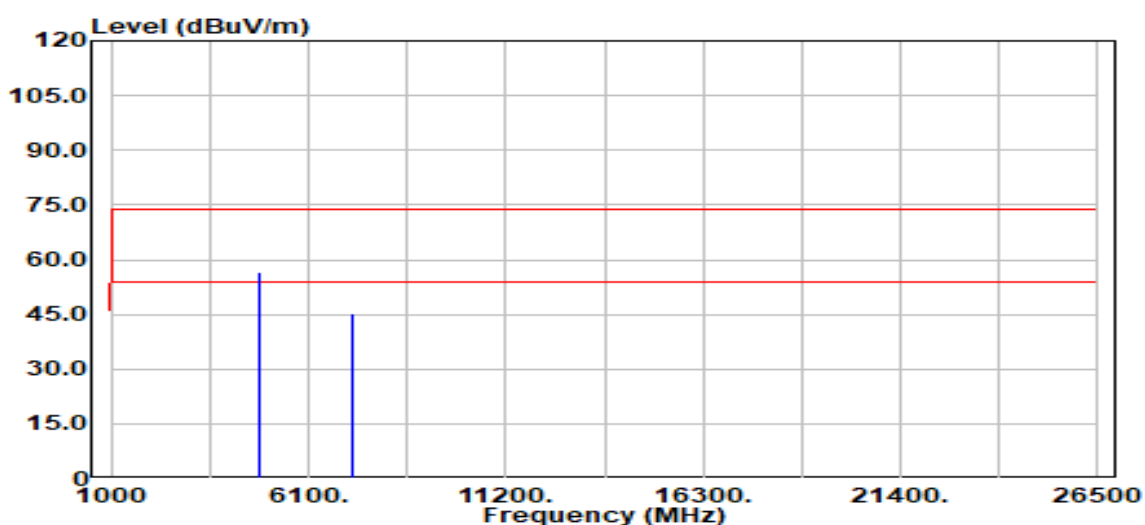


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4804.00	Peak	56.43	0.38	56.81	74.00	-17.19
4804.00	Average	51.88	0.38	52.26	54.00	-1.74
7206.00	Peak	40.17	5.33	45.50	74.00	-28.50
7206.00	Average	31.62	5.33	36.94	54.00	-17.06
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Harmonic	Test Date	July 31, 2023
Polarize	Vertical	Test Engineer	Czerny.Lin
Detector	Peak / Average		

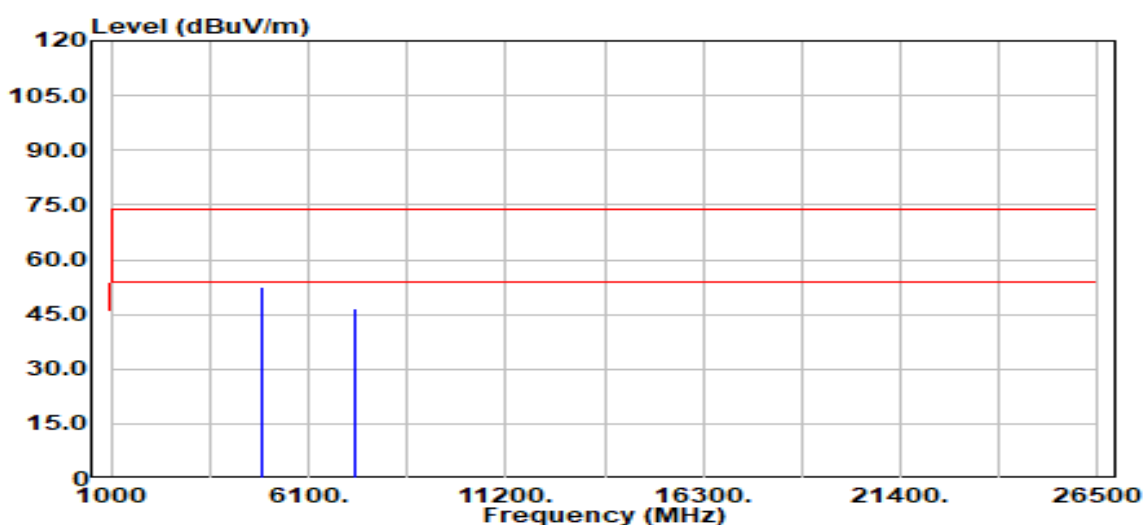


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4880.00	Peak	52.14	0.48	52.62	74.00	-21.38
4880.00	Average	48.58	0.48	49.07	54.00	-4.93
7320.00	Peak	41.01	5.48	46.49	74.00	-27.51
7320.00	Average	31.63	5.48	37.12	54.00	-16.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Harmonic	Test Date	July 31, 2023
Polarize	Horizontal	Test Engineer	Czerny.Lin
Detector	Peak / Average		

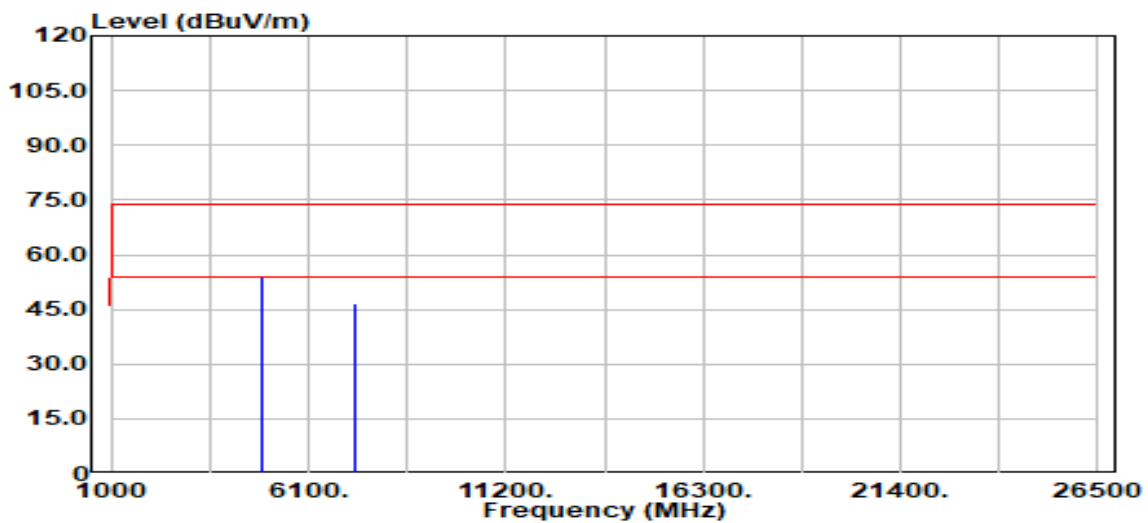


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4880.00	Peak	53.61	0.48	54.09	74.00	-19.91
4880.00	Average	48.88	0.48	49.37	54.00	-4.63
7320.00	Peak	41.06	5.48	46.54	74.00	-27.46
7320.00	Average	31.67	5.48	37.15	54.00	-16.85
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Harmonic	Test Date	July 31, 2023
Polarize	Vertical	Test Engineer	Czerny.Lin
Detector	Peak / Average		

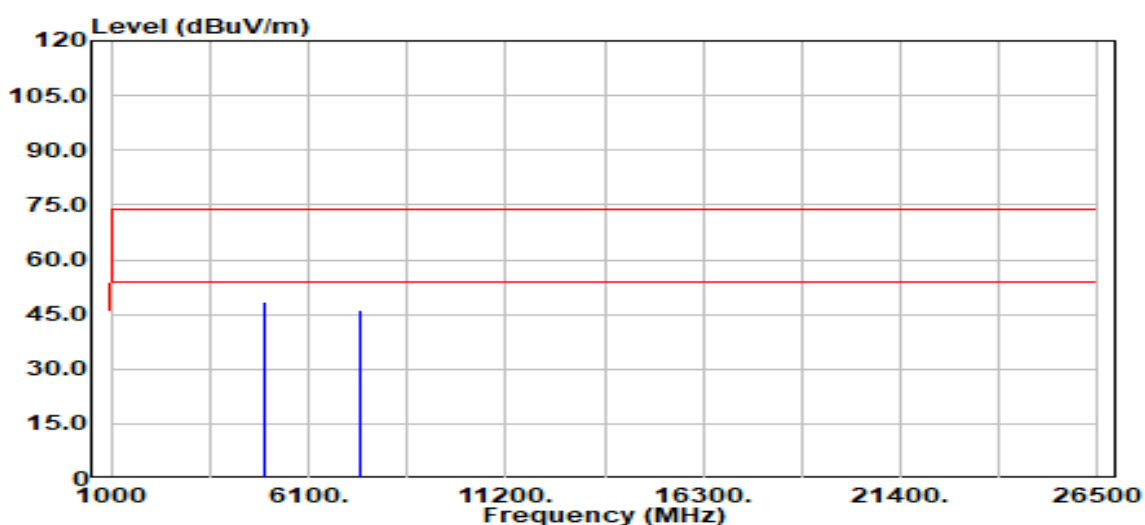


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4960.00	Peak	47.59	0.65	48.23	74.00	-25.77
4960.00	Average	41.75	0.65	42.40	54.00	-11.60
7440.00	Peak	40.82	5.56	46.38	74.00	-27.62
7440.00	Average	31.59	5.56	37.15	54.00	-16.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	24.4(°C) / 61%RH
Test Item	Harmonic	Test Date	July 31, 2023
Polarize	Horizontal	Test Engineer	Czerny.Lin
Detector	Peak / Average		

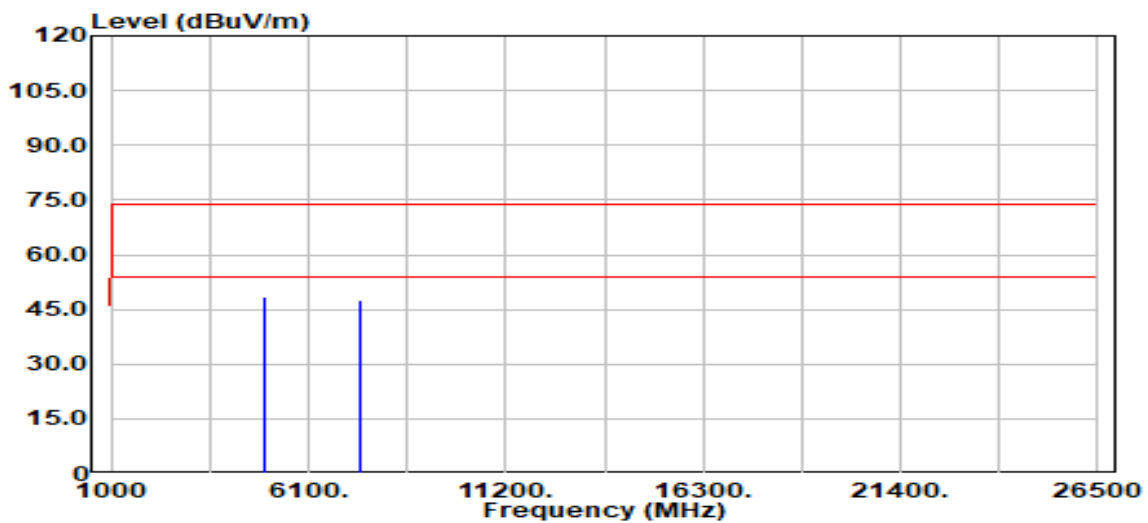

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4960.00	Peak	47.63	0.65	48.27	74.00	-25.73
4960.00	Average	41.90	0.65	42.55	54.00	-11.45
7440.00	Peak	41.84	5.56	47.41	74.00	-26.59
7440.00	Average	31.49	5.56	37.05	54.00	-16.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

--End of Test Report--