


6.10.4 Test data

Below 1GHz


Remark: During the test, pre-scan the GFSK, pi/4QPSK, 8DPSK mode, and found the 8DPSK mode middle channel which it is worse case.

[Test mode: TX]; [Polarity: Horizontal]

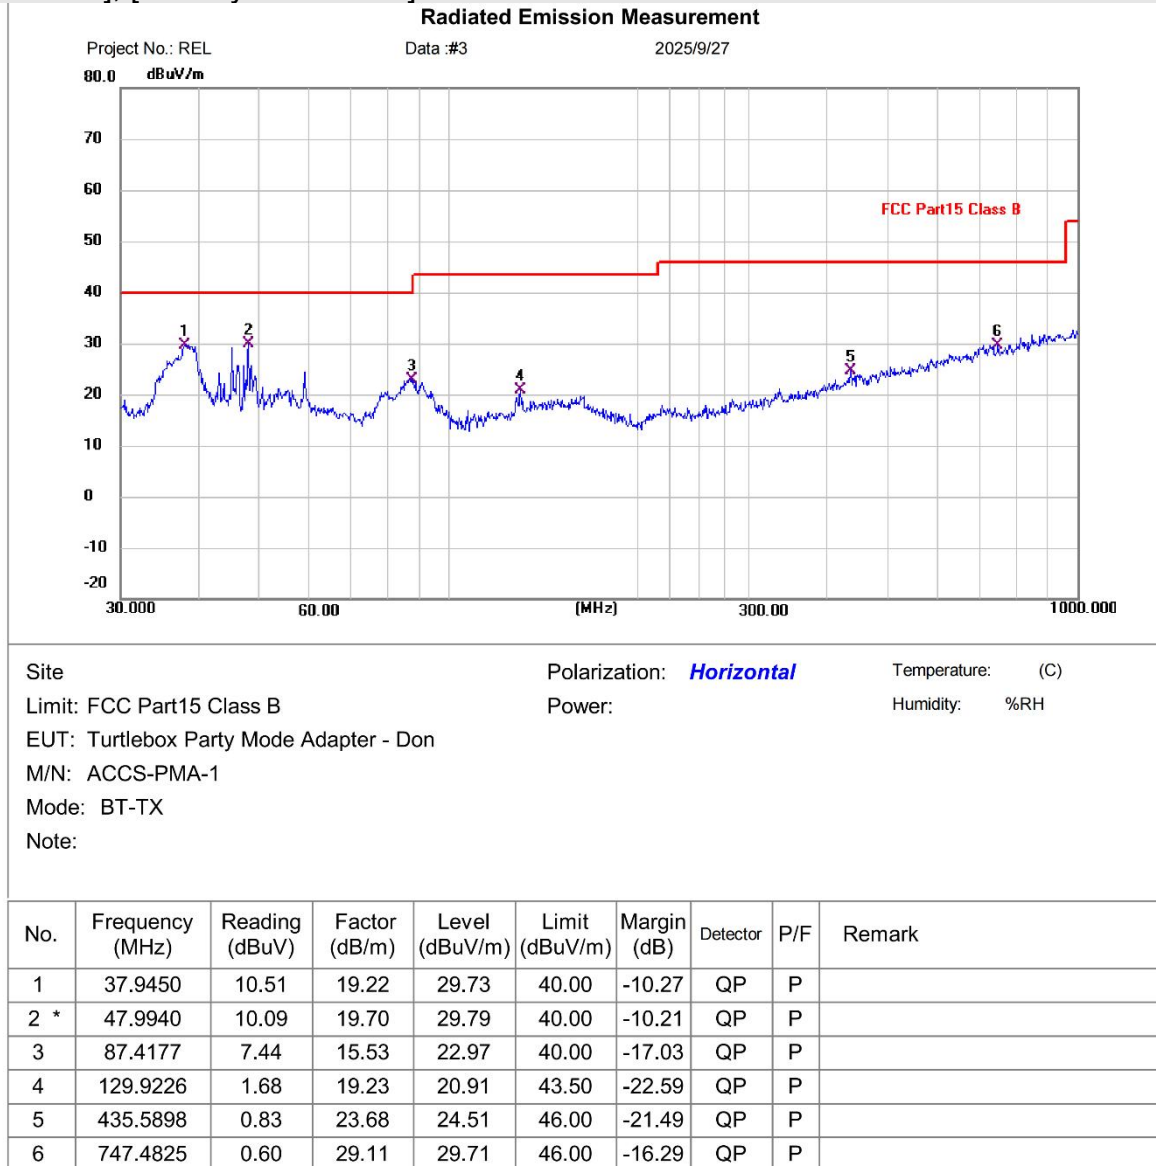

Test Result: Pass

[Test mode: TX]; [Polarity: Vertical]

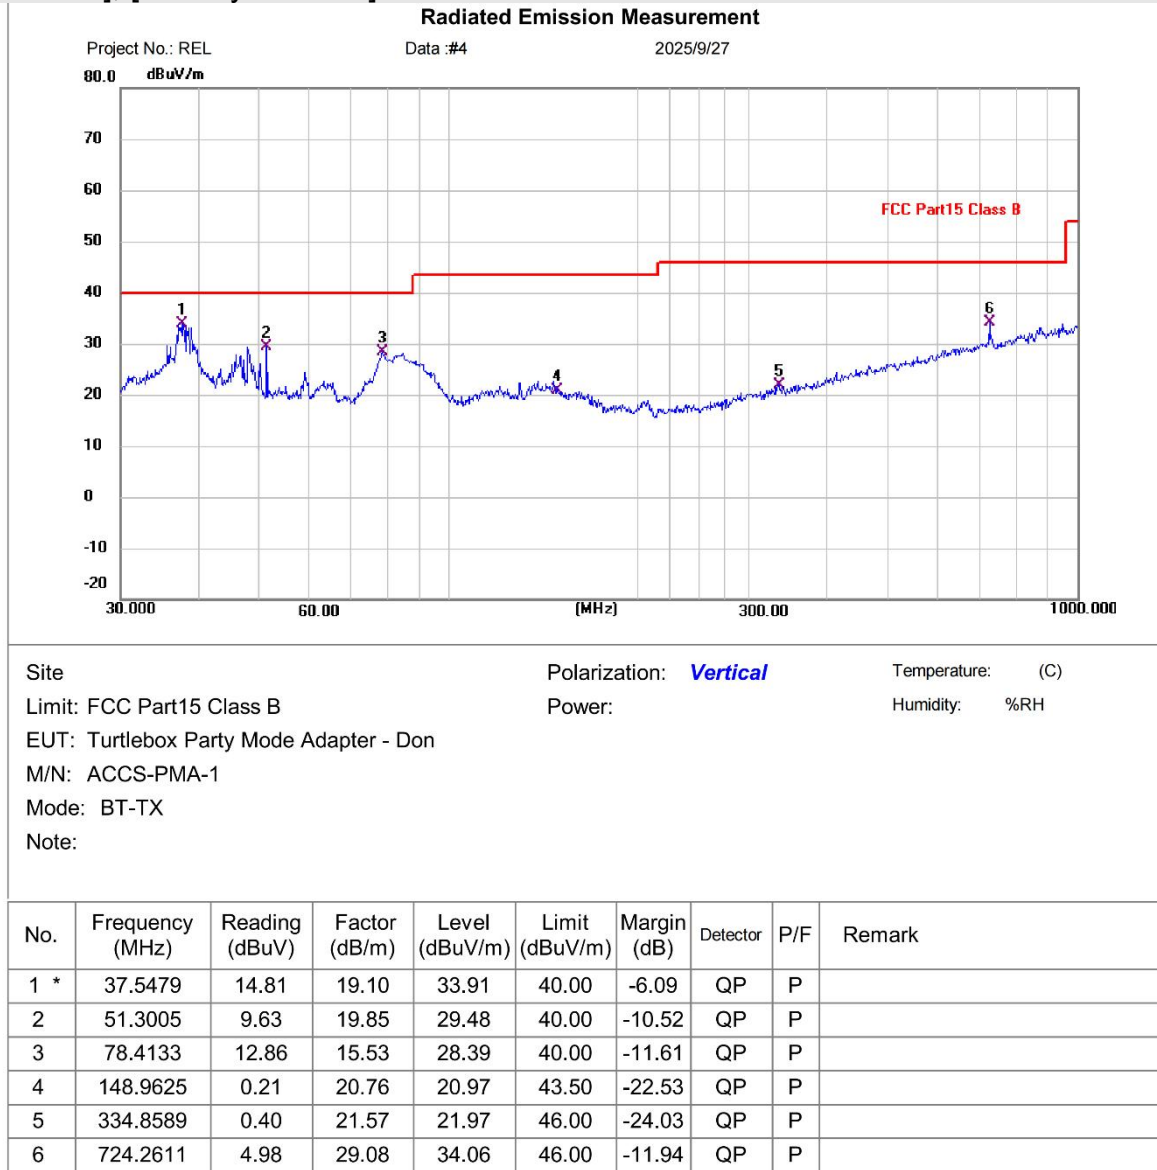


*Maximum data rate > 100Kbps, > 100MHz, > 100mW

Test Result: Pass

Above 1GHz:

Remark: During the test, pre-scan the GFSK, pi/4DQPSK, 8DPSK mode, and found the 8DPSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

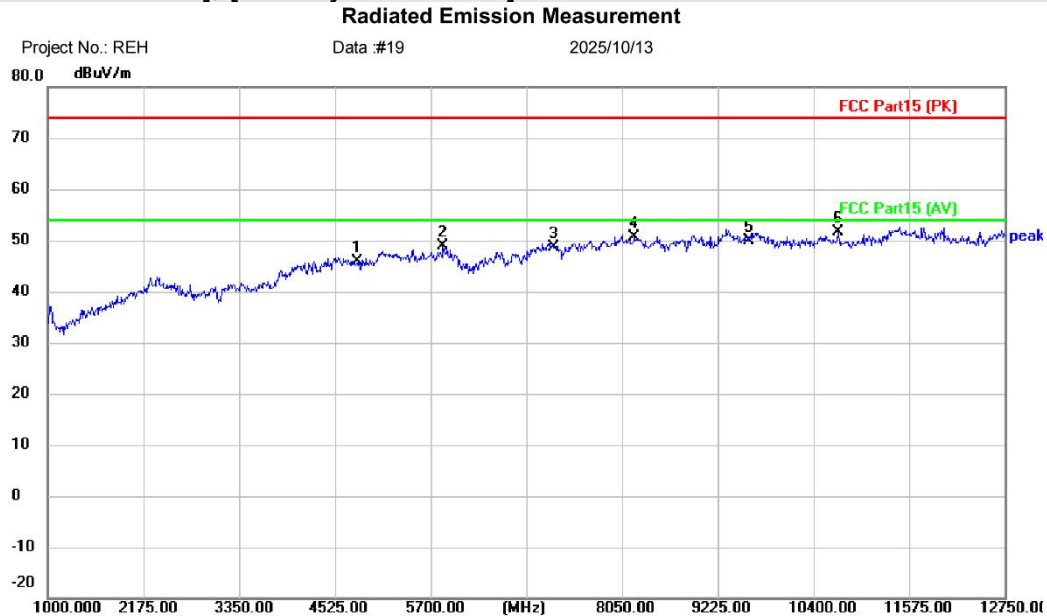

Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Turtlebox Party Mode Adapter - Don
M/N: ACCS-PMA-1
Mode: BT-TX-2402
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	39.53	6.31	45.84	74.00	-28.16	peak	
2		5852.750	40.09	8.88	48.97	74.00	-25.03	peak	
3		7206.000	38.33	10.39	48.72	74.00	-25.28	peak	
4		8202.750	39.18	11.48	50.66	74.00	-23.34	peak	
5		9608.000	36.94	13.01	49.95	74.00	-24.05	peak	
6	*	10705.50	38.72	12.85	51.57	74.00	-22.43	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass


BlueAsia Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX low channel]; [Polarity: Vertical]

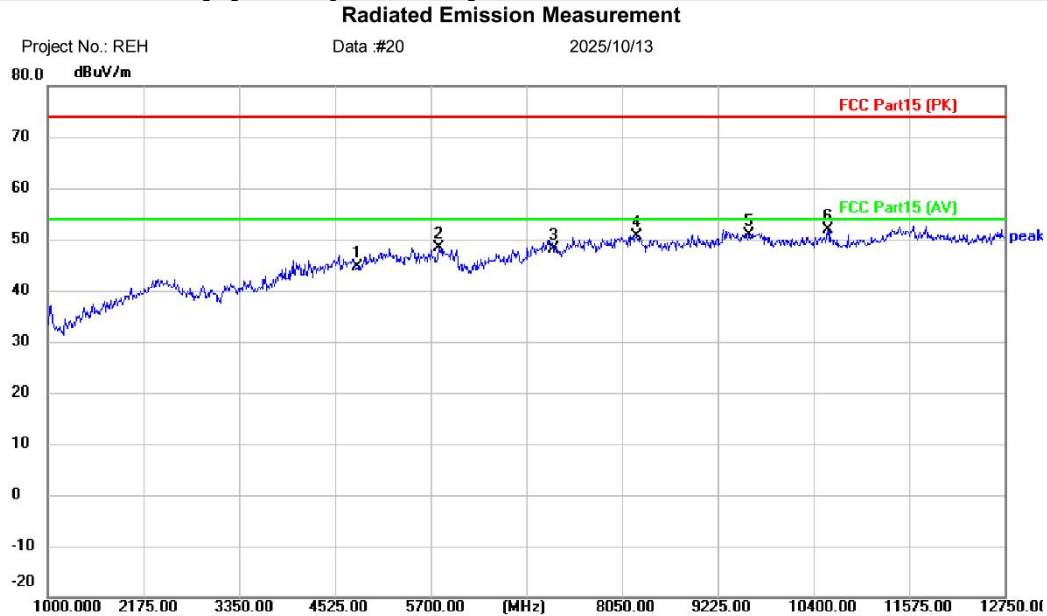

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Turtlebox Party Mode Adapter - Don
M/N: ACCS-PMA-1
Mode: BT-TX-2402
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	38.37	6.31	44.68	74.00	-29.32	peak	
2		5794.000	39.58	8.91	48.49	74.00	-25.51	peak	
3		7206.000	37.73	10.39	48.12	74.00	-25.88	peak	
4		8226.250	39.41	11.34	50.75	74.00	-23.25	peak	
5		9608.000	37.91	13.01	50.92	74.00	-23.08	peak	
6	*	10576.25	38.24	13.63	51.87	74.00	-22.13	peak	

*:Maximum data x:Over limit !:over margin

Receiver: ESR_1


Spectrum Analyzer:

FSP40

(Reference Only)

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Horizontal]

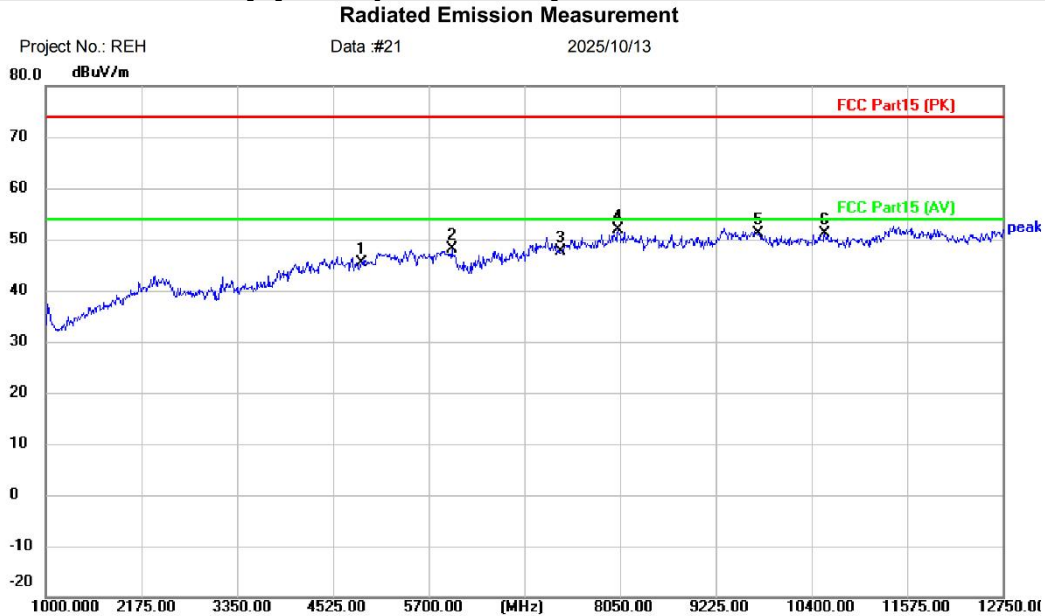

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Turtlebox Party Mode Adapter - Don

M/N: ACCS-PMA-1

Mode: BT-TX-2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4882.000	39.04	6.43	45.47	74.00	-28.53	peak	
2		5982.000	39.26	8.98	48.24	74.00	-25.76	peak	
3		7323.000	37.57	10.17	47.74	74.00	-26.26	peak	
4	*	8026.500	40.18	11.65	51.83	74.00	-22.17	peak	
5		9764.000	37.44	13.76	51.20	74.00	-22.80	peak	
6		10564.500	37.48	13.66	51.14	74.00	-22.86	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

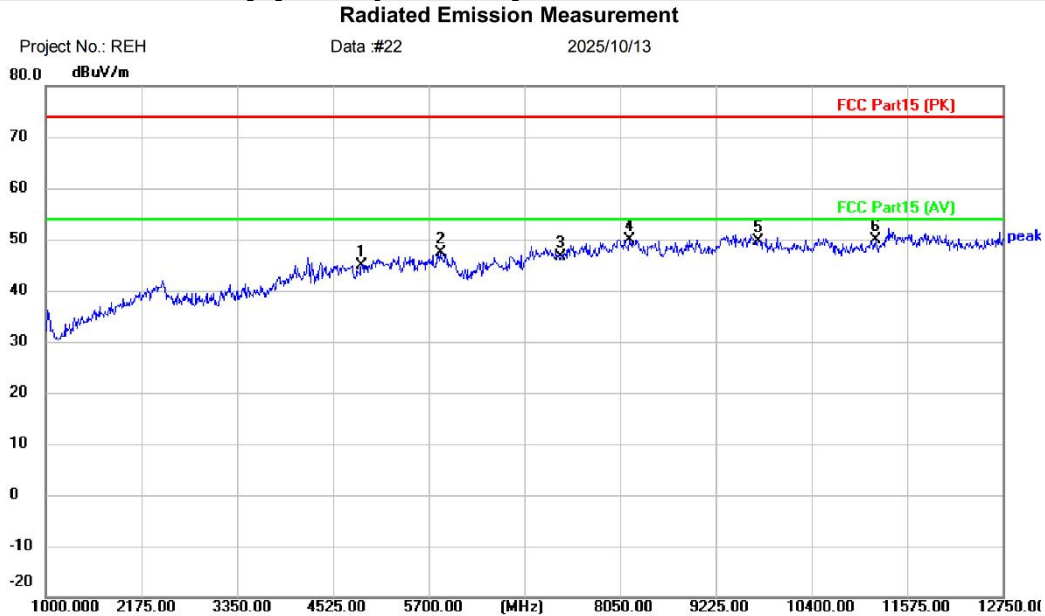

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Turtlebox Party Mode Adapter - Don
M/N: ACCS-PMA-1
Mode: BT-TX-2441
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.000	38.33	6.43	44.76	74.00	-29.24	peak	
2		5841.000	38.53	8.89	47.42	74.00	-26.58	peak	
3		7323.000	36.42	10.17	46.59	74.00	-27.41	peak	
4		8167.500	38.38	11.50	49.88	74.00	-24.12	peak	
5		9764.000	35.96	13.76	49.72	74.00	-24.28	peak	
6	*	11187.25	36.70	13.27	49.97	74.00	-24.03	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

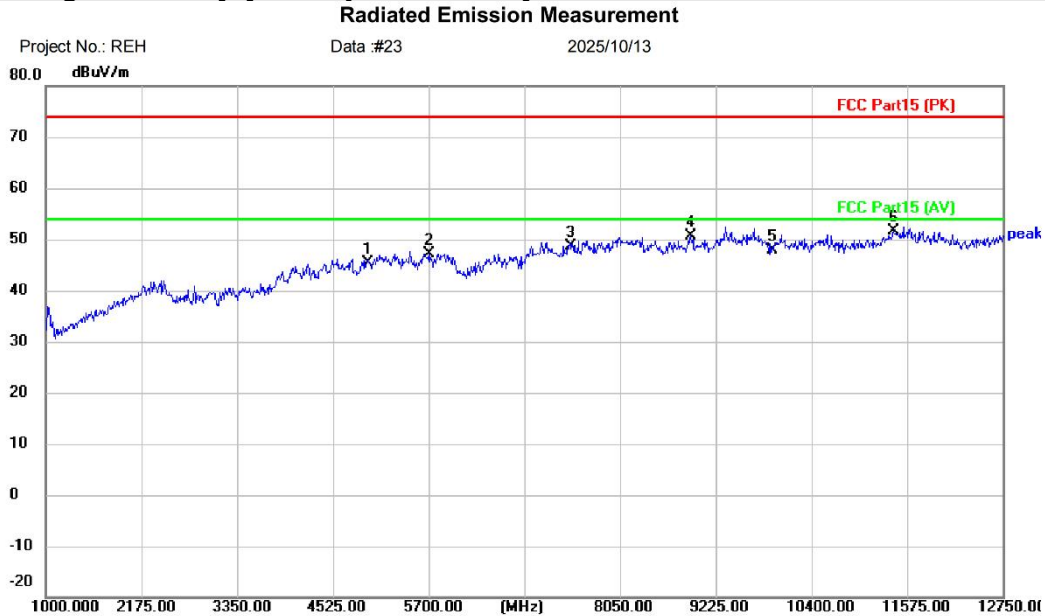

Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Turtlebox Party Mode Adapter - Don
M/N: ACCS-PMA-1
Mode: BT-TX-2480
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	37.86	7.41	45.27	74.00	-28.73	peak	
2		5700.000	38.20	8.95	47.15	74.00	-26.85	peak	
3		7440.000	37.49	11.03	48.52	74.00	-25.48	peak	
4		8919.500	38.31	12.38	50.69	74.00	-23.31	peak	
5		9920.000	34.84	13.16	48.00	74.00	-26.00	peak	
6	*	11410.50	37.27	14.33	51.60	74.00	-22.40	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

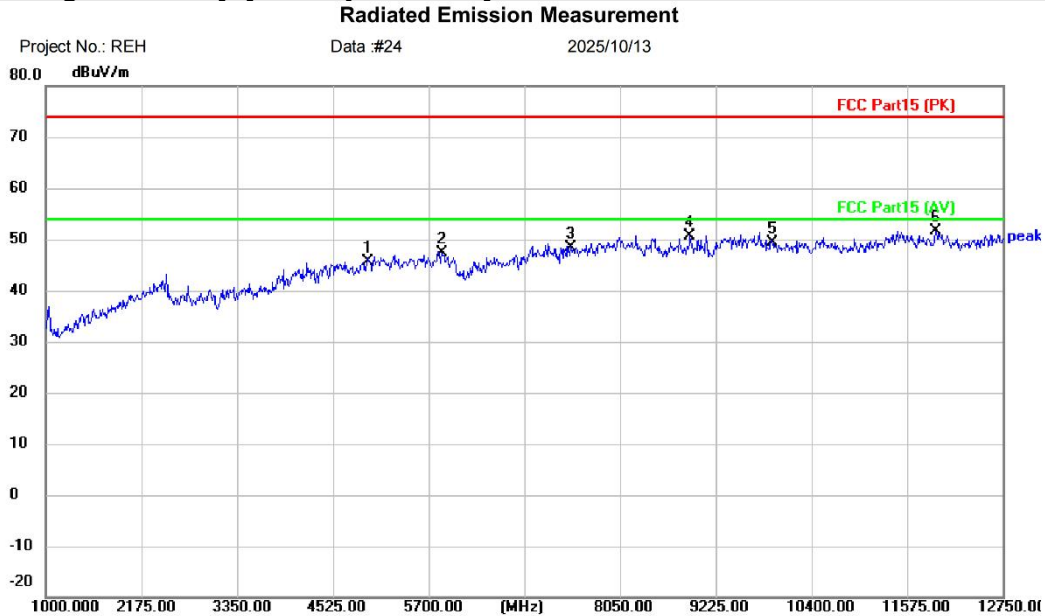

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Turtlebox Party Mode Adapter - Don

M/N: ACCS-PMA-1

Mode: BT-TX-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	38.25	7.41	45.66	74.00	-28.34	peak	
2		5864.500	38.35	8.93	47.28	74.00	-26.72	peak	
3		7440.000	37.30	11.03	48.33	74.00	-25.67	peak	
4		8907.750	38.11	12.57	50.68	74.00	-23.32	peak	
5		9920.000	36.25	13.16	49.41	74.00	-24.59	peak	
6	*	11927.50	37.88	13.75	51.63	74.00	-22.37	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247(d) 47 CFR Part 15, Subpart C 15.205
Test Method	ANSI C63.10-2020+Cor.1-2023 Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

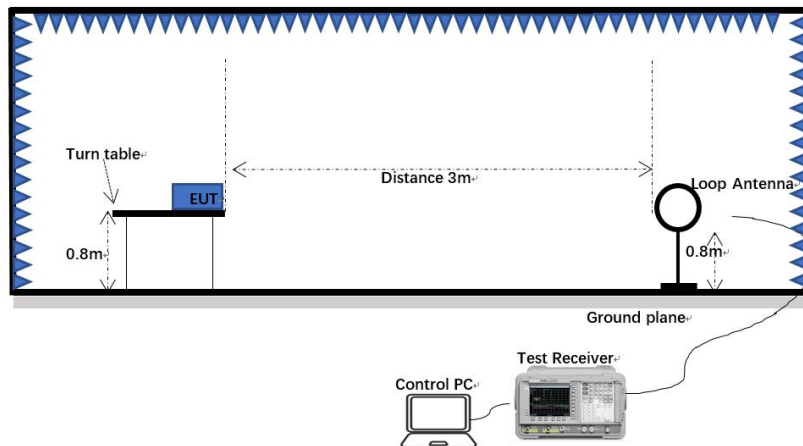

30MHz-1GHz:

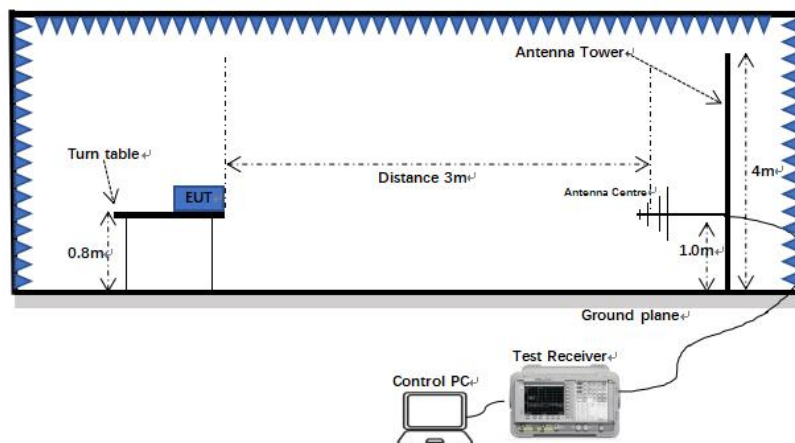

Above 1GHz:

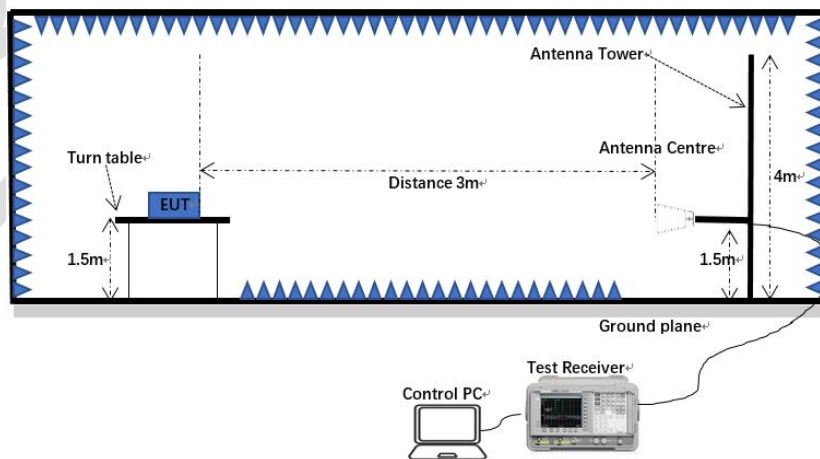

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data

Remark: During the test, pre-scan the GFSK, pi/4QPSK, 8DPSK mode, and found the 8DPSK mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

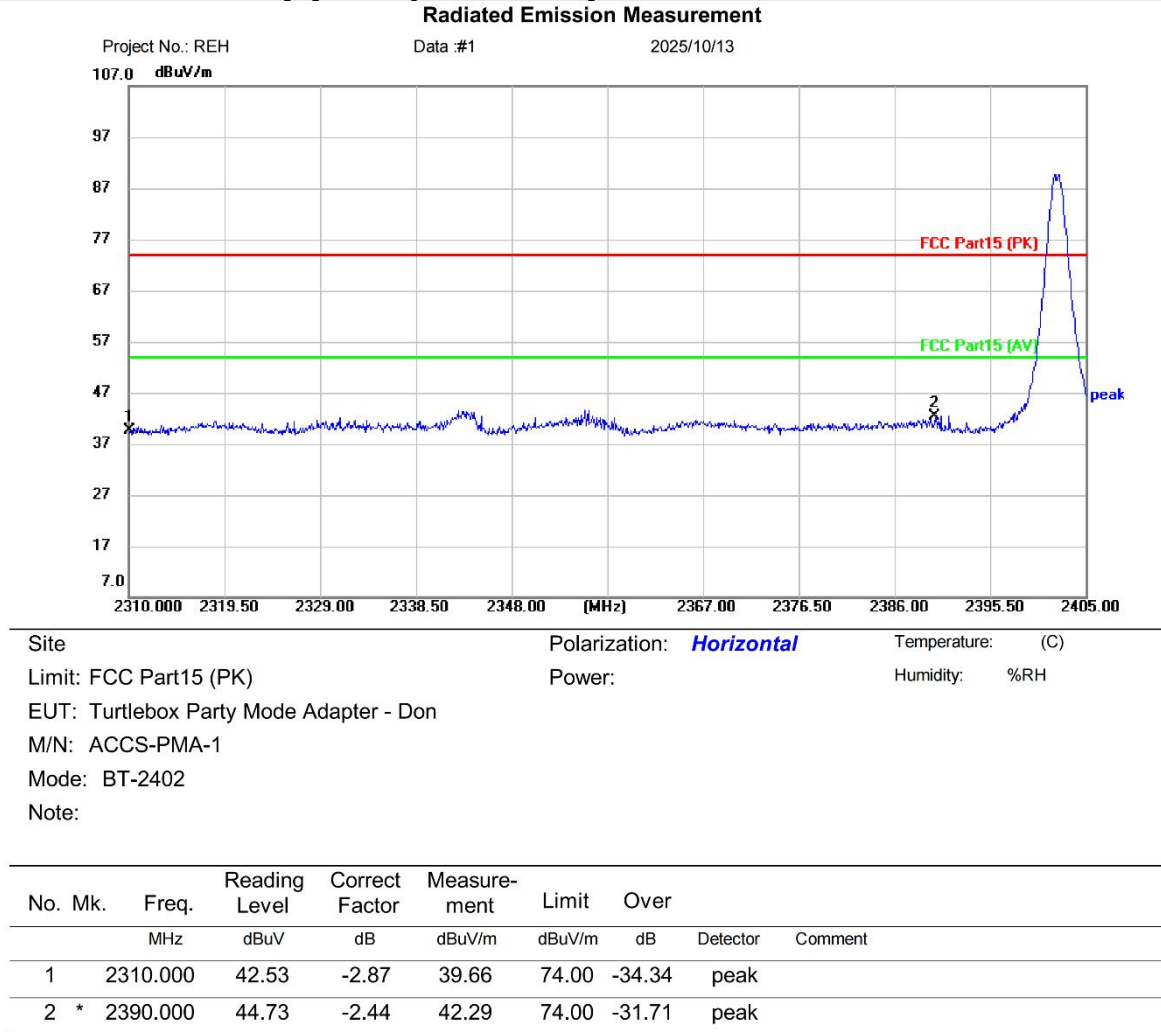

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass

BlueAsia Technical Services (Shenzhen) Co., Ltd.


Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode:TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

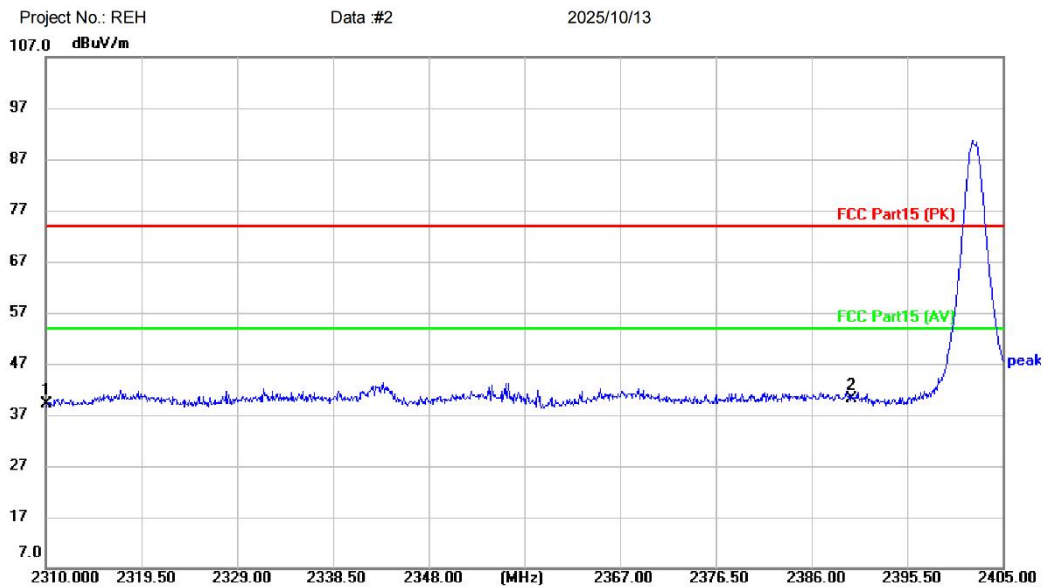

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Turtlebox Party Mode Adapter - Don
M/N: ACCS-PMA-1
Mode: BT-2402
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.01	-2.87	39.14	74.00	-34.86	peak	
2	*	2390.000	42.59	-2.44	40.15	74.00	-33.85	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver: ESR_1


Spectrum Analyzer:

FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

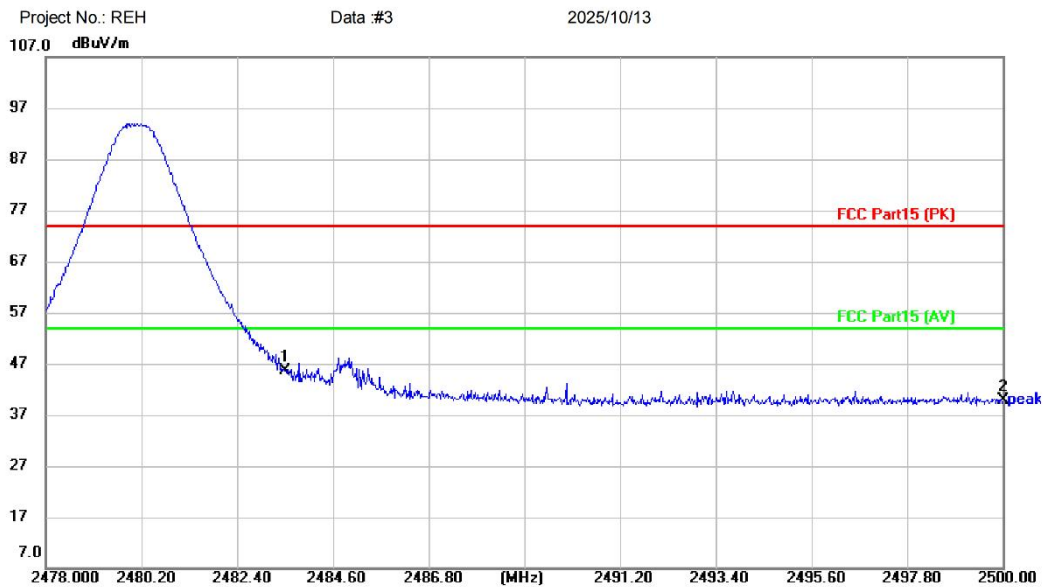

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Turtlebox Party Mode Adapter - Don

M/N: ACCS-PMA-1

Mode: BT-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	48.62	-2.91	45.71	74.00	-28.29	peak	
2		2500.000	42.93	-3.00	39.93	74.00	-34.07	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only


Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

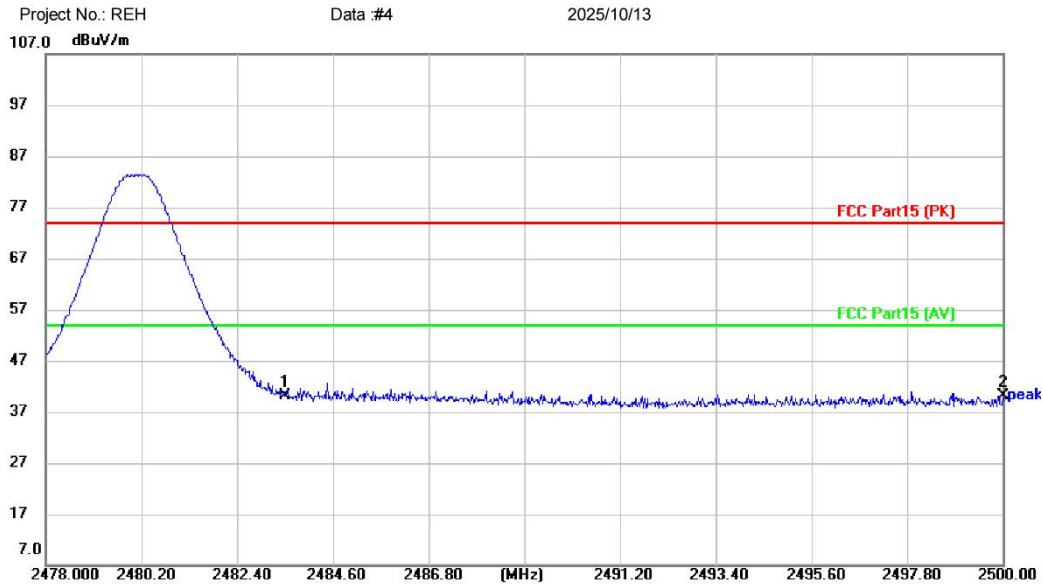

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Turtlebox Party Mode Adapter - Don

M/N: ACCS-PMA-1

Mode: BT-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	43.02	-2.91	40.11	74.00	-33.89	peak	
2	*	2500.000	43.17	-3.00	40.17	74.00	-33.83	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver: ESR_1

Spectrum Analyzer:

FSP40


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-1.292	21	Pass
NVNT	1-DH1	2441	Ant1	-1.201	21	Pass
NVNT	1-DH1	2480	Ant1	-1.712	21	Pass
NVNT	2-DH1	2402	Ant1	-1.208	21	Pass
NVNT	2-DH1	2441	Ant1	-1.166	21	Pass
NVNT	2-DH1	2480	Ant1	-1.724	21	Pass
NVNT	3-DH1	2402	Ant1	-1.208	21	Pass
NVNT	3-DH1	2441	Ant1	-1.126	21	Pass
NVNT	3-DH1	2480	Ant1	-1.667	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

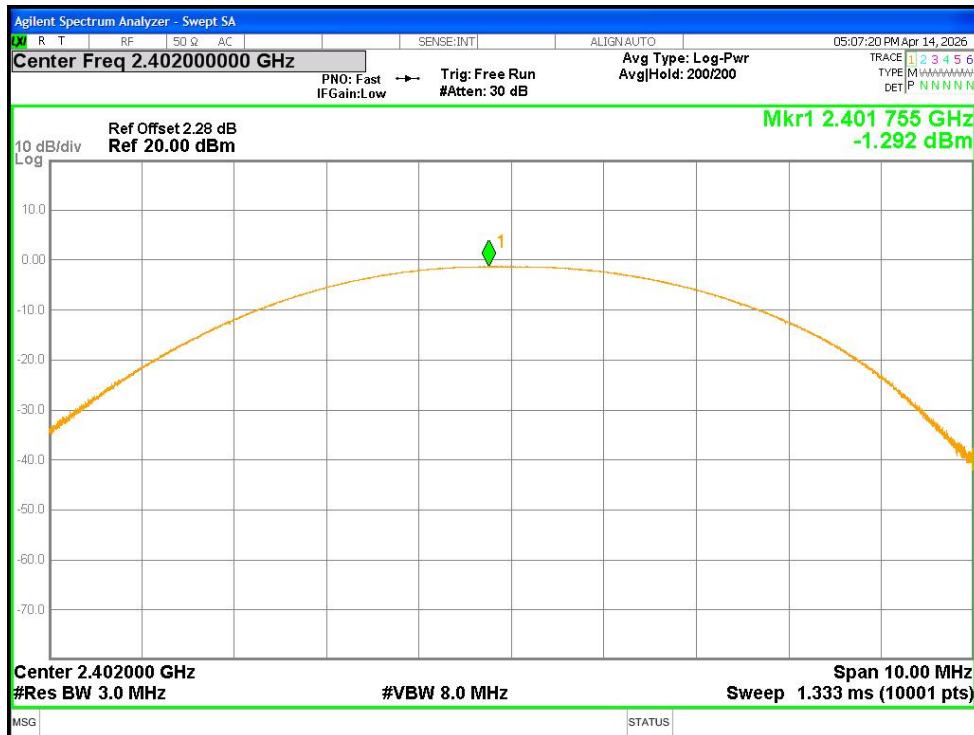


Power NVNT 1-DH1 2441MHz Ant1

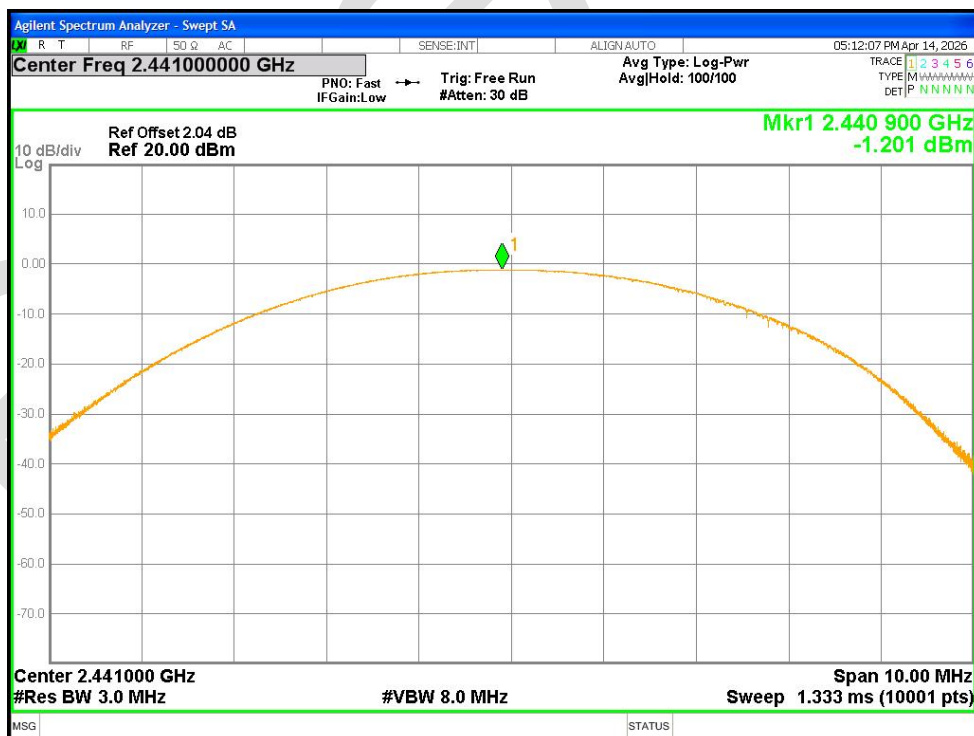


Power NVNT 1-DH1 2480MHz Ant1

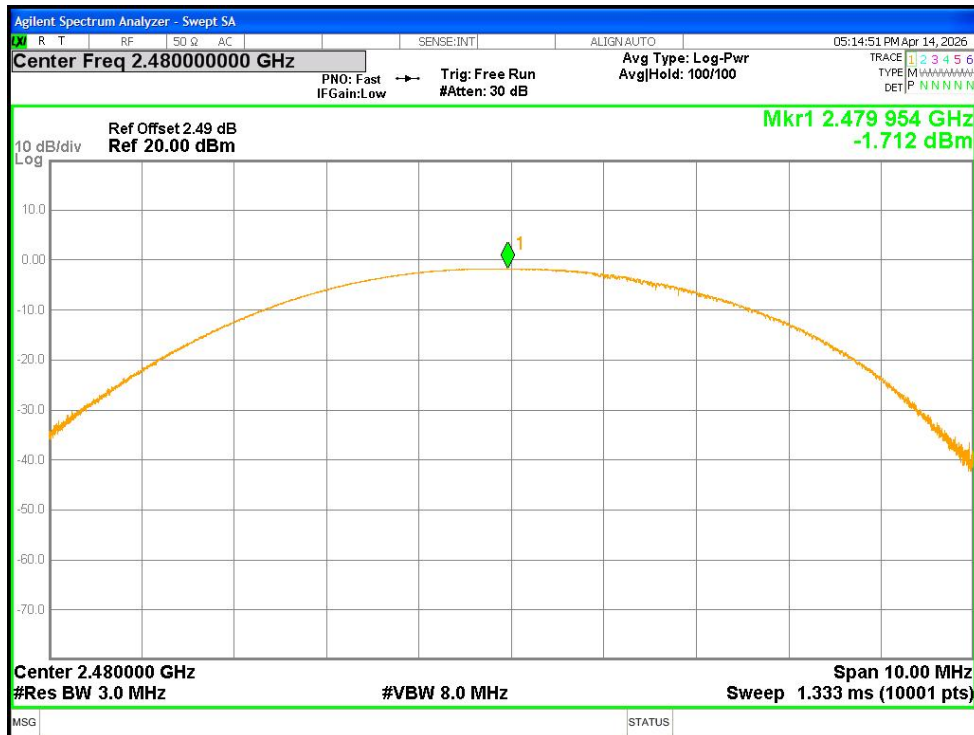


Power NVNT 2-DH1 2402MHz Ant1

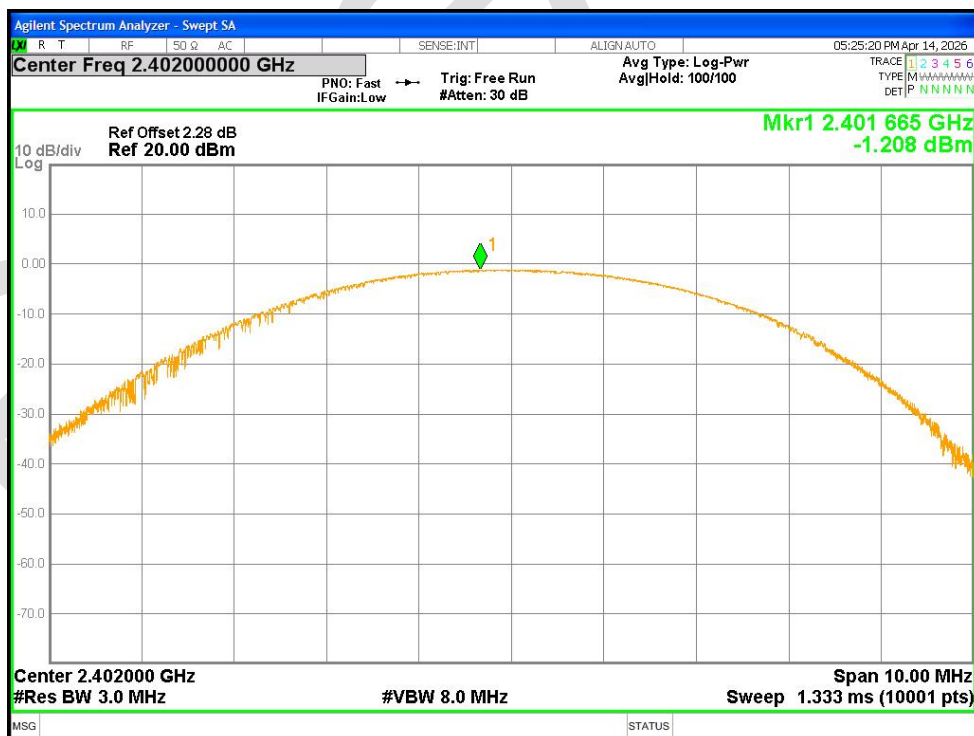


Power NVNT 2-DH1 2441MHz Ant1

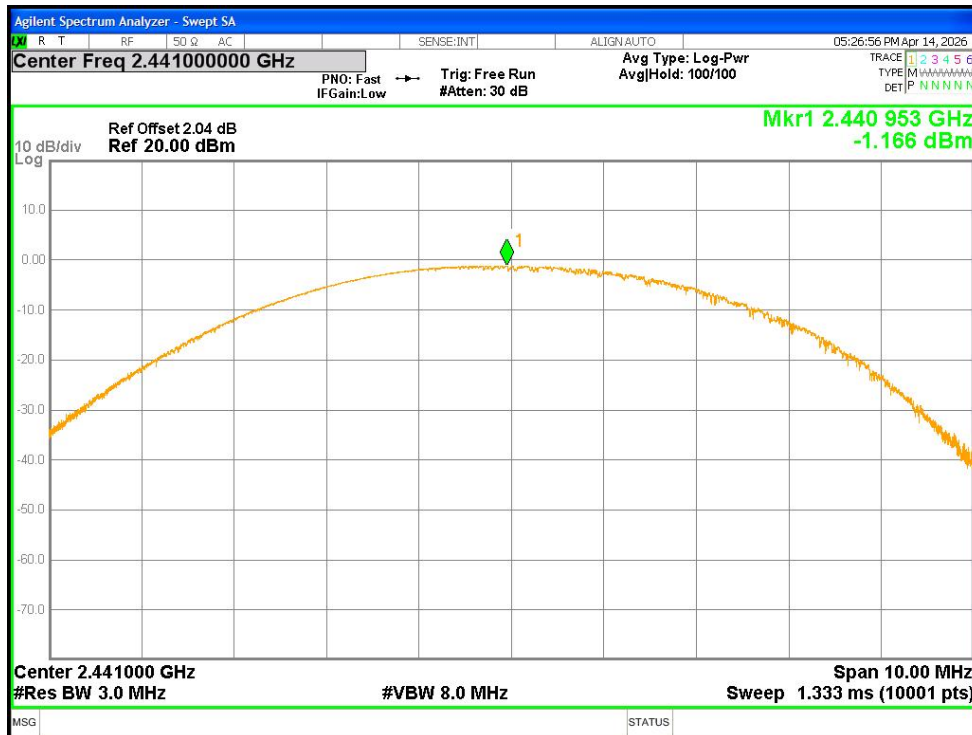


Power NVNT 2-DH1 2480MHz Ant1

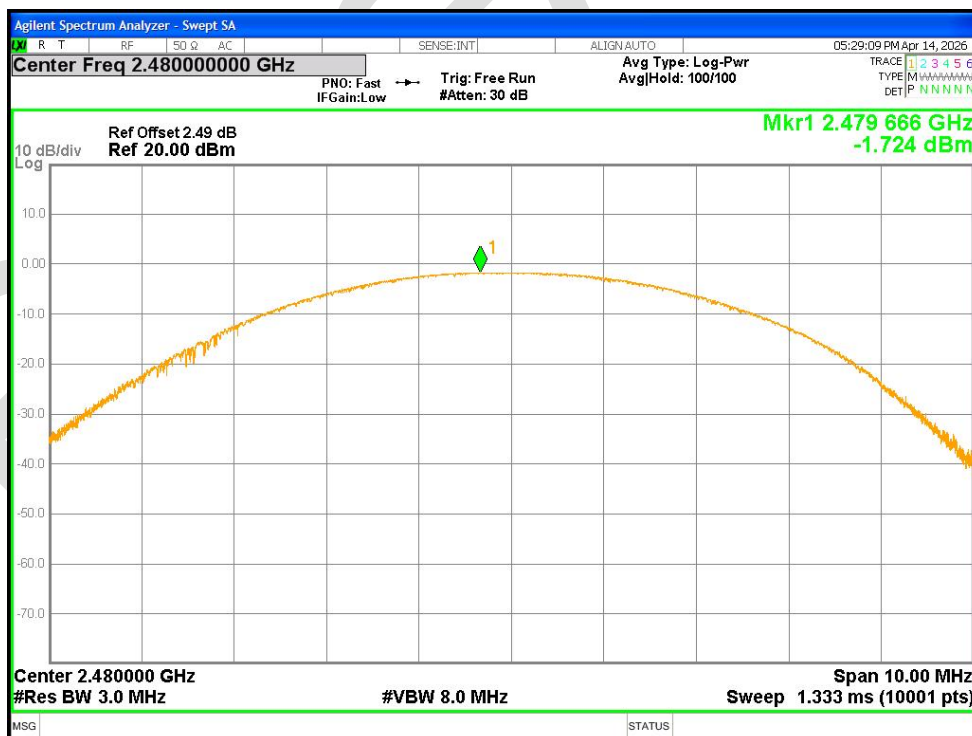


Power NVNT 3-DH1 2402MHz Ant1

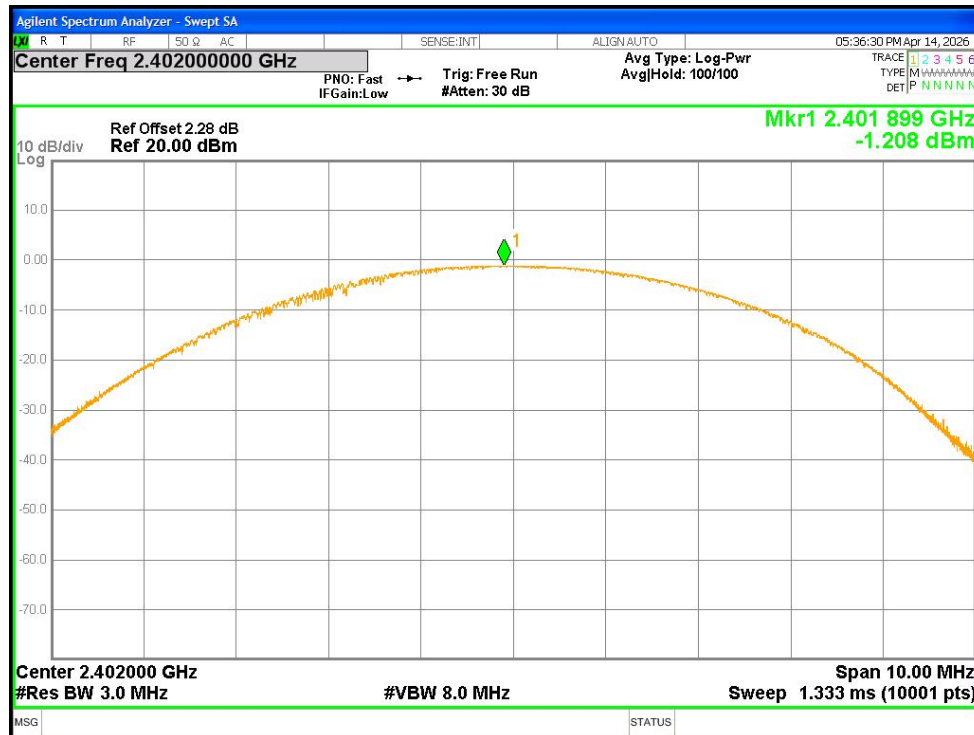

Power NVNT 3-DH1 2441MHz Ant1

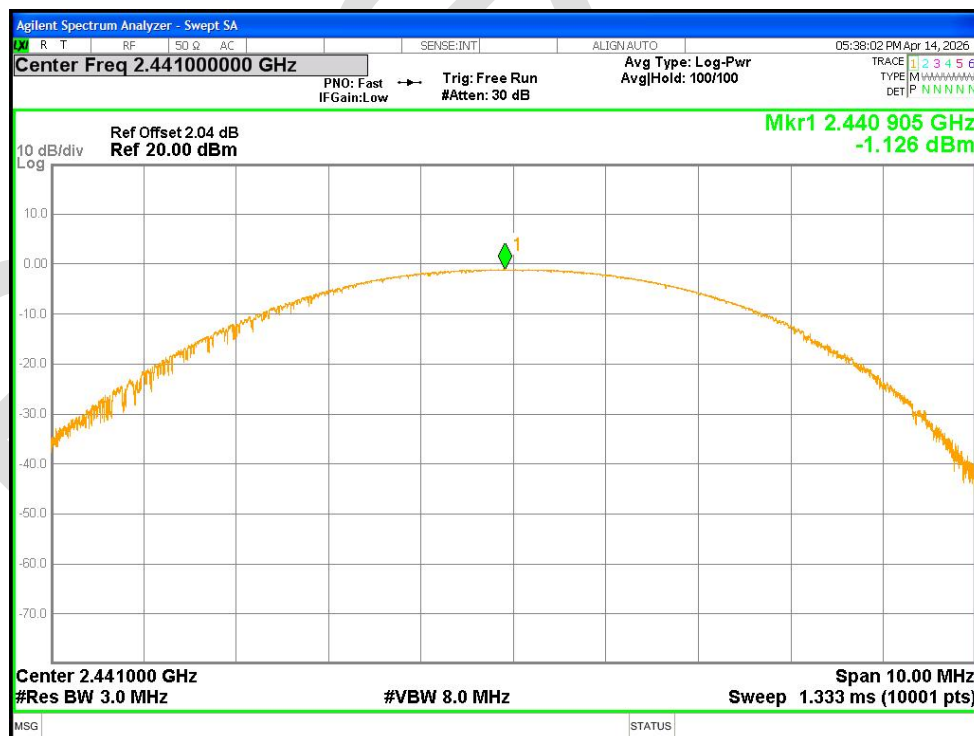


Power NVNT 3-DH1 2480MHz Ant1

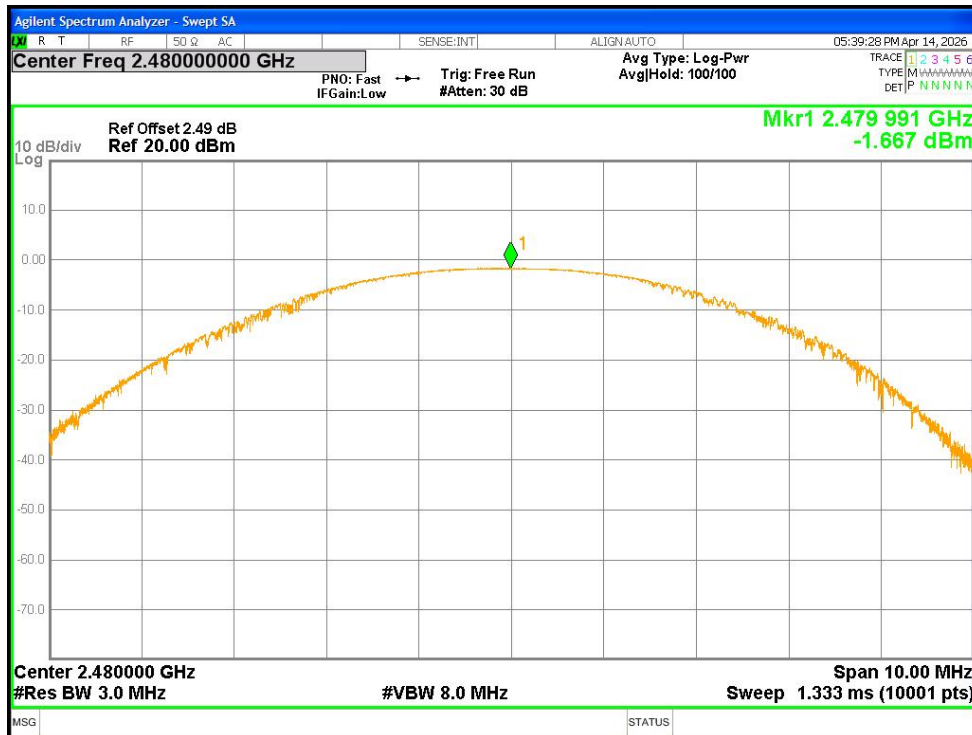


7.2-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.952	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.958	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.952	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.217	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.22	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.217	N/A	Pass
NVNT	3-DH1	2402	Ant1	1.199	N/A	Pass
NVNT	3-DH1	2441	Ant1	1.207	N/A	Pass
NVNT	3-DH1	2480	Ant1	1.204	N/A	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

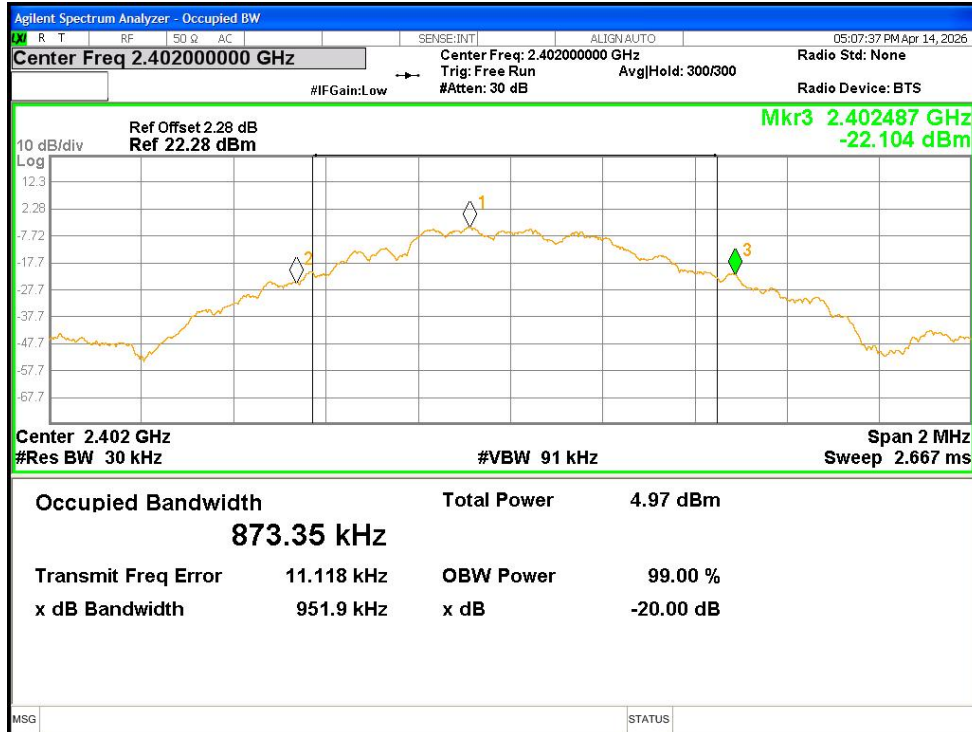


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

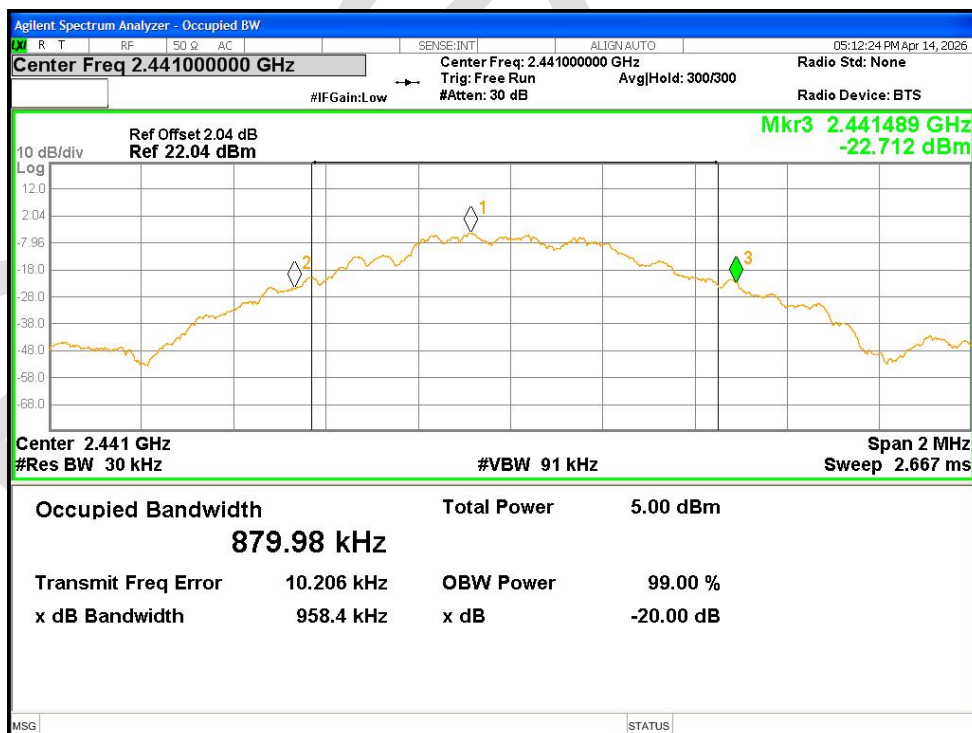


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

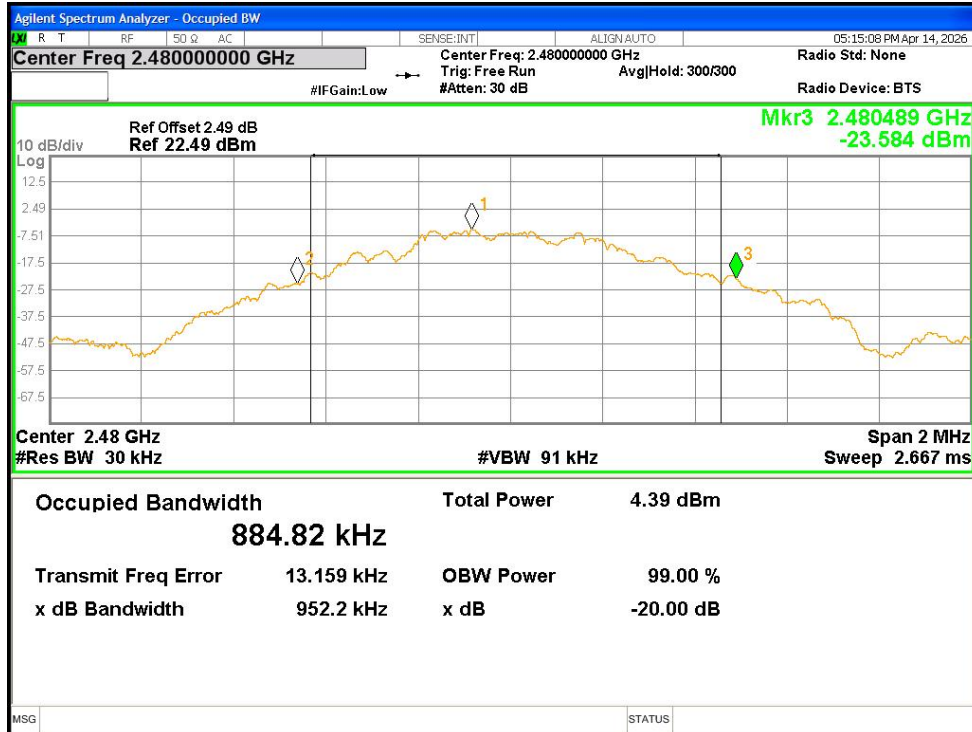


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

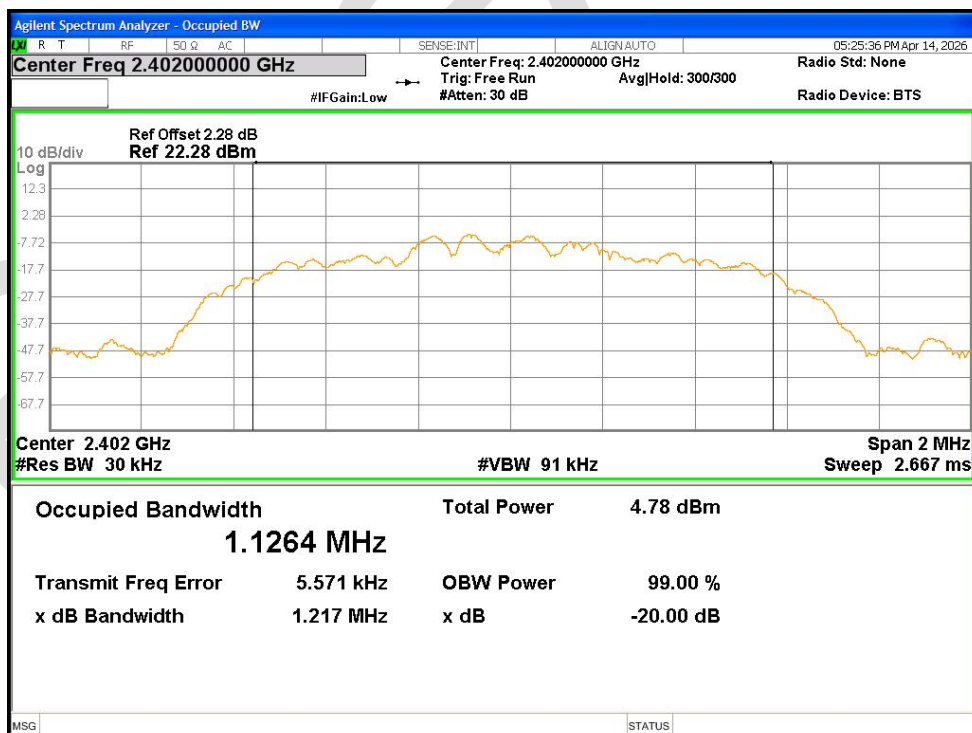


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

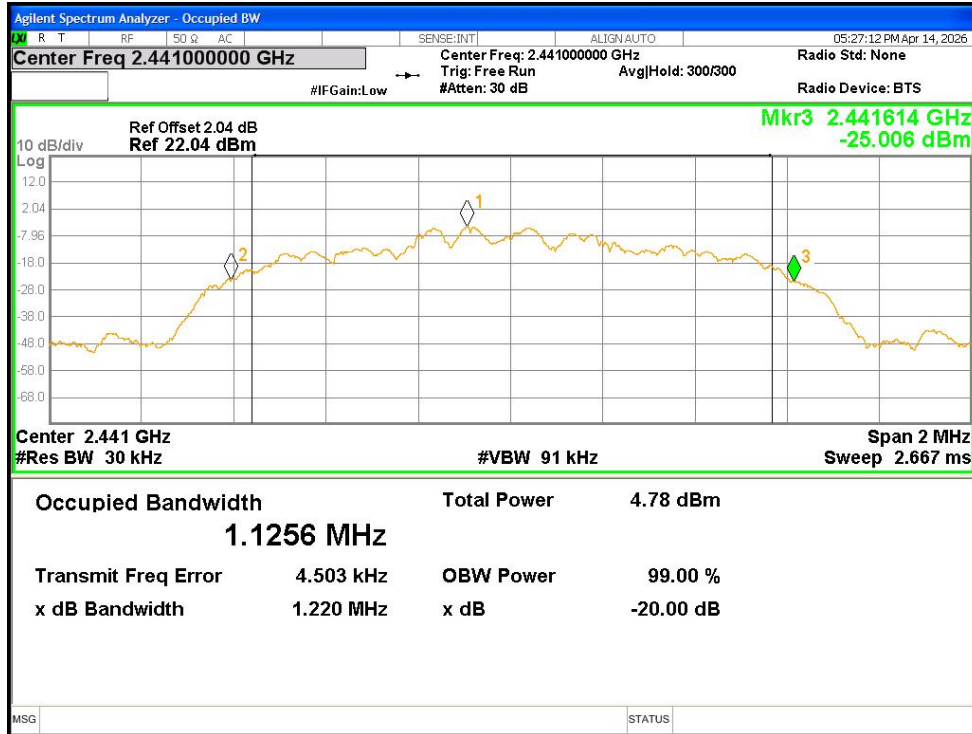


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

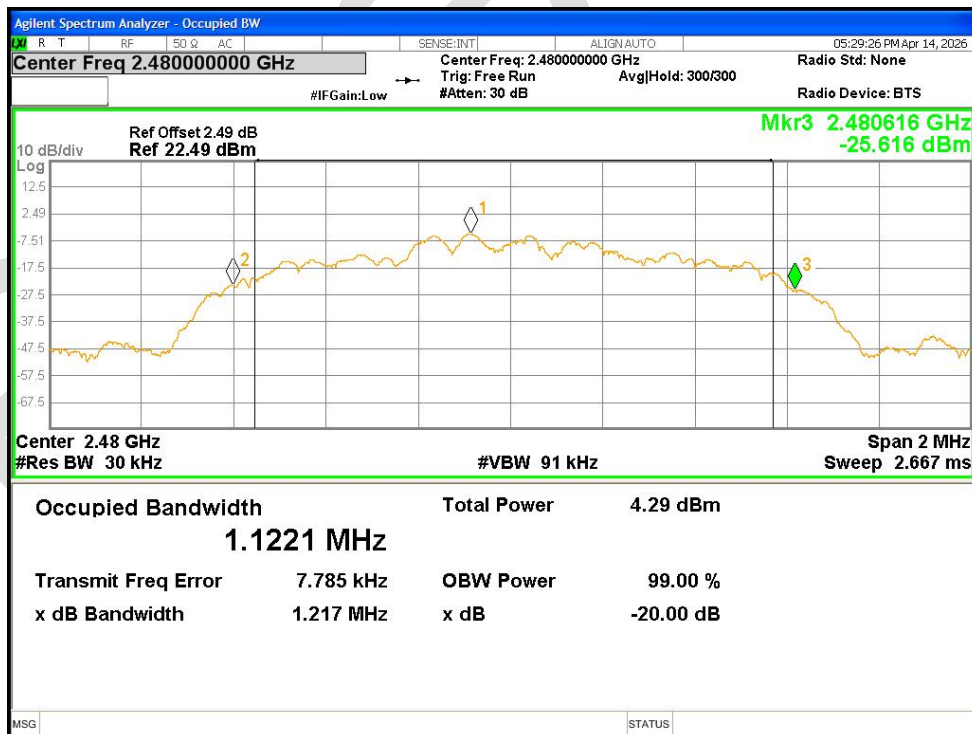


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

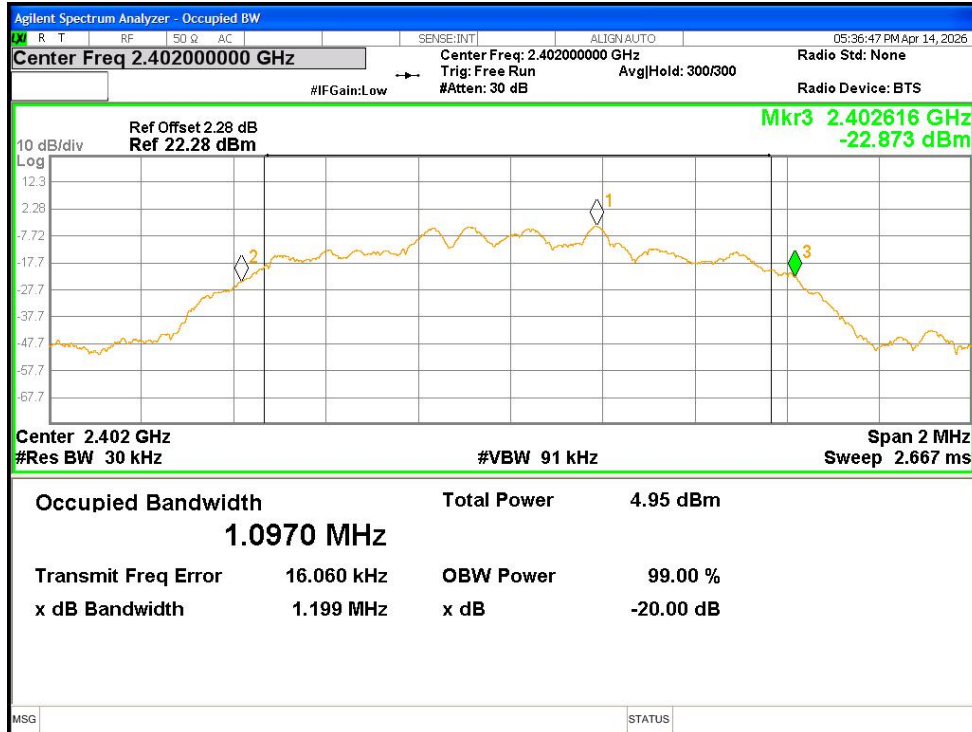

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

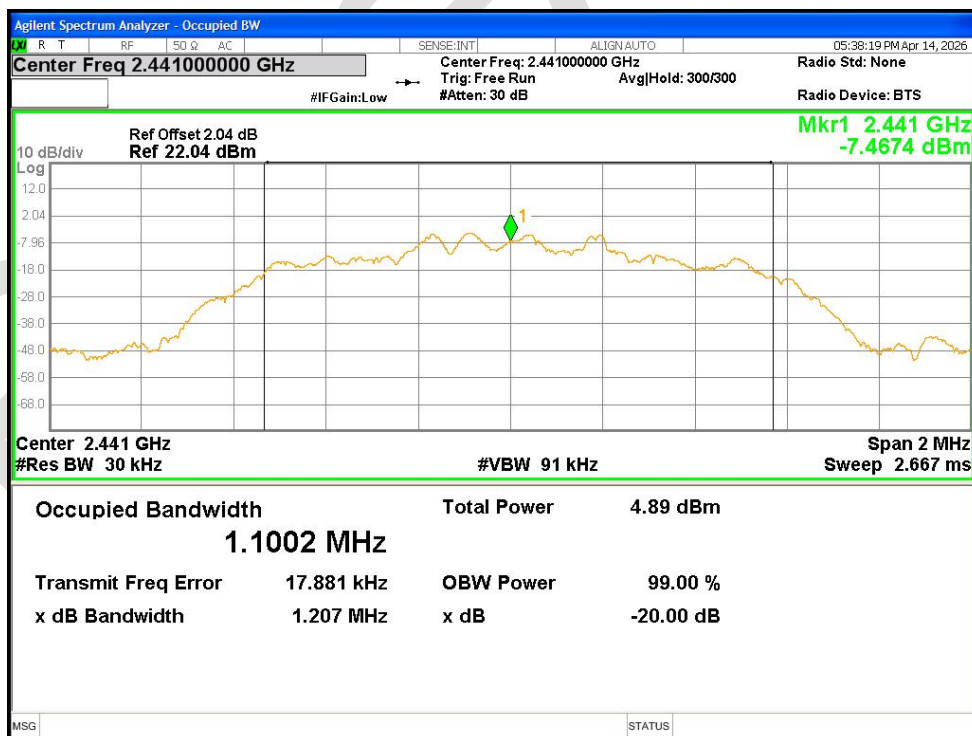


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

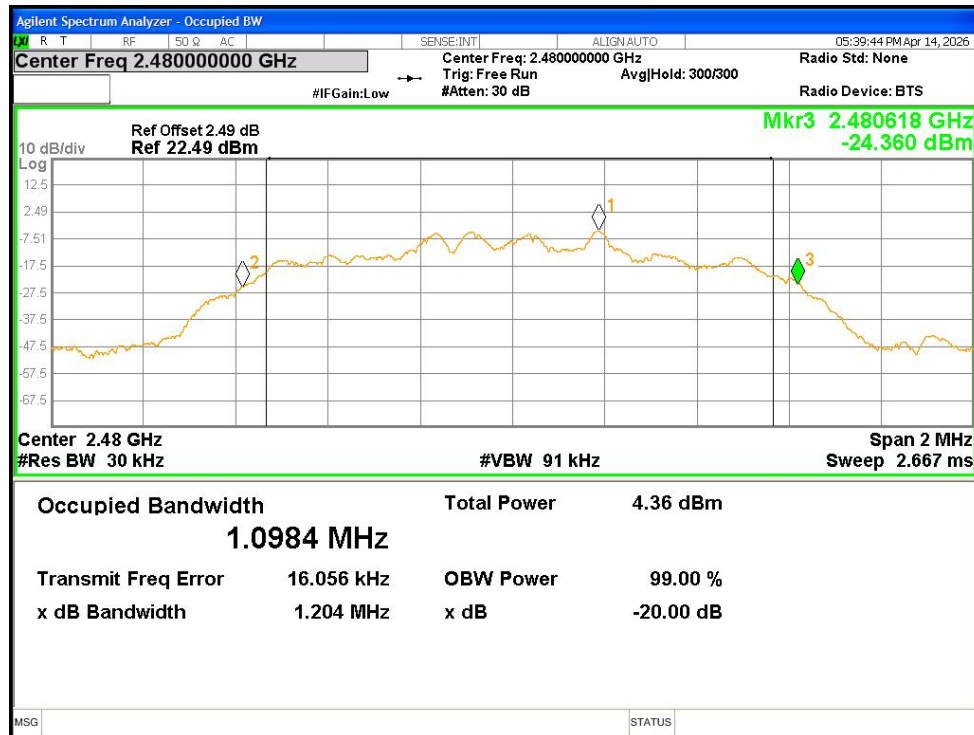


7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.87862
NVNT	1-DH1	2441	Ant1	0.88378
NVNT	1-DH1	2480	Ant1	0.88261
NVNT	2-DH1	2402	Ant1	1.1261
NVNT	2-DH1	2441	Ant1	1.1277
NVNT	2-DH1	2480	Ant1	1.1303
NVNT	3-DH1	2402	Ant1	1.0996
NVNT	3-DH1	2441	Ant1	1.0974
NVNT	3-DH1	2480	Ant1	1.0963


OBW NVNT 1-DH1 2402MHz Ant1

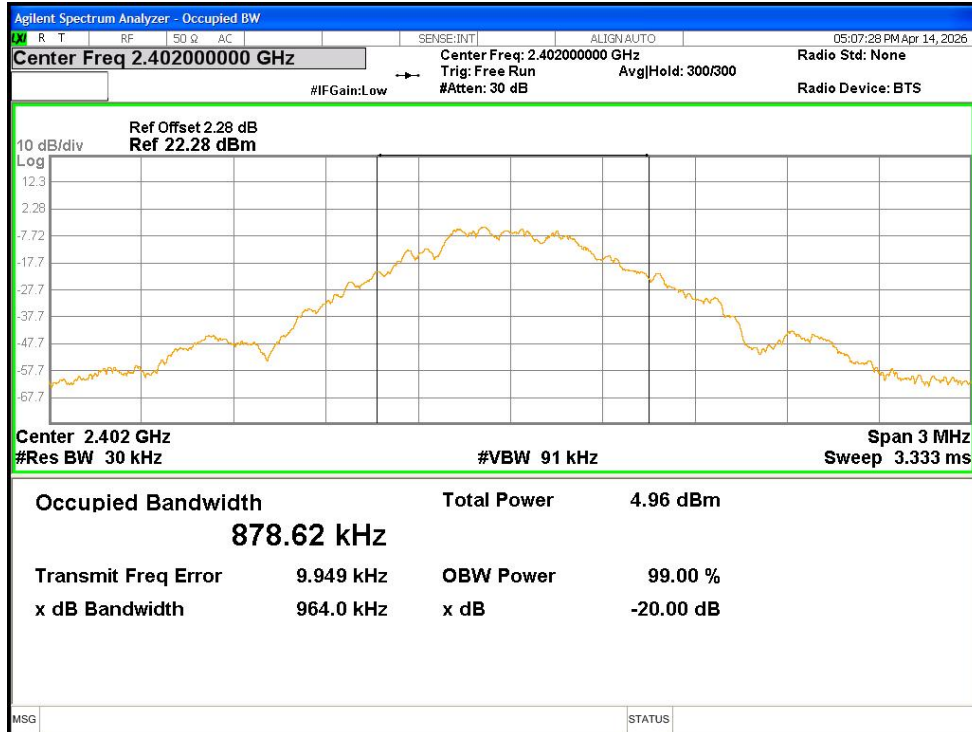

OBW NVNT 1-DH1 2441MHz Ant1

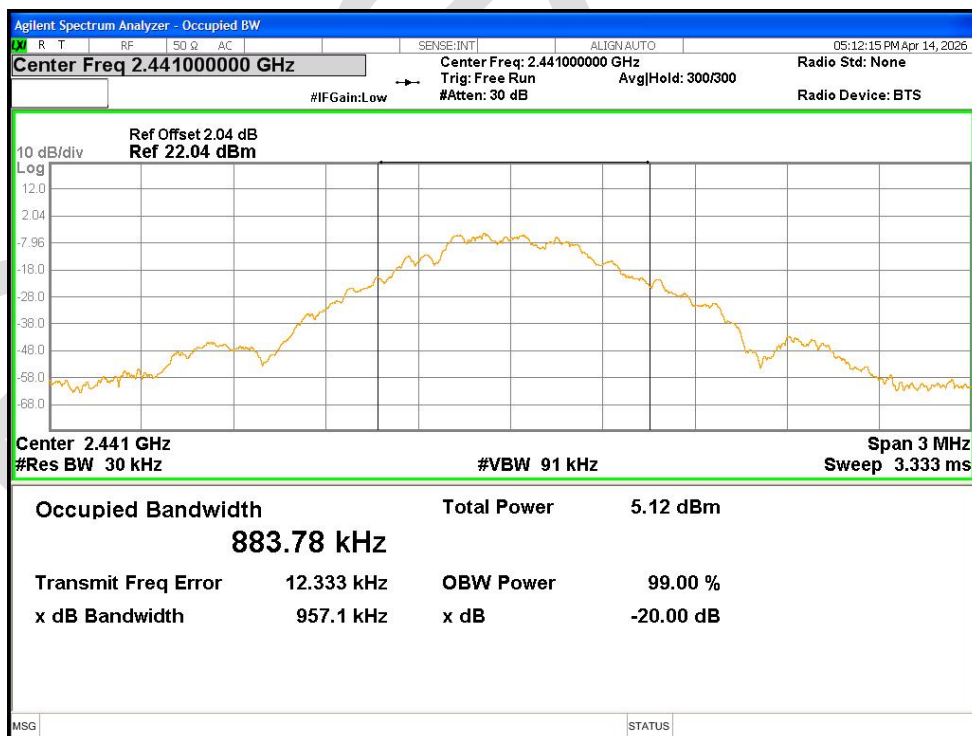

OBW NVNT 1-DH1 2480MHz Ant1

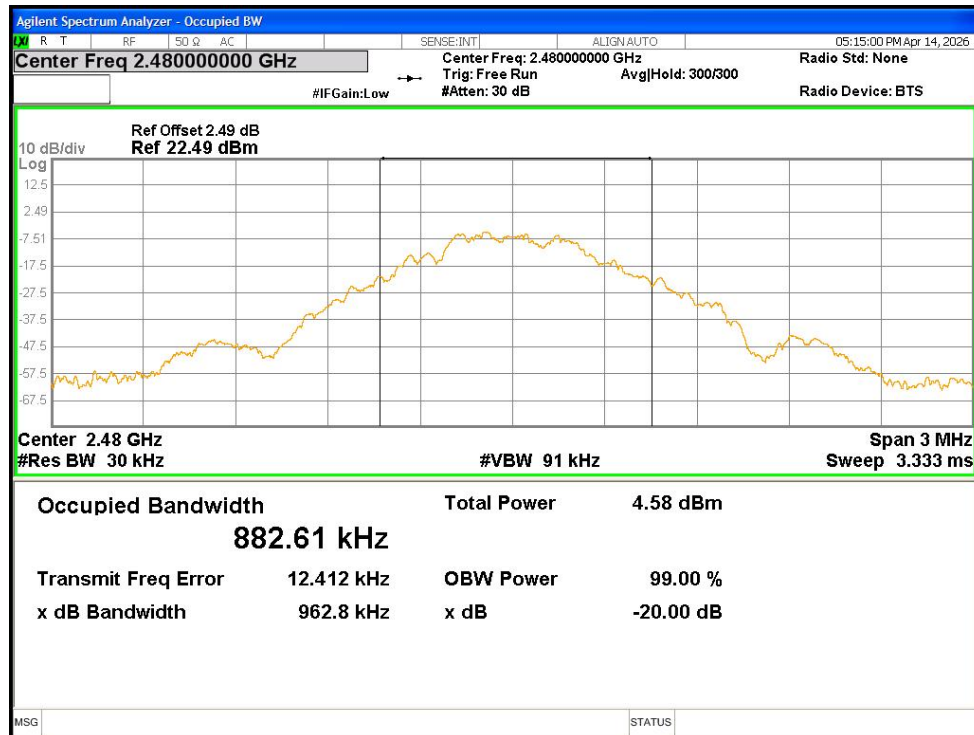

OBW NVNT 2-DH1 2402MHz Ant1

