

Partial FCC Test Report

(PART 27)

Report No.: RFBHDI-WTW-P21120081-9

FCC ID: 2ATM8EG25G

Test Model: EG25-G MINIPCIE

Received Date: Dec. 24, 2021

Test Date: Jan. 19 ~ Mar. 29, 2022

Issued Date: Apr. 22, 2022

Applicant: Hawkeye Tech Co., Ltd.

Address: 13F. No.736, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	11
3.1 General Description of Applied Standards and references.....	11
4 Test Types and Results	12
4.1 Output Power Measurement.....	12
4.1.1 Limits of Output Power Measurement	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup.....	12
4.1.4 Test Results	13
4.2 Radiated Emission Measurement.....	25
4.2.1 Limits of Radiated Emission Measurement	25
4.2.2 Test Procedure	25
4.2.3 Deviation from Test Standard	25
4.2.4 Test Setup.....	26
4.2.5 Test Results	27
5 Pictures of Test Arrangements.....	31
Appendix – Information of the Testing Laboratories	32

Release Control Record

Issue No.	Description	Date Issued
RFBHDI-WTW-P21120081-9	Original Release	Apr. 22, 2022

1 Certificate of Conformity

Product: LTE Module

Brand: Hawkeye Tech Co., Ltd.

Test Model: EG25-G MINIPCIE

Sample Status: Engineering Sample

Applicant: Hawkeye Tech Co., Ltd.

Test Date: Jan. 19 ~ Mar. 29, 2022

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , Date: Apr. 22, 2022
Lena Wang / Specialist

Approved by : Jeremy Lin , Date: Apr. 22, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
--	Peak to Average Ratio	N/A	Refer to Note
27.53(m)(4)(6)	Out-of-Band Emissions Measurements	N/A	Refer to Note
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -17.78 dB at 107.60 MHz.

Note:

1. This report is a partial report. Therefore, only test item of Equivalent Isotropic Radiated Power / Effective Isotropic Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to SGS report no.: HR/2019/1001601 for module (Brand: Quectel, Model: EG25-G MINIPCIE).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Spectrum Analyzer Agilent	N9010A	MY52220207	Jan. 06, 2022	Jan. 05, 2023
Test Receiver Agilent	N9038A	MY51210203	Sep. 22, 2021	Sep. 21, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 14, 2021	Nov. 13, 2022
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Oct. 28, 2021	Oct. 27, 2022
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2021	Nov. 24, 2022
Preamplifier EMCI	EMC 184045	980116	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 012645	980115	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 330H	980112	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	171005	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 05, 2021	Oct. 04, 2022
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 24, 2021	Dec. 23, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	LTE Module		
Brand	Hawkeye Tech Co., Ltd.		
Test Model	EG25-G MINIPCIE		
Status of EUT	Engineering Sample		
Power Supply Rating	48Vdc (Adapter and PoE)		
Modulation Type	QPSK, 16QAM		
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz	
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz	
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz	
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz	
	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz	
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz	
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz	
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz	
	LTE Band 41 (Channel Bandwidth: 5 MHz)	2498.5 ~ 2687.5 MHz	
	LTE Band 41 (Channel Bandwidth: 10 MHz)	2501.0 ~ 2685.0 MHz	
	LTE Band 41 (Channel Bandwidth: 15 MHz)	2503.5 ~ 2682.5 MHz	
	LTE Band 41 (Channel Bandwidth: 20 MHz)	2506.0 ~ 2680.0 MHz	
		QPSK	16QAM
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	267.917 mW (24.28dBm)	201.837 mW (23.05dBm)
	LTE Band 7 (Channel Bandwidth: 10 MHz)	301.995 mW (24.80dBm)	218.776 mW (23.40dBm)
	LTE Band 7 (Channel Bandwidth: 15 MHz)	295.801 mW (24.71dBm)	213.304 mW (23.29dBm)
	LTE Band 7 (Channel Bandwidth: 20 MHz)	297.852 mW (24.74dBm)	213.796 mW (23.30dBm)
	LTE Band 38 (Channel Bandwidth: 5 MHz)	285.102 mW (24.55dBm)	202.302 mW (23.06dBm)
	LTE Band 38 (Channel Bandwidth: 10 MHz)	303.389 mW (24.82dBm)	200.447 mW (23.02dBm)
	LTE Band 38 (Channel Bandwidth: 15 MHz)	291.072 mW (24.64dBm)	206.538 mW (23.15dBm)
	LTE Band 38 (Channel Bandwidth: 20 MHz)	297.852 mW (24.74dBm)	207.014 mW (23.16dBm)
	LTE Band 41 (Channel Bandwidth: 5 MHz)	293.765 mW (24.68dBm)	216.770 mW (23.36dBm)
	LTE Band 41 (Channel Bandwidth: 10 MHz)	302.995 mW (24.81dBm)	220.800 mW (23.44dBm)
	LTE Band 41 (Channel Bandwidth: 15 MHz)	297.167 mW (24.73dBm)	230.144 mW (23.62dBm)
	LTE Band 41 (Channel Bandwidth: 20 MHz)	301.301 mW (24.79dBm)	233.346 mW (23.68dBm)

Antenna Type	Dipole Antenna with 2.3 dBi gain
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. The EUT was installed in a specific End-product.

Product	Brand	Model	FCC ID
veeaHub	veeaHub	VHH09-4GL	2ARXKVHE09-4GL

2. The End-product contains following accessory devices.

Product	Brand	Model	Description
Adapter	EDAC Power Electronics Co., Ltd.	EA1062SGR-480	I/P: 100-240 Vac, 50/60 Hz, 2.5A O/P: 48 Vdc, 1.35 A 1.2m DC cable with 1 core


3. The End-product use following devices (Support unit).

Product	Brand	Model	Description
PoE	N/A	APOE02-WM	O/P: 48 Vdc

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test> & <E.I.R.P. Test>

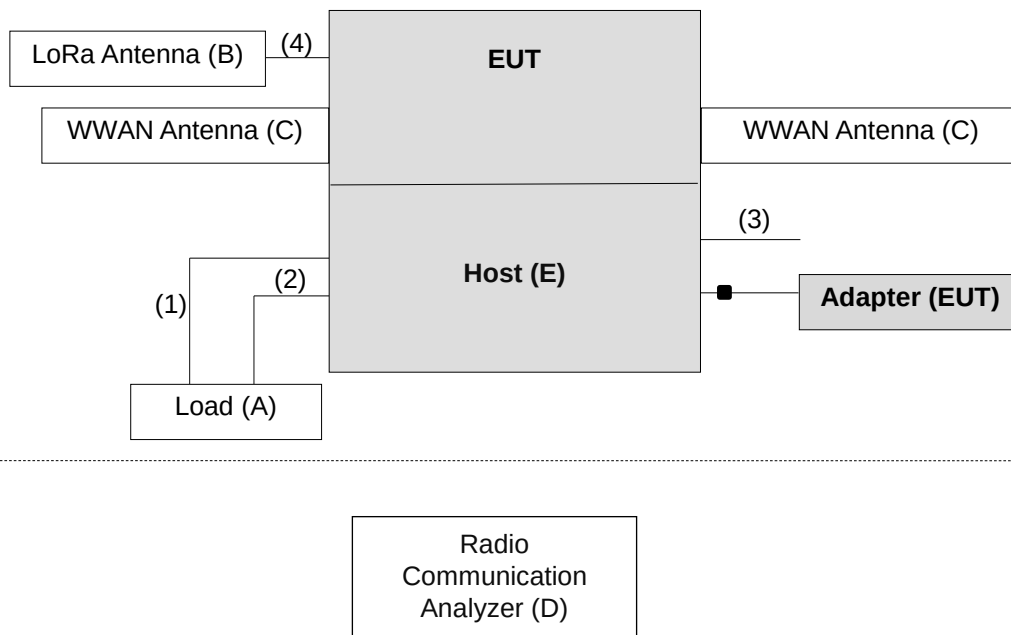

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	NA	NA	NA	NA	-
B.	LoRa Antenna	PCTEL	MFB9155NF	NA	NA	Provided by manufacturer
C.	WWAN Antenna	2J	2J2124W -C315N	NA	NA	Provided by manufacturer
D.	Radio Communication Analyzer	Anritsu	MT8820C	6201010284	NA	-
E.	veeaHub		VHE09XXXXX (X=A-Z, 0-9, blank or "-")	NA	2ARXKVHE09-4GL	Provided by manufacturer

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	0.4	N	0	RJ45, Cat5e
2.	LAN cable	1	0.4	N	0	RJ45, Cat5e
3.	RS232 cable	1	0.4	Y	0	-
4.	Coaxial cable	1	1.5	Y	0	-

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
LTE Band 38	X-plane

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21110, 21350	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	37800 to 38200	38200	10 MHz	QPSK	1 RB / 24 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission, select the worst radiated emission channel for final testing

LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	120 Vac, 60 Hz	Vincent Chen
Radiated Emission	21 deg. C, 73 % RH	120 Vac, 60 Hz	Vincent Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.1 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2 watts transmitter output power” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

Conducted Power Measurement:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 7						
BW	MCS Index	Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	21.93	21.77	21.71
		1	12	21.98	21.89	21.77
		1	24	21.63	21.61	21.40
		12	0	20.87	20.81	20.54
		12	6	20.66	20.70	20.37
		12	13	20.58	20.62	20.29
		25	0	20.64	20.63	20.39
	16QAM	1	0	20.66	20.57	20.43
		1	12	20.75	20.71	20.59
		1	24	20.50	20.54	20.39
		12	0	19.34	19.49	19.37
		12	6	19.39	19.66	19.58
		12	13	19.24	19.55	19.43
		25	0	19.32	19.65	19.43
BW	MCS Index	Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	22.30	21.74	22.18
		1	24	22.50	22.06	22.49
		1	49	22.27	21.77	22.28
		25	0	21.19	20.81	21.39
		25	12	21.23	20.83	21.49
		25	25	20.90	20.58	21.17
		50	0	20.95	20.73	21.36
	16QAM	1	0	20.87	20.26	20.82
		1	24	21.10	20.34	20.97
		1	49	20.99	20.56	21.03
		25	0	20.45	19.90	20.63
		25	12	20.34	19.80	20.43
		25	25	20.19	19.61	20.15
		50	0	20.09	19.63	20.10

LTE Band 7						
BW	MCS Index	Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	22.23	21.92	22.14
		1	37	22.41	22.22	22.35
		1	74	22.03	21.77	21.90
		36	0	20.92	20.76	20.88
		36	19	20.85	20.73	20.83
		36	39	20.73	20.63	20.77
		75	0	20.77	20.71	20.90
	16QAM	1	0	20.77	20.50	20.88
		1	37	20.99	20.38	20.70
		1	74	20.71	20.34	20.67
		36	0	20.00	19.73	19.99
		36	19	19.98	19.66	19.85
		36	39	19.88	19.51	19.80
		75	0	19.95	19.58	19.83
BW	MCS Index	Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	22.29	21.77	21.84
		1	50	22.44	21.81	21.80
		1	99	21.98	21.46	21.46
		50	0	21.22	20.69	20.71
		50	25	21.11	20.63	20.61
		50	50	21.00	20.48	20.56
		100	0	21.09	20.57	20.74
	16QAM	1	0	20.99	20.60	20.63
		1	50	21.00	20.56	20.49
		1	99	20.85	20.36	20.24
		50	0	20.23	19.76	19.61
		50	25	20.18	19.70	19.55
		50	50	19.95	19.55	19.41
		100	0	19.93	19.54	19.38

LTE Band 38						
BW	MCS Index	Channel		37775	38000	38225
		Frequency (MHz)		2572.5	2595	2617.5
5M	QPSK	1	0	21.96	21.76	21.93
		1	12	22.12	22.02	22.25
		1	24	22.09	21.82	21.95
		12	0	21.23	20.91	21.08
		12	6	21.13	20.82	20.92
		12	13	20.96	20.75	20.80
		25	0	21.03	20.86	20.92
	16QAM	1	0	20.62	20.49	20.49
		1	12	20.75	20.68	20.76
		1	24	20.59	20.47	20.52
		12	0	19.77	19.66	19.61
		12	6	19.82	19.76	19.76
		12	13	19.79	19.69	19.67
		25	0	19.85	19.77	19.70
BW	MCS Index	Channel		37800	38000	38200
		Frequency (MHz)		2575	2595	2615
10M	QPSK	1	0	22.10	21.91	22.09
		1	24	22.27	22.11	22.52
		1	49	22.05	21.91	22.08
		25	0	21.15	20.96	21.15
		25	12	21.13	20.96	21.05
		25	25	20.90	20.75	20.76
		50	0	20.95	20.91	20.84
	16QAM	1	0	20.61	20.56	20.64
		1	24	20.66	20.67	20.72
		1	49	20.41	20.48	20.70
		25	0	19.89	20.06	20.20
		25	12	19.66	19.78	19.94
		25	25	19.48	19.66	19.85
		50	0	19.61	19.85	19.94

LTE Band 38						
BW	MCS Index	Channel		37825	38000	38175
		Frequency (MHz)		2577.5	2595	2612.5
15M	QPSK	1	0	21.98	21.95	22.15
		1	37	22.20	22.17	22.34
		1	74	21.85	21.82	21.96
		36	0	20.95	20.97	21.04
		36	19	20.89	20.87	20.98
		36	39	20.69	20.78	20.86
		75	0	20.80	20.94	21.07
	16QAM	1	0	20.63	20.54	20.58
		1	37	20.62	20.65	20.85
		1	74	20.42	20.42	20.44
		36	0	19.75	19.75	19.78
		36	19	19.76	19.76	19.79
		36	39	19.67	19.67	19.69
		75	0	19.85	19.86	19.81
BW	MCS Index	Channel		37850	38000	38150
		Frequency (MHz)		2580	2595	2610
20M	QPSK	1	0	22.11	22.05	22.21
		1	50	22.32	22.22	22.44
		1	99	21.79	21.78	21.92
		50	0	21.04	21.04	21.19
		50	25	20.98	20.93	21.11
		50	50	20.83	20.79	21.01
		100	0	20.85	20.93	21.05
	16QAM	1	0	20.69	20.61	20.69
		1	50	20.78	20.76	20.86
		1	99	20.41	20.34	20.34
		50	0	20.08	19.98	19.92
		50	25	19.87	19.87	19.88
		50	50	19.74	19.83	19.89
		100	0	19.74	19.84	19.91

LTE Band 41						
BW	MCS Index	Channel		39675	40620	41565
		Frequency (MHz)		2498.5	2593	2687.5
5M	QPSK	1	0	22.30	22.14	22.16
		1	12	22.38	22.31	22.34
		1	24	22.23	22.12	22.23
		12	0	21.30	21.18	21.33
		12	6	21.25	21.20	21.31
		12	13	21.17	21.14	21.31
		25	0	21.11	21.14	21.31
	16QAM	1	0	20.97	20.92	20.83
		1	12	21.06	21.05	20.97
		1	24	20.64	20.76	20.69
		12	0	20.09	20.21	20.21
		12	6	20.13	20.21	20.27
		12	13	20.06	20.25	20.40
		25	0	20.18	20.42	20.49
BW	MCS Index	Channel		39700	40620	41540
		Frequency (MHz)		2501	2593	2685
10M	QPSK	1	0	22.45	22.26	22.34
		1	24	22.51	22.47	22.50
		1	49	22.46	22.23	22.44
		25	0	21.52	21.28	21.40
		25	12	21.49	21.26	21.45
		25	25	21.41	21.17	21.26
		50	0	21.42	21.21	21.21
	16QAM	1	0	21.05	20.99	20.89
		1	24	21.14	21.06	20.96
		1	49	20.75	20.73	20.53
		25	0	20.11	20.18	20.00
		25	12	20.18	20.20	20.11
		25	25	20.05	20.12	20.03
		50	0	20.16	20.22	20.23

LTE Band 41						
BW	MCS Index	Channel		39725	40620	41515
		Frequency (MHz)		2503.5	2593	2682.5
15M	QPSK	1	0	22.36	22.31	22.34
		1	37	22.43	22.41	22.40
		1	74	22.19	22.13	22.21
		36	0	21.38	21.32	21.33
		36	19	21.33	21.23	21.26
		36	39	21.25	21.16	21.09
		75	0	21.30	21.20	21.13
	16QAM	1	0	21.17	20.91	20.94
		1	37	21.32	21.19	21.18
		1	74	20.88	20.69	20.71
		36	0	20.20	20.06	20.07
		36	19	20.19	20.13	20.08
		36	39	20.01	20.06	20.03
		75	0	20.15	20.22	20.12
BW	MCS Index	Channel		39750	40620	41490
		Frequency (MHz)		2506	2593	2680
20M	QPSK	1	0	22.33	22.39	22.35
		1	50	22.49	22.42	22.32
		1	99	22.10	22.12	21.96
		50	0	21.18	21.27	21.09
		50	25	21.21	21.25	20.98
		50	50	21.10	21.10	20.91
		100	0	21.23	21.27	21.00
	16QAM	1	0	21.05	20.96	21.00
		1	50	21.38	21.18	21.16
		1	99	20.74	20.66	20.74
		50	0	20.35	20.23	20.23
		50	25	20.31	20.29	20.37
		50	50	20.17	20.19	20.18
		100	0	20.10	20.10	20.12

EIRP Power (dBm)

LTE Band 7						
BW	MCS Index	Channel		20775	21100	21425
		Frequency (MHz)		2502.5	2535	2567.5
5M	QPSK	1	0	24.23	24.07	24.01
		1	12	24.28	24.19	24.07
		1	24	23.93	23.91	23.70
		12	0	23.17	23.11	22.84
		12	6	22.96	23.00	22.67
		12	13	22.88	22.92	22.59
		25	0	22.94	22.93	22.69
	16QAM	1	0	22.96	22.87	22.73
		1	12	23.05	23.01	22.89
		1	24	22.80	22.84	22.69
		12	0	21.64	21.79	21.67
		12	6	21.69	21.96	21.88
		12	13	21.54	21.85	21.73
		25	0	21.62	21.95	21.73
BW	MCS Index	Channel		20800	21100	21400
		Frequency (MHz)		2505	2535	2565
10M	QPSK	1	0	24.60	24.04	24.48
		1	24	24.80	24.36	24.79
		1	49	24.57	24.07	24.58
		25	0	23.49	23.11	23.69
		25	12	23.53	23.13	23.79
		25	25	23.20	22.88	23.47
		50	0	23.25	23.03	23.66
	16QAM	1	0	23.17	22.56	23.12
		1	24	23.40	22.64	23.27
		1	49	23.29	22.86	23.33
		25	0	22.75	22.20	22.93
		25	12	22.64	22.10	22.73
		25	25	22.49	21.91	22.45
		50	0	22.39	21.93	22.40

*EIRP = Conducted + antenna gain (2.3dBi)

LTE Band 7						
BW	MCS Index	Channel		20825	21100	21375
		Frequency (MHz)		2507.5	2535	2562.5
15M	QPSK	1	0	24.53	24.22	24.44
		1	37	24.71	24.52	24.65
		1	74	24.33	24.07	24.20
		36	0	23.22	23.06	23.18
		36	19	23.15	23.03	23.13
		36	39	23.03	22.93	23.07
		75	0	23.07	23.01	23.20
	16QAM	1	0	23.07	22.80	23.18
		1	37	23.29	22.68	23.00
		1	74	23.01	22.64	22.97
		36	0	22.30	22.03	22.29
		36	19	22.28	21.96	22.15
		36	39	22.18	21.81	22.10
		75	0	22.25	21.88	22.13
BW	MCS Index	Channel		20850	21100	21350
		Frequency (MHz)		2510	2535	2560
20M	QPSK	1	0	24.59	24.07	24.14
		1	50	24.74	24.11	24.10
		1	99	24.28	23.76	23.76
		50	0	23.52	22.99	23.01
		50	25	23.41	22.93	22.91
		50	50	23.30	22.78	22.86
		100	0	23.39	22.87	23.04
	16QAM	1	0	23.29	22.90	22.93
		1	50	23.30	22.86	22.79
		1	99	23.15	22.66	22.54
		50	0	22.53	22.06	21.91
		50	25	22.48	22.00	21.85
		50	50	22.25	21.85	21.71
		100	0	22.23	21.84	21.68

*EIRP = Conducted + antenna gain (2.3dBi)

LTE Band 38						
BW	MCS Index	Channel		37775	38000	38225
		Frequency (MHz)		2572.5	2595	2617.5
5M	QPSK	1	0	24.26	24.06	24.23
		1	12	24.42	24.32	24.55
		1	24	24.39	24.12	24.25
		12	0	23.53	23.21	23.38
		12	6	23.43	23.12	23.22
		12	13	23.26	23.05	23.10
		25	0	23.33	23.16	23.22
	16QAM	1	0	22.92	22.79	22.79
		1	12	23.05	22.98	23.06
		1	24	22.89	22.77	22.82
		12	0	22.07	21.96	21.91
		12	6	22.12	22.06	22.06
		12	13	22.09	21.99	21.97
		25	0	22.15	22.07	22.00
BW	MCS Index	Channel		37800	38000	38200
		Frequency (MHz)		2575	2595	2615
10M	QPSK	1	0	24.40	24.21	24.39
		1	24	24.57	24.41	24.82
		1	49	24.35	24.21	24.38
		25	0	23.45	23.26	23.45
		25	12	23.43	23.26	23.35
		25	25	23.20	23.05	23.06
		50	0	23.25	23.21	23.14
	16QAM	1	0	22.91	22.86	22.94
		1	24	22.96	22.97	23.02
		1	49	22.71	22.78	23.00
		25	0	22.19	22.36	22.50
		25	12	21.96	22.08	22.24
		25	25	21.78	21.96	22.15
		50	0	21.91	22.15	22.24

*EIRP = Conducted + antenna gain (2.3dBi)

LTE Band 38						
BW	MCS Index	Channel		37825	38000	38175
		Frequency (MHz)		2577.5	2595	2612.5
15M	QPSK	1	0	24.28	24.25	24.45
		1	37	24.50	24.47	24.64
		1	74	24.15	24.12	24.26
		36	0	23.25	23.27	23.34
		36	19	23.19	23.17	23.28
		36	39	22.99	23.08	23.16
		75	0	23.10	23.24	23.37
	16QAM	1	0	22.93	22.84	22.88
		1	37	22.92	22.95	23.15
		1	74	22.72	22.72	22.74
		36	0	22.05	22.05	22.08
		36	19	22.06	22.06	22.09
		36	39	21.97	21.97	21.99
		75	0	22.15	22.16	22.11
BW	MCS Index	Channel		37850	38000	38150
		Frequency (MHz)		2580	2595	2610
20M	QPSK	1	0	24.41	24.35	24.51
		1	50	24.62	24.52	24.74
		1	99	24.09	24.08	24.22
		50	0	23.34	23.34	23.49
		50	25	23.28	23.23	23.41
		50	50	23.13	23.09	23.31
		100	0	23.15	23.23	23.35
	16QAM	1	0	22.99	22.91	22.99
		1	50	23.08	23.06	23.16
		1	99	22.71	22.64	22.64
		50	0	22.38	22.28	22.22
		50	25	22.17	22.17	22.18
		50	50	22.04	22.13	22.19
		100	0	22.04	22.14	22.21

*EIRP = Conducted + antenna gain (2.3dBi)

LTE Band 41						
BW	MCS Index	Channel		39675	40620	41565
		Frequency (MHz)		2498.5	2593	2687.5
5M	QPSK	1	0	24.60	24.44	24.46
		1	12	24.68	24.61	24.64
		1	24	24.53	24.42	24.53
		12	0	23.60	23.48	23.63
		12	6	23.55	23.50	23.61
		12	13	23.47	23.44	23.61
		25	0	23.41	23.44	23.61
	16QAM	1	0	23.27	23.22	23.13
		1	12	23.36	23.35	23.27
		1	24	22.94	23.06	22.99
		12	0	22.39	22.51	22.51
		12	6	22.43	22.51	22.57
		12	13	22.36	22.55	22.70
		25	0	22.48	22.72	22.79
BW	MCS Index	Channel		39700	40620	41540
		Frequency (MHz)		2501	2593	2685
10M	QPSK	1	0	24.75	24.56	24.64
		1	24	24.81	24.77	24.80
		1	49	24.76	24.53	24.74
		25	0	23.82	23.58	23.70
		25	12	23.79	23.56	23.75
		25	25	23.71	23.47	23.56
		50	0	23.72	23.51	23.51
	16QAM	1	0	23.35	23.29	23.19
		1	24	23.44	23.36	23.26
		1	49	23.05	23.03	22.83
		25	0	22.41	22.48	22.30
		25	12	22.48	22.50	22.41
		25	25	22.35	22.42	22.33
		50	0	22.46	22.52	22.53

*EIRP = Conducted + antenna gain (2.3dBi)

LTE Band 41						
BW	MCS Index	Channel		39725	40620	41515
		Frequency (MHz)		2503.5	2593	2682.5
15M	QPSK	1	0	24.66	24.61	24.64
		1	37	24.73	24.71	24.70
		1	74	24.49	24.43	24.51
		36	0	23.68	23.62	23.63
		36	19	23.63	23.53	23.56
		36	39	23.55	23.46	23.39
		75	0	23.60	23.50	23.43
	16QAM	1	0	23.47	23.21	23.24
		1	37	23.62	23.49	23.48
		1	74	23.18	22.99	23.01
		36	0	22.50	22.36	22.37
		36	19	22.49	22.43	22.38
		36	39	22.31	22.36	22.33
		75	0	22.45	22.52	22.42
BW	MCS Index	Channel		39750	40620	41490
		Frequency (MHz)		2506	2593	2680
20M	QPSK	1	0	24.63	24.69	24.65
		1	50	24.79	24.72	24.62
		1	99	24.40	24.42	24.26
		50	0	23.48	23.57	23.39
		50	25	23.51	23.55	23.28
		50	50	23.40	23.40	23.21
		100	0	23.53	23.57	23.30
	16QAM	1	0	23.35	23.26	23.30
		1	50	23.68	23.48	23.46
		1	99	23.04	22.96	23.04
		50	0	22.65	22.53	22.53
		50	25	22.61	22.59	22.67
		50	50	22.47	22.49	22.48
		100	0	22.40	22.40	22.42

*EIRP = Conducted + antenna gain (2.3dBi)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.

4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- c. Following C63.26 section 5.5 and 5.2.7.
 $EIRP (dBm) = E (dB\mu V/m) + 20 \log (D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $ERP (dBm) = E (dB\mu V/m) + 20 \log (D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

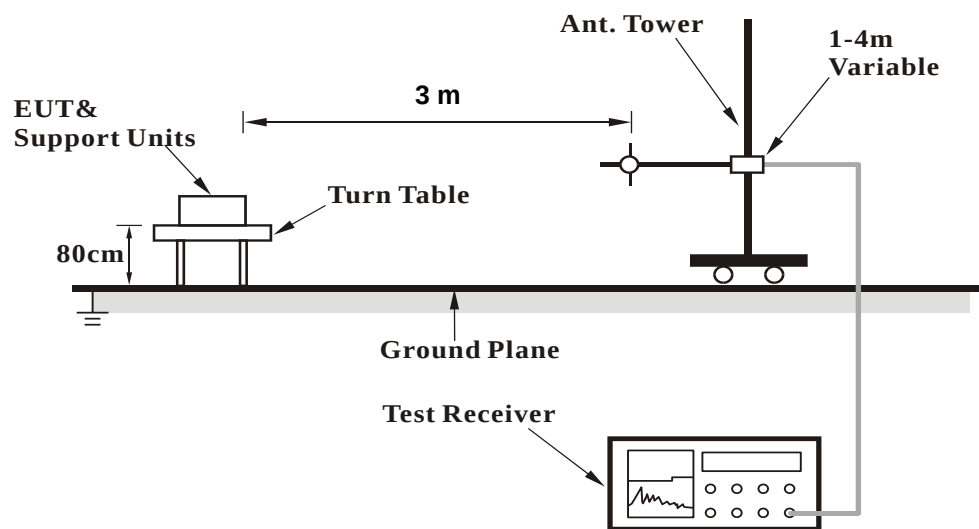

<Radiated Emission above 1 GHz>

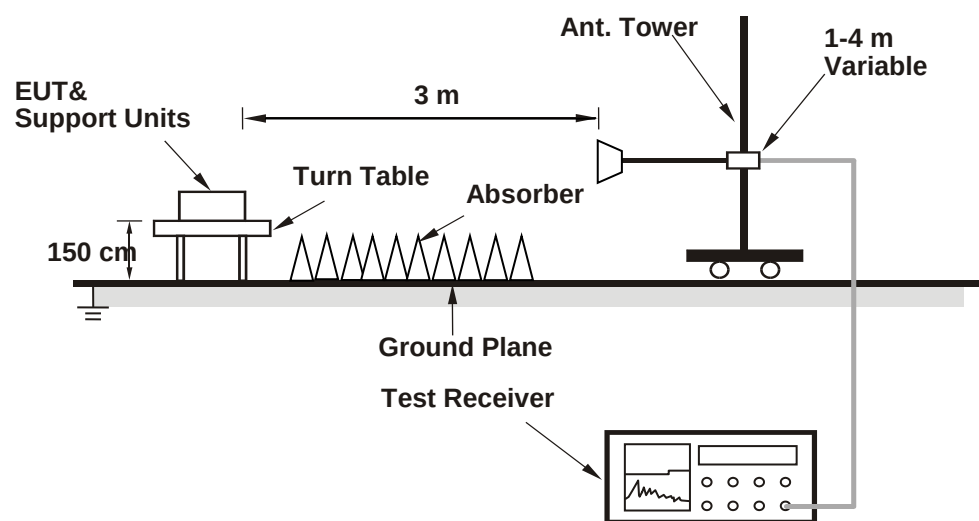

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results


Below 1GHz

RF Mode	TX LTE Band XXXVIII-10MHz	Channel	CH 38200 : 2615 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	107.60	-42.78	-25.00	-17.78	1.23 H	239	67.87	-110.65
2	209.45	-48.04	-25.00	-23.04	1.87 H	92	63.46	-111.50
3	330.70	-47.44	-25.00	-22.44	2.25 H	234	58.68	-106.12
4	503.36	-48.49	-25.00	-23.49	1.96 H	127	52.79	-101.28
5	624.61	-49.05	-25.00	-24.05	2.32 H	259	49.07	-98.12
6	874.87	-47.85	-25.00	-22.85	1.52 H	70	46.02	-93.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

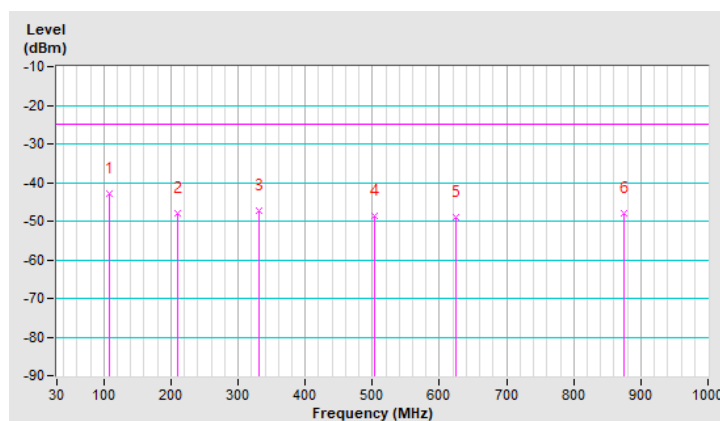


RF Mode	TX LTE Band XXXVIII-10MHz	Channel	CH 38200 : 2615 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	74.62	-45.55	-25.00	-20.55	1.52 V	117	65.75	-111.30
2	250.19	-53.04	-25.00	-28.04	1.78 V	353	56.65	-109.69
3	442.25	-46.60	-25.00	-21.60	3.78 V	7	56.10	-102.70
4	567.38	-52.13	-25.00	-27.13	1.58 V	182	47.99	-100.12
5	673.11	-49.72	-25.00	-24.72	3.23 V	176	47.64	-97.36
6	874.87	-46.91	-25.00	-21.91	1.42 V	331	46.96	-93.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

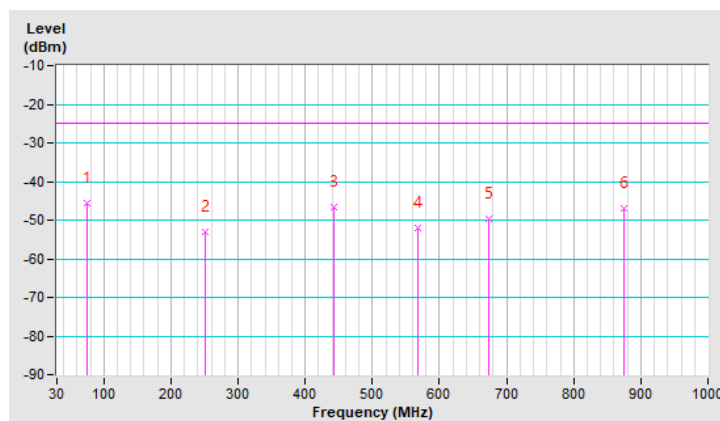

Above 1GHz

RF Mode	TX LTE Band XXXVIII-10MHz	Channel	CH 38200 : 2615 MHz
Frequency Range	1GMHz ~ 27GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5230.00	-51.39	-25.00	-26.39	1.36 H	227	60.49	-111.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5230.00	-51.14	-25.00	-26.14	1.46 V	226	60.74	-111.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band XXXVIII-10MHz	Channel	CH 38200 : 2615 MHz
Frequency Range	1GMHz ~ 27GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-47.2	-25.0	-22.2	2.13 H	331	46.4	-93.6
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5190.00	-47.7	-25.0	-22.7	2.96 V	347	45.9	-93.6

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---