Shenzhen Global Test Service Co.,Ltd.
No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....:	**GTS20190911008-1-7**
FCC ID..... :	**2ATMQBM-308B**
Compiled by (position+printed name+signature)..:	File administrators Peter Xiao
Supervised by (position+printed name+signature)..:	Test Engineer Moon Tan
Approved by (position+printed name+signature)..:	Manager Simon Hu
Date of issue.....:	Oct.09, 2019
Representative Laboratory Name .:	**Shenzhen Global Test Service Co.,Ltd.**
Address.....:	No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong
Applicant's name.....:	**LIANSHIRUI TECHNOLOGY CO., LTD.**
Address .....:	2F,BUILDING 5, 9#,ZHUZAIWAN,LICHANG COMMUNITY, PINGHU TOWN,LONGGANG DISTRICT,SHENZHEN CITY, CHINA
Test specification .....:	
Standard .....:	**FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**
TRF Originator.....:	Shenzhen Global Test Service Co.,Ltd.
Master TRF.....:	Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....:	**Baby monitor(Monitor part)**
Trade Mark .....:	N/A
Manufacturer .....:	LIANSHIRUI TECHNOLOGY CO., LTD.
Model/Type reference.....:	BM-308
Listed Models .....:	N/A
Modulation Type .....:	GFSK
Operation Frequency.....:	From 2410MHz to 2473MHz
Hardware Version .....:	N/A
Software Version .....:	N/A
Rating .....:	DC 3.7V by battery
Result.....:	**PASS**

TEST REPORT

Test Report No. :	GTS20190911008-1-7	Oct.09, 2019 Date of issue

Equipment under Test	:	Baby monitor(Monitor part)
Model /Type	:	BM-308
Listed Models	:	N/A
Applicant	:	**LIANSHIRUI TECHNOLOGY CO., LTD.**
Address	:	2F,BUILDING 5, 9#,ZHUZAIWAN,LICHANG COMMUNITY, PINGHU TOWN,LONGGANG DISTRICT,SHENZHEN CITY, CHINA
Manufacturer	:	**LIANSHIRUI TECHNOLOGY CO., LTD.**
Address	:	2F,BUILDING 5, 9#,ZHUZAIWAN,LICHANG COMMUNITY, PINGHU TOWN,LONGGANG DISTRICT,SHENZHEN CITY, CHINA

Test Result:	**PASS**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS 4

2. SUMMARY 5

2.1. General Remarks 5
2.2. Product Description 5
2.3. Equipment Under Test 6
2.4. Short description of the Equipment under Test (EUT) 6
2.5. EUT operation mode 6
2.6. Block Diagram of Test Setup 6
2.7. Related Submittal(s) / Grant (s) 6
2.8. Special Accessories 6
2.9. Modifications 7

3. TEST ENVIRONMENT 7

3.1. Address of the test laboratory 7
3.2. Test Facility 7
3.3. Environmental conditions 7
3.4. Summary of measurement results 8
3.5. Statement of the measurement uncertainty 9
3.6. Equipments Used during the Test 10

4. TEST CONDITIONS AND RESULTS 11

4.1. AC Power Conducted Emission 11
4.2. Radiated Emission 13
4.3. Maximum Peak Output Power 19
4.4. 20dB Bandwidth 20
4.5. Frequency Separation 22
4.6. Band Edge Compliance of RF Emission 24
4.7. Number of hopping frequency 28
4.8. Time Of Occupancy(Dwell Time) 29
4.9. Pseudorandom Frequency Hopping Sequence 32
4.10. Antenna Requirement 33

5. TEST SETUP PHOTOS OF THE EUT 34

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT 34

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices
KDB558074 D01 v05r02: Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Sep.27, 2019
Testing commenced on	:	Sep.27, 2019
Testing concluded on	:	Oct.09, 2019

2.2. Product Description

Product Name:	Baby monitor(Monitor part)
Trade Mark:	N/A
Model/Type reference:	BM-308
List Model:	N/A
Model Declaration	N/A
Adapter information	Model:EP19-050100WXLZ Input: AC 100~240V 50/60Hz 0.2A Max Output: DC 5V/1A
2.4G(TX/RX)	
Power supply:	DC 3.7V by battery
Hardware Version	N/A
Software Version	N/A
Operation frequency	2410-2473MHz
Modulation Type	GFSK
Channel number:	19 Channels
Antenna Description	Internal Antenna; 1.0dBi(Max.)

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	○	230V / 50 Hz	○	120V / 60Hz
		○	12 V DC	○	24 V DC
		●	Other (specified in blank below)		

DC 3.7V

2.4. Short description of the Equipment under Test (EUT)

This is a Baby monitor(Monitor part)

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 19 channels provided to the EUT. Channel 00/09/18 was selected to test.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	**2410.0**	10	2445.0
01	2413.5	11	2448.5
02	2417.0	12	2452.0
03	2420.5	13	2455.5
04	2424.0	14	2459.0
05	2427.5	15	2462.5
06	2431.0	16	2466.0
07	2434.5	17	2469.5
08	2438.0	18	**2473.0**
09	**2441.5**		

2.6. Block Diagram of Test Setup

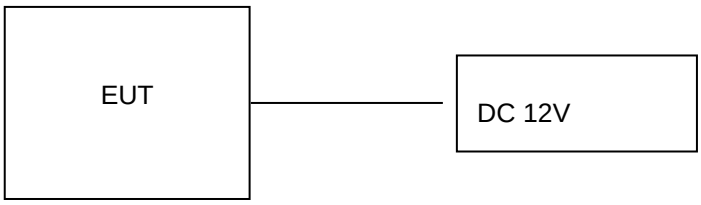

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ATMQBM-308B** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
/	/	/	/	/

2.9. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.
No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)
Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)
Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	☐	☐	☒	☐	Not applicable for FHSS
§15.247(a)(1)	Carrier Frequency separation	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	☒ ☒	☐	☐	☐	complies
§15.247(a)(1)	Number of Hopping channels	GFSK	☒ Full	GFSK	☒ Full	☒ ☒	☐	☐	☐	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Middle	☒ ☒	☐	☐	☐	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	GFSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	GFSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	-/-	-/-	-/-	-/-	☐	☐	☐	☐	complies
§15.247(d)	TX spurious emissions radiated	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☐	☐	☒	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	-/-	-/-	-/-	-/-	☐	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	☒	☐	☐	☐	complies

Remark:
1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
Transient Limiter	CYBERTEK	EM5010A	E1950100106	2019/09/20	2020/09/19
By-log Antenna	SCHWARZBECK	VULB9163	000976	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSV40-N	101800	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	2019/09/20	2020/09/19
Double Ridged Horn Antenna (1~18GHz)	SCHWARZBECK	BBHA 9120D	01622	2019/09/20	2020/09/19
Double Ridged Horn Antenna	Rohde&Schwarz	HF907	100265	2019/09/20	2020/09/19
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2019/09/20	2020/09/19
Horn Antenna (18GHz~40GHz)	ETS	3116	00086467	2019/09/20	2020/09/19
Amplifier (26.5GHz~40GHz)	EMCI	EMC2654045	980028	2019/09/20	2020/09/19
Amplifier (0.1GHz~26.5GHz)	EMCI	EMC012645SE	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
RF Cable	HUBER+SUHNER	RG214	N/A	2019/09/20	2020/09/19
Conducted Emission Test Software	ES-K1	V1.71	N/A	2019/09/20	2020/09/19
Radiated Emission Test Software	JS32-RE	V2.5.0.9	N/A	2019/09/20	2020/09/19

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

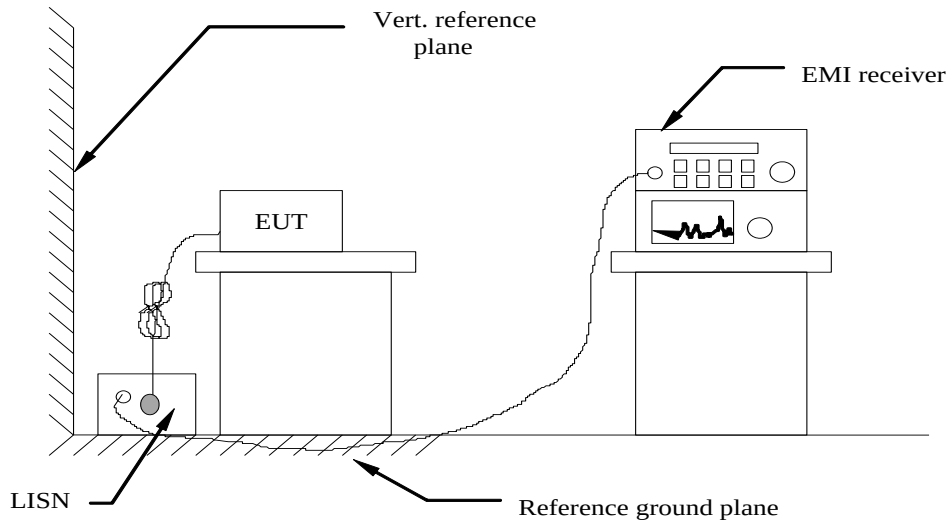

TEST PROCEDURE

1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2 Support equipment, if needed, was placed as per ANSI C63.10-2013.
3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4 The EUT received DC 5V power, the adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5 All support equipments received AC power from a second LISN, if any.
6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following：

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

TEST RESULTS

Remark: We measured Conducted Emission at GFSK mode in AC 120V/60Hz and AC 240V/50Hz, the worst case was recorded .

Power supply:	AC 120V/60Hz	Polarization	L

Test Graph

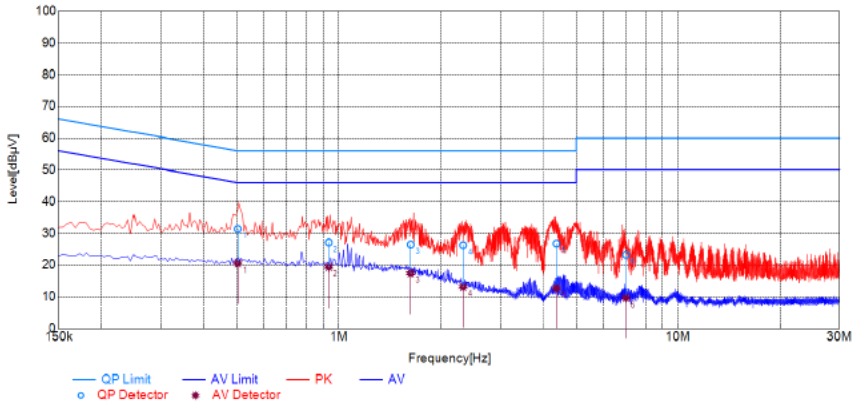

Final Data List

NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.5025	21.09	10.34	10.25	31.34	20.59	56.00	46.00	24.66	25.41	L1	PASS
2	0.9307	16.97	9.16	10.21	27.18	19.37	56.00	46.00	28.82	26.63	L1	PASS
3	1.6283	16.29	7.25	10.24	26.53	17.49	56.00	46.00	29.47	28.51	L1	PASS
4	2.3195	16.02	2.87	10.30	26.32	13.17	56.00	46.00	29.68	32.83	L1	PASS
5	4.3813	16.49	2.35	10.36	26.85	12.71	56.00	46.00	29.15	33.29	L1	PASS
6	7.0263	12.74	-0.86	10.51	23.25	9.65	60.00	50.00	36.75	40.35	L1	PASS

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N

Test Graph

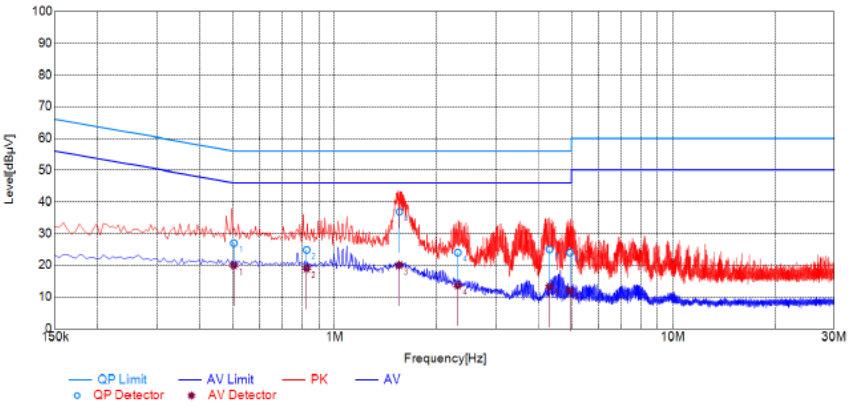

Final Data List

NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.5031	16.81	9.67	10.25	27.06	19.92	56.00	46.00	28.94	26.08	N	PASS
2	0.8260	14.66	8.80	10.24	24.90	19.04	56.00	46.00	31.10	26.96	N	PASS
3	1.5522	26.67	9.76	10.24	36.91	20.00	56.00	46.00	19.09	26.00	N	PASS
4	2.3071	13.73	3.41	10.30	24.03	13.71	56.00	46.00	31.97	32.29	N	PASS
5	4.3183	14.68	3.00	10.36	25.04	13.36	56.00	46.00	30.96	32.64	N	PASS
6	4.9536	13.69	1.76	10.34	24.03	12.10	56.00	46.00	31.97	33.90	N	PASS

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

4.2. Radiated Emission

TEST CONFIGURATION

Frequency range 9 KHz – 30MHz

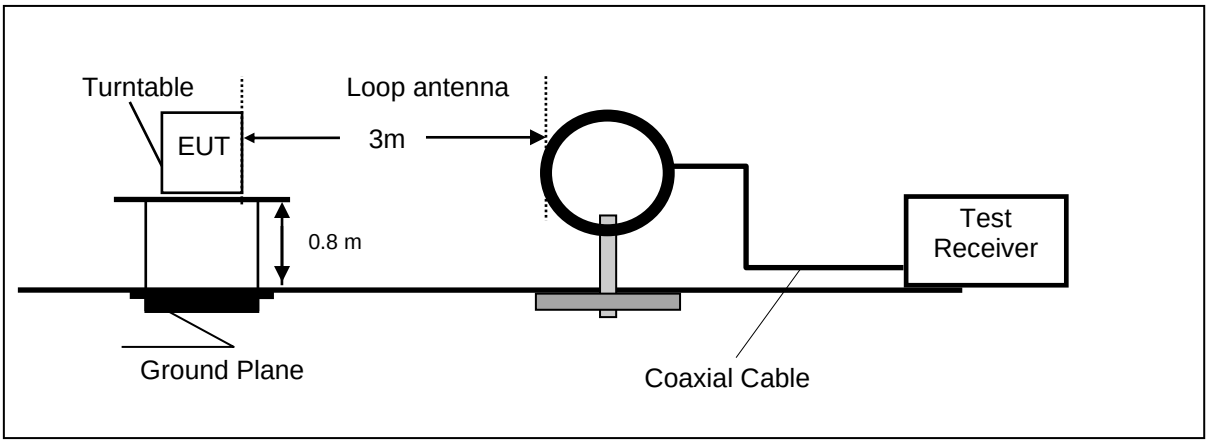

Frequency range 30MHz – 1000MHz

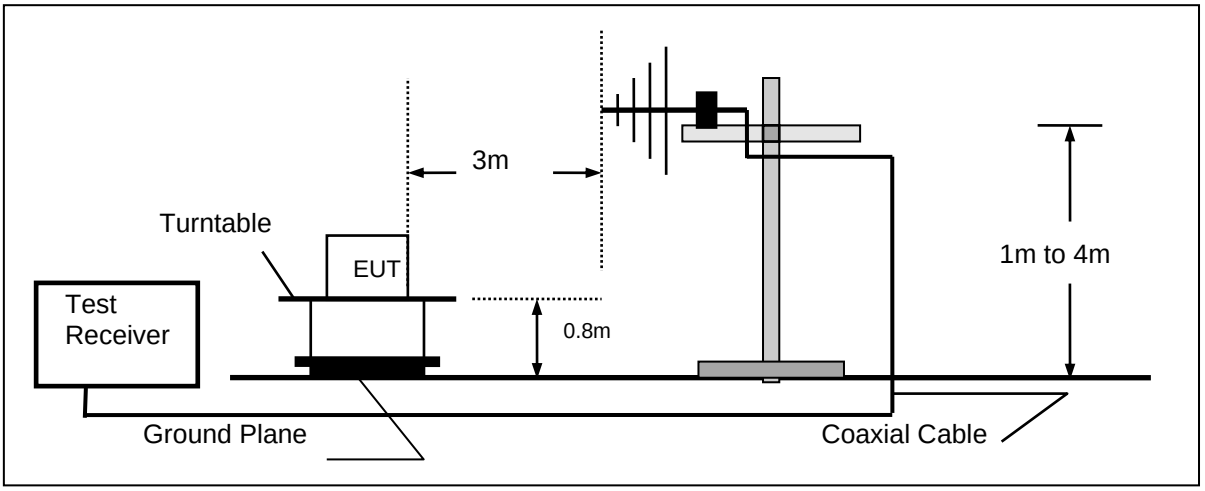

Frequency range above 1GHz-25GHz

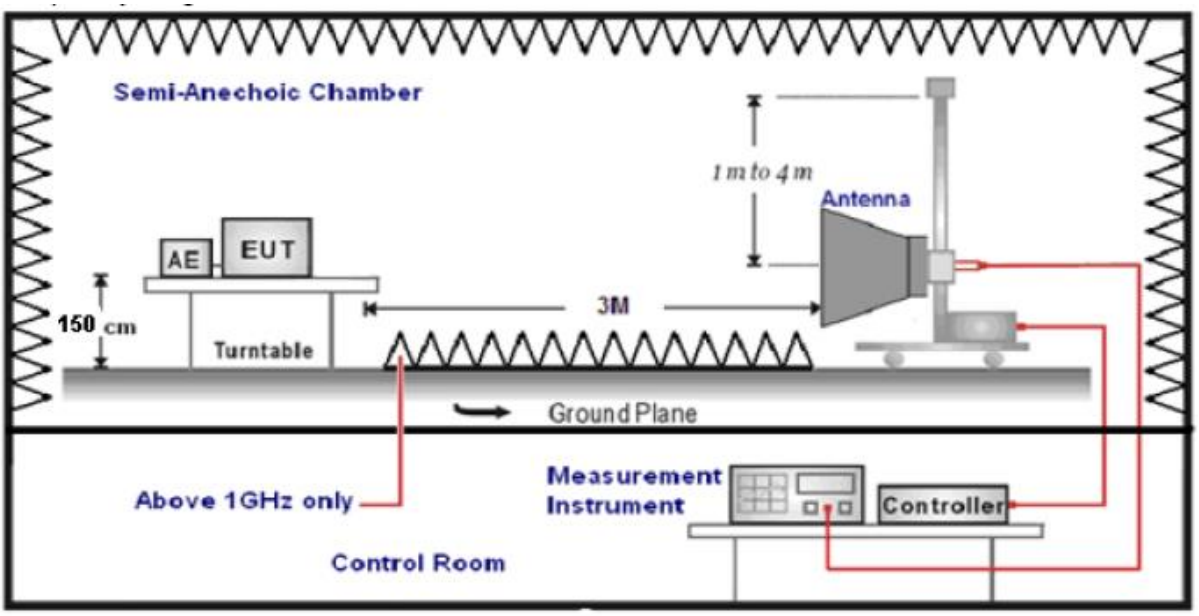

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.
The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at GFSK mode from 30MHz to 25GHz and recorded worst case at GFSK mode.

For 30MHz-1GHz

Horizontal

Test Graph

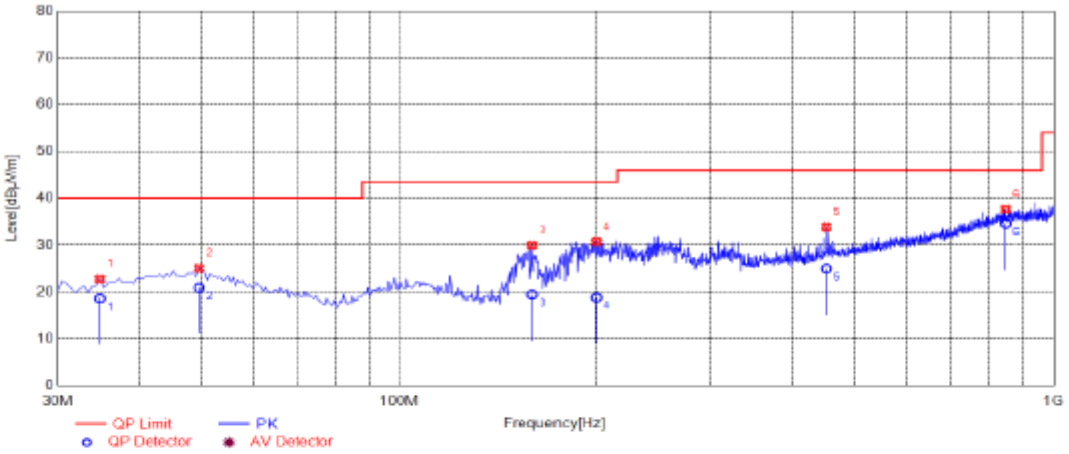

Suspected List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.8500	39.85	-17.10	22.75	40.00	17.25	100	343	PK	Horizonta	PASS
2	49.4000	39.91	-14.84	25.07	40.00	14.93	100	213	PK	Horizonta	PASS
3	159.9800	49.37	-19.40	29.97	43.50	13.53	100	283	PK	Horizonta	PASS
4	200.7200	47.18	-16.47	30.71	43.50	12.79	100	96	PK	Horizonta	PASS
5	451.9500	44.57	-10.71	33.86	46.00	12.14	100	164	PK	Horizonta	PASS
6	850.1350	41.77	-4.11	37.66	46.00	8.34	100	338	PK	Horizonta	PASS

Quasi-peak Final Data List										
NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
1	34.8500	35.71	-17.10	18.61	40.00	21.39	100	343	Horizontal	PASS
2	49.4000	35.77	-14.84	20.93	40.00	19.07	100	213	Horizontal	PASS
3	159.9800	38.86	-19.40	19.46	43.50	7.8	100	283	Horizontal	PASS
4	200.7200	35.3	-16.47	18.83	43.50	24.67	100	96	Horizontal	PASS
5	451.9500	35.69	-10.71	24.98	46.00	21.02	100	164	Horizontal	PASS
6	850.1350	38.68	-4.11	34.57	46.00	11.43	100	338	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

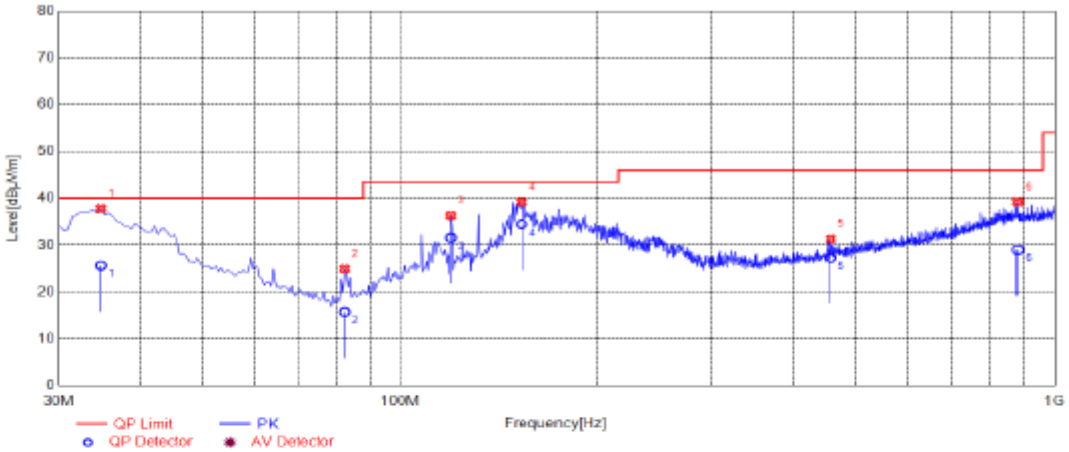

Suspected List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	34.8500	54.89	-17.10	37.79	40.00	2.21	100	40	PK	Vertical	PASS
2	82.3800	45.28	-20.33	24.95	40.00	15.05	100	80	PK	Vertical	PASS
3	119.7250	54.68	-18.36	36.32	43.50	7.18	100	137	PK	Vertical	PASS
4	153.6750	58.68	-19.49	39.19	43.50	4.31	100	38	PK	Vertical	PASS
5	457.2850	41.94	-10.62	31.32	46.00	14.68	100	72	PK	Vertical	PASS
6	881.6600	42.99	-3.78	39.21	46.00	6.79	100	27	PK	Vertical	PASS

Quasi-peak Final Data List										
NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
1	34.8500	42.76	-17.10	25.66	40.00	14.34	100	40	Vertical	PASS
2	82.3800	36.06	-20.33	15.73	40.00	24.27	100	80	Vertical	PASS
3	119.7250	49.96	-18.36	31.60	43.50	11.90	100	137	Vertical	PASS
4	153.6750	53.96	-19.49	34.47	43.50	9.03	100	38	Vertical	PASS
5	457.2850	37.95	-10.62	27.33	46.00	18.67	100	72	Vertical	PASS
6	881.6600	32.78	-3.78	29.00	46.00	17.00	100	27	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 25GHz

Frequency(MHz):			**2410**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
4820	42.32	PK	74	-31.68	1	210	40.22	31.6	7.0	36.5	2.1
4820	34.36	AV	54	-19.64	1	210	32.26	31.6	7.0	36.5	2.1
Frequency(MHz):			**2441.5**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
4883	45.58	PK	74	-28.42	1	89	43.46	31.02	7.6	36.5	2.12
4883	31.31	AV	54	-22.69	1	89	29.19	31.02	7.6	36.5	2.12
Frequency(MHz):			**2473**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
4946	44.98	PK	74	-29.02	1	239	41.78	31.58	7.82	36.2	3.2
4946	36.28	AV	54	-17.72	1	239	33.08	31.58	7.82	36.2	3.2

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices:
The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.
The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple derector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

TEST RESULTS

Modulation	Channel	Peak Output power (dBm)	Limit (dBm)	Result
GFSK	00	7.82	21	Pass
	09	7.35		
	18	7.41		

Note: The test results including the cable lose.

4.4. 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.
The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwith.

TEST RESULTS

Modulation	Channel	20dB Bandwidth (MHz)	Result
GFSK	00	5.225	PASS
	09	5.211	PASS
	18	5.214	PASS

Test plot as follows:

CH00

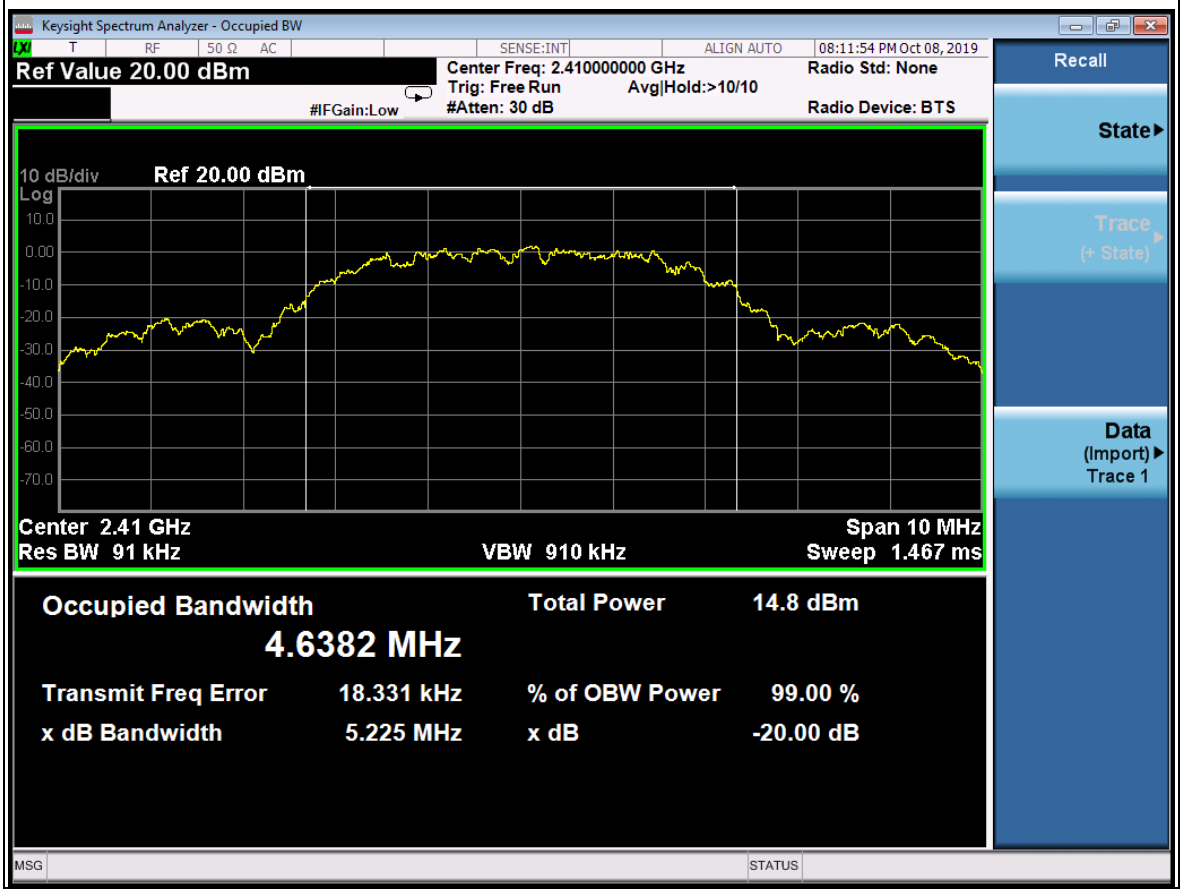

CH09

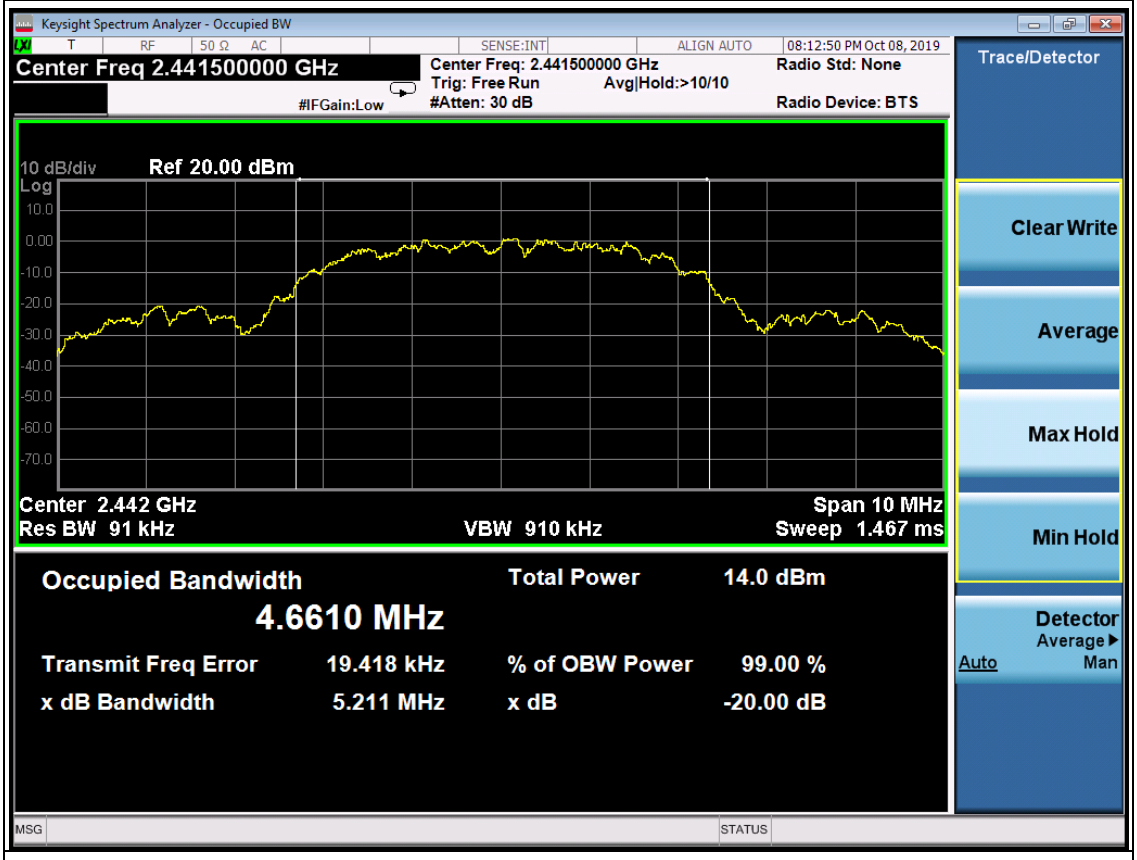
Keysight Spectrum Analyzer - Occupied BW
T RF 50 Ω AC SENSE:INT ALIGN AUTO 08:12:50 PM Oct 08, 2019
Center Freq 2.441500000 GHz
Center Freq: 2.441500000 GHz
Trig: Free Run Avg|Hold:>10/10
#Atten: 30 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
Trace/Detector
10 dB/div Ref 20.00 dBm
Log
10.0
0.00
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
Center 2.442 GHz
Res BW 91 kHz
VBW 910 kHz
Span 10 MHz
Sweep 1.467 ms
Clear Write
Average
Max Hold
Min Hold
Occupied Bandwidth
4.6610 MHz
Total Power 14.0 dBm
Transmit Freq Error 19.418 kHz
% of OBW Power 99.00 %
x dB Bandwidth 5.211 MHz
x dB -20.00 dB
Detector
Average
Auto
Man
MSG
STATUS

CH18

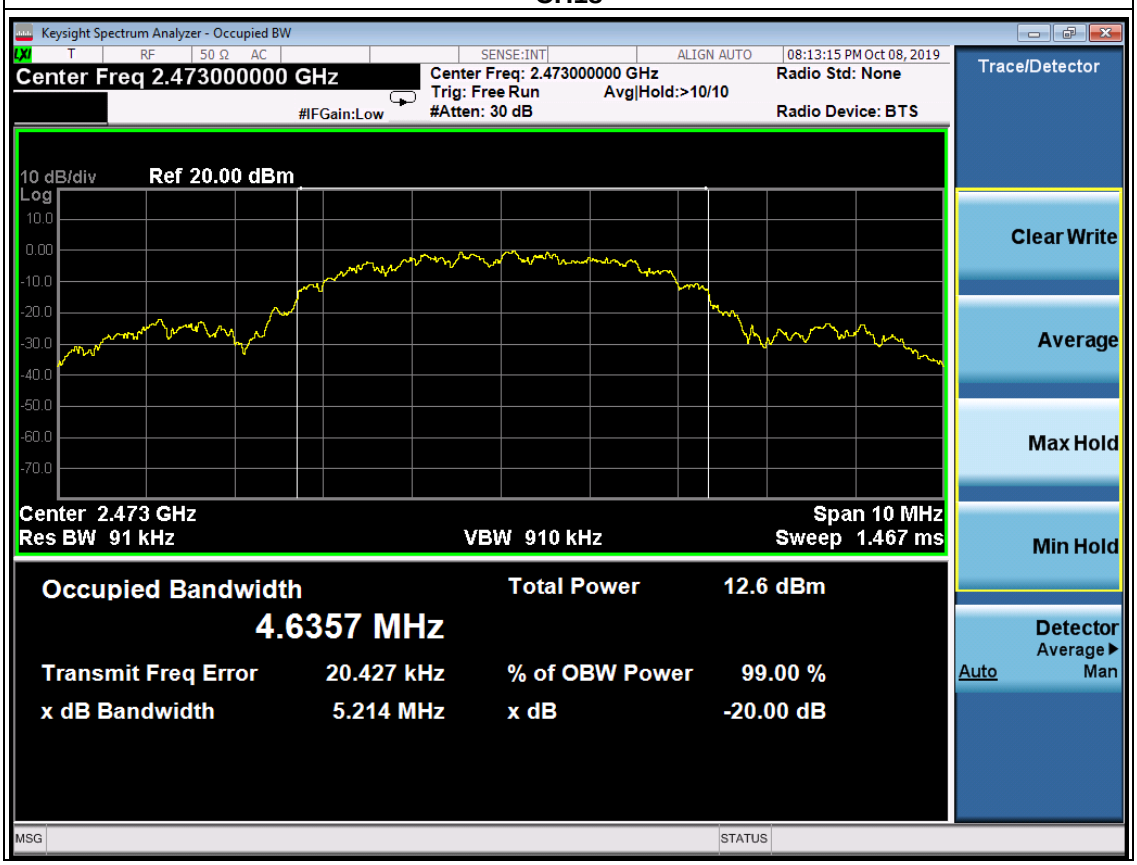
Keysight Spectrum Analyzer - Occupied BW
T RF 50 Ω AC SENSE:INT ALIGN AUTO 08:13:15 PM Oct 08, 2019
Center Freq 2.473000000 GHz
Center Freq: 2.473000000 GHz
Trig: Free Run Avg|Hold:>10/10
#Atten: 30 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
Trace/Detector
10 dB/div Ref 20.00 dBm
Log
10.0
0.00
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
Center 2.473 GHz
Res BW 91 kHz
VBW 910 kHz
Span 10 MHz
Sweep 1.467 ms
Clear Write
Average
Max Hold
Min Hold
Occupied Bandwidth
4.6357 MHz
Total Power 12.6 dBm
Transmit Freq Error 20.427 kHz
% of OBW Power 99.00 %
x dB Bandwidth 5.214 MHz
x dB -20.00 dB
Detector
Average
Auto
Man
MSG
STATUS

4.5. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.

LIMIT

According to 15.247(a)(1),frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

TEST RESULTS

Modulation	Channel	Ch. Separation (MHz)	Limit (MHz) [2/3*20dB Bandwidth]	Result
GFSK	00	3.504	3.483	Complies
	09	3.514	3.474	Complies
	18	3.514	3.476	Complies

Ch. Separation Limits: > 2/3 of 20dB bandwidth

CH00

CH09

Keysight Spectrum Analyzer - Swept SA
Marker 1 Δ 3.513513514 MHz
PNO: Wide
IFGain:Low
Trig: Free Run
Atten: 20 dB
#Avg Type: RMS
Avg|Hold:>1/1
08:46:17 PM Oct 08, 2019
Ref Offset 10.5 dB
10 dB/div
Ref 20.00 dBm
ΔMkr1 3.514 MHz
-0.012 dB
1Δ2
Center 2.439750 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 10.00 MHz
Sweep 10.59 ms (1000 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

CH18

Keysight Spectrum Analyzer - Swept SA
Marker 1 Δ 3.513513514 MHz
PNO: Wide
IFGain:Low
Trig: Free Run
Atten: 20 dB
#Avg Type: RMS
Avg|Hold:>1/1
08:47:56 PM Oct 08, 2019
Ref Offset 10.5 dB
10 dB/div
Ref 20.00 dBm
ΔMkr1 3.514 MHz
-0.250 dB
1Δ2
Center 2.471250 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 10.00 MHz
Sweep 10.59 ms (1000 pts)
Peak Search
Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr→CF
Mkr→Ref Lvl
More
1 of 2

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

For Radiated

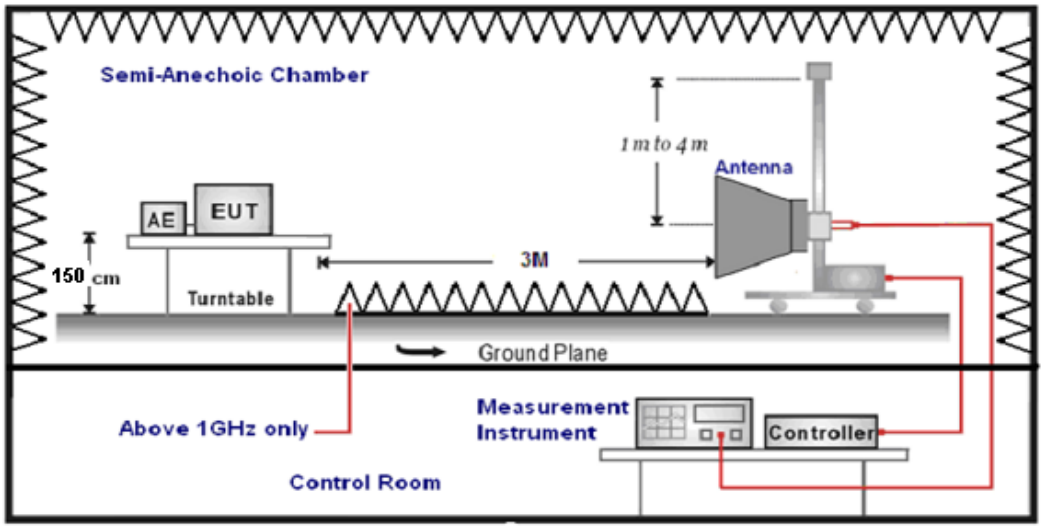

For Conducted



TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

LIMIT

Below -20dB of the highest emission level in operating band.
Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

4.6.1 For Radiated Bandedge Measurement

Remark: we tested radiated bandedge at both hopping and no-hopping modes,recorded worst case at no-hopping mode

GFSK

Frequency(MHz):			**2410**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.12	PK	74	-27.88	1	152	51.43	27.49	3.32	36.12	-5.31
2390.00	34.83	AV	54	-19.17	1	152	40.14	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2410**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.39	PK	74	-27.61	1	113	51.70	27.49	3.32	36.12	-5.31
2390.00	34.20	AV	54	-19.80	1	113	39.51	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2473**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.89	PK	74	-25.11	1	207	54.61	27.45	3.38	36.55	-5.72
2483.50	36.15	AV	54	-17.85	1	207	41.87	27.45	3.38	36.55	-5.72
Frequency(MHz):			**2473**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.38	PK	74	-25.62	1	63	54.10	27.45	3.38	36.55	-5.72
2483.50	36.16	AV	54	-17.84	1	63	41.88	27.45	3.38	36.55	-5.72

4.6.2 For Conducted Bandedge Measurement

BDR mode (GFSK): Band Edge-Left Side

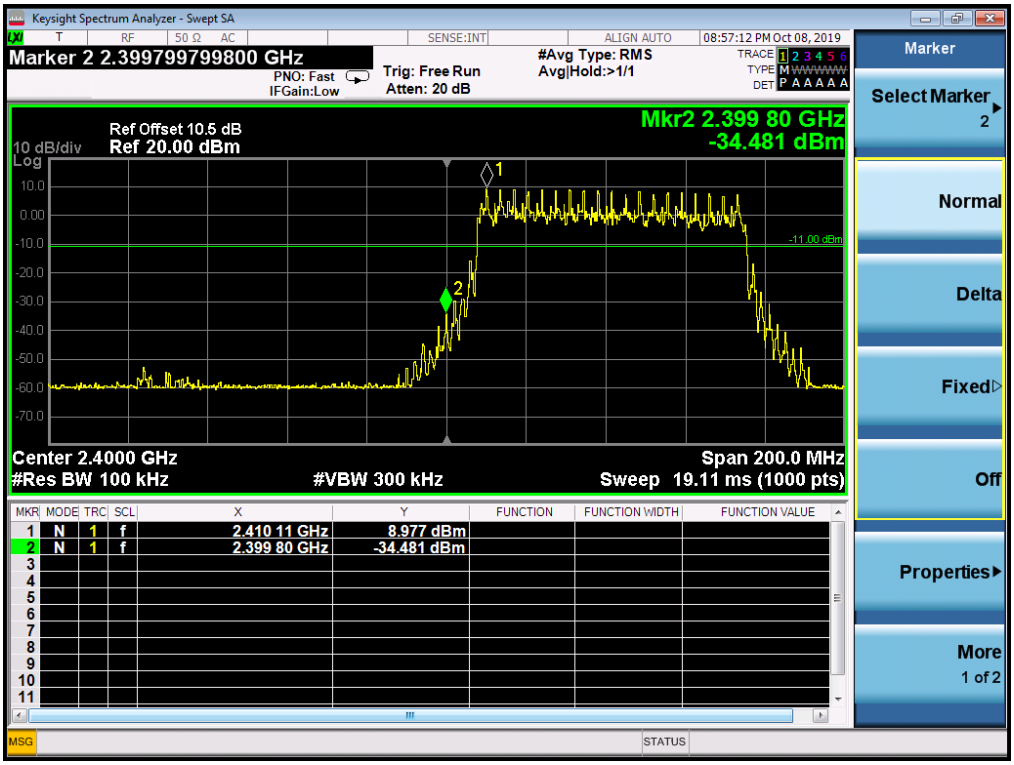

EDR mode (GFSK): Band Edge-Right Side

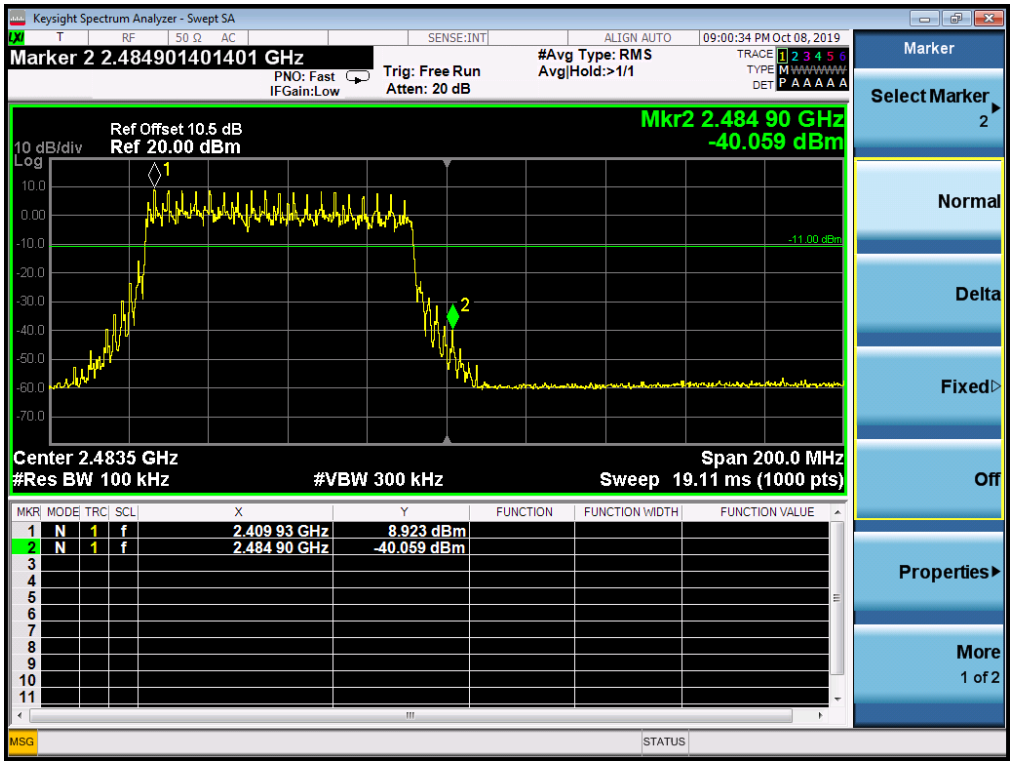

NOTE: Hopping enabled and disabled have evaluated, and the worst data was reported.

4.7. Number of hopping frequency

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator.Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=1MHz and VBW=3MHz.

LIMIT

Frequency hopping systems in the 2400–2483.5MHz band shall use at least 15 channels.

Modulation	Number of Hopping Channel	Limit	Result
GFSK	19	≥15	Pass

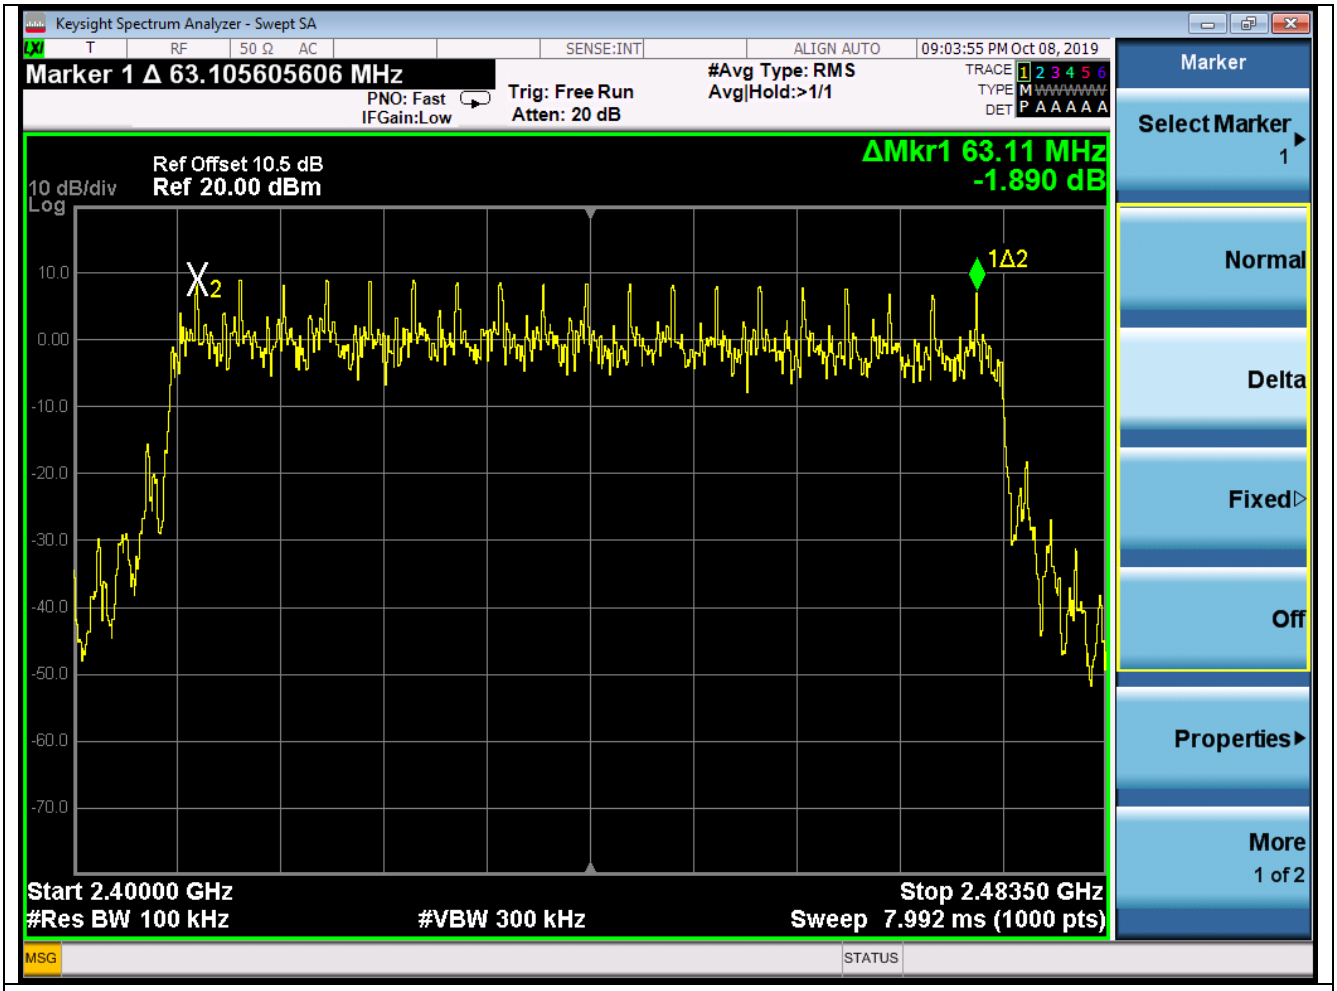

GFSK Modulation

4.8. Time Of Occupancy(Dwell Time)

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz,Span=0Hz.

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST RESULTS

The Dwell Time=Burst Width*Total Hops. The detailed calculations are showed as follows:
The duration for dwell time calculation: 0.4[s]*hopping number=0.4[s]*19[ch]=7.6[s*ch];

Modulation	Frequency	Pulse Duration	Duration number	Dwell Time	Limits
		(ms)	/	(s)	(s)
GFSK	2441.5 MHz	0.190	150	0.029	0.4

Note:Dwell time=Pulse Duration*Duration number

Test plot as follows:

CH09

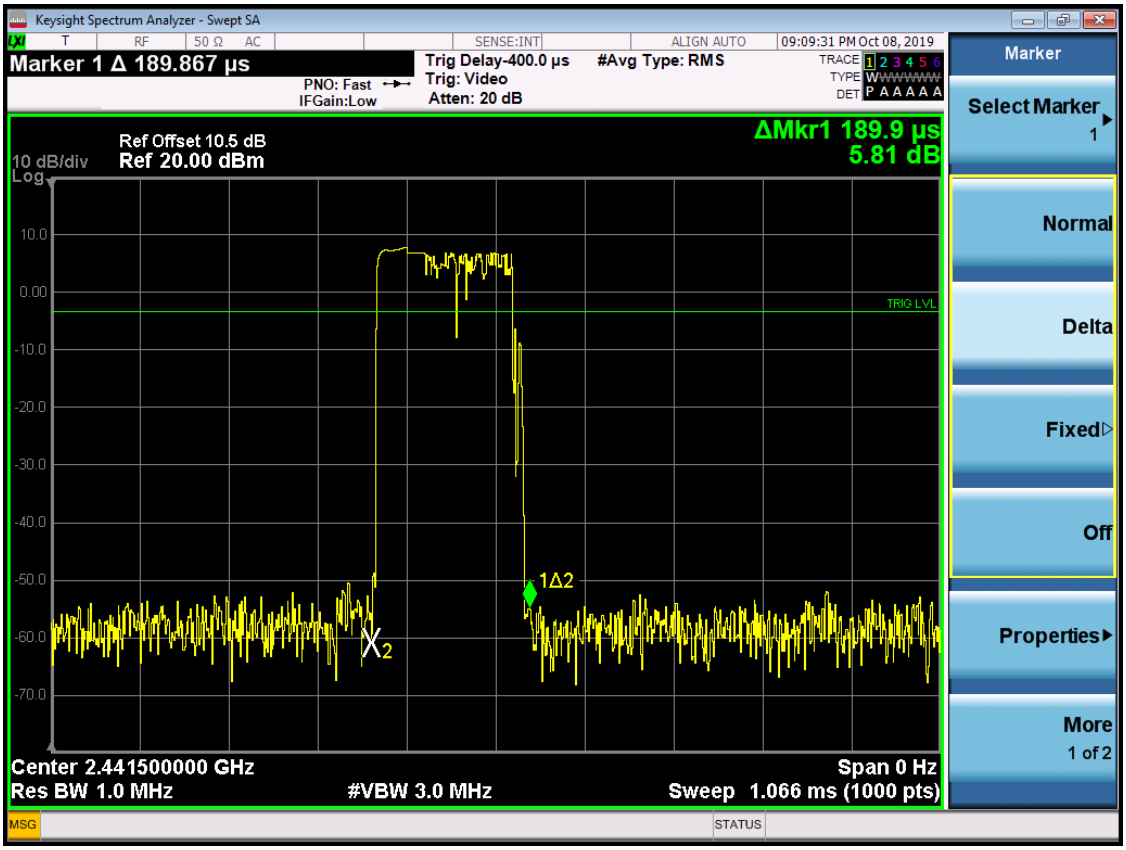

CH09

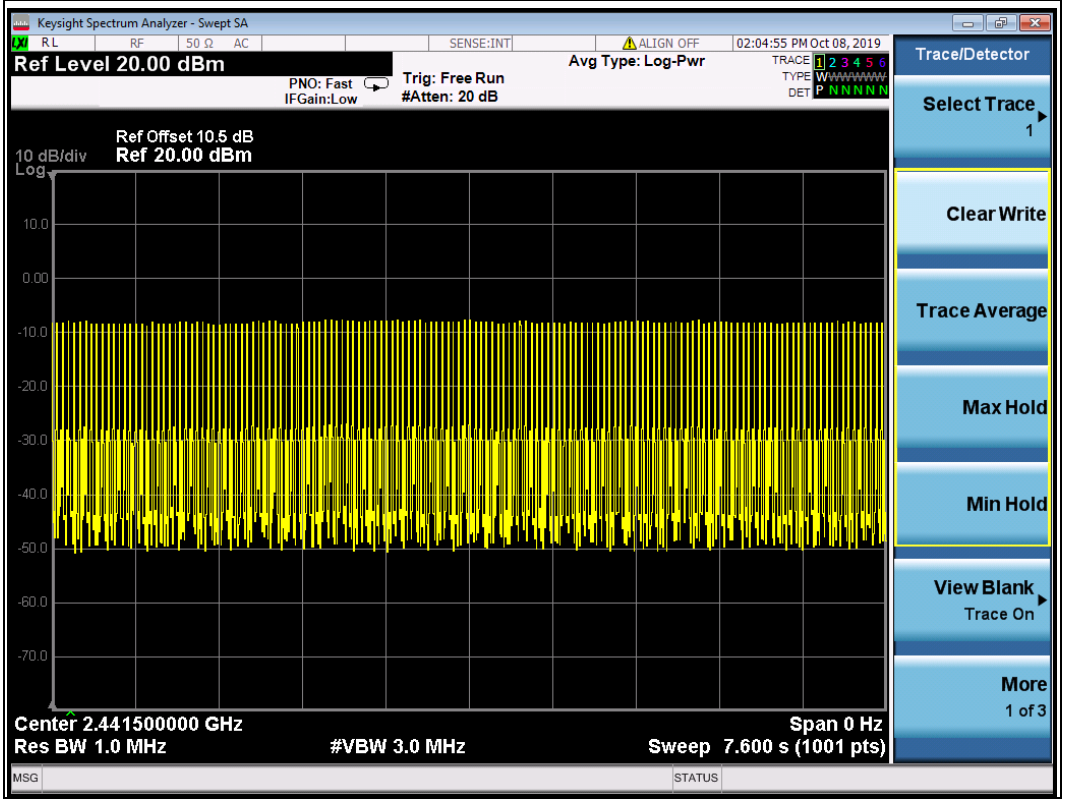
Keysight Spectrum Analyzer - Swept SA
Ref Level 20.00 dBm
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
02:04:55 PM Oct 08, 2019
Ref Offset 10.5 dB
10 dB/div
Ref 20.00 dBm
Log
10.0
0.00
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0
-70.0
Center 2.441500000 GHz
Res BW 1.0 MHz
#VBW 3.0 MHz
Span 0 Hz
Sweep 7.600 s (1001 pts)
Trace/Detector
Select Trace 1
Clear Write
Trace Average
Max Hold
Min Hold
View Blank Trace On
More 1 of 3

4.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE

For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to chan-nel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement

The sample meet Pseudorandom Frequency Hopping Sequence requirement, please refer to Operation Description for Pseudorandom Frequency Hopping Sequence of the sample

4.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The antenna used for this product is Internal Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0dBi.

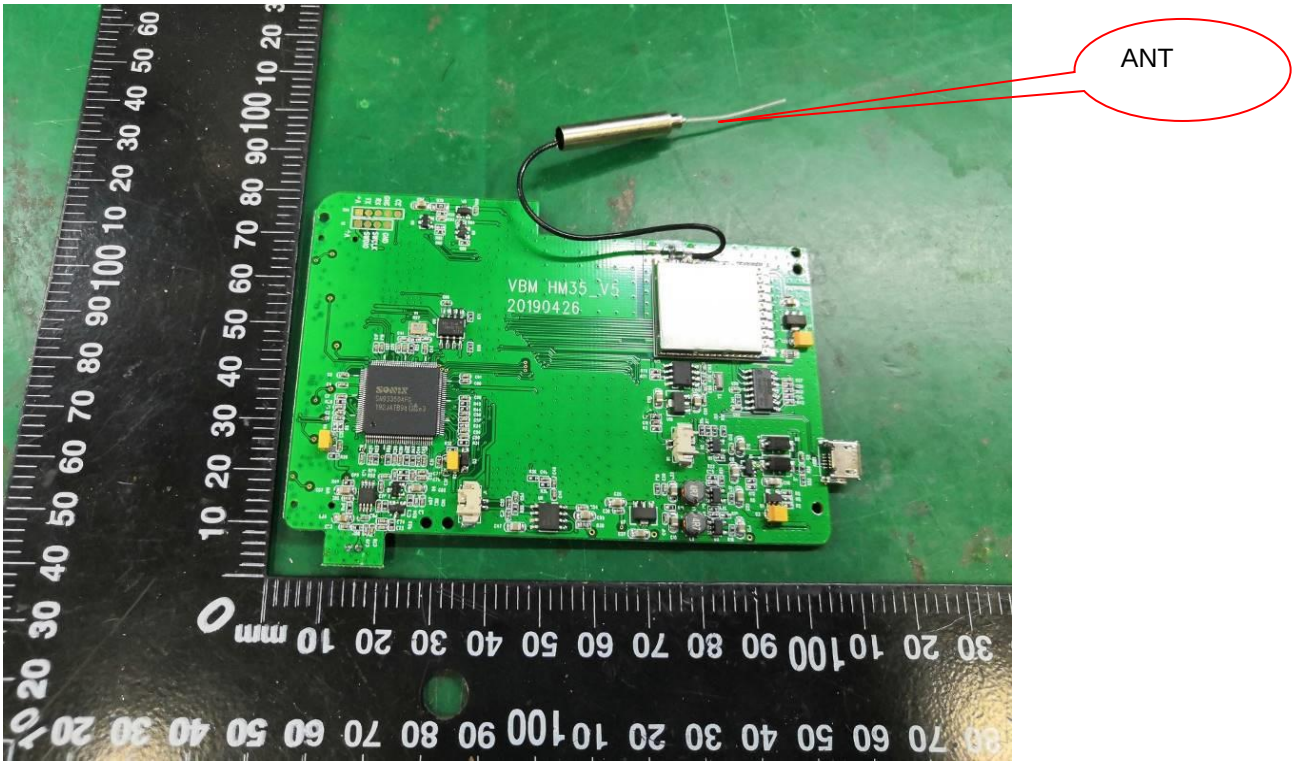

5. Test Setup Photos of the EUT

Reference to the test report No. **Test Setup Photos**

6. External and Internal Photos of the EUT

Reference to the test report No. **External and Internal photos**

.....End of Report.....