



TEST REPORT

Test item description: Sub1G Module
FCC ID: 2ATPO-AISG01
Trademark(s):  
Model/Type reference: Ai-SG01
Applicant's name: Shenzhen Ai-Thinker Technology Co., Ltd
Address: 410, Block C, Huafeng Smart Innovation Port.Gushu 2nd Road, Gushu Community, Xixiang Street, Baoan District, Shenzhen, China
Manufacturer: Shenzhen Ai-Thinker Technology Co., Ltd
Address: 410, Block C, Huafeng Smart Innovation Port.Gushu 2nd Road, Gushu Community, Xixiang Street, Baoan District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Nov. 28, 2025
Sample tested Date: Nov. 28, 2025 to Dec. 30, 2025
Issue Date: Dec. 30, 2025
Report No.: CTB25112809203RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231
ANSI C63.10:2020
Test Results: PASS
Remark: This is 433MHz radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai Chen

Martin Feng

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report r Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Test Mode	8
4.5 Test Environment	8
4.6 Test Channel	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6.AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED EMISSION	14
7.1 Block Diagram Of Test Setup	14
7.2 Limit	14
7.3 Test procedure	15
7.4 Test Result	17
8. DWELL TIME	34
8.1 Block Diagram Of Test Setup	34
8.2 Limit	34
8.3 Test procedure	34
8.4 Test Result	35
9. OCCUPIED BANDWIDTH	37
9.1 Block Diagram Of Test Setup	37
9.2 Limit	37

9.3	Test procedure	37
9.4	Test Result	38
10.	ANTENNA REQUIREMENT	40
11.	EUT TEST SETUP PHOTOGRAPHS	41

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25112809203RF01	Dec. 30, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Emission	47 CFR Part 15 Subpart C Section 15.209; 15.231(b)	ANSI C63.10-2020	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.231 (a)	ANSI C63.10-2020	PASS
Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.231(c)	ANSI C63.10-2020	PASS
Antenna requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2020	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in C ISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference: Ai-SG01

Model Description: N/A

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: 470.93-510MHz

Type of Modulation: FSK

Antenna installation: External antenna

Antenna Gain: 1.0dBi

Ratings: DC 3.3V powering from PC

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1.	Laptop	DELL	Vostro 5490	N/A	AE
2.	Adapter	JIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode
Keep the EUT in transmitting mode with modulation.

4.5 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.3V
Normal Temperature(°C)	23

4.6 Test Channel

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	470.93	21	491
1	471	22	492
2	472	23	493
3	473	24	494
4	474	25	495
5	475	26	496
6	476	27	497
7	477	28	498
8	478	29	499
9	479	30	500
10	480	31	501
11	481	32	502
12	482	33	503
13	483	34	504
14	484	35	505.95
15	485	36	506
16	486	37	507
17	487	38	508
18	488	39	509
19	489	40	510
20	490.3		

5. TEST FACILITY AND TEST INSTRUMENT USED**5.1 Test Facility**

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22


Radiated emission(No.2 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/9/19	2026/9/18
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/9/19	2026/9/18
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/9/19	2026/9/18
10	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18



11	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
12	Coaxial cable	Times	1m	/	/	2025/9/19	2026/9/18
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6.AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

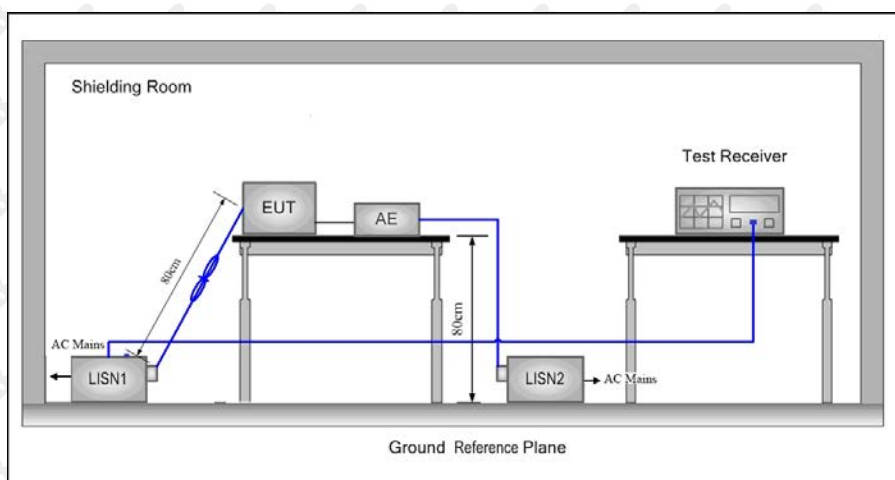

6.2 Limit

* Decreasing linearly with the logarithm of the frequency

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


6.4 Test Result

L:

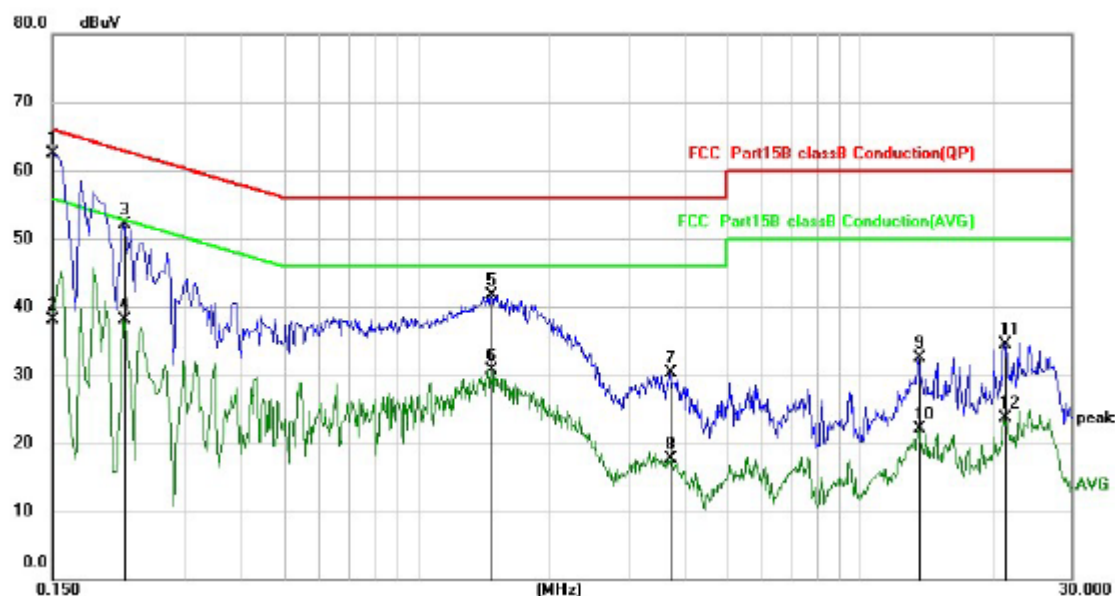

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	52.40	10.07	62.47	66.00	-3.53	QP
2		0.1500	28.12	10.07	38.19	56.00	-17.81	AVG
3		0.2180	42.04	10.08	52.12	62.89	-10.77	QP
4		0.2180	28.11	10.08	38.19	52.89	-14.70	AVG
5		1.4660	31.51	10.15	41.66	56.00	-14.34	QP
6		1.4660	20.64	10.15	30.79	46.00	-15.21	AVG
7		3.7300	20.01	10.23	30.24	56.00	-25.76	QP
8		3.7300	7.49	10.23	17.72	46.00	-28.28	AVG
9		13.6140	21.80	10.65	32.45	60.00	-27.55	QP
10		13.6140	11.38	10.65	22.03	50.00	-27.97	AVG
11		21.2260	23.47	11.02	34.49	60.00	-25.51	QP
12		21.2260	12.64	11.02	23.66	50.00	-26.34	AVG

N:

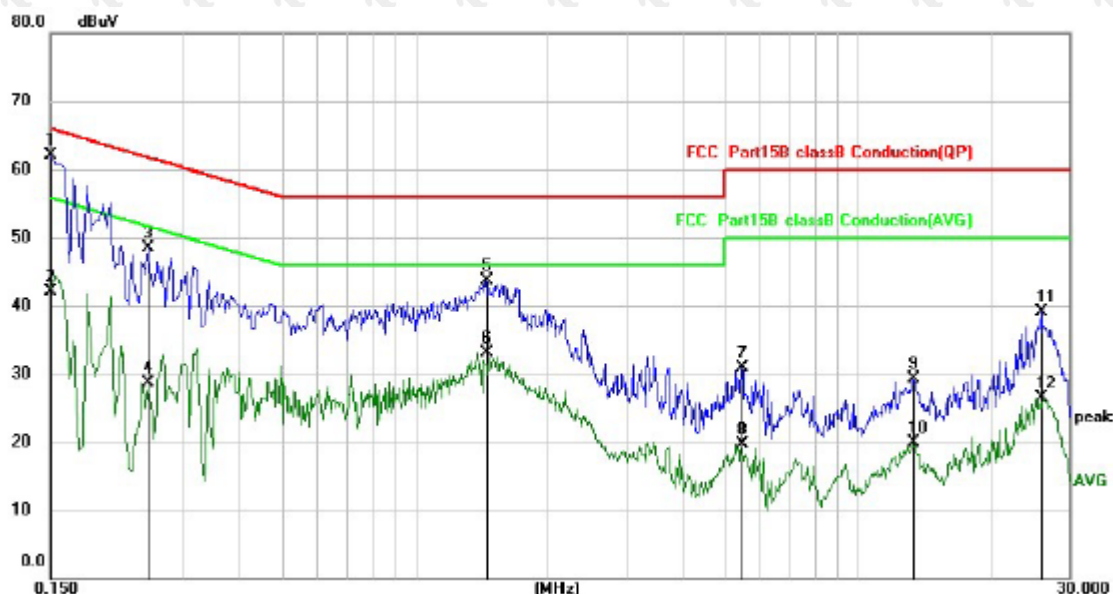

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	52.01	10.07	62.08	66.00	-3.92	QP
2		0.1500	32.13	10.07	42.20	56.00	-13.80	AVG
3		0.2500	38.47	10.08	48.55	61.76	-13.21	QP
4		0.2500	18.72	10.08	28.80	51.76	-22.96	AVG
5		1.4420	33.48	10.15	43.63	56.00	-12.37	QP
6		1.4420	22.96	10.15	33.11	46.00	-12.89	AVG
7		5.4618	20.66	10.30	30.96	60.00	-29.04	QP
8		5.4618	9.39	10.30	19.69	50.00	-30.31	AVG
9		13.3019	18.66	10.63	29.29	60.00	-30.71	QP
10		13.3019	9.19	10.63	19.82	50.00	-30.18	AVG
11		25.9460	27.99	11.21	39.20	60.00	-20.80	QP
12		25.9460	15.26	11.21	26.47	50.00	-23.53	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit All modes have been tested with only the worst data 411MHz

7. RADIATED EMISSION

7.1 Block Diagram Of Test Setup

Figure 1. Below 30MHz

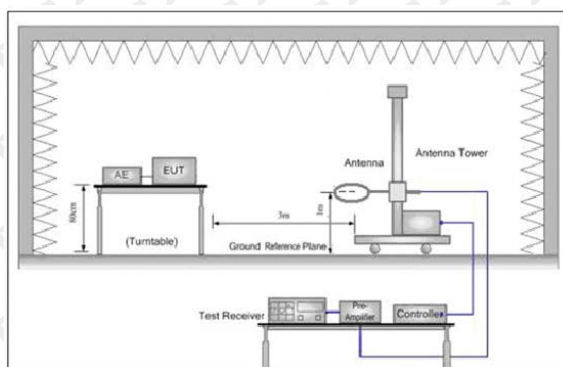


Figure 2. 30MHz to 1GHz

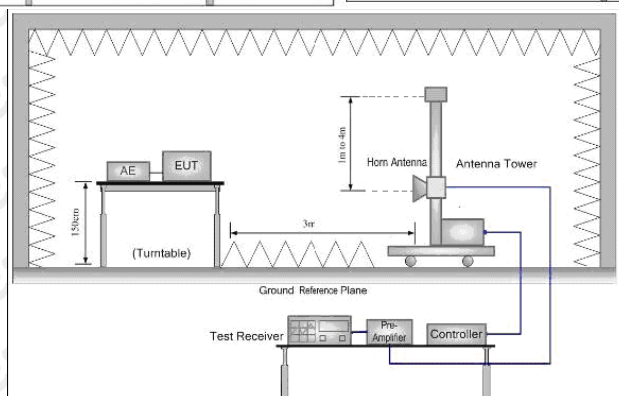
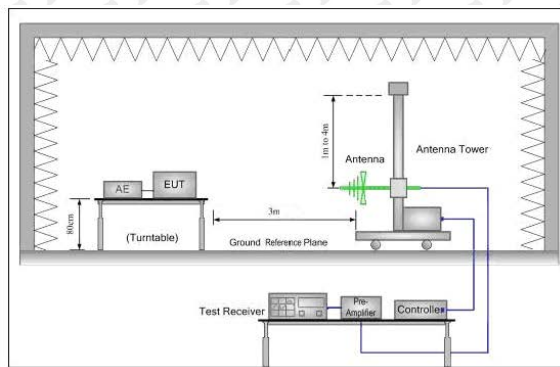


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	-	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	-	3
1.705MHz-30MHz	$20\log 30 + 40$	-	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15. 35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Field Strength of Fundamental Limit:

Fundamental and harm onics emission limits Frequency(MHz)	Field strength of Fundamental((microvolts/meter)	Field strength of spurious emissions(microvolts/meter)
40.66-40.70	2280	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

Frequency	Limit (dB $\mu\text{V/m}$ @3m)	Remark
470.93MHz	81.94	Average Value
	101.94	Peak Value
490.3MHz	81.94	Average Value
	101.94	Peak Value
505.95MHz	81.94	Average Value
	101.94	Peak Value
510MHz	81.94	Average Value
	101.94	Peak Value

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi-Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel, the middle channel, the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average

set:

0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Calculation of average factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.


The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

470.93 MHz


Cycle

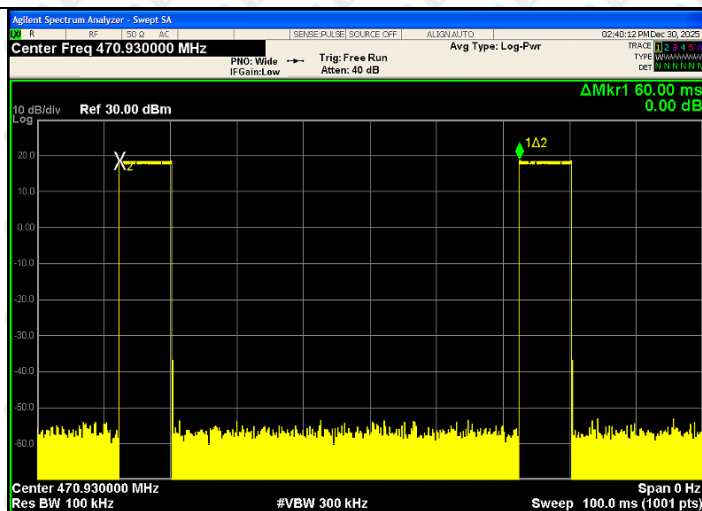

Pulse

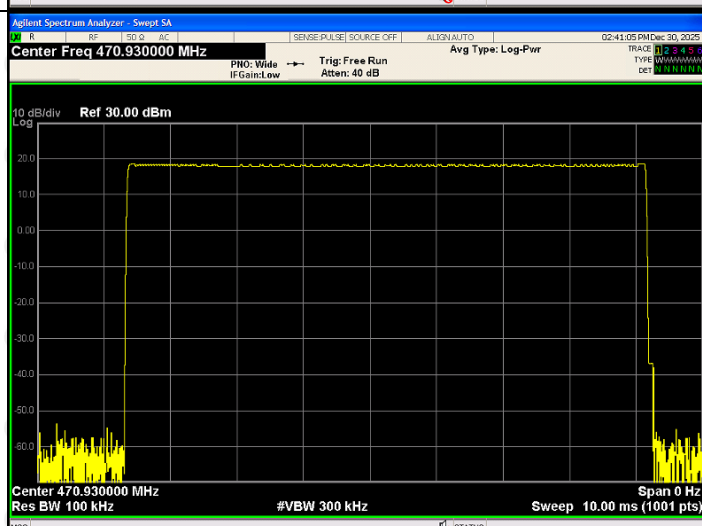

On-time

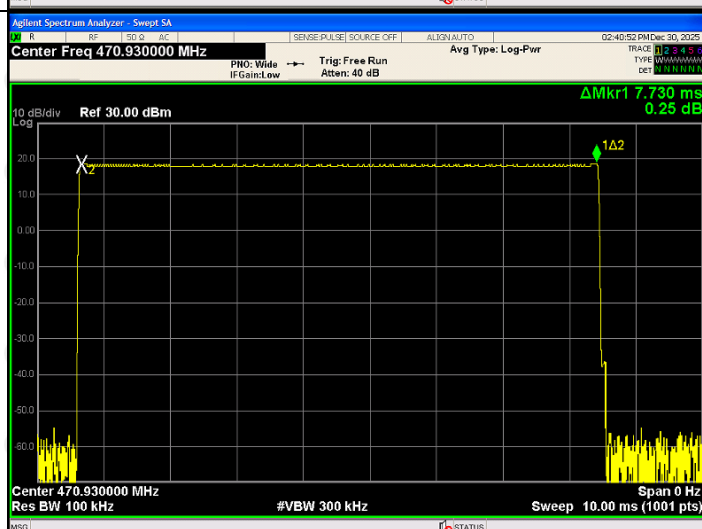


Average factor:


Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle = T on time / 100ms
Calculated average factor:	Ton time =7.730(ms); T period =60.00(ms)
	PDCF = 20 log(7.730/60.00)=-17.80dB

490.3 MHz


Cycle

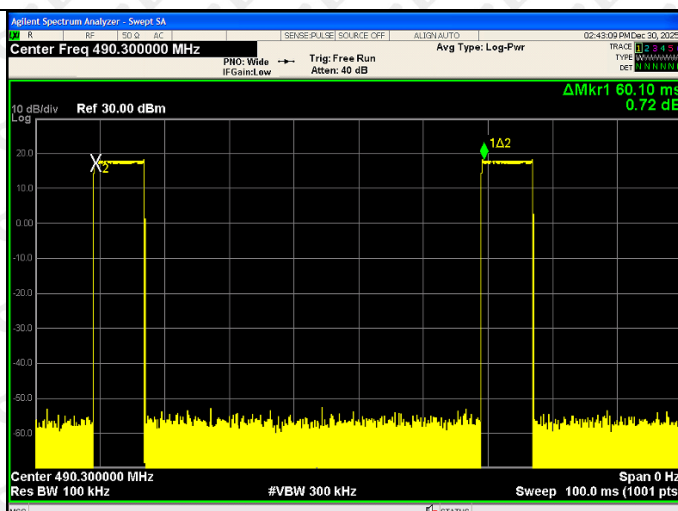

Pulse

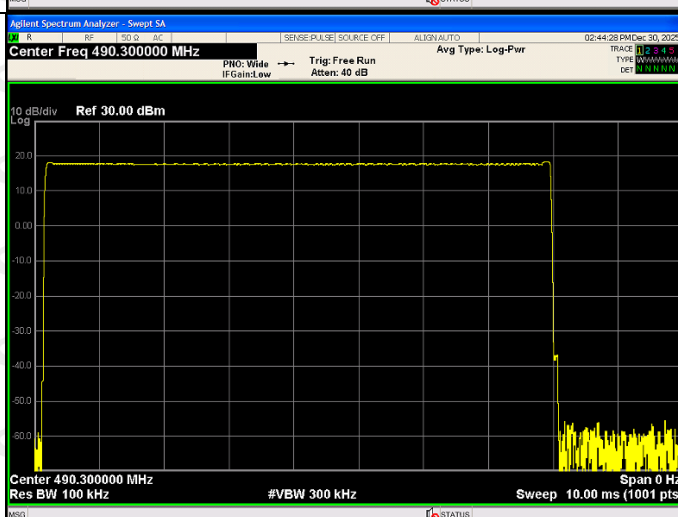

On-time

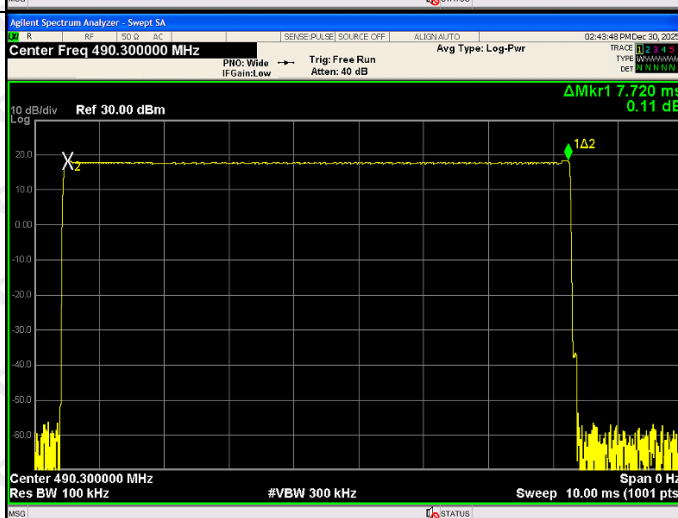


Average factor:


Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle = T on time / 100ms
Calculated average factor:	Ton time =7.720(ms); T period =60.10(ms)
	PDCF = 20 log(7.720/60.10)=-17.83dB

505.95 MHz


Cycle

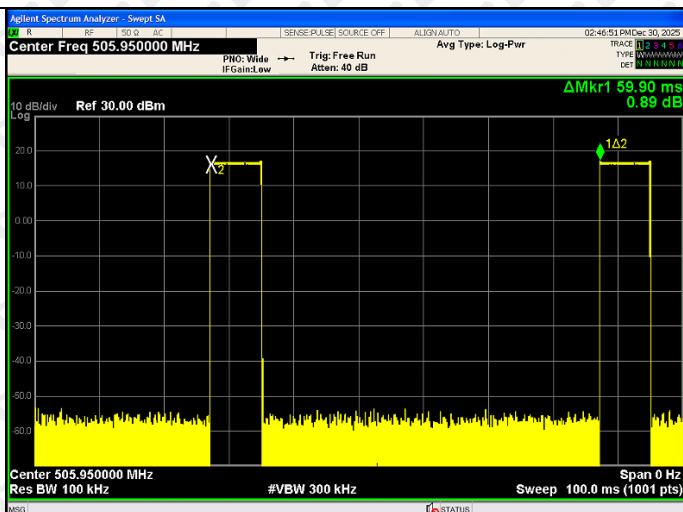

Pulse

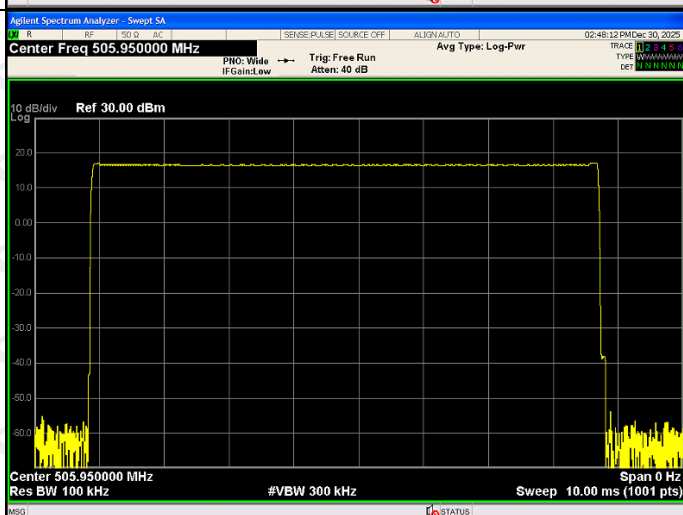


On-time

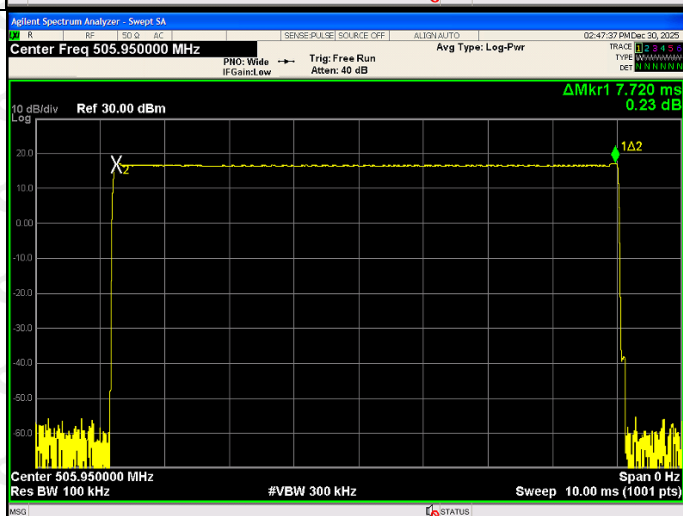

Average factor:

Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle = T on time / 100ms
Calculated average factor:	Ton time =7.720(ms); T period =59.90(ms)
	PDCF = 20 log(7.720/59.90)=-17.80dB

510MHz

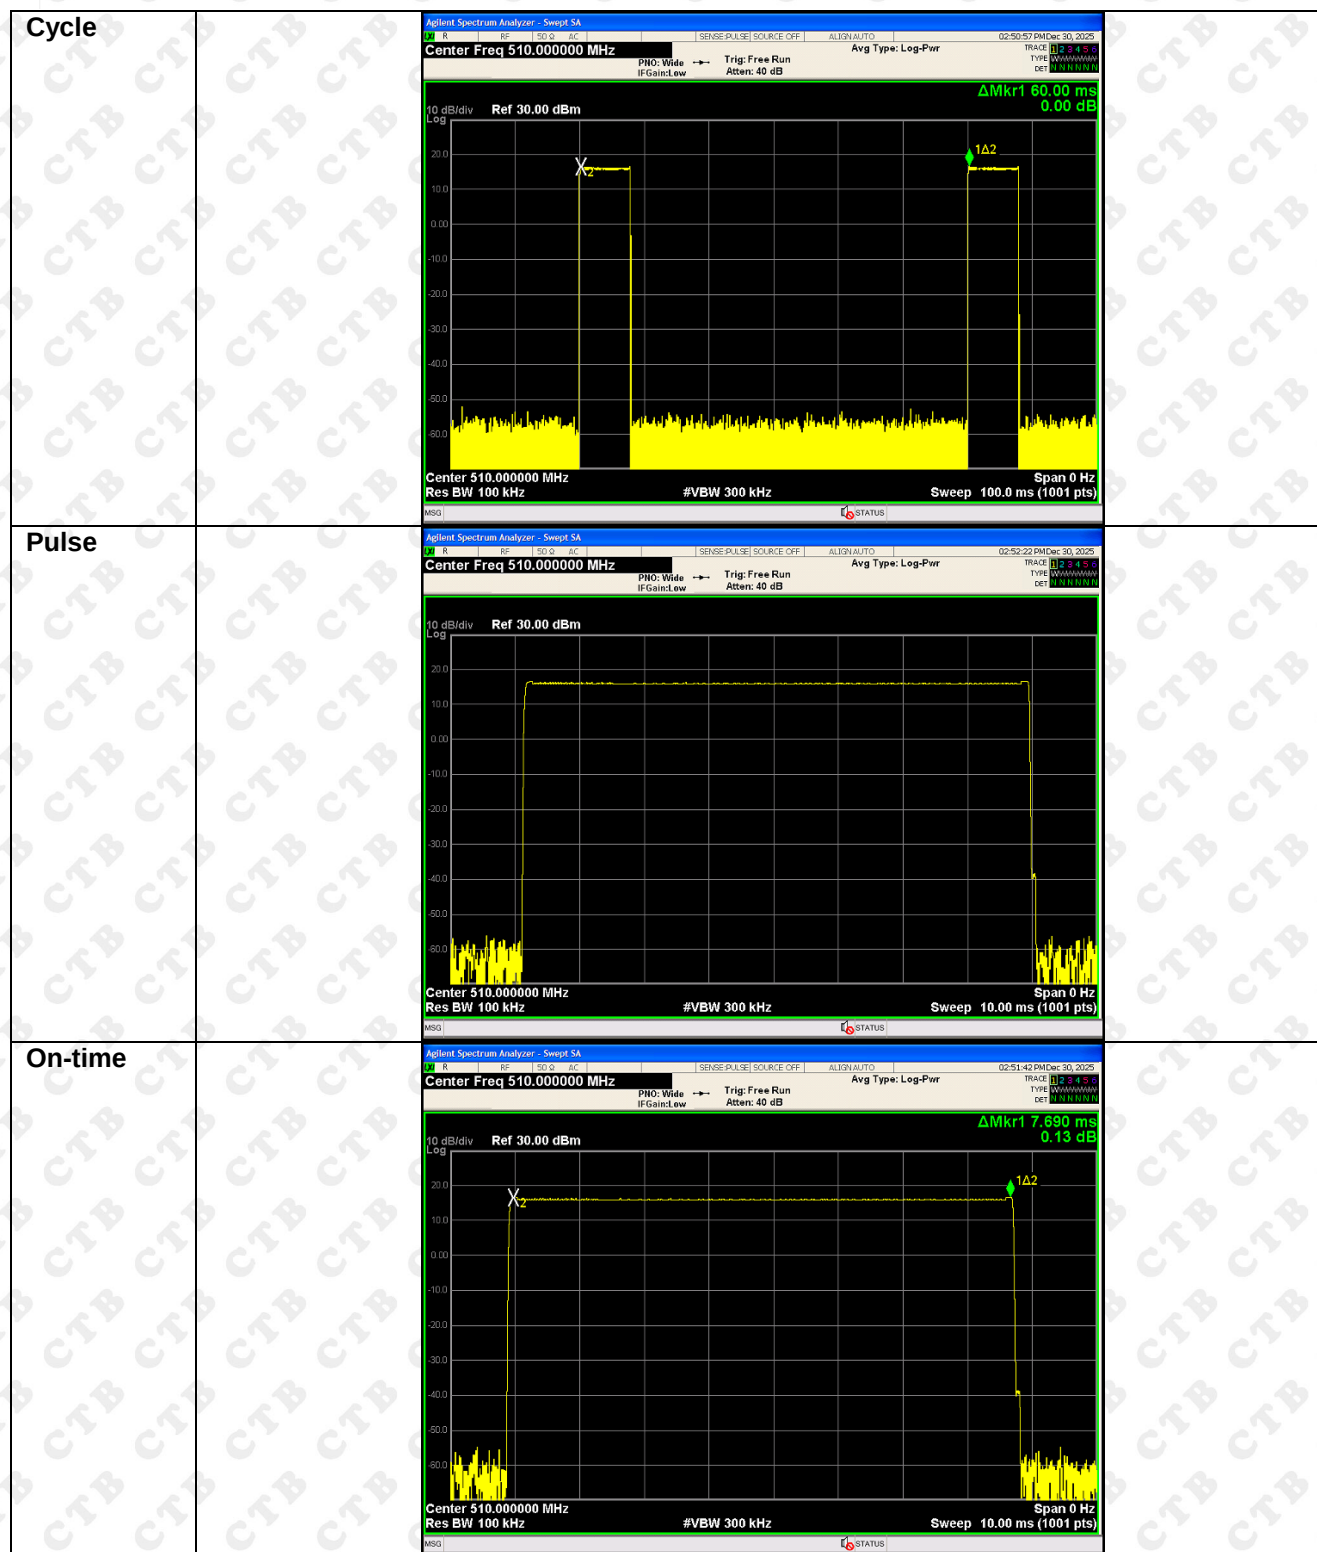

Average factor:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle = T on time / 100ms
Calculated average factor:	Ton time =7.690(ms); T period =60.00(ms)
	PDCF = 20 log(7.690/60.00)=-17.84dB

Radiated Spurious Emission Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor


2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

470.93MHz:

About 30MHz-1GHz

Test Results:


Antenna polarity: H

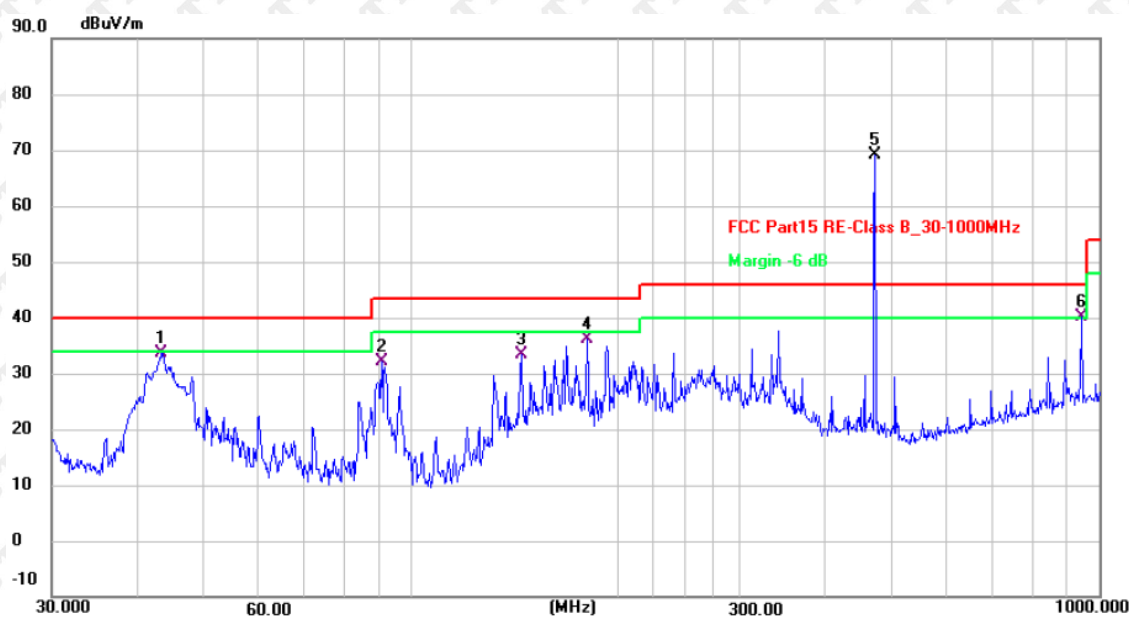

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.3534	46.83	-13.10	33.73	40.00	-6.27	QP
2	90.5374	49.95	-17.72	32.23	43.50	-11.27	QP
3	144.3345	46.18	-12.83	33.35	43.50	-10.15	QP
4	180.0164	50.54	-14.43	36.11	43.50	-7.39	QP
5 *	472.1760	77.67	-8.62	69.05	101.94	-32.89	peak
6 !	942.1304	40.43	-0.20	40.23	81.94	-41.71	QP

Antenna polarity: V

90.0 dBuV/m

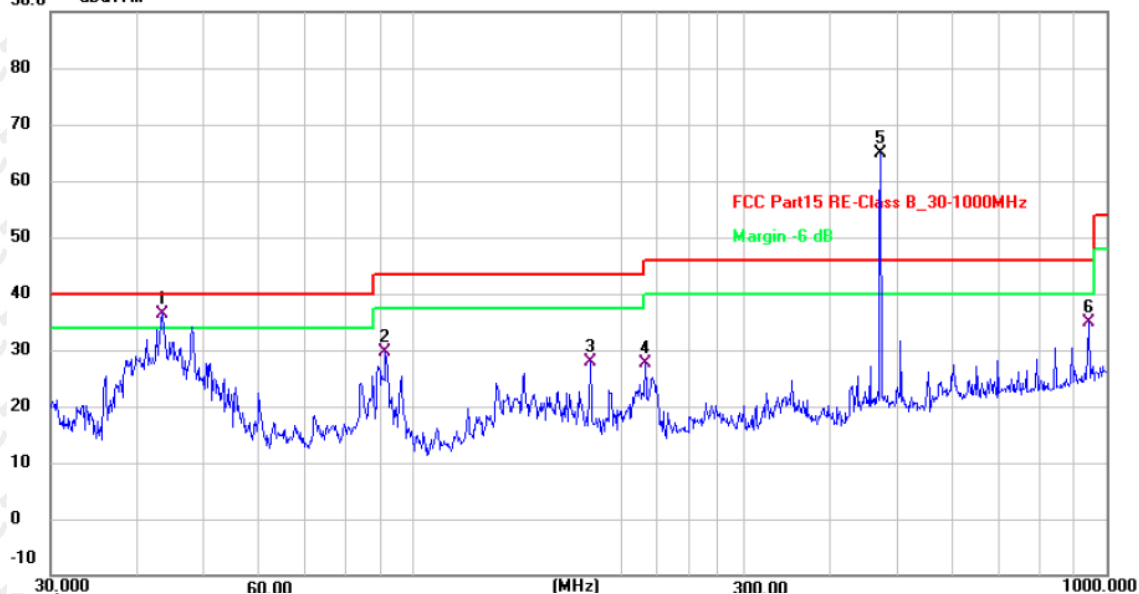


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	43.5056	49.53	-13.11	36.42	40.00	-3.58	QP
2	91.1744	47.35	-17.74	29.61	43.50	-13.89	QP
3	180.0164	42.32	-14.43	27.89	43.50	-15.61	QP
4	216.0240	42.74	-15.19	27.55	46.00	-18.45	QP
5 *	472.1760	73.40	-8.62	64.78	101.94	-37.16	peak
6	942.1304	35.08	-0.20	34.88	81.94	-47.06	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


490.3MHz:

Antenna polarity: H

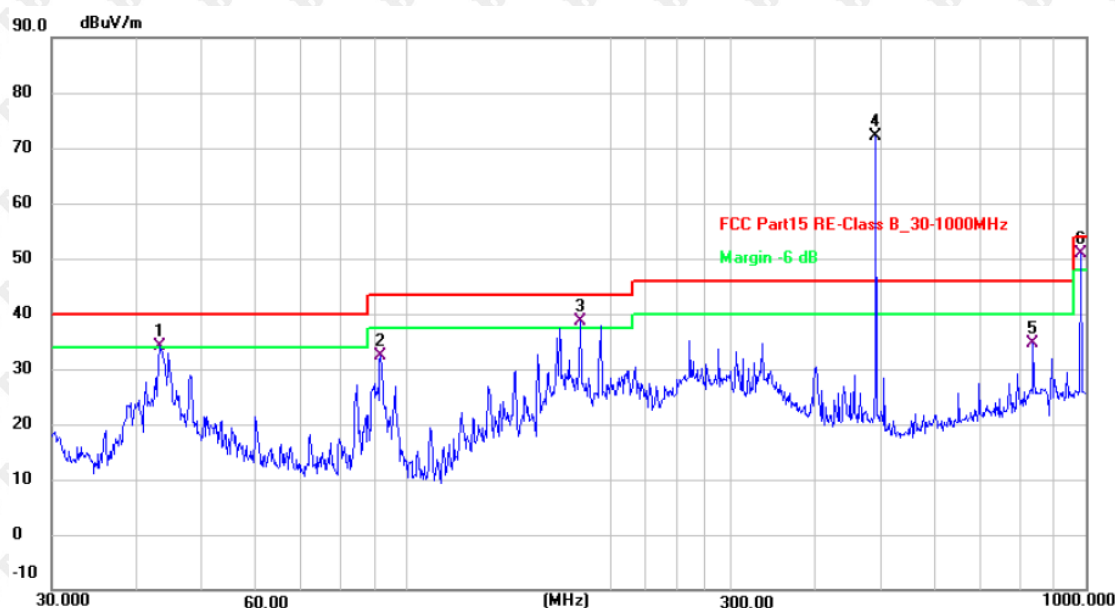

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	43.3534	47.35	-13.10	34.25	40.00	-5.75	QP
2	91.4946	50.09	-17.74	32.35	43.50	-11.15	QP
3 !	180.0164	53.11	-14.43	38.68	43.50	-4.82	QP
4 *	490.7445	80.32	-8.19	72.13	101.94	-29.81	peak
5	836.2441	36.41	-1.68	34.73	46.00	-11.27	QP
6 !	982.6200	50.44	0.38	50.82	81.94	-31.12	QP

Antenna polarity: V

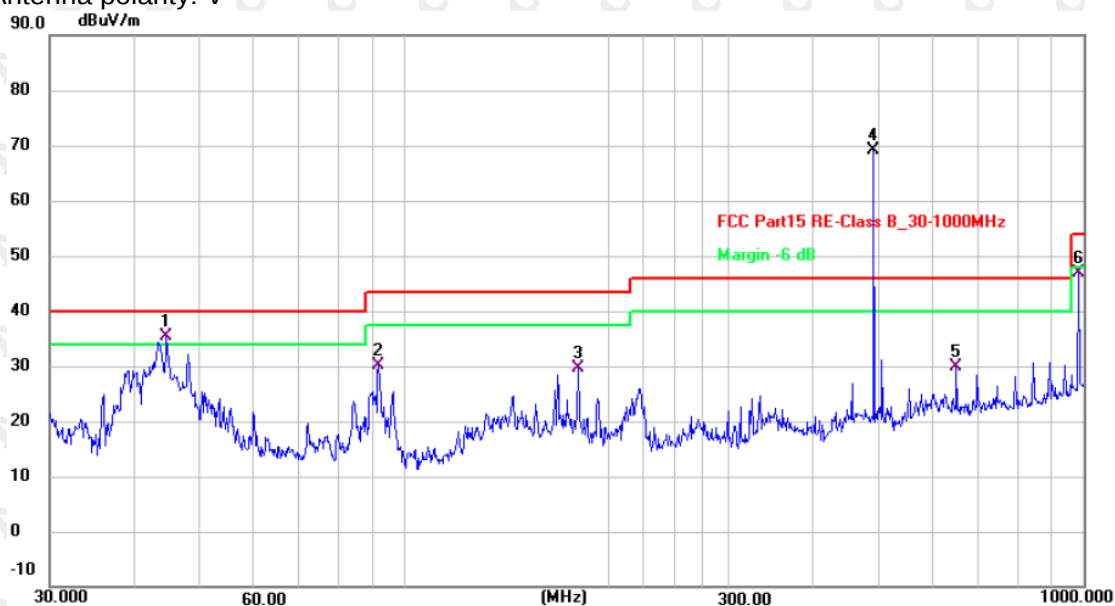


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	44.5867	48.50	-13.11	35.39	40.00	-4.61	QP
2	91.4947	47.77	-17.74	30.03	43.50	-13.47	QP
3	180.0164	43.99	-14.43	29.56	43.50	-13.94	QP
4 *	490.7445	77.40	-8.19	69.21	101.94	-32.73	peak
5	649.6594	34.48	-4.59	29.89	46.00	-16.11	QP
6	982.6200	46.58	0.38	46.96	81.94	-34.98	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


505.95MHz:

Antenna polarity: H

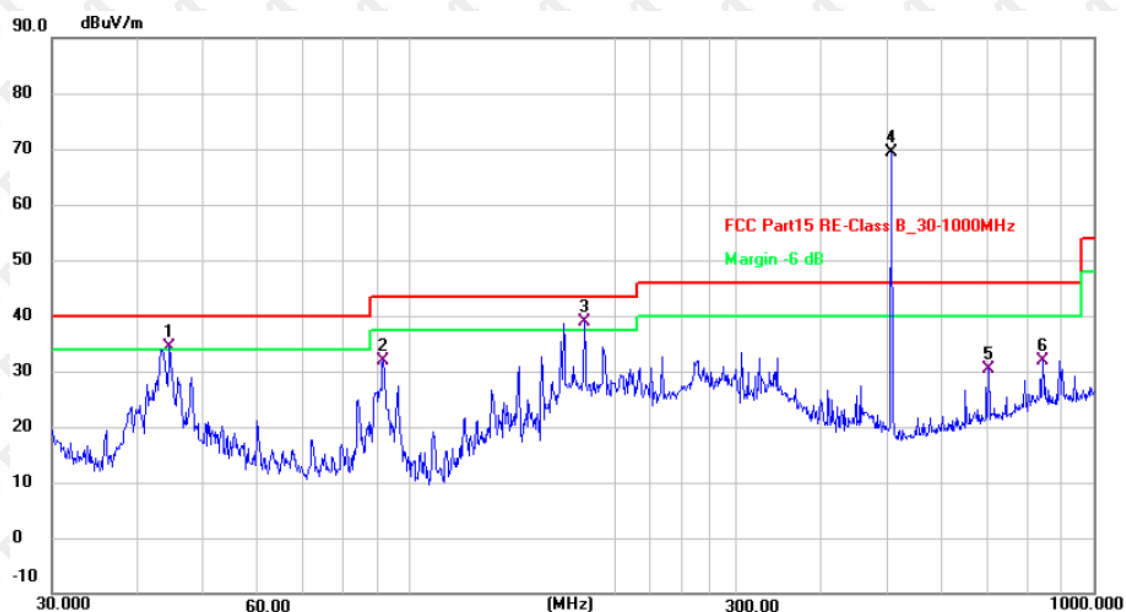

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	44.5867	47.58	-13.11	34.47	40.00	-5.53	QP
2	91.4946	49.61	-17.74	31.87	43.50	-11.63	QP
3 !	180.0164	53.23	-14.43	38.80	43.50	-4.70	QP
4 *	506.4790	77.11	-7.80	69.31	101.94	-32.63	peak
5	701.7610	33.94	-3.65	30.29	46.00	-15.71	QP
6	842.1295	33.50	-1.59	31.91	46.00	-14.09	QP

Antenna polarity: V

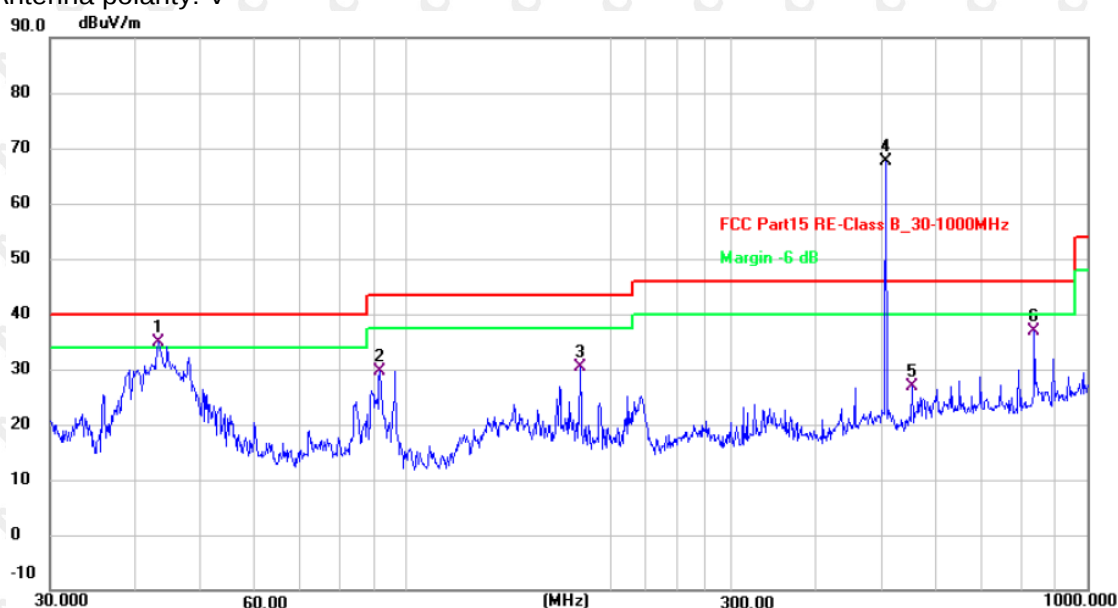


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	43.3534	48.04	-13.10	34.94	40.00	-5.06	QP
2	91.4946	47.49	-17.74	29.75	43.50	-13.75	QP
3	180.0164	44.69	-14.43	30.26	43.50	-13.24	QP
4 *	506.4790	75.37	-7.80	67.57	101.94	-34.37	peak
5	552.8831	33.49	-6.66	26.83	46.00	-19.17	QP
6	836.2441	38.47	-1.68	36.79	46.00	-9.21	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level


510MHz:

Antenna polarity: H

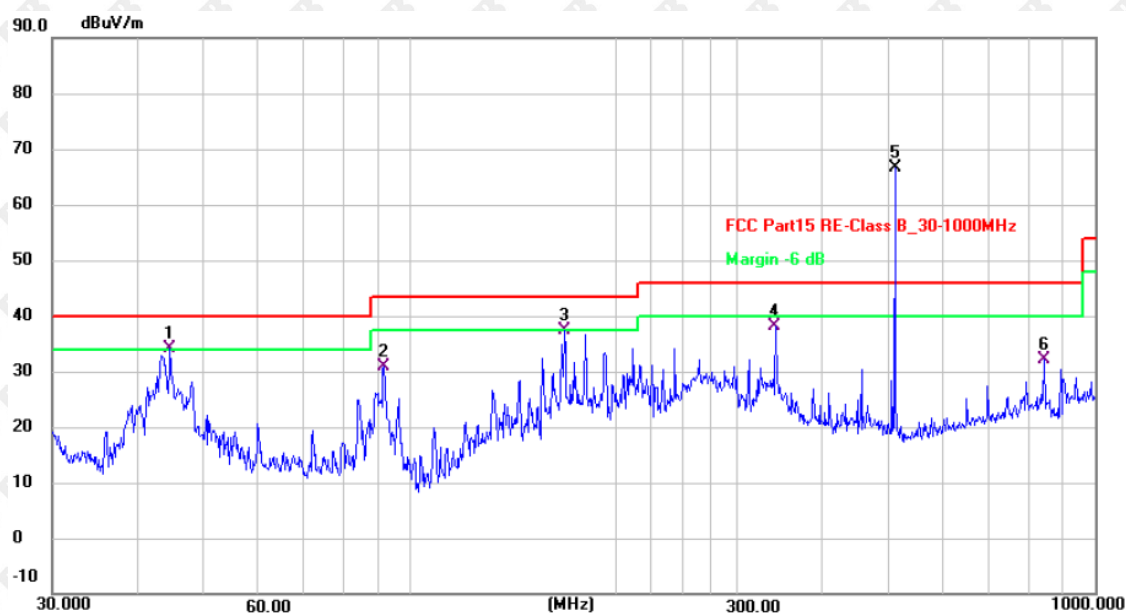

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	44.5867	47.20	-13.11	34.09	40.00	-5.91	QP
2	91.4946	48.69	-17.74	30.95	43.50	-12.55	QP
3	167.8240	50.20	-12.72	37.48	43.50	-6.02	QP
4	341.9786	49.51	-11.38	38.13	46.00	-7.87	QP
5 *	510.0434	74.40	-7.72	66.68	101.94	-35.26	peak
6	842.1295	33.64	-1.59	32.05	46.00	-13.95	QP

Antenna polarity: V

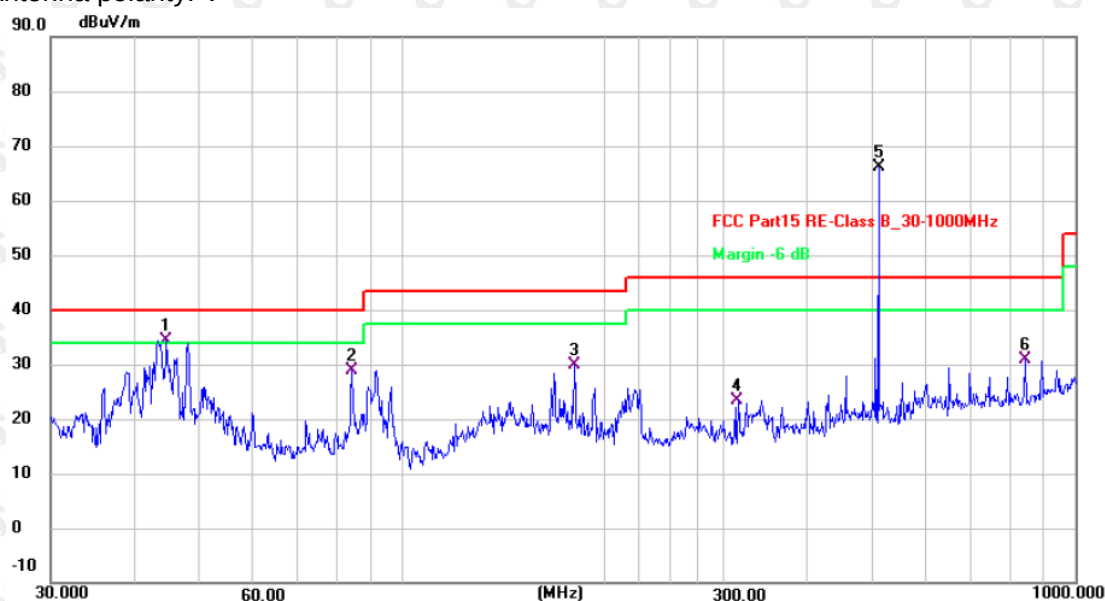

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	44.5867	47.57	-13.11	34.46	40.00	-5.54	QP
2	84.1100	45.98	-17.19	28.79	40.00	-11.21	QP
3	180.0164	44.43	-14.43	30.00	43.50	-13.50	QP
4	315.4806	35.36	-11.86	23.50	46.00	-22.50	QP
5 *	510.0434	73.78	-7.72	66.06	101.94	-35.88	peak
6	842.1295	32.59	-1.59	31.00	46.00	-15.00	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
472.18	69.05	-17.80	51.25	81.94	-30.69	Horizontal
490.74	72.13	-17.80	54.33	81.94	-27.61	Horizontal
506.48	69.31	-17.80	51.51	81.94	-30.43	Horizontal
510.04	66.68	-17.80	48.88	81.94	-33.06	Horizontal
942.13	40.23	-17.80	22.43	61.94	-39.51	Horizontal
982.62	50.82	-17.80	33.02	61.94	-28.92	Horizontal
472.18	64.78	-17.80	46.98	81.94	-34.96	Vertical
490.74	69.21	-17.80	51.41	81.94	-30.53	Vertical
506.48	67.57	-17.80	49.77	81.94	-32.17	Vertical
510.04	66.06	-17.80	48.26	81.94	-33.68	Vertical
942.13	34.88	-17.80	17.08	61.94	-44.86	Vertical
982.62	46.96	-17.80	29.16	61.94	-32.78	Vertical

Notes: Average emission Level = Peak Level + Duty cycle factor

Above 1GHz Test Results

470.93MHz

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1416.54	51.57	-17.80	33.77	81.94	61.94	-30.37	-28.17	Vertical
1888.72	48.90	-17.80	31.1	81.94	61.94	-33.04	-30.84	Vertical
2360.9	43.01	-17.80	25.21	81.94	61.94	-38.93	-36.73	Vertical
2833.08	42.76	-17.80	24.96	81.94	61.94	-39.18	-36.98	Vertical
3305.26	41.27	-17.80	23.47	81.94	61.94	-40.67	-38.47	Vertical
3777.44	40.99	-17.80	23.19	81.94	61.94	-40.95	-38.75	Vertical
1416.54	50.89	-17.80	33.09	81.94	61.94	-31.05	-28.85	Horizontal
1888.72	48.54	-17.80	30.74	81.94	61.94	-33.4	-31.2	Horizontal
2360.9	43.06	-17.80	25.26	81.94	61.94	-38.88	-36.68	Horizontal
2833.08	42.71	-17.80	24.91	81.94	61.94	-39.23	-37.03	Horizontal
3305.26	41.27	-17.80	23.47	81.94	61.94	-40.67	-38.47	Horizontal
3777.44	41.72	-17.80	23.92	81.94	61.94	-40.22	-38.02	Horizontal

Notes: Average emission Level = Peak Level + Duty cycle factor

490.3MHz

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1472.22	50.31	-17.83	50.31	81.94	61.94	-31.63	-29.46	Vertical
1962.96	47.54	-17.83	47.54	81.94	61.94	-34.4	-32.23	Vertical
2453.7	42.80	-17.83	42.80	81.94	61.94	-39.14	-36.97	Vertical
2944.44	43.63	-17.83	43.63	81.94	61.94	-38.31	-36.14	Vertical
3435.18	40.22	-17.83	40.22	81.94	61.94	-41.72	-39.55	Vertical
3925.92	40.38	-17.83	40.38	81.94	61.94	-41.56	-39.39	Vertical
1472.22	48.51	-17.83	48.51	81.94	61.94	-33.43	-31.26	Horizontal
1962.96	48.88	-17.83	48.88	81.94	61.94	-33.06	-30.89	Horizontal
2453.7	44.57	-17.83	44.57	81.94	61.94	-37.37	-35.2	Horizontal
2944.44	43.63	-17.83	43.63	81.94	61.94	-38.31	-36.14	Horizontal
3435.18	41.62	-17.83	41.62	81.94	61.94	-40.32	-38.15	Horizontal
3925.92	41.93	-17.83	41.93	81.94	61.94	-40.01	-37.84	Horizontal

Notes: Average emission Level = Peak Level + Duty cycle factor

505.95MHz

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1012.96	49.69	-17.80	31.89	81.94	61.94	-32.25	-30.05	Vertical
1519.44	47.17	-17.80	29.37	81.94	61.94	-34.77	-32.57	Vertical
2025.92	44.94	-17.80	27.14	81.94	61.94	-37.00	-34.8	Vertical
2532.4	43.07	-17.80	25.27	81.94	61.94	-38.87	-36.67	Vertical
3038.88	41.99	-17.80	24.19	81.94	61.94	-39.95	-37.75	Vertical
3545.36	41.40	-17.80	23.60	81.94	61.94	-40.54	-38.34	Vertical
1012.96	50.92	-17.80	33.12	81.94	61.94	-31.02	-28.82	Horizontal
1519.44	48.72	-17.80	30.92	81.94	61.94	-33.22	-31.02	Horizontal
2025.92	44.11	-17.80	26.31	81.94	61.94	-37.83	-35.63	Horizontal
2532.4	43.45	-17.80	25.65	81.94	61.94	-38.49	-36.29	Horizontal
3038.88	41.91	-17.80	24.11	81.94	61.94	-40.03	-37.83	Horizontal
3545.36	40.33	-17.80	22.53	81.94	61.94	-41.61	-39.41	Horizontal

Notes: Average emission Level = Peak Level + Duty cycle factor


510MHz

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1020.08	49.73	-17.84	31.89	81.94	61.94	-32.21	-30.05	Vertical
1530.12	47.50	-17.84	29.66	81.94	61.94	-34.44	-32.28	Vertical
2040.16	42.95	-17.84	25.11	81.94	61.94	-38.99	-36.83	Vertical
2550.2	42.76	-17.84	24.92	81.94	61.94	-39.18	-37.02	Vertical
3060.24	40.71	-17.84	22.87	81.94	61.94	-41.23	-39.07	Vertical
3570.28	41.65	-17.84	23.81	81.94	61.94	-40.29	-38.13	Vertical
1020.08	50.07	-17.84	32.23	81.94	61.94	-31.87	-29.71	Horizontal
1530.12	48.48	-17.84	30.64	81.94	61.94	-33.46	-31.3	Horizontal
2040.16	44.95	-17.84	27.11	81.94	61.94	-36.99	-34.83	Horizontal
2550.2	40.79	-17.84	22.95	81.94	61.94	-41.15	-38.99	Horizontal
3060.24	41.91	-17.84	24.07	81.94	61.94	-40.03	-37.87	Horizontal
3570.28	40.49	-17.84	22.65	81.94	61.94	-41.45	-39.29	Horizontal

Notes: Average emission Level = Peak Level + Duty cycle factor

8. DWELL TIME

8.1 Block Diagram Of Test Setup

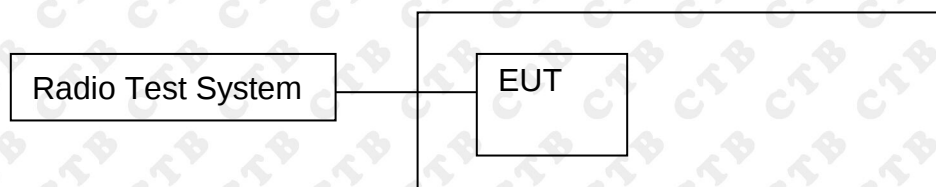

8.2 Limit

According to FCC 15.231(a) requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


8.3 Test procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

8.4 Test Result


470.93MHz

Transmitting time(S)	Limit (S)	Results
2.630	≤5	Pass

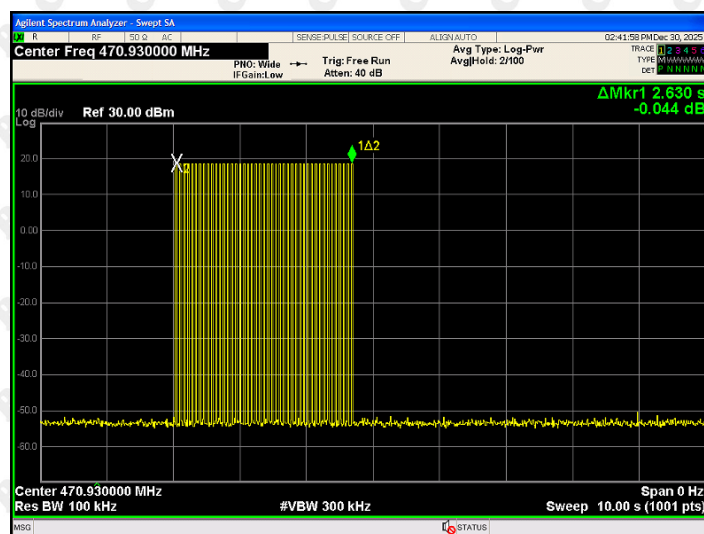


490.3MHz

Transmitting time(S)	Limit (S)	Results
2.690	≤5	Pass

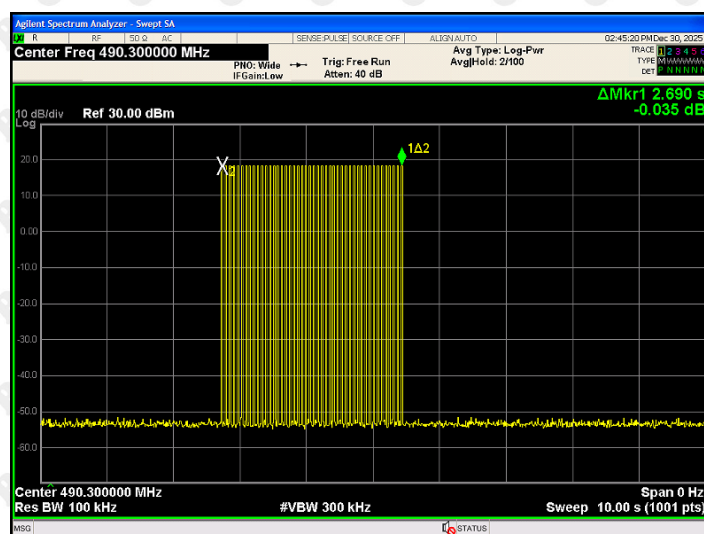


505.95MHz

Transmitting time(S)	Limit (S)	Results
2.690	≤5	Pass

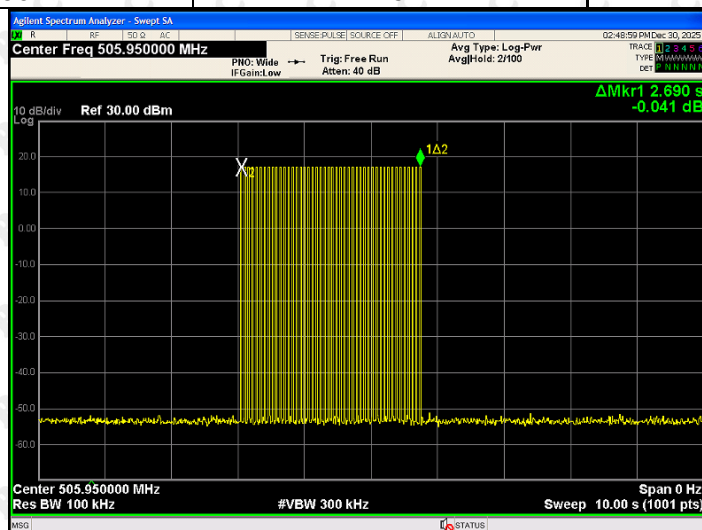


510MHz

Transmitting time(S)	Limit (S)	Results
2.580	≤5	Pass

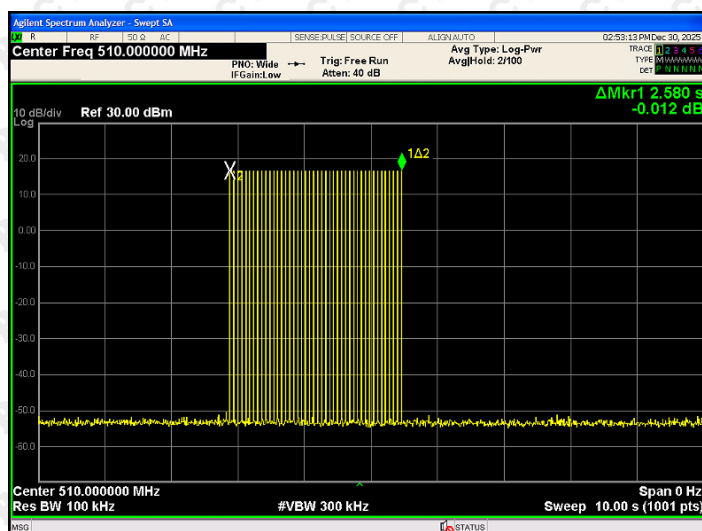

9. OCCUPIED BANDWIDTH

9.1 Block Diagram Of Test Setup

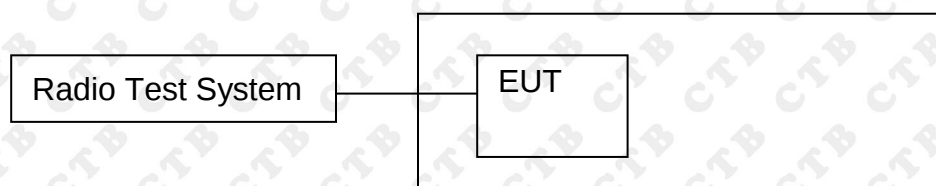

9.2 Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 470.93MHz = 1.1773MHz

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 490.3MHz = 1.2258MHz

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 505.95MHz = 1.2649MHz

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 510MHz = 1.2750MHz


9.3 Test procedure

1. Set RBW = 10 kHz.
2. Set the video bandwidth (VBW) ≥ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

9.4 Test Result


470.93MHz

20dB bandwidth (kHz)	Limit (MHz)	Results
106.1	1.1773	Pass

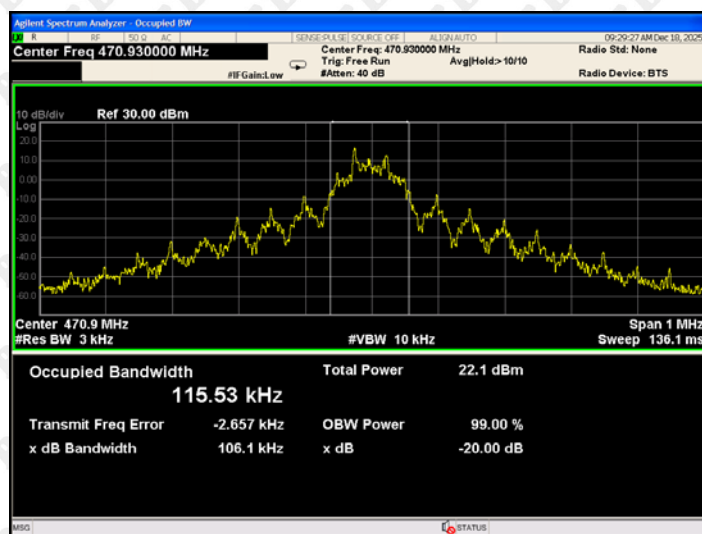


490.3MHz

20dB bandwidth (kHz)	Limit (MHz)	Results
107.1	1.2258	Pass

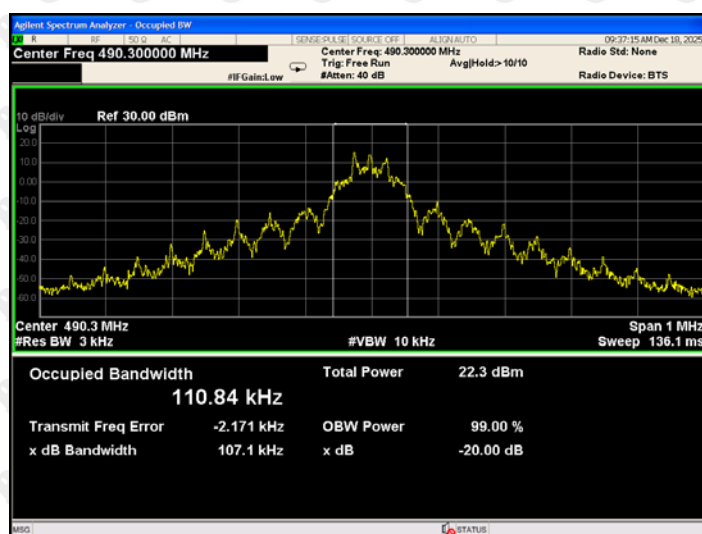


505.95MHz

20dB bandwidth (kHz)	Limit (MHz)	Results
105.7	1.2649	Pass

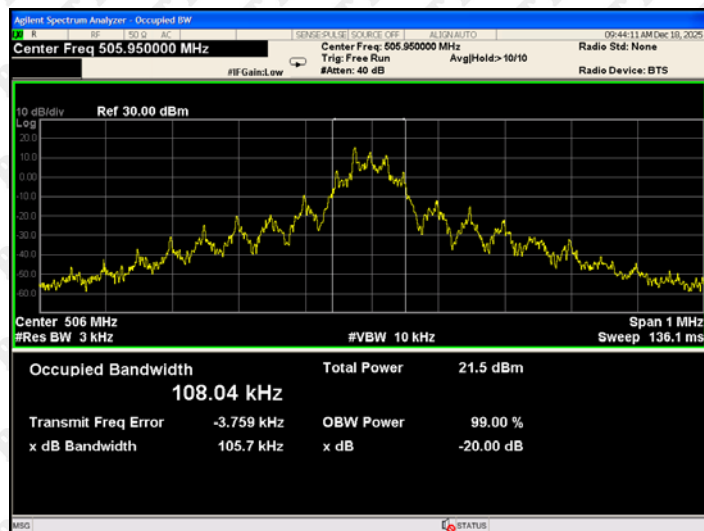

510MHz

20dB bandwidth (kHz)	Limit (MHz)	Results
105.4	1.2750	Pass

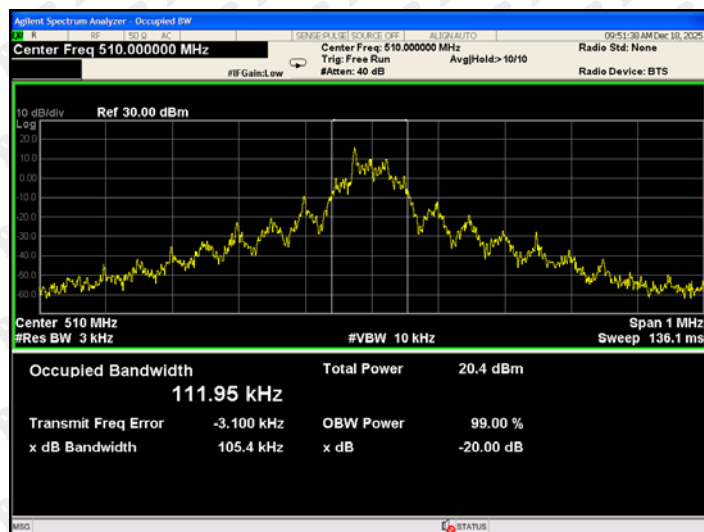

10. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.


11. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

Below 1G

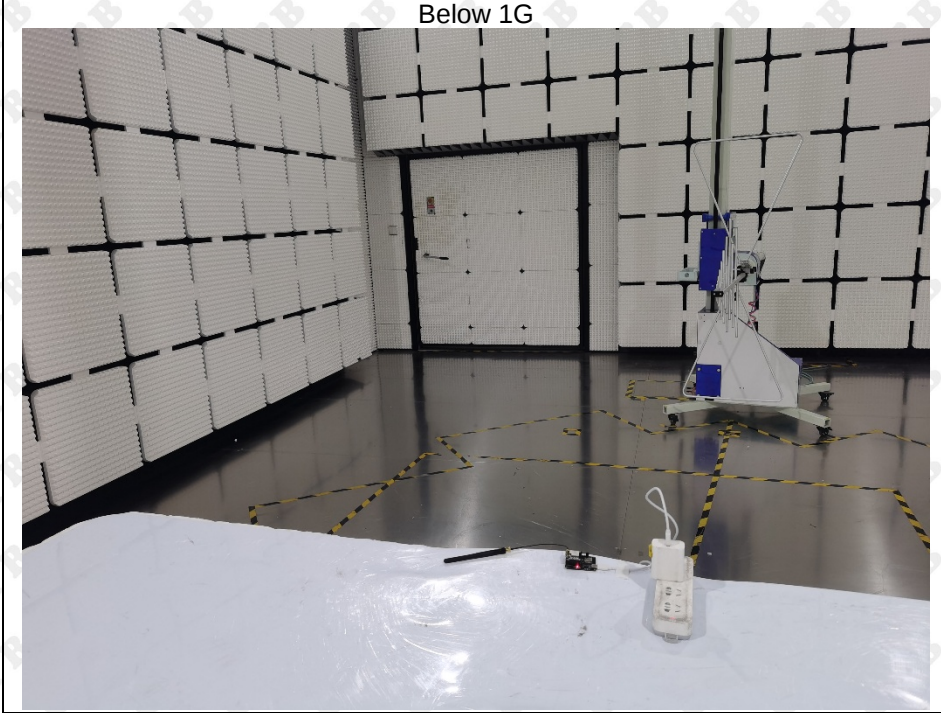

Above 1G

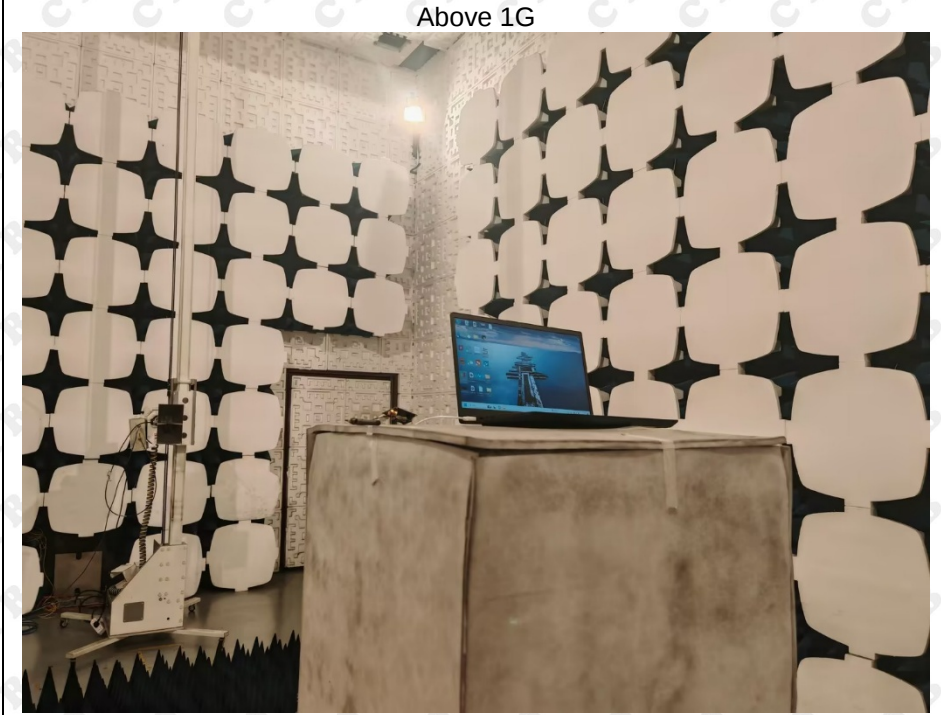

Conducted emission



***** END OF REPORT *****