

Test Report

Electromagnetic Compatibility

Product	Network Controller		
Name and address of the applicant	InCoax Networks AS Utmarksvägen 4 80291 GÄVLE Sweden		
Name and address of the manufacturer	InCoax Networks AS Utmarksvägen 4 80291 GÄVLE Sweden		
Model	In:xtnd control MA 2.5		
Rating	48VDC, 1A Max		
Trademark	In:xtnd		
Serial number	84:93:0c:00:71:E0		
Additional information	/		
Tested according to	FCC CFR 47 Subpart 15B ICES-003, Issue 6		
Order number	373699		
Tested in period	2019-07-04		
Issue date	2019-07-17		
Name and address of the testing laboratory	Nemko Group Nemko AS Philip Pedersens vei 11, 1366 Lysaker, Norway TEL: +47 22 96 03 30 FAX: +47 22 96 05 50  		
An accredited technical test executed under the Norwegian accreditation scheme			
 Prepared by [Thanh Tran]  Approved by [Tore Løvlien]			
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.			

Nemko Group

Nemko AS, Philip Pedersens vei 11, P.O. Box 91, 1366 Lysaker, Norway
TEL +47 22 96 03 30 FAX +47 22 96 05 50 EMAIL info@nemko.com
ENTERPRISE NUMBER NO974404532

GenCode: 1

nemko.com/no

(Nemko template revision: 2019/05)

REPORT REVISIONS

Revision #	Date	Order #	Description
00	2019-07-16	373699	First issued
01	2019-07-17	373699	Minor correction name of applied standards



THIS REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATION(S) TESTED.

It is the manufacturer's responsibility to assure the additional production units of this product are manufactured with identical electrical and mechanical components. The manufacturer is responsible to the authorities for any modifications made to the product, which result in non-compliance to the relevant regulations.

Nemko authorizes the above named Customer to reproduce this report provided it is reproduced in its entirety. Any reproduction of parts of this report requires approval in writing from Nemko.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

Opinions expressed within this report regarding general assessments and qualifications for PASS or FAIL to the standards limits and requirements, are not part of the current accreditation. Neither is opinions expressed regarding model variants covered by the testing performed in this report.

Deviations from, additions to, or exclusions from the test specifications are described in "Testing Report Summary".

DESCRIPTION OF TESTED ITEM(S)

Product description.....:	Network Controller. EUT uses the free capacity in coaxial network to enable high speed internet access, IPTV, VoIP and Web services without the need to pull new cables. It works for all coaxial cable networks used for TV signal distribution.
Model/type.....:	In:xtnd control MA 2.5
Serial number.....:	84:93:0c:00:71:E0
Operating voltage.....:	48VDC, 1A Max Test performed with use adaptor XP Power, model AKM65US48C2 (Input: 100-240V AC 2.0A 50-60Hz; Output: 48.0VDC 1.35A)
Maximum power/current.....:	38W
Insulation class.....:	II
Highest clock frequency.....:	10.3125GHz
Hardware version.....:	1.5
Software version.....:	1.4.2
Mounting position.....:	☒ Table top equipment ☒ Wall/ceiling mounted equipment ☐ Floor standing equipment ☐ Handheld equipment ☒ Rack mounted equipment ☐ Console equipment ☐ Other:

CRITICAL MODULES/PARTS

Description	Manufacturer	Type
Copper Ethernet Transceiver	MikroTik	S+RJ10 SN:9C5C03D80140/846/r2

INPUT/OUTPUT PORTS

Port name and description	Cable		
	> 3m	Attached during test	Shielded
AC mains supply	☐	☒	☐

OPERATING MODES


No.	Description	Applied for testing	
		Emissions	Immunity
1	Networks connection	☒	☐

ACCESSORIES USED DURING TEST

Description	Manufacturer	Type
Switch 1	Netgear	GS110EMX
Switch 2	Netgear	GS110EMX
Router	MicroTic	RB750Gr3


4x Incoax In:xtnd modem	Incoax	MA 2.5
-------------------------	--------	--------

PHOTOS AND DRAWINGS

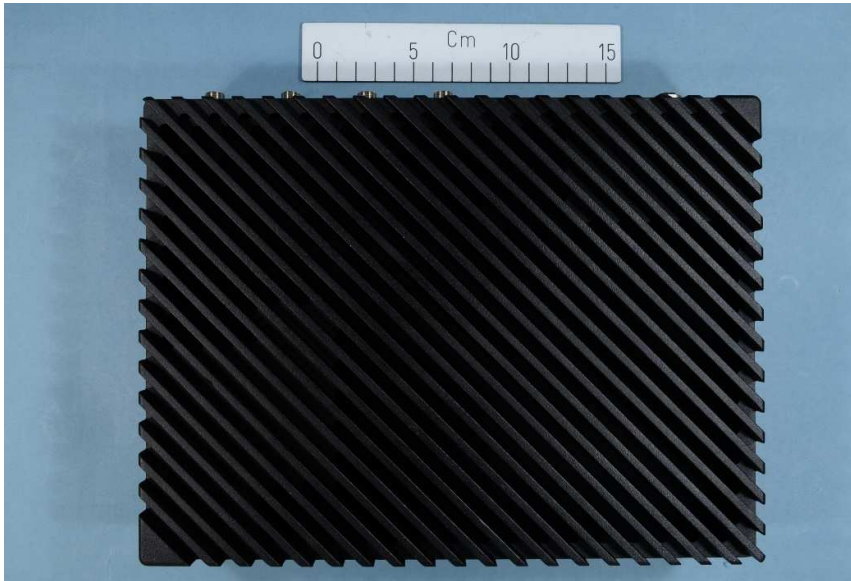Copy of marking label.....:	Power ratings: Nom. 48VDC, 1A Max For CLI: Only use USB-C 2.0 type Convection cooled. Do not cover! Keep away from direct sunlight CE   INCOAX Networks AB Utmarksvägen 4, 802 91 Gävle Sweden
Photo of the test item.....:	 



Drawing of test setup.....:

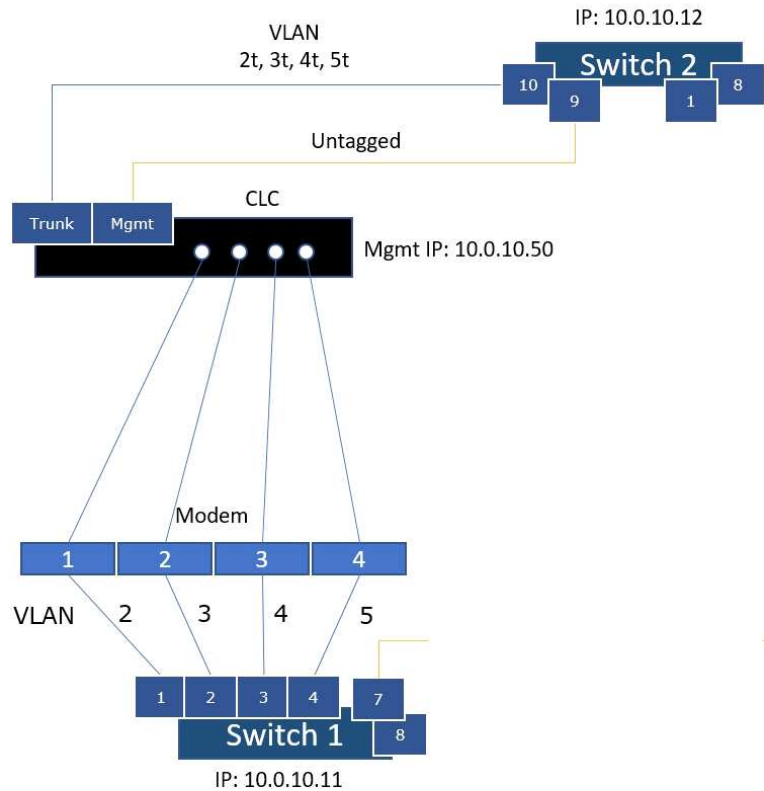

OTHER INFORMATION

Modifications to the test item.....:	None
Additional information.....:	During test the network controller In:xtnd MA2.5 is powered by using an adaptor XP Power, model AKM65US48C2 (Input: 100-240V AC 2.0A 50-60Hz; Output: 48.0VDC 1.35A).

Note: This equipment has been tested with certain cable types and cable configurations. Any changes to these parameters when installed may influence on the EMC properties of this equipment

TEST ENVIRONMENT

Test laboratory.....:	☐ GAUSTAD (Gaustadalleen 30, N-0314 Oslo, Norway) ☒ KJELLER (Instituttveien 6, N-2007 Kjeller, Norway) ☐ LYSAKER (Philip Pedersens vei 11, N-1366 Lysaker, Norway)
Laboratory accreditation.....:	 Norsk Akkreditering – TEST 033 P06 – Electromagnetic Compatibility
Environmental ref. conditions.....:	The climatic conditions during the tests are within limits specified by the manufacturer for the operation of the product and the test equipment. The climatic conditions during tests are within the following limits: Ambient temperature: 15 – 35 °C Relative humidity: 25 – 75 %RH Atmospheric pressure: 86 – 106 kPa If explicitly required by the test standard, or the requirements are tighter than the above; the climatic conditions are recorded and documented separately in this test report.
Calibration.....:	All instruments used in the tests of this test report are calibrated and traceable to national or international standards. Between calibrations test set-ups are controlled and verified on a regular basis by intermediate checks to ensure, with 95% confidence that the instruments remain within their calibrated levels. The instrumentation accuracy is within limits agreed by the IECEE/CTL and defined by Nemko reference document TM-NO/301.
Measurement uncertainties.....:	EMC uncertainty is specified in CISPR 16-4-2. Only if our uncertainty is larger than the maximum value UCISPR, the uncertainty is added to the measurement result. EMC test uncertainties for transient immunity are kept within the requirements of the relevant basic standard. Further information about measurement uncertainties is provided on request

POWER SUPPLY SYSTEM UTILISED

Power supply voltage.....:	☐ 240V AC 50Hz ☐ 230V AC 50Hz ☐ 200V AC 60Hz ☒ 120V AC 60Hz	☐ 400V 3NAC 50Hz ☐ 230V 3AC 50Hz ☐ 12V DC ☐ 24V DC
Grounding conditions	☒ Not grounded ☐ Ground is received from its power supply connection ☐ Additional chassis grounding	

EVALUATION OF PERFORMANCE

PERFORMANCE TESTS

Performance checks.....:	/
Performance tests.....:	/
Monitoring during tests.....:	/
Note 1: Performance check is a short functional test carried out during or after a technical test to confirm that the equipment operates. Note 2: Performance test is a measurement or a group of measurements carried out during and/or after a technical test to confirm that the equipment complies with selected parameters as defined in the equipment standard. Note 3: Monitoring during tests describes which functions were monitored and how.	

PERFORMANCE CRITERIA

Performance criteria is.....:	☒ based on the applied product standard
	☐ based on a declaration from the customer
Criterion A.....:	The device shall continue to operate as intended both during and after the test. No degradation of performance or loss of function is allowed below the expected performance level of the device
Criterion B.....:	The device shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below the expected performance level of the device
Criterion C.....:	Temporary loss of function during test is allowed, provided the function is self-recoverable or can be restored by the operation of the controls

Note: In the subsequent test sections of this report, the required and actual specimen performance during immunity testing is indicated by the nomenclatures as given by the table above (A, B or C).

TEST REPORT SUMMARY

APPLIED STANDARDS

Standards	Titles
FCC CFR 47 Subpart 15	<i>Digital devices - Unintentional radiators, Class B Digital Device</i>
ICES-003, Issue 6	<i>Spectrum Management and Telecommunications Policy. Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus - Limits and Methods of Measurement (Issue 6, June 2016)</i>

TEST SUMMARY

Requirements – Tests	Reference standards	Verdict
Conducted Emissions	FCC Part 15.107 ICES-003, Issue 6, Clause 6.2 ANSI C63.4-2014	PASS
Radiated Emissions (30MHz-1000MHz)	FCC Part 15.109 ICES-003, Issue 6, Clause 6.2 ANSI C63.4-2014	PASS
Radiated Emissions (1GHz-12GHz)	FCC Part 15.109 ICES-003, Issue 6, Clause 6.2 ANSI C63.4-2014	PASS

- PASS : Tested and complied with the requirements
 FAIL : Tested and failed the requirements
 N/A : Test not relevant to this specimen (evaluated by the test laboratory)
 – : Test not performed (instructed by the applicant)
 * : An asterisk (*) placed after the verdict in the Result column indicates test items that are not within Nemko's scope of accreditation
 # : A grid (#) placed after the verdict in the Result column indicates test items that are only partly covered by Nemko's scope of accreditation. Further information is detailed in the test section

NOTES

Note 1: Product standards with dated references to basic standards may have been performed by Nemko AS according to the newest edition of the basic standard. This may impact the compliance criteria or technical performance of the test, still this is considered to be adequate as long as the test is expected to confirm compliance to the intention of the product standard. The table above lists the actual editions of the basic standards which have been used during testing.

Note 2: The choice of immunity test levels could be higher than those specified by the reference standards when we take into account the nature of the specimen and its intended use, or based on customer requests.

Test Results

CONDUCTED EMISSIONS

TEST DESCRIPTION

Method

The reference method for this test is listed in the table under clause TEST SUMMARY.

Set-up

The measurement was performed at the power supply terminal of the specimen. Nominal supply voltage was provided. The specimen was energized and in normal operating mode during the measurement.

- ☐ The specimen and its cables were elevated 10 cm above a ground plane.
 - ☐ The specimen and its cables were elevated 40 cm above a ground plane.
 - ☒ The specimen and its cables were placed 40 cm from a vertical ground plane, 80 cm over ground plane.
 - ☐ The specimen was mounted directly on, and bonded to a ground plane. Cables and auxiliary equipment were elevated by 1 cm
- ☒ The specimen was connected to an Artificial Mains Network (AMN) by its power supply cable, which was adjusted to 100cm length by folding.
- ☐ The specimen was connected to an Artificial Mains Network (AMN) by a 0.8 m shielded power supply cable directly connected to the AMN

Conditions

- ☐ Frequency range was 9kHz – 30MHz.
- ☐ Frequency range was 10kHz – 30MHz.
- ☒ Frequency range was 150kHz – 30MHz.

The measuring bandwidth is 200Hz in the frequency range 9 kHz – 150 kHz. Measurement was made with a 100 Hz step size and 100 ms dwell time.

The measuring bandwidth is 9 kHz in the frequency range 150 kHz – 30 MHz. Measurement was made with a 4.5 kHz step size and 20 ms dwell time.

Measurement uncertainty: ± 3.8 dB (9 kHz – 150 kHz); ± 3.5 dB (150 kHz – 30 MHz)

Instruments used during measurement

Instrument list: AMN: R&S / ENV216 (LR-1665) (11/2019)
EMI Receiver: R&S / ESCI 3 (N-4259) (10/2019)

Conformity

Verdict:


PASS

Test engineer:

Thanh Tran

EMISSION SPECTRUM

Full Spectrum

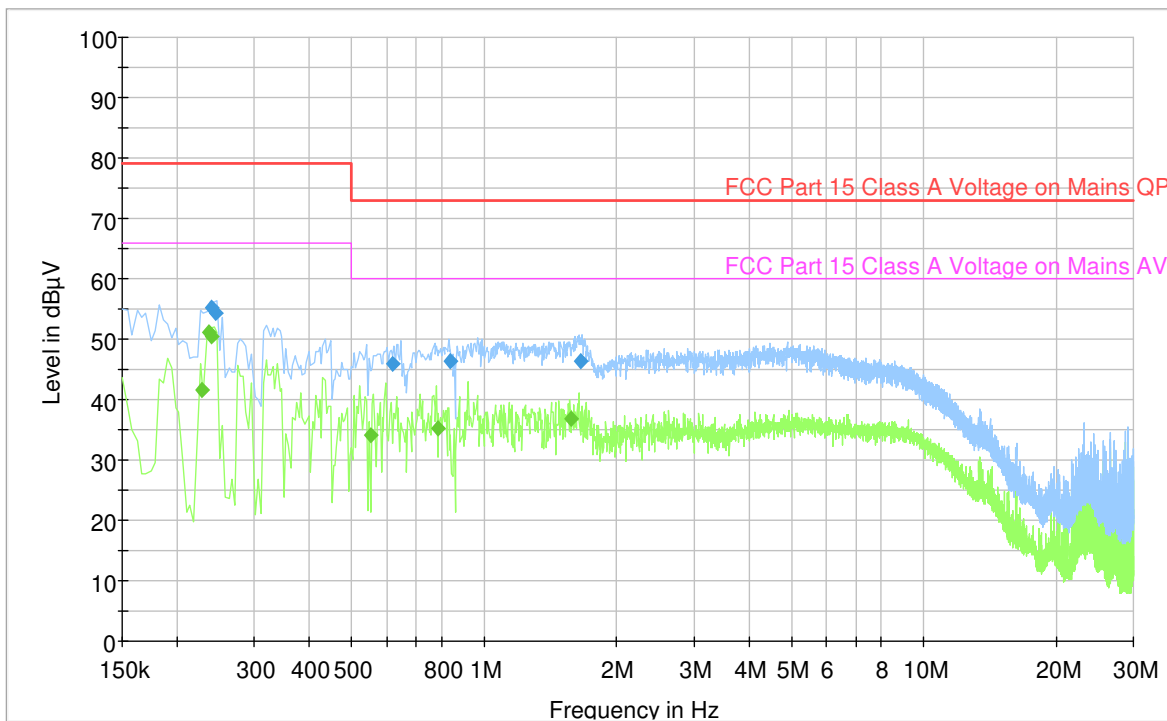

MEASUREMENT DATA

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.228	---	41.58	66.00	24.42	1000	9	N	10
0.236	---	51.23	66.00	14.77	1000	9	L1	10
0.240	55.17	---	79.00	23.83	1000	9	L1	10
0.240	---	50.38	66.00	15.62	1000	9	N	10
0.244	54.28	---	79.00	24.72	1000	9	L1	10
0.552	---	34.13	60.00	25.87	1000	9	L1	10
0.620	45.93	---	73.00	27.07	1000	9	N	10
0.784	---	35.33	60.00	24.67	1000	9	L1	10
0.836	46.37	---	73.00	26.63	1000	9	L1	10
1.576	---	36.79	60.00	23.21	1000	9	L1	10
1.652	46.32	---	73.00	26.68	1000	9	N	9

RADIATED EMISSIONS (30MHZ-1000MHZ)

TEST DESCRIPTION

Method

The reference method for this test is listed in the table under clause TEST SUMMARY.

Set-up

The measurements were performed in a semi-anechoic chamber (SAC). Nominal supply voltage was provided.

The specimen was energized and in normal operating mode during the measurement.

- ☐ The specimen and its cables were elevated 10 cm above the site ground plane, and placed in the centre of the turntable.
- ☒ The specimen and its cables were placed on a table 80 cm above the site ground plane, and placed in the centre of the turntable.

The measuring antenna was located 10 meters from the specimen. Measurements were performed with a hybrid bilog antenna. Antenna elevation = 100-400 cm above the ground reference plane. Specimen rotation = 0-360°.

Conditions

The measuring bandwidth is 120 kHz in the frequency range 30 MHz – 1000 MHz. Frequency sweeps with RBW = 120 kHz and VBW = 1 MHz was applied with a sweep time of 20 ms (step size resolution < 60 kHz).

Measurement uncertainty: ± 4.1 dB (30 MHz – 200 MHz); ± 4.2 dB (200 MHz – 1000 MHz)

Instruments used during measurement

Instrument list: [Antenna, bilog: Sunol / JB3 \(N-4525\) \(11/2019\)](#)
 [EMI Receiver: R&S / ESU40 \(LR-1639\) \(01/2020\)](#)
 [Preamplifier: Sonoma / 310N \(LR-1686\) \(07/2020\)](#)

Conformity

Verdict:


PASS

Test engineer:

Thanh Tran

EMISSION SPECTRUM

Full Spectrum

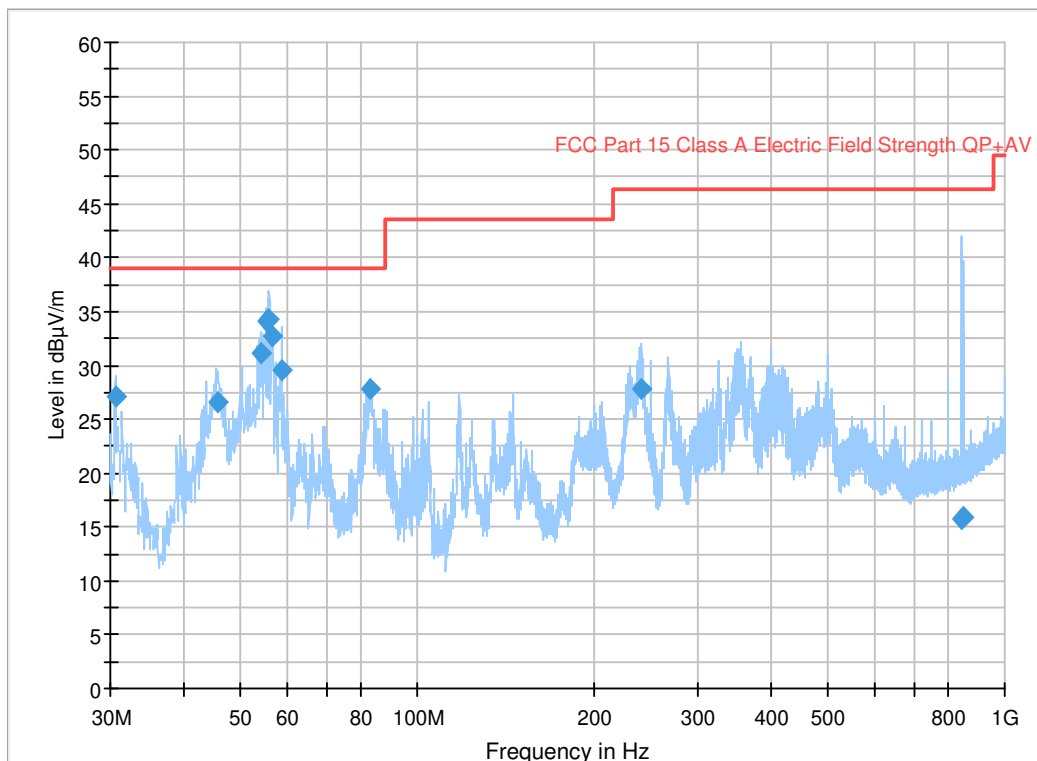

MEASUREMENTS DATA

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.640378	27.14	39.00	11.86	1000.0	120.000	103.0	V	176.0	-10.9
45.571050	26.61	39.00	12.39	1000.0	120.000	375.0	V	125.0	-19.9
54.150472	31.07	39.00	7.93	1000.0	120.000	352.0	V	139.0	-22.4
55.312189	34.11	39.00	4.89	1000.0	120.000	349.0	V	130.0	-22.7
55.892094	34.23	39.00	4.77	1000.0	120.000	308.0	V	136.0	-22.9
56.502633	32.73	39.00	6.27	1000.0	120.000	309.0	V	136.0	-23.1
58.792478	29.49	39.00	9.51	1000.0	120.000	263.0	V	134.0	-23.6
83.115206	27.75	39.00	11.25	1000.0	120.000	185.0	V	323.0	-23.3
240.435978	27.83	46.40	18.57	1000.0	120.000	103.0	V	240.0	-18.5
842.798278	15.81	46.40	30.59	1000.0	120.000	156.0	V	32.0	-6.0
851.299128	15.99	46.40	30.41	1000.0	120.000	340.0	V	34.0	-5.9

RADIATED EMISSIONS (ABOVE 1GHZ)

TEST DESCRIPTION

Method

The reference method for this test is listed in the table under clause TEST SUMMARY.

Set-up

Nominal supply voltage was provided. The specimen was energized and in normal operating mode during the measurement.

- ☒ The measurements were performed in a semi-anechoic chamber (SAC) (calibrated volume: D=1.5m / H=2.0m).
- ☐ The measurements were performed in a fully anechoic room (FAR) (calibrated volume: D=1.2m / H=2.0m).

- ☐ The specimen and its cables were elevated 10 cm above the site ground plane, and placed in the centre of the turntable.
- ☒ The specimen and its cables were placed on a table 80 cm above the site ground plane, and placed in the centre of the turntable.

The reference ground plane was covered with ferrite absorbers in the reflecting area between the specimen and the measuring antenna.

The measuring antenna was located 3 meters from the specimen. Measurements were performed with a double-ridged guide horn antenna. Antenna elevation = fixed at centre of specimen height. Specimen rotation = 0-360°.

Frequency range:

- ☐ 1-2 GHz
- ☐ 1-5 GHz
- ☐ 1-6 GHz
- ☒ 1-40 GHz

Highest internal frequency of specimen:

- ☐ Below 108MHz
- ☐ Between 108MHz and 500MHz
- ☐ Between 500MHz and 1000MHz
- ☒ Above 1000MHz

The measuring bandwidth is 1 MHz in the above frequency range. Frequency sweeps with RBW = 1 MHz and VBW = 1 MHz was applied with a sweep time of 100 ms (proper segmentation of the frequency range was applied to obtain step size resolution < 500 kHz).

Measurement uncertainty: ± 4.8 dB

Instruments used during measurement

Instrument list:

- Antenna Horn: ETS / 3117-PA (LR-1717) (12/2019)
- EMI Receiver: R&S / ESU40 (LR-1639) (01/2020)
- Preamplifier: HP / 8449B (LR-1322) (N/A)
- Antenna Horn: Systron / DBF-520-20 (LR-101) (N/A)
- EMI Receiver: R&S / FSW43 (LR-1690) (01/2020)
- Preamplifier: Miteq / JS4 (LR-1591) (07/2020)
- Antenna Horn: Narda / 638 (LR-1480) (N/A)
- Antenna Horn: Narda / V4607 (LR-099) (N/A)
- EMI Receiver: R&S / ESU40 (LR-1639) (01/2020)

Conformity

Verdict:

PASS


Test engineer:

Thanh Tran
Jan Gunnar Eriksen

EMISSION SPECTRUM (HORIZONTAL POLARIZATION) AND MEASUREMENTS DATA


1-12GHz, Horizontal Polarization:

Full Spectrum

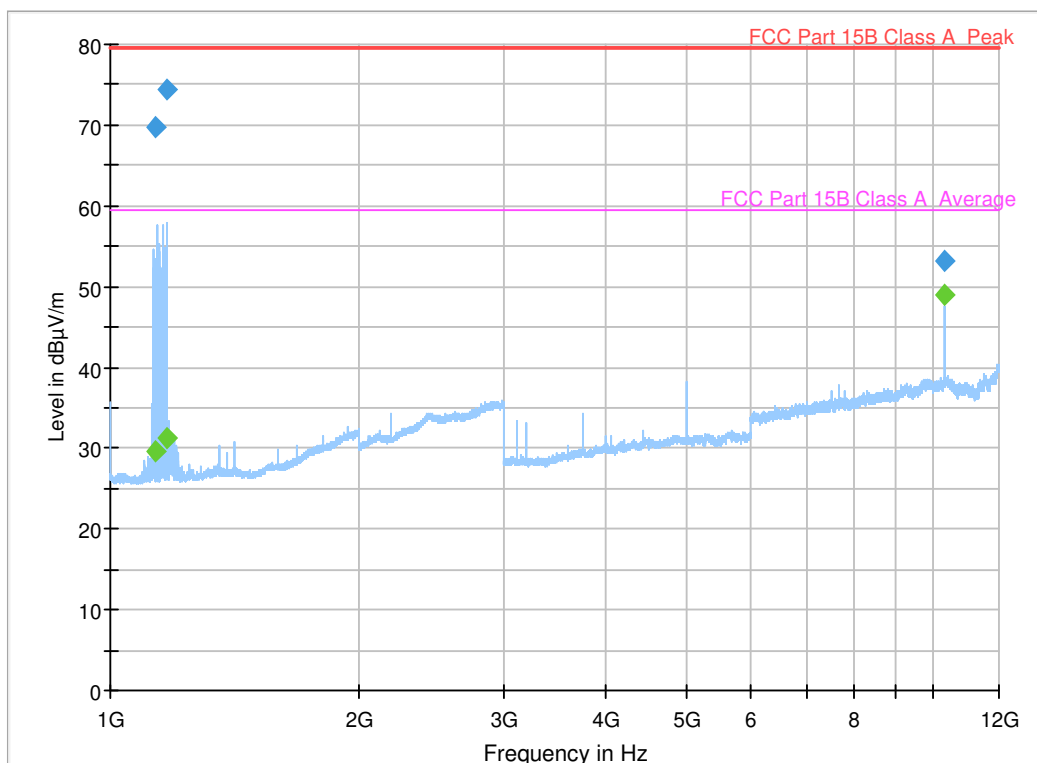


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (deg)	Corr. (dB/m)	Height (cm)	Pol
1136.682000	---	29.69	59.50	29.81	128.0	-15.4	100.0	H
1136.682000	69.70	---	79.50	9.80	128.0	-15.4	100.0	H
1171.888000	---	31.24	59.50	28.26	168.0	-15.3	100.0	H
1171.888000	74.51	---	79.50	4.99	168.0	-15.3	100.0	H
10312.504000	---	48.87	59.50	10.63	225.0	8.7	100.0	H
10312.504000	53.28	---	79.50	26.22	225.0	8.7	100.0	H

12-18GHz, Horizontal Polarization:

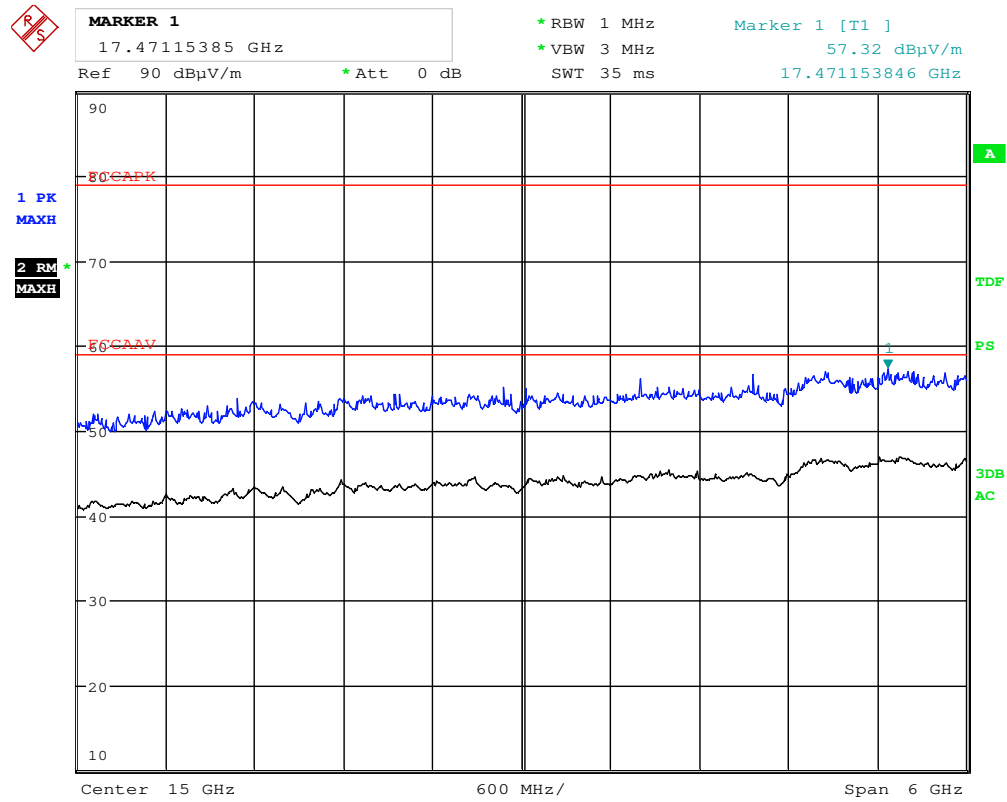


Date: 4.JUL.2019 14:09:59

18-26.5GHz, Horizontal Polarization:

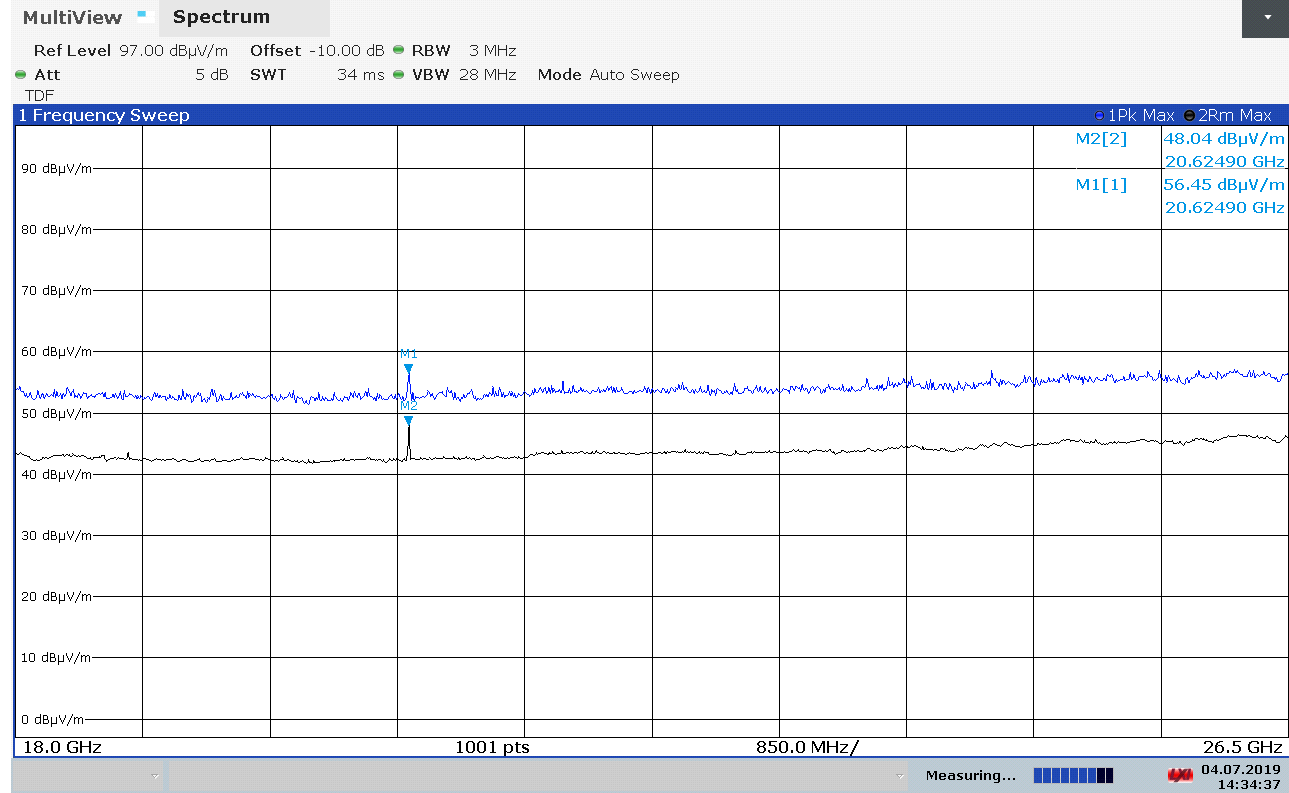


26.5-40GHz, Horizontal Polarization:

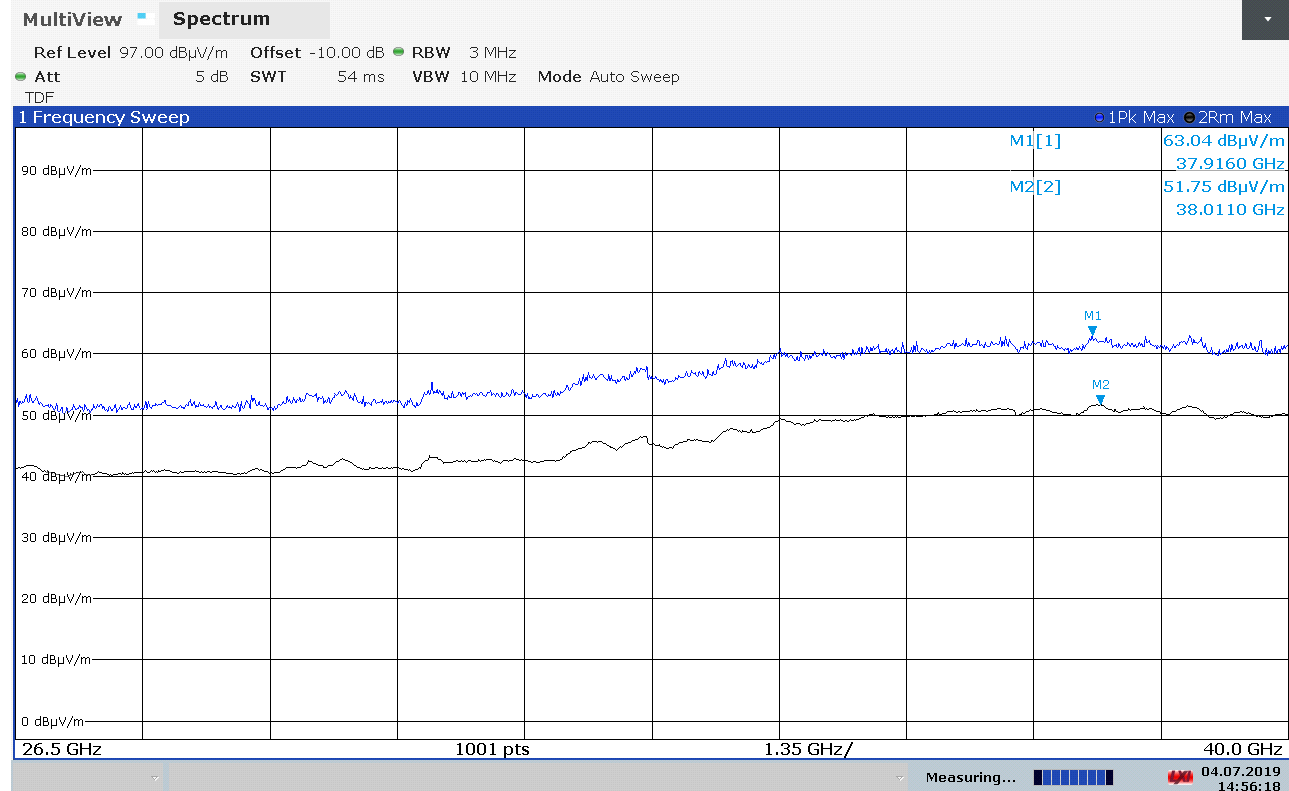

EMISSION SPECTRUM (VERTICAL POLARIZATION) MEASUREMENTS DATA


1-12GHz, Vertical Polarization:

Full Spectrum

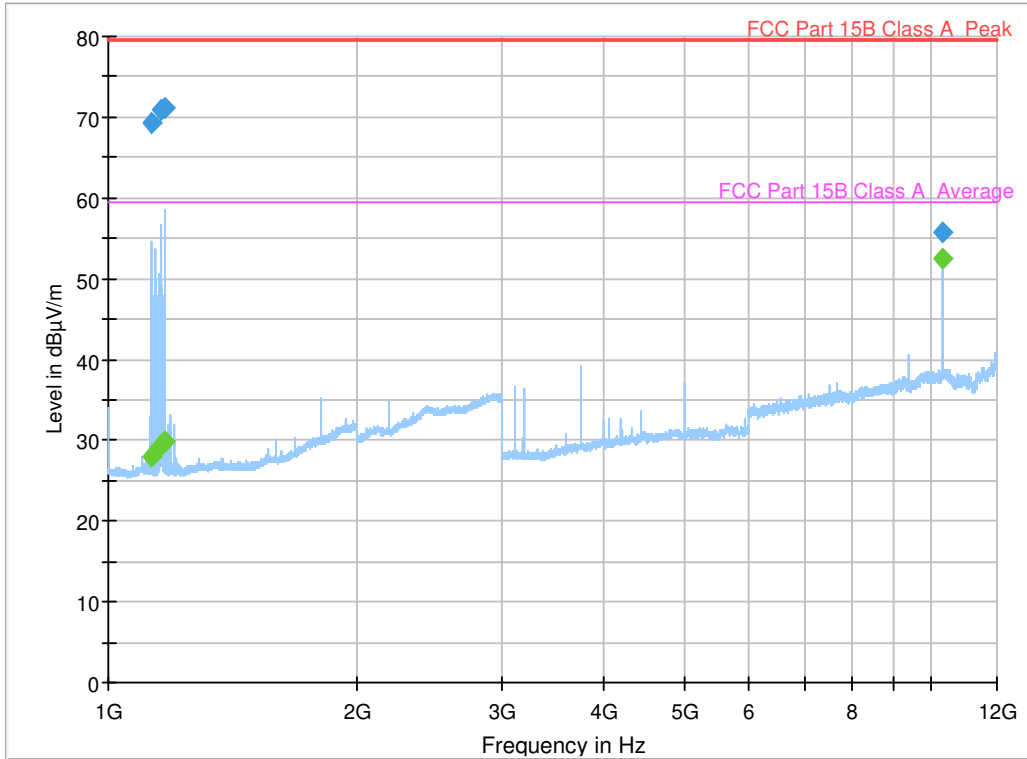


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (deg)	Corr. (dB/m)	Height (cm)	Pol
1128.123000	---	28.08	59.50	31.42	141.0	-15.5	100.0	V
1128.123000	69.27	---	79.50	10.23	141.0	-15.5	100.0	V
1158.380000	70.88	---	79.50	8.62	139.0	-15.3	100.0	V
1158.380000	---	29.42	59.50	30.08	139.0	-15.3	100.0	V
1169.890000	71.22	---	79.50	8.28	138.0	-15.3	100.0	V
1169.890000	---	29.94	59.50	29.56	138.0	-15.3	100.0	V
10312.503333	---	52.53	59.50	6.97	215.0	8.7	100.0	V
10312.503333	55.75	---	79.50	23.75	215.0	8.7	100.0	V

12-18GHz, Vertical Polarization:

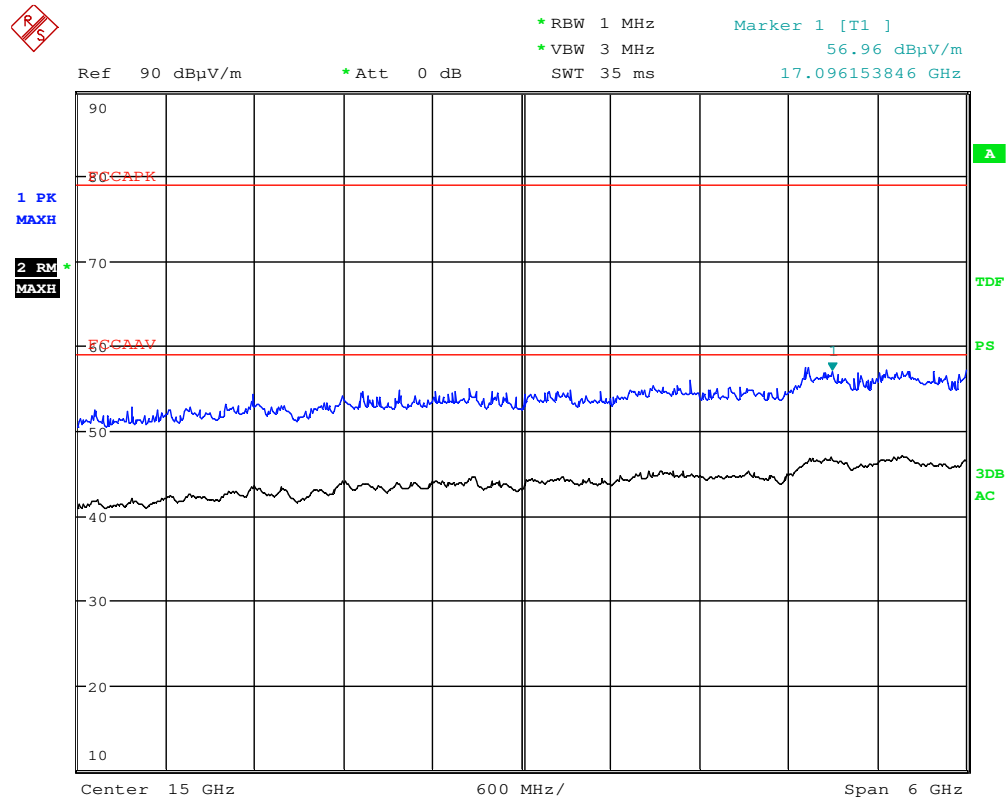


Date: 4.JUL.2019 14:06:35

18-26.5GHz, Vertical Polarization:

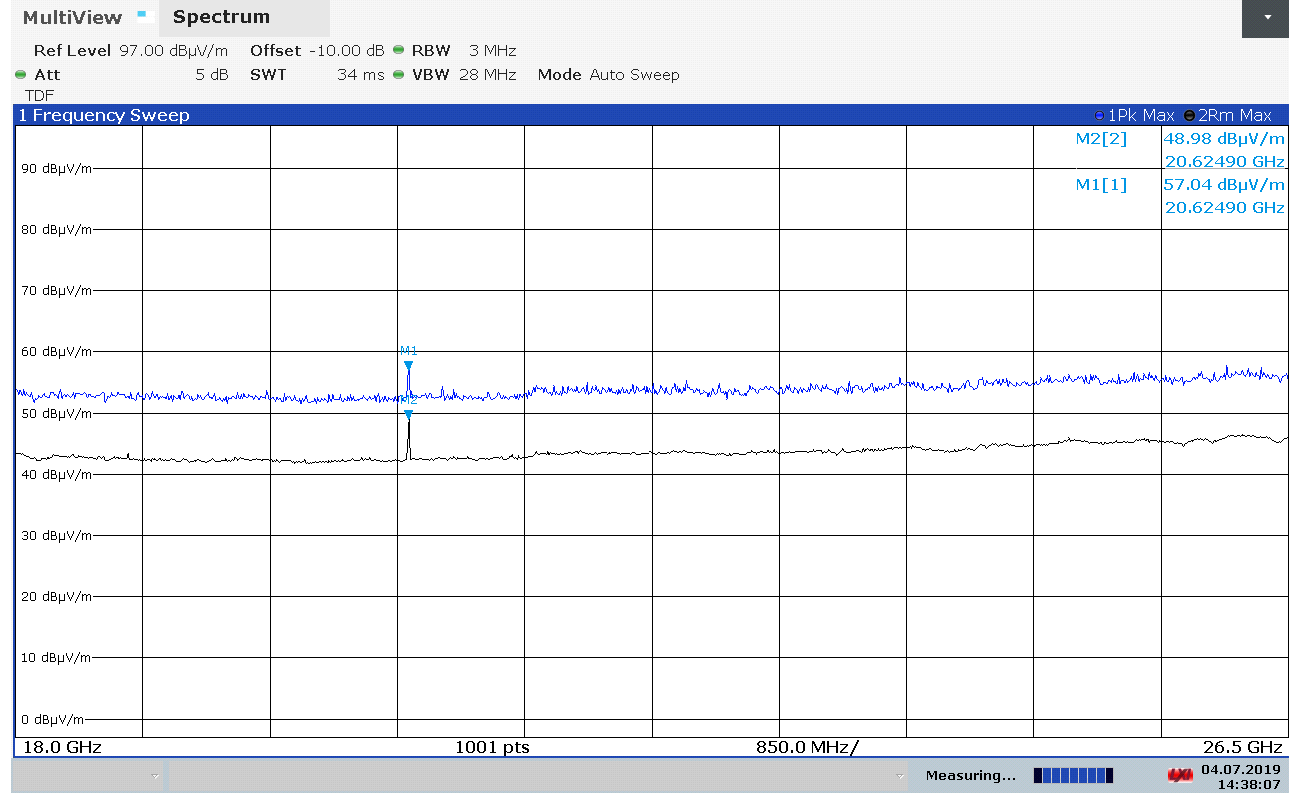






26.5-40GHz, Vertical Polarization:

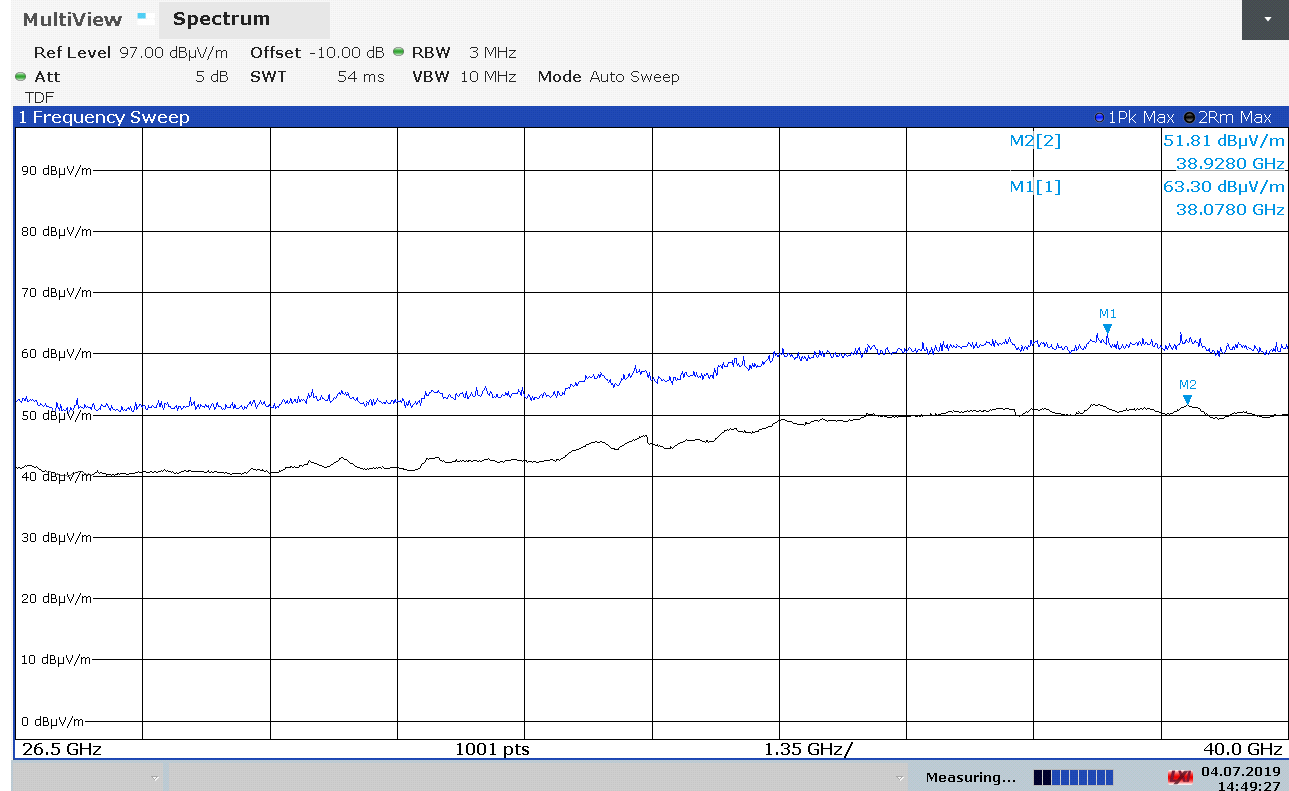

Annexes

PHOTOS

Test set-up for EMC emissions measurements

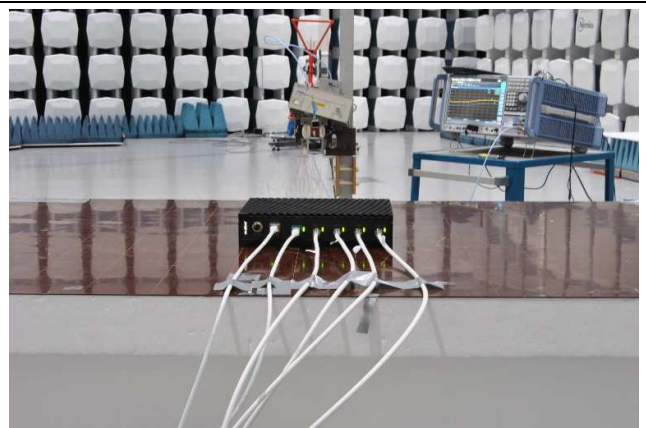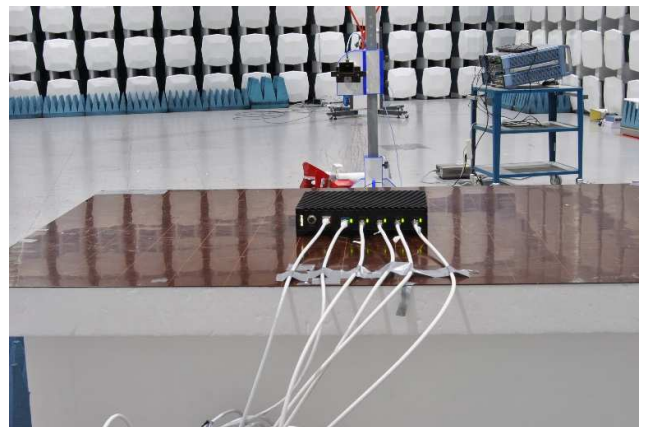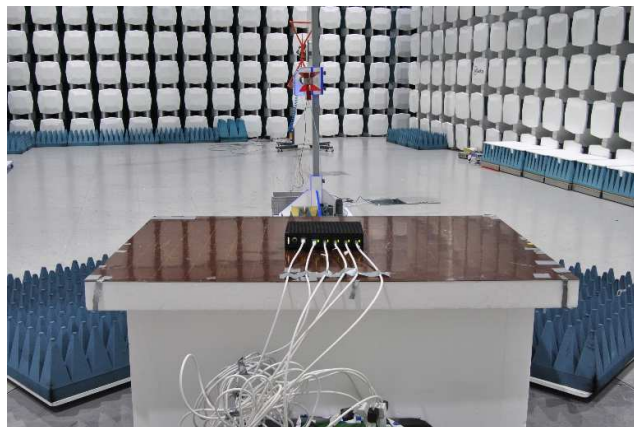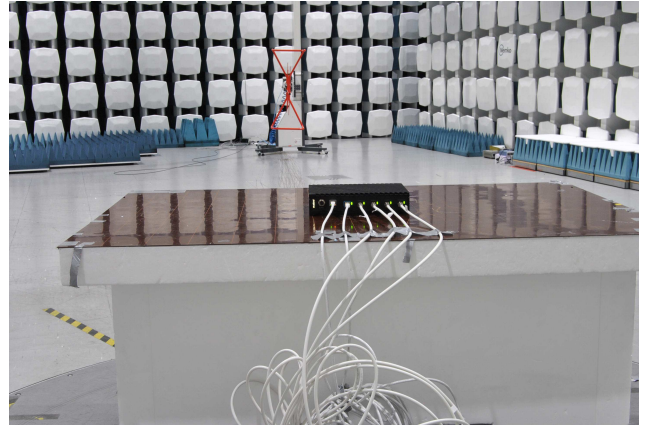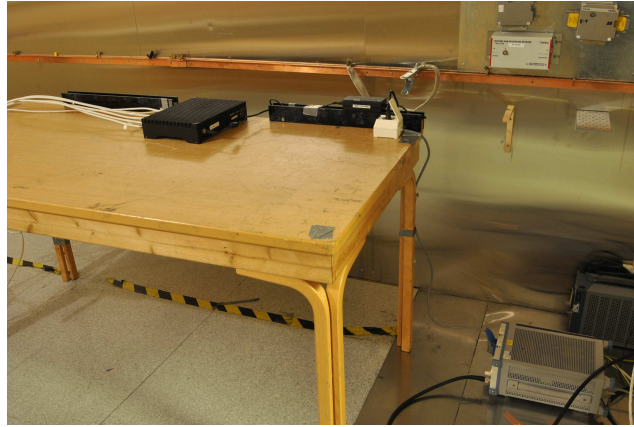




AC adaptor used during test of In:xtnD MA 2.5



AC adaptor used during test of In:xtnD MA 2.5



AC adaptor used during test of In:xtnD MA 2.5



Copper Ethernet Transceiver used during test of In:xtnD MA 2.5