

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	270.0 x 160.0 x 50.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	Bottom face, 2.00	6025.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn656, 2026–01–15

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	80.0 x 80.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–04–25
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	5.67
psPDtot+ [W/m ²]	5.73
H _{max} [A/m]	0.175
E _{max} [V/m]	56.0
max _(Stot) [W/m ²]	6.33
Power Drift [dB]	0.03
IPDn	7.45

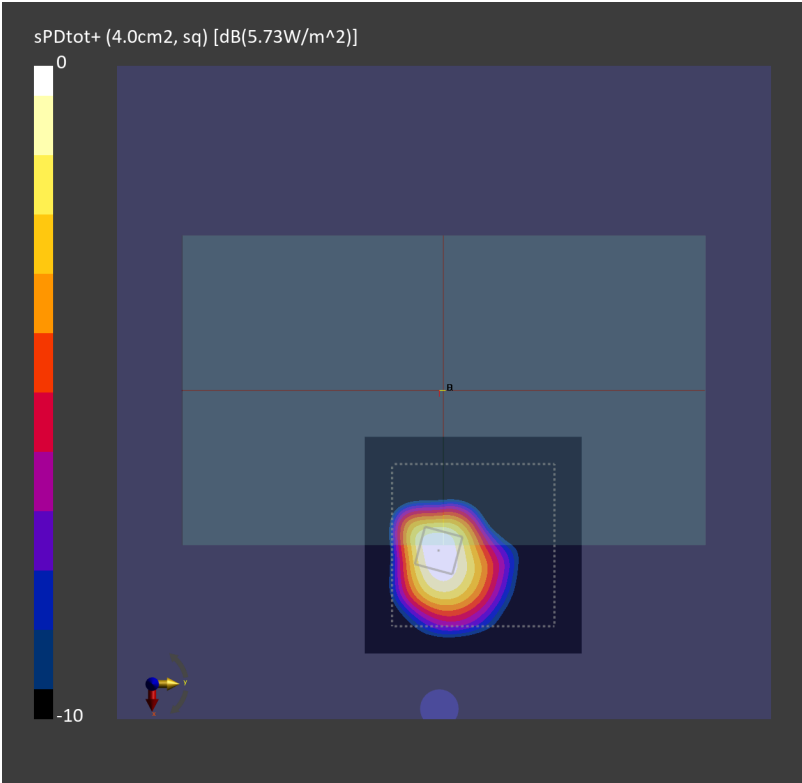

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	270.0 x 160.0 x 50.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	Bottom face, 2.00	6025.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn656, 2026–01–15

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–04–24
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	5.25
psPDtot+ [W/m ²]	5.44
H _{max} [A/m]	0.138
E _{max} [V/m]	52.4
max _(Stot) [W/m ²]	6.53
Power Drift [dB]	0.00
IPDn	5.60

